

Safety Data Sheets

All

All

Lilly

01/20/2022

Safety Data Sheet Index

Binder: Lilly - All

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|--------------------------------|-----------------|--------------|------|
| PRO +LSPR 6PK SAFETY HUNTER GREEN R | Rust-Oleum Corporation | | 06/25/2019 | 21 |
| CITGO CITGARD CNG/LNG Engine Oil, SAE 15W-40 | CITGO Petroleum Corporation | | 12/11/2018 | 27 |
| Snoop liquid leak detector | Swagelok Manufacturing Company | | 04/24/2020 | 38 |
| POWERFOAM | POWER FASTENERS, INC. | | 08/06/2015 | 43 |
| STRIPE INVERTED TIP CLEAR | SEYMOUR OF SYCAMORE | 0000200631 | 02/04/2016 | 52 |
| Valvoline CRIMSON #2GREASE | Valvoline LLC | VV70120 | 03/04/2021 | 56 |
| CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV; CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV); CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD | Hilti, Inc. | | 09/02/2016 | 70 |
| DECON-AHOL WFI Aerosol | Veltek Associates, Inc. | | 11/24/2011 | 83 |
| Food Grade Pure Silicone Mold Release | STONER INCORPORATED | | 06/02/2015 | 91 |
| Argon | Airgas USA, LLC | 1004 | 01/05/2021 | 94 |
| MOBIL RARUS 427 | Exxon Mobil Corporation | 2057 | 02/22/2019 | 105 |
| Fast Dry Degreaser | CRC Industries, Inc. | 02185, 1003239 | 12/29/2017 | 116 |
| VAL81002 GLOSS WHITE IND ALL PURPOSE 6UC | The Valspar Corporation | 465.0081002.076 | 04/10/2015 | 128 |
| Bonding Liquid | DAP Canada Corporation | | 06/19/2015 | 137 |
| SKD-S2 Aerosol | MAGNAFLUX a Div of ITW LTD | | 03/18/2016 | 142 |
| SILIKROIL AEROSOL | Kano Laboratories, Inc. | | 01/10/2020 | 148 |
| Sheila Shine (Liquid) | Sheila Shine Inc. | | 10/10/2019 | 155 |
| 5040 Buttercutt Cutting/Tapping Compound, 5041 Buttercutt Cutting/Tapping Compound | Aervoe Industries Inc | | 10/01/2018 | 168 |
| Valvoline NON-DETERGENT SAE 30 Motor Oil | VALVOLINE INC | 3047 | 10/23/2018 | 175 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|--|-----------------------------------|--------------|------|
| Blue Gold Industrial Cleaner | Modern Chemical, Inc. | 109 (360-MC) | 03/05/2020 | 187 |
| ISOPROPYL ALCOHOL | Techspray | | 01/25/2019 | 192 |
| Checkmor 200 | OAKITE PRODUCTS INC | 2431 | 03/03/2008 | 204 |
| SNAKE OIL | General Pipe Cleaners, Div. of General Wire Spring Company | | 02/13/2014 | 208 |
| Acetone | Sunnyside Corporation | | 03/11/2015 | 216 |
| AEROKROIL | Kano Laboratories, Inc. | | 07/01/2020 | 228 |
| SCIGRIP 1829 General Purpose Cement | SCIGRIP Smarter Adhesive Solutions | | 12/01/2014 | 234 |
| Marvel Air Tool Oil | Marvel Oil Company, Inc | MM85R1 (50100), MM080R (50093) | 01/26/2017 | 236 |
| PS-7030IR | CONTEC, INC. | | 09/28/2018 | 244 |
| Acetone | ScienceLab.com, Inc. | | 10/20/2016 | 250 |
| Methanol | Fisher Scientific | | 02/14/2020 | 266 |
| GREASE GUN X-TRA | PRO CHEM, INC. | | 05/06/2016 | 274 |
| Liquid BR5512-LAB Heavy Duty Liquid Alkaline Cleaner | Diversey, Inc | 02857154, 02857471, 57833330 | 06/09/2020 | 281 |
| Nu-Brite 4x (4291-90) | Nu-Calgon | | 01/03/2019 | 286 |
| RIDGID Extreme Performance Thread Cutting Oil (United States) | Ridge Tool Company | | 05/01/2018 | 295 |
| SPOTCHECK DEVELOPER SKD-S2 | MAGNAFLUX | | 10/26/2004 | 305 |
| MOLYKOTE D Paste | DDP SPECIALTY ELECTRONIC MATERIALS | | 10/17/2018 | 307 |
| PTOUCH 2X +SSPR 6PK SATIN HEIRLOOM WHITE | Rust-Oleum Corporation | | 11/02/2018 | 323 |
| 7008 Crown Brite Galvanize Coating 65% Zinc Rich | Aerovoe Industries Inc. | | 10/02/2019 | 329 |
| 19 OZ GLEME GLASS CLEANER LT 12PK | Claire Manufacturing Co. | | 08/19/2014 | 337 |
| Hilti HIT-HY 200-R | Hilti, Inc. | | 05/18/2015 | 348 |
| KRYLON Industrial RUST TOUGH UTILI-COAT Rust Preventive Enamel (Aerosol) Gray Primer | Krylon Products Group | K20829007 | 10/13/2020 | 356 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|---|--|---------------------|-------------|
| ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS | Zep Inc. | R25435 | 01/22/2018 | 375 |
| Chevron Ulti-Plex Grease EP | Chevron Canada Limited | 250185 | 03/07/2019 | 387 |
| Diesel Fuel, All Types | Hess Corporation | 9909 | 08/30/2012 | 395 |
| Sheila Shine (Liquid) | Sheila Shine, Inc. | | 07/26/2007 | 405 |
| RD PRO 100% Silicone Sealant ? Industrial Grade ? RTV ? Acetoxy Cure | Red Devil, Inc. | | 01/27/2014 | 409 |
| Isopropyl Alcohol 99% | Greenfield Global USA Inc. | | 06/11/2018 | 412 |
| MAP-Pro Premium Hand Torch Fuel | WORTHINGTON CYLINDER CORPORATION | | 04/28/2014 | 420 |
| WL 739 Silver Galvanizing Compound Aerosol | Sprayon Products Group | | 10/15/2020 | 427 |
| VISU-GLOW FLUORESCENT GAS LEAK DETECTOR | LA-CO Industries, Inc. | | 06/07/2018 | 449 |
| MAP-Pro Premium Hand Torch Fuel | Worthington Cylinder Corporation | MAP-Pro, PRO-Max | 03/10/2021 | 455 |
| BREAK-FREE LIQUID MACHINIST, AEROSOL | BREAK-FREE DIV OF SAN/BAR CORP | | 06/21/1993 | 463 |
| PB Penetrating Catalyst | The Blaster Corporation | | 09/24/2019 | 467 |
| Coastal SAE 80W-90 Limited Slip Gear Oil | Warren Oil Company, LLC | | 12/30/2014 | 474 |
| RUST TOUGH Rust Preventive Enamel (Aerosol) Flat Black | Krylon Products Group | | 08/23/2017 | 481 |
| Air Tool Lubricant | Coilhose Pneumatics/ Acme Automotive | ATL004, ATL016, ATL032, ATL128, ATL55, A145-4, A145-16, A145-32, A145-128 | 01/11/2017 | 499 |
| LOCTITE LB 8014 FOOD GRADE ANTI SEIZE known as LOCTITE FOOD GRADE A/S 8OZ AU | Henkel Corporation | | 08/07/2017 | 507 |
| WELDFAST ZC-275 PART A | NOV Fiber Glass Systems | | 07/07/2015 | 513 |
| LPS Heavy-Duty Silicone (Aerosol) | ITW Pro Brands | | 05/12/2017 | 531 |
| Lucas SAE 80W-90 Gear Oil | Lucas Oil Products, Inc. | 10043, 10046, 10066, 10067, 10069 | 12/30/2012 | 540 |
| AEROKROIL | Kano Laboratories, Inc. | | 11/10/2020 | 550 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|---|---------------------------------------|-------------|--------------|------|
| ZEP MORADO SUPER CLEANER | Zep Inc. | | 03/31/2020 | 556 |
| NAPA MAC'S BATTERY TERMINAL PROTECTOR | BALKAMP, INC. | | 02/03/2020 | 568 |
| Isopropyl Alcohol 99% (minimum) | Pharmco Products, Inc. | | 02/11/2013 | 583 |
| Air Tool Lubricant | COILHOSE PNEUMATICS | | 02/11/2016 | 593 |
| PVTLBL SSPR 6PK QUICKC GLOSS WHITE | Rust-Oleum Corporation | | 02/22/2018 | 601 |
| Marking Chalk Blue Dye | Keson LLC | | 01/02/2019 | 608 |
| Valvoline SAE 80W-90 HP GEAR OIL | Valvoline LLC | VV838 | 09/07/2018 | 616 |
| Water-Based Stainless Steel Maintainer | CLAIRE MANUFACTURING COMPANY | | 06/10/2019 | 632 |
| LPS Anti-Spatter | ITW Pro Brands | | 01/29/2017 | 647 |
| Weldcote Blue Coolant & Weldcote Red Coolant | Weldcote Metals Inc. | | 05/29/2015 | 655 |
| OSI H2U High Performance Acrylic Urethane Sealant Window, Door & Siding White 001 | Henkel Corporation | | 04/12/2018 | 662 |
| ABC Dry Chemical Fire Extinguishant | Buckeye Fire Equipment Company | | 08/05/2019 | 668 |
| SKD-S2 Aerosol | MAGNAFLUX a Div of ITW LTD | | 03/18/2016 | 673 |
| Adhesive-Lube | Black Swan Mfg. Co. | | 01/01/2021 | 679 |
| 78E HYDRAULIC JACK OIL 1QT CN | Permatex, Inc. | 80054 | 02/20/2007 | 682 |
| LOCTITE LB 8008 C5-A known as LOCTITE C5-A Copper Based An | Henkel Canada Corporation | | 03/23/2018 | 685 |
| Low VOC Purple Primer | J.C. WHITLAM MANUFACTURING COMPANY | | 04/27/2017 | 691 |
| Gasoline | Shell Chemical LP | X2871 | 01/24/2013 | 697 |
| RIDGID Extreme Performance Thread Cutting Oil (United States) | Ridge Tool Company | | 05/01/2018 | 710 |
| HERCULES Wet Set PVC Aqua Blue, Medium Body, Fast Set | HCC Holdings, Inc. an Oatey Affiliate | | 12/08/2017 | 740 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|---|---------------------------------------|--|--------------|------|
| COP-GRAF Copper and Graphite Based Anti-Seize Compound | ANTI-SEIZE TECHNOLOGY | | 08/16/2017 | 750 |
| HERCULES CLEAR, PURPLE, AND UNPURPLE PRIMER | HCC Holdings, Inc. an Oatey Affiliate | | 12/11/2017 | 755 |
| ALERT ORANGE | Seymour of Sycamore | 0000200670 | 01/06/2021 | 765 |
| Victaulic Lubricant | JTM Products, Inc. | | 07/23/2020 | 768 |
| WELD-ON Plumbing Purple Low VOC Primer for PVC and CPVC Plastic Pipe | IPS Corporation | | 03/01/2020 | 776 |
| Omni-Pak Enamel Blend | Krylon Products Group | | 04/06/2015 | 778 |
| Free All | Federal Process Corporation | | 03/23/2018 | 791 |
| Propane | WORTHINGTON CYLINDER CORPORATION | | 03/21/2021 | 798 |
| 887 Welding Anti-Spatter | AerVOE Industries Incorporated | | 10/07/2014 | 806 |
| MAPP GAS | AIRGAS INC. | | 10/22/2018 | 814 |
| CF 812 Insulating Foam ? W&D | HILTI, Inc. | | 05/17/2012 | 826 |
| Weldcote Blue Coolant & Weldcote Red Coolant | Weldcote Metals Inc. | | 05/29/2015 | 828 |
| Acetone | Sciencelab.com, Inc. | SLA3502, SLA1645, SLA3151, SLA3808 | 11/06/2008 | 835 |
| 5040 Butterscutt Cutting/Tapping Compound 5041 Butterscutt Cutting/Tapping Compound | AerVOE Industries Inc | | 10/01/2018 | 841 |
| WELD-ON 725 Wet 'R Dry Low VOC Cement for PVC Plastic Pipe | IPS Corporation | | 06/01/2018 | 848 |
| RectorSeal No. 5 | The RectorSeal Corporation | | 01/09/2013 | 850 |
| Jim PR-1L or Clear PR-2L Low VOC | The RectorSeal Corporation | 55611, 55613, 55615, 55617, 55910, 55912, 55914, 55918, 55920, 55972, 55981, 55982 | 08/12/2014 | 853 |
| BP Unleaded Gasolines | BP Products North America Inc. | 12631 | 05/23/2011 | 859 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|--|--|--------------|------|
| Nickel-Safe Ice Machine Cleaner (4287-08, 4287-34, 4841-AB, 4841-08) | Nu-Calgon | | 04/29/2016 | 869 |
| Hercules MegaBubble | HCC Holdings, Inc. an Oatey Affiliate | | 02/05/2015 | 877 |
| WELD-ON 714 for CPVC Plastic Pipe | IPS Corporation | | 11/01/2018 | 883 |
| Castrol GTX 10W-30 | BP Lubricants USA Inc. | 459835-US81 | 01/08/2021 | 885 |
| WELD-ON P-68 Low VOC Primer for PVC and CPVC Plastic Pipe | IPS Corporation | | 12/01/2018 | 894 |
| Leak Stopper Clear Patch | Gardner-Gibson Corporation | 0338-GA (1 quart) | 02/06/2015 | 896 |
| Air Tool Lubricant | The Blaster Corporation | 16-ATL, 128-ATL, 5-ATL & 55-ATL | 01/05/2016 | 901 |
| United Duct Sealer (Water-Based) | McGill AirSeal LLC | | 01/05/2018 | 906 |
| Premium Conventional SAE 10W-30 Motor Oil | Valvoline LLC | | 12/02/2019 | 909 |
| 148 MRO Brite Galvanize Coating | AerVOE Industries Inc. | | 07/29/2015 | 924 |
| Hilti HIT-RE 500 | Hilti Inc. | | 05/18/2015 | 932 |
| OATEY #5 PASTE FLUX | OATEY CO. | | 05/01/2009 | 941 |
| Sure-Grip 404 | Carlisle HVAC Products | | 06/01/2018 | 946 |
| 7008 Crown Brite Galvanize Coating 65% Zinc Rich | AerVOE Industries Incorporated | | 10/02/2019 | 961 |
| Propane | Worthington Cylinder Corporation | | 03/21/2021 | 969 |
| WL739 Silver Galvanizing Compound Aerosol | Sprayon Products Group | | 11/27/2019 | 977 |
| MINNCARE® Cold Sterilant MINNCARE® Liquid Disinfectant | MediVators Inc | 176-01-001,176-01-002, 176-01-003,78399-646, 78399-647,78399-648, 78398-229,78397- 983,78397-825,78325-150, 78325-300,78325-400, 78401-505 | 02/19/2017 | 999 |
| Honing & Cutting Oil | CRC Industries, Inc. | SL2523 | 01/27/2016 | 1006 |
| WELD-ON C-65 Low VOC Cleaner for Plastic Pipe | IPS Corporation | | 11/01/2018 | 1013 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|---|--|--|--------------|------|
| DV 16 OMNI-PAK MASTERBLEND EZ TOUCH | Sherwin-Williams Company - Consumer Group - Industrial | | 04/03/2010 | 1015 |
| Weldfast ZC-275 Part B | NOV Fiber Glass Systems | | 05/27/2015 | 1019 |
| Harvey's Purple Primer | William H. Harvey Company | 3402E, 018255, 018256, 018267, 019002, 018003, 019038, 019041, 019044, 019045, 019046, 019048, 019049, 019050, 019051, 019052, 019053, 019054, 019055, 019056, 019057, 019060, 019062, 019063, 019064, 019065, 019066, 019067, 019068, 019069, 019070, 019071, 019072, 019073, 019074, 019075, 019076, 01907 | 12/11/2017 | 1033 |
| HERCULES PVC CEMENT HEAVY BODY, SLOW SET CLEAR AND GRAY | HCC Holdings, Inc. an Oatey Affiliate | 7102E | 12/08/2017 | 1043 |
| PVC Cement (Clear) ? Regular Bodied | Black Swan Mfg. Co. | | 01/01/2019 | 1053 |
| Water-Based Stainless Steel Maintainer | CLAIRE MANUFACTURING COMPANY | | 06/10/2019 | 1056 |
| All Purpose Primer/Cleaner (Clear) | Black Swan Mfg. Co. | | 01/01/2019 | 1071 |
| ZERO TRI SUPER CLEANER/DEGREASER | LPS LABORATORIES | M03528, M03505, M03555 | 09/16/2015 | 1074 |
| HERCULES PVC Cement Clear Medium Body, Medium Set | HCC Holdings, Inc. an Oatey Affiliate | MSDS #92 | 12/08/2017 | 1093 |
| RIDGID Dark Thread Cutting Oil (United States) | Ridge Tool Company | 11471, 11491, 41590, 41600, 41610, 70830 | 05/02/2018 | 1103 |
| Gruvlok Lubricant | ANVIL INTERNATIONAL, LLC | | 07/27/2014 | 1113 |
| MOBIL 1 10W-30 | EXXON MOBIL CORPORATION | | 05/09/2019 | 1119 |
| Crack Check CNF Cleaner (Aerosol) | DynaFlux, Inc. | | 07/18/2018 | 1130 |
| STRIPE GREEN FLUORESCENT | SEYMOUR OF SYCAMORE | | 01/10/2020 | 1134 |
| PRO +LSPR 6PK GLOSS WHITE | Rust-Oleum Corporation | 7592838 | 04/11/2019 | 1138 |
| PB Penetrating Catalyst (Aerosol) | The Blaster Corporation | | 02/03/2016 | 1144 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|---|--|--|--------------|------|
| 19 OZ SPRAYWAY GLASS CLEANER LT 12PK | Sprayway, Inc. | | 08/10/2014 | 1154 |
| Epcon Acrylic 7 | ITW Red Head | | 08/19/2013 | 1164 |
| 13 OZ NAPA MAC'S BATTERY TERMINAL CLEANER 1072 | NAPA Balkamp | 1000028751 | 06/27/2016 | 1172 |
| Low VOC Clear Cleaner | J.C. Whitlam Manufacturing Company | | 04/27/2017 | 1181 |
| MINNCARE® Cold Sterilant MINNCARE® Liquid Disinfectant | MediVators Inc | 176-01-001,176-01-002, 176-01-003,78399-646, 78399-647,78399-648, 78398-229,78397- 983,78397-825,78325-150, 78325-300,78325-400, 78401-505 | 02/19/2017 | 1187 |
| LUBRI-JOINT Water Dispersible Gasket Lubricant | LA-CO Industries, Inc. | | 09/27/2012 | 1194 |
| Rectorseal No.5 Special | The RectorSeal Corporation | 26551, 26431, 26390, 26271, 26191, 26112 | 01/23/2015 | 1199 |
| SPOTCHECK SKC-S | MAGNAFLUX a Div of ITW LTD | | 01/04/2016 | 1205 |
| United Duct Sealer Water Based | McGill AirSeal LLC | | 01/05/2018 | 1217 |
| 120 Matte clear acrylic coating | Aervoe Industries Incorporated | Matte clear acrylic coating | 12/04/2018 | 1220 |
| Citra Jinx Organic All Purpose Cleaner | Claire Manufacturing Company | | 09/22/2019 | 1228 |
| Low VOC Purple Primer | J.C. WHITLAM MANUFACTURING COMPANY | | 02/07/2020 | 1239 |
| Oatey Purple Primer- NSF Listed for PVC and CPVC | OATEY CO. | 1402E, 30755(TV), 30756 (TV), 30757(TV), 30758, 30759, 30927 | 12/05/2017 | 1245 |
| Nashua 357 spray adhesive | Berry Global, Inc. | | 04/10/2017 | 1255 |
| TUB & TILE CAULK - WHITE | Black Swan Mfg. Co. | | 01/01/2019 | 1267 |
| 12 OZ AMERISAFE CON GRD WEB ADH LB 12PK | AMERISAFE | 1000024822 | 06/16/2015 | 1270 |
| LOCTITE LB 8014 FOODGRADE ANTI-SEIZE known as LOCTITE Food Grade Anti-Seize | Henkel Corporation | | 08/07/2017 | 1281 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|--|-----------------------------------|---------------------|-------------|
| Hercules MegaBubble | HCC Holdings, Inc. an Oatey Affiliate | 7322E, 45801, 45802, 45803, 45804 | 02/05/2015 | 1287 |
| FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL | Hilti, Inc. | BU Chemicals | 12/17/2015 | 1293 |
| Moly Dee CF Tapping Fluid | Castrol Industrial North America, Inc. | | 08/27/2012 | 1300 |
| Marvel Air Tool Oil | Marvel Oil Company | | 03/10/2015 | 1306 |
| ?SHEILA SHINE? (Liquid) | SHEILA SHINE, INC. | | 10/10/2019 | 1314 |
| Spotcheck SKC-S ? aerosol | MAGNAFLUX a Div of ITW LTD | | 01/04/2016 | 1327 |
| COLD FIRE 302 | FIREFREEZE WORLDWIDE INC. | | 02/05/2016 | 1339 |
| ISOPROPANOL | MT. HOOD CHEMICAL CORPORATION | | 12/31/1998 | 1341 |
| PVC Cement (Clear) ? Regular Bodied | Black Swan Mfg. Co. | | 01/01/2021 | 1342 |
| 55-611 PITT BULL SPRAY GLOSS WHITE | PPG Industries, Inc. | | 11/16/2019 | 1345 |
| Snoop | Swagelok | | 03/26/2012 | 1361 |
| SpecSeal Series SSS Sealant | Specified Technologies, Inc. | | 05/04/2017 | 1366 |
| Nickel-Safe Ice Machine Cleaner | Nu-Calgon | | 04/29/2016 | 1372 |
| Industrial Grade Silicone ? Acetoxy Cure ? Clear, White & Color | Red Devil, Inc. | 08101,082601 series | 10/01/2017 | 1380 |
| Superior No. 9 | Superior Flux & Mfg. Co. | | 01/01/2018 | 1388 |
| CIP 150 - Alkaline Process & Research Cleaner | STERIS Corporation | 1D15 | 10/29/2018 | 1392 |
| RectorSeal Cold Galvanizing Spray | The RectorSeal Corporation | | 11/28/2012 | 1399 |
| Oatey Clear or Purple Primer Cleaner | Oatey Co. | | 12/07/2017 | 1404 |
| Polyco Adhesive | SPEEDLINE CORP. | | 02/19/2016 | 1413 |
| KRYLON QUIK-MARK Water-Based Inverted Marking Paint (Fluorescent) Fluorescent Red Orange | Krylon Products Group | A03410004 | 10/13/2020 | 1418 |
| MARK OUT | PRO CHEM, INC. | | 05/11/2016 | 1434 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|---|--|---|--------------|------|
| Penephte (aerosol) | Kano Laboratories, Inc. | | 06/06/2018 | 1441 |
| 3M Super 77 Multipurpose Adhesive (Aerosol) | 3M Industrial Adhesives and Tapes Division | 62-4977-2924-4, 62-4977-2928-5, 62-4977-4730-3, 62-4977-4922-6, 62-4977-4923-4, 62-4977-4925-9, 62-4977-4929-1, 62-4977-4930-9, 62-4977-4935-8 7000046597, 7000000931, 7000121447, 7010366502, 7010366503, 7010330395 | 04/13/2021 | 1447 |
| Valvoline CRIMSON GREASE | Ashland | | 02/01/2016 | 1465 |
| CLEAR | Keson LLC | KF00200631 | 01/02/2020 | 1475 |
| CITRIC ACID 50% FCC KOSH | Brenntag Pacific Inc. | | 07/05/2021 | 1479 |
| CAMIE 410 FOOD PROCESSORS SILICONE SPRAY | Camie-Campbell, Inc. | | 06/21/2018 | 1485 |
| 13 OZ NAPA MAC'S BATTERY TERMINAL CLEANER 1072 | NAPA Balkamp | 1000028751 | 06/27/2016 | 1494 |
| CITRA JINX ORGANIC ALL PURPOSE CLEANER | Claire Manufacturing Company | | 09/22/2019 | 1503 |
| Nickel Thred Gard - Anti Seize Compound | Federal Process Corporation | | 03/23/2018 | 1514 |
| Shell Rotella T5 15W-40 | Shell Canada Products | | 08/31/2018 | 1522 |
| VISU-GLOW FLUORESCENT GAS LEAK DETECTOR | LA-CO Industries, Inc. | | 03/24/2020 | 1540 |
| Techspray Blue Shower G3 | Techspray | | 12/05/2018 | 1546 |
| 887 Welding Anti-Spatter | Aervoe Industries Incorporated | | 01/03/2020 | 1558 |
| Castrol GTX Motor Oil (All SAE Grades) 5W-20, 5W-30, 10W-30, 10W-40, 20W-50 | BP LUBRICANTS USA INC | | 11/28/2005 | 1565 |
| Oil Eater Cleaner/Degreaser | KAFKO INTERNATIONAL, LTD. | | 09/01/2019 | 1570 |
| LOCTITE LB 8008 C5-A ANTI-SEIZE known as C5-A Copper Based Anti-Seize | Henkel Corporation | | 03/23/2018 | 1572 |
| STRIPE INVERTED TIP CLEAR | Seymour of Sycamore | 0000200631 | 01/15/2016 | 1579 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|---|--|--|--------------|------|
| HI-POINT 90 | Chemtura Corporation | | 02/27/2007 | 1583 |
| Oatey Industrial Grade Clear Primer | Oatey Co. | 30773, 30774, 30775 | 05/27/2015 | 1591 |
| POWER SOLV 5000 LIQUID 4-1GL | ZEP Inc. | 000000000000055524 | 03/29/2018 | 1601 |
| WELD-ON 717 Low VOC Cements for PVC Plastic Pipe | IPS Corporation | | 06/01/2018 | 1614 |
| SPOTCHECK DEVELOPER SKD-S2 | ITW INDIA PRIVATE LIMITED | | 05/30/2015 | 1616 |
| Crack Check CNF Cleaner (Aerosol) | Dynaflux, Inc. | | 07/18/2018 | 1619 |
| Loctite PL400 Subfloor Adhesive | Henkel Corporation | | 05/22/2018 | 1623 |
| SC-125 | Caseway Industrial Products, Inc. | | 10/01/2020 | 1629 |
| Honing & Cutting Oil | CRC Industries, Inc. | | 01/27/2016 | 1641 |
| ANCHORLUBE G-771 | Anchor Chemical Company | G-771 | 08/26/2018 | 1648 |
| WELD-ON P-70 Primer for PVC and CPVC Plastic Pipe | IPS Corporation | | 06/01/2009 | 1653 |
| GASOILA SOFT SET. | Federal Process Corporation | | 07/01/2016 | 1655 |
| Oatey No. 95 Tinning Flux | Oatey Co. | 30372, 30373, 30374, 30375, 53201, 48356, 48430, 48432, 48433 | 04/10/2018 | 1663 |
| WELD-ON 724 Low VOC Cement for CPVC Plastic Pipe | IPS Corporation | | 01/01/2019 | 1671 |
| 3M Super 77 Multipurpose Adhesive (Aerosol) | 3M Industrial Adhesives and Tapes Division | 62-4977-2924-4, 62-4977-2928-5, 62-4977-4730-3, 62-4977-4922-6, 62-4977-4923-4, 62-4977-4925-9, 62-4977-4929-1, 62-4977-4930-9, 62-4977-4935-8 | 05/21/2018 | 1673 |
| LPS 2 (Aerosol) | ITW Pro Brands | | 08/30/2018 | 1686 |
| CIP 200 Acid-Based Process and Research Cleaner | STERIS Corporation | 1D20 | 09/26/2018 | 1695 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|---------------------------------------|--|--------------|------|
| Oatey PVC Heavy Duty Gray Cement | Oatey Co. | Clear 30850, 30863, 30876 (TV), 30882, 31008(TV), 31011, 31950, 31951, 31952, 31953 Gray 30349, 31093, 31094, 31095, 31105, 31118, 31978, 31979, 31980, 31981, 32050, 32051, 32052, 32210, 32211 | 12/05/2017 | 1702 |
| PVC All Weather Clear Cement | OATEY CO. | | 12/05/2017 | 1712 |
| Snoop | Swagelok Manufacturing Company | | 04/25/2020 | 1722 |
| Loctite Maxi-Coat Heavy Duty Rustproofing | Henkel Loctite Corporation | | 07/31/2003 | 1728 |
| Lucas SAE 80W-90 Gear Oil | Lucas Oil Products, Inc. | | 12/30/2012 | 1733 |
| MAC'S PREMIUM STARTING FLUID | Ashland | | 05/23/2015 | 1743 |
| GASOILA HARD SET. | Federal Process Corporation | | 03/23/2018 | 1765 |
| Crown Spra Tool (Replacement Power Pak 8211) | Aervoe Industries Inc. | | 12/04/2014 | 1773 |
| HERCULES PVC CEMENT HEAVY BODY, SLOW SET CLEAR AND GRAY | HCC Holdings, Inc. an Oatey Affiliate | CLEAR ? 60155, 60160, 60165 GRAY ? 60210, 60215, 60220, 60225 | 12/08/2017 | 1781 |
| Propane | INDIANA OXYGEN CO | | 07/28/2015 | 1791 |
| MRO ALUMINUM | SEYMOUR OF SYCAMORE | 0000011411 | 01/02/2020 | 1801 |
| ROHPER LSPR 6PK FLAT GRAY PRIMER | Rust-Oleum Corporation | V2182838 | 08/15/2018 | 1804 |
| Valvoline CRIMSON #2 GREASE | Valvoline LLC | | 05/22/2017 | 1811 |
| Acetylene | Praxair Canada inc. | | 08/04/2016 | 1823 |
| MINWAX POLYCRYLIC Water-Based Protective Finish Clear Semi-Gloss | Minwax Company | | 03/25/2019 | 1832 |
| MRO RED OXIDE PRIMER | SEYMOUR OF SYCAMORE | | 01/26/2016 | 1845 |
| PURPLE or CLEAR PRIMER | William H. Harvey Company | | 11/01/2009 | 1850 |
| PTOUCH 2X +SSPR 6PK SATIN HEIRLOOM WHITE | Rust-Oleum Corporation | | 04/29/2019 | 1856 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|---|--|--|---------------------|-------------|
| HIT-RE 500 V3 | Hilti, Inc | BU Anchor | 05/13/2020 | 1862 |
| PVTLBL SSPR 6PK QUICKC GLOSS WHITE | Rust-Oleum Corporation | | 02/22/2018 | 1889 |
| Liquid BR5512-LAB Heavy Duty Liquid Alkaline Cleaner | Diversey, Inc. | 02857154, 02857471, 57833330 | 06/09/2020 | 1896 |
| GASOILA HARD SET | Federal Process Corporation | | 03/23/2018 | 1901 |
| WELD-ON 714 Low VOC Cement for CPVC Plastic Pipe | IPS Corporation | | 10/01/2013 | 1909 |
| Goof Off Heavy Duty | W. M. Barr | | 05/04/2015 | 1911 |
| Goof Off Heavy Duty | W. M. Barr | | 05/04/2015 | 1918 |
| DECON-AHOL Sterile WFI Formula 70% | Veltek Associates, Inc. | | 11/06/2002 | 1925 |
| Techspray Blue Shower G3 | Techspray | | 12/05/2018 | 1932 |
| Marking Paint Fluorescent Orange | Valspar | 82012 | 10/09/2020 | 1944 |
| VINYL ESTER RESIN | INTERPLASTIC CORPORATION | | 09/04/2018 | 1960 |
| Alkaline Process and Research Cleaner | STERIS Corporation | 1D15 | 10/29/2018 | 1975 |
| HERCULES CLEAR, PURPLE, AND UNPURPLE PRIMER | HCC Holdings, Inc. an Oatey Affiliate | 60453, 60458, 60460, 60465, 60470, Purple - 60403, 60413, 60415, 60420, 60425 Un-Purple - 60445, 60447 | 12/11/2017 | 1982 |
| WELD-ON 714 Low VOC Cement for CPVC Plastic Pipe | IPS Corporation | | 11/01/2018 | 1992 |
| ALL SEASON T30 SELECT | INGERSOLL-RAND COMPANY | | 01/01/2014 | 1994 |
| Blue Gold Industrial Cleaner | Modern Chemical, Inc. | 109 (360-MC) | 03/05/2020 | 1996 |
| LOCTITE LB 8014 FOODGRADE ANTI-SEIZE known as LOCTITE Food Grade Anti-Seize | Henkel Corporation | | 08/07/2017 | 2001 |
| WELD-ON 725 Wet 'R Dry Low VOC Cement for PVC Plastic Pipe | IPS Corporation | | 06/01/2018 | 2007 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|---|--|--------------|------|
| PVC Medium Clear Cement | Oatey Co. | 30350, 31017, 31018, 31019, 31020, 31021, 31550, 31551, 31552, 31553, 31946, 31947, 31948, 31949, 32222, 32223, 32224, 32225 | 12/01/2017 | 2009 |
| WELD-ON 717 Low VOC Cements for PVC Plastic Pipe | IPS Corporation | | 06/21/2018 | 2019 |
| Harvey P6 Medium Bodied Clear Cement | William H. Harvey Company | Clear - 018150, 018168, 018185, 018257, 018392, 018151, 018170, 018187, 018269, 018393, 018152, 018171, 018190, 018276, 018450, 018153, 018172, 018191, 018277, MVC9962, 018157, 018173, 018192, 018283, PV018158, 018159, 018174, 018193, 018350, PV018159, 018160, 018177, 018194, 018351, PV018890, 01816 | 12/11/2017 | 2021 |
| Wonder Gel Stainless Steel Pickling Gel | Bradford Derustit Corp | | 04/03/2019 | 2031 |
| Scalebuster R | Advanced Separation Technologies | | 08/06/2015 | 2041 |
| MOBIL RARUS 424 | EXXONMOBIL MARINE LIMITED | 201560202010, 400568, 606038-60 | 02/24/2021 | 2048 |
| Loctite PL300 Foamboard Construction Adhesive | Henkel Corporation | | 12/15/2014 | 2060 |
| BIN 1-GL 4 PK PRIMER | Rust-Oleum Corporation | 901 | 07/09/2021 | 2065 |
| MINWAX POLYCRYLIC Water-Based Protective Finish Clear Semi-Gloss | MINWAX Company | | 04/27/2020 | 2071 |
| SPOTCHECK SKL-SP2 - aerosol | MAGNAFLUX a Div of ITW LTD | | 10/31/2018 | 2085 |
| BG In-Force (Aerosol) | BG PRODUCTS, INC. | | 01/09/2019 | 2092 |
| SiliconeSealant?AcetoxyCure? Clear,White&Colors | Red Devil, Inc. | 0810, 0816, 0826 Series | 03/26/2013 | 2105 |
| Chevron Multifak EP | Chevron Products Company - A Division of Chevron U.S. A. Inc. | | 02/06/2019 | 2113 |
| WELD-ON 714 Low VOC Cement for CPVC Plastic Pipe | IPS Corporation | | 10/01/2013 | 2120 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|--|--|--------------|------|
| FS-ONE MAX Hilti Firestop Filler Mastic CFS-FIL | Hilti, Inc. | | 03/06/2015 | 2122 |
| MAC'S PREMIUM STARTING FLUID | Ashland | | 05/23/2015 | 2127 |
| Isopropyl Alcohol | Megaloid Laboratories Limited | | 11/01/2013 | 2149 |
| PRO +LSPR 6PK SAFETY RED | Rust-Oleum Corporation | | 01/03/2019 | 2153 |
| Oatey No. 95 Tinning Flux | Oatey Co. | | 04/10/2018 | 2159 |
| VINYL ESTER RESIN | INTERPLASTIC CORPORATION | CORVE8190 | 05/30/2015 | 2167 |
| Decon-Ahol WFI Formula | Veltek Associates, Inc. | SDS VEL-104- NONAEROSO | 11/24/2018 | 2181 |
| Coastal SAE 80W-90 Limited Slip Gear Oil | Warren Oil Company, LLC | WUI-060 | 12/30/2014 | 2190 |
| LUPEROX DDM-9 | Arkema Inc | 010000 | 10/18/2015 | 2197 |
| NEW RAPID TAP | Relton Corporation- Chemical Division | | 02/25/2019 | 2220 |
| SC-125 | Caseway Industrial Products, Inc. | 6120 | 10/01/2020 | 2227 |
| Oatey Dark Cutting Oil | Oatey Co. | | 04/11/2018 | 2239 |
| Oil Eater Cleaner/Degreaser | KAFKO INTERNATIONAL, LTD. | | 01/09/2019 | 2244 |
| STRIPE GREEN FLUORESCENT | SEYMOUR OF SYCAMORE | | 09/29/2014 | 2246 |
| Oatey Purple Primer- NSF Listed for PVC and CPVC | Oatey Co. | 1402E, 30755(TV), 30756 (TV), 30757(TV), 30758, 30759, 30927 | 12/05/2017 | 2250 |
| Oxygen, compressed | Praxair, Inc. | | 01/27/2021 | 2260 |
| Premium Conventional SAE 10W-30 Motor Oil - US-809491 | Valvoline LLC | VV129 | 09/23/2020 | 2270 |
| B-100 Butyl Rubber Sealant | ADCO PRODUCTS, INC. | | 05/24/2007 | 2285 |
| Jim PR-1L or Clear PR-2L Low VOC | The RectorSeal Corporation | | 01/23/2015 | 2289 |
| Oatey Clear Cleaner | Oatey Co. | | 04/11/2018 | 2294 |
| CLEAR | Keson LLC | KF00200631 | 01/02/2020 | 2303 |
| LUPEROX DDM-9 | Arkema Inc | | 10/18/2015 | 2307 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|--------------------------------------|-------------------------|--------------|------|
| ANSUL ABC Multipurpose Dry Chemical Agent - Stored Pressure System | Tyco Fire Protection Products | 435028 | 02/13/2019 | 2330 |
| MOBIL RARUS 424 | AMPOL AUSTRALIA PTY LTD | 201560202010, 606038-85 | 03/22/2021 | 2339 |
| CAT DEO 15W-40 (DIESEL ENGINE OIL) | CATERPILLAR OF AUSTRALIA PTY LTD | 20202040B020, 478669 | 05/03/2019 | 2349 |
| Castrol GTX 10W-30 | BP Lubricants USA Inc. | 459835-US81 | 01/08/2021 | 2359 |
| ANCHORLUBE G771 | Anchor Chemical Company | | 01/05/2015 | 2368 |
| Oatey Dark Cutting Oil | Oatey Co. | | 04/11/2018 | 2371 |
| BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS | Zep Inc. | 000000000001042109 | 01/22/2018 | 2376 |
| Sure-Grip 404 | Carlisle HVAC Products | | 06/01/2018 | 2388 |
| formula 8 | Fluoramics Inc. | | 01/09/2015 | 2403 |
| MAPP GAS | Airgas, Inc. | | 10/22/2018 | 2406 |
| RUST TOUGH Rust Preventive Enamel (Aerosol) Flat Black | Krylon Products Group | K00789007 | 11/27/2019 | 2418 |
| WELD-ON P-68 Low VOC Primer for PVC and CPVC Plastic Pipe | IPS Corporation | | 12/01/2018 | 2437 |
| PRO +LSPR 6PK SAFETY GREEN | Rust-Oleum Corporation | | 11/30/2020 | 2439 |
| SPRUCE RED OXIDE PRIMER | Seymour of Sycamore | 0000980026 | 10/13/2020 | 2445 |
| OMNI-FILL Enamel Blend (EN-16) | Specialty Aerosols | | 05/12/2020 | 2449 |
| FORMULA-8 | Fluoramics Inc. | | 01/09/2015 | 2465 |
| Clorox Commercial Solutions Clorox Germicidal Bleach | Clorox Professional Products Company | | 07/23/2018 | 2468 |
| SP 615 Heavy Duty Paint Remover Aerosol | Sprayon Products Group | | 12/01/2019 | 2478 |
| Clorox Healthcare Bleach Germicidal Cleaner | The Clorox Company | | 01/15/2019 | 2495 |
| WELD-ON 705 Low VOC Cements for PVC Plastic Pipe | IPS Corporation | | 06/21/2018 | 2502 |
| WELD-ON P-70 Low VOC Primer for PVC and CPVC Plastic Pipe | IPS Corporation | | 01/01/2019 | 2504 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|---------------------------------------|---|--------------|------|
| HERCULES PVC Cement Clear Medium Body, Medium Set | HCC Holdings, Inc. an Oatey Affiliate | 60003, 60013, 60015, 60020, 60025 Export Part Numbers: 60003E, 60013E, 60015E, 60020E, 60025E | 12/08/2017 | 2506 |
| Weldfast ZC-275 Part A | NOV Fiber Glass Systems | | 01/01/2017 | 2516 |
| Paraformaldehyde | Fisher Scientific | | 02/14/2020 | 2530 |
| RUST TOUGH Rust Preventive Enamel (Aerosol) Dark Machinery Gray (ASA-49) | Krylon Products Group | | 11/27/2019 | 2538 |
| SPOTCHECK PENETRANT SKL-SP1 | MAGNAFLUX | | 05/01/2012 | 2558 |
| PVC All Weather Clear Cement | Oatey Co. | 1105E | 05/27/2015 | 2582 |
| Service Pro Motor Oil | Warren Oil Company | | 04/23/2015 | 2592 |
| ZEP POWER SOLV 5000 | ZEP Inc. | 000000000000055524 | 02/18/2021 | 2599 |
| WELD-ON C-65 Low VOC Cleaner for Plastic Pipe | IPS Corporation | | 12/01/2019 | 2612 |
| RIDGID Endura-Clear Thread Cutting Oil | Ridge Tool Company | 32803, 32808, 32813, 32818 | 03/30/2017 | 2614 |
| Hawg Wash | Milwaukee Electric Tool Corporation | | 03/01/2015 | 2623 |
| CIP 200 Acid-Based Process and Research Cleaner | STERIS Corporation | 1D20 | 09/26/2018 | 2630 |
| HIT-HY 200-R | Hilti, Inc. | BU Anchor | 10/15/2018 | 2637 |
| Acetone HPLC Grade | EMD Millipore Corporation | AX0115 | 07/02/2018 | 2648 |
| MOBIL 1 10W-30 | EXXON MOBIL CORPORATION | | 05/09/2019 | 2660 |
| ABC DRY CHEMICAL FIRE EXTINGUISHANT | BUCKEYE FIRE EQUIPMENT COMPANY | | 04/01/2015 | 2671 |
| WELD-ON 702 Low VOC PVC Plastic Pipe Cement | IPS Corporation | | 06/21/2018 | 2680 |
| Gasoline All Grades | Hess Corporation | | 08/30/2012 | 2682 |
| 51D PIPE JOINT COMPOUND 16.2 FL.OZ | ITW Permatex | | 05/03/2019 | 2698 |
| PRO +LSPR 6PK GLOSS WHITE | Rust-Oleum Corporation | 7592838 | 04/11/2019 | 2708 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|---|--|---|--------------|------|
| 55-653 PITT BULL SPRAY COLD GALVANIZING | PPG Industries, Inc. | | 11/16/2019 | 2714 |
| SNAKE OIL | General Pipe Cleaners, Div. of General Wire Spring Company | | 02/15/2014 | 2731 |
| Superior No. 9H | Superior Flux & Mfg. Co. | | 01/01/2016 | 2739 |
| BP Unleaded Gasolines | BP Products North America Inc. | 12631 | 12/16/2014 | 2743 |
| PRO +LSPR 6PK SAFETY RED | Rust-Oleum Corporation | | 01/03/2019 | 2765 |
| ABC Dry Chemical Fire Extinguishant | AMEREX CORPORATION | CH555, F13, F11 | 03/13/2018 | 2771 |
| Propane | Airgas USA, LLC | | 05/06/2018 | 2783 |
| HANDI-FOAM HC GUN FOAM, HANDI-FOAM HC STRAW FOAM, HANDI-FOAM FIREBLOCK, HANDI- FOAM FIREBLOCK WEST, HANDI- FOAM BLACK, HANDI-FOAM EXTREME, HANDI-FOAM WINDOW & DOOR, HANDI-FOAM WINDOW & DOOR WEST, FAST FOAM FIREBLOCK, FAST FOAM WINDOW & DOOR - Fast Foam Extreme, Handi-Seal, Extreme Window & Door and Handi-Foam Extreme Window & Door Polyurethane Foam Sealants | FOMO PRODUCTS, INC. | | 01/01/2015 | 2795 |
| 120 Matte clear acrylic coating | Aervoe Industries Inc. | | 12/04/2018 | 2803 |
| METALCLAD SpeedAlloy QS Base | ENECON Corporation | | 02/17/2016 | 2811 |
| MOBIL RARUS 427 | Exxon Mobil Corporation | 201560202040, 606202-00, 970996 | 06/15/2007 | 2819 |
| Oatey CPVC Flowguard Gold One- Step Yellow Cement | Oatey Co. | | 12/06/2017 | 2827 |
| RIDGID Dark Thread Cutting Oil (United States) | Ridge Tool Company | 11471, 11491, 41590, 41600, 41610, 70830 | 03/27/2017 | 2837 |
| Diesel Fuel, All Types | Hess Corporation | 9909 | 08/30/2012 | 2866 |
| THREADZIT | SYNTHETIC LUBRICANTS, INC | | 02/09/2012 | 2876 |
| LPS Heavy-Duty Silicone (Aerosol) | ITW Pro Brands | 01516, 51516 | 08/27/2019 | 2879 |
| Valvoline SAE 80W-90 HP GEAR OIL | Valvoline LLC | | 09/07/2018 | 2887 |

| Product Name | Manufacturer Name | Part Number | Version Date | Page |
|--|-------------------------------|--------------------|---------------------|-------------|
| Marathon Petroleum Regular Unleaded Gasoline | Marathon Petroleum Company LP | | 05/14/2015 | 2903 |
| KRYLON Metallic Spray Paint Bright Silver | Krylon Products Group | 1406 | 11/10/2021 | 2920 |

Safety Data Sheet



1. Identification

Product Name: PRO +LSPR 6PK SAFETY HUNTER GREEN **Revision Date:** 6/25/2019
Product Identifier: 7538838 **Supercedes Date:** 5/12/2017
Recommended Use: Topcoat/Aerosols
Supplier: Rust-Oleum Corporation **Manufacturer:** Rust-Oleum Corporation
 11 Hawthorn Parkway 11 Hawthorn Parkway
 Vernon Hills, IL 60061 Vernon Hills, IL 60061
 USA USA
Preparer: Regulatory Department
Emergency Telephone: 24 Hour Hotline: 847-367-7700

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

30% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|--|
| Carcinogenicity, category 2 | H351 | Suspected of causing cancer. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Eye Irritation, category 2A | H319 | Causes serious eye irritation. |
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| STOT, repeated exposure, category 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|-----------|--|
| P201 | Obtain special instructions before use. |
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P260 | Do not breathe dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |

| | |
|----------------|--|
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|------------------------------|----------------|-------------------|--------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| n-Butyl Acetate | 123-86-4 | 10-25 | GHS02-GHS07 | H226-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| n-Butane | 106-97-8 | 2.5-10 | GHS04 | H280 |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 2.5-10 | GHS02-GHS07 | H226-315-319-332 |
| Barium Sulfate | 7727-43-7 | 2.5-10 | GHS07 | H332 |
| Ethyl 3-Ethoxypropionate | 763-69-9 | 1.0-2.5 | GHS06 | H331 |
| Ethylbenzene | 100-41-4 | 1.0-2.5 | GHS02-GHS07-GHS08 | H225-304-332-351-373 |
| Nanoscale Titanium Dioxide | 1317-80-2 | 0.1-1.0 | Not Available | Not Available |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only in a well-ventilated area. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Keep away from heat, sparks, flame and sources of ignition. Contents under pressure. Do not expose to heat or store above 120 ° F. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|------------------------------|-----------|-----------------------|---------------------|--------------------|----------------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 20.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| Propane | 74-98-6 | 20.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 5.0 | 100 ppm | 150 ppm | 100 ppm | N.E. |
| Barium Sulfate | 7727-43-7 | 5.0 | 5 mg/m ³ | N.E. | 15 mg/m ³ | N.E. |
| Ethyl 3-Ethoxypropionate | 763-69-9 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Ethylbenzene | 100-41-4 | 5.0 | 20 ppm | N.E. | 100 ppm | N.E. |
| Nanoscale Titanium Dioxide | 1317-80-2 | 1.0 | N.E. | N.E. | N.E. | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Use impervious gloves to prevent skin contact and absorption of this material through the skin. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications. Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Specific Gravity: | 0.799 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 1.0 - 13.0 |
| Boiling Range, °C: | -37 - 172 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: Substance may cause slight skin irritation. May cause skin irritation. Allergic reactions are possible. Prolonged or repeated contact may cause skin irritation.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010)

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|------------------------------|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 1330-20-7 | Xylenes (o-, m-, p- isomers) | 3500 mg/kg Rat | >4350 mg/kg Rabbit | 29.08 mg/L Rat |
| 7727-43-7 | Barium Sulfate | 307000 mg/kg Rat | N.E. | N.E. |
| 763-69-9 | Ethyl 3-Ethoxypropionate | 5000 mg/kg Rat | >9500 mg/kg Rabbit | >5.96 mg/L Rat |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. Dispose of material in accordance to local, state, and federal regulations and ordinances. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|---|-----------------------------|---------------------|---------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint and Related Spray Products in Ltd Qty | Aerosols | Aerosols, flammable | Aerosols |
| Hazard Class: | N.A. | 2 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Carcinogenicity, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure)

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------------|----------------|
| Xylenes (o-, m-, p- isomers) | 1330-20-7 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65:

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

| |
|------------------------------|
| 16. Other Information |
|------------------------------|

HMIS RATINGS

| | | | |
|-------------------|------------------------|---------------------------|-------------------------------|
| Health: 3* | Flammability: 4 | Physical Hazard: 0 | Personal Protection: X |
|-------------------|------------------------|---------------------------|-------------------------------|

NFPA RATINGS

| | | |
|------------------|------------------------|-----------------------|
| Health: 3 | Flammability: 4 | Instability: 0 |
|------------------|------------------------|-----------------------|

Maximum Incremental Reactivity 0.87**SDS REVISION DATE:** 6/25/2019

REASON FOR REVISION: Revision Description Changed
 Product Composition Changed
 Substance and/or Product Properties Changed in Section(s):
 02 - Hazard Identification
 14 - Transport Information
 15 - Regulatory Information
 16 - Other Information
 Revision Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.

SAFETY DATA SHEET

CITGO CITGARD® CNG/LNG Engine Oil, SAE
15W-40



Section 1. Identification

GHS product identifier : CITGO CITGARD® CNG/LNG Engine Oil, SAE 15W-40
Synonyms : Engine oil
Material uses : Engine oil
Code : 632020001

Supplier's details : CITGO Petroleum Corporation
P.O. Box 4689
Houston, TX 77210
sdsvend@citgo.com

Emergency telephone number (with hours of operation) : Technical Contact: (800) 248-4684
Medical Emergency: (832) 486-4700
CHEMTREC Emergency: (800) 424-9300
(United States Only)

Section 2. Hazards identification

OSHA/HCS status : While this material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200), this SDS contains valuable information critical to the safe handling and proper use of the product. This SDS should be retained and available for employees and other users of this product.

Classification of the substance or mixture : Not classified.

GHS label elements

Signal word : No signal word.

Hazard statements : No known significant effects or critical hazards.

Precautionary statements

General : Avoid contact with eyes, skin and clothing. Thoroughly wash exposed areas and clothing with soap and water. IF IN EYES: Rinse cautiously with water for several minutes. IF SWALLOWED: Do not induce vomiting. If you feel unwell, seek medical attention and show the label when possible. Keep out of reach of children.

Prevention : Not applicable.

Response : Not applicable.

Storage : Store in a dry place and/or in closed container. Store in accordance with all local, regional, national and international regulations.

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Hazards not otherwise classified : None known.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Other means of identification : Engine oil

CAS number/other identifiers

CAS number : Not applicable.

Section 3. Composition/information on ingredients

| Ingredient name | % | CAS number |
|--|-------------|------------|
| Distillates (petroleum), hydrotreated heavy paraffinic | ≥75 - ≤90 | 64742-54-7 |
| Lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based | ≤10 | 72623-87-1 |
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | ≤10 | 64742-65-0 |
| Alkaryl amine | Proprietary | - |

* = Various ** = Mixture *** = Proprietary

Any concentration shown as a range is to protect confidentiality or is due to process variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Get medical attention if irritation occurs.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if symptoms occur. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur.
- Ingestion** : Wash out mouth with water. Remove victim to fresh air and keep at rest in a position comfortable for breathing. Do not induce vomiting unless directed to do so by medical personnel. Get medical attention if symptoms occur.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : No specific data.
- Inhalation** : No specific data.
- Skin contact** : No specific data.
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : Treat symptomatically and supportively.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
 carbon dioxide
 carbon monoxide
 nitrogen oxides
 sulfur oxides
 phosphorus oxides
 metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Put on appropriate personal protective equipment.

For emergency responders : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill : Stop leak if without risk. Move containers from spill area. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8).

Section 7. Handling and storage

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Bulk Storage Conditions: Maintain all storage tanks in accordance with applicable regulations. Use necessary controls to monitor tank inventories. Inspect all storage tanks on a periodic basis. Test tanks and associated piping for tightness. Maintain the automatic leak detection devices to assure proper working condition.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|--|--|
| Distillates (petroleum), hydrotreated heavy paraffinic | ACGIH TLV (United States, 3/2017). TWA: 5 mg/m ³ 8 hours. Form: Inhalable fraction NIOSH REL (United States, 10/2016). TWA: 5 mg/m ³ 10 hours. Form: Mist STEL: 10 mg/m ³ 15 minutes. Form: Mist OSHA PEL (United States, 6/2016). TWA: 5 mg/m ³ 8 hours. |
| Lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based | NIOSH REL (United States, 10/2016). TWA: 5 mg/m ³ 10 hours. Form: Mist STEL: 10 mg/m ³ 15 minutes. Form: Mist ACGIH TLV (United States). TWA: 5 mg/m ³ OSHA PEL (United States). TWA: 5 mg/m ³ |
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | ACGIH TLV (United States, 3/2017). TWA: 5 mg/m ³ 8 hours. Form: Inhalable fraction NIOSH REL (United States, 10/2016). TWA: 5 mg/m ³ 10 hours. Form: Mist STEL: 10 mg/m ³ 15 minutes. Form: Mist OSHA PEL (United States, 6/2016). TWA: 5 mg/m ³ 8 hours. |

Appropriate engineering controls : Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, vapor controls, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Section 8. Exposure controls/personal protection

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety glasses equipped with side shields are recommended as minimum protection in industrial settings. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles. Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If inhalation hazards exist, a full-face respirator may be required instead.
- Skin protection**
- Hand protection** : Chemical-resistant gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Avoid skin contact with liquid. Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. Leather boots are not protective for liquid contact.
- Respiratory protection** : Avoid inhalation of gases, vapors, mists or dusts. Use a properly fitted, air-purifying or supplied-air respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Amber to dark amber
- Odor** : Mild petroleum odor
- pH** : Not available.
- Boiling point** : Not available.
- Flash point** : Open cup: 210°C (410°F) [Cleveland.]
- Evaporation rate** : <1 (n-butyl acetate. = 1)
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : <0.0013 kPa (<0.01 mm Hg) [room temperature]
- Vapor density** : >1 [Air = 1]
- Relative density** : 0.88
- Density lbs/gal** : Estimated 7.34 lbs/gal
- Density gm/cm³** : Not available.
- Gravity, °API** : Estimated 29 @ 60 F
- Solubility** : Insoluble in the following materials: cold water.
- Flow time (ISO 2431)** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): 1.24 cm²/s (124 cSt)
- Viscosity SUS** : Estimated 574 SUS @104 F

Section 10. Stability and reactivity

- Reactivity** : Not expected to be Explosive, Self-Reactive, Self-Heating, or an Organic Peroxide under US GHS Definition(s).
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : No specific data.
- Incompatible materials** : No specific data.
- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|---|-------------|---------|-------------|----------|
| Distillates (petroleum), hydrotreated heavy paraffinic | LD50 Oral | Rat | >5000 mg/kg | - |
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | >5000 mg/kg | - |

- Conclusion/Summary** : **Distillates (petroleum), hydrotreated heavy paraffinic**: Mineral oil mists derived from highly refined oils are reported to have low acute and sub-acute toxicities in animals. Effects from single and short-term repeated exposures to high concentrations of mineral oil mists well above applicable workplace exposure levels include lung inflammatory reaction, lipoid granuloma formation and lipoid pneumonia. In acute and sub-acute studies involving exposures to lower concentrations of mineral oil mists at or near current work place exposure levels produced no significant toxicological effects.
- Distillates (petroleum), solvent-dewaxed heavy paraffinic**: Mineral oil mists derived from highly refined oils are reported to have low acute and sub-acute toxicities in animals. Effects from single and short-term repeated exposures to high concentrations of mineral oil mists well above applicable workplace exposure levels include lung inflammatory reaction, lipoid granuloma formation and lipoid pneumonia. In acute and sub-acute studies involving exposures to lower concentrations of mineral oil mists at or near current work place exposure levels produced no significant toxicological effects.

Irritation/Corrosion

Not available.

- Skin** : No additional information.
- Eyes** : No additional information.
- Respiratory** : No additional information.

Sensitization

Not available.

- Skin** : No additional information.
- Respiratory** : No additional information.

Mutagenicity

Not available.

- Conclusion/Summary** : No additional information.

Section 11. Toxicological information

Carcinogenicity

Not available.

Conclusion/Summary : No additional information.

Reproductive toxicity

Not available.

Conclusion/Summary : No additional information.

Teratogenicity

Not available.

Conclusion/Summary : No additional information.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Routes of entry anticipated: Dermal.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Inhalation : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.

Inhalation : No specific data.

Skin contact : No specific data.

Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Section 11. Toxicological information

Fertility effects : No known significant effects or critical hazards.

Section 12. Ecological information

Toxicity

Not available.

Conclusion/Summary : Not available.

Persistence and degradability

Conclusion/Summary : Not available.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|------|-----------|
| Alkaryl amine | 3.64 to 7.02 | 1730 | high |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | IMDG | IATA |
|-----------------------------------|--------------------|----------------|----------------|
| UN number | Not regulated. | Not regulated. | Not regulated. |
| UN proper shipping name | - | - | - |
| Transport hazard class(es) | - | - | - |
| Packing group | - | - | - |
| Environmental hazards | No. | No. | No. |

Section 14. Transport information

Oil: The product(s) represented by this SDS is (are) regulated as “oil” under 49 CFR Part 130. Shipments by rail or highway in packaging having a capacity of 3500 gallons or more or in a quantity greater 42,000 gallons are subject to these requirements. In addition, mixtures containing 10% or more of this product may be subject to these requirements.

Special precautions for user : **Transport within user’s premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **United States inventory (TSCA 8b):** All components are listed or exempted.
Clean Water Act (CWA) 307: Phosphorodithioic acid, mixed O,O-bis(sec-Bu and isooctyl) esters, zinc salts; toluene; benzene
Clean Water Act (CWA) 311: toluene; maleic anhydride; vinyl acetate; benzene
 This material is classified as an oil under Section 311 of the Clean Water Act (CWA) and the Oil Pollution Act of 1990 (OPA). Discharges or spills which produce a visible sheen on waters of the United States, their adjoining shorelines, or into conduits leading to surface waters must be reported to the EPA's National Response Center at (800) 424-8802.

SARA 302/304

Composition/information on ingredients

| Name | % | EHS | SARA 302 TPQ | | SARA 304 RQ | |
|---------------|---------|------|--------------|-----------|-------------|-----------|
| | | | (lbs) | (gallons) | (lbs) | (gallons) |
| vinyl acetate | <0.0001 | Yes. | 1000 | 129 | 5000 | 644.8 |

SARA 304 RQ : 7987220447.3 lbs / 3626198083.1 kg [1088568396.1 gal / 4120679639.8 L]

SARA 311/312

Classification : Not applicable.

Composition/information on ingredients

No products were found.

State regulations

Massachusetts : None of the components are listed.

New York : None of the components are listed.

New Jersey : None of the components are listed.

Pennsylvania : None of the components are listed.

California Prop. 65 Clear and Reasonable Warnings (2018)

⚠ WARNING: This product can expose you to Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. This product can expose you to chemicals including Toluene, Ethylene Glycol, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

| Ingredient name | % | Cancer | Reproductive | No significant risk level | Maximum acceptable dosage level |
|-----------------|-------|--------|--------------|---------------------------|---------------------------------|
| toluene | <0.1 | No. | Yes. | - | Yes. |
| ethanediol | <0.01 | No. | Yes. | - | Yes. |
| benzene | trace | Yes. | Yes. | Yes. | Yes. |

Section 15. Regulatory information

International regulations

Inventory list

| | |
|--------------------------|--|
| United States | : All components are listed or exempted. |
| Australia | : All components are listed or exempted. |
| Canada | : All components are listed or exempted. |
| China | : Not determined. |
| Europe | : All components are listed or exempted. |
| Japan | : Japan inventory (ENCS): Not determined. Japan inventory (ISHL): Not determined. |
| Malaysia | : Not determined. |
| New Zealand | : All components are listed or exempted. |
| Philippines | : Not determined. |
| Republic of Korea | : Not determined. |
| Taiwan | : Not determined. |
| Thailand | : Not determined. |
| Turkey | : Not determined. |
| Viet Nam | : Not determined. |

Section 16. Other information

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|-----------------|---------------|
| Not classified. | |

History

| | |
|---------------------------------------|--------------|
| Date of printing | : 12/11/2018 |
| Date of issue/Date of revision | : 12/11/2018 |
| Date of previous issue | : 12/7/2018 |
| Version | : 3 |

Key to abbreviations

| |
|---|
| : ATE = Acute Toxicity Estimate |
| : BCF = Bioconcentration Factor |
| : GHS = Globally Harmonized System of Classification and Labelling of Chemicals |
| : IATA = International Air Transport Association |
| : IBC = Intermediate Bulk Container |
| : IMDG = International Maritime Dangerous Goods |
| : LogPow = logarithm of the octanol/water partition coefficient |
| : MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution) |

Section 16. Other information

UN = United Nations

References

: Not available.

✔ Indicates information that has changed from previously issued version.

Notice to reader

THE INFORMATION IN THIS SAFETY DATA SHEET (SDS) WAS OBTAINED FROM SOURCES WHICH WE BELIEVE ARE RELIABLE. HOWEVER, THE INFORMATION IS PROVIDED WITHOUT ANY WARRANTY, EXPRESSED OR IMPLIED REGARDING ITS CORRECTNESS OR ACCURACY. SOME INFORMATION PRESENTED AND CONCLUSIONS DRAWN HEREIN ARE FROM SOURCES OTHER THAN DIRECT TEST DATA ON THE SUBSTANCE ITSELF. THIS SDS WAS PREPARED AND IS TO BE USED ONLY FOR THIS PRODUCT. IF THE PRODUCT IS USED AS A COMPONENT IN ANOTHER PRODUCT, THIS SDS INFORMATION MAY NOT BE APPLICABLE. USERS SHOULD MAKE THEIR OWN INVESTIGATIONS TO DETERMINE THE SUITABILITY OF THE INFORMATION OR PRODUCTS FOR THEIR PARTICULAR PURPOSE OR APPLICATION.

THE CONDITIONS OR METHODS OF HANDLING, STORAGE, USE, AND/OR DISPOSAL OF THE PRODUCT ARE BEYOND OUR CONTROL AND MAY BE BEYOND OUR KNOWLEDGE. FOR THIS AND OTHER REASONS, WE DO NOT ASSUME RESPONSIBILITY AND EXPRESSLY DISCLAIM LIABILITY FOR ANY LOSS, DAMAGE OR EXPENSE ARISING OUT OF OR IN ANY WAY CONNECTED WITH HANDLING, STORAGE, USE OR DISPOSAL OF THE PRODUCT.

CITGO is a registered trademark of CITGO Petroleum Corporation

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product form : Mixture
 Product name : Snoop

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Snoop® is a proprietary blend of water, non-ionic surfactants, and a bactericide.

1.3. Details of the supplier of the safety data sheet

Swagelok
 29495 F.A. Lennon Drive
 Solon, OH 44139 - United States
 T 440-349-5600 - F 440-519-3304

Supplier:
[Distributor, add your contact information](#)

www.swagelok.com

1.4. Emergency telephone number

Emergency number : **Infotrac:** North America: 1-800-535-5053 International: 1-352-323-3500

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS US classification

Not classified- Non Hazardous

2.2. Label elements

GHS US labeling

No labeling applicable

2.3. Other hazards

Other hazards not contributing to the classification : Exposure may aggravate pre-existing eye, skin, or respiratory conditions.

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/Information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

Full text of H-phrases: see section 16

SECTION 4: First aid measures

4.1. Description of first aid measures

First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).
 First-aid measures after inhalation : Allow affected person to breathe fresh air. Allow the victim to rest.
 First-aid measures after skin contact : Remove affected clothing and wash all exposed skin area with mild soap and water, followed by warm water rinse.
 First-aid measures after eye contact : Rinse immediately with plenty of water. Obtain medical attention if pain, blinking or redness persists.
 First-aid measures after ingestion : Rinse mouth. Do NOT induce vomiting. Obtain emergency medical attention.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms/effects : Not expected to present a significant hazard under anticipated conditions of normal use.
 Symptoms/effects after inhalation : Prolonged exposure may cause irritation.
 Symptoms/effects after skin contact : Prolonged exposure may cause skin irritation.
 Symptoms/effects after eye contact : May cause slight irritation.

Snoop

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Symptoms/effects after ingestion : Ingestion may cause adverse effects.

4.3. Indication of any immediate medical attention and special treatment needed

If exposed or concerned, get medical advice and attention. If medical advice is needed, have product container and SDS at hand.

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media : Foam. Dry powder. Carbon dioxide. Water spray. Sand.

Unsuitable extinguishing media : Do not use a heavy water stream.

5.2. Special hazards arising from the substance or mixture

Fire hazard : Not considered flammable but may burn at high temperatures.

Explosion hazard : Product is not explosive.

Reactivity : Hazardous reactions will not occur under normal conditions.

5.3. Advice for firefighters

Firefighting instructions : Use water spray or fog for cooling exposed containers. Exercise caution when fighting any chemical fire. Prevent fire-fighting water from entering environment.

Protection during firefighting : Do not enter fire area without proper protective equipment, including respiratory protection.

Other information : Oxides of carbon and sulfur formed if burned.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : Use appropriate personal protection equipment (PPE).

6.1.1. For non-emergency personnel

Emergency procedures : Evacuate unnecessary personnel.

6.1.2. For emergency responders

Protective equipment : Equip cleanup crew with proper protection.

Emergency procedures : Ventilate area.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

For containment : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams.

Methods for cleaning up : Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Collect spillage. Store away from other materials.

Other information : Clean up spills immediately and dispose of waste safely. Transfer spilled material to a suitable container for disposal. Contact competent authorities after a spill.

6.4. Reference to other sections

See Heading 8. Exposure controls and personal protection.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Additional hazards when processed : Handle in accordance with standard industrial practices and ensure appropriate usage. Practice good housekeeping - spillage can be slippery on smooth surface either wet or dry.

Precautions for safe handling : Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work. Provide good ventilation in process area to prevent formation of vapor.

Hygiene measures : Do not eat, drink or smoke when using this product.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Keep only in the original container in a cool, well ventilated place away from: children. Keep container closed when not in use.

Incompatible products : Strong acids, strong bases, strong oxidizers, water-reactive materials.

Incompatible materials : Sources of ignition. Direct sunlight.

Storage area : Keep from freezing and extreme heat to protect quality of the product. Store in a dry, cool and well-ventilated place.

Snoop

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

7.3. Specific end use(s)

No additional information available

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Snoop | |
|-------|----------------|
| ACGIH | Not applicable |
| OSHA | Not applicable |

8.2. Exposure controls

- Appropriate engineering controls : Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure. Ensure good ventilation of the workstation. General industrial hygiene practice.
- Personal protective equipment : Avoid all unnecessary exposure.
- Hand protection : Wear protective gloves.
- Eye protection : Chemical goggles or safety glasses.
- Skin and body protection : Chemical resistant safety shoes. Impervious clothing.
- Respiratory protection : If exposure limits are exceeded or irritation is experienced, approved respiratory protection should be worn. In case of inadequate ventilation, oxygen deficient atmosphere, or where exposure levels are not known wear approved respiratory protection.
- Environmental exposure controls : Avoid release to the environment.
- Other information : Do not eat, drink or smoke during use.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

- Physical state : Liquid
- Color : No data available
- Odor : Characteristic
- Odor threshold : No data available
- pH : No data available
- Relative evaporation rate (butyl acetate=1) : No data available
- Melting point : No data available
- Freezing point : No data available
- Boiling point : No data available
- Flash point : No data available
- Auto-ignition temperature : No data available
- Decomposition temperature : No data available
- Flammability (solid, gas) : No data available
- Vapor pressure : No data available
- Relative vapor density at 20 °C : No data available
- Relative density : No data available
- Solubility : No data available
- Log Pow : No data available
- Log Kow : No data available
- Viscosity, kinematic : No data available
- Viscosity, dynamic : No data available
- Explosive properties : No data available
- Oxidizing properties : No data available
- Explosion limits : No data available

9.2. Other information

No additional information available

Snoop

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 10: Stability and reactivity

10.1. Reactivity

Hazardous reactions will not occur under normal conditions.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids, strong bases, strong oxidizers, water-reactive materials.

10.6. Hazardous decomposition products

Hazardous fumes. Carbon monoxide. Carbon dioxide.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

| | |
|---|---|
| Acute toxicity | : Not classified |
| Skin corrosion/irritation | : Not classified |
| Serious eye damage/irritation | : Not classified |
| Respiratory or skin sensitization | : Not classified |
| Germ cell mutagenicity | : Not classified |
| Carcinogenicity | : Not classified |
| Reproductive toxicity | : Not classified |
| Specific target organ toxicity – single exposure | : Not classified |
| Specific target organ toxicity – repeated exposure | : Not classified |
| Aspiration hazard | : Not classified |
| Potential Adverse human health effects and symptoms | : Based on available data, the classification criteria are not met. |
| Symptoms/effects after inhalation | : Prolonged exposure may cause irritation. |
| Symptoms/effects after skin contact | : Prolonged exposure may cause skin irritation. |
| Symptoms/effects after eye contact | : May cause slight irritation. |
| Symptoms/effects after ingestion | : Ingestion may cause adverse effects. |

SECTION 12: Ecological information

12.1. Toxicity

No additional information available

12.2. Persistence and degradability

| | |
|-------------------------------|------------------|
| Snoop | |
| Persistence and degradability | Not established. |

12.3. Bioaccumulative potential

| | |
|---------------------------|------------------|
| Snoop | |
| Bioaccumulative potential | Not established. |

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

| | |
|------------------------------|---------------------------------------|
| Effect on ozone layer | : No additional information available |
| Effect on the global warming | : No known effects from this product. |

Snoop

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Other information : Avoid release to the environment.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Product/Packaging disposal recommendations : Dispose in a safe manner in accordance with local/national regulations.

Ecology - waste materials : Avoid release to the environment.

SECTION 14: Transport information

In accordance with DOT

Not regulated for transport

Additional information

Other information : No supplementary information available.

ADR

No additional information available

Transport by sea

No additional information available

Air transport

No additional information available

SECTION 15: Regulatory information

15.1. US Federal regulations

No additional information available

15.2. International regulations

CANADA

No additional information available

EU-Regulations

No additional information available

Classification according to Regulation (EC) No. 1272/2008 [CLP]

Classification according to Directive 67/548/EEC [DSD] or 1999/45/EC [DPD]

Not classified

15.2.2. National regulations

15.3. US State regulations

SECTION 16: Other information

Other information : None.

GHS US SDS

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

Printing date 06/08/2015

Reviewed on 06/08/2015

1 Identification

· **Product identifier**

· **Trade name: POWERFOAM**

· **Relevant identified uses of the substance or mixture and uses advised against**

No further relevant information available.

· **Application of the substance / the mixture** Polyurethane foam hand held B2

· **Details of the supplier of the safety data sheet**

· **Manufacturer/Supplier:**

Powers Fasteners, Inc.
2 Powers Lane
Brewster, NY 10509 / USA

· **Information department:**

Phone +1 800-524-3244
Fax +1 877-871-1965

· **Emergency telephone number:**

CHEMTREC: +1 703-741-5500 (24h Emergency Contact Information Only)
USA: 800-424-9300

2 Hazard(s) identification

· **Classification of the substance or mixture**

| | | |
|-------------------|-----------|--|
| Flam. Aerosol 1 | H222-H229 | Extremely flammable aerosol. Pressurized container: May burst if heated. |
| Acute Tox. 4 | H332 | Harmful if inhaled. |
| Skin Irrit. 2 | H315 | Causes skin irritation. |
| Eye Irrit. 2A | H319 | Causes serious eye irritation. |
| Resp. Sens. 1 | H334 | May cause allergy or asthma symptoms or breathing difficulties if inhaled. |
| Skin Sens. 1 | H317 | May cause an allergic skin reaction. |
| Carc. 2 | H351 | Suspected of causing cancer. |
| Lact. | H362 | May cause harm to breast-fed children. |
| STOT SE 3 | H335 | May cause respiratory irritation. |
| STOT RE 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| Aquatic Chronic 4 | H413 | May cause long lasting harmful effects to aquatic life. |

· **Label elements**

· **GHS label elements**

The product is classified and labeled according to the Globally Harmonized System (GHS).

· **Hazard pictograms**



GHS02 GHS07 GHS08

· **Signal word** Danger

· **Hazard-determining components of labeling:**

diphenylmethanediisocyanate, isomeres and homologues

· **Hazard statements**

Extremely flammable aerosol. Pressurized container: May burst if heated.
Harmful if inhaled.

(Contd. on page 2)

US

Trade name: POWERFOAM

(Contd. of page 1)

- Causes skin irritation.
- Causes serious eye irritation.
- May cause allergy or asthma symptoms or breathing difficulties if inhaled.
- May cause an allergic skin reaction.
- Suspected of causing cancer.
- May cause harm to breast-fed children.
- May cause respiratory irritation.
- May cause damage to organs through prolonged or repeated exposure.
- May cause long lasting harmful effects to aquatic life.

· **Precautionary statements**

- Obtain special instructions before use.
- Keep out of reach of children.
- Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
- Do not spray on an open flame or other ignition source.
- Do not pierce or burn, even after use.
- In case of inadequate ventilation wear respiratory protection (a protective mask with an appropriate gas filter - i.e. type A1 according to standard EN 14387).
- Wear protective gloves/protective clothing/eye protection.
- Do not breathe vapours/spray.
- If on skin: Wash with plenty of water/ soap.
- If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- IF exposed or concerned: Get medical advice/attention.
- IF INHALED: Remove person to fresh air and keep comfortable for breathing.
- Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
- Dispose of container to in accordance with local/regional/national/international regulation.

· **Classification system:**

· **NFPA ratings (scale 0 - 4)**



· **HMIS-ratings (scale 0 - 4)**



· **Other hazards**

- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.

3 Composition/information on ingredients

· **Chemical characterization: Mixtures**

- **Description:** Mixture of the substances listed below with nonhazardous additions.

· **Dangerous components:**

| | | |
|------------|--|--------|
| 9016-87-9 | diphenylmethanediisocyanate, isomeres and homologues | 40-50% |
| 13674-84-5 | tris(2-chlorisopropyl)-phosphate | 1-10% |
| 75-28-5 | isobutane | 1-10% |
| 85535-85-9 | alkanes, C14-17, chloro | 1-10% |
| 115-10-6 | dimethyl ether | 1-10% |

(Contd. on page 3)

Trade name: POWERFOAM

(Contd. of page 2)

74-98-6 propane

<5%

4 First-aid measures

- **Description of first aid measures**
- **General information:**
Symptoms of poisoning may even occur after several hours; therefore medical observation for at least 48 hours after the accident.
- **After inhalation:**
Supply fresh air and to be sure call for a doctor.
In case of unconsciousness place patient stably in side position for transportation.
- **After skin contact:**
If skin irritation continues, consult a doctor.
Immediately wash with water and soap and rinse thoroughly.
- **After eye contact:**
Rinse opened eye for several minutes under running water. Then consult a doctor.
- **After swallowing:** Immediately call a doctor.
- **Information for doctor:**
- **Most important symptoms and effects, both acute and delayed**
No further relevant information available.
- **Indication of any immediate medical attention and special treatment needed**
No further relevant information available.

5 Fire-fighting measures

- **Extinguishing media**
- **Suitable extinguishing agents:**
Foam
CO₂, sand, extinguishing powder. Do not use water.
- **For safety reasons unsuitable extinguishing agents:** Water with full jet
- **Special hazards arising from the substance or mixture**
In case of fire, the following can be released:
Nitrogen oxides (NO_x)
Carbon monoxide (CO)
Hydrogen cyanide (HCN)
- **Advice for firefighters**
- **Protective equipment:** Mouth respiratory protective device.
- **Additional information**
Cool endangered receptacles with water spray.
Dispose of fire debris and contaminated fire fighting water in accordance with official regulations.

6 Accidental release measures

- **Personal precautions, protective equipment and emergency procedures**
Keep away from ignition sources
Ensure adequate ventilation
Wear protective equipment. Keep unprotected persons away.
- **Environmental precautions:**
Do not allow to enter sewers/ surface or ground water.
Do not allow product to reach sewage system or any water course.
Inform respective authorities in case of seepage into water course or sewage system.

(Contd. on page 4)

US

Trade name: POWERFOAM

(Contd. of page 3)

· **Methods and material for containment and cleaning up:**

- Dispose contaminated material as waste according to item 13.
- Ensure adequate ventilation.
- Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust).
- Do not flush with water or aqueous cleansing agents

· **Reference to other sections**

- See Section 7 for information on safe handling.
- See Section 8 for information on personal protection equipment.
- See Section 13 for disposal information.

7 Handling and storage

· **Handling:**

· **Precautions for safe handling**

- Ensure that suitable extractors are available on processing machines
- Ensure good ventilation/exhaustion at the workplace.

· **Information about protection against explosions and fires:**

- Keep ignition sources away - Do not smoke.
- Protect against electrostatic charges.

· **Conditions for safe storage, including any incompatibilities**

· **Storage:**

· **Requirements to be met by storerooms and receptacles:**

- Observe official regulations on storing packagings with pressurized containers.

· **Information about storage in one common storage facility:**

- Store away from water.
- Do not store together with acids.
- Do not store together with alkalis (caustic solutions).

· **Further information about storage conditions:**

- Store in a cool place. Heat will increase pressure and may lead to the receptacle bursting.
- Protect from humidity and water.
- Keep receptacle tightly sealed.
- Store in cool, dry conditions in well sealed receptacles.
- Protect from heat and direct sunlight.

· **Specific end use(s)** No further relevant information available.

8 Exposure controls/personal protection

· **Additional information about design of technical systems:**

- No further data; see item 7.

· **Control parameters**

· **Components with limit values that require monitoring at the workplace:**

9016-87-9 diphenylmethanediisocyanate, isomeres and homologues

| | |
|------|--|
| WEEL | Short-term value: 0.07 mg/m ³ |
| | Long-term value: 0.02 mg/m ³ |

115-10-6 dimethyl ether

| | |
|------|--|
| WEEL | Long-term value: 1920 mg/m ³ , 1000 ppm |
|------|--|

· **Additional information:** The lists that were valid during the creation were used as basis.

· **Exposure controls**

· **Personal protective equipment:**

· **General protective and hygienic measures:**

- Immediately remove all soiled and contaminated clothing.

(Contd. on page 5)

Trade name: POWERFOAM

(Contd. of page 4)

Wash hands before breaks and at the end of work.
Avoid contact with the eyes and skin.

· **Breathing equipment:**

In case of brief exposure or low pollution use respiratory filter device. In case of intensive or longer exposure use respiratory protective device that is independent of circulating air.

· **Protection of hands:**



Protective gloves

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.

Due to missing tests no recommendation to the glove material can be given for the product/ the preparation/ the chemical mixture.

Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation

· **Material of gloves**

The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer.

· **Penetration time of glove material**

The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed.

· **Eye protection:**



Tightly sealed goggles

9 Physical and chemical properties

· **Information on basic physical and chemical properties**

· **General Information**

· **Appearance:**

Form: Aerosol
Color: According to product specification
Odor: Characteristic

· **Change in condition**

Melting point/Melting range: Undetermined.
Boiling point/Boiling range: Undetermined.

· **Flash point:** -21 °C (-6 °F)

· **Ignition temperature:** 199 °C (390 °F)

· **Auto igniting:** Product is not selfigniting.

· **Danger of explosion:** Heating may cause an explosion.

· **Explosion limits:**

Lower: 3.0 Vol %
Upper: 18.6 Vol %

· **Density:** Not determined.

· **Solubility in / Miscibility with**

Water: Insoluble.

(Contd. on page 6)

Printing date 06/08/2015

Reviewed on 06/08/2015

Trade name: POWERFOAM

(Contd. of page 5)

- **Solvent content:**
- **VOC content:** 15.4 %
- **Other information** No further relevant information available.

10 Stability and reactivity

- **Reactivity**
- **Chemical stability**
- **Thermal decomposition / conditions to be avoided:**
No decomposition if used according to specifications.
- **Possibility of hazardous reactions** Contact with water releases flammable gases.
- **Conditions to avoid** No further relevant information available.
- **Incompatible materials:** No further relevant information available.
- **Hazardous decomposition products:**
Hydrogen cyanide (prussic acid)
Carbon monoxide
Nitrogen oxides (NOx)

11 Toxicological information

- **Information on toxicological effects**
- **Acute toxicity:**
- **LD/LC50 values that are relevant for classification:**
- **115-10-6 dimethyl ether**
- Inhalative LC50/4 h 308 mg/l (rat)
- **Primary irritant effect:**
- **on the skin:** Irritant to skin and mucous membranes.
- **on the eye:** Irritating effect.
- **Sensitization:**
Sensitization possible through inhalation.
Sensitization possible through skin contact.
- **Additional toxicological information:**
The product shows the following dangers according to internally approved calculation methods for preparations:
Harmful
Irritant
- **Carcinogenic categories**
- **IARC (International Agency for Research on Cancer)**
- 9016-87-9 diphenylmethanediisocyanate, isomeres and homologues 3
- **NTP (National Toxicology Program)**
- None of the ingredients is listed.
- **OSHA-Ca (Occupational Safety & Health Administration)**
- None of the ingredients is listed.

12 Ecological information

- **Toxicity**
- **Aquatic toxicity:** No further relevant information available.

(Contd. on page 7)

us

Trade name: POWERFOAM

(Contd. of page 6)

- **Persistence and degradability** No further relevant information available.
- **Behavior in environmental systems:**
- **Bioaccumulative potential** No further relevant information available.
- **Mobility in soil** No further relevant information available.
- **Additional ecological information:**
- **General notes:**
Water hazard class 1 (Self-assessment): slightly hazardous for water
Do not allow undiluted product or large quantities of it to reach ground water, water course or sewage system.
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.
- **Other adverse effects** No further relevant information available.

13 Disposal considerations

- **Waste treatment methods**
- **Recommendation:**
Must not be disposed of together with household garbage. Do not allow product to reach sewage system.
- **Uncleaned packagings:**
- **Recommendation:** Disposal must be made according to official regulations.

14 Transport information

- | | |
|---------------------------------------|---------------------|
| · UN-Number | |
| · DOT | UN1950 |
| · ADR, IMDG, IATA | 1950 |
| · UN proper shipping name | |
| · ADR | 1950 AEROSOLS |
| · IMDG | AEROSOLS |
| · IATA | AEROSOLS, flammable |
| · Transport hazard class(es) | |
| · DOT, IMDG, IATA | |
| · Class | 2.1 |
| · Label | 2.1 |
| · ADR | |
| · Class | 2 5F Gases |
| · Label | 2.1 |
| · Packing group | |
| · DOT, ADR, IMDG, IATA | Void |
| · Environmental hazards: | |
| · Marine pollutant: | No |
| · Special precautions for user | Warning: Gases |
| · EMS Number: | F-D,S-U |

(Contd. on page 8)

US

Printing date 06/08/2015

Reviewed on 06/08/2015

Trade name: POWERFOAM

(Contd. of page 7)

· **Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code** Not applicable.

· **Transport/Additional information:**

· **ADR**

· **Remarks:** LQ: 1I

· **UN "Model Regulation":** UN1950, Aerosols, 2.1

15 Regulatory information

· **Safety, health and environmental regulations/legislation specific for the substance or mixture**

· **Sara**

· **Section 355 (extremely hazardous substances):**

None of the ingredient is listed.

· **Section 313 (Specific toxic chemical listings):**

9016-87-9 | diphenylmethanediisocyanate, isomeres and homologues

· **TSCA (Toxic Substances Control Act):**

All ingredients are listed.

· **Proposition 65**

· **Chemicals known to cause cancer:**

None of the ingredients is listed.

· **Chemicals known to cause reproductive toxicity for females:**

None of the ingredients is listed.

· **Chemicals known to cause reproductive toxicity for males:**

None of the ingredients is listed.

· **Chemicals known to cause developmental toxicity:**

None of the ingredients is listed.

· **Carcinogenic categories**

· **EPA (Environmental Protection Agency)**

9016-87-9 | diphenylmethanediisocyanate, isomeres and homologues | D;CBD

· **TLV (Threshold Limit Value established by ACGIH)**

None of the ingredients is listed.

· **NIOSH-Ca (National Institute for Occupational Safety and Health)**

None of the ingredients is listed.

· **GHS label elements**

The product is classified and labeled according to the Globally Harmonized System (GHS).

· **Hazard pictograms**



GHS02 GHS07 GHS08

· **Signal word** Danger

(Contd. on page 9)

US

Safety Data Sheet

acc. to OSHA HCS

Printing date 06/08/2015

Reviewed on 06/08/2015

Trade name: POWERFOAM

(Contd. of page 8)

- **Hazard-determining components of labeling:**
diphenylmethanediisocyanate, isomeres and homologues
- **Hazard statements**
Extremely flammable aerosol. Pressurized container: May burst if heated.
Harmful if inhaled.
Causes skin irritation.
Causes serious eye irritation.
May cause allergy or asthma symptoms or breathing difficulties if inhaled.
May cause an allergic skin reaction.
Suspected of causing cancer.
May cause harm to breast-fed children.
May cause respiratory irritation.
May cause damage to organs through prolonged or repeated exposure.
May cause long lasting harmful effects to aquatic life.
- **Precautionary statements**
Obtain special instructions before use.
Keep out of reach of children.
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
Do not spray on an open flame or other ignition source.
Do not pierce or burn, even after use.
In case of inadequate ventilation wear respiratory protection (a protective mask with an appropriate gas filter - i.e. type A1 according to standard EN 14387).
Wear protective gloves/protective clothing/eye protection.
Do not breathe vapours/spray.
If on skin: Wash with plenty of water/ soap.
If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
IF exposed or concerned: Get medical advice/attention.
IF INHALED: Remove person to fresh air and keep comfortable for breathing.
Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Dispose of container in accordance with local/regional/national/international regulation.
- **Chemical safety assessment:** A Chemical Safety Assessment has not been carried out.

16 Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

- **Date of preparation / last revision** 06/08/2015 / -
- **Abbreviations and acronyms:**
Flam. Aerosol 1: Flammable aerosols, Hazard Category 1
Acute Tox. 4: Acute toxicity, Hazard Category 4
Skin Irrit. 2: Skin corrosion/irritation, Hazard Category 2
Eye Irrit. 2A: Serious eye damage/eye irritation, Hazard Category 2A
Resp. Sens. 1: Sensitisation - Respirat., Hazard Category 1
Skin Sens. 1: Sensitisation - Skin, Hazard Category 1
Carc. 2: Carcinogenicity, Hazard Category 2
Lact.: Reproductive toxicity, Additional category, Effects on or via lactation
STOT SE 3: Specific target organ toxicity - Single exposure, Hazard Category 3
STOT RE 2: Specific target organ toxicity - Repeated exposure, Hazard Category 2
Aquatic Chronic 4: Hazardous to the aquatic environment - Chronic Hazard, Category 4

US

Safety Data Sheet

Printing date 02/04/2016

Revised On 01/15/2016

1 Identification of the substance and manufacturer

Trade name: STRIPE INVERTED TIP CLEAR
Product code: 0000200631
Product category: PC9a Paints and coatings.
Manufacturer/Supplier: Seymour of Sycamore
 917 Crosby Avenue
 Sycamore, IL 60178
 Phone: 815-895-9101 www.seymourpaint.com
Emergency telephone number: CHEMTEL 1-800-255-3924, or 813-248-0585.

2 Hazard(s) identification

Classification of the substance or mixture

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 Eye Irrit. 2A H319 Causes serious eye irritation.
 Carc. 1B H350 May cause cancer.
 STOT SE 3 H336 May cause drowsiness or dizziness.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

GHS Hazard pictograms



GHS02 GHS04 GHS07 GHS08

Signal word

Hazard statements

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 Causes serious eye irritation.
 May cause cancer.

Precautionary statements

May cause drowsiness or dizziness.
 May cause damage to organs through prolonged or repeated exposure.
 Obtain special instructions before use.
 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
 Do not spray on an open flame or other ignition source.
 Do not pierce or burn, even after use.
 Wash hands thoroughly after handling.
 Use only outdoors or in a well-ventilated area.
 Wear protective gloves/protective clothing/eye protection/face protection.
 Do not handle until all safety precautions have been read and understood.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 Call a POISON CENTER/doctor if you feel unwell.
 If eye irritation persists: Get medical advice/attention.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Protect from sunlight. Store in a well-ventilated place.
 Store in a well-ventilated place. Keep container tightly closed.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients

Chemical characterization: Mixtures

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|-------------------|--------|
| 67-64-1 | Acetone | 17.89% |
| 1317-65-3 | Calcium Carbonate | 15.19% |
| 74-98-6 | propane | 13.86% |
| 64742-47-8 | Mineral Spirits | 10.57% |
| 106-97-8 | n-butane | 8.14% |
| 64742-89-8 | VM&P Naphtha | 8.0% |
| 111-76-2 | Glycol Ether EB | 5.25% |
| 1330-20-7 | xylene (mix) | 2.53% |
| 8052-41-3 | Stoddard Solvent | 0.11% |

4 First-aid measures

After inhalation: Supply fresh air; consult doctor in case of complaints.
After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor.
After swallowing: Rinse out mouth and then drink plenty of water.
 Rinse mouth with water. Do not induce vomiting.
Most important symptoms and effects: Dizziness
Indication of any immediate medical attention needed: No further relevant information available.

(Contd. on page 2)

Safety Data Sheet

Printing date 02/04/2016

Revised On 01/15/2016

Trade name: STRIPE INVERTED TIP CLEAR

(Contd. of page 1)

5 Fire-fighting measures

Extinguishing agents: CO₂, extinguishing powder or water spray. Fight larger fires with water spray.
Special hazards: Can form explosive gas-air mixtures.
Protective equipment for firefighters: A respiratory protective device may be necessary.

6 Accidental release measures

Personal precautions, protective equipment and emergency procedures: Wear protective equipment. Keep unprotected persons away. Use respiratory protective device against the effects of fumes/dust/aerosol.
Methods and material for containment and cleaning up: Ensure adequate ventilation.

7 Handling and storage

Precautions for safe handling: Use only in well ventilated areas.
Storage requirements: Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up.

8 Exposure controls/personal protection**Components with limit values that require monitoring at the workplace:****67-64-1 Acetone**

PEL (USA) Long-term value: 2400 mg/m³, 1000 ppm
REL (USA) Long-term value: 590 mg/m³, 250 ppm
TLV (USA) Short-term value: 1187 mg/m³, 500 ppm
Long-term value: 594 mg/m³, 250 ppm
BEI

74-98-6 propane

PEL (USA) Long-term value: 1800 mg/m³, 1000 ppm
REL (USA) Long-term value: 1800 mg/m³, 1000 ppm
TLV (USA) refer to Appendix F in TLVs and BEIs book

106-97-8 n-butane

REL (USA) Long-term value: 1900 mg/m³, 800 ppm
TLV (USA) Short-term value: 2370 mg/m³, 1000 ppm

111-76-2 Glycol Ether EB

PEL (USA) Long-term value: 240 mg/m³, 50 ppm
Skin
REL (USA) Long-term value: 24 mg/m³, 5 ppm
Skin
TLV (USA) Long-term value: 97 mg/m³, 20 ppm
BEI

1330-20-7 xylene (mix)

PEL (USA) Long-term value: 435 mg/m³, 100 ppm
REL (USA) Short-term value: 655 mg/m³, 150 ppm
Long-term value: 435 mg/m³, 100 ppm
TLV (USA) Short-term value: 651 mg/m³, 150 ppm
Long-term value: 434 mg/m³, 100 ppm
BEI

8052-41-3 Stoddard Solvent

PEL (USA) Long-term value: 2900 mg/m³, 500 ppm
REL (USA) Long-term value: 350 mg/m³
Ceiling limit value: 1800^{*} mg/m³
*15-min
TLV (USA) Long-term value: 525 mg/m³, 100 ppm

Ingredients with biological limit values:**67-64-1 Acetone**

BEI (USA) 50 mg/L
Medium: urine
Time: end of shift
Parameter: Acetone (nonspecific)

111-76-2 Glycol Ether EB

BEI (USA) 200 mg/g creatinine
Medium: urine
Time: end of shift
Parameter: Butoxyacetic acid with hydrolysis

1330-20-7 xylene (mix)

BEI (USA) 1.5 g/g creatinine
Medium: urine
Time: end of shift
Parameter: Methylhippuric acids

Hygienic protection: Keep away from foodstuffs and animal feed. Wash hands after use. Immediately remove all soiled and contaminated clothing.

(Contd. on page 3) 53

Safety Data Sheet

Printing date 02/04/2016

Revised On 01/15/2016

Trade name: STRIPE INVERTED TIP CLEAR

(Contd. of page 2)

| | |
|-----------------------------|---|
| Breathing equipment: | Wash hands after use. Avoid contact with the eyes and skin. Do not eat or drink while working. A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene. |
| Hand protection: | Nitrile gloves. Protective gloves. The glove material must be impermeable and resistant to the substance. |
| Eye protection: | Tightly sealed goggles |

9 Physical and chemical properties

| | |
|--|--|
| Appearance: | Aerosol. |
| Odor: | Aromatic |
| Odor threshold: | Not determined. |
| pH-value: | Not determined. |
| Melting point/Melting range | Undetermined. |
| Boiling point: | -110 °C (-166 °F) |
| Flash point: | -19 °C (-2 °F) |
| Flammability (solid, gas): | Extremely flammable. |
| Decomposition temperature: | Not determined. |
| Auto igniting: | Product is not self-igniting. |
| Danger of explosion: | In use, may form flammable/explosive vapour-air mixture. |
| Lower Explosion Limit: | 0.5 Vol % |
| Upper Explosion Limit: | 10.9 Vol % |
| Vapor pressure: | Not determined. |
| Relative Density: | Between 0.77 and 0.85 (Water equals 1.00) |
| Vapour density | Not determined. |
| Evaporation rate | Not applicable. |
| Partition coefficient: n-octonal/water: | Not determined. |
| Solubility: | Not determined. |
| Viscosity: | Not determined. |
| VOC content: | 395.8 g/l / 3.30 lb/gl |
| VOC content (less exempt solvents): | 49.2 % |
| MIR Value: | 1.03 |
| Solids content: | 32.9 % |

10 Stability and reactivity

| | |
|--|--|
| Reactivity: | Stable at normal temperatures. |
| Conditions to avoid: | Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures. |
| Chemical stability: | Not fully evaluated. |
| Possibility of hazardous reactions: | No dangerous reactions known. |
| Incompatible materials: | No further relevant information available. |
| Hazardous decomposition: | No dangerous decomposition products known. |

11 Toxicological information

LD/LC50 values that are relevant for classification:

106-97-8 n-butane

Inhalative LC50/4 h 658 mg/l (rat)

111-76-2 Glycol Ether EB

Oral LD50 1480 mg/kg (rat)

Dermal LD50 400 mg/kg (rab)

1330-20-7 xylene (mix)

Oral LD50 8700 mg/kg (rat)

Dermal LD50 2000 mg/kg (rbt)

Inhalative LC50/4 h 6350 mg/l (rat)

Information on toxicological effects: No data available.**Skin effects:** No irritant effect.**Eye effects:** Irritating effect.**Sensitization:** No sensitizing effects known.

Carcinogenic categories

IARC (International Agency for Research on Cancer)

111-76-2 Glycol Ether EB

3

1330-20-7 xylene (mix)

3

NTP (National Toxicology Program)

None of the ingredients is listed.

12 Ecological information

Aquatic toxicity: Hazardous for water, do not empty into drains.

(Contd. on page 4)

Safety Data Sheet

Printing date 02/04/2016

Revised On 01/15/2016

Trade name: STRIPE INVERTED TIP CLEAR

(Contd. of page 3)

Persistence and degradability: The product is degradable after prolonged exposure to natural weathering processes.
Bioaccumulative potential: No further relevant information available.
Mobility in soil: No further relevant information available.
Other adverse effects: No further relevant information available.

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.

Recommendation: Completely empty cans should be recycled.

14 Transport information

UN-Number UN1950
DOT N/A
DOT UN1950
DOT Consumer Commodity ORM-D
ADR Aerosols, flammable
Transport hazard class(es): 1950 Aerosols
Class 2.1
Marine pollutant: No
Special precautions for user: Warning: Gases
EMS Number: F-D,S-U
Packaging Group: --
UN "Model Regulation": UN1950, Aerosols, 2.1

15 Regulatory information**SARA Section 355 (extremely hazardous substances):**

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

111-76-2 Glycol Ether EB

1330-20-7 xylene (mix)

CPSC: This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.

California Proposition 65 chemicals known to cause cancer:

100-41-4 ethyl benzene

CANADIAN ENVIRONMENTAL PROTECTION ACT:**WHMIS Symbols for Canada:**

All hazardous ingredients for this product appear on the Canadian Domestic Substance List.
 A - Compressed gas
 D2B - Toxic material causing other toxic effects

**EPA:**

| | | |
|-----------|-----------------|----|
| 67-64-1 | Acetone | I |
| 111-76-2 | Glycol Ether EB | NL |
| 1330-20-7 | xylene (mix) | I |

16 Other information

Contact: Regulatory Affairs
Date of preparation / last revision 02/04/2016 / -



SAFETY DATA SHEET
Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

29 CFR 1910.1200 (OSHA HazCom 2012)

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : Valvoline™ CRIMSON #2
GREASE

Product code : VV70120


| | |
|---|---|
| Details of the supplier of the safety data sheet Valvoline LLC 100 Valvoline Way Lexington, KY 40509 United States of America (USA) 1-800-TEAMVAL (1-800-832-6825) SDS@valvoline.com | Emergency telephone number 1-800-VALVOLINE (1-800-825-8654) Regulatory Information Number 1-800-TEAMVAL (1-800-832-6825) Product Information 1-800-TEAMVAL (1-800-832-6825) |
|---|---|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Skin sensitization : Category 1

GHS label elements

Hazard pictograms : 

Signal Word : Warning

Hazard Statements : May cause an allergic skin reaction.

Precautionary Statements : **Prevention:**
Wear protective gloves.
Contaminated work clothing must not be allowed out of the workplace.
Avoid breathing dust/ fume/ gas/ mist/ vapors/ spray.
Response:
Wash contaminated clothing before reuse.
If skin irritation or rash occurs: Get medical advice/ attention.



SAFETY DATA SHEET

Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

IF ON SKIN: Wash with plenty of soap and water.

Disposal:

Dispose of contents/ container to an approved waste disposal plant.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Classification | Concentration (%) |
|--|------------|--|-------------------|
| Pentene, 2,4,4-trimethyl-, sulfurized | 68515-88-8 | Skin Irrit. 2; H315 Skin Sens. 1A; H317 | >=0.10 - < 0.50 |
| 2,5-BIS(OCTYLDITHIO)-1,3,4-THIADIAZOLE | 13539-13-4 | Acute Tox. 4; H332 Skin Irrit. 2; H315 Eye Irrit. 2A; H319 Skin Sens. 1; H317 | >=0.10 - < 0.50 |
| 5,5'-dithiodi-1,3,4-thiadiazole-2(3H)-thione | 72676-55-2 | Skin Sens. 1; H317 | >=0.10 - < 0.50 |

Actual concentration is withheld as a trade secret

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : If breathed in, move person into fresh air.
If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : Remove contaminated clothing. If irritation develops, get medical attention.



SAFETY DATA SHEET

Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

- If on skin, rinse well with water.
First aid is not normally required. However, it is recommended that exposed areas be cleaned by washing with soap and water.
Wash contaminated clothing before re-use.
- In case of eye contact : Flush eyes with water as a precaution.
Remove contact lenses.
Protect unharmed eye.
If eye irritation persists, consult a specialist.
- If swallowed : Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
- Most important symptoms and effects, both acute and delayed : No symptoms known or expected.
May cause an allergic skin reaction.
- Notes to physician : No hazards which require special first aid measures.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Water spray
Foam
Carbon dioxide (CO₂)
Dry chemical
- Unsuitable extinguishing media : High volume water jet
- Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.
- Hazardous combustion products : No hazardous combustion products are known
- Specific extinguishing methods :

Product is compatible with standard fire-fighting agents.
- Further information : Standard procedure for chemical fires.
- Special protective equipment for firefighters : In the event of fire, wear self-contained breathing apparatus.



SAFETY DATA SHEET

Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.
Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed.
- Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
- Methods and materials for containment and cleaning up : Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust).
Keep in suitable, closed containers for disposal.
- Other information : Comply with all applicable federal, state, and local regulations.

SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Do not breathe vapours/dust.
Do not smoke.
Persons susceptible to skin sensitisation problems or asthma, allergies, chronic or recurrent respiratory disease should not be employed in any process in which this mixture is being used.
Container hazardous when empty.
Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
Smoking, eating and drinking should be prohibited in the application area.
For personal protection see section 8.
Dispose of rinse water in accordance with local and national regulations.
- Conditions for safe storage : Keep container tightly closed in a dry and well-ventilated place.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

- Engineering measures** : Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.



SAFETY DATA SHEET

Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

Personal protective equipment

- Respiratory protection : Respiratory protection is not required under normal conditions of use.
- No personal respiratory protective equipment normally required.
- Hand protection
Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.
- Eye protection : Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.
- Skin and body protection : Wear as appropriate:
Impervious clothing
Safety shoes
Choose body protection according to the amount and concentration of the dangerous substance at the work place.
Discard gloves that show tears, pinholes, or signs of wear.
Wear resistant gloves (consult your safety equipment supplier).
- Hygiene measures : Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Appearance : paste
- Colour : red
- Odour : hydrocarbon-like
- Odour Threshold : No data available
- pH : No data available
- Melting point/freezing point : No data available
- Boiling point/boiling range : > 700 °F / > 371 °C
- Flash point : > 399 °F / > 204 °C



SAFETY DATA SHEET
Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

| | | |
|--|---|--|
| Evaporation rate | : | < 0.01 |
| Flammability (solid, gas) | : | No data available |
| Self-ignition | : | No data available |
| Upper explosion limit / Upper flammability limit | : | No data available |
| Lower explosion limit / Lower flammability limit | : | No data available |
| Vapour pressure | : | < 0.1 mmHg (68 °F / 20 °C) |
| Relative density | : | 0.9 (60.1 °F / 15.6 °C) |
| Density | : | 0.9 g/cm ³ (68 °F / 20 °C) |
| Solubility(ies) | | |
| Water solubility | : | No data available |
| Solubility in other solvents | : | No data available |
| Partition coefficient: n-octanol/water | : | No data available |
| Decomposition temperature | : | No data available |
| Viscosity | | |
| Viscosity, dynamic | : | No data available |
| Viscosity, kinematic | : | > 1000 mm ² /s (104 °F / 40 °C) |
| Oxidizing properties | : | No data available |

SECTION 10. STABILITY AND REACTIVITY

| | | |
|------------------------------------|---|---|
| Reactivity | : | No decomposition if stored and applied as directed. |
| Chemical stability | : | Stable under recommended storage conditions. |
| Possibility of hazardous reactions | : | Product will not undergo hazardous polymerization. |
| Conditions to avoid | : | None known. |
| Incompatible materials | : | None known. |



SAFETY DATA SHEET
Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

Hazardous decomposition
products

No hazardous decomposition products are known.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Not classified based on available information.

Components:

2,5-BIS(OCTYLDITHIO)-1,3,4-THIADIAZOLE:

Acute inhalation toxicity : Assessment: The component/mixture is classified as acute inhalation toxicity, category 4.

5,5'-dithiodi-1,3,4-thiadiazole-2(3H)-thione:

Acute oral toxicity : LD50 (Rat): > 2,000 mg/kg
Assessment: Not classified as acutely toxic by ingestion under GHS.

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg
Assessment: Not classified as acutely toxic by dermal absorption under GHS.

Skin corrosion/irritation

Not classified based on available information.

Product:

Remarks : May cause skin irritation in susceptible persons.

Components:

Pentene, 2,4,4-trimethyl-, sulfurized:

Result : Severe skin irritation

2,5-BIS(OCTYLDITHIO)-1,3,4-THIADIAZOLE:

Result : Irritating to skin.

5,5'-dithiodi-1,3,4-thiadiazole-2(3H)-thione:

Species : Rabbit
Result : No skin irritation

Serious eye damage/eye irritation

Not classified based on available information.

Product:

Remarks : Unlikely to cause eye irritation or injury.



SAFETY DATA SHEET
Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

Components:

2,5-BIS(OCTYLDITHIO)-1,3,4-THIADIAZOLE:

Result : Irritating to eyes.

5,5'-dithiodi-1,3,4-thiadiazole-2(3H)-thione:

Species : Rabbit

Result : Slight, transient irritation

Respiratory or skin sensitisation

Skin sensitisation

May cause an allergic skin reaction.

Respiratory sensitisation

Not classified based on available information.

Product:

Remarks : May cause allergic skin reaction.

Components:

Pentene, 2,4,4-trimethyl-, sulfurized:

Test Type : Open epicutaneous test

Species : Guinea pig

Assessment : The product is a skin sensitiser, sub-category 1A.

Method : OECD Test Guideline 406

2,5-BIS(OCTYLDITHIO)-1,3,4-THIADIAZOLE:

Assessment : May cause sensitisation by skin contact.

5,5'-dithiodi-1,3,4-thiadiazole-2(3H)-thione:

Test Type : Local lymph node assay

Assessment : May cause sensitisation by skin contact.

Method : OECD Test Guideline 429

Germ cell mutagenicity

Not classified based on available information.

Components:

5,5'-dithiodi-1,3,4-thiadiazole-2(3H)-thione:

Genotoxicity in vitro : Test Type: Ames test

Metabolic activation: with and without metabolic activation

Result: negative

Carcinogenicity

Not classified based on available information.

IARC No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

OSHA No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

NTP No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.



SAFETY DATA SHEET
Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

Reproductive toxicity

Not classified based on available information.

STOT - single exposure

Not classified based on available information.

STOT - repeated exposure

Not classified based on available information.

Aspiration toxicity

Not classified based on available information.

Product:

No aspiration toxicity classification

Further information

Product:

Remarks : No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Acute aquatic toxicity Category 3; Harmful to aquatic life.

Long-term (chronic) aquatic hazard : Chronic aquatic toxicity Category 3; Harmful to aquatic life with long lasting effects.

Components:

Pentene, 2,4,4-trimethyl-, sulfurized:

Toxicity to fish : LC50 (Fish): 0.494 mg/l
Exposure time: 96 h
Test Type: static test

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : EC50 (Aquatic invertebrates): 0.004 mg/l
Exposure time: 96 h
Test Type: static test

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Acute aquatic toxicity Category 1; Very toxic to aquatic life.

Long-term (chronic) aquatic hazard : Chronic aquatic toxicity Category 1; Very toxic to aquatic life with long lasting effects.

5,5'-dithiodi-1,3,4-thiadiazole-2(3H)-thione:

Toxicity to fish : EC50 (Pimephales promelas (fathead minnow)): > 454 mg/l
Exposure time: 96 h
Test Type: semi-static test



SAFETY DATA SHEET
Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

Toxicity to daphnia and other aquatic invertebrates : EC50 (Daphnia magna (Water flea)): 3 mg/l
Exposure time: 48 h
Test Type: static test

Toxicity to algae : EC50 (Pseudokirchneriella subcapitata (green algae)): 20 mg/l
End point: Growth inhibition
Exposure time: 72 h
Test Type: static test

Persistence and degradability

Components:

5,5'-dithiodi-1,3,4-thiadiazole-2(3H)-thione:

Biodegradability : Result: Not readily biodegradable.
Biodegradation: 0 %
Exposure time: 28 d
Method: OECD Test Guideline 301B

No data available

Bioaccumulative potential

Components:

No data available

Mobility in soil

Components:

No data available

Other adverse effects

No data available

Product:

Additional ecological information : No data available

Components:

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

General advice : Do not dispose of waste into sewer.
Do not contaminate ponds, waterways or ditches with chemical or used container.
Send to a licensed waste management company.

Dispose of in accordance with all applicable local, state and federal regulations.

Contaminated packaging : Empty remaining contents.
Dispose of as unused product.
Empty containers should be taken to an approved waste handling site for recycling or disposal.
Do not re-use empty containers.



SAFETY DATA SHEET

Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

SECTION 14. TRANSPORT INFORMATION

International Regulations

UNRTDG

Not regulated as a dangerous good

IATA-DGR

Not regulated as a dangerous good

IMDG-Code

Not regulated as a dangerous good

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

National Regulations

CFR_ROAD

Not regulated as a dangerous good

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 302 Extremely Hazardous Substances Threshold Planning Quantity

This material does not contain any components with a section 302 EHS TPQ.

SARA 311/312 Hazards : Respiratory or skin sensitisation

SARA 313 : This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

The components of this product are reported in the following inventories:

DSL : All components of this product are on the Canadian DSL



SAFETY DATA SHEET
Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

| | | |
|-------|---|---|
| AICS | : | On the inventory, or in compliance with the inventory |
| ENCS | : | Not in compliance with the inventory |
| KECI | : | Not in compliance with the inventory |
| PICCS | : | Not in compliance with the inventory |
| IECSC | : | On the inventory, or in compliance with the inventory |
| TCSI | : | On the inventory, or in compliance with the inventory |
| TSCA | : | On the inventory, or in compliance with the inventory |

TSCA list

No substances are subject to TSCA 12(b) export notification requirements.

Inventories

AICS (Australia), AIIC (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIoC (New Zealand), PICCS (Philippines), TCSI (Taiwan), TSCA (USA)

SECTION 16. OTHER INFORMATION

Further information

Internal information : R0290463

| | | | | | | | |
|---|---|---------------|----------|---------------------|----------|------------------------|----------|
| <p>NFPA:</p> <p style="text-align: center;">Special hazard</p> | <p>HMIS III:</p> <table border="1" style="width: 100%;"> <tr> <td style="background-color: blue; color: white;">HEALTH</td> <td style="text-align: center;">2</td> </tr> <tr> <td style="background-color: red; color: white;">FLAMMABILITY</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="background-color: yellow;">PHYSICAL HAZARD</td> <td style="text-align: center;">0</td> </tr> </table> <p>0 = not significant, 1 =Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 2 | FLAMMABILITY | 1 | PHYSICAL HAZARD | 0 |
| HEALTH | 2 | | | | | | |
| FLAMMABILITY | 1 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Combustible Liquid Class IIIB

Full text of H-Statements

H315 Causes skin irritation.



SAFETY DATA SHEET

Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

| | |
|------|--------------------------------------|
| H317 | May cause an allergic skin reaction. |
| H319 | Causes serious eye irritation. |
| H332 | Harmful if inhaled. |

Sources of key data used to compile the Safety Data Sheet
Valvoline internal data including own and sponsored test reports
The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Valvoline's Environmental Health and Safety Department (1-800-VALVOLINE).

List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists
BEI : Biological Exposure Index
CAS : Chemical Abstracts Service (Division of the American Chemical Society).
CMR : Carcinogenic, Mutagenic or Toxic for Reproduction
FG : Food grade
GHS : Globally Harmonized System of Classification and Labeling of Chemicals.
H-statement : Hazard Statement
IATA : International Air Transport Association.
IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization
ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"
IMDG : International Maritime Code for Dangerous Goods
ISO : International Organization for Standardization
logPow : octanol-water partition coefficient
LCxx : Lethal Concentration, for xx percent of test population
LDxx : Lethal Dose, for xx percent of test population.
ICxx : Inhibitory Concentration for xx of a substance
Ecxx : Effective Concentration of xx
N.O.S.: Not Otherwise Specified
OECD : Organization for Economic Co-operation and Development
OEL : Occupational Exposure Limit
P-Statement : Precautionary Statement
PBT : Persistent , Bioaccumulative and Toxic
PPE : Personal Protective Equipment
STEL : Short-term exposure limit
STOT : Specific Target Organ Toxicity
TLV : Threshold Limit Value



SAFETY DATA SHEET
Valvoline™ CRIMSON #2 GREASE

Version: 1.4

Revision Date: 03/04/2021

Print Date:
08/17/2021

TWA : Time-weighted average
vPvB : Very Persistent and Very Bioaccumulative
WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act
DOT : Department of Transportation
FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act
HMIRC : Hazardous Materials Information Review Commission
HMIS : Hazardous Materials Identification System
NFPA : National Fire Protection Association
NIOSH : National Institute for Occupational Safety and Health
OSHA : Occupational Safety and Health Administration
PMRA : Health Canada Pest Management Regulatory Agency
RTK : Right to Know
WHMIS : Workplace Hazardous Materials Information System

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Date of issue: 09/01/2016

Revision date: 09/02/2016

Supersedes: 09/01/2016

Version: 5.2

SECTION 1: Identification

1.1. Identification

| | |
|--------------|--|
| Product form | Mixture |
| Trade name | CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD |
| Product code | BU Chemicals |

1.2. Relevant identified uses of the substance or mixture and uses advised against

No additional information available

1.3. Details of the supplier of the safety data sheet

Hilti, Inc.
 Legacy Tower, Suite 1000
 75024 Plano - USA
 T +1 9724035800
 1-800-879-8000 toll free - F +1 918 254 0522

Supplier
 Hilti, Inc.
 Legacy Tower, Suite 1000
 75024 Plano - USA
 T +1 9724035800
 1-800-879-8000 toll free - F +1 918 254 0522

Department issuing data specification sheet
 Hilti AG
 Feldkircherstraße 100
 9494 Schaan - Liechtenstein
 T +423 234 2111
chemicals.hse@hilti.com

1.4. Emergency telephone number

| | |
|------------------|---|
| Emergency number | Chem-Trec Tel.: 1 800 424 9300 (USA, PR, Virgin Islands, Canada) Tel.: 703 527 3887 (Other countries) +1 918 8723000 1-800-879-8000 toll free |
|------------------|---|

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

| | |
|-------------------------------------|--|
| Flam. Aerosol 1 | H222 - Extremely flammable aerosol |
| Acute Tox. 4 (Inhalation:dust,mist) | H332 - Harmful if inhaled |
| Skin Irrit. 2 | H315 - Causes skin irritation |
| Eye Irrit. 2A | H319 - Causes serious eye irritation |
| Resp. Sens. 1 | H334 - May cause allergy or asthma symptoms or breathing difficulties if inhaled |
| Skin Sens. 1 | H317 - May cause an allergic skin reaction |
| Carc. 2 | H351 - Suspected of causing cancer |
| STOT SE 3 | H335 - May cause respiratory irritation |
| STOT RE 2 | H373 - May cause damage to organs through prolonged or repeated exposure |

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Full text of H statements : see section 16

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US)



GHS02

GHS07

GHS08

Signal word (GHS-US)

Danger

Hazard statements (GHS-US)

- H222 - Extremely flammable aerosol
- H315 - Causes skin irritation
- H317 - May cause an allergic skin reaction
- H319 - Causes serious eye irritation
- H332 - Harmful if inhaled
- H334 - May cause allergy or asthma symptoms or breathing difficulties if inhaled
- H335 - May cause respiratory irritation
- H351 - Suspected of causing cancer
- H373 - May cause damage to organs through prolonged or repeated exposure

Precautionary statements (GHS-US)

- P210 - Keep away from heat, hot surfaces, open flames, sparks. - No smoking
- P211 - Do not spray on an open flame or other ignition source
- P251 - Pressurized container: Do not pierce or burn, even after use
- P260 - Do not breathe spray
- P280 - Wear eye protection, protective clothing, protective gloves
- P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable

3.2. Mixture

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| Name | Product identifier | % | GHS-US classification |
|---|---------------------|---------|---|
| 4,4'-diphenylmethanediisocyanate, isomeres and homologues | (CAS No) 9016-87-9 | 40 - 60 | Acute Tox. 4 (Inhalation), H332 Skin Irrit. 2, H315 Eye Irrit. 2A, H319 Resp. Sens. 1, H334 Skin Sens. 1, H317 Carc. 2, H351 STOT SE 3, H335 STOT RE 2, H373 |
| tris(2-chloro-1-methylethyl) phosphate | (CAS No) 13674-84-5 | 10 - 25 | Acute Tox. 4 (Oral), H302 |
| Propane | (CAS No) 74-98-6 | 10 - 25 | Flam. Gas 1, H220 Compressed gas, H280 |
| Isobutane | (CAS No) 75-28-5 | 10 - 25 | Flam. Gas 1, H220 Compressed gas, H280 |
| Butane | (CAS No) 106-97-8 | 10 - 25 | Flam. Gas 1, H220 Compressed gas, H280 |

Full text of H-statements: see section 16

SECTION 4: First aid measures

4.1. Description of first aid measures

| | |
|---------------------------------------|--|
| First-aid measures after inhalation | Remove person to fresh air and keep comfortable for breathing. Call a poison center or a doctor if you feel unwell. |
| First-aid measures after skin contact | Wash skin with plenty of water. Take off contaminated clothing. If skin irritation or rash occurs: Get medical advice/attention. |
| First-aid measures after eye contact | Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| First-aid measures after ingestion | Call a poison center or a doctor if you feel unwell. |

4.2. Most important symptoms and effects, both acute and delayed

| | |
|--------------------------------------|--|
| Symptoms/injuries after inhalation | May cause respiratory irritation. May cause allergy or asthma symptoms or breathing difficulties if inhaled. |
| Symptoms/injuries after skin contact | Irritation. May cause an allergic skin reaction. |
| Symptoms/injuries after eye contact | Eye irritation. |

4.3. Indication of any immediate medical attention and special treatment needed

Treat symptomatically.

SECTION 5: Firefighting measures

5.1. Extinguishing media

| | |
|------------------------------|--|
| Suitable extinguishing media | Water spray. Dry powder. Foam. Carbon dioxide. |
|------------------------------|--|

5.2. Special hazards arising from the substance or mixture

| | |
|------------------|--|
| Fire hazard | Extremely flammable aerosol. |
| Explosion hazard | Pressurised container: May burst if heated. |
| Reactivity | Extremely flammable aerosol. Pressurised container: May burst if heated. |

5.3. Advice for firefighters

| | |
|--------------------------------|--|
| Protection during firefighting | Do not attempt to take action without suitable protective equipment. Self-contained breathing apparatus. Complete protective clothing. |
|--------------------------------|--|

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV; CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV); CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

6.1.1. For non-emergency personnel

Emergency procedures
Ventilate spillage area. No open flames, no sparks, and no smoking. Do not breathe spray. Avoid contact with skin and eyes.

6.1.2. For emergency responders

Protective equipment
Do not attempt to take action without suitable protective equipment. For further information refer to section 8: "Exposure controls/personal protection".

6.2. Environmental precautions

No additional information available

6.3. Methods and material for containment and cleaning up

Methods for cleaning up
Mechanically recover the product.

Other information
Dispose of materials or solid residues at an authorized site. After curing, the product can be disposed of with household waste.

6.4. Reference to other sections

For further information refer to section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear personal protective equipment. Do not breathe spray. Use only outdoors or in a well-ventilated area. Avoid contact with skin and eyes. May form flammable/explosive vapour-air mixture.

Hygiene measures
Wash contaminated clothing before reuse. Do not eat, drink or smoke when using this product. Always wash hands after handling the product.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions
Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Keep cool.

Storage temperature
5 - 25 °C

Heat and ignition sources
Keep away from heat and direct sunlight. Keep away from ignition sources.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| | | |
|--|-------------------------------------|------------------------|
| 4,4'-diphenylmethanediisocyanate, isomeres and homologues (9016-87-9) | | |
| Not applicable | | |
| Propane (74-98-6) | | |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 1800 mg/m ³ |

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| Propane (74-98-6) | | |
|--|----------------------|----------|
| OSHA | OSHA PEL (TWA) (ppm) | 1000 ppm |
| Isobutane (75-28-5) | | |
| ACGIH | ACGIH TWA (ppm) | 1000 ppm |
| ACGIH | ACGIH STEL (ppm) | 1000 ppm |
| tris(2-chloro-1-methylethyl) phosphate (13674-84-5) | | |
| Not applicable | | |
| Butane (106-97-8) | | |
| ACGIH | ACGIH TWA (ppm) | 1000 ppm |
| ACGIH | ACGIH STEL (ppm) | 1000 ppm |

8.2. Exposure controls

Appropriate engineering controls
Personal protective equipment

Ensure good ventilation of the work station.
Protective clothing. Safety glasses. Gloves.



Hand protection
Skin and body protection
Respiratory protection
Environmental exposure controls

Protective gloves.
Wear suitable protective clothing.
In case of inadequate ventilation wear respiratory protection.
Avoid release to the environment.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|--|
| Physical state | Liquid |
| Appearance | Aerosol. |
| Colour | Mixture contains one or more component(s) which have the following colour(s): Dark amber Colourless |
| Odour | There may be no odour warning properties, odour is subjective and inadequate to warn of overexposure. Mixture contains one or more component(s) which have the following odour(s): Stuffy odour Mild odour Characteristic odour Ether-like odour Pure substance is odourless Commercial/unpurified substance: Unpleasant odour Irritating/pungent odour |
| Odour threshold | No data available |
| pH | No data available |
| Melting point | Not applicable |
| Freezing point | No data available |
| Boiling point | < 35 °C |
| Flash point | < 0 °C |
| Relative evaporation rate (butylacetate=1) | No data available |
| Flammability (solid, gas) | No data available |
| Explosive limits | No data available |

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|----------------------------------|---|
| Explosive properties | Pressurised container: May burst if heated. |
| Oxidising properties | No data available |
| Vapour pressure | No data available |
| Relative density | No data available |
| Relative vapour density at 20 °C | No data available |
| Density | < 1.3 g/cm ³ |
| Solubility | No data available |
| Log Pow | No data available |
| Auto-ignition temperature | No data available |
| Decomposition temperature | No data available |
| Viscosity | No data available |
| Viscosity, kinematic | No data available |
| Viscosity, dynamic | No data available |

9.2. Other information

VOC content < 4 g/l EPA method 24

SECTION 10: Stability and reactivity

10.1. Reactivity

Extremely flammable aerosol. Pressurised container: May burst if heated.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

Heating may cause a fire or explosion.

10.4. Conditions to avoid

Avoid contact with hot surfaces. Heat. No flames, no sparks. Eliminate all sources of ignition.

10.5. Incompatible materials

No additional information available

10.6. Hazardous decomposition products

No additional information available.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity Inhalation:dust,mist: Harmful if inhaled.

| | |
|---|---------------|
| CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD | |
| ATE US (dust,mist) | 3.061 mg/l/4h |

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| 4,4'-diphenylmethanediisocyanate, isomeres and homologues (9016-87-9) | |
|--|---|
| LD50 oral rat | > 10000 mg/kg (Rat; Literature study) |
| LD50 dermal rabbit | > 5000 mg/kg (Rabbit; Literature study) |
| ATE US (gases) | 4500.000 ppmv/4h |
| ATE US (vapours) | 11.000 mg/l/4h |
| ATE US (dust,mist) | 1.500 mg/l/4h |

| Propane (74-98-6) | |
|----------------------------|---------------------------------|
| LC50 inhalation rat (mg/l) | 513 mg/l/4h (Rat; Literature) |
| LC50 inhalation rat (ppm) | 280000 ppm/4h (Rat; Literature) |
| ATE US (gases) | 280000.000 ppmv/4h |
| ATE US (vapours) | 513.000 mg/l/4h |
| ATE US (dust,mist) | 513.000 mg/l/4h |

| Isobutane (75-28-5) | |
|----------------------------|--------------------------------------|
| LC50 inhalation rat (mg/l) | > 50 mg/l/4h (Rat; Literature study) |
| LC50 inhalation rat (ppm) | 11000 ppm |

| tris(2-chloro-1-methylethyl) phosphate (13674-84-5) | |
|--|--|
| LD50 oral rat | 2800 - 4200 mg/kg bodyweight (Rat; Equivalent or similar to OECD 401; Experimental value; 1011-1824 mg/kg bodyweight; Rat; Experimental value) |
| LD50 dermal rat | > 2000 mg/kg (Rat; Experimental value) |
| LD50 dermal rabbit | > 2000 mg/kg bodyweight (Rabbit; Experimental value; OECD 402: Acute Dermal Toxicity) |
| ATE US (oral) | 500.000 mg/kg bodyweight |

| Butane (106-97-8) | |
|----------------------------|---------------------------------|
| LC50 inhalation rat (mg/l) | 658 mg/l/4h (Rat; Literature) |
| LC50 inhalation rat (ppm) | 276000 ppm/4h (Rat; Literature) |
| ATE US (gases) | 276000.000 ppmv/4h |
| ATE US (vapours) | 658.000 mg/l/4h |
| ATE US (dust,mist) | 658.000 mg/l/4h |

| | |
|-----------------------------------|---|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/irritation | Causes serious eye irritation. |
| Respiratory or skin sensitisation | May cause allergy or asthma symptoms or breathing difficulties if inhaled. May cause an allergic skin reaction. |
| Germ cell mutagenicity | Not classified |
| Carcinogenicity | Suspected of causing cancer. |

| 4,4'-diphenylmethanediisocyanate, isomeres and homologues (9016-87-9) | |
|--|----------------------|
| IARC group | 3 - Not classifiable |

| | |
|--|--|
| Reproductive toxicity | Not classified |
| Specific target organ toxicity (single exposure) | May cause respiratory irritation. |
| Specific target organ toxicity (repeated exposure) | May cause damage to organs through prolonged or repeated exposure. |
| Aspiration hazard | Not classified |
| Symptoms/injuries after inhalation | May cause respiratory irritation. May cause allergy or asthma symptoms or breathing difficulties if inhaled. |
| Symptoms/injuries after skin contact | Irritation. May cause an allergic skin reaction. |

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Symptoms/injuries after eye contact Eye irritation.

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general May cause long lasting harmful effects to aquatic life.

| 4,4'-diphenylmethanediisocyanate, isomeres and homologues (9016-87-9) | |
|--|--|
| LC50 other aquatic organisms 1 | > 1000 mg/l (96 h) |
| Threshold limit other aquatic organisms 1 | > 1000 mg/l (96 h) |
| Propane (74-98-6) | |
| TLM fish 1 | 17.8 - 19.7,96 h; Pimephales promelas |
| Threshold limit algae 1 | 1.45 - 4.53,72 h; Algae |
| Threshold limit algae 2 | 8 mg/l (72 h; Algae) |
| Isobutane (75-28-5) | |
| Threshold limit algae 1 | 1.07 mg/l (Algae) |
| Threshold limit algae 2 | 7.15 mg/l (72 h; Algae) |
| tris(2-chloro-1-methylethyl) phosphate (13674-84-5) | |
| LC50 fish 1 | 98 mg/l (96 h; Pimephales promelas; GLP) |
| EC50 Daphnia 1 | 65 - 335 mg/l (48 h; Daphnia magna; GLP) |
| LC50 fish 2 | 56.2 mg/l (96 h; Brachydanio rerio) |
| Threshold limit algae 1 | 73 mg/l (96 h; Selenastrum capricornutum; Growth rate) |
| Butane (106-97-8) | |
| TLM fish 1 | 1000 mg/l (96 h; Pisces) |
| Threshold limit other aquatic organisms 1 | 0.6 - 0.9,504 h; Daphnia magna |
| Threshold limit algae 1 | 0.88 - 1.76,Algae |

12.2. Persistence and degradability

| 4,4'-diphenylmethanediisocyanate, isomeres and homologues (9016-87-9) | |
|--|--|
| Persistence and degradability | Not readily biodegradable in water. Hydrolysis in water. No (test)data on mobility of the substance available. |
| Propane (74-98-6) | |
| Persistence and degradability | Readily biodegradable in water. Not applicable (gas). Photodegradation in the air. |
| Isobutane (75-28-5) | |
| Persistence and degradability | Inherently biodegradable. Biodegradable in the soil. Not applicable (gas). |
| tris(2-chloro-1-methylethyl) phosphate (13674-84-5) | |
| Persistence and degradability | Not readily biodegradable in water. No (test)data on mobility of the substance available. |
| Butane (106-97-8) | |
| Persistence and degradability | Readily biodegradable in water. |

12.3. Bioaccumulative potential

| 4,4'-diphenylmethanediisocyanate, isomeres and homologues (9016-87-9) | |
|--|----------------------|
| BCF fish 1 | 1 (Pisces) |
| Bioaccumulative potential | Not bioaccumulative. |

**CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812
CC; CF-F ECO; CF-I 50 ECO GV; CF 125-50; CF 125-5W50; CF 126-N;
CF 126; CF ISO 750; CF-I 750 B2 (-SV); CF 116-45; CF F 600; CF 116;
CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD**

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| Propane (74-98-6) | |
|--|---|
| Bioaccumulative potential | Low potential for bioaccumulation (Log Kow < 4). |
| Isobutane (75-28-5) | |
| BCF fish 1 | 20 - 52 (Pisces; QSAR) |
| BCF other aquatic organisms 1 | 20 - 52 (Daphnia magna; QSAR) |
| Log Pow | 2.8 (Experimental value) |
| Bioaccumulative potential | Low potential for bioaccumulation (BCF < 500). |
| tris(2-chloro-1-methylethyl) phosphate (13674-84-5) | |
| BCF fish 1 | 0.8 - 4.6 (Cyprinus carpio; Test duration: 6 weeks) |
| Log Pow | 2.59 (Experimental value) |
| Bioaccumulative potential | Low potential for bioaccumulation (BCF < 500). |
| Butane (106-97-8) | |
| Log Pow | 2.89 (Experimental value) |
| Bioaccumulative potential | Low potential for bioaccumulation (Log Kow < 4). |

12.4. Mobility in soil

| Propane (74-98-6) | |
|----------------------------|--------------------|
| Surface tension | 0.016 N/m (-47 °C) |
| Isobutane (75-28-5) | |
| Surface tension | 0.014 N/m (-10 °C) |
| Butane (106-97-8) | |
| Surface tension | < 0.1 N/m (0 °C) |

12.5. Other adverse effects

Effect on the global warming No known effects from this product.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste treatment methods Dispose of contents/container in accordance with licensed collector's sorting instructions.
Waste disposal recommendations After curing, the product can be disposed of with household waste.

SECTION 14: Transport information

In accordance with ADR / RID / IMDG / IATA / ADN

14.1. UN number

| | |
|---------------|------|
| UN-No. (ADR) | 1950 |
| UN-No. (IMDG) | 1950 |
| UN-No. (IATA) | 1950 |
| UN-No. (ADN) | 1950 |
| UN-No. (RID) | 1950 |

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

14.2. UN proper shipping name

| | |
|---------------------------------------|----------------------------|
| Proper Shipping Name (ADR) | AEROSOLS |
| Proper Shipping Name (IMDG) | AEROSOLS |
| Proper Shipping Name (IATA) | Aerosols, flammable |
| Proper Shipping Name (ADN) | AEROSOLS |
| Proper Shipping Name (RID) | AEROSOLS |
| Transport document description (ADR) | UN 1950 AEROSOLS, 2.1, (D) |
| Transport document description (IMDG) | UN 1950 AEROSOLS, 2.1 |

14.3. Transport hazard class(es)

ADR

| | |
|----------------------------------|-----|
| Transport hazard class(es) (ADR) | 2.1 |
| Danger labels (ADR) | 2.1 |



IMDG

| | |
|-----------------------------------|-----|
| Transport hazard class(es) (IMDG) | 2.1 |
| Danger labels (IMDG) | 2.1 |



IATA

| | |
|-----------------------------------|-----|
| Transport hazard class(es) (IATA) | 2.1 |
| Hazard labels (IATA) | 2.1 |



ADN

| | |
|----------------------------------|-----|
| Transport hazard class(es) (ADN) | 2.1 |
| Danger labels (ADN) | 2.1 |

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations



RID

| | |
|----------------------------------|-----|
| Transport hazard class(es) (RID) | 2.1 |
| Danger labels (RID) | 2.1 |



14.4. Packing group

| | |
|----------------------|----------------|
| Packing group (ADR) | Not applicable |
| Packing group (IMDG) | Not applicable |
| Packing group (IATA) | Not applicable |
| Packing group (ADN) | Not applicable |
| Packing group (RID) | Not applicable |

14.5. Environmental hazards

| | |
|-------------------------------|--|
| Dangerous for the environment | No |
| Marine pollutant | No |
| Other information | No supplementary information available |

14.6. Special precautions for user

- Overland transport

| | |
|--------------------------------|--------------------|
| Classification code (ADR) | 5F |
| Special provisions (ADR) | 190, 327, 344, 625 |
| Limited quantities (ADR) | 1I |
| Packing instructions (ADR) | P207, LP02 |
| Mixed packing provisions (ADR) | MP9 |
| Tunnel restriction code (ADR) | D |

- Transport by sea

| | |
|-----------------------------|-----------------------------|
| Special provisions (IMDG) | 63, 190, 277, 327, 344, 959 |
| Limited quantities (IMDG) | SP277 |
| Packing instructions (IMDG) | P207, LP02 |
| EmS-No. (Fire) | F-D |
| EmS-No. (Spillage) | S-U |
| Stowage category (IMDG) | None |

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|------------------------------------|--|
| Stowage and segregation (IMDG) | Protected from sources of heat For AEROSOLS with a maximum capacity of 1 litre: Category A. Segregation as for class 9 but 'Separated from' class 1 except division 1.4. For AEROSOLS with a capacity above 1 litre: Category B. Segregation as for the appropriate sub-division of class 2. For WASTE AEROSOLS: Category C. Clear of living quarters. Segregation as for the appropriate sub-division of class 2. |
| MFAG-No | 126 |
| - Air transport | |
| PCA packing instructions (IATA) | 203 |
| PCA max net quantity (IATA) | 75kg |
| Special provisions (IATA) | A145, A167, A802 |
| - Inland waterway transport | |
| Classification code (ADN) | 5F |
| Special provisions (ADN) | 19, 327, 344, 625 |
| Limited quantities (ADN) | 1 L |
| Excepted quantities (ADN) | E0 |
| Equipment required (ADN) | PP, EX, A |
| Ventilation (ADN) | VE01, VE04 |
| Number of blue cones/lights (ADN) | 1 |
| Carriage prohibited (ADN) | No |
| Not subject to ADN | No |
| - Rail transport | |
| Special provisions (RID) | 190, 327, 344, 625 |
| Limited quantities (RID) | 1L |
| Packing instructions (RID) | P207, LP02 |
| Carriage prohibited (RID) | No |

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

SECTION 15: Regulatory information

15.1. US Federal regulations

No additional information available

15.2. International regulations

CANADA

No additional information available

EU-Regulations

No additional information available

Classification according to Regulation (EC) No. 1272/2008 [CLP]

Aerosol 1 H222;H229
 Acute Tox. 4 (Inhalation) H332
 Skin Irrit. 2 H315

CF-AS CJP; CF ISO 765; CF ISO 500+; CF-I ECO +; CS-F JS; CF 812 CC; CF-F ECO; CF-I 50 ECO GV;CF 125-50; CF 125-5W50; CF 126-N; CF 126; CF ISO 750; CF-I 750 B2 (-SV);CF 116-45; CF F 600; CF 116; CF-JI; CF 812; CF 812 WD; CF-I 65 ECO; CF-I XTW WD

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|---------------|------|
| Eye Irrit. 2 | H319 |
| Resp. Sens. 1 | H334 |
| Skin Sens. 1 | H317 |
| Carc. 2 | H351 |
| STOT SE 3 | H335 |
| STOT RE 2 | H373 |

Full text of hazard classes and H-statements : see section 16

National regulations

No additional information available

15.3. US State regulations

No additional information available

SECTION 16: Other information

Revision date 09/02/2016

Full text of H-statements:

| | |
|------|---|
| H220 | Extremely flammable gas |
| H222 | Extremely flammable aerosol |
| H280 | Contains gas under pressure; may explode if heated |
| H302 | Harmful if swallowed |
| H315 | Causes skin irritation |
| H317 | May cause an allergic skin reaction |
| H319 | Causes serious eye irritation |
| H332 | Harmful if inhaled |
| H334 | May cause allergy or asthma symptoms or breathing difficulties if inhaled |
| H335 | May cause respiratory irritation |
| H351 | Suspected of causing cancer |
| H373 | May cause damage to organs through prolonged or repeated exposure |

SDS_US_Hilti

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product

MATERIAL SAFETY DATA SHEET

1. Product and Company Identification

Material name DECON-AHOL WFI Aerosol
Revision date 11-24-2011
Version # 01
CAS # Mixture
MSDS Number VEL-104-AEROSOL
Product use Decontaminant.
Manufacturer/Supplier Veltek Associates, Inc.
15 Lee Blvd
MALVERN, PA 19355 USA
vai@sterile.com
Contact Person: All questions regarding chemical content should be directed to CareCHEM 24
Telephone: 610-644-8335
Emergency CARECHEM 24: 1-866-928-0789

2. Hazards Identification

Physical state Liquid.
Appearance Clear liquid.
Emergency overview WARNING
Flammable liquid and vapor. Causes eye irritation. Prolonged or repeated contact may dry skin and cause irritation. May cause central nervous system effects.
OSHA regulatory status This product is considered hazardous under 29 CFR 1910.1200 (Hazard Communication).
Potential health effects
Routes of exposure Inhalation. Ingestion. Skin contact. Eye contact.
Eyes Causes eye irritation.
Skin Prolonged or repeated contact may dry skin and cause irritation. Defats the skin.
Inhalation Vapors may cause drowsiness and dizziness. May cause central nervous system effects.
Ingestion Swallowing or vomiting of the liquid may result in aspiration into the lungs. Be aware that symptoms of chemical pneumonia (shortness of breath) may occur several hours after exposure.
Target organs Eyes. Skin. Respiratory system. Central nervous system.
Chronic effects None known.
Signs and symptoms Corneal damage. Conjunctivitis. Defatting of the skin. Rash. Irritation. Symptoms can include irritation, redness, scratching of the cornea, and tearing. Drowsiness and dizziness.
Potential environmental effects The product components are not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

3. Composition / Information on Ingredients

| Components | CAS # | Percent |
|-------------------|-----------|---------|
| Isopropyl alcohol | 67-63-0 | 60-95 |
| Nitrogen | 7727-37-9 | >1 |

Composition comments All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First Aid Measures

First aid procedures

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Get medical attention if irritation persists after washing.
Skin contact Wash skin with soap and water. Get medical attention if irritation develops and persists.

| | |
|---------------------------|---|
| Inhalation | Move into fresh air and keep at rest. If breathing stops, provide artificial respiration. Get medical attention if any discomfort continues. |
| Ingestion | Rinse mouth thoroughly with water and give large amounts of milk or water to people not unconscious. Do not induce vomiting. If vomiting occurs, the head should be kept low so that stomach vomit doesn't enter the lungs. Get medical attention. |
| Notes to physician | In case of shortness of breath, give oxygen. Keep victim warm. |
| General advice | In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. |

5. Fire Fighting Measures

| | |
|--|---|
| Flammable properties | Aerosol containers can explode when heated, due to excessive pressure build-up. The product is flammable, and heating may generate vapors which may form explosive vapor/air mixtures. |
| Extinguishing media | |
| Suitable extinguishing media | Extinguish with alcohol-resistant foam, carbon dioxide or dry powder. |
| Unsuitable extinguishing media | Do not use a solid water stream as it may scatter and spread fire. |
| Protection of firefighters | |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. Solvent vapors may form explosive mixtures with air. |
| Protective equipment and precautions for firefighters | Selection of respiratory protection for firefighting: follow the general fire precautions indicated in the workplace. Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Wear full protective clothing, including helmet, self-contained positive pressure or pressure demand breathing apparatus, protective clothing and face mask. Move containers from fire area if you can do it without risk. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. |
| Specific methods | In the event of fire and/or explosion do not breathe fumes. Wear full protective clothing, including helmet, self-contained positive pressure or pressure demand breathing apparatus, protective clothing and face mask. |

6. Accidental Release Measures

| | |
|----------------------------------|---|
| Personal precautions | Extinguish all ignition sources. Avoid sparks, flames, heat and smoking. Ventilate. Keep unnecessary personnel away. Local authorities should be advised if significant spillages cannot be contained. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep people away from and upwind of spill/leak. Ventilate closed spaces before entering. Use personal protection recommended in Section 8 of the MSDS. |
| Environmental precautions | Prevent further leakage or spillage if safe to do so. Do not contaminate water. |
| Methods for containment | Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. |
| Methods for cleaning up | ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop the flow of material, if this is without risk. Prevent entry into waterways, sewer, basements or confined areas. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water. Large Spills: Dike the spilled material, where this is possible. Following product recovery, flush area with water. Absorb spillage with non-combustible, absorbent material. Small Spills: Clean surface thoroughly to remove residual contamination. Never return spills in original containers for re-use. |
| Other information | Clean up in accordance with all applicable regulations. |

7. Handling and Storage

Handling

The product is highly flammable, and explosive vapor/air mixtures may be formed even at normal room temperatures. The product is flammable, and heating may generate vapors which may form explosive vapor/air mixtures. Do not handle or store near an open flame, heat or other sources of ignition. Do not smoke. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Use only in well-ventilated areas. Pressurized container: Do not pierce or burn, even after use. Avoid prolonged exposure. Use Personal Protective Equipment recommended in section 8 of the MSDS. Wash thoroughly after handling.

Storage

Follow rules for flammable liquids. Keep away from heat, sparks and open flame. Store in cool place. Keep in a well-ventilated place. Keep container tightly closed. Keep in an area equipped with sprinklers. Keep this material away from food, drink and animal feed. Use care in handling/storage. Keep away from sources of ignition - No smoking.

8. Exposure Controls / Personal Protection

Occupational exposure limits

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------|------|---------|
| Isopropyl alcohol (67-63-0) | STEL | 400 ppm |
| | TWA | 200 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------------|------|-----------|
| Isopropyl alcohol (67-63-0) | PEL | 980 mg/m3 |
| | | 400 ppm |

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

| Components | Type | Value |
|-----------------------------|------|-----------|
| Isopropyl alcohol (67-63-0) | STEL | 984 mg/m3 |
| | | 400 ppm |
| | TWA | 492 mg/m3 |
| | | 200 ppm |

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

| Components | Type | Value |
|-----------------------------|------|---------|
| Isopropyl alcohol (67-63-0) | STEL | 400 ppm |
| | TWA | 200 ppm |

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

| Components | Type | Value |
|-----------------------------|------|---------|
| Isopropyl alcohol (67-63-0) | STEL | 400 ppm |
| | TWA | 200 ppm |

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

| Components | Type | Value |
|-----------------------------|------|------------|
| Isopropyl alcohol (67-63-0) | STEL | 1230 mg/m3 |
| | | 500 ppm |
| | TWA | 983 mg/m3 |
| | | 400 ppm |

Mexico. Occupational Exposure Limit Values

| Components | Type | Value |
|-----------------------------|------|------------|
| Isopropyl alcohol (67-63-0) | STEL | 1225 mg/m3 |
| | | 500 ppm |
| | TWA | 980 mg/m3 |
| | | 400 ppm |

Engineering controls

Explosion proof exhaust ventilation should be used. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof equipment. Provide easy access to water supply or an emergency shower.

Personal protective equipment

Eye / face protection Wear chemical goggles.

| | |
|---------------------------------------|--|
| Skin protection | Wear appropriate chemical resistant clothing. Anti-static boots. Wear protective gloves. Be aware that the liquid may penetrate the gloves. Frequent change is advisable. Suitable gloves can be recommended by the glove supplier. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. In the United States of America, if respirators are used, a program should be instituted to assure compliance with OSHA 29 CFR 1910.134. Use a NIOSH/MSHA approved air purifying respirator as needed to control exposure. Consult with respirator manufacturer to determine respirator selection, use, and limitations. Use positive pressure, air-supplied respirator for uncontrolled releases or when air purifying respirator limitations may be exceeded. Follow respirator protection program requirements (OSHA 1910.134 and ANSI Z88.2) for all respirator use. |
| General hygiene considerations | Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and immediately after handling the product. When using, do not eat, drink or smoke. Launder contaminated clothing before reuse. Remove and isolate contaminated clothing and shoes. |

9. Physical & Chemical Properties

| | |
|---|-----------------------------------|
| Appearance | Clear liquid. |
| Color | Clear. |
| Odor | Mild alcohol. |
| Odor threshold | Not available. |
| Physical state | Liquid. |
| Form | Liquid. |
| pH | 7 |
| Melting point | 14 °F (-10 °C) |
| Freezing point | Not available. |
| Boiling point | 180.5 °F (82.5 °C) |
| Flash point | 64.9 °F (18.3 °C) |
| Evaporation rate | Not available. |
| Flammability limits in air, upper, % by volume | 12 |
| Flammability limits in air, lower, % by volume | 2.5 |
| Vapor pressure | 4.41 Pa |
| Vapor density | 1.6 (Air=1) |
| Specific gravity | 0.84 |
| Solubility (water) | Miscible. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | 750.2 °F (399 °C) |
| Decomposition temperature | Not available. |
| Viscosity | 2.1 cP @ 25°C (Isopropyl alcohol) |

10. Chemical Stability & Reactivity Information

| | |
|---|---|
| Chemical stability | Stable under normal temperature conditions. Risk of explosion. Risk of ignition. |
| Conditions to avoid | Heat, flames and sparks. Avoid high temperatures. |
| Incompatible materials | Strong oxidizing agents. Strong acids. Alkali metals. Aluminum. |
| Hazardous decomposition products | Upon decomposition, this product emits carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons. Aldehydes. |
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |

11. Toxicological Information

Toxicological data

Components

Test Results

Isopropyl alcohol (67-63-0)

Acute Dermal LD50 Rabbit: 12800 mg/kg

Acute Inhalation LC50 Rat: 72.6 mg/l 4 hours

Acute Oral LD50 Rat: 4396 mg/kg

Acute effects

Vapors may cause drowsiness and dizziness. Causes eye irritation. Defats the skin. Swallowing or vomiting of the liquid may result in aspiration into the lungs. Be aware that symptoms of chemical pneumonia (shortness of breath) may occur several hours after exposure. Prolonged or repeated contact may dry skin and cause irritation. May cause central nervous system effects.

Local effects

Defats the skin.

Sensitization

Not a skin sensitizer.

Chronic effects

None known.

Carcinogenicity

None known.

ACGIH Carcinogens

Isopropyl alcohol (CAS 67-63-0)

A4 Not classifiable as a human carcinogen.

Mutagenicity

No data available.

Neurological effects

Not available.

Reproductive effects

Not classified.

Teratogenicity

Not available.

Symptoms and target organs

Symptoms can include irritation, redness, scratching of the cornea, and tearing. Vapors may cause drowsiness and dizziness.

12. Ecological Information

Ecotoxicological data

Components

Test Results

Isopropyl alcohol (67-63-0)

EC50 Daphnia magna: 13299 mg/l 48 hours

LC50 Bluegill (Lepomis macrochirus): > 1400 mg/l 96 hours

LC50 Fathead minnow (Pimephales promelas): 11130 mg/l 96 hours

Ecotoxicity

The product components are not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment. The product is a volatile organic compound which has a photochemical ozone creation potential.

Persistence and degradability

No data available.

Bioaccumulation / Accumulation

No data available.

Partition coefficient (n-octanol/water)

Not available.

Mobility in environmental media

No data available.

13. Disposal Considerations

Waste codes

D001: Waste Flammable material with a flash point <140 °F

Disposal instructions

Dispose of this material and its container at hazardous or special waste collection point. Do not incinerate sealed containers. Do not allow this material to drain into sewers/water supplies. If discarded, this product is considered a RCRA ignitable waste, D001. Dispose in accordance with all applicable regulations.

Waste from residues / unused products

Dispose of in accordance with local regulations.

Contaminated packaging

Dispose of in accordance with local regulations. Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport Information

DOT

Basic shipping requirements:

UN number UN1950
Proper shipping name Aerosols
Hazard class 2.1
Labels required 2.1

Additional information:

Special provisions N82
Packaging exceptions 306
Packaging non bulk None
Packaging bulk None

IATA

Basic shipping requirements:

UN number UN1950
Proper shipping name Aerosols
Hazard class 2.1

Environmental hazards

Marine pollutant No
Labels required 2.1

Additional information:

Packaging exceptions 306
Packaging non bulk None
Packaging bulk None

IMDG

Basic shipping requirements:

UN number UN1950
Proper shipping name Aerosols
Hazard class 2.1

Environmental hazards

Marine pollutant No
Labels required 2.1

Additional information:

Packaging exceptions 306

TDG

Basic shipping requirements:

Proper shipping name Aerosols
Hazard class 2.1
UN number UN1950
Marine pollutant No

Additional information:

Special provisions N82

Basic shipping requirements:

Labels required 2.1

Additional information:

Packaging exceptions 306
Packaging non bulk None
Packaging bulk None

15. Regulatory Information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

CERCLA/SARA Hazardous Substances - Not applicable.

TSCA Section 12(b) Export Notification(40 CFR 707, Subpt. D)

Not regulated.

US EPCRA (SARA Title III) Section 313 - Toxic Chemical: De minimis concentration

Isopropyl alcohol (CAS 67-63-0) 1.0 %

US EPCRA (SARA Title III) Section 313 - Toxic Chemical: Listed substance

Isopropyl alcohol (CAS 67-63-0) Listed.

CERCLA (Superfund) reportable quantity (lbs) (40 CFR 302.4)

Isopropyl alcohol: 100

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories
 Immediate Hazard - Yes
 Delayed Hazard - Yes
 Fire Hazard - Yes
 Pressure Hazard - No
 Reactivity Hazard - No

Section 302 extremely hazardous substance (40 CFR 355, Appendix A)
 No

Section 311/312 (40 CFR 370)
 Yes

Drug Enforcement Administration (DEA) (21 CFR 1308.11-15)
 Not controlled

Canadian regulations
 This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

WHMIS status
 Controlled

WHMIS classification
 B5 - Flammable/Combustible
 D2B - Other Toxic Effects-TOXIC

WHMIS labeling**Inventory status**

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

State regulations
 This product does not contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

US - California Hazardous Substances (Director's): Listed substance

Isopropyl alcohol (CAS 67-63-0) Listed.

US - Massachusetts RTK - Substance: Listed substance

Isopropyl alcohol (CAS 67-63-0) Listed.

US - New Jersey Community RTK (EHS Survey): Reportable threshold

Isopropyl alcohol (CAS 67-63-0) 500 LBS

US - New Jersey RTK - Substances: Listed substance

Isopropyl alcohol (CAS 67-63-0) Listed.

US - Pennsylvania RTK - Hazardous Substances: Listed substance

Isopropyl alcohol (CAS 67-63-0)

Listed.

Mexico regulations This safety data sheet was prepared in accordance with the Official Mexican Standard (NOM-018-STPS-2000).

16. Other Information

Further information HMIS® is a registered trade and service mark of the NPCA.

HMIS® ratings Health: 1*
Flammability: 3
Physical hazard: 0

NFPA ratings Health: 1
Flammability: 3
Instability: 0

Disclaimer This information is provided without warranty. The information is believed to be correct. This information should be used to make an independent determination of the methods to safeguard workers and the environment.

Issue date 11-24-2011

Safety Data Sheet

ME-175E/E524 Food Grade Pure Silicone Mold Release

Stoner

Copying and/or downloading of this information for the purpose of properly utilizing Stoner Inc. product is allowed provided that: (1) the information is copied in full with no changes unless prior agreement is obtained from Stoner Inc., & (2) neither the copy nor the original is resold or otherwise distributed with intention of earning profit thereon.

1. IDENTIFICATION

Stoner Incorporated
1070 Robert Fulton Hwy.
Quarryville, PA 17566
1-800-227-5538

Product Name: Food Grade Pure Silicone Mold Release
Product Code: ME-175E/E524
Product Use: Mold Release
24-hour emergency phone: 1-800-424-9300 [CHEMTREC]

2. HAZARD IDENTIFICATION

POTENTIAL HEALTH EFFECTS

Classification of the chemical in accordance with paragraph (d) of §1910.1200;

GHS Hazard
Symbols



GHS Classification

Gases under pressure - Liquefied Gas
Flammable Aerosol Category 2

Signal Word

Warning

Hazard Statements

Flammable aerosol.
Contains gas under pressure; may explode if heated.

Precautionary Statements

Prevention

Keep away from heat/sparks/open flames/hot surfaces. – No smoking.
Do not spray on an open flame or other ignition source.
Pressurized container: Do not pierce or burn, even after use.

Storage

Protect from sunlight. Store in a well-ventilated place.
Protect from sunlight. Do not expose to temperatures exceeding 50°C/ 122°F.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| COMPONENT | CAS # | Percent |
|-------------------------------------|---------|---------|
| Halogenated hydrocarbon/ether blend | Mixture | 80-100 |

HMIS® III* HAZARDOUS WARNINGS:

| | | | | |
|-----------|-----------------|-------------|--------------------------------|---------------|
| Health: 1 | Flammability: 2 | Physical: 1 | Personal Protective Equipment: | See Section 8 |
|-----------|-----------------|-------------|--------------------------------|---------------|

* See www.paint.org/hmis or call the NPCA at 1 (202) 462-6272 for more information on this current rating system.

4. FIRST AID MEASURES

Eyes: Immediately flush eyes gently with plenty of water for at least 15 minutes while holding eyelids apart. If symptoms persist or there is visual difficulty, seek medical attention.

Skin Contact: In case of contact, immediately wash contaminated area with plenty of water for at least 15 minutes. Seek medical attention if symptoms persist. Wash clothing before reuse. For liquid contact, treat for frostbite if necessary.

Ingestion: Ingestion is an unlikely route of exposure. Contact a physician, medical facility, or poison control center for advice on whether to induce vomiting. Never give anything by mouth if victim is rapidly losing consciousness or is unconscious or convulsing.

Inhalation: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Seek immediate medical attention.

NOTES TO PHYSICIAN:

Because of possible disturbances of cardiac rhythm, catecholamine drugs, such as epinephrine, should be used only in situations of emergency life support.

5. FIRE FIGHTING MEASURES

Fire and/or Explosion Hazards: This product contains a component(s) that is considered an extremely flammable gas(es), which has vapors that are heavier than air and may travel along the ground or be moved by ventilation and ignited by heat, pilot lights, or other flames and ignition sources at locations distant from the material's handling point. Containers may rupture or explode under fire conditions.

Fire Fighting Instructions: Use CO₂, foam or dry chemical. Water is generally not effective and may spread fire; however, water spray may be used from a safe distance to cool closed containers and protect surrounding area.

6. ACCIDENTAL RELEASE MEASURES**STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED:**

Ventilate contaminated area. Remove all sources of ignition. Wear appropriate personal protective equipment (PPE). Stop or reduce discharge if it can be done safely. Avoid run-off into storm sewers and ditches which may lead to natural waterways. Clean up with absorbent material. Place absorbent materials into container and close it tightly. Dispose of container properly.

7. HANDLING AND STORAGE

Handling: Use with adequate ventilation. Do not use near ignition sources. Avoid prolonged or repeated contact with skin. Avoid prolonged or repeated breathing of vapor. May cause frostbite.

Storage: Store in a cool, dry, well ventilated area away from all sources of ignition. Do not store at temperatures above 120 degrees F. Empty container may contain residues which are hazardous. Store away from incompatible materials such as materials that support combustion (oxidizing materials) and corrosive materials (strong acids or bases). Store away from oxygen cylinders or other oxidizing materials and possible ignition sources. Ground all equipment and cylinders before use.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Engineering Controls: Ventilation should be adequate to prevent exposures above the limits indicated below in this section of the MSDS (from known, suspected or apparent adverse effects).

Eye Protection: Wear chemically resistant safety glasses with side shields when handling this product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid or airborne material. Do not wear contact lenses. Have an eye wash station available.

Skin Protection: The use of chemically resistant gloves is recommended if there is any possibility of prolonged or repeated liquid contact with skin.

Respiratory Protection: A supplied air respirator should be used if ventilation is not sufficient to maintain exposure limits. Use NIOSH approved respirator where there is likelihood of inhalation of the product mist, spray or aerosol.

| COMPONENT | CAS # | ACGIH TLV | OSHA PEL | OTHER |
|-------------------------------------|--------------|------------------|-----------------|--------------------|
| Halogenated hydrocarbon/ether blend | Mixture | Not established | Not established | 1000ppm TWA (Mfr.) |

9. PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|------------------------------|-------------------------------|--|-------------------|
| Physical State: | Aerosol can | Lower Flammability Limit (%): | Not applicable |
| Appearance: | Clear Colorless | Upper Flammability Limit (%): | Not applicable |
| Odor: | Slight ethereal. | Vapor Pressure (PSIG @ 70°F): | 79.00 |
| Odor Threshold: | Mild | Vapor Density [air = 1]: | 2.00 |
| pH: | Not applicable | Relative Density (H ₂ O=1): | 0.8 |
| Melting/Freezing Point (°F): | No data available | Solubility in Water: | Negligible; 0-1% |
| Boiling Point (°F): | No data available | Partial Coefficient: n-octanol/water: | No data available |
| Flash Point (°F PMCC): | Not applicable | Autoignition Temperature (°F): | Not applicable |
| Evaporation Rate: | 0.1-0.5 (n-Butyl acetate = 1) | Decomposition Temperature (°F): | No data available |
| Flammability (solid, gas): | No data available | Viscosity, dynamic (cSt): | No data available |
| Percent VOCs (%): | 40 - 60 | | |

10. STABILITY AND REACTION

Chemical Stability: Stable.

Conditions to Avoid: Avoid contact with: Alkali. Alkaline earth metals. Freshly abraded aluminum surfaces. Powdered metals. Ignition sources such as open flames, sparks, static discharges or glowing metal surfaces. Oxidizers. Acetic acids Organic acid anhydrides.

Decomposition Products: This material can be decomposed by extremely high temperatures (open flames, glowing metal surfaces, etc.) forming hydrofluoric acid and carbonyl fluoride. If heated with peroxides present, violent decomposition can occur. When heated to temperatures above 150°C in the presence of air, one of the ingredients in this product can form formaldehyde vapors. Formaldehyde vapor is harmful by inhalation; irritating to eyes; sensitizer to the respiratory system; an acute toxicant and a potential cancer hazard at concentrations greater than 0.75 ppm.

11. TOXICOLOGICAL INFORMATION

Reproductive & Developmental No data available.

Toxicity:

Ingredient
Halogenated hydrocarbon

Ether propellant

CAS #
Mixture

Toxicological Data
ORAL ALD Rat > 1500 mg/kg
4HR ALC Rat 383000 ppm
Inhalation LC50 Rat = 164000 ppm

12. ECOLOGICAL INFORMATION

Ecological Toxicity: No data available
Mobility: No data available

Ingredient
Ether propellant

CAS #

Toxicological Data
48HR NOEC GUPPIES > 4000 mg/L
48HR NOEC Daphnia > 4000 mg/L

13. DISPOSAL CONSIDERATIONS

Disposal : Dispose according to Federal, State and local regulations.

14. TRANSPORTATION INFORMATION

| Agency | UN Number | Proper Shipping name | Hazard Class | Packing Group |
|--------|-----------|----------------------|--------------|----------------|
| DOT | UN1950 | Aerosols, Flammable† | 2.1 | Not applicable |
| IATA | ID8000 | Consumer Commodity† | 9 | Not applicable |
| IMDG | UN1950 | Aerosols, Flammable† | 2.1 | Not applicable |

† "Limited Quantities" may be applicable for this transportation mode.

15. REGULATORY INFORMATION

Warning: This product contains the following chemicals that are subject to reporting requirements for the following regulatory bodies listed below:

| COMPONENT | CAS # | % BY WEIGHT | Regulatory Body |
|---------------------------------------|-------|-------------|------------------|
| No components listed in this section. | | | SARA Section 313 |

Warning: This product may contain chemicals known to the State of California to cause cancer. See list below.

No components listed in this section. Prop65 Cancer

Warning: This product may contain chemicals known to the State of California to cause birth defects. See list below.

No components listed in this section. Prop65 Birth Defects

All components of this product are listed on the TSCA inventory.

16. OTHER INFORMATION

Other Information : MSDS Prepared by L. Dean Swartz, MSDS Coordinator

Version Date: 06/02/15

This information contained in this MSDS is believed to be accurate as of the version date, but is not warranted to be. Since the use of this information and the conditions of use of this product are not within the control of Stoner Inc, it is the user's obligation to determine the conditions of safe use.


SAFETY DATA SHEET

Argon

Section 1. Identification

| | |
|--------------------------------------|---|
| GHS product identifier | : Argon |
| Chemical name | : Argon |
| Other means of identification | : Argon-40; Argon, isotope of mass 40; 40Ar; ARGON; Argon,Welding Quality; ARGON, COMPRESSED |
| Product type | : Gas. |
| Product use | : Synthetic/Analytical chemistry. |
| Synonym | : Argon-40; Argon, isotope of mass 40; 40Ar; ARGON; Argon,Welding Quality; ARGON, COMPRESSED |
| SDS # | : 001004 |
| Supplier's details | : Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253 |
| 24-hour telephone | : 1-866-734-3438 |

Section 2. Hazards identification

| | |
|---|--|
| OSHA/HCS status | : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200). |
| Classification of the substance or mixture | : GASES UNDER PRESSURE - Compressed gas SIMPLE ASPHYXIANTS |
| GHS label elements | |
| Hazard pictograms | :  |
| Signal word | : Warning |
| Hazard statements | : Contains gas under pressure; may explode if heated. May displace oxygen and cause rapid suffocation. |
| Precautionary statements | |
| General | : Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. |
| Prevention | : Not applicable. |
| Response | : Not applicable. |
| Storage | : Protect from sunlight. Store in a well-ventilated place. |
| Disposal | : Not applicable. |
| Supplemental label elements | : Keep container tightly closed. Use only with adequate ventilation. Do not enter storage areas and confined spaces unless adequately ventilated. |
| Hazards not otherwise classified | : In addition to any other important health or physical hazards, this product may displace oxygen and cause rapid suffocation. |

Section 3. Composition/information on ingredients

| | |
|--------------------------------------|--|
| Substance/mixture | : Substance |
| Chemical name | : Argon |
| Other means of identification | : Argon-40; Argon, isotope of mass 40; 40Ar; ARGON; Argon,Welding Quality; ARGON, COMPRESSED |
| Product code | : 001004 |

CAS number/other identifiers

CAS number : 7440-37-1

| Ingredient name | % | CAS number |
|-----------------|-----|------------|
| Argon | 100 | 7440-37-1 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : As this product is a gas, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Contact with rapidly expanding gas may cause burns or frostbite.
- Inhalation** : No known significant effects or critical hazards. Acts as a simple asphyxiant.
- Skin contact** : Contact with rapidly expanding gas may cause burns or frostbite.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Ingestion** : As this product is a gas, refer to the inhalation section.

Over-exposure signs/symptoms

- Eye contact** : No specific data.
- Inhalation** : No specific data.
- Skin contact** : No specific data.
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.

Section 4. First aid measures

- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Contains gas under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode.

Hazardous thermal decomposition products : No specific data.

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Section 7. Handling and storage

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
Avoid contact with eyes, skin and clothing. Empty containers retain product residue and can be hazardous.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F). Keep container tightly closed and sealed until ready for use. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|-----------------|---|
| Argon | ACGIH TLV (United States, 3/2017). Oxygen Depletion [Asphyxiant]. |

- Appropriate engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : The gas can cause asphyxiation without warning by replacing the oxygen in the air. Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. If operating conditions cause high gas concentrations to be produced or any recommended or statutory exposure limit is exceeded, use an air-fed respirator or self-contained breathing apparatus. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Gas.
- Color** : Colorless.
- Odor** : Odorless.
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : -189.2°C (-308.6°F)
- Boiling point** : -185.9°C (-302.6°F)
- Critical temperature** : -122.4°C (-188.3°F)
- Flash point** : [Product does not sustain combustion.]
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : Not available.
- Vapor density** : 1.66 (Air = 1)
- Specific Volume (ft³/lb)** : 9.7087
- Gas Density (lb/ft³)** : 0.103
- Relative density** : Not applicable.
- Solubility** : Not available.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : 0.74
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Not applicable.
- Flow time (ISO 2431)** : Not available.
- Molecular weight** : 39.95 g/mole

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : Do not allow gas to accumulate in low or confined areas.
- Incompatible materials** : No specific data.
- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.
- Hazardous polymerization** : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Contact with rapidly expanding gas may cause burns or frostbite.
- Inhalation** : No known significant effects or critical hazards. Acts as a simple asphyxiant.
- Skin contact** : Contact with rapidly expanding gas may cause burns or frostbite.

Section 11. Toxicological information

Ingestion : As this product is a gas, refer to the inhalation section.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.

Inhalation : No specific data.

Skin contact : No specific data.

Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-----|-----------|
| Argon | 0.74 | - | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT | TDG | Mexico | IMDG | IATA |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1006 | UN1006 | UN1006 | UN1006 | UN1006 |
| UN proper shipping name | ARGON, COMPRESSED | ARGON, COMPRESSED | ARGON, COMPRESSED | ARGON, COMPRESSED | ARGON, COMPRESSED |
| Transport hazard class(es) | 2.2  | 2.2  | 2.2  | 2.2  | 2.2  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Additional information

DOT Classification : Limited quantity
No

TDG Classification : Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2).
Explosive Limit and Limited Quantity Index 0.125
Passenger Carrying Road or Rail Index 75
Special provisions 42

IATA : Quantity limitation No

Special precautions for user : **Transport within user’s premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to IMO instruments : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** This material is listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Section 15. Regulatory information

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Refer to Section 2: Hazards Identification of this SDS for classification of substance.

State regulations

Massachusetts : This material is listed.

New York : This material is not listed.

New Jersey : This material is listed.

Pennsylvania : This material is listed.

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol

Not listed.

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

Inventory list

Australia : This material is listed or exempted.

Canada : This material is listed or exempted.

China : This material is listed or exempted.

Europe : This material is listed or exempted.

Japan : **Japan inventory (ENCS):** Not determined.
Japan inventory (ISHL): Not determined.

New Zealand : This material is listed or exempted.

Philippines : This material is listed or exempted.

Republic of Korea : This material is listed or exempted.

Taiwan : This material is listed or exempted.

Thailand : Not determined.

Turkey : Not determined.

United States : This material is listed or exempted.

Viet Nam : Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | / | 0 |
| Flammability | | 0 |
| Physical hazards | | 3 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|---------------------------------------|-----------------|
| GASES UNDER PRESSURE - Compressed gas | Expert judgment |
| SIMPLE ASPHYXIANTS | Expert judgment |

History

Date of printing : 1/5/2021

Date of issue/Date of revision : 1/5/2021

Date of previous issue : 8/25/2020

Version : 1.05

Key to abbreviations

: ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 UN = United Nations

References : Not available.

Notice to reader

Section 16. Other information

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Product Name: MOBIL RARUS 427
Revision Date: 22 Feb 2019
Page 1 of 11

SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL RARUS 427
Product Description: Base Oil and Additives
Product Code: 201560202040, 606202-00, 970996
Intended Use: Air compressor oil

COMPANY IDENTIFICATION

Supplier: EXXON MOBIL CORPORATION
22777 Springwoods Village Parkway
Spring, TX 77389 USA

24 Hour Health Emergency 609-737-4411
Transportation Emergency Phone 800-424-9300 or 703-527-3887 CHEMTREC
Product Technical Information 800-662-4525
MSDS Internet Address www.exxon.com, www.mobil.com

SECTION 2 HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

Other hazard information:

HAZARD NOT OTHERWISE CLASSIFIED (HNOC): None as defined under 29 CFR 1910.1200.

PHYSICAL / CHEMICAL HAZARDS

No significant hazards.

HEALTH HAZARDS

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

ENVIRONMENTAL HAZARDS

No significant hazards.

| | | | |
|------------------------|-----------|-----------------|---------------|
| NFPA Hazard ID: | Health: 0 | Flammability: 1 | Reactivity: 0 |
| HMIS Hazard ID: | Health: 0 | Flammability: 1 | Reactivity: 0 |

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary

Product Name: MOBIL RARUS 427

Revision Date: 22 Feb 2019

Page 2 of 11

from person to person.

| | |
|------------------|---|
| SECTION 3 | COMPOSITION / INFORMATION ON INGREDIENTS |
|------------------|---|

This material is defined as a mixture.

Hazardous Substance(s) or Complex Substance(s) required for disclosure

| Name | CAS# | Concentration* | GHS Hazard Codes |
|---|------------|----------------|--|
| 1-NAPHTHYLAMINE, N-PHENYL- | 90-30-2 | 0.1 - < 1% | H302, H317, H373, H400(M factor 1), H410(M factor 1) |
| OXA DITHIA PHOSPHATETRADECANOIC ACID ETHYLHEXYL ESTER | 83547-95-9 | 0.1 - < 1% | H315, H317, H401, H411 |

* All concentrations are percent by weight unless material is a gas. Gas concentrations are in percent by volume.

As per paragraph (i) of 29 CFR 1910.1200, formulation is considered a trade secret and specific chemical identity and exact percentage (concentration) of composition may have been withheld. Specific chemical identity and exact percentage composition will be provided to health professionals, employees, or designated representatives in accordance with applicable provisions of paragraph (i).

| | |
|------------------|---------------------------|
| SECTION 4 | FIRST AID MEASURES |
|------------------|---------------------------|

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

| | |
|------------------|-------------------------------|
| SECTION 5 | FIRE FIGHTING MEASURES |
|------------------|-------------------------------|

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO2) to extinguish flames.

Product Name: MOBIL RARUS 427

Revision Date: 22 Feb 2019

Page 3 of 11

Inappropriate Extinguishing Media: Straight Streams of Water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulfur oxides

FLAMMABILITY PROPERTIES

Flash Point [Method]: >205°C (401°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6

ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

SPILL MANAGEMENT

Land Spill: Stop leak if you can do it without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be

consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

| | |
|------------------|-----------------------------|
| SECTION 7 | HANDLING AND STORAGE |
|------------------|-----------------------------|

HANDLING

This material is not intended for use in air compressors for breathing applications. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or ground procedures. However, bonding and grounds may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

Static Accumulator: This material is a static accumulator.

STORAGE

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

| | |
|------------------|--|
| SECTION 8 | EXPOSURE CONTROLS / PERSONAL PROTECTION |
|------------------|--|

Exposure limits/standards for materials that can be formed when handling this product: When mists/aerosols can occur the following are recommended: 5 mg/m³ - ACGIH TLV (inhalable fraction), 5 mg/m³ - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

No biological limits allocated.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions.

Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Product Name: MOBIL RARUS 427

Revision Date: 22 Feb 2019

Page 5 of 11

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Liquid

Color: Brown

Odor: Characteristic

Odor Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 °C): 0.881

Flammability (Solid, Gas): N/A

Flash Point [Method]: >205°C (401°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

Product Name: MOBIL RARUS 427

Revision Date: 22 Feb 2019

Page 6 of 11

Boiling Point / Range: > 316°C (600°F)

Decomposition Temperature: N/D

Vapor Density (Air = 1): > 2 at 101 kPa

Vapor Pressure: < 0.013 kPa (0.1 mm Hg) at 20 °C

Evaporation Rate (n-butyl acetate = 1): N/D

pH: N/A

Log Pow (n-Octanol/Water Partition Coefficient): > 3.5

Solubility in Water: Negligible

Viscosity: 100 cSt (100 mm²/sec) at 40 °C | 11.4 cSt (11.4 mm²/sec) at 100°C [ASTM D 445]

Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D

Melting Point: N/A

Pour Point: -9°C (16°F)

DMSO Extract (mineral oil only), IP-346: < 3 %wt

| | |
|-------------------|---------------------------------|
| SECTION 10 | STABILITY AND REACTIVITY |
|-------------------|---------------------------------|

REACTIVITY: See sub-sections below.

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

POSSIBILITY OF HAZARDOUS REACTIONS: Hazardous polymerization will not occur.

| | |
|-------------------|----------------------------------|
| SECTION 11 | TOXICOLOGICAL INFORMATION |
|-------------------|----------------------------------|

INFORMATION ON TOXICOLOGICAL EFFECTS

| Hazard Class | Conclusion / Remarks |
|--|---|
| Inhalation | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Irritation: No end point data for material. | Negligible hazard at ambient/normal handling temperatures. |
| Ingestion | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin Corrosion/Irritation: No end point data for material. | Negligible irritation to skin at ambient temperatures. Based on assessment of the components. |
| Eye | |
| Serious Eye Damage/Irritation: No end point data for material. | May cause mild, short-lasting discomfort to eyes. Based on assessment of the components. |

Product Name: MOBIL RARUS 427

Revision Date: 22 Feb 2019

Page 7 of 11

| | |
|--|--|
| Sensitization | |
| Respiratory Sensitization: No end point data for material. | Not expected to be a respiratory sensitizer. |
| Skin Sensitization: No end point data for material. | Not expected to be a skin sensitizer. Based on assessment of the components. |
| Aspiration: Data available. | Not expected to be an aspiration hazard. Based on physico-chemical properties of the material. |
| Germ Cell Mutagenicity: No end point data for material. | Not expected to be a germ cell mutagen. Based on assessment of the components. |
| Carcinogenicity: No end point data for material. | Not expected to cause cancer. Based on assessment of the components. |
| Reproductive Toxicity: No end point data for material. | Not expected to be a reproductive toxicant. Based on assessment of the components. |
| Lactation: No end point data for material. | Not expected to cause harm to breast-fed children. |
| Specific Target Organ Toxicity (STOT) | |
| Single Exposure: No end point data for material. | Not expected to cause organ damage from a single exposure. |
| Repeated Exposure: No end point data for material. | Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components. |

TOXICITY FOR SUBSTANCES

| NAME | ACUTE TOXICITY |
|----------------------------|---------------------------------------|
| 1-NAPHTHYLAMINE, N-PHENYL- | Oral Lethality: LD50 1625 mg/kg (Rat) |

OTHER INFORMATION

For the product itself:

Component concentrations in this formulation would not be expected to cause skin sensitization, based on tests of the components, this formulation, or similar formulations.

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

N-phenyl-1-naphthylamine (PAN): A single oral overexposure may result in clinical signs/symptoms of cyanosis, headache, shallow respiration, dizziness, confusion, low blood pressure, convulsions, coma, or jaundice. Hematuria may occur due to bladder and kidney irritation, and anemia may develop later. Repeated exposure in laboratory animals caused liver and kidney damage and depressed bone marrow activity. Undiluted PAN is a skin sensitizer. Human testing of lubricants containing 1.0% PAN resulted in no reactions indicative of sensitization.

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC
2 = NTP SUS

3 = IARC 1
4 = IARC 2A

5 = IARC 2B
6 = OSHA CARC

SECTION 12

ECOLOGICAL INFORMATION

Product Name: MOBIL RARUS 427

Revision Date: 22 Feb 2019

Page 8 of 11

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.
Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

SECTION 13

DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products. Protect the environment. Dispose of used oil at designated sites. Minimize skin contact. Do not mix used oils with solvents, brake fluids or coolants.

REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. **DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.**

SECTION 14

TRANSPORT INFORMATION

Product Name: MOBIL RARUS 427
 Revision Date: 22 Feb 2019
 Page 9 of 11

LAND (DOT): Not Regulated for Land Transport

LAND (TDG): Not Regulated for Land Transport

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

Marine Pollutant: No

AIR (IATA): Not Regulated for Air Transport

SECTION 15 REGULATORY INFORMATION

OSHA HAZARD COMMUNICATION STANDARD: This material is not considered hazardous in accordance with OSHA HazCom 2012, 29 CFR 1910.1200.

Listed or exempt from listing/notification on the following chemical inventories: AICS, DSL, KECI, PICCS, TCSI, TSCA

Special Cases:

| Inventory | Status |
|-----------|--------------------|
| ENCS | Restrictions Apply |

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302

SARA (311/312) REPORTABLE GHS HAZARD CLASSES: None.

SARA (313) TOXIC RELEASE INVENTORY: This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The following ingredients are cited on the lists below:

| Chemical Name | CAS Number | List Citations |
|---|------------|----------------|
| SEVERELY HYDROTREATED HEAVY PARAFFINIC DISTILLATE | 64742-54-7 | 17, 18, 19 |

--REGULATORY LISTS SEARCHED--

- | | | | |
|---------------|--------------|-------------------|-------------|
| 1 = ACGIH ALL | 6 = TSCA 5a2 | 11 = CA P65 REPRO | 16 = MN RTK |
| 2 = ACGIH A1 | 7 = TSCA 5e | 12 = CA RTK | 17 = NJ RTK |

Product Name: MOBIL RARUS 427

Revision Date: 22 Feb 2019

Page 10 of 11

| | | | |
|--------------|------------------|-------------|-------------|
| 3 = ACGIH A2 | 8 = TSCA 6 | 13 = IL RTK | 18 = PA RTK |
| 4 = OSHA Z | 9 = TSCA 12b | 14 = LA RTK | 19 = RI RTK |
| 5 = TSCA 4 | 10 = CA P65 CARC | 15 = MI 293 | |

Code key: CARC=Carcinogen; REPRO=Reproductive

| | |
|-------------------|--------------------------|
| SECTION 16 | OTHER INFORMATION |
|-------------------|--------------------------|

N/D = Not determined, N/A = Not applicable

KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):

- H302: Harmful if swallowed; Acute Tox Oral, Cat 4
- H315: Causes skin irritation; Skin Corr/Irritation, Cat 2
- H317: May cause allergic skin reaction; Skin Sensitization, Cat 1
- H373: May cause damage to organs through prolonged or repeated exposure; Target Organ, Repeated, Cat 2
- H400: Very toxic to aquatic life; Acute Env Tox, Cat 1
- H401: Toxic to aquatic life; Acute Env Tox, Cat 2
- H410: Very toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 1
- H411: Toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 2

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

- Composition: Component Table information was modified.
- Section 01: Company Contact Methods information was modified.
- Section 01: Company Mailing Address information was modified.
- Section 01: Product Intended Use information was modified.
- Section 05: Hazardous Combustion Products information was modified.
- Section 07: Handling and Storage - Handling information was modified.
- Section 07: Handling and Storage - Storage Phrases information was modified.
- Section 09: Color information was modified.
- Section 09: Flash Point C(F) information was modified.
- Section 09: Relative Density information was modified.
- Section 09: Vapor Pressure information was added.
- Section 09: Viscosity information was added.
- Section 11 Acute Toxicity data - Header information was added.
- Section 11 Substance Name - Header information was added.
- Section 11 Substance Toxicity table - Header information was added.
- Section 11 Substance Toxicology table information was added.
- Section 11: Chronic Tox - Component information was modified.
- Section 11: Other Health Effects information was modified.
- Section 12: information was modified.
- Section 14: Marine Pollutant information was modified.
- Section 15: List Citations Table information was added.
- Section 15: National Chemical Inventory Listing information was modified.
- Section 15: SARA (311/312) REPORTABLE GHS HAZARD CLASSES information was added.
- Section 15: SARA (311/312) REPORTABLE HAZARD CATEGORIES information was deleted.
- Section 16: HCode Key information was modified.

 The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current

Product Name: MOBIL RARUS 427

Revision Date: 22 Feb 2019

Page 11 of 11

available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, republication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0B, 0B, 0, 0, 0, 0

PPEC: A

DGN: 2008423XUS (1013559)

Copyright 2002 Exxon Mobil Corporation, All rights reserved



SAFETY DATA SHEET

1. Identification

| | |
|---|--|
| Product identifier | Fast Dry Degreaser |
| Other means of identification | |
| Product Code | No. 02185 (Item# 1003239) |
| Recommended use | General purpose degreaser |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Manufactured or sold by: | |
| Company name | CRC Industries, Inc. |
| Address | 885 Louis Dr. Warminster, PA 18974 US |
| Telephone | |
| General Information | 215-674-4300 |
| Technical Assistance | 800-521-3168 |
| Customer Service | 800-272-4620 |
| 24-Hour Emergency | 800-424-9300 (US) |
| (CHEMTREC) | 703-527-3887 (International) |
| Website | www.crcindustries.com |

2. Hazard(s) identification

| | | |
|------------------------------|--|----------------|
| Physical hazards | Flammable aerosols | Category 1 |
| | Gases under pressure | Compressed gas |
| Health hazards | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Reproductive toxicity (fertility) | Category 2 |
| | Aspiration hazard | Category 1 |
| Environmental hazards | Hazardous to the aquatic environment, acute hazard | Category 2 |
| | Hazardous to the aquatic environment, long-term hazard | Category 2 |
| OSHA defined hazards | Not classified. | |

Label elements



Signal word Danger

Hazard statement Extremely flammable aerosol. Contains gas under pressure; may explode if heated. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of damaging fertility. Toxic to aquatic life. Toxic to aquatic life with long lasting effects.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not apply while equipment is energized. Extinguish all flames, pilot lights, and heaters. Vapors will accumulate readily and may ignite. Use only with adequate ventilation; maintain ventilation during use and until all vapors are gone. Open doors and windows or use other means to ensure a fresh air supply during use and while product is drying. If you experience any symptoms listed on this label, increase ventilation or leave the area. Avoid breathing mist or vapor. Wear protective gloves/protective clothing/eye protection/face protection. Wash thoroughly after handling. Avoid release to the environment.

Response

If swallowed: Immediately call a poison center/doctor. Do NOT induce vomiting. If on skin: Wash with plenty of water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. If exposed or concerned: Get medical advice/attention. Collect spillage.

Storage

Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Exposure to high temperature may cause can to burst.

Disposal

Dispose of contents/container in accordance with local/regional/national regulations.

Hazard(s) not otherwise classified (HNOC)

Static accumulating flammable liquid can become electrostatically charged even in bonded and grounded equipment. Sparks may ignite liquid and vapor. May cause flash fire or explosion.

Supplemental information

None.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|---|--------------------------|------------|---------|
| acetone | | 67-64-1 | 40 - 50 |
| 2-methylpentane | | 107-83-5 | 20 - 30 |
| naphtha (petroleum), hydrotreated light | | 64742-49-0 | 10 - 20 |
| carbon dioxide | | 124-38-9 | 5 - 10 |
| n-hexane | | 110-54-3 | 3 - 5 |
| 2,2-dimethylbutane | | 75-83-2 | < 0.3 |
| 2,3-dimethylbutane | | 79-29-8 | < 0.3 |
| 3-methylpentane | | 96-14-0 | < 0.3 |

Specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation

Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

Skin contact

Remove contaminated clothing. Rinse skin with water/shower. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.

Eye contact

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.

Ingestion

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important symptoms/effects, acute and delayed

Aspiration may cause pulmonary edema and pneumonitis. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

General information

IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Water fog. Alcohol resistant foam. Carbon dioxide (CO ₂). Dry chemical powder, carbon dioxide, sand or earth may be used for small fires only. |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. Pressurized container may rupture when exposed to heat or flame. This product is a poor conductor of electricity and can become electrostatically charged. If sufficient charge is accumulated, ignition of flammable mixtures can occur. Static electricity accumulation may be significantly increased by the presence of small quantities of water or other contaminants. Material will float and may ignite on surface of water. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire fighting equipment/instructions | In case of fire: Stop leak if safe to do so. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. |
| General fire hazards | Extremely flammable aerosol. Contents under pressure. Pressurized container may rupture when exposed to heat or flame. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Remove all possible sources of ignition in the surrounding area. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Use appropriate containment to avoid environmental contamination. Local authorities should be advised if significant spillages cannot be contained. |
| Methods and materials for containment and cleaning up | Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water. Prevent product from entering drains. Stop the flow of material, if this is without risk. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. |
| Environmental precautions | Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Use appropriate containment to avoid environmental contamination. |

7. Handling and storage

| | |
|---|--|
| Precautions for safe handling | Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Minimize fire risks from flammable and combustible materials (including combustible dust and static accumulating liquids) or dangerous reactions with incompatible materials. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. Use caution around energized equipment. The metal container will conduct electricity if it contacts a live source. This may result in injury to the user from electrical shock and/or flash fire. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices. For product usage instructions, see the product label. |
| Conditions for safe storage, including any incompatibilities | Level 3 Aerosol. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Avoid spark promoters. These alone may be insufficient to remove static electricity. Store in a well-ventilated place. |

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|--|------|----------------------------------|
| acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| carbon dioxide (CAS 124-38-9) | PEL | 9000 mg/m3 5000 ppm |
| naphtha (petroleum), hydrotreated light (CAS 64742-49-0) | PEL | 400 mg/m3 |
| n-hexane (CAS 110-54-3) | PEL | 100 ppm 1800 mg/m3 500 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|----------------------------------|------|-----------|
| 2,2-dimethylbutane (CAS 75-83-2) | STEL | 1000 ppm |
| | TWA | 500 ppm |
| 2,3-dimethylbutane (CAS 79-29-8) | STEL | 1000 ppm |
| | TWA | 500 ppm |
| 2-methylpentane (CAS 107-83-5) | STEL | 1000 ppm |
| | TWA | 500 ppm |
| 3-methylpentane (CAS 96-14-0) | STEL | 1000 ppm |
| | TWA | 500 ppm |
| acetone (CAS 67-64-1) | STEL | 500 ppm |
| | TWA | 250 ppm |
| carbon dioxide (CAS 124-38-9) | STEL | 30000 ppm |
| | TWA | 5000 ppm |
| n-hexane (CAS 110-54-3) | TWA | 50 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|----------------------------------|---------|---------------------------------|
| 2,2-dimethylbutane (CAS 75-83-2) | Ceiling | 1800 mg/m3 |
| | TWA | 510 ppm 350 mg/m3 100 ppm |
| 2,3-dimethylbutane (CAS 79-29-8) | Ceiling | 1800 mg/m3 |
| | TWA | 510 ppm 350 mg/m3 100 ppm |
| 2-methylpentane (CAS 107-83-5) | Ceiling | 1800 mg/m3 |
| | TWA | 510 ppm 350 mg/m3 100 ppm |
| 3-methylpentane (CAS 96-14-0) | Ceiling | 1800 mg/m3 |
| | TWA | 510 ppm 350 mg/m3 100 ppm |
| acetone (CAS 67-64-1) | TWA | 590 mg/m3 250 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|--|------|-------------|
| carbon dioxide (CAS 124-38-9) | STEL | 54000 mg/m3 |
| | TWA | 30000 ppm |
| | | 9000 mg/m3 |
| naphtha (petroleum), hydrotreated light (CAS 64742-49-0) | TWA | 5000 ppm |
| | | 400 mg/m3 |
| n-hexane (CAS 110-54-3) | TWA | 100 ppm |
| | | 180 mg/m3 |
| | | 50 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Components | Value | Determinant | Specimen | Sampling Time |
|-------------------------|----------|-------------------------------------|----------|---------------|
| acetone (CAS 67-64-1) | 25 mg/l | Acetone | Urine | * |
| n-hexane (CAS 110-54-3) | 0.4 mg/l | 2,5-Hexanedione, without hydrolysis | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines**US - California OELs: Skin designation**

n-hexane (CAS 110-54-3) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

n-hexane (CAS 110-54-3) Can be absorbed through the skin.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower should be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear protective gloves such as: Nitrile. Polyvinyl chloride (PVC). Viton/butyl.

Other Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Respiratory protection

If engineering controls are not feasible or if exposure exceeds the applicable exposure limits, use a NIOSH-approved cartridge respirator with an organic vapor cartridge. Use a self-contained breathing apparatus in confined spaces and for emergencies. Air monitoring is needed to determine actual employee exposure levels.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance**

Physical state Liquid.

Form Aerosol.

Color Colorless.

Odor Solvent.

Odor threshold Not available.

pH Not available.

Melting point/freezing point -244.7 °F (-153.7 °C) estimated

Initial boiling point and boiling range 118.4 °F (48 °C) estimated

| | |
|---|------------------------------------|
| Flash point | < 0 °F (< -17.8 °C) Tag Closed Cup |
| Evaporation rate | Fast. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1 % estimated |
| Flammability limit - upper (%) | 12.8 % estimated |
| Vapor pressure | 4543.8 hPa estimated |
| Vapor density | > 1 (air = 1) |
| Relative density | 0.77 estimated |
| Solubility(ies) | |
| Solubility (water) | Negligible. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | 437 °F (225 °C) estimated |
| Decomposition temperature | Not available. |
| Percent volatile | 92.5 % |

10. Stability and reactivity

| | |
|------------------------------------|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Heat, flames and sparks. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Aluminum. |
| Hazardous decomposition products | Carbon oxides. |

11. Toxicological information

Information on likely routes of exposure

| | |
|--------------|--|
| Inhalation | May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia. |

Symptoms related to the physical, chemical and toxicological characteristics Aspiration may cause pulmonary edema and pneumonitis. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways.

| Components | Species | Test Results |
|--|---------|--------------|
| acetone (CAS 67-64-1) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | 20000 mg/kg |
| Oral | | |
| LD50 | Rat | 5800 mg/kg |
| naphtha (petroleum), hydrotreated light (CAS 64742-49-0) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg |

| Components | Species | Test Results |
|--|---|--------------|
| n-hexane (CAS 110-54-3) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 1300 mg/kg |
| Oral | | |
| LD50 | Rat | 15840 mg/kg |
| * Estimates for product may be based on additional component data not shown. | | |
| Skin corrosion/irritation | Causes skin irritation. | |
| Serious eye damage/eye irritation | Causes serious eye irritation. | |
| Respiratory or skin sensitization | | |
| Respiratory sensitization | Not a respiratory sensitizer. | |
| Skin sensitization | This product is not expected to cause skin sensitization. | |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. | |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. | |
| IARC Monographs. Overall Evaluation of Carcinogenicity | | |
| Not listed. | | |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1052) | | |
| Not regulated. | | |
| US. National Toxicology Program (NTP) Report on Carcinogens | | |
| Not listed. | | |
| Reproductive toxicity | Suspected of damaging fertility. | |
| Specific target organ toxicity - single exposure | May cause drowsiness and dizziness. | |
| Specific target organ toxicity - repeated exposure | Not classified. | |
| Aspiration hazard | May be fatal if swallowed and enters airways. If aspirated into lungs during swallowing or vomiting, may cause chemical pneumonia, pulmonary injury or death. | |
| Chronic effects | Prolonged inhalation may be harmful. | |

12. Ecological information

Ecotoxicity Toxic to aquatic life with long lasting effects.

| Components | Species | Test Results | |
|--|---------|---|------------------------------|
| 2-methylpentane (CAS 107-83-5) | | | |
| Aquatic | | | |
| <i>Acute</i> | | | |
| Crustacea | EC50 | Daphnia | 1 - 10 mg/l, 48 hours |
| Fish | LC50 | Fish | 1 - 10 mg/l, 96 hours |
| acetone (CAS 67-64-1) | | | |
| Aquatic | | | |
| Crustacea | EC50 | Water flea (Daphnia magna) | 10294 - 17704 mg/l, 48 hours |
| Fish | LC50 | Rainbow trout,donaldson trout (Oncorhynchus mykiss) | 4740 - 6330 mg/l, 96 hours |
| naphtha (petroleum), hydrotreated light (CAS 64742-49-0) | | | |
| Aquatic | | | |
| <i>Acute</i> | | | |
| Crustacea | EC50 | Daphnia | 1 - 10 mg/l, 48 hours |
| Fish | LC50 | Fish | 1 - 10 mg/l, 96 hours |

| Components | Species | Test Results |
|-------------------------|---------|---|
| n-hexane (CAS 110-54-3) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) 2.101 - 2.981 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

| | |
|--------------------|-------|
| 2,2-dimethylbutane | 3.82 |
| 2,3-dimethylbutane | 3.42 |
| 2-methylpentane | 3.74 |
| 3-methylpentane | 3.6 |
| acetone | -0.24 |
| n-hexane | 3.9 |

Bioconcentration factor (BCF)

| | |
|---|------------|
| naphtha (petroleum), hydrotreated light | 10 - 25000 |
|---|------------|

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions This material and its container must be disposed of as hazardous waste. Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Dispose in accordance with all applicable regulations.

Hazardous waste code D001: Waste Flammable material with a flash point <140 F
F003: Waste Non-halogenated Solvent - Spent Non-halogenated Solvent

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable, Limited Quantity |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | N82 |
| Packaging exceptions | 306 |
| Packaging non bulk | 304 |
| Packaging bulk | None |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable, Limited Quantity |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Packing group | Not applicable. |
| ERG Code | 10L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Other information | |
| Passenger and cargo aircraft | Allowed with restrictions. |
| Cargo aircraft only | Allowed with restrictions. |

IMDG

| | |
|------------------|--------|
| UN number | UN1950 |
|------------------|--------|

UN proper shipping name AEROSOLS, Limited Quantity
Transport hazard class(es)
Class 2
Subsidiary risk -
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS F-D, S-U
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1052)

Not regulated.

US EPCRA (SARA Title III) Section 313 - Toxic Chemical: Listed substance

n-hexane (CAS 110-54-3)

CERCLA Hazardous Substance List (40 CFR 302.4)

acetone (CAS 67-64-1) Listed.

n-hexane (CAS 110-54-3) Listed.

CERCLA Hazardous Substances: Reportable quantity

acetone (CAS 67-64-1) 5000 LBS

n-hexane (CAS 110-54-3) 5000 LBS

Spills or releases resulting in the loss of any ingredient at or above its RQ require immediate notification to the National Response Center (800-424-8802) and to your Local Emergency Planning Committee.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

n-hexane (CAS 110-54-3)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

acetone (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

acetone (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

acetone (CAS 67-64-1) 6532

FEMA Priority Substances Respiratory Health and Safety in the Flavor Manufacturing Workplace

acetone (CAS 67-64-1) Low priority

Food and Drug Administration (FDA) Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Classified hazard categories Flammable (gases, aerosols, liquids, or solids)
Gas under pressure
Skin corrosion or irritation
Serious eye damage or eye irritation
Reproductive toxicity
Aspiration hazard
Hazard not otherwise classified (HNOC)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical Yes

SARA 313 (TRI reporting)

| Chemical name | CAS number | % by wt. |
|---------------|------------|----------|
| n-hexane | 110-54-3 | 3 - 5 |

US state regulations

US. New Jersey Worker and Community Right-to-Know Act

2,2-dimethylbutane (CAS 75-83-2)
2,3-dimethylbutane (CAS 79-29-8)
2-methylpentane (CAS 107-83-5)
acetone (CAS 67-64-1)
carbon dioxide (CAS 124-38-9)
naphtha (petroleum), hydrotreated light (CAS 64742-49-0)
n-hexane (CAS 110-54-3)

US. Massachusetts RTK - Substance List

2,2-dimethylbutane (CAS 75-83-2)
2,3-dimethylbutane (CAS 79-29-8)
2-methylpentane (CAS 107-83-5)
3-methylpentane (CAS 96-14-0)
acetone (CAS 67-64-1)
carbon dioxide (CAS 124-38-9)
naphtha (petroleum), hydrotreated light (CAS 64742-49-0)
n-hexane (CAS 110-54-3)

US. Pennsylvania Worker and Community Right-to-Know Law

2,2-dimethylbutane (CAS 75-83-2)
2,3-dimethylbutane (CAS 79-29-8)
2-methylpentane (CAS 107-83-5)
3-methylpentane (CAS 96-14-0)
acetone (CAS 67-64-1)
carbon dioxide (CAS 124-38-9)
naphtha (petroleum), hydrotreated light (CAS 64742-49-0)
n-hexane (CAS 110-54-3)

US. Rhode Island RTK

acetone (CAS 67-64-1)
carbon dioxide (CAS 124-38-9)
naphtha (petroleum), hydrotreated light (CAS 64742-49-0)
n-hexane (CAS 110-54-3)

California Proposition 65



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

California Proposition 65 - CRT: Listed date/Carcinogenic substance

acetaldehyde (CAS 75-07-0) Listed: April 1, 1988
benzene (CAS 71-43-2) Listed: February 27, 1987
cumene (CAS 98-82-8) Listed: April 6, 2010

California Proposition 65 - CRT: Listed date/Developmental toxin

benzene (CAS 71-43-2) Listed: December 26, 1997
toluene (CAS 108-88-3) Listed: January 1, 1991

California Proposition 65 - CRT: Listed date/Male reproductive toxin

benzene (CAS 71-43-2) Listed: December 26, 1997

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

acetone (CAS 67-64-1)
naphtha (petroleum), hydrotreated light (CAS 64742-49-0)
n-hexane (CAS 110-54-3)

Volatile organic compounds (VOC) regulations

EPA

VOC content (40 CFR 51.100(s)) 46.3 %

**Consumer products
(40 CFR 59, Subpt. C)** Not regulated

State

Consumer products This product is regulated as a General Purpose Degreaser (aerosol). This product is not compliant to be sold for use in California, Delaware, Maryland, New Hampshire, and the following counties in Utah: Box Elder, Cache, Davis, Salt Lake, Tooele, Utah, and Weber. This product is compliant in all other states.

VOC content (CA) 46.3 %

VOC content (OTC) 46.3 %

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| Taiwan | Taiwan Toxic Chemical Substances (TCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 08-19-2014
Revision date 12-29-2017
Prepared by Allison Yoon
Version # 04
Further information CRC # 463D-E
HMIS® ratings Health: 2*
Flammability: 4
Physical hazard: 0
Personal protection: B
NFPA ratings Health: 2
Flammability: 4
Instability: 0

NFPA ratings



Disclaimer

The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. This information is accurate to the best of CRC's knowledge or obtained from sources believed by CRC to be accurate. Before using any product, read all warnings and directions on the label. For further clarification of any information contained on this (M)SDS consult your supervisor, a health & safety professional, or CRC Industries, Inc..

Revision information

Product and Company Identification: Product Codes
Hazard(s) identification: Prevention
Hazard(s) identification: Response
Composition/information on ingredients: Component information
Handling and storage: Precautions for safe handling
Exposure controls/personal protection: Hand protection
Physical & Chemical Properties: Multiple Properties
Disposal considerations: Disposal instructions
Disposal considerations: Hazardous waste code
Regulatory information: California Prop 65
Regulatory information: US federal regulations
Regulatory information: Consumer products
Other information, including date of preparation or last revision: Disclaimer



SAFETY DATA SHEET

Revision date 10-Apr-2015

Version 2

Section 1: IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

Product identifier

Product Code 465.0081002.076

Product Name VAL81002 GLOSS WHITE IND ALL PURPOSE 6UC

Other means of identification

No information available

Recommended use of the chemical and restrictions on use

Aerosol, Paint

Details of the supplier of the safety data sheet

See section 16 for more information

The Valspar Corporation
PO Box 1461
Minneapolis, MN 55440

E-mail address msds@valspar.com

Emergency telephone number

United States of America 1-888-345-5732

American Samoa, Guam, Northern Mariana Islands, Puerto Rico, U.S. Virgin Islands 1-800-255-3924

Section 2: HAZARDS IDENTIFICATION

Classification

| | |
|--|---------------|
| Skin corrosion/irritation | Category 2 |
| Serious eye damage/eye irritation | Category 2 |
| Carcinogenicity | Category 2 |
| Reproductive toxicity | Category 2 |
| Specific target organ toxicity (single exposure) | Category 3 |
| Specific target organ toxicity (repeated exposure) | Category 2 |
| Aspiration toxicity | Category 1 |
| Flammable aerosols | Category 2 |
| Gases under pressure | Liquefied gas |

Label elements

Product Code 465.0081002.076

Page 1 / 9

AGHS - USA OSHA SDS



Signal word

DANGER

HAZARD STATEMENTS

Flammable aerosol
Contains gas under pressure; may explode if heated
Causes skin irritation
Causes serious eye irritation
Suspected of causing cancer
Suspected of damaging fertility or the unborn child
May cause drowsiness or dizziness
May cause damage to organs through prolonged or repeated exposure
May be fatal if swallowed and enters airways

PREVENTION

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves/protective clothing/eye protection/face protection. Wash face, hands and any exposed skin thoroughly after handling. Do not breathe dust/fume/gas/mist/vapors/spray. Use only outdoors or in a well-ventilated area. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use.

RESPONSE

IF exposed or concerned: Get medical advice/attention.

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Skin

IF ON SKIN: Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse.

Inhalation

IF INHALED: Remove person to fresh air and keep comfortable for breathing.

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Do NOT induce vomiting.

STORAGE

Store locked up. Store in a well-ventilated place. Keep container tightly closed. Protect from sunlight. Store in a well-ventilated place. Do not expose to temperatures exceeding 122 °F (50 °C).

DISPOSAL

Dispose of contents/containers in accordance with local regulations.

HAZARDS NOT OTHERWISE CLASSIFIED (HNOC)

Propellant is classified as a simple asphyxiant if released in large quantities: May displace oxygen and cause rapid suffocation.

OTHER HAZARDS

Harmful to aquatic life with long lasting effects.

UNKNOWN ACUTE TOXICITY

0% of the mixture consists of ingredient(s) of unknown toxicity.

Section 3: COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | weight-% |
|---|------------|----------|
| Acetone | 67-64-1 | 25 - 50 |
| Toluene | 108-88-3 | 10 - 25 |
| Solvent naphtha, petroleum, light aliphatic | 64742-89-8 | 5 - 10 |

Product Code 465.0081002.076

Page 2 / 9

AGHS - USA OSHA SDS

| | | |
|--|------------|-----------|
| Titanium dioxide | 13463-67-7 | 3 - 5 |
| Naphtha, petroleum, hydrotreated light | 64742-49-0 | 3 - 5 |
| Ethylbenzene | 100-41-4 | 0.1 - 0.3 |

*The exact percentage (concentration) of composition has been withheld as a trade secret.

Section 4: FIRST AID MEASURES

First Aid Measures

General advice

IF EXPOSED OR CONCERNED: Get medical advice/attention.

Eye contact

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Skin Contact

IF ON SKIN: Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse.

Inhalation

IF INHALED: Remove person to fresh air and keep comfortable for breathing.

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Do NOT induce vomiting.

Most important symptoms and effects, both acute and delayed

Symptoms No information available.

Indication of any immediate medical attention and special treatment needed

Note to physicians Treat symptomatically.

Section 5: FIRE FIGHTING MEASURES

Suitable extinguishing media

Dry chemical, CO₂, water spray or alcohol-resistant foam.

Not to be used for safety reasons: Strong water jet

Specific hazards arising from the chemical

Burning produces heavy smoke. Fire may produce irritating and/or toxic gases. In the event of fire and/or explosion do not breathe fumes.

Special protective equipment for fire-fighters

Wear self-contained breathing apparatus and protective suit. Cool containers with flooding quantities of water until well after fire is out. Do not allow run-off from fire-fighting to enter drains or water courses.

Section 6: ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal precautions

Avoid breathing vapors or mists. Remove all sources of ignition. Use personal protective equipment as required. Avoid contact with skin, eyes or clothing. Keep people away from and upwind of spill/leak.

For emergency responders

Use personal protection recommended in Section 8.

Environmental precautions

Do not allow into any sewer, on the ground or into any body of water. If the product contaminates lakes, rivers or sewage, inform appropriate authorities in accordance with local regulations. Prevent further leakage or spillage if safe to do so. Local authorities should be advised if significant spillages cannot be contained.

Methods and material for containment and cleaning up

Methods for containment

Prevent further leakage or spillage if safe to do so.

Methods for cleaning up

Dispose of waste product or used containers according to local regulations. Clean with detergents. Avoid solvent cleaners. Dam up. Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Pick up and transfer to properly labeled containers. Clean contaminated surface thoroughly.

Section 7: HANDLING AND STORAGE

Precautions for safe handling

Advice on safe handling

Prevent the creation of flammable or explosive concentrations of vapor in air and avoid vapor concentration higher than the occupational exposure limits. Operators should wear anti-static footwear and clothing and floors should be of the conducting type. Use personal protection recommended in Section 8. Never use pressure to empty container. Comply with the health and safety at work laws. Prevent product from entering drains. Vapors are heavier than air and may spread along floors. Vapors may form explosive mixtures with air. Use only with adequate ventilation. Do not breathe dust/fume/gas/mist/vapors/spray. Keep away from heat, sparks, flame and other sources of ignition (i.e., pilot lights, electric motors and static electricity). Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use.

General Hygiene Considerations

When using do not eat, drink or smoke. Wash contaminated clothing before reuse. Avoid contact with skin, eyes or clothing.

Conditions for safe storage, including any incompatibilities

Storage Conditions

Keep/store only in original container. Store in accordance with local regulations. Keep unauthorized personnel away. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Keep container tightly closed in a dry and well-ventilated place. Protect from sunlight. Store in a well-ventilated place.

Incompatible materials

Strong oxidizing agents.

Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure Limits

If S* appears in the OEL table, it indicates this chemical contains a skin notation.

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|--------------------------------|-------------------------------|--|---|
| Acetone 67-64-1 | STEL: 750 ppm TWA: 500 ppm | TWA: 1000 ppm TWA: 2400 mg/m ³ | IDLH: 2500 ppm TWA: 250 ppm TWA: 590 mg/m ³ |
| Toluene 108-88-3 | TWA: 20 ppm | TWA: 200 ppm Ceiling: 300 ppm | IDLH: 500 ppm TWA: 100 ppm TWA: 375 mg/m ³ STEL: 150 ppm STEL: 560 mg/m ³ |
| Titanium dioxide 13463-67-7 | TWA: 10 mg/m ³ | TWA: 15 mg/m ³ total dust | IDLH: 5000 mg/m ³ |
| Ethylbenzene 100-41-4 | TWA: 20 ppm | TWA: 100 ppm TWA: 435 mg/m ³ | IDLH: 800 ppm TWA: 100 ppm TWA: 435 mg/m ³ STEL: 125 ppm STEL: 545 mg/m ³ |

Appropriate engineering controls

Engineering Controls

Ensure adequate ventilation, especially in confined areas. Provide local exhaust ventilation. In case of insufficient ventilation, wear suitable respiratory equipment.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin and body protection

Wear anti-static clothing made of natural fiber or of high temperature resistant synthetic fiber. Wear suitable protective clothing.

Hand Protection

There is no one glove material or combination of materials that will give unlimited resistance to any individual or combination of chemicals. Ensure that the breakthrough time of the glove material is not exceeded. Refer to glove supplier for information on breakthrough time for specific gloves. The instructions and information provided by the glove manufacturer on use, storage, maintenance and replacement must be followed. Gloves should be replaced regularly and if there is any sign of damage to the glove material. Always ensure that gloves are free from defects and that they are stored and used correctly. The performance or effectiveness of the glove may be reduced by physical / chemical damage and poor maintenance. Wear protective gloves.

Respiratory protection

When workers are facing concentrations above the exposure limit they must use appropriate certified respirators.

Thermal Protection

No information available

Section 9: PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | |
|-------------------------------|----------------------------------|
| Physical state | Aerosol |
| Appearance | No information available |
| Odor | Solvent |
| Color | white |
| Odor Threshold | No information available |
| pH value | No information available |
| Melting point/freezing point | No information available |
| Boiling point / boiling range | No information available °C / °F |
| flash point | -35 °C / -31 °F |
| evaporation rate | No information available |
| Flammability (solid, gas) | No information available |
| Flammability Limit in Air | |
| Upper flammability limit: | No information available |
| Lower flammability limit: | No information available |
| Vapor Pressure | No information available |
| vapor density | No information available |
| Density (lbs per US gallon) | 6.36 |
| specific gravity | .76 |
| Solubility(ies) | Not Determined |
| Partition coefficient | No information available |
| Autoignition temperature | No information available |
| Decomposition temperature | No information available |
| Kinematic viscosity | No information available |
| Dynamic viscosity | No information available |

Other information

Section 10: STABILITY AND REACTIVITY

Reactivity No information available.

Chemical stability Stable under normal conditions.

Product Code 465.0081002.076

Page 5 / 9

AGHS - USA OSHA SDS

Possibility of Hazardous Reactions None under normal processing.

Hazardous polymerization None under normal processing.

Conditions to avoid Heat, flames and sparks.

Incompatible materials Strong oxidizing agents.

Hazardous Decomposition Products Carbon monoxide. Carbon dioxide (CO₂).

Section 11: TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact

Causes serious eye irritation

Skin Contact

Causes skin irritation

Ingestion

May be fatal if swallowed and enters airways

Inhalation

May cause drowsiness or dizziness

Numerical measures of toxicity - Component Information

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|---|-----------------------|--------------------------|---------------------------------------|
| Acetone 67-64-1 | - | - | = 50100 mg/m ³ (Rat) 8 h |
| Toluene 108-88-3 | = 2600 mg/kg (Rat) | = 12000 mg/kg (Rabbit) | = 12.5 mg/L (Rat) 4 h |
| Solvent naphtha, petroleum, light aliphatic 64742-89-8 | - | = 3000 mg/kg (Rabbit) | - |
| Titanium dioxide 13463-67-7 | > 10000 mg/kg (Rat) | - | - |
| Naphtha, petroleum, hydrotreated light 64742-49-0 | > 5000 mg/kg (Rat) | > 3160 mg/kg (Rabbit) | = 73680 ppm (Rat) 4 h |
| Ethylbenzene 100-41-4 | = 3500 mg/kg (Rat) | = 15400 mg/kg (Rabbit) | = 17.2 mg/L (Rat) 4 h |

Numerical measures of toxicity - Product Information

UNKNOWN ACUTE TOXICITY 0% of the mixture consists of ingredient(s) of unknown toxicity.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Carcinogenicity

According to IARC, Volume 93, no significant exposure to primary particles of titanium dioxide is thought to occur from use in paints since the pigment is bound to other materials.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|--------------------------------|-------|----------|-----|------|
| Titanium dioxide 13463-67-7 | | Group 2B | | X |
| Ethylbenzene 100-41-4 | A3 | Group 2B | | X |

ACGIH (American Conference of Governmental Industrial Hygienists)

A3 - Animal Carcinogen.

IARC (International Agency for Research on Cancer)

Group 2B - Possibly Carcinogenic to Humans.

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present.

Skin corrosion/irritation

Causes skin irritation

Serious eye damage/eye irritation

Causes serious eye irritation

Product Code 465.0081002.076

Page 6 / 9

AGHS - USA OSHA SDS

| | |
|---|---|
| Skin sensitization | Not applicable |
| Respiratory sensitization | Not applicable |
| Germ cell mutagenicity | Not applicable |
| Carcinogenicity | Suspected of causing cancer |
| Reproductive Toxicity | Suspected of damaging fertility or the unborn child |
| Specific target organ toxicity (single exposure) | May cause drowsiness or dizziness |
| Specific target organ toxicity (repeated exposure) | May cause damage to organs through prolonged or repeated exposure |
| Aspiration hazard | Not applicable |

Section 12: ECOLOGICAL INFORMATION

Ecotoxicity

Harmful to aquatic life with long lasting effects.

Environmental precautions Prevent product from entering drains.

Persistence and degradability

No information available

Bioaccumulation

No information available

Mobility

No information available

Other adverse effects

No information available

Section 13: DISPOSAL CONSIDERATIONS

Waste treatment methods

Disposal of wastes Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated packaging Improper disposal or reuse of this container may be dangerous and illegal. Empty containers must be scrapped or reconditioned.

Section 14: TRANSPORT INFORMATION

| | | | |
|--|---|---------------------------|--------------------------|
| 14.1 UN/ID no | <u>DOT</u> ORM-D | <u>IMDG</u> UN1950 | <u>IATA</u> UN1950 |
| 14.2 Proper shipping name | CONSUMER COMMODITY | Aerosols | Aerosols |
| 14.3 Hazard Class | | 2.1 | 2.1 |
| 14.4 Packing Group | | | |
| 14.5 Environmental hazard | Not applicable | | |
| 14.6 Special Provisions | | | |
| | Emergency Response Guide Number 126 | EmS-No F-D, S-U | |
| 14.7 Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code | | | No information available |

Section 15: REGULATORY INFORMATION

International Inventories

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory All components are listed or exempt from listing

DSL - Canadian Domestic Substances List All components are listed or exempt from listing

US Federal Regulations

| Chemical Name | SARA 313 - Threshold Values % | Hazardous air pollutants (HAPs) content |
|---------------------------------------|-------------------------------|---|
| Toluene 108-88-3 10 - 25 | 1 | Present |
| Ethylbenzene 100-41-4 0.1 - 0.3 | 0.1 | Present |

SARA 311/312 Hazard Categories

| | |
|-----------------------------------|-----|
| Acute health hazard | Yes |
| Chronic Health Hazard | Yes |
| Fire hazard | Yes |
| Sudden release of pressure hazard | Yes |
| Reactive Hazard | No |

| Chemical Name | CWA - Reportable Quantities | CWA - Toxic Pollutants | CWA - Priority Pollutants | CWA - Hazardous Substances |
|--------------------------|-----------------------------|------------------------|---------------------------|----------------------------|
| Toluene 108-88-3 | 1000 lb | X | X | X |
| Ethylbenzene 100-41-4 | 1000 lb | X | X | X |

| Chemical Name | Hazardous Substances RQs | CERCLA/SARA RQ | Reportable Quantity (RQ) |
|--------------------------|--------------------------|----------------|--|
| Acetone 67-64-1 | 5000 lb | | RQ 5000 lb final RQ RQ 2270 kg final RQ |
| Toluene 108-88-3 | 1000 lb | | RQ 1000 lb final RQ RQ 454 kg final RQ |
| Ethylbenzene 100-41-4 | 1000 lb | | RQ 1000 lb final RQ RQ 454 kg final RQ |

US State Regulations

Rule 66 status of product

Not photochemically reactive.

California Proposition 65

This product contains chemical(s) known to the State of California to cause cancer and/or to cause birth defects or other reproductive harm.

U.S. EPA Label information

EPA Pesticide registration number Not applicable

U.S. State Right-to-Know Regulations

| Chemical Name |
|---|
| Acetone 67-64-1 |
| Propane 74-98-6 |
| Toluene 108-88-3 |
| Proprietary Non-Hazardous Ingredient - Proprietary CAS |
| Butane 106-97-8 |
| Solvent naphtha, petroleum, light aliphatic 64742-89-8 |
| Titanium dioxide 13463-67-7 |
| Naphtha, petroleum, hydrotreated light 64742-49-0 |

Product Code 465.0081002.076

Page 8 / 9

AGHS - USA OSHA SDS

Ethylbenzene
100-41-4

Intentional misuse by deliberately concentrating and inhaling contents may be harmful or fatal
Repeated or prolonged overexposure to solvents may cause permanent damage to the nervous system

Section 16: OTHER INFORMATION

HMIS

Health hazards 3*

* = Chronic Health Hazard

Flammability 4

Physical hazards 0

Personal Protection X

Supplier Address

| | | |
|--|--|--|
| Valspar Consumer Headquarters 8725 W. Higgins Rd. Suite 1000 Chicago, IL 60631 773-628-5500 | The Valspar Corporation 4999 36th St. Grand Rapids, MI 49512 800-253-3957 | Valspar Plasti-Kote 7655 Tranmere Dr. Mississauga, Ontario L5S 1L4 905-671-8333 |
|--|--|--|

Prepared By Product Stewardship

Revision date 10-Apr-2015

Revision Note No information available

Disclaimer

The information on this Safety Data Sheet (SDS) is based on the present state of our knowledge, current national legislation and guidelines. As the specific conditions of use of the product are outside the supplier's knowledge and control the user is responsible for ensuring that the requirements of relevant legislation are complied with. This SDS should not be construed as any guarantee of the technical performance or suitability for particular applications. UNLESS SUPPLIER AGREES OTHERWISE IN WRITING, SUPPLIER MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR FREEDOM FROM PATENT INFRINGEMENT. SUPPLIER WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

End of Safety Data Sheet



Safety Data Sheet

24 Hour Emergency Phone Numbers
Medical/Poison Control:
In U.S.: Call 1-800-222-1222

Outside U.S.: Call your local poison control center

Transportation/National Response Center:

1-800-535-5053

1-352-323-3500

NOTE: The National Response Center emergency numbers to be used only in the event of chemical emergencies involving a spill, leak, fire, exposure or accident involving chemicals.

IMPORTANT: Provide this information to employees, customers, and users of this product. Read this SDS before handling or disposing of this product. This product is covered by the OSHA Hazard Communication Standard and this document has been prepared in accordance with requirements of this standard. All abbreviated terms used in this MSDS are further described in Section 16.

1. Identification

This Safety Data Sheet is available in American Spanish upon request.
 Los Datos de Seguridad pueden obtenerse en Espanol si lo requiere.

| | | | |
|----------------------------|---|-------------------------|-------------|
| Product Name: | Bonding Liquid | Revision Date: | 6/19/2015 |
| Product UPC Number: | 15200 | Supercedes Date: | New SDS |
| Product Use/Class: | Concrete Bonding Additive | SDS No: | 00017055605 |
| Manufacturer: | DAP Canada 475 Finchdene Square Unit 5 Scarborough, Ontario M1X 1B7 888-327-8477 (non - emergency matters) | | |
| Preparer: | Regulatory Department | | |

2. Hazards Identification

EMERGENCY OVERVIEW: WARNING! May cause eye, skin, nose, throat and respiratory tract irritation.

GHS Classification

Not a hazardous substance or mixture.

Symbol(s) of Product

None

Signal Word

Not a hazardous substance or mixture.

3. Composition/Information on Ingredients

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt. %</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|--------------------------|----------------|--------------|--------------------|-----------------------|
| No hazardous items exist | | | | |

The text for GHS Hazard Statements shown above (if any) is given in the "Other information" Section.

4. First-aid Measures

FIRST AID - INHALATION: If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

FIRST AID - SKIN CONTACT: Wash off with soap and water.

FIRST AID - EYE CONTACT: In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention immediately.

FIRST AID - INGESTION: If swallowed, DO NOT INDUCE VOMITING. Get medical attention immediately.

5. Fire-fighting Measures

UNUSUAL FIRE AND EXPLOSION HAZARDS: 465 <undefined>

SPECIAL FIREFIGHTING PROCEDURES: Wear self-contained breathing apparatus pressure-demand (NIOSH approved or equivalent) and full protective gear. Use water spray to cool exposed surfaces.

EXTINGUISHING MEDIA: Carbon Dioxide, Dry Chemical, Foam, Water Fog

6. Accidental Release Measures

ENVIRONMENTAL MEASURES: No Information

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled material and remove with inert absorbent. Dispose of contaminated absorbent, container and unused contents in accordance with local, state and federal regulations. Dike to prevent entering any sewer or waterway. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

7. Handling and Storage

HANDLING: KEEP OUT OF REACH OF CHILDREN! Use in well ventilated area. Provide fresh air such that chemical odors cannot be detected during use and while drying. Avoid prolonged or repeated contact with skin. Avoid contact with eyes. Construction and repair activities can adversely affect indoor air quality. Consult with occupants or a representative (i.e. maintenance, building manager, industrial hygienist, or safety officer) to determine ways to minimize impact.

STORAGE: Avoid excessive heat and freezing. Keep containers closed when not in use. Do not store at temperatures above 120 degrees F. Store away from caustics and oxidizers.

8. Exposure Controls/Personal Protection

Ingredients with Occupational Exposure Limits

| <u>Chemical Name</u> | <u>ACGIH TLV-TWA</u> | <u>ACGIH-TLV STEL</u> | <u>OSHA PEL-TWA</u> | <u>OSHA PEL-CEILING</u> |
|----------------------|----------------------|-----------------------|---------------------|-------------------------|
|----------------------|----------------------|-----------------------|---------------------|-------------------------|

No hazardous items exist

Further Advice: MEL = Maximum Exposure Limit OES = Occupational Exposure Standard SUP = Supplier's Recommendation
Sk = Skin Sensitizer N.E. = Not Established

Personal Protection



RESPIRATORY PROTECTION: No personal respiratory protective equipment normally required. If concentrations exceed the exposure limits specified, use of a NIOSH-approved supplied air respirator is recommended. Where the protection factor is exceeded, use of a Self Contained Breathing Apparatus (SCBA) may be necessary.



SKIN PROTECTION: Wear gloves with repeated or prolonged use.



EYE PROTECTION: Goggles or safety glasses with side shields.



OTHER PROTECTIVE EQUIPMENT: Not required under normal use.



HYGIENIC PRACTICES: Wash contaminated clothing before re-use.

9. Physical and Chemical Properties

| | | | |
|---------------------------------------|-----------------------------|---|----------------------|
| Appearance: | Opaque | Physical State: | Liquid |
| Odor: | Slight | Odor Threshold: | Not Established |
| Density, g/cm³: | 1.02 - 1.02 | pH: | Between 7.0 and 12.0 |
| Freeze Point, °C: | Not Established | Viscosity (mPa.s): | Not Established |
| Solubility in Water: | Not Established | Partition Coeff., n-octanol/water: | Not Established |
| Decomposition Temperature, °C: | Not Established | Explosive Limits, %: | N.I. - N.I. |
| Boiling Range, °C: | N.I. - N.I. | Auto-Ignition Temperature, °C | Not Established |
| Minimum Flash Point, °C: | 93.3 | Vapor Pressure, mmHg: | No Information |
| Evaporation Rate: | Slower Than n-Butyl Acetate | Flash Method: | Seta Closed Cup |
| Vapor Density: | Heavier Than Air | Flammability: | No Information |
| Combustibility: | Does not support combustion | | |

(See "Other information" Section for abbreviation legend)

(If product is an aerosol, the flash point stated above is that of the propellant.)

10. Stability and Reactivity

STABILITY: Stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat and freezing.

INCOMPATIBILITY: Strong oxidizing agents. Strong bases.

HAZARDOUS DECOMPOSITION PRODUCTS: Normal decomposition products, i.e., CO_x, NO_x.

11. Toxicological Information

EFFECT OF OVEREXPOSURE - INHALATION: Vapors may be irritating to eyes, nose, throat, and lungs.

EFFECT OF OVEREXPOSURE - SKIN CONTACT: May cause skin irritation.

EFFECT OF OVEREXPOSURE - EYE CONTACT: May cause eye irritation. Signs and symptoms may include: pain, tears, swelling, redness and blurred vision.

EFFECT OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

CARCINOGENICITY: No Information

EFFECT OF OVEREXPOSURE - CHRONIC HAZARDS: Repeated or prolonged exposure may cause irritation of eyes and skin.

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Inhalation, Skin Contact

Acute Toxicity Values

The acute effects of this product have not been tested. Data on individual components are tabulated below

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|----------------------|------------------|--------------------|-------------------|
| No | | | | |
| hazardous | | | | |
| items exist | | | | |

N.I. = No Information

12. Ecological Information

ECOLOGICAL INFORMATION: Ecological injuries are not known or expected under normal use.

13. Disposal Information

DISPOSAL INFORMATION: This product does not meet the definition of a hazardous waste according to U.S. EPA Hazardous Waste Management Regulation, 40 CFR Section 261. Dispose as hazardous waste according to all local, state, federal and provincial regulations. State and Local regulations/restrictions are complex and may differ from Federal regulations. Responsibility for proper waste disposal is with the owner of the waste. Liquids cannot be disposed of in a landfill. Do not re-use empty containers.

14. Transport Information

SPECIAL TRANSPORT PRECAUTIONS: No Information

| | |
|----------------------------------|----------------|
| DOT UN/NA Number: | N.A. |
| DOT Proper Shipping Name: | Not Regulated. |
| DOT Technical Name: | N.A. |
| DOT Hazard Class: | N.A. |
| Hazard SubClass: | N.A. |
| Packing Group: | N.A. |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Acute Health Hazard, Chronic Health Hazard

SARA SECTION 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

No Sara 313 components exist in this product.

TOXIC SUBSTANCES CONTROL ACT:

All ingredients in this product are either on TSCA inventory list, or otherwise exempt.

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(B) if exported from the United States:

No TSCA 12(b) components exist in this product.

CALIFORNIA PROPOSITION 65 CARCINOGENS AND REPRODUCTIONAL TOXINS**CALIFORNIA PROPOSITION 65:** No Information**International Regulations: As follows -****CANADIAN WHMIS:**

This SDS has been prepared in compliance with Controlled Product Regulations except for the use of the 16 headings.

WHMIS Class Consumer Commodity**16. Other Information****Revision Date:** 6/19/2015 **Supersedes Date:** New MSDS**Reason for revision:** HazCom2012/GHS Conversion**Datasheet produced by:** Regulatory Department**HMIS Ratings:**

| | | | | | | | |
|----------------|---|----------------------|---|--------------------|---|-----------------------------|---|
| Health: | 1 | Flammability: | 0 | Reactivity: | 0 | Personal Protection: | X |
|----------------|---|----------------------|---|--------------------|---|-----------------------------|---|

VOC Less Water Less Exempt Solvent, g/L:12.2

VOC Material, g/L:2

VOC as Defined by California Consumer Product Regulation, Wt/Wt%:0.0

Icons for GHS Pictograms shown in Section 3 describing each ingredient:

No GHS Pictograms exist for Section 3

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

DAP believes the data and statements contained herein are accurate as of the date hereof. They are offered in good faith as typical values and not as a product specification. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE WITH REGARD TO THE INFORMATION HEREIN PROVIDED OR THE PRODUCT TO WHICH THE INFORMATION REFERS. Since this document is intended only as a guide to the appropriate use and precautionary handling of the referenced product by a properly trained person, it is therefore the responsibility of the user to (i) review the recommendations with due consideration for the specific context of the intended use and (ii) determine if they are appropriate.

SECTION 1: IDENTIFICATION

1.1. PRODUCT IDENTIFIER

Product name : SKD-S2 Aerosol
 Product code : Not available

1.2. RELEVANT IDENTIFIED USES OF THE SUBSTANCE OR MIXTURE AND USES ADVISED AGAINST

Use of the substance/mixture : Non-Destructive Testing

1.3. DETAILS OF THE SUPPLIER OF THE SAFETY DATA SHEET

| | |
|--------------------------|--------------------|
| Manufacturer | Distributor |
| Magnaflux | |
| 155 Harlem Ave. | |
| Glenview, IL 60025 - USA | |
| T: 847-657-5300 | |

1.4. EMERGENCY TELEPHONE NUMBER

Emergency number : CHEMTREC 800-424-9300

SECTION 2: HAZARDS IDENTIFICATION

2.1. CLASSIFICATION OF THE SUBSTANCE OR MIXTURE

GHS classification

Flam. Aerosol 1
 Liquefied gas
 Eye Irrit. 2A
 STOT SE 3
 Simple Asphy

2.2. LABEL ELEMENTS

GHS labeling

Hazard pictograms (GHS) :


 GHS02


 GHS04


 GHS07

Signal word (GHS) : Danger

Hazard statements (GHS) : Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes serious eye irritation. May cause drowsiness or dizziness. May displace oxygen and cause rapid suffocation.

Precautionary statements (GHS) : Keep away from heat/sparks/open flames/hot surfaces. -No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Wash hands thoroughly after handling. Wear eye protection/face protection. Avoid breathing dust/fume/gas/mist/vapors/spray. Use only outdoors or in a well-ventilated area. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Store locked up. Dispose of contents/container in accordance with local/regional/national/international Regulations.

2.3. OTHER HAZARDS

No additional information available.

2.4. UNKNOWN ACUTE TOXICITY (GHS)

Not applicable.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

3.1. SUBSTANCE

Not applicable.

3.2. MIXTURE

| Name | Product identifier | % |
|---------------------------------------|---------------------|-------|
| Isopropyl alcohol | (CAS No) 67-63-0 | 45.17 |
| Petroleum gases, liquefied, sweetened | (CAS No) 68476-86-8 | 29.73 |
| Acetone | (CAS No) 67-64-1 | 14.43 |

SECTION 4: FIRST AID MEASURES

4.1. DESCRIPTION OF FIRST AID MEASURES

- First-aid measures after inhalation : If inhaled, remove to fresh air and keep at rest in a position comfortable for breathing. Get medical advice/attention if you feel unwell.
- First-aid measures after skin contact : If irritation occurs, flush skin with plenty of water. Get medical attention if irritation persists.
- First-aid measures after eye contact : In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. If easy to do, remove contact lenses, if worn. If irritation persists, get medical attention.
- First-aid measures after ingestion : If swallowed, do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical advice/attention if you feel unwell.

4.2. MOST IMPORTANT SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED

- Symptoms/injuries after inhalation : May cause drowsiness or dizziness. May cause respiratory tract irritation. May displace oxygen and cause rapid suffocation. May cause cardiac arrhythmia.
- Symptoms/injuries after skin contact : May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.
- Symptoms/injuries after eye contact : Causes serious eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva.
- Symptoms/injuries after ingestion : May be harmful if swallowed. May cause stomach distress, nausea or vomiting.

4.3. INDICATION OF ANY IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT NEEDED

Symptoms may not appear immediately. In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

SECTION 5: FIREFIGHTING MEASURES

5.1. EXTINGUISHING MEDIA

- Suitable extinguishing media : Water fog, foam, dry chemical, carbon dioxide.
- Unsuitable extinguishing media : Do not use water jet.

5.2. SPECIAL HAZARDS ARISING FROM THE SUBSTANCE OR MIXTURE

- Fire hazard : Extremely flammable aerosol. Products of combustion may include, and are not limited to: oxides of carbon, oxides of nitrogen, oxides of sulfur.
- Explosion hazard : Heat may build pressure, rupturing closed containers, spreading fire and increasing risk of burns and injuries.

5.3. ADVICE FOR FIREFIGHTERS

- Firefighting instructions : Move containers away from the fire area if this can be done without risk. DO NOT fight fire when fire reaches explosives. Evacuate area.
- Protection during firefighting : Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Use water spray to keep fire-exposed containers cool.

SECTION 6: ACCIDENTAL RELEASE MEASURES

6.1. PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES

- General measures : Remove ignition sources. Use special care to avoid static electric charges. Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel.

6.2. METHODS AND MATERIAL FOR CONTAINMENT AND CLEANING UP

- For containment : Stop leak, if possible without risk. Move containers from spill area. Use only non-sparking tools. Use explosion-proof equipment. Contain and/or absorb spill with inert material (e.g. sand, vermiculite), then place in a suitable container. Do not flush to sewer or allow to enter waterways. Use appropriate Personal Protective Equipment (PPE).
- Methods for cleaning up : Scoop up material and place in a disposal container. Provide ventilation.

6.3. REFERENCE TO OTHER SECTIONS

See section 8 for further information on protective clothing and equipment and section 13 for advice on waste disposal.

SECTION 7: HANDLING AND STORAGE

7.1. PRECAUTIONS FOR SAFE HANDLING

- Additional hazards when processed : Hazardous waste due to potential risk of explosion. Pressurized container: Do not pierce or burn, even after use. Keep away from sources of ignition - No smoking.
- Precautions for safe handling : Do not spray on an open flame or other ignition source. Use non-sparking tools. Use explosion-proof equipment. Take precautionary measures against static discharge. Avoid breathing dust/fume/gas/ mist/vapors/spray. Avoid contact with skin and eyes. Do not swallow. Handle and open container with care. When using do not eat, drink or smoke. Use only outdoors or in a well-ventilated area.
- Hygiene measures : Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2. CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES

- Technical measures : Proper grounding procedures to avoid static electricity should be followed.
- Storage conditions : Keep locked up and out of reach of children. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatibles. Do not expose to temperatures exceeding 50 °C/ 122 °F. Keep in fireproof place.

7.3. SPECIFIC END USE(S)

Not available.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1. CONTROL PARAMETERS

| Isopropyl alcohol (67-63-0) | | |
|--|---------------------------------------|-------------------------------|
| ACGIH | ACGIH TWA (ppm) | 200 ppm |
| ACGIH | ACGIH STEL (ppm) | 400 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 980 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 400 ppm |
| USA - IDLH | US IDLH (ppm) | 2000 ppm (10% LEL) |
| USA - NIOSH | NIOSH REL (TWA) (mg/m ³) | 980 mg/m ³ |
| USA - NIOSH | NIOSH REL (TWA) (ppm) | 400 ppm |
| USA - NIOSH | NIOSH REL (STEL) (mg/m ³) | 1225 mg/m ³ |
| USA - NIOSH | NIOSH REL (STEL) (ppm) | 500 ppm |
| Petroleum gases, liquefied, sweetened (68476-86-8) | | |
| ACGIH | ACGIH STEL (ppm) | 1000 ppm |
| OSHA | OSHA PEL (TWA) (ppm) | 1000 ppm |
| Acetone (67-64-1) | | |
| ACGIH | ACGIH TWA (mg/m ³) | 1188 mg/m ³ /8h |
| ACGIH | ACGIH TWA (ppm) | 500 ppm/8h |
| ACGIH | ACGIH STEL (mg/m ³) | 1782 mg/m ³ /15min |
| ACGIH | ACGIH STEL (ppm) | 750 ppm/15min |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 2400 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 1000 ppm |
| USA - IDLH | US IDLH (ppm) | 2500 ppm (10% LEL) |
| USA - NIOSH | NIOSH REL (TWA) (mg/m ³) | 590 mg/m ³ /10h |
| USA - NIOSH | NIOSH REL (TWA) (ppm) | 250 ppm/10h |

8.2. EXPOSURE CONTROLS

- Appropriate engineering controls : Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits.
- Hand protection : Wear chemically resistant protective gloves.
- Eye protection : Safety glasses with side-shields.
- Skin and body protection : Wear suitable protective clothing.
- Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
- Environmental exposure controls : Maintain levels below Community environmental protection thresholds.
- Other information : Do not eat, smoke or drink where material is handled, processed or stored. Wash hands carefully before eating or smoking. Handle according to established industrial hygiene and safety practices.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES**9.1. INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES**

| | |
|---|---|
| Physical state | : Gas/Pressurized Liquid |
| Appearance | : No data available. |
| Color | : White |
| Odor | : Alcohol |
| Odor threshold | : No data available |
| pH | : Neutral |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : No data available |
| Flash point | : Not applicable |
| Relative evaporation rate (butyl acetate=1) | : No data available |
| Flammability (solid, gas) | : Flammable |
| Explosion limits | : No data available |
| Explosive properties | : Pressurised container: May burst if heated. |
| Oxidizing properties | : No data available |
| Vapor pressure | : No data available |
| Relative density | : No data available |
| Relative vapor density at 20 °C | : No data available |
| Solubility | : No data available |
| Partition coefficient: n-octanol/water | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Viscosity | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |

9.2. OTHER INFORMATION

| | |
|---------------------------|-----------------|
| VOC content | : 765.06 g/l |
| VOC minus exempt solvents | : 655.18 g/l |
| Heat of combustion | : 13 285 Btu/lb |

SECTION 10: STABILITY AND REACTIVITY**10.1. REACTIVITY**

No dangerous reaction known under conditions of normal use.

10.2. CHEMICAL STABILITY

Extremely flammable aerosol. Contents under pressure. Container may explode if heated. Do not puncture. Do not burn. Extreme risk of explosion by shock, friction, fire or other sources of ignition.

10.3. POSSIBILITY OF HAZARDOUS REACTIONS

No dangerous reaction known under conditions of normal use.

10.4. CONDITIONS TO AVOID

Sources of ignition. Heat. Incompatible materials.

10.5. INCOMPATIBLE MATERIALS

Strong oxidizing agents, aldehydes, halogenated hydrocarbons, halogens, strong acids.

10.6. HAZARDOUS DECOMPOSITION PRODUCTS

May include, and are not limited to: oxides of carbon, oxides of nitrogen, oxides of sulfur.

SECTION 11: TOXICOLOGICAL INFORMATION

11.1. INFORMATION ON TOXICOLOGICAL EFFECTS

Acute toxicity : Not classified

| SKD-S2 Aerosol | |
|---------------------|--------------|
| LD50 oral rat | > 2000 mg/kg |
| LD50 dermal rabbit | > 2000 mg/kg |
| LC50 inhalation rat | > 5 mg/l/4h |

| Isopropyl alcohol (67-63-0) | |
|-----------------------------|----------------|
| LD50 oral rat | 5840 mg/kg |
| LD50 dermal rabbit | > 12800 mg/kg |
| LC50 inhalation rat | > 10000 ppm/6h |

| Acetone (67-64-1) | |
|---------------------|---------------------|
| LD50 oral rat | 5800 mg/kg |
| LC50 inhalation rat | 76 mg/l/4h (female) |
| LC50 inhalation rat | 132 mg/l/3h (male) |

Skin corrosion/irritation : Based on available data, the classification criteria are not met.
 Serious eye damage/irritation : Causes serious eye irritation.
 Respiratory or skin sensitization : Based on available data, the classification criteria are not met.
 Germ cell mutagenicity : Based on available data, the classification criteria are not met.
 Carcinogenicity : Based on available data, the classification criteria are not met.

| Isopropyl alcohol (67-63-0) | |
|-----------------------------|----------------------|
| IARC group | 3 - Not classifiable |

Reproductive toxicity : Based on available data, the classification criteria are not met.
 Specific target organ toxicity (single exposure) : May cause drowsiness or dizziness.
 Specific target organ toxicity (repeated exposure) : Based on available data, the classification criteria are not met.
 Aspiration hazard : Based on available data, the classification criteria are not met.
 Symptoms/injuries after inhalation : May cause drowsiness or dizziness. May cause respiratory tract irritation. May displace oxygen and cause rapid suffocation. May cause cardiac arrhythmia.
 Symptoms/injuries after skin contact : May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.
 Symptoms/injuries after eye contact : Causes serious eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva.
 Symptoms/injuries after ingestion : May be harmful if swallowed. May cause stomach distress, nausea or vomiting.

SECTION 12: ECOLOGICAL INFORMATION

12.1. TOXICITY

Ecology - general : May cause long-term adverse effects in the aquatic environment.

12.2. PERSISTENCE AND DEGRADABILITY

| SKD-S2 Aerosol | |
|-------------------------------|------------------|
| Persistence and degradability | Not established. |

12.3. BIOACCUMULATIVE POTENTIAL

| SKD-S2 Aerosol | |
|---------------------------|------------------|
| Bioaccumulative potential | Not established. |

12.4. MOBILITY IN SOIL

No additional information available.

12.5. OTHER ADVERSE EFFECTS

Effect on the global warming : No known ecological damage caused by this product.

SECTION 13: DISPOSAL CONSIDERATIONS

13.1. WASTE TREATMENT METHODS

- Waste disposal recommendations : This material must be disposed of in accordance with all local, state, provincial, and federal regulations. The generation of waste should be avoided or minimized wherever possible.
- Additional information : Flammable vapors may accumulate in the container. Pressurized container: Do not pierce or burn, even after use.

SECTION 14: TRANSPORT INFORMATION

In accordance with DOT/TDG/IATA/IMDG

- DOT Ground : Consumables, Limited Quantity
- TDG : Consumables, Limited Quantity
- IATA : UN 1950, Aerosols, Flammable, 2.1
- IMDG : UN 1950, Aerosols, 2.1 (Limited Quantity)

ADDITIONAL INFORMATION

- Other information : No supplementary information available.
- Special transport precautions : Do not handle until all safety precautions have been read and understood.

SECTION 15: REGULATORY INFORMATION

15.1. FEDERAL REGULATIONS

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory.

All components of this product are listed, or excluded from listing, on the Canadian DSL (Domestic Substances List) and NDSL (Non-Domestic Substances List) inventories except:

| | |
|-------------------------|------------------|
| Chlorite-group minerals | CAS No 1318-59-8 |
|-------------------------|------------------|

Isopropyl alcohol (67-63-0)


Subject to reporting requirements of United States SARA Section 313

| | |
|---------------------------------------|---|
| EPA TSCA Regulatory Flag | T - T - indicates a substance that is the subject of a Section 4 test rule under TSCA |
| SARA Section 313 - Emission Reporting | 1.0 % |

Acetone (67-64-1)

| | |
|--------------------------|---|
| EPA TSCA Regulatory Flag | T - T - indicates a substance that is the subject of a Section 4 test rule under TSCA |
|--------------------------|---|

- NFPA health hazard : 2
- NFPA fire hazard : 4
- NFPA reactivity : 0



15.3. US STATE REGULATIONS

SKD-S2 Aerosol

| | |
|----------------------------|--|
| State or local regulations | This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm |
|----------------------------|--|

SECTION 16: OTHER INFORMATION

- Date of issue : 03/18/2016
- Revision date : 03/18/2016
- Other information : None.

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.

**KANO LABORATORIES,
INC. SAFETY DATA SHEET**

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

Product Name: SILIKROIL AEROSOL

Product Use: Penetrant/Lubricant for Industrial Use

Manufacturer: Kano Laboratories, Inc.
1000 E. Thompson Lane
Nashville, TN 37211

Emergency Phone Number: Chemtrec 1 (800) 424-9300

Manufacturer Phone Number: 615-833-4101

Website: www.kanolabs.com

SDS Date of Preparation: January 10, 2020

SECTION 2: HAZARDS IDENTIFICATION

GHS / HAZCOM 2012 Classification:

| Health | Physical |
|--|--|
| Skin Irritation Category 2 Eye Irritation Category 2A Specific Target Organ Toxicity – Single Exposure Category 3 CNS) Aspiration Hazard Category 1 Skin Sensitization Category 1 | Flammable Aerosol Category 2 Gas Under Pressure: Compressed Gas |

Label Elements

Danger!



Flammable aerosol.

Contains gas under pressure; may explode if heated. Causes skin irritation.

Causes serious eye irritation.

May cause an allergic skin reaction.

May be fatal if swallowed and enters airways.

May cause drowsiness or dizziness.

Keep away from heat, sparks, open flames, and hot surfaces. No smoking.

Do not spray on an open flame or other ignition source.

Pressurized container. Do not pierce or burn, even after use.

Avoid breathing mist, vapors or spray.

Wash thoroughly after handling.

Use only outdoors or in a well-ventilated area.

Contaminated clothing must not be allowed out of the workplace.

Wear protective gloves and eye protection.

IF SWALLOWED: Immediately call a POISON CENTER. Do NOT induce vomiting.

IF ON SKIN: Wash with plenty of soap and water. If skin irritation or rash occurs: Get medical attention. Take off contaminated clothing and wash it before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing. If eye irritation persists: Get medical attention.

IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER if you feel unwell.

In case of fire: Use carbon dioxide, dry chemical or foam to extinguish.

Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Store in a well-ventilated place.

Store locked up.

Dispose of contents and container in accordance with local and national regulations.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS# | % |
|---|--------------------------|-------|
| LVP Aliphatic Hydrocarbon | 64742-47-8 | 30-60 |
| Severely Hydrotreated Heavy Petroleum Distillates | 64742-52-5 64742-53-6 | 30-60 |
| Diisobutyl Ketone | 108-83-8 | 7-13 |
| Proprietary Additive | Proprietary | 5-10 |
| Aliphatic Alcohol #1 | 123-42-2 | 1-<3 |
| Aliphatic Alcohol #2 | 78-83-1 | 1-<3 |
| Carbon Dioxide Propellant | 124-38-9 | 1-5 |

The exact percentage has been withheld as a trade secret or is a variation in formula.

SECTION 4: FIRST AID MEASURES

Eye: Rinse thoroughly with water for several holding the eye lids open to be sure the material is washed out. Get medical attention if irritation develops or persists.

Skin: Remove contaminated clothing. Wash contact area thoroughly with soap and water. Get medical attention if irritation or symptoms of exposure develop. Launder clothing before re-use.

Inhalation: Remove victim to fresh air. Give artificial respiration if needed. If breathing is difficult, oxygen should be administered by qualified personnel. Get medical attention if symptoms develop.

Ingestion: DO NOT induce vomiting. Keep the victim calm and warm. Never give anything by mouth to an unconscious or drowsy person. Get immediate medical attention.

Most important symptoms and effects, acute and delayed: May cause eye and skin irritation. Inhalation of vapors or mist may cause respiratory irritation and central nervous system effects such as headache, dizziness, nausea and vomiting. Harmful or fatal if swallowed. Aspiration into the lungs during ingestion or vomiting may cause lung damage. May cause an allergic skin reaction.

Indication of immediate medical attention and special treatment, if needed: If swallowed, get immediate medical attention.

SECTION 5: FIRE FIGHTING MEASURES

Suitable (and Unsuitable) Extinguishing Media: Use carbon dioxide, dry chemical or foam. Water may be ineffective but can be used to cool containers and structures.

Specific Hazards Arising from the Chemical: Contents under pressure. Keep away from heat and open flames. Container may rupture or explode in the heat of a fire. Prolonged exposure to temperatures above 120°F may cause cans to burst. Vapors are heavier than air and may travel along surfaces to remote ignition sources and flash back.

Never use welding or cutting torch on or near containers (even empty) because product can ignite explosively. Combustion products may be hazardous: Oxides of carbon, organic compounds, smoke and fumes.

Special Protective Equipment and Precautions for Fire-fighters: Wear NIOSH approved positive pressure, self-contained breathing apparatus and full protective clothing. Cool fire exposed containers with water. Protect against bursting cans.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Personal precautions, Protective equipment, and Emergency procedures: Wear appropriate protective clothing to prevent eye and skin contact including impervious gloves, safety goggles and respirator if needed. Remove all ignition sources such as open flames, spark producing equipment, pilot lights, etc. Ventilate the area with explosion-proof equipment.

Environmental precautions: Avoid release to the environment. Report spills and releases as required to appropriate authorities.

Methods and Materials for Containment and Cleaning up: Place leaking can in a pail or pan in a well-ventilated area until the pressure has been released. Cover liquid with an inert absorbent material and collect into an appropriate container for disposal.

SECTION 7: HANDLING AND STORAGE

Precautions for Safe Handling: Avoid breathing vapors, aerosols and mists. Use with adequate ventilation. Avoid contact with the eyes, skin and clothing. Wash exposed skin thoroughly with soap and water after use. Keep product away from heat, sparks, flames and all other sources of ignition. No smoking in storage or use areas. Do not cut, braze, solder, grind or weld on or near containers. Contents under pressure. Do not puncture or incinerate container.

Conditions for Safe Storage, Including any Incompatibilities: Store in a cool, well ventilated area at temperatures below 120°F. Do not store in direct sunlight. Store as a Level 3 aerosol.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

| Chemical Name | Exposure Limits |
|--|--|
| LVP Aliphatic Hydrocarbon | 200 ppm TWA ACGIH TLV (as total hydrocarbon vapor) |
| Severely Hydrotreated Heavy Petroleum Distillates (as mineral oil) | 5 mg/m ³ TWA OSHA PEL 5 mg/m ³ TWA ACGIH TLV (inhalable fraction) |
| Diisobutyl Ketone | 50 ppm TWA OSHA PEL 25 ppm TWA ACGIH TLV |
| Proprietary Additive | None Established |
| Aliphatic Alcohol #1 | 50 ppm OSHA TWA PEL- 50 ppm TWA ACGIH TLV |
| Aliphatic Alcohol #2 | 100 ppm TWA OSHA PEL 50 ppm TWA ACGIH TLV |
| Carbon Dioxide Propellant | 5000 ppm TWA OSHA PEL 5000 ppm TWA ACGIH TLV 30000 ppm STEL ACGIH TLV |

Appropriate Engineering Controls: Use with adequate general or local exhaust ventilation to maintain concentrations below the occupational exposure limits. Use explosion proof electrical equipment and wiring where required.

Personal Protective Equipment:

Respiratory Protection: If the exposure limits listed above are exceeded, a NIOSH approved respirator with

1/10/2020

organic vapor cartridges may be used. For higher exposures, a supplied air respirator may be required. Respirator selection and use should be based on contaminant type, form and concentration. Follow OSHA 1910.134, ANSI Z88.2 and good Industrial Hygiene practice.

Hand protection: Impervious gloves are recommended when needed to avoid skin contact.

Eye Protection: Chemical safety goggles recommended.

Skin Protection: Impervious clothing as required to prevent skin contact and contamination of personal clothing.

Hygiene measures: Suitable eye wash and washing facilities should be available in the work area.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|----------------------------------|---|
| Appearance: | Slightly reddish liquid packaged as an aerosol | Odor: | Solvent |
| Odor Threshold: | Not available | pH: | Not available |
| Melting/Freezing Point: | Not available | Boiling Point/Range: | Not available |
| Flash Point: | 132°F (55.5°C) TOC | Evaporation Rate: | Not available |
| Flammability: (Solid, Gas) | Not applicable | Flammability Limits: | 10.9% (aliphatic alcohol #2) LEL: 0.7% (light petroleum distillates) |
| Vapor Pressure: | Not available | Vapor Density: | Not available |
| Relative Density: | 0.8596 | Solubilities: | Negligible in Water |
| Partition Coefficient: (N-Octanol/Water) | Not available | Autoignition Temperature: | Not available |
| Decomposition Temperature: | Not available | Viscosity: | Not available |

SECTION 10: STABILITY AND REACTIVITY

Reactivity: None known.

Chemical Stability: Stable under normal conditions of storage or use.

Possibility of Hazardous Reactions: None known.

Conditions to avoid: Avoid heat, sparks, flames and all other sources of ignition.

Incompatible Materials: Avoid strong oxidizing agents, reducing agents, acids and bases.

Hazardous decomposition products: Combustion will produce oxides of carbon, acetone, acrid fumes and smoke.

SECTION 11: TOXICOLOGICAL INFORMATION

Potential Health Effects:

Eye: May cause eye irritation with redness, tearing and stinging.

Skin: May cause irritation with redness, rash, swelling. Prolonged or repeated contact may result in defatting and dermatitis. Repeated skin contact may cause sensitization (allergic skin reaction) in some individuals.

Inhalation: Inhalation of vapors or mists may cause mucous membrane and upper respiratory tract irritation and central nervous system depression. Symptoms may include coughing, wheezing, shortness of breath, headache, dizziness, drowsiness, nausea, fatigue and unconsciousness.

Ingestion: Ingestion is an unlikely route of exposure for aerosol products. Swallowing may cause gastrointestinal irritation with abdominal pain, nausea, vomiting and diarrhea and central nervous system depression with symptoms

including headache, dizziness, intoxication, weakness, nausea, and vomiting. Aspiration into the lungs during ingestion or vomiting may cause lung damage.

Chronic Hazards: None known.

Carcinogen Status: None of the components of this product at greater than 0.1% are listed as carcinogens by OSHA, IARC or NTP.

Acute toxicity: Toxicological testing has not been performed on this product as a mixture.

LVP Aliphatic Hydrocarbon: Oral rat LD50 > 5000 mg/kg; Dermal rat LD50 > 5000 mg/kg Inhalation rat LC50 > 2.18 mg/L/4 hr.

Severely Hydrotreated Petroleum Distillates: Oral rat LD50 >5000 mg/kg, Inhalation rat LC50 >5.28 mg/L/4 hr, Dermal rabbit LD50 >2000 mg/kg

Proprietary Additive: Oral rat LD50 3200 mg/kg; Dermal rabbit LD50 5000 mg/kg

Diisobutyl Ketone: Oral rat LD50 5233 mg/kg; Dermal rat LD50 > 2000 mg/kg; Inhalation rat LC50 14.5 mg/L/4 hr.

Aliphatic Alcohol #1: Oral rat LD50 3002 mg/kg; Dermal rat LD50 > 1875 mg/kg; Inhalation rat LC50 > 7.6 mg/L/4 hr.

Aliphatic Alcohol #2: Oral rat LD50 > 2830 mg/kg; Inhalation rat LC50 24.6 mg/L/4 hr.; Dermal rabbit LD50 > 2000 mg/kg

Carbon Dioxide: Inhalation rat LC50 167857 ppm/4 hr

SECTION 12: ECOLOGICAL INFORMATION

Ecotoxicity: No toxicity data available for the product.

LVP Aliphatic Hydrocarbon: 96 hr. LC50 Pimephales promelas > 100 mg/L; 48 hr. EC50 daphnia magna >1000 mg/L; 72 hr. EC50 Pseudokirchnerella subcapitata > 100 mg/L

Severely Hydrotreated Petroleum Distillates: 96 hr LL50 Oncorhynchus mykiss 2.5 mg/kg, 48 hr EL50 daphnia magna 1.4 mg/L, 72 hr EL50 Pseudokirchnerella subcapitata 1.3 mg/L

Proprietary Ingredient: 48 hr. LC50 daphnia magna 17-28 mg/L

Diisobutyl Ketone: 96 hr. LC50 Oncorhynchus mykiss 30 mg/L; 48 hr. EC50 daphnia magna 37.2 mg/L, 72 hr.

Aliphatic Alcohol #1: 96 hr. LC50 Oryzias latipes >100 mg/L; 48 hr. EC50 daphnia magna >1000 mg/L; 72 hr. EC50 Pseudokirchnerella subcapitata >1000 mg/L

Aliphatic Alcohol #2: 96 hr LC50 Pimephales promelas 1430 mg/L; 48 hr EC50 daphnia pulex 1100 mg/L; 72 hr EC50 Pseudokirchnerella subcapitata 1799 mg/L

Carbon Dioxide: 96 hr LC50 Oncorhynchus mykiss 35 mg/L

Persistence and Degradability: Aliphatic Alcohol #1 and Aliphatic Alcohol #2 are readily biodegradable.

Bioaccumulative Potential: No data available.

Mobility in Soil: No data available

Other Adverse Effects: None known

SECTION 13: DISPOSAL INFORMATION

Disposal instructions: Dispose of product in accordance with all local, state/provincial and federal regulations. Do not puncture or incinerate.

Contaminated packaging: Offer empty packaging material to local recycling facilities.

SECTION 14: TRANSPORT INFORMATION

| | UN Number | Proper shipping name | Hazard Class | Packing Group | Environmental Hazard |
|----------------------------|-----------|---------------------------------------|--------------|---------------|----------------------|
| DOT / 49 CFR Ground | | Limited Quantity | | | |
| DOT Air | UN1950 | Aerosols, Flammable, Limited Quantity | 2.1 | None | None |
| IMDG | UN1950 | Aerosols, Limited Quantity | 2.1 | None | None |
| IATA | UN1950 | Aerosols, Flammable, Limited Quantity | 2.1 | None | None |

Transport in bulk (according to Annex II of MARPOL 73/78 and the IBC Code): Not applicable
– product is transported only in packaged form.

Special precautions: None known.

SECTION 15: REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS:

CERCLA 103 Reportable Quantity: This product has a Reportable Quantity (RQ) of 166,666 lbs. (based on the RQ for Aliphatic alcohol #2 of 5,000 lbs present at 3%) maximum. Releases above the RQ must be reported to the National Response Center. Many states have more stringent release reporting requirements. Report spills required under federal, state and local regulations

STATE REPORTING REGULATIONS:

Massachusetts Right To Know: Diacetone Alcohol 123-42-2, Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9

New Jersey Right To Know: Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9, Pine Oil 8002-09-3

Pennsylvania Right To Know: Diacetone Alcohol 123-42-2, Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9

SARA TITLE III:

Hazard Category for Section 311/312: Refer to Section 2 for the OSHA Hazard Classification

Section 313 Toxic Chemicals: This product contains the following chemicals subject to SARA Title III Section 313 Reporting requirements: None.

Section 302 Extremely Hazardous Substances (TPQ): None

EPA Toxic Substances Control Act (TSCA) Status: All of the components of this product are listed on the TSCA inventory.

Canadian DSL: All of the components of this product are listed on the Canadian Domestic Substances List

SECTION 16: OTHER INFORMATION

HMIS Ratings: Health - 2

Flammability - 4

Physical Hazard - 0

NFPA Ratings: Health - 1

Flammability - 2

Instability - 0

SDS Revision History: Updated formulation – changes to sections 3, 8, 11, 12, 15.**Date of preparation:** January 10, 2020**Date of last revision:** July 12, 2019

=====
The information contained herein has been developed based upon current available scientific data. New information may be developed from time to time which may render the conclusions of this report obsolete. Therefore, no warranty is extended as to the applicability of this information to the user's intended purpose or the consequences of its use or misuse.

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

1 Identification

- **Product identifier**
- **Trade name:** Sheila Shine (Liquid)
- **Other means of identification:** No other identifiers
- **Recommended use and restriction on use**
- **Recommended use:** Polishing agent/ Burnishing compound
- **Restrictions on use:** No relevant information available.
- **Details of the supplier of the Safety Data Sheet**
- **Manufacturer/Supplier:**
Sheila Shine Inc.
7725 W 2nd Court
Hialeah, FL 33014
Phone: (305) 557-1729
- **Emergency telephone number:**
ChemTel Inc.
(800)255-3924 (North America)
+1 (813)248-0585 (International)

2 Hazard(s) identification

- **Classification of the substance or mixture**
Flam. Liq. 3 H226 Flammable liquid and vapor.
Skin Irrit. 2 H315 Causes skin irritation.
Eye Irrit. 2A H319 Causes serious eye irritation.
Carc. 1B H350 May cause cancer.
STOT RE 2 H373 May cause damage to the hearing organs through prolonged or repeated exposure.
Route of exposure: Oral, Inhalation.
Asp. Tox. 1 H304 May be fatal if swallowed and enters airways.

- **Label elements**

- **GHS label elements**

The product is classified and labeled according to the Globally Harmonized System (GHS).

- **Hazard pictograms:**



GHS02 GHS07 GHS08

- **Signal word:** Danger
- **Hazard statements:**
H226 Flammable liquid and vapor.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H350 May cause cancer.
H373 May cause damage to the hearing organs through prolonged or repeated exposure. Route of exposure: Oral, Inhalation.
H304 May be fatal if swallowed and enters airways.
- **Precautionary statements:**

(Cont'd. on page 2)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 1)

| | |
|----------------|--|
| P201 | Obtain special instructions before use. |
| P202 | Do not handle until all safety precautions have been read and understood. |
| P210 | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. |
| P233 | Keep container tightly closed. |
| P240 | Ground/bond container and receiving equipment. |
| P241 | Use explosion-proof electrical/ventilating/lighting/equipment. |
| P242 | Use only non-sparking tools. |
| P243 | Take precautionary measures against static discharge. |
| P264 | Wash thoroughly after handling. |
| P280 | Wear protective gloves/protective clothing/eye protection. |
| P301+P310 | If swallowed: Immediately call a poison center/doctor. |
| P331 | Do NOT induce vomiting. |
| P303+P361+P353 | If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P314 | Get medical advice/attention if you feel unwell. |
| P332+P313 | If skin irritation occurs: Get medical advice/attention. |
| P362+P364 | Take off contaminated clothing and wash it before reuse. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P370+P378 | In case of fire: Use foam, powder, or carbon dioxide for extinction. |
| P403+P235 | Store in a well-ventilated place. Keep cool. |
| P405 | Store locked up. |
| P501 | Dispose of contents/container in accordance with local/regional/national/international regulations. |

· **Other hazards** There are no other hazards not otherwise classified that have been identified.

3 Composition/information on ingredients

· **Chemical characterization: Mixtures**

· **Components:**

| | | |
|------------|--|--------|
| 64741-89-5 | Distillates (petroleum), solvent-refined light paraffinic ⚠ Carc. 1B, H350 | 30-60% |
| 127-18-4 | tetrachloroethylene ⚠ Carc. 2, H351 | 10-30% |
| 64741-88-4 | Distillates (petroleum), solvent-refined heavy paraffinic ⚠ Carc. 1B, H350 | 10-30% |
| 1330-20-7 | Xylene ⚠ Flam. Liq. 3, H226 ⚠ Asp. Tox. 1, H304 ⚠ Acute Tox. 4, H312; Acute Tox. 4, H332; Skin Irrit. 2, H315; Eye Irrit. 2A, H319; STOT SE 3, H335 | 7-13% |
| 100-41-4 | Ethylbenzene ⚠ Flam. Liq. 2, H225 ⚠ Carc. 2, H351; STOT RE 2, H373; Asp. Tox. 1, H304 ⚠ Acute Tox. 4, H332 | 1-5% |

· **Additional information:**

(Cont'd. on page 3)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 2)

For the wording of the listed Hazard Statements, refer to section 16.
For the listed ingredient(s), the identity and/or exact percentage(s) are being withheld as a trade secret.

4 First-aid measures

- **Description of first aid measures**

- **After inhalation:**

Supply fresh air; consult doctor in case of complaints.
Provide oxygen treatment if affected person has difficulty breathing.
In case of irregular breathing or respiratory arrest provide artificial respiration.
In case of unconsciousness place patient stably in side position for transportation.

- **After skin contact:**

Immediately wash with water and soap and rinse thoroughly.
Seek medical treatment in case of complaints.

- **After eye contact:**

Remove contact lenses if worn.
Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor.

- **After swallowing:**

Rinse out mouth and then drink plenty of water.
Do not induce vomiting; immediately call for medical help.
A person vomiting while lying on their back should be turned onto their side.

- **Most important symptoms and effects, both acute and delayed:**

Coughing
Dizziness
Breathing difficulty
Irritant to skin and mucous membranes.
Causes eye irritation.
Nausea
Gastric or intestinal disorders when ingested.
Disorientation

- **Danger:**

May be harmful if inhaled.
May be fatal if swallowed and enters airways.
Danger of impaired breathing.
Danger of disturbed cardiac rhythm.
Danger of convulsion.
Carcinogenic.
May cause damage to the hearing organs through prolonged or repeated exposure. Route of exposure:
Oral, Inhalation.

- **Indication of any immediate medical attention and special treatment needed:**

Medical supervision for at least 48 hours.
Later observation for pneumonia and pulmonary edema.
If necessary oxygen respiration treatment.
Monitor circulation.

5 Fire-fighting measures

- **Extinguishing media**

- **Suitable extinguishing agents:**

(Cont'd. on page 4)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 3)

Water fog / haze

Foam

Fire-extinguishing powder

Carbon dioxide

· **For safety reasons unsuitable extinguishing agents:** Water stream.

· **Special hazards arising from the substance or mixture**

During heating or in case of fire poisonous gases are produced.

· **Advice for firefighters**

· **Protective equipment:**

Wear self-contained respiratory protective device.

Wear fully protective suit.

· **Additional information:**

Eliminate all ignition sources if safe to do so.

Cool endangered containers with water fog.

6 Accidental release measures

· **Personal precautions, protective equipment and emergency procedures**

Use respiratory protective device against the effects of fumes/dust/aerosol.

Wear protective equipment. Keep unprotected persons away.

Ensure adequate ventilation.

Keep away from ignition sources.

Particular danger of slipping on leaked/spilled product.

· **Environmental precautions**

Do not allow to enter sewers/ surface or ground water.

Inform respective authorities in case of seepage into water course or sewage system.

· **Methods and material for containment and cleaning up**

Absorb with non-combustible liquid-binding material (sand, diatomite, acid binders, universal binders).

Remove from the water surface (e.g. skim or suck off).

Send for recovery or disposal in suitable receptacles.

· **Reference to other sections**

See Section 7 for information on safe handling.

See Section 8 for information on personal protection equipment.

See Section 13 for disposal information.

7 Handling and storage

· **Handling**

· **Precautions for safe handling:**

Keep away from heat and direct sunlight.

Avoid splashes or spray in enclosed areas.

Use only in well ventilated areas.

Rags, metal wools / cuttings / shavings and waste papers soaked with product must be placed in a sealed metal container rated for flammable waste.

· **Information about protection against explosions and fires:**

Emergency cooling must be available in case of nearby fire.

Keep ignition sources away - Do not smoke.

Prevent impact and friction.

(Cont'd. on page 5)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 4)

- **Conditions for safe storage, including any incompatibilities**
- **Requirements to be met by storerooms and receptacles:**
Avoid storage near extreme heat, ignition sources or open flame.
Store in cool, dry conditions in well sealed receptacles.
- **Information about storage in one common storage facility:**
Store away from foodstuffs.
Store away from oxidizing agents.
- **Specific end use(s)** No relevant information available.

8 Exposure controls/personal protection

· Control parameters

· Components with limit values that require monitoring at the workplace:

127-18-4 tetrachloroethylene

| | |
|---------------|---|
| PEL (USA) | Long-term value: 100 ppm Ceiling limit value: 200; 300* ppm *5-min peak in any 3 hrs |
| REL (USA) | Minimize workplace exp. concs.; Pocket Guide App. A |
| TLV (USA) | Short-term value: 685 mg/m ³ , 100 ppm Long-term value: 170 mg/m ³ , 25 ppm BEI |
| EL (Canada) | Short-term value: 100 ppm Long-term value: 25 ppm IARC 2A |
| EV (Canada) | Short-term value: 100 ppm Long-term value: 25 ppm |
| LMPE (Mexico) | Short-term value: 100 ppm Long-term value: 25 ppm A3, IBE |

1330-20-7 Xylene

| | |
|---------------|--|
| PEL (USA) | Long-term value: 435 mg/m ³ , 100 ppm |
| REL (USA) | Short-term value: 655 mg/m ³ , 150 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| TLV (USA) | Short-term value: 651 mg/m ³ , 150 ppm Long-term value: 434 mg/m ³ , 100 ppm BEI |
| EL (Canada) | Short-term value: 150 ppm Long-term value: 100 ppm |
| EV (Canada) | Short-term value: 650 mg/m ³ , 150 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| LMPE (Mexico) | Short-term value: 150 ppm Long-term value: 100 ppm A4, IBE |

100-41-4 Ethylbenzene

| | |
|-----------|--|
| PEL (USA) | Long-term value: 435 mg/m ³ , 100 ppm |
|-----------|--|

(Cont'd. on page 6)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 5)

| | |
|---------------|---|
| REL (USA) | Short-term value: 545 mg/m ³ , 125 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| TLV (USA) | Long-term value: 87 mg/m ³ , 20 ppm BEI |
| EL (Canada) | Long-term value: 20 ppm IARC 2B |
| EV (Canada) | Short-term value: 540 mg/m ³ , 125 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| LMPE (Mexico) | Long-term value: 20 ppm |

· **Ingredients with biological limit values:**

127-18-4 tetrachloroethylene

| | |
|-----------|--|
| BEI (USA) | 3 ppm Medium: end-exhaled air Time: prior to shift Parameter: Tetrachloroethylene |
| | 0.5 mg/L Medium: blood Time: prior to shift Parameter: Tetrachloroethylene |

1330-20-7 Xylene

| | |
|-----------|--|
| BEI (USA) | 1.5 g/g creatinine Medium: urine Time: end of shift Parameter: Methylhippuric acids |
|-----------|--|

100-41-4 Ethylbenzene

| | |
|-----------|---|
| BEI (USA) | 0.7 g/g creatinine Medium: urine Time: end of shift at end of workweek Parameter: Sum of mandelic acid and phenylglyoxylic acid (nonspecific, semi-quantitative) |
| | - Medium: end-exhaled air Time: not critical Parameter: Ethyl benzene (semi-quantitative) |

· **Exposure controls**

· **General protective and hygienic measures:**

The usual precautionary measures for handling chemicals should be followed.
Keep away from foodstuffs, beverages and feed.
Wash hands before breaks and at the end of work.
Avoid contact with the eyes and skin.
Do not inhale gases / fumes / aerosols.
Do not carry product impregnated cleaning cloths in trouser pockets.

· **Engineering controls:** No relevant information available.

· **Breathing equipment:**

Use suitable respiratory protective device in case of insufficient ventilation.
Use suitable respiratory protective device when aerosol or mist is formed.
For spills, respiratory protection may be advisable.

(Cont'd. on page 7)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 6)

NIOSH or EN approved organic vapor respirator equipped with a dust/mist prefilter should be used.

· **Protection of hands:**



Protective gloves

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.

· **Eye protection:**



Safety glasses

· **Body protection:** Protective work clothing

· **Limitation and supervision of exposure into the environment**

No relevant information available.

· **Risk management measures** No relevant information available.

9 Physical and chemical properties

· **Information on basic physical and chemical properties**

· **Appearance:**

Form: Liquid

Color: Clear

· **Odor:** Pleasant

· **Odor threshold:** Not determined.

· **pH-value:** Not determined.

· **Melting point/Melting range:** Not determined.

· **Boiling point/Boiling range:** 112 °C (233.6 °F)

· **Flash point:** 56 °C (132.8 °F) (TOC)

· **Flammability (solid, gaseous):** Not applicable.

· **Auto-ignition temperature:** Not determined.

· **Decomposition temperature:** Not determined.

· **Danger of explosion:** Product is not explosive. However, formation of explosive air/vapor mixtures are possible.

· **Explosion limits**

Lower: ~1.1 Vol %

Upper: ~7.0 Vol %

· **Oxidizing properties:** Non-oxidizing.

· **Vapor pressure at 20 °C (68 °F):** 10 mmHg

· **Density:**

Relative density at 20 °C (68 °F): 0.964 g/cm³ (8.04 lbs/gal)

Vapor density at 20 °C (68 °F): > 1 (air = 1)

Evaporation rate at 20 °C (68 °F): < 1 (butyl acetate = 1)

(Cont'd. on page 8)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 7)

- **Solubility in / Miscibility with Water:** Not miscible or difficult to mix.
- **Partition coefficient (n-octanol/water):** Not determined.
- **Viscosity**
 - Dynamic:** Not determined.
 - Kinematic at 40 °C (104 °F):** <20.5 mm²/s
- **Other information** No relevant information available.

10 Stability and reactivity

- **Reactivity:** No relevant information available.
- **Chemical stability:**
- **Thermal decomposition / conditions to be avoided:**
No decomposition if used and stored according to specifications.
- **Possibility of hazardous reactions**
Develops readily flammable gases / fumes.
Can form explosive mixtures in air if heated above flash point and/or when sprayed or atomized.
Used empty containers may contain product gases which form explosive mixtures with air.
Toxic fumes may be released if heated above the decomposition point.
Reacts with strong acids and oxidizing agents.
Reacts with certain metals.
- **Conditions to avoid** Excessive heat.
- **Incompatible materials** No relevant information available.
- **Hazardous decomposition products**
Carbon monoxide and carbon dioxide
Hydrocarbons
Chlorine compounds

11 Toxicological information

- **Information on toxicological effects**
- **Acute toxicity:** Based on available data, the classification criteria are not met.

· LD/LC50 values that are relevant for classification:

127-18-4 tetrachloroethylene

| | | |
|------|------|------------------|
| Oral | LD50 | 2629 mg/kg (rat) |
|------|------|------------------|

1330-20-7 Xylene

| | | |
|--------|------|---------------------|
| Oral | LD50 | 4300 mg/kg (rat) |
| Dermal | LD50 | 2000 mg/kg (rabbit) |

100-41-4 Ethylbenzene

| | | |
|--------|------|----------------------|
| Oral | LD50 | 3500 mg/kg (rat) |
| Dermal | LD50 | 17800 mg/kg (rabbit) |

- **Primary irritant effect:**
- **On the skin:** Irritant to skin and mucous membranes.

(Cont'd. on page 9)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 8)

- **On the eye:** Causes eye irritation.
- **Sensitization:** Based on available data, the classification criteria are not met.

· **IARC (International Agency for Research on Cancer):**

| | | |
|----------|---------------------|----|
| 127-18-4 | tetrachloroethylene | 2A |
| 100-41-4 | Ethylbenzene | 2B |

· **NTP (National Toxicology Program):**

| | | |
|----------|---------------------|---|
| 127-18-4 | tetrachloroethylene | R |
|----------|---------------------|---|

· **OSHA-Ca (Occupational Safety & Health Administration):**

None of the ingredients are listed.

· **Probable route(s) of exposure:**

Ingestion.
Inhalation.
Eye contact.
Skin contact.

- **Germ cell mutagenicity:** Based on available data, the classification criteria are not met.
- **Carcinogenicity:** May cause cancer.
- **Reproductive toxicity:** Based on available data, the classification criteria are not met.
- **STOT-single exposure:** Based on available data, the classification criteria are not met.
- **STOT-repeated exposure:**
May cause damage to the hearing organs through prolonged or repeated exposure. Route of exposure: Oral, Inhalation.
- **Aspiration hazard:** May be fatal if swallowed and enters airways.

12 Ecological information

- **Toxicity**
- **Aquatic toxicity**
Toxic to aquatic life with long lasting effects.

127-18-4 tetrachloroethylene

LC50 | 4.99 mg/l (Oncorhynchus mykiss)

1330-20-7 Xylene

LC50 | 13.4 mg/l (pimephales promelas)

100-41-4 Ethylbenzene

EC50 | 1-10 mg/kg (daphnia)

LC50 | 1-10 mg/l (Green Algae (chlorophyta))

4.2 mg/l (Oncorhynchus mykiss)

- **Persistence and degradability** The product is partially biodegradable. Significant residuals remain.
- **Bioaccumulative potential:** No relevant information available.
- **Mobility in soil:** No relevant information available.
- **Additional ecological information**
- **General notes:**
Due to available data on eliminability/decomposition and bioaccumulation potential prolonged term damage of the environment can not be excluded.
Do not allow product to reach ground water, water course or sewage system.
- **Other adverse effects** No relevant information available.

(Cont'd. on page 10)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 9)

13 Disposal considerations

- **Waste treatment methods**

- **Recommendation:**

The user of this material has the responsibility to dispose of unused material, residues and containers in compliance with all relevant local, state and federal laws and regulations regarding treatment, storage and disposal for hazardous and nonhazardous wastes.

- **Uncleaned packagings**

- **Recommendation:** Disposal must be made according to official regulations.

14 Transport information

- **UN-Number**

- **DOT, ADR/RID/ADN, IMDG, IATA** UN1992

- **UN proper shipping name**

- **DOT** Flammable liquids, toxic, n.o.s. (Ethylbenzene, Tetrachloroethylene)
- **ADR/RID/ADN, IMDG** FLAMMABLE LIQUID, TOXIC, N.O.S. (ETHYLBENZENE, TETRACHLOROETHYLENE)
- **IATA** Flammable liquid, toxic, n.o.s. (Ethylbenzene, Tetrachloroethylene)

- **Transport hazard class(es)**

- **DOT**



- **Class** 3
- **Label** 3, 6.1

- **ADR/RID/ADN**



- **Class** 3 (FT1)
- **Label** 3, 6.1

- **IMDG**



- **Class** 3
- **Label** 3/6.1

(Cont'd. on page 11)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 10)

· **IATA**



· **Class** 3
 · **Label** 3 (6.1)

· **Packing group**
 · **DOT, ADR/RID/ADN, IMDG, IATA** III

· **Environmental hazards** Product contains environmentally hazardous substances: tetrachloroethylene

· **Marine pollutant:**



Yes

· **Special precautions for user** Warning: Flammable liquids
 · **Danger code (Kemler):** 36
 · **EMS Number:** F-E,S-D
 · **Segregation groups** Liquid halogenated hydrocarbons

· **Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code** Not applicable.

· **Transport/Additional information:**

· **DOT**



Limited Quantity for packages less than 30 kg gross and inner packagings less than 5 L each.

Labeling as a Marine Pollutant is only required for bulk single package shipments. Bulk packaging consists of a maximum capacity of greater than 450 L (119 gallons) for a liquid and a maximum net mass greater than 400 kg (882 pounds) for a solid. (See 171.4(c))

· **ADR/RID/ADN**



Limited Quantity for packages less than 30 kg gross and inner packagings less than 5 L each.

Marine pollutants packaged in single or combination packagings containing a net quantity per single or inner packaging of 5 L or less for liquids or having a net mass per single or inner packaging of 5 kg or less for solids are not subject to provisions relevant to marine pollutants. (See 5.2.1.8.1)

· **IMDG**



Limited Quantity for packages less than 30 kg gross and inner packagings less than 5 L each.

(Cont'd. on page 12)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 11)

Marine pollutants packaged in single or combination packagings containing a net quantity per single or inner packaging of 5 L or less for liquids or having a net mass per single or inner packaging of 5 kg or less for solids are not subject to provisions relevant to marine pollutants. (See 2.10.2.7)

· IATA



Limited Quantity for packages less than 30 kg gross and inner packagings less than 1 L each / 2 L net.

15 Regulatory information

- **Safety, health and environmental regulations/legislation specific for the substance or mixture**
- **United States (USA)**
- **SARA**

· **Section 302 (extremely hazardous substances):**

None of the ingredients are listed.

· **Section 355 (extremely hazardous substances):**

None of the ingredients are listed.

· **Section 313 (Specific toxic chemical listings):**

| | |
|----------|---------------------|
| 127-18-4 | tetrachloroethylene |
|----------|---------------------|

| | |
|-----------|--------|
| 1330-20-7 | Xylene |
|-----------|--------|

| | |
|----------|--------------|
| 100-41-4 | Ethylbenzene |
|----------|--------------|

· **TSCA (Toxic Substances Control Act)**

All ingredients are listed or exempt.

· **Proposition 65 (California)**

· **Chemicals known to cause cancer:**

| | |
|----------|---------------------|
| 127-18-4 | tetrachloroethylene |
|----------|---------------------|

| | |
|----------|--------------|
| 100-41-4 | Ethylbenzene |
|----------|--------------|

· **Chemicals known to cause developmental toxicity for females:**

None of the ingredients are listed.

· **Chemicals known to cause developmental toxicity for males:**

None of the ingredients are listed.

· **Chemicals known to cause developmental toxicity:**

None of the ingredients are listed.

· **EPA (Environmental Protection Agency):**

| | | |
|----------|---------------------|---|
| 127-18-4 | tetrachloroethylene | L |
|----------|---------------------|---|

| | | |
|-----------|--------|---|
| 1330-20-7 | Xylene | I |
|-----------|--------|---|

| | | |
|----------|--------------|---|
| 100-41-4 | Ethylbenzene | D |
|----------|--------------|---|

· **IARC (International Agency for Research on Cancer):**

(Cont'd. on page 13)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 12)

| | | |
|----------|---------------------|----|
| 127-18-4 | tetrachloroethylene | 2A |
| 100-41-4 | Ethylbenzene | 2B |

Canadian Domestic Substances List (DSL):

All ingredients are listed or exempt.

16 Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

Abbreviations and acronyms:

ADR: European Agreement concerning the International Carriage of Dangerous Goods by Road
 IMDG: International Maritime Code for Dangerous Goods
 DOT: US Department of Transportation
 IATA: International Air Transport Association
 CAS: Chemical Abstracts Service (division of the American Chemical Society)
 LC50: Lethal concentration, 50 percent
 LD50: Lethal dose, 50 percent
 OSHA: Occupational Safety & Health Administration
 Flam. Liq. 2: Flammable liquids – Category 2
 Flam. Liq. 3: Flammable liquids – Category 3
 Acute Tox. 4: Acute toxicity – Category 4
 Skin Irrit. 2: Skin corrosion/irritation – Category 2
 Eye Irrit. 2A: Serious eye damage/eye irritation – Category 2A
 Carc. 1B: Carcinogenicity – Category 1B
 Carc. 2: Carcinogenicity – Category 2
 STOT SE 3: Specific target organ toxicity (single exposure) – Category 3
 STOT RE 2: Specific target organ toxicity (repeated exposure) – Category 2
 Asp. Tox. 1: Aspiration hazard – Category 1

Sources

Website, European Chemicals Agency (echa.europa.eu)
 Website, US EPA Substance Registry Services (ofmpub.epa.gov/sor internet/registry/substreg/home/overview/home.do)
 Website, Chemical Abstracts Registry, American Chemical Society (www.cas.org)
 Patty's Industrial Hygiene, 6th ed., Rose, Vernon, ed. ISBN: 978-0-470-07488-6
 Casarett and Doull's Toxicology: The Basic Science of Poisons, 8th Ed., Klaasen, Curtis D., ed., ISBN: 978-0-07-176923-5.
 Safety Data Sheets, Individual Manufacturers

SDS Prepared by:

ChemTel Inc.

1305 North Florida Avenue

Tampa, Florida USA 33602-2902

Toll Free North America 1-888-255-3924 Intl. +01 813-248-0573

Website: www.chemtelinc.com



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

1. Identification of the Mixture and of the Company

Product identifier: **Buttercutt Cutting/Tapping Compound - Bulk**

Product name:

5040 Buttercutt Cutting/Tapping Compound

5041 Buttercutt Cutting/Tapping Compound

Relevant identified uses of the substance: Use for boring, drilling, planning, milling, sawing, tapping, and any other close tolerance operations

Uses advised against: Poorly ventilated areas

| | |
|-----------------------------|---|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe industries Incorporated |
| For Product Information: | 1-800-227-0196 |
| Emergency telephone number: | 1-800-424-9300 (CHEMTREC – 24 hrs) |

2. Hazards identification

Classifications

This chemical does not meet the hazardous criteria set forth by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200). However, this Safety Data Sheet (SDS) contains valuable information critical to the safe handling and proper use of this product. This SDS should be retained and available for employees and other users of this product.

Physical Hazards: N/AV

Health Hazards: N/AV

Environmental Hazards: N/AV

Labeling

Signal Word: N/AV

Hazard Statements: N/AV

Precautionary Statements: P101 - If medical advice is needed, have product container or label at hand
P102 - Keep out of reach of children
P103 - Read label before use



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking

P211 - Do not spray on an open flame or other ignition source

P261 - Avoid breathing dust/fume/gas/mist/vapours/spray

P262 - Do not get in eyes, on skin, or on clothing

P264 - Wash ... thoroughly after handling

P280 - Wear protective gloves/eye protection/face protection

P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.

P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F

P501 - Dispose of contents/container in accordance with local/regional/national/international regulation

Symbols/Pictograms: N/AV

3. Composition / Information on Ingredients

Composition

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|------------------------|----------|------------|---------------|----------------|-----------------|--------|
| Non regulated material | N/AV | N/AV | N/AV | N/AV | N/AV | N/AV |

Other Product Information

Chemical Identity: Mixture

4.) First Aid Measures

General Advice:

If symptoms persist, always call a doctor.

Inhalation First Aid:

Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately.

Skin Contact First Aid:

Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

Eye Contact First Aid: If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately.

Ingestion First Aid: If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately.

Most Important Symptoms/Effects: Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects.

5. Fire Fighting Measures

Flammable Properties: Non-flammable
Auto Ignition Temperature: Not Available
Suitable extinguishing media: Carbon dioxide, dry chemical, water spray.
Unsuitable extinguishing media: None known
Special hazards arising from the substance or mixture: None known
Hazardous combustion products: Carbon dioxide, Carbon monoxide
Fire & Explosion Hazards: Closed Containers may rupture due to the buildup of pressure from extreme temperatures.

Precautions for fire-fighters: Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.
- 2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling: Non-flammable liquid, use in a well ventilated area.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

Do not use near sources of ignition.
Do not to eat, drink and smoke while working with this material.
Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
Storage Temperature: 32° to 120°F (0° to 49°C).
No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
Keep away from sources of ignition.
Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|------------------------|------------|-----------------|------------------|----------------|-----------------|
| Non regulated material | N/AV | N/AV | N/AV | N/AV | N/AV |

*Values are based on the 2014 Guide to Occupational Exposure Values by ACGIH

9. Information on Basic Physical and Chemical Properties

| | |
|--|-----------------------------------|
| Appearance: Amber oily liquid | Odor: Fatty odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: 600° F (316° C) | Evaporation Rate: Not Available0 |
| Flammability Solid/Gas: Non-flammable liquid | Upper LEL: N/AV Lower LEL: N/AV |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

| | |
|--|---------------------------------|
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions

Chemical stability: Stable under normal conditions

Conditions to avoid: Heat and ignition sources

Incompatible materials: Strong Oxidizing Agents

Hazardous decomposition products: Will not occur

11. Toxicological Information

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: N/AV

Eye irritation data: N/AV

Skin irritation/sensitization/absorption data: N/AV

Reproductive toxicity data: N/AV

Mutagenicity data: N/AV

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure:

Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV

IARC: N/AV

OSHA: N/AV



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

* Petroleum distillates may contain chemical carcinogens in limited quantities (< 0.01%). These quantities are determined by the supplier/fraction/purity of the distillate during the manufacturing process. Chemicals that may be present within distillates are listed on California's prop 65 list such as ETHYLBENZENE, BENZENE, and TOLUENE.

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.

Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------|
| Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Reference 49 CFR 172.101 |

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|------------------------|------------------------|------------------------|------------------------|------------------------|----------------------------|
| Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|------------------------|------------------------|------------------------|------------------------|------------------------|---|
| Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Reference IATA Dangerous Goods Regulation |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.


16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 10/1/18

Supersedes: (9/8/2014)

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.

| | | |
|---|--|---------------------------|
|  | | Page: 1 |
| SAFETY DATA SHEET | | Revision Date: 10/23/2018 |
| | | Print Date: 2/15/2019 |
| | | SDS Number: R0169702 |
| Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL 3047 | | Version: 1.1 |

GHS classification in accordance with the Hazardous Products Regulations

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : Valvoline™ SAE 30
NON-DETERGENT MOTOR OIL


| | |
|---|---|
| <p>Details of the supplier of the safety data sheet Valvoline Canada Corp 905 Winston Churchill Blvd Mississauga ON L5J 4P2 Canada 1-800-TEAMVAL (1-800-832-6825)</p> <p>SDS@valvoline.com</p> | <p>Emergency telephone number 1-800-VALVOLINE (1-800-825-8654)</p> <p>Regulatory Information Number 1-800-TEAMVAL (1-800-832-6825)</p> <p>Product Information 1-800-TEAMVAL (1-800-832-6825)</p> |
|---|---|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Physical hazards not otherwise classified : Category 1

GHS label elements

Hazard pictograms : 

Signal word : Danger

Hazard statements : May become electrostatically charged. Sparks may ignite liquid and vapor.

Precautionary statements : **Prevention:**
P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Other hazards

None known.

**SAFETY DATA SHEET**

Revision Date: 10/23/2018

Print Date: 2/15/2019

SDS Number: R0169702

Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL

Version: 1.1

3047

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components


| Chemical name | CAS-No. | Classification | Concentration (%) |
|--|------------|--|-------------------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | Not a hazardous substance or mixture. | >=70.00 - < 90.00 |

SECTION 4. FIRST AID MEASURES

- General advice : No hazards which require special first aid measures.
- If inhaled : If breathed in, move person into fresh air.
If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : First aid is not normally required. However, it is recommended that exposed areas be cleaned by washing with soap and water.
- In case of eye contact : Remove contact lenses.
Protect unharmed eye.
- If swallowed : Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
- Most important symptoms and effects, both acute and delayed : No symptoms known or expected.
- Notes to physician : No hazards which require special first aid measures.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Water spray
Foam
Carbon dioxide (CO₂)
Dry chemical

| | | |
|---|--|---------------------------|
|  | | Page: 3 |
| SAFETY DATA SHEET | | Revision Date: 10/23/2018 |
| | | Print Date: 2/15/2019 |
| | | SDS Number: R0169702 |
| Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL 3047 | | Version: 1.1 |

- Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.
- Hazardous combustion products : carbon dioxide and carbon monoxide
Hydrocarbons
- Specific extinguishing methods :
- Product is compatible with standard fire-fighting agents.
- Further information : Standard procedure for chemical fires.
- Special protective equipment for firefighters : In the event of fire, wear self-contained breathing apparatus.

SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, protective equipment and emergency procedures : Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed.
- Environmental precautions : Prevent further leakage or spillage if safe to do so.
- Methods and materials for containment and cleaning up : Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust).
Keep in suitable, closed containers for disposal.
- Other information : Comply with all applicable federal, state, and local regulations.

SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Smoking, eating and drinking should be prohibited in the application area.
For personal protection see section 8.
- Materials to avoid : No materials to be especially mentioned.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible | Basis |
|------------|---------|----------------------------------|----------------------------------|-------|
| | | | | |



| | |
|---|---------------------------|
| SAFETY DATA SHEET | Revision Date: 10/23/2018 |
| | Print Date: 2/15/2019 |
| | SDS Number: R0169702 |
| Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL 3047 | Version: 1.1 |

| | | | concentration | |
|--|------------|-------|------------------|-----------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | TWA | 5 mg/m3 Mist | CA AB OEL |
| | | STEL | 10 mg/m3 Mist | CA AB OEL |
| | | TWAEV | 5 mg/m3 Mist | CA QC OEL |
| | | STEV | 10 mg/m3 Mist | CA QC OEL |
| | | TWA | 1 mg/m3 Mist | CA BC OEL |

Engineering measures : General room ventilation should be adequate for normal conditions of use. However, if unusual operating conditions exist, provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Personal protective equipment

Respiratory protection : No personal respiratory protective equipment normally required.

Eye protection : Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.

Skin and body protection : Wear as appropriate:
Safety shoes
Wear resistant gloves (consult your safety equipment supplier).

Hygiene measures : General industrial hygiene practice.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Appearance : liquid
- Colour : amber
- Odour : No data available
- Odour Threshold : No data available
- pH : No data available
- Melting point/freezing point : No data available

**SAFETY DATA SHEET**

Revision Date: 10/23/2018

Print Date: 2/15/2019

SDS Number: R0169702


Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL

Version: 1.1

3047

| | | |
|--|---|--|
| Boiling point/boiling range | : | No data available |
| Flash point | : | > 199 °C |
| | | Method: Cleveland open cup |
| Evaporation rate | : | No data available |
| Flammability (solid, gas) | : | No data available |
| Self-ignition | : | No data available |
| Upper explosion limit / Upper flammability limit | : | No data available |
| Lower explosion limit / Lower flammability limit | : | No data available |
| Vapour pressure | : | 1.3333333 hPa (20 °C) Calculated Vapor Pressure |
| Relative vapour density | : | No data available |
| Relative density | : | 0.888 (15.6 °C) |
| Density | : | 0.8890 g/cm ³ (15.56 °C) |
| Solubility(ies) | | |
| Water solubility | : | negligible |
| Solubility in other solvents | : | No data available |
| Partition coefficient: n-octanol/water | : | No data available |
| Decomposition temperature | : | No data available |
| Viscosity | | |
| Viscosity, dynamic | : | No data available |
| Viscosity, kinematic | : | No data available |
| Oxidizing properties | : | No data available |

SECTION 10. STABILITY AND REACTIVITY

| | |
|---|---------------------------|
|  | Page: 6 |
| | |
| SAFETY DATA SHEET | Revision Date: 10/23/2018 |
| | Print Date: 2/15/2019 |
| | SDS Number: R0169702 |
| Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL 3047 | Version: 1.1 |

Reactivity : No decomposition if stored and applied as directed.

Chemical stability : Stable under recommended storage conditions.

Possibility of hazardous reactions : Product will not undergo hazardous polymerization.

Conditions to avoid : None known.

Incompatible materials : Strong acids
Strong oxidizing agents

Hazardous decomposition products : No hazardous decomposition products are known.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Not classified based on available information.

Product:

Acute dermal toxicity : Acute toxicity estimate: > 5,000 mg/kg
Method: Calculation method

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Acute oral toxicity : LD50 (Rat): > 15 g/kg

Acute dermal toxicity : LD50 (Rabbit): > 5 g/kg

Skin corrosion/irritation

Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Assessment : Slight, transient irritation


Result : Slight, transient irritation

Serious eye damage/eye irritation

Not classified based on available information.

Product:

Remarks : Unlikely to cause eye irritation or injury.

| | | |
|---|--|---------------------------|
|  | | Page: 7 |
| SAFETY DATA SHEET | | Revision Date: 10/23/2018 |
| | | Print Date: 2/15/2019 |
| | | SDS Number: R0169702 |
| Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL 3047 | | Version: 1.1 |

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Result : No eye irritation
 Assessment : No eye irritation

Respiratory or skin sensitisation

Skin sensitisation

Not classified based on available information.

Respiratory sensitisation

Not classified based on available information.

Germ cell mutagenicity

Not classified based on available information.

Carcinogenicity

Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Carcinogenicity - : Classified based on DMSO extract content < 3% (Regulation
 Assessment (EC) 1272/2008, Annex VI, Part 3, Note L)

Reproductive toxicity

Not classified based on available information.

STOT - single exposure

Not classified based on available information.

STOT - repeated exposure

Not classified based on available information.

Aspiration toxicity

Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

No aspiration toxicity classification

Further information

Product:

Remarks : No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:


Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Not classified based on available information.

Long-term (chronic) aquatic hazard : Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

| | | |
|---|--|---------------------------|
|  | | Page: 8 |
| SAFETY DATA SHEET | | Revision Date: 10/23/2018 |
| | | Print Date: 2/15/2019 |
| | | SDS Number: R0169702 |
| Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL 3047 | | Version: 1.1 |

- Toxicity to fish : LL50 (Fish): > 100 mg/l
Exposure time: 96 h
- Toxicity to daphnia and other aquatic invertebrates : EL50 (Aquatic invertebrates): > 10,000 mg/l
Exposure time: 48 h
- Toxicity to algae : EL50 (Algae, algal mat (Algae)): > 100 mg/l
Exposure time: 72 h
- Toxicity to fish (Chronic toxicity) : NOEC (Fish): 10 mg/l
- Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Aquatic invertebrates): 10 mg/l
- Ecotoxicology Assessment Short-term (acute) aquatic hazard : Not classified based on available information.
- Long-term (chronic) aquatic hazard : Not classified based on available information.

Persistence and degradability

Components:

No data available

Bioaccumulative potential

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Partition coefficient: n-octanol/water : log Pow: Expected > 7

No data available

Mobility in soil

Components:

No data available

Other adverse effects

No data available

Product:

Additional ecological information : No data available

Components:

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

General advice : Dispose of in accordance with all applicable local, state and federal regulations.



SAFETY DATA SHEET

Revision Date: 10/23/2018

Print Date: 2/15/2019

SDS Number: R0169702

Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL
3047

Version: 1.1

Contaminated packaging : Empty remaining contents.

SECTION 14. TRANSPORT INFORMATION

International transport regulations

REGULATION

| ID NUMBER | PROPER SHIPPING NAME | *HAZARD CLASS | SUBSIDIARY HAZARDS | PACKING GROUP | MARINE POLLUTANT / LTD. QTY. |
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|

U.S. DOT - ROAD

| |
|---------------------|
| Not dangerous goods |
|---------------------|

CFR_RAIL_C

| |
|---------------------|
| Not dangerous goods |
|---------------------|

U.S. DOT - INLAND WATERWAYS

| |
|---------------------|
| Not dangerous goods |
|---------------------|

TDG_ROAD_C

| |
|---------------------|
| Not dangerous goods |
|---------------------|

TDG_RAIL_C

| |
|---------------------|
| Not dangerous goods |
|---------------------|

TDG_INWT_C

| |
|---------------------|
| Not dangerous goods |
|---------------------|

INTERNATIONAL MARITIME DANGEROUS GOODS


| |
|---------------------|
| Not dangerous goods |
|---------------------|

INTERNATIONAL AIR TRANSPORT ASSOCIATION - CARGO

| |
|---------------------|
| Not dangerous goods |
|---------------------|

INTERNATIONAL AIR TRANSPORT ASSOCIATION - PASSENGER

| |
|---------------------|
| Not dangerous goods |
|---------------------|

| | | |
|---|--|---------------------------|
|  | | Page: 10 |
| | | |
| SAFETY DATA SHEET | | Revision Date: 10/23/2018 |
| | | Print Date: 2/15/2019 |
| | | SDS Number: R0169702 |
| Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL 3047 | | Version: 1.1 |

MX_DG

| |
|---------------------|
| Not dangerous goods |
|---------------------|

***ORM = ORM-D, CBL = COMBUSTIBLE LIQUID**

| | | |
|------------------|--|----|
| Marine pollutant | | no |
|------------------|--|----|

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

The components of this product are reported in the following inventories:

- DSL : All components of this product are on the Canadian DSL
- AICS : On the inventory, or in compliance with the inventory
- ENCS : On the inventory, or in compliance with the inventory
- KECI : On the inventory, or in compliance with the inventory
- PICCS : On the inventory, or in compliance with the inventory
- IECSC : On the inventory, or in compliance with the inventory
- TCSI : On the inventory, or in compliance with the inventory
- TSCA : On TSCA Inventory

SECTION 16. OTHER INFORMATION

Further information
Revision Date: 10/23/2018

| | |
|--------------|------------------|
| NFPA: | HMIS III: |
|--------------|------------------|

**SAFETY DATA SHEET**

Revision Date: 10/23/2018

Print Date: 2/15/2019

SDS Number: R0169702

Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL

Version: 1.1

3047

| | | | | | | | |
|---|--|---------------|----------|---------------------|----------|------------------------|----------|
| <p>Flammability</p> <p>Health</p> <p>Instability</p> <p>Special hazard.</p> | <table border="1"> <tr> <td style="background-color: blue; color: white;">HEALTH</td> <td style="text-align: center;">0</td> </tr> <tr> <td style="background-color: red; color: white;">FLAMMABILITY</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="background-color: yellow; color: black;">PHYSICAL HAZARD</td> <td style="text-align: center;">0</td> </tr> </table> <p>0 = not significant, 1 =Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 0 | FLAMMABILITY | 1 | PHYSICAL HAZARD | 0 |
| HEALTH | 0 | | | | | | |
| FLAMMABILITY | 1 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Combustible Liquid Class III B

Full text of H-Statements

Sources of key data used to compile the Safety Data Sheet

Valvoline internal data including own and sponsored test reports

The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Valvoline's Environmental Health and Safety Department (1-800-VALVOLINE).

List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists

BEI : Biological Exposure Index

CAS : Chemical Abstracts Service (Division of the American Chemical Society).

CMR : Carcinogenic, Mutagenic or Toxic for Reproduction

FG : Food grade

GHS : Globally Harmonized System of Classification and Labeling of Chemicals.


H-statement : Hazard Statement

IATA : International Air Transport Association.

IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization

ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"

| | |
|---|---------------------------|
|  | Page: 12 |
| SAFETY DATA SHEET | Revision Date: 10/23/2018 |
| | Print Date: 2/15/2019 |
| | SDS Number: R0169702 |
| Valvoline™ SAE 30 NON-DETERGENT MOTOR OIL 3047 | Version: 1.1 |

IMDG : International Maritime Code for Dangerous Goods
ISO : International Organization for Standardization
logPow : octanol-water partition coefficient
LCxx : Lethal Concentration, for xx percent of test population
LDxx : Lethal Dose, for xx percent of test population.
ICxx : Inhibitory Concentration for xx of a substance
Ecxx : Effective Concentration of xx
N.O.S.: Not Otherwise Specified
OECD : Organization for Economic Co-operation and Development
OEL : Occupational Exposure Limit
P-Statement : Precautionary Statement
PBT : Persistent , Bioaccumulative and Toxic
PPE : Personal Protective Equipment
STEL : Short-term exposure limit
STOT : Specific Target Organ Toxicity
TLV : Threshold Limit Value
TWA : Time-weighted average
vPvB : Very Persistent and Very Bioaccumulative
WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act
DOT : Department of Transportation
FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act
HMIRC : Hazardous Materials Information Review Commission
HMIS : Hazardous Materials Identification System
NFPA : National Fire Protection Association
NIOSH : National Institute for Occupational Safety and Health
OSHA : Occupational Safety and Health Administration
PMRA : Health Canada Pest Management Regulatory Agency
RTK : Right to Know
WHMIS : Workplace Hazardous Materials Information System

SAFETY DATA SHEET

Blue Gold Industrial Cleaner

Revision Date 03/05/2020

SECTION – 1 CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME Blue Gold Industrial Cleaner **ITEM** 109
(360-MC)
PRODUCT USE Hard Surface Cleaner / Degreaser
COMPANY NAME Modern Chemical, Inc. **Office** (501) 988-1311
P.O. Box 368 **Fax** (501) 988-2229
Jacksonville AR 72078 **Web** www.bluegoldcleaner.com
EMERGENCY TELEPHONE NUMBER **INFOTRAC (800) 535-5053**

SECTION – 2 HAZARDS INFORMATION

Physical Hazards None
Health Hazards EYES-Category 1; SKIN-Category 2; STOT SINGLE EXPOSURE-Category 3
Classification (EC 1272/2008) Label In Accordance with (EC) No. 1272/2008



Irritant (skin)
Respiratory Tract Irritant



Eye Damage

----- See "Section -16" for "Hazard and Precautionary Statements with Codes" -----
Danger Causes serious eye damage, Causes skin irritation, May cause respiratory irritation, Keep out of reach of children, May be harmful if swallowed, Do not get in eyes, on skin, or clothing, and inhalation of mist, Use personal protective equipment as required, Wash thoroughly after handling, Avoid release into the environment

SECTION – 3 COMPOSITION INFORMATION (Exact percentage of the listed chemicals of composition has been withheld as a trade secret)

| CHEMICAL NAME | COMMON NAME AND SYNONYMS | CAS # | IMPURITIES | PERCENT |
|----------------------------------|-----------------------------------|------------|------------|---------|
| 2-(2-Butoxyethoxy)ethanol | Diethylene Glycol Monobutyl Ether | 112-34-5 | | 7 - 10% |
| Sodium Metasilicate Pentahydrate | Disodium Trioxosilicate | 10213-79-3 | | 4 - 9% |
| Nonylphenol Ethoxylate | Nonylphenyl-polyethylene glycol | 9016-45-9 | | 1 – 5% |

SECTION – 4 FIRST AID MEASURES

EYE CONTACT Immediately flush eyes with cold water for at least 15 minutes while lifting upper and lower eyelids, Remove contact lenses if present and easy to do without injury to the eye and continue rinsing, If irritation persists obtain immediate medical attention, preferably from an ophthalmologist

SKIN CONTACT Wash contaminated skin with plenty of soap and water, Remove any contaminated clothing and wash before reuse, If irritation is present or occurs obtain medical attention

INHALATION Move person to fresh air, if they have problem breathing, show signs of overexposure or feel unwell obtain medical attention

INGESTION DO NOT INDUCE VOMITING. If person is fully conscious, rinse mouth out and give one to two glasses of water to dilute and obtain immediate medical attention. If vomiting occurs, keep head below hips to prevent aspiration into the lungs

Aspiration Hazard Not considered to be an aspiration hazard

ACUTE SYMPTOMS OF SINGLE OVEREXPOSURE

Eyes Causes serious eye irritation, redness, tearing, pain, or possible corneal injury
Skin Can cause skin irritation, redness, drying or cracking
Inhalation Spray mist may cause mild irritation, to respiratory tract
Ingestion May be harmful if swallowed, Can cause irritation, of the mouth, throat, and esophagus

CHRONIC SYMPTOMS OF PROLONGED OR REPEATED OVEREXPOSURE

Eyes Causes serious eye irritation, redness, tearing, pain, burns, or possible eye damage
Skin Causes skin irritation, redness, burning, drying or cracking
Inhalation Spray mist may cause irritation, to nose, throat, mucus membranes or respiratory tract
Ingestion May be harmful if swallowed, Causes irritation, burning in the mouth, throat, and esophagus, Slight acute toxicity if swallowed

SECTION – 5 FIRE FIGHTING MEASURES

Extinguishing Media Not flammable: Use extinguishing media for surrounding fire
Hazardous Decomposition Burning or thermal decomposition can produce, carbon monoxide, carbon dioxide, and other toxic fumes
Reactive With Incompatible with, strong oxidizing agents, strong acids
Explosion Hazards Not applicable
Static Discharge Not applicable
Mechanical Impact Not applicable
Protective Equipment Use MSHA/NIOSH approved self-contained breathing apparatus and full protective gear

SECTION – 6 ACCIDENTAL RELEASE MEASURES

| | |
|-----------------------------|---|
| Emergency Procedures | Warn personnel of spill |
| Personal Precautions | Ventilate area, Avoid slipping on spilled product |
| Protective Equipment | Safety Glasses, Chemical Gloves and Rubber Boots |
| Containment | Use absorbent socks or pads to prevent spill from spreading |
| Clean Up Procedures | Small Spills: Use wet vacuum or mop and wringer to pick up spilled material then mop area with clean water Large Spills: Absorb spill with inert material (e.g., dry sand or earth), then place in a chemical waste container Vacuum or sweep up material and place in a disposal container |
| Disposal | Dispose of material in accordance with all State and Federal Guidelines and Regulations |

SECTION – 7 HANDLING AND STORAGE

| | |
|-------------------------------|---|
| Handling | Keep away from incompatible materials, Use appropriate safety equipment, Avoid eye and skin contact, Avoid inhalation of mist, May cause respiratory irritation, Harmful if swallowed, Wash thoroughly after handling, Avoid release to the environment |
| Storage | KEEP OUT OF REACH OF CHILDREN, Keep container closed when not in use, Store away from incompatible materials |
| Incompatible Materials | Incompatible with, strong oxidizing agents, strong acids |

SECTION – 8 EXPOSURE CONTROLS / PERSONAL PROTECTION**EXPOSURE LIMITS**

| CHEMICAL NAME | ACGIH (TWA 8) | ACGIH (STEL) | OSHA PEL (TWA 8) | OSHA (CEIL) | Significant Exposure |
|----------------------------------|------------------|--------------|------------------|-------------|----------------------|
| 2-(2-Butoxyethoxy)ethanol | 10 ppm | | | | |
| Nonylphenol Ethoxylate | None Established | | | | ED |
| Sodium Metasilicate Pentahydrate | None Established | | | | |

PERSONAL PROTECTIVE EQUIPMENTChemical Safety Glasses,
Goggles or Face ShieldImpervious
Chemical GlovesEye Wash and
Safety Shower
(Recommended)**Ventilation**

General Ventilation

Ventilate to keep vapors of this material below the lowest ppm listed above.
If over Threshold Limit Value use a MSHA / NIOSH approved respirator

HMIS HAZARD RATINGS

| | |
|---------------------|---|
| Health | 2 |
| Flammability | 0 |
| Reactivity | 0 |
| Personal Protection | B |

SECTION – 9 PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|----------------------------|---|-----------------------------------|--------|
| Flash Point | >212°F (100°C) TAG Closed Cup | Specific Gravity / Density | 1.08 |
| Flammable Limits | ND | pH (± 0.3) | 13.0 |
| Auto-Ignition Temp. | ND | Viscosity | ND |
| Physical State | Liquid | Freeze Point | ND |
| Appearance | Clear Blue | Boiling Point | ND |
| Odor | Peppermint | Vapor Density (air=1) | ND |
| Odor Threshold | ND | Vapor Pressure (mm Hg) | ND |
| Solubility | 100% | Evaporation Rate (nBuAc=1) | ND |
| Volatiles | ND | Partition Coefficient | ND |
| VOC | 0.5% at 5% dilution / 5 gm/L VOC in 5% dilution | Molecular Weight (g/mol) | ~82.44 |
| LVP-VOC | ND | Decomposition Temperature | ND |

SECTION – 10 STABILITY AND REACTIVITY

| | |
|--|---|
| Reactivity (Specific Test Data) | None available |
| Chemical Stability | Stable when stored below 49°C (120°F) |
| Hazardous Polymerization | Will not occur |
| Conditions To Avoid | Incompatible materials |
| Incompatible Materials | Incompatible with, strong oxidizing agents, strong acids |
| Thermal Decomposition | Burning or thermal decomposition can produce, carbon monoxide, carbon dioxide, sodium oxides, silicon oxides, and other toxic fumes |

SECTION – 11 TOXICOLOGICAL INFORMATION**ROUTES OF EXPOSURE**

Eyes (Yes), Skin (Yes), Inhalation (Yes "Mist"), Ingestion (Yes)

ACUTE SYMPTOMS OF SINGLE OVEREXPOSURE

Eyes Causes serious eye irritation, redness, tearing, pain, or possible corneal injury
Skin Can cause skin irritation, redness, drying or cracking
Inhalation Spray mist may cause mild irritation, to respiratory tract
Ingestion May be harmful if swallowed, Can cause irritation, of the mouth, throat, and esophagus

CHRONIC SYMPTOMS OF PROLONGED OR REPEATED OVEREXPOSURE

Eyes Causes serious eye irritation, redness, tearing, pain, burns, or possible eye damage
Skin Causes skin irritation, redness, burning, drying or cracking
Inhalation Spray mist may cause irritation, to nose, throat, mucus membranes or respiratory tract
Ingestion May be harmful if swallowed, Causes irritation, burning in the mouth, throat, and esophagus, Slight acute toxicity if swallowed

Acute Tox Calculated **Oral:** 9,977 mg/kg **Dermal:** 15,710 mg/kg **Inhaled:** 57.5 mg/L

Acute Tox Category Not applicable (Oral >2,000 mg/kg), Not applicable (Dermal >2,000 mg/kg), Not applicable (Inhaled > 20 mg/L) Vapors

Additional Info

Target Organs Kidneys, Liver

Medical Conditions Preexisting, liver, kidney, disorders may be aggravated by exposure to this product

Notes to Physician In case of ingestion, gastric lavage with activated charcoal can be used promptly to prevent absorption

CARCINOGENIC – This product contains concentrations above 0.1% of the following:

| <u>CHEMICAL NAME</u> | <u>NTP</u> | <u>ACGIH</u> | <u>IARC</u> | <u>GHS Category</u> |
|----------------------|------------|--------------|-------------|---------------------|
| None Listed | NA | NA | NA | NA |

MUTAGENIC AND REPRODUCTIVE EFFECTS – This product contains concentrations above 0.1% of the following:

| <u>CHEMICAL NAME</u> | <u>Germ Cell Mutagenicity</u> | <u>Toxic to Reproduction</u> |
|----------------------|-------------------------------|------------------------------|
| None Listed | NA | NA |

COMPONENTS ACUTE TOXICITY

| <u>CHEMICAL NAME</u> | <u>Type</u> | <u>Form</u> | <u>Subject</u> | <u>Result Value</u> | <u>Exposure Time</u> | <u>GHS Category</u> |
|----------------------------------|-------------|-------------|----------------|---------------------|----------------------|-----------------------|
| Nonylphenol Ethoxylate | LD50 | Oral | Rat | 960 mg/kg | | 4 (>300, ≤2000 mg/kg) |
| | LD50 | Inhaled | Rat | 1.15 mg/L | 4 Hours (Mist) | 4 (>1.0, ≤5 mg/L) |
| | LD50 | Dermal | Rabbit | 2,991 mg/kg | | (>2000 mg/kg) |
| Sodium Metasilicate Pentahydrate | LD50 | Oral | Rat | 847 mg/kg | | 4 (>300, ≤2000 mg/kg) |
| | LD50 | Rat | Dermal | > 5000 mg/kg | | (>2000 mg/kg) |
| Glycol Ether DB | LD50 | Oral | Rat | 7,291 mg/kg | | (>2000 mg/kg) |
| | LD50 | Dermal | Rabbit | 2,764 mg/kg | | (>2000 mg/kg) |

SECTION – 12 ECOLOGICAL INFORMATION

| <u>CHEMICAL NAME</u> | <u>Type</u> | <u>Subject</u> | <u>Subject Latin</u> | <u>Result Value</u> | <u>Exposure Time</u> | <u>GHS Category</u> |
|----------------------------------|-------------|----------------|-----------------------|---------------------|----------------------|---------------------|
| Nonylphenol Ethoxylate | LC50 | Bluegill | (Lepomis macrochirus) | 1.0 mg/L | 96 Hours | 2 (>1, ≤10 mg/L) |
| | EC50 | Water Flea | (Daphnia magna) | 12.2 mg/L | 48 Hours | 3 (>10, ≤100 mg/L) |
| Sodium Metasilicate Pentahydrate | LC50 | Zebrafish | (Brachydanio rerio) | 210 mg/L | 96 Hours | 4 (>100 mg/L) |
| | EC50 | Water Flea | (Daphnia magna) | 1700 mg/L | 48 Hours | 4 (>100 mg/L) |
| 2-(2-Butoxyethoxy)ethanol | LC50 | Fish | (Leuciscus Idus) | 1,300 mg/L | 96 Hours | 4 (>100 mg/L) |
| | EC50 | Water Flea | (Daphnia magna) | >100 mg/L | 48 Hours | 4 (>100 mg/L) |

Presistence And Degradability This product is inherently biodegradable according to the OECD definition

Bioaccumulative Potential No data available

Mobility In Soil This product is water soluble and will move readily in soil and water

Other Adverse Effects Harmful to aquatic life

SECTION – 13 DISPOSAL CONSIDERATIONS**DO NOT DUMP INTO ANY STORM SEWERS, ON THE GROUND, OR INTO ANY BODY OF WATER****Dispose of any waste in accordance with all State and Federal Guidelines and Regulations****ENVIRONMENTAL FATE**

Under RCRA rules, it is the responsibility of the user of the product to determine, at the time of disposal, whether the material is a hazardous waste.

Chemical additions, processing or otherwise altering this material may make the waste management information presented in this SDS incomplete, inaccurate, or otherwise inappropriate.

SECTION – 14 TRANSPORT INFORMATION**DOT CLASSIFICATION****UN Number****Proper Shipping Name** n.o.s. (Chemicals) or "Limits"

Not Regulated Non Hazardous – Compounds Cleaning Liquid

| Hazard Class | Packing Group | Label Codes | Reportable Quantity (lbs) | Response Code | Marine Pollutant |
|----------------------------|----------------------------|----------------------------|----------------------------------|----------------------------|----------------------------|
| None | None | None | None | 154 | No |
| Not Restricted as per IATA | Not Restricted as per IATA | Not Restricted as per IATA | Not Restricted as per IATA | Not Restricted as per IATA | Not Restricted as per IATA |

SECTION – 15 REGULATORY INFORMATION**TSCA**

| CHEMICAL NAME | Sec 8(b) Inventory | Sec 8(d) Health And Safety | Sec 4(a) Chemical Test Rules | Sec 12(b) Export Notification |
|----------------------------------|---------------------------|-----------------------------------|-------------------------------------|--------------------------------------|
| Glycol Ethers | Yes | | | |
| Sodium Metasilicate Pentahydrate | Yes | | | |

REPORTABLE QUANTITIES

| CHEMICAL NAME | Extremely Hazardous | Reportable Quantity | Emission Reporting | | | |
|----------------------|----------------------------|----------------------------|---------------------------|--------------------|------------------|------------------------|
| CHEMICAL NAME | EPCRA TPQ Sec 302 | EPCRA RQ Sec 304 | CERCLA RQ Sec 103 | TRI Sec 313 | RCRA Code | RMP TQ Sec 112r |
| Glycol Ethers | | | Yes | | | |

SARA

| CHEMICAL NAME | Section 311 | | Section 311 / 312 Hazards | | | |
|----------------------------------|---------------------------|--------------|----------------------------------|------------------|-----------------|-----------------|
| | Hazardous Chemical | Acute | Chronic | Flammable | Pressure | Reactive |
| 2-(2-Butoxyethoxy)ethanol | Yes | Yes | Yes | | | |
| Nonylphenol Ethoxylate | Yes | Yes | | | | |
| Sodium Metasilicate Pentahydrate | Yes | Yes | | | | |

RIGHT TO KNOW

| CHEMICAL NAME | STATE | | | | | | | | | | | | | |
|----------------------------------|--------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| | CA | CT | FL | IL | LA | NJ | NY | PA | MI | MN | MA | RI | WI | |
| 2-(2-Butoxyethoxy)ethanol | | | | | | | Yes | Yes | | | | | | |
| Nonylphenol Ethoxylate | | | | | | Yes | | Yes | | | | | | |
| Sodium Metasilicate Pentahydrate | | | | | | Yes | | Yes | | | | | | |

CALIFORNIA

| WARNING! This product contains chemicals known to the state of California to cause: | | | | | | |
|--|--------------|----------------------|--------------------------|-------------------|----------------------|--|
| CHEMICAL NAME | CAS # | Birth Defects | Reproductive Harm | Carcinogen | Developmental | |
| None Listed | | | | | | |

CLEAN AIR WATER ACTS

| CHEMICAL NAME | CAS # | Clean Air Acts | | | Clean Water Acts | | |
|----------------------|--------------|-----------------------|----------------------|----------------------|-------------------------|-----------|-----------|
| | | HAP | Ozone Class 1 | Ozone Class 2 | HS | PP | TP |
| None Listed | | | | | | | |

INTERNATIONAL REGULATIONS – The components of this product are listed on the chemical inventories of the following countries:

| CHEMICAL NAME | Australia | Canada | Europe (EINECS) | Japan | Korea | UK |
|----------------------|------------------|---------------|------------------------|--------------|--------------|-----------|
| Glycol Ethers | Yes | Yes | Yes | Yes | Yes | Yes |

WHMIS Classification

| CHEMICAL NAME | DSL | Class | Description |
|----------------------------------|------------|--------------|---|
| 2-(2-Butoxyethoxy)ethanol | Yes | D-2B | Materials Causing Other Toxic Effects; Toxic Material |
| Sodium Metasilicate Pentahydrate | Yes | E | Corrosive Material |

SECTION – 16 OTHER INFORMATION

| <u>Code</u> | <u>Hazard and Precautionary Statements</u> |
|----------------|--|
| H303 | May be harmful if swallowed |
| H315 | Causes skin irritation |
| H318 | Causes serious eye damage |
| H335 | May cause respiratory irritation |
| P261 | Avoid breathing dust/fume/gas/mist/vapours/spray. |
| P262 | Do not get in eyes, on skin, or on clothing. |
| P264 | Wash ... thoroughly after handling. |
| P273 | Avoid release to the environment. |
| P281 | Use personal protective equipment as required. |
| P301+P330+P331 | IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. |
| P302+P352 | IF ON SKIN: Wash with plenty of soap and water. |
| P304+P341 | IF INHALED: If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P314 | Get medical advice/attention if you feel unwell. |
| P362 | Take off contaminated clothing and wash before reuse. |
| P376 | Stop leak if safe to do so. |
| P370+P378 | In case of fire: Use dry chemicals, CO2, alcohol foam for extinction. Water spray to cool or protect exposed materials |
| P402+P404 | Store in a dry place. Store in a closed container. |
| P501 | Dispose of contents/ container to an approved waste disposal plant. |

SDS LEGEND DESCRIPTION

| | | | |
|---------------|---|--------------|--|
| ACGIH | American Conference of Governmental Industrial Hygienists | LC50 | A concentration that is lethal to 50% of a given species in a given time |
| CAS | Chemical Abstracts Service Registry | LD50 | Dose that is lethal to 50% of a given species by a given route of exposure |
| CEIL | Ceiling Limit (15 minutes) | LEL | Lower Explosive Limit |
| CERCL | Comprehensive Environmental Response, Compensation, and Liability Act | LD | Liver Damage |
| CI | Cochlear Impairment | NA | Not Applicable |
| CNS | Central Nervous System | ND | Not Determined |
| EC50 | Concentration of a chemical that gives half-maximal response | NFPA | National Fire Protection Association |
| EPA | Environmental Protection Agency | NIOSH | National Institute for Occupational Safety and Health |
| Eye | (EI = Irritation) (ED = Damage) (EV = Visual Impairment) | NE | Not Established |
| FBG | Full Bunker Gear | NTP | National Toxicology Program |
| GHS | Globally Harmonized System | OSHA | Occupational Safety and Health Administration |
| HAP | California Hazardous air pollutant Clean Air Act | PEL | Permissible Exposure Limit (OSHA) |
| HMIS-A | Safety Glasses | PNS | Peripheral Nervous System |
| HMIS-B | Safety glasses, gloves | PP | California Priority Pollutant under the Clean Water Act |
| HMIS-C | Safety glasses, gloves, chemical apron | REL | Recommended exposure limit (NIOSH) |
| HMIS-D | Face shield, gloves, chemical apron | RT | Upper Respiratory Tract |
| HMIS-E | Safety glasses, gloves, dust respirator | Skin | (SI = Irritation) (SD = Damage) (SA = Absorption) (SS = Sensitizer) |
| HMIS-F | Safety glasses, gloves, chemical apron, dust respirator | SARA | Superfund Amendments and Reauthorization Act |
| HMIS-G | Safety glasses, gloves, vapor respirator | STEL | Short Term Exposure Limit (15 minutes) |
| HMIS-H | Splash goggles, gloves, chemical apron, vapor respirator | TC Lo | Lowest concentration that is toxic to a given species in a given time |
| HMIS-I | Safety glasses, gloves, dust and vapor respirator | TD Lo | Lowest dose that is toxic to a given species |
| HMIS-J | Splash goggles, gloves, chemical apron, dust and vapor respirator | TLV | Threshold Limit Value (ACGIH) |
| HMIS-K | Air line hood or mask, gloves, full chemical suit, boots | TP | California Toxic Pollutant under the Clean Water Act |
| HMIS-X | Ask Supervisor | TSCA | Toxic Substances Control Act |
| HS | California Hazardous Substance under the Clean Water Act | TWA | Time Weighted Average (8 hours) |
| KD | Kidney Damage (nephropathy) | UEL | Upper Explosive Limit |

Modern Chemical, Inc.

and Abernathy Company have compiled the information herein from sources believed to be reliable and up-to-date, and is accurate to the best of our knowledge. However, we cannot give any guarantees regarding information from other sources or the completeness and expressly do not make warranties, nor assume any liability for its use. The information contained herein is provided for reference purposes only and is intended only for persons having relevant technical skills. Because conditions and manner of use are outside of our control, the user is responsible for determining the conditions of safe use of the product. Buyers and users assume all risk, responsibility and liability whatsoever for any and all injuries, losses, or damages to persons or property arising from the use of this product or information.

Supersedes Safety Data Sheet Dated 01/10/2020

SAFETY DATA SHEET



ISOPROPYL ALCOHOL

Section 1. Identification

- GHS product identifier** : ISOPROPYL ALCOHOL
Product code : 1610/CAN/EUR-GS, G1, G4, G, 5G, 54G
Other means of identification : Not available.
Product type : Liquid.

Relevant identified uses of the substance or mixture and uses advised against

Not applicable.

- Supplier's details** : Techspray
8125 Cobb Center Drive
Kennesaw, GA 30152
Tel:678-819-1408
Toll free: 800-858-4043
Fax: 806-372-8750
- Emergency telephone number (with hours of operation)** : Chemtrec - 1-800-424-9300
CANUTEC (Canadian Transportation): (613) 996-6666
Emergency phone: (800) 858-4043
24/7

Section 2. Hazards identification

- OSHA/HCS status** : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
- Classification of the substance or mixture** : FLAMMABLE LIQUIDS - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3

GHS label elements

Hazard pictograms



- Signal word** : Danger
- Hazard statements** : Highly flammable liquid and vapor.
Causes serious eye irritation.
May cause drowsiness or dizziness.

Precautionary statements

Prevention

- : Wear protective gloves. Wear eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Use explosion-proof electrical, ventilating, lighting and all material-handling equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Keep container tightly closed. Use only outdoors or in a well-ventilated area. Avoid breathing vapor. Wash hands thoroughly after handling.

Response

- : IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage

- : Store locked up. Store in a well-ventilated place. Keep cool.

Section 2. Hazards identification

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Hazards not otherwise classified : None known.

Section 3. Composition/information on ingredients

Substance/mixture : Substance

Other means of identification : Not available.

CAS number/other identifiers

CAS number : 67-63-0

| Ingredient name | % | CAS number |
|-------------------|------------|------------|
| Isopropyl alcohol | 99.6 - 100 | 67-63-0 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. If necessary, call a poison center or physician. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness.
- Skin contact** : May cause skin irritation.
- Ingestion** : Can cause central nervous system (CNS) depression. Irritating to mouth, throat and stomach.

Section 4. First aid measures

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
dryness
cracking
- Ingestion** : Adverse symptoms may include the following:
Irritating to mouth, throat and stomach.
nausea or vomiting
Ingestion Seek medical attention.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use dry chemical, CO₂, water spray (fog) or foam.
- Unsuitable extinguishing media** : Do not use water jet.

Specific hazards arising from the chemical : Highly flammable liquid and vapor. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. The vapor/gas is heavier than air and will spread along the ground. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Runoff to sewer may create fire or explosion hazard.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapor or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Take precautionary measures against electrostatic discharges. Empty containers retain product residue and can be hazardous. Do not reuse container.

- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

None.

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

| | |
|-----------------------|--|
| Physical state | : Liquid. |
| Color | : Clear. Colorless. |
| Odor | : Alcohol-like. |
| Odor threshold | : Not available. |
| pH | : 7 |
| Melting point | : Not available. |
| Boiling point | : 82°C (179.6°F) |
| Flash point | : Closed cup: 11.7°C (53.1°F) [Tagliabue.] |

Section 9. Physical and chemical properties

| | |
|---|---|
| Evaporation rate | : 1.7 (butyl acetate = 1) |
| Flammability (solid, gas) | : Highly flammable in the presence of the following materials or conditions: open flames, sparks and static discharge and heat. |
| Lower and upper explosive (flammable) limits | : Lower: 2% Upper: 12% |
| Vapor pressure | : |
| Vapor density | : 2.07 [Air = 1] |
| Relative density | : 0.785 |
| Solubility | : Not available. |
| Solubility in water | : Not available. |
| Partition coefficient: n-octanol/water | : Not available. |
| Auto-ignition temperature | : Not available. |
| Decomposition temperature | : Not available. |
| Viscosity | : Not available. |
| Flow time (ISO 2431) | : Not available. |

Section 10. Stability and reactivity

| | |
|---|--|
| Reactivity | : No specific test data related to reactivity available for this product or its ingredients. |
| Chemical stability | : The product is stable. |
| Possibility of hazardous reactions | : Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Do not allow vapor to accumulate in low or confined areas. |
| Incompatible materials | : Reactive or incompatible with the following materials: oxidizing materials |
| Hazardous decomposition products | : Under normal conditions of storage and use, hazardous decomposition products should not be produced. |

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-------------|---------|-------------|----------|
| Isopropyl alcohol | LD50 Dermal | Rabbit | 12800 mg/kg | - |
| | LD50 Oral | Rat | 5000 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-------------------------|-------------|
| Isopropyl alcohol | Eyes - Moderate irritant | Rabbit | - | 24 hours 100 milligrams | - |
| | Eyes - Moderate irritant | Rabbit | - | 10 milligrams | - |
| | Eyes - Severe irritant | Rabbit | - | 100 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 500 milligrams | - |

Sensitization

Section 11. Toxicological information

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Isopropyl alcohol | - | 3 | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|-------------------|------------|-------------------|------------------|
| Isopropyl alcohol | Category 3 | Not applicable. | Narcotic effects |

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness.
- Skin contact** : May cause skin irritation.
- Ingestion** : Can cause central nervous system (CNS) depression. Irritating to mouth, throat and stomach.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
dryness
cracking

Section 11. Toxicological information

Ingestion : Adverse symptoms may include the following:
Irritating to mouth, throat and stomach.
nausea or vomiting
Ingestion Seek medical attention.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|-------|------------|
| Oral | 5010 mg/kg |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|--|-------------------------------|----------|
| Isopropyl alcohol | Acute LC50 1400000 to 1950000 µg/l Marine water | Crustaceans - Crangon crangon | 48 hours |
| | Acute LC50 1400000 µg/l | Fish - Gambusia affinis | 96 hours |

Persistence and degradability

Not available.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-----|-----------|
| Isopropyl alcohol | 0.05 | - | low |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.







Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods

: The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | ADR/RID | IMDG | IATA |
|----------------------------|--|---|--|---|--|--|
| UN number | UN1219 | UN1219 | UN1219 | UN1219 | UN1219 | UN1219 |
| UN proper shipping name | ISOPROPANOL | ISOPROPANOL | ISOPROPANOL | ISOPROPANOL | ISOPROPANOL | ISOPROPANOL |
| Transport hazard class(es) | 3  | 3  | 3  | 3  | 3  | 3  |
| Packing group | II | II | II | II | II | II |
| Environmental hazards | No. | No. | No. | No. | No. | No. |
| Additional information | - | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.18-2.19 (Class 3). | - | <u>Hazard identification number</u> UN1219 | - | - |

Special precautions for user

: **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL and the IBC Code

: Not available.

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) CDR Exempt/Partial exemption: Not determined
United States inventory (TSCA 8b): All components are listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Fire hazard
 Immediate (acute) health hazard

Composition/information on ingredients

| Name | % | Fire hazard | Sudden release of pressure | Reactive | Immediate (acute) health hazard | Delayed (chronic) health hazard |
|-------------------|---|-------------|----------------------------|----------|---------------------------------|---------------------------------|
| Isopropyl alcohol | - | Yes. | No. | No. | Yes. | No. |

SARA 313

| | Product name | CAS number | % |
|--|-------------------|------------|---|
| Form R - Reporting requirements | Isopropyl alcohol | 67-63-0 | - |
| Supplier notification | Isopropyl alcohol | 67-63-0 | - |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : The following components are listed: ISOPROPYL ALCOHOL

New York : None of the components are listed.

New Jersey : The following components are listed: ISOPROPYL ALCOHOL; 2-PROPANOL

Pennsylvania : The following components are listed: 2-PROPANOL

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Section 15. Regulatory information

Not listed.

[UNECE Aarhus Protocol on POPs and Heavy Metals](#)

Not listed.

[International lists](#)

[National inventory](#)

| | |
|--------------------------|--|
| Australia | : All components are listed or exempted. |
| Canada | : All components are listed or exempted. |
| China | : All components are listed or exempted. |
| Europe | : All components are listed or exempted. |
| Japan | : Japan inventory (ENCS) : All components are listed or exempted. Japan inventory (ISHL) : All components are listed or exempted. |
| Malaysia | : All components are listed or exempted. |
| New Zealand | : All components are listed or exempted. |
| Philippines | : All components are listed or exempted. |
| Republic of Korea | : All components are listed or exempted. |
| Taiwan | : All components are listed or exempted. |
| Turkey | : All components are listed or exempted. |

Section 16. Other information

[Hazardous Material Information System \(U.S.A.\)](#)

| | | |
|------------------|---|---|
| Health | * | 1 |
| Flammability | | 3 |
| Physical hazards | | 1 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

[National Fire Protection Association \(U.S.A.\)](#)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

[Procedure used to derive the classification](#)

| Classification | Justification |
|-----------------|---------------|
| Not classified. | |

[History](#)

Date of printing : 1/25/2019

Date of issue/Date of revision : 1/25/2019 **Date of previous issue** : 1/25/2019 **Version** : 5 11/12

Section 16. Other information

Date of issue/Date of revision : 1/25/2019

Date of previous issue : 1/25/2019

Version : 5

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations

References : Not available.

▣ Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

Page 1 of 4

Checkmor® 200

Revision 2
Revision date 3-Mar-2008

1. IDENTIFICATION OF THE SUBSTANCE / PREPARATION AND THE COMPANY

Product name Checkmor® 200
Company OAKITE PRODUCTS INC
675 Central Avenue
New Providence
NJ 07974
United States
Telephone +18005264473
Fax +19084644658
Emergency telephone number CHEMTREC – 800-424-9300
Product code 2431
Intended use Penetrant Inspection.

2 HAZARDS IDENTIFICATION.

Main hazards Irritating to eyes. Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Harmful: may cause lung damage if swallowed. Repeated exposure may cause skin dryness or cracking.

3 . COMPOSITION / INFORMATION ON INGREDIENTS.

Hazardous ingredients

| | Conc. | CAS | EINECS | Symbols/Risk phrases |
|--|----------|------------|-----------|-------------------------------|
| Terpineol | 1-10% | 8000-41-7 | 232-268-1 | Xi; R38 |
| Aliphatic alcohol, C12-18, largely linear, ethoxylated, propoxylated | 1-10% | | | Xi;R41 N;R51/53 |
| 1-[[4-phenylazo] phenyl]azo]-2-Naphthalenol | 1-10% | 92257-31-3 | | Xn;R62 |
| Petroleum distillate (severe) hydrated | 1-10% | 64742-53-6 | | Xn; R20 |
| Solvent naphtha. | 0.1-0.5% | 64742-94-5 | 265-198-5 | Xn; R65 Xi; R66 N; R51/53 R67 |
| Ethoxylated alcohol | 1-10% | | | Xi; R36/38 N; R51/53 |
| Distillates (petroleum) hydrotreated light | 70-80% | 64742-47-8 | 265-149-8 | Xn; R65 Xi; R66 |

Description A solution of red dyes in a blend of hydrocarbons and nonionic surfactants.

Checkmor® 200

Revision 2
Revision date 3-Mar-2008

4. FIRST AID MEASURES

| | |
|---------------------|---|
| Skin contact | May cause irritation to skin. May cause dermatitis. Wash off immediately with plenty of soap and water. Remove contaminated clothing. Seek medical attention if irritation or symptoms persist. |
| Eye contact | Irritating to eyes. Rinse immediately with plenty of water for 15 minutes holding the eyelids open. Seek medical attention if irritation or symptoms persist. |
| Inhalation | Product is of low volatility and hence of low inhalation risk under normal operating conditions. Harmful by inhalation. Inhalation may cause nausea and vomiting. May cause dizziness and headache. Move the exposed person to fresh air. Seek medical attention. |
| Ingestion | Harmful if swallowed. Ingestion may cause nausea and vomiting. Ingestion is irritating to the respiratory tract and may cause damage to the central nervous system. DO NOT INDUCE VOMITING. If swallowed, seek medical advice immediately and show this container or label. |

5. FIRE FIGHTING MEASURES

| | |
|-----------------------------|--|
| Extinguishing media | Use as appropriate: carbon dioxide (CO ₂), dry chemical, foam. |
| Fire hazards | Burning produces irritating, toxic and obnoxious fumes. |
| Protective equipment | Self-contained breathing apparatus. Wear protective clothing. |

6. ACCIDENTAL RELEASE MEASURES

| | |
|----------------------------------|---|
| Personal precautions | Ensure adequate ventilation of the working area. Wear suitable protective equipment. |
| Environmental precautions | Do not allow product to enter drains. Prevent further spillage if safe. |
| Clean up methods | Absorb with inert, absorbent material. Transfer to suitable, labelled containers for disposal. Clean spillage area thoroughly with plenty of water. |

7. HANDLING AND STORAGE

| | |
|-----------------|--|
| Handling | Avoid contact with eyes and skin. Ensure adequate ventilation of the working area. Adopt best Manual Handling considerations when handling, carrying and dispensing. |
| Storage | Keep in a cool, dry, well ventilated area. Keep containers tightly closed. |

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

| | |
|-------------------------------|--|
| Engineering measures | Ensure adequate ventilation of the working area. |
| Respiratory protection | Not normally required. If high temperatures or excessive spray/mist is generated respirators will be required. Wear protective clothing. |
| Hand protection | Chemical resistant gloves (PVC) |
| Eye protection | Approved safety goggles. |
| Protective equipment | Wear chemical protective clothing. |

Checkmor® 200

Revision 2
Revision date 3-Mar-2008

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|-------------------------|---|
| Description | Liquid. |
| Colour | Red. |
| Odour | Characteristic. |
| Boiling point | Above 100°C |
| Flash point | Above 100°C |
| Relative density | 0.86 |
| Water solubility | miscible in water. |
| Viscosity | Kinematic Viscosity in 10-6 m ² /s at 40°C (ISO 3104/3105) - 5 |
| Melting point | Below -10°C |

10. STABILITY AND REACTIVITY

Stability Stable under normal conditions.

11. TOXICOLOGICAL INFORMATION

12. ECOLOGICAL INFORMATION

13. DISPOSAL CONSIDERATIONS

General information Dispose of in compliance with all local and national regulations.

14. TRANSPORT INFORMATION

ADR/RID

| | |
|--|--------------------------|
| UN 3082 | Packing group III |
| Class 9 | Hazard ID 90 |
| Proper Shipping ENVIRONMENTALLY | |
| Name HAZARDOUS SUBSTANCE, LIQUID, N.O.S. , | |


IMDG

| | |
|-------------------------|---------------------------|
| UN 3082 | Packing group III |
| Class 9 | Marine pollutant . |
| EmS Code F-A S-F | |

IATA

| | |
|---|-------------------------------|
| UN 3082 | Packing group III |
| Class 9 | Subsidiary risk - |
| Packing Instruction 914 (Cargo) | Maximum quantity 450 L |
| Packing Instruction 914 (Passenger) | Maximum quantity 450 L |

Checkmor® 200Revision 2
Revision date 3-Mar-2008**15. REGULATORY INFORMATION**

| | |
|-----------------------|--|
| Labelling | The product is classified in accordance with 67/548/EEC. |
| Symbols | Xn - Harmful  |
| Risk phrases | R36 - Irritating to eyes. R52/53 - Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. R65 - Harmful: may cause lung damage if swallowed. R66 - Repeated exposure may cause skin dryness or cracking. |
| Safety phrases | S62 - If swallowed, do not induce vomiting: seek medical advice immediately and show this container or label. |

16. OTHER INFORMATION

| | |
|---|---|
| Text of risk phrases in Section 3. | R20 - Harmful by inhalation. R36/38 - Irritating to eyes and skin. R38 - Irritating to skin. R41 - Risk of serious damage to eyes. R51/53 - Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. R62 - Possible risk of impaired fertility. R65 - Harmful: may cause lung damage if swallowed. R66 - Repeated exposure may cause skin dryness or cracking. R67 - Vapours may cause drowsiness and dizziness. |
| Further information | The information supplied in this Safety Data Sheet is designed only as guidance for the safe use, storage and handling of the product. This information is correct to the best of our knowledge and belief at the date of publication however no guarantee is made to its accuracy. This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. |

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO. SDS DATE: 02/13/2014
 PRODUCT IDENTITY: SNAKE OIL ORIGINAL: 02/13/2014

SAFETY DATA SHEET

This Safety Data Sheet conforms to ANSI Z400.5, and to the format requirements and the International Chemical Safety Cards of the Global Harmonizing System.

THIS SDS COMPLIES WITH 29 CFR 1910.1200 (HAZARD COMMUNICATION STANDARD)

IMPORTANT: Read this SDS before handling & disposing of this product.

Pass this information on to employees, customers, & users of this product.

SECTION 1. IDENTIFICATION OF THE SUBSTANCE OR MIXTURE AND OF THE SUPPLIER

PRODUCT IDENTITY: SNAKE OIL

PRODUCT USES: Rust Inhibitor

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO.

COMPANY ADDRESS: 1101 THOMPSON AVENUE

COMPANY CITY: MCKEES ROCKS, PA 15136

COMPANY PHONE: 1-412-771-6300

EMERGENCY PHONES: CHEMTREC: 1-800-424-9300 (USA)

CANUTEC: 1-613-996-6666 (CANADA)

SECTION 2. HAZARDS IDENTIFICATION

WARNING!!

2.1 HAZARD STATEMENTS: (CAT = Hazard Category)

H100s = General, H200s = Physical, H300s = Health, H400s = Environmental

H315 Causes skin irritation.(CAT:2)

H320 Causes eye irritation.(CAT:2)

2.2 PRECAUTIONARY STATEMENTS:

P100s = General, P200s = Prevention, P300s = Response, P400s = Storage, P500s = Disposal

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P260 Do not breathe dust/fume/gas/mist/vapors/spray.

P262 Do not get in eyes, on skin, or on clothing.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

| MATERIAL | CAS# | EINECS# | WT % |
|--------------------------|---------------|---------|--------|
| Hydraulic Oil | Mixture | - | 90-100 |
| Nonhazardous Nonvolatile | Proprietary | - | 0- 5 |
| Citropine Scent | Not Available | - | 0- 5 |
| Zinc Compounds | Mixture | - | 0- 1 |

TRACE COMPONENTS: Trace ingredients (if any) are present in < 1% concentration, (< 0.1% for potential carcinogens, reproductive toxins, respiratory tract mutagens, and sensitizers). None of the trace ingredients contribute significant additional hazards at the concentrations that may be present in this product. All pertinent hazard information has been provided in this document, per the requirements of the Federal Occupational Safety and Health Administration Standard (29 CFR 1910.1200), U.S. State equivalents, and Canadian Hazardous Materials Identification System Standard (CPR 4).

SEE SECTIONS 8, 11 & 12 FOR TOXICOLOGICAL INFORMATION.

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO. SDS DATE: 02/13/2014
PRODUCT IDENTITY: SNAKE OIL ORIGINAL: 02/13/2014

SECTION 4. FIRST AID MEASURES

4.1 EYE CONTACT:

For eyes, flush with plenty of water for 15 minutes & get medical attention.

4.2 SKIN CONTACT:

In case of contact with skin immediately remove contaminated clothing.
Wash thoroughly with soap & water. Wash contaminated clothing before reuse.

4.3 INHALATION:

After high vapor exposure, remove to fresh air. If breathing is difficult, give oxygen. If breathing has stopped, trained personnel should immediately begin artificial respiration. If the heart has stopped, trained personnel should immediately begin cardiopulmonary resuscitation (CPR).

4.4 SWALLOWING:

Rinse mouth. Do NOT induce vomiting. GET MEDICAL ATTENTION IMMEDIATELY.
Do NOT give liquids to an unconscious or convulsing person.

SECTION 5. FIRE FIGHTING MEASURES

5.1 FIRE & EXPLOSION PREVENTIVE MEASURES

Isolate from oxidizers, extreme heat, sparks, and open flame.

5.2 EXTINGUISHING MEDIA

Use dry chemical, carbon dioxide, foam, or water spray extinguishing media. Water or foam may cause frothing of materials heated above 100 C / 212 F. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces.

5.3 SPECIAL FIRE FIGHTING PROCEDURES

Water spray may be ineffective on fire but can protect fire-fighters & cool closed containers. Use fog nozzles if water is used.
Do not enter confined fire-space without full bunker gear.
(Helmet with face shield, bunker coats, gloves & rubber boots).

5.4 UNUSUAL EXPLOSION AND FIRE PROCEDURES

Closed containers may explode if exposed to extreme heat.
Applying to hot surfaces requires special precautions.

SECTION 6. ACCIDENTAL RELEASE MEASURES

6.1 SPILL AND LEAK RESPONSE AND ENVIRONMENTAL PRECAUTIONS:

Uncontrolled releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a spill, clear the affected area, protect people, and respond with trained personnel. ELIMINATE all ignition sources (no smoking, flares, sparks, or flames in immediate area).

6.2 PERSONAL PROTECTIVE EQUIPMENT

The proper personal protective equipment for incidental releases (such as: 1 Liter of the product released in a well-ventilated area), use impermeable gloves, they should be Level B: triple-gloves (rubber gloves and nitrile gloves over latex gloves), chemical resistant suit and boots, hard-hat, and Self-Contained Breathing Apparatus specific for the material handled, goggles, face shield, and appropriate body protection. In the event of a large release, use impermeable gloves, specific for the material handled, chemically resistant suit and boots, and hard hat. Self-Contained Breathing Apparatus or respirator may be required where engineering controls are not adequate or conditions for potential exposure exist. When respirators are required, select NIOSH/MSHA approved based on actual or potential airborne concentrations in accordance with latest OSHA and/or ANSI recommendations.

6.3 ENVIRONMENTAL PRECAUTIONS:

Stop spill at source. Construct temporary dikes of dirt, sand, or any appropriate readily available material to prevent spreading of the material. Close or cap valves and/or block or plug hole in leaking container and transfer to another container. Keep from entering storm sewers and ditches which lead to waterways, and if necessary, call the local fire or police department for immediate emergency assistance.

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO. SDS DATE: 02/13/2014
PRODUCT IDENTITY: SNAKE OIL ORIGINAL: 02/13/2014

SECTION 6. ACCIDENTAL RELEASE MEASURES (CONTINUED)

6.4 CONTAINMENT AND CLEAN-UP MEASURES:

Absorb spilled liquid with polypads or other suitable absorbent materials. If necessary, neutralize using suitable buffering material, (acid with soda ash or base with phosphoric acid), and test area with litmus paper to confirm neutralization. Clean up with non-combustible absorbent (such as: sand, soil, and so on). Shovel up and place all spill residue in suitable containers. dispose of at an appropriate waste disposal facility according to current applicable laws and regulations and product characteristics at time of disposal (see Section 13 - Disposal Considerations).

SECTION 7. HANDLING AND STORAGE

7.1 HANDLING

Use only with adequate ventilation. Avoid prolonged or repeated contact with skin. Wear OSHA Standard goggles or face shield. Consult Safety Equipment Supplier. Wear goggles, face shield, gloves, apron & footwear impervious to material. Wash clothing before reuse.

7.2 STORAGE

Do not store above 49 C/120 F.

Keep container tightly closed & upright when not in use to prevent leakage.

7.3 NONBULK: CONTAINERS:

Store containers in a cool, dry location, away from direct sunlight, sources of intense heat, or where freezing is possible. Material should be stored in secondary containers or in a diked area, as appropriate. Store containers away from incompatible chemicals (see Section 10, Stability and Reactivity). Post warning and "NO SMOKING" signs in storage and use areas, as appropriate. Empty containers should be handled with care. Never store food, feed, or drinking water in containers which held this product.

7.4 BULK CONTAINERS:

All tanks and pipelines which contain this material must be labeled. Perform routine maintenance on tanks or pipelines which contain this product. Report all leaks immediately to the proper personnel.

7.5 TANK CAR SHIPMENTS:

Tank cars carrying this product should be loaded and unloaded in strict accordance with tank-car manufacturer's recommendation and all established on-site safety procedures. Appropriate personal protective equipment must be used (see Section 8, Engineering Controls and Personal Protective Equipment.). All loading and unloading equipment must be inspected, prior to each use. Loading and unloading operations must be attended, at all times. Tank cars must be level, brakes must be set or wheels must be locked or blocked prior to loading or unloading. Tank car (for loading) or storage tanks (for unloading) must be verified to be correct for receiving this product and be properly prepared, prior to starting the transfer operations. Hoses must be verified to be in the correct positions, before starting transfer operations. A sample (if required) must be taken and verified (if required) prior to starting transfer operations. All lines must be blown-down and purged before disconnecting them from the tank car or vessel.

7.6 PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT:

Follow practices indicated in Section 6 (Accidental Release Measures). Make certain application equipment is locked and tagged-out safely. Always use this product in areas where adequate ventilation is provided. Collect all rinsates and dispose of according to applicable Federal, State, Provincial, or local procedures.

7.7 EMPTY CONTAINER WARNING:

Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. **DO NOT PRESSURIZE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY BURST AND CAUSE INJURY OR DEATH.**

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO. SDS DATE: 02/13/2014
 PRODUCT IDENTITY: SNAKE OIL ORIGINAL: 02/13/2014

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

| MATERIAL | CAS# | EINECS# | TWA (OSHA) | TLV (ACGIH) |
|--------------------------|---------------|---------|---------------------|---------------------|
| Hydraulic Oil | Mixture | - | 5 mg/m ³ | 5 mg/m ³ |
| Nonhazardous Nonvolatile | Proprietary | - | None Known | None Known |
| Citropine Scent | Not Available | - | None Known | None Known |
| Zinc Compounds | Mixture | - | None Known | None Known |

This product contains no EPA Hazardous Air Pollutants (HAP) in amounts > 0.1%.

8.1 RESPIRATORY EXPOSURE CONTROLS

A respiratory protection program that meets OSHA 29 CFR 1910.134 and ANSI Z86.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant a respirator's use. A NIOSH certified air purifying respirator with a Type 95 (R or P) particulate filter may be used under conditions where airborne concentrations are expected to exceed exposure limits. If adequate ventilation is not available or there is potential for airborne exposure above the exposure limits, a respirator may be worn up to the respirator exposure limitations, check with respirator equipment manufacturer's recommendations / limitations. For a higher level of protection, use positive pressure supplied air respiration protection or Self-Contained Breathing Apparatus or if oxygen levels are below 19.5% or are unknown.

8.2 EMERGENCY OR PLANNED ENTRY INTO UNKNOWN CONCENTRATIONS OR IDLH CONDITIONS

Positive pressure, full-face piece Self-Contained Breathing Apparatus; or positive pressure, full-face piece Self-Contained Breathing Apparatus with an auxilliary positive pressure Self-Contained Breathing Apparatus.

8.3 VENTILATION

LOCAL EXHAUST: Necessary MECHANICAL (GENERAL): Necessary
 SPECIAL: None OTHER: None
 Please refer to ACGIH document, "Industrial Ventilation, A Manual of Recommended Practices", most recent edition, for details.

8.4 EYE PROTECTION:

Splash goggles or safety glasses. Face-shields are recommended when the operation can generate splashes, sprays or mists.

8.5 HAND PROTECTION:

Use gloves chemically resistant to this material. Preferred examples: Butyl rubber, Chlorinated Polyethylene, Polyethylene, Ethyl vinyl alcohol laminate ("EVAL"), Polyvinyl alcohol ("PVA"). Examples of acceptable glove barrier materials include: Natural rubber ("latex"), Neoprene, Nitrile/butadiene rubber ("nitril") or ("NBR"), Polyvinyl chloride ("PVC") or "vinyl"), Viton. NOTICE: The selection of a specific glove for a particular application and duration of use in a workplace should also take into account all relevant workplace factors such as, but not limited to: Other chemicals which may be handled, physical requirements (cut/puncture protection, dexterity, thermal protection), potential body reactions to glove materials, as well as the instructions/ specifications provided by the glove supplier.

8.6 BODY PROTECTION:

Use body protection appropriate for task. Cover-all, rubber aprons, or chemical protective clothing made from impervious materials are generally acceptable, depending on the task.

8.7 WORK & HYGIENIC PRACTICES:

Provide readily accessible eye wash stations & safety showers. Wash at end of each shift & before eating, smoking or using the toilet. Remove clothing that becomes contaminated. Destroy contaminated leather articles. Launder or discard contaminated clothing.

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO. SDS DATE: 02/13/2014
 PRODUCT IDENTITY: SNAKE OIL ORIGINAL: 02/13/2014

SECTION 9. PHYSICAL & CHEMICAL PROPERTIES

| | |
|--|--|
| APPEARANCE: | Liquid, Clear and bright |
| ODOR: | Mild Petroleum |
| ODOR THRESHOLD: | Not Available |
| pH (Neutrality): | Not Available |
| MELTING POINT/FREEZING POINT: | < -33 C / < -27 F |
| BOILING RANGE (IBP,50%,Dry Point): | Not Available |
| FLASH POINT (TEST METHOD): | > 196 C / > 384 F (COC) |
| EVAPORATION RATE (n-Butyl Acetate=1): | Not Applicable |
| FLAMMABILITY CLASSIFICATION: | Class III-B |
| LOWER FLAMMABLE LIMIT IN AIR (% by vol): | Not Applicable |
| UPPER FLAMMABLE LIMIT IN AIR (% by vol): | Not Available |
| VAPOR PRESSURE (mm of Hg)@20 C | 0.0 |
| VAPOR DENSITY (air=1): | Not Applicable |
| GRAVITY @ 68/68F / 20/20C: | |
| DENSITY: | 0.854 - 0.870 |
| SPECIFIC GRAVITY (Water=1): | 0.855 - 0.871 |
| POUNDS/GALLON: | 7.122 - 7.255 |
| WATER SOLUBILITY: | Negligible |
| PARTITION COEFFICIENT (n-Octane/Water): | Not Available |
| AUTO IGNITION TEMPERATURE: | Not Applicable |
| DECOMPOSITION TEMPERATURE: | Not Available |
| VISCOSITY (ASTM D445): | 22 - 68 cSt @ 40 C / 4.3 - 8.7 cSt @ 100 C |

* Using CARB (California Air Resources Board Rules).

SECTION 10. STABILITY & REACTIVITY

10.1 STABILITY

Stable under normal conditions.

10.2 CONDITIONS TO AVOID

Extended exposure to high temperatures can cause decomposition.

10.3 MATERIALS TO AVOID

Isolate from strong oxidizing agents.

10.4 HAZARDOUS DECOMPOSITION PRODUCTS

Carbon Oxides, Nitrogen Oxides, Sulfur Oxides, Phosphorus Oxide, and Zinc Oxide from heating.

10.5 HAZARDOUS POLYMERIZATION

Will not occur.

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO. SDS DATE: 02/13/2014
PRODUCT IDENTITY: SNAKE OIL ORIGINAL: 02/13/2014

SECTION 11. TOXICOLOGICAL INFORMATION

11.1 ACUTE HAZARDS

11.11 EYE & SKIN CONTACT:

Primary irritation to skin, defatting, dermatitis.
Primary irritation to eyes, redness, tearing, blurred vision.
Liquid can cause eye irritation. Wash thoroughly after handling.

11.12 INHALATION:

Vapor harmful.

11.13 SWALLOWING:

Swallowing can cause abdominal irritation, nausea, vomiting & diarrhea.

11.2 SUBCHRONIC HAZARDS/CONDITIONS AGGRAVATED

CONDITIONS AGGRAVATED:

None Known.

11.3 CHRONIC HAZARDS

11.31 CANCER, REPRODUCTIVE & OTHER CHRONIC HAZARDS:

This product has no carcinogens listed by IARC, NTP, NIOSH, OSHA or ACGIH, as of this date, greater or equal to 0.1%.

11.32 IRRITANCY OF PRODUCT: This product is irritating to contaminated tissue.

11.33 SENSITIZATION TO THE PRODUCT: No component of this product is known as a sensitizer.

11.34 MUTAGENICITY: No known reports of mutagenic effects in humans.

11.35 EMBRYOTOXICITY: No known reports of embryotoxic effects in humans.

11.36 TERATOGENICITY: No known reports of teratogenic effects in humans.

11.37 REPRODUCTIVE TOXICITY: No known reports of reproductive effects in humans.

A mutagen is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generational lines. An embryotoxin is a chemical which causes damage to a developing embryo (such as: within the eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A teratogen is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A reproductive toxin is any substance which interferes in any way with the reproductive process.

11.4 MAMMALIAN TOXICITY INFORMATION

No mammalian information is available on this product.

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO. SDS DATE: 02/13/2014
PRODUCT IDENTITY: SNAKE OIL ORIGINAL: 02/13/2014

SECTION 12. ECOLOGICAL INFORMATION

12.1 ALL WORK PRACTICES MUST BE AIMED AT ELIMINATING ENVIRONMENTAL CONTAMINATION.

12.2 EFFECT OF MATERIAL ON PLANTS AND ANIMALS:

This product may be harmful or fatal to plant and animal life if released into the environment. Refer to Section 11 (Toxicological Information) for further data on the effects of this product's components on test animals.

12.3 EFFECT OF MATERIAL ON AQUATIC LIFE:

No aquatic environmental information is available on this product.

12.4 MOBILITY IN SOIL

Mobility of this material has not been determined.

12.5 DEGRADABILITY

This product is completely biodegradable.

12.6 ACCUMULATION

Bioaccumulation of this product has not been determined.

SECTION 13. DISPOSAL CONSIDERATIONS

The generation of waste should be avoided or minimized wherever possible. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers and liners may retain some product residues. Vapor from some product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Processing, use or contamination may change the waste disposal requirements. Do not dispose of on land, in surface waters, or in storm drains. Waste should be recycled or disposed of in accordance with regulations. Large amounts should be collected for reuse or consigned to licensed hazardous waste haulers for disposal. While being recycled, used oil is regulated by 40 CFR 279. Use resulting in chemical or physical change or contamination may also subject it to regulation as hazardous waste. Under United States Federal regulations, used oil is a solid waste managed under 40 CFR 279. However, in California, used oil is managed as hazardous waste until tested to show it is not hazardous. Consult state and local regulations regarding the proper handling of used oil. **ALL DISPOSAL MUST BE IN ACCORDANCE WITH ALL FEDERAL, STATE, PROVINCIAL, AND LOCAL REGULATIONS. IF IN DOUBT, CONTACT PROPER AGENCIES. RECYCLE ALL USED OIL.**

SECTION 14. TRANSPORT INFORMATION

MARINE POLLUTANT: No
DOT/TDG SHIP NAME: Not Regulated
DRUM LABEL: None
IATA / ICAO: Not Regulated
IMO / IMDG: Not Regulated
EMERGENCY RESPONSE GUIDEBOOK NUMBER: None

SECTION 15. REGULATORY INFORMATION

15.1 EPA REGULATION:

SARA SECTION 311/312 HAZARDS: None Known

All components of this product are on the TSCA list.

This material contains no known products restricted under SARA Title III, Section 313 in amounts greater or equal to 1%.

COMPANY IDENTITY: GENERAL PIPE CLEANERS, DIV. OF GENERAL WIRE SPRING CO. SDS DATE: 02/13/2014
PRODUCT IDENTITY: SNAKE OIL ORIGINAL: 02/13/2014

SECTION 15. REGULATORY INFORMATION (CONTINUED)

15.2 STATE REGULATIONS:

CALIFORNIA SAFE DRINKING WATER & TOXIC ENFORCEMENT ACT (PROPOSITION 65):

This product contains no chemicals known to the State of California to cause cancer or reproductive toxicity.

15.3 INTERNATIONAL REGULATIONS

The identified components of this product are listed on the chemical inventories of the following countries:

Australia (AICS), Canada (DSL or NDSL), China (IECSC), Europe (EINECS, ELINCS), Japan (METI/CSCL, MHLW/ISHL), South Korea (KECI), New Zealand (NZIoC), Philippines (PICCS), Switzerland (SWISS), Taiwan (NECSI), USA (TSCA).

15.4 CANADA: WORKPLACE HAZARDOUS MATERIALS INFORMATION SYSTEM (WHMIS)

D2B: Irritating to skin / eyes.

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations (CPR) and the SDS contains all information required by the CPR.

SECTION 16. OTHER INFORMATION

16.1 HAZARD RATINGS:

HEALTH (NFPA): 1, HEALTH (HMIS): 1, FLAMMABILITY: 1, PHYSICAL HAZARD: 0
(Personal Protection Rating to be supplied by user based on use conditions.)

This information is intended solely for the use of individuals trained in the NFPA & HMIS hazard rating systems.

16.2 EMPLOYEE TRAINING

See Section 2 for Risk & Safety Statements. Employees should be made aware of all hazards of this material (as stated in this SDS) before handling it.

16.3 SDS DATE: 02/13/2014

NOTICE

The supplier disclaims all expressed or implied warranties of merchantability or fitness for a specific use, with respect to the product or the information provided herein, except for conformation to contracted specifications. All information appearing herein is based upon data obtained from manufacturers and/or recognized technical sources. While the information is believed to be accurate, we make no representations as to its accuracy or sufficiency.

Conditions of use are beyond our control, and therefore users are responsible for verifying the data under their own operating conditions to determine whether the product is suitable for their particular purposes and they assume all risks of their handling, and disposal of the product. Users also assume all risks in regards to the publication or use of, or reliance upon information contained herein.

This information relates only to the product designated herein, and does not relate to its use in combination with any other material or process.

Unless updated, the Safety Data Sheet is valid until 02/13/2017.

SAFETY DATA SHEET

Product Number 840

Issuing Date No data available

Revision Date 03-11-2015

Revision Number 2



The supplier identified below generated this SDS using the UL SDS template. UL did not test, certify, or approve the substance described in this SDS, and all information in this SDS was provided by the supplier or was reproduced from publically available regulatory data sources. UL makes no representations or warranties regarding the completeness or accuracy of the information in this SDS and disclaims all liability in connection with the use of this information or the substance described in this SDS. The layout, appearance and format of this SDS is © 2014 UL LLC. All rights reserved.

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND OF THE COMPANY/UNDERTAKING

Product identifier

Product Name Acetone

Other means of identification

Synonyms None

Recommended use of the chemical and restrictions on use

Recommended Use Multi-purpose solvent

Uses advised against No information available

Details of the supplier of the safety data sheet

Supplier Name Sunnyside Corporation
Supplier Address 225 Carpenter Avenue
Wheeling
IL
60090
US
Supplier Phone Number Phone:8003238611
Fax:8475419043
Supplier Email sscontact@sunnysidecorp.com
Emergency telephone number Chem Trec 8004249300

2. HAZARDS IDENTIFICATION

Classification


This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

| | |
|--|------------|
| Serious eye damage/eye irritation | Category 2 |
| Specific target organ toxicity (single exposure) | Category 3 |
| Flammable liquids | Category 2 |

GHS Label elements, including precautionary statements



Emergency Overview

| | | |
|---|---------------|------------------------------|
| Signal word | Danger | |
| Hazard Statements | | |
| Causes serious eye irritation May cause drowsiness or dizziness Highly flammable liquid and vapor | | |
|  | | |
| Appearance | Clear | Physical State Liquid |
| | | Odor Pungent |

Precautionary Statements - Prevention

Avoid breathing dust/fume/gas/mist/vapors/spray
 Use only outdoors or in a well-ventilated area
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking
 Keep container tightly closed
 Ground/bond container and receiving equipment
 Use explosion-proof electrical/ ventilating/ lighting/ equipment
 Use only non-sparking tools
 Take precautionary measures against static discharge
 Wear protective gloves/protective clothing/eye protection/face protection
 Keep cool

Precautionary Statements - Response**Skin**

IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
 Call a POISON CENTER or doctor/physician if you feel unwell

Fire

In case of fire: Use CO₂, dry chemical, or foam for extinction

Precautionary Statements - Storage

Store in a well-ventilated place. Keep container tightly closed
 Store locked up

Precautionary Statements - Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Not applicable

Unknown Toxicity

0% of the mixture consists of ingredient(s) of unknown toxicity

Other information

May be harmful if inhaled
 PROLONGED OR REPEATED CONTACT MAY DRY SKIN AND CAUSE IRRITATION

Interactions with Other Chemicals

Use of alcoholic beverages may enhance toxic effects.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% | Trade Secret |
|---------------|---------|----------|--------------|
| Acetone | 67-64-1 | 60 - 100 | * |

*The exact percentage (concentration) of composition has been withheld as a trade secret

4. FIRST AID MEASURES

First aid measures**General Advice**

Show this safety data sheet to the doctor in attendance.

Eye Contact

If symptoms persist, call a physician. Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Keep eye wide open while rinsing. Do not rub affected area.

Skin Contact

In the case of skin irritation or allergic reactions see a physician. Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes.

Inhalation

Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, (trained personnel should) give oxygen.

Ingestion

Do NOT induce vomiting. Rinse mouth immediately and drink plenty of water. Never give anything by mouth to an unconscious person. Call a physician.

Self-protection of the first aider

Ensure that medical personnel are aware of the material(s) involved, take precautions to protect themselves and prevent spread of contamination.

Most important symptoms and effects, both acute and delayed

Most Important Symptoms and Effects Burning sensation. Drowsiness. Dizziness.

Indication of any immediate medical attention and special treatment needed**Notes to Physician**

Treat symptomatically.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Dry chemical. Carbon dioxide (CO₂). Water spray. Alcohol resistant foam.

Unsuitable Extinguishing Media

CAUTION: All these products have a very low flash point. Use of water spray when fighting fire may be inefficient.

Specific Hazards Arising from the Chemical

Vapors can form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Most vapors are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks). Vapor explosion hazard indoors, outdoors or in sewers. Runoff to sewer may create fire or explosion hazard.

Uniform Fire Code

Flammable Liquid: I-B
Irritant: Liquid

Hazardous Combustion Products

Carbon oxides.

Explosion Data

Sensitivity to Mechanical Impact No.

Sensitivity to Static Discharge Yes.

Protective equipment and precautions for firefighters

Move containers from fire area if you can do it without risk.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal Precautions

ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). All equipment used when handling the product must be grounded. Do not touch or walk through spilled material. Stop leak if you can do it without risk.

Other Information

Water spray may reduce vapor; but may not prevent ignition in closed spaces.

Environmental Precautions

Environmental Precautions

Prevent entry into waterways, sewers, basements or confined areas.

Methods and material for containment and cleaning up

Methods for Containment

A vapor suppressing foam may be used to reduce vapors. Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.

Methods for cleaning up

Use clean non-sparking tools to collect absorbed material. Soak up with inert absorbent material. Dike far ahead of liquid spill for later disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Handling

Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes or clothing. Do not eat, drink or smoke when using this product. Use personal protection equipment. Avoid breathing vapors or mists. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use grounding and bonding connection when transferring this material to prevent static discharge, fire or explosion. Use with local exhaust ventilation. Use spark-proof tools and explosion-proof equipment. Keep in an area equipped with sprinklers. Use according to package label instructions.

Conditions for safe storage, including any incompatibilities

Storage

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat, sparks, flame and other sources of ignition (i.e., pilot lights, electric motors and static electricity). Keep in properly labeled containers. Do not store near combustible materials. Keep in an area equipped with sprinklers.

Incompatible Products

None known based on information supplied.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure Guidelines

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|--------------------|--------------------------------|---|--|
| Acetone 67-64-1 | STEL = 750 ppm TWA: 500 ppm | TWA: 1000 ppm TWA: 2400 mg/m ³ (vacated) TWA: 1800 mg/m ³ (vacated) TWA: 750 ppm (vacated) STEL: 1000 ppm (vacated) STEL: 2400 mg/m ³ | IDLH: 2500 ppm 10% LEL TWA: 250 ppm TWA: 590 mg/m ³ |

ACGIH TLV: American Conference of Governmental Industrial Hygienists - Threshold Limit Value OSHA PEL: Occupational Safety and Health Administration - Permissible Exposure Limits NIOSH IDLH Immediately Dangerous to Life or Health

Other Exposure Guidelines

Vacated limits revoked by the Court of Appeals decision in AFL-CIO v. OSHA, 965 F.2d 962 (11th Cir., 1992) See section 15 for national exposure control parameters

Appropriate engineering controls

Engineering Measures

Showers
Eyewash stations
Ventilation systems

Individual protection measures, such as personal protective equipment

Eye/Face Protection

Tight sealing safety goggles.

Skin and Body Protection

Long sleeved clothing. Chemical resistant apron. Impervious gloves. Antistatic boots.

Respiratory Protection

No protective equipment is needed under normal use conditions. If exposure limits are exceeded or irritation is experienced, ventilation and evacuation may be required.



Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes or clothing. Wear suitable gloves and eye/face protection. Do not eat, drink or smoke when using this product. Contaminated work clothing should not be allowed out of the workplace. Regular cleaning of equipment, work area and clothing is recommended. Wash hands before breaks and immediately after handling the product.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical and Chemical Properties

| | | | |
|---|-------------------|------------------------|--------------------------|
| Physical State | Liquid | Odor | Pungent |
| Appearance | Clear | Odor Threshold | No information available |
| Color | Colorless | | |
| Property | Values | Remarks/ Method | |
| pH | N/A | None known | |
| Melting / freezing point | No data available | None known | |
| Boiling point / boiling range | 56 °C / 133 °F | None known | |
| Flash Point | -18 C / 0 F | None known | |
| Evaporation Rate | No data available | None known | |
| Flammability (solid, gas) | N/A | None known | |
| Flammability Limit in Air | | | |
| Upper flammability limit | No data available | | |
| Lower flammability limit | 2.5% @ 77 °F | | |
| Vapor pressure | 213 mmHg @ 75 °F | None known | |
| Vapor density | No data available | None known | |
| Specific Gravity | data available | None known | |
| Water Solubility | Soluble in water | None known | |
| Solubility in other solvents | data available | None known | |
| Partition coefficient: n-octanol/water | No data available | None known | |
| Autoignition temperature | 869 °F | None known | |
| Decomposition temperature | No data available | None known | |
| Kinematic viscosity | No data available | None known | |
| Dynamic viscosity | No data available | None known | |
| Explosive properties | No data available | | |
| Oxidizing Properties | No data available | | |
| Other Information | | | |
| Softening Point | No data available | | |
| VOC Content (%) | Exempt | | |
| Particle Size | No data available | | |
| Particle Size Distribution | | | |

10. STABILITY AND REACTIVITY

Reactivity

No data available.

Chemical stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

None under normal processing.

Hazardous Polymerization

Hazardous polymerization does not occur.

Conditions to avoid

Heat, flames and sparks.

Incompatible materials

Caustics, amines, alkanolamines, ammonia, strong oxidizing agents and chlorinated compounds.

Hazardous Decomposition Products

Carbon oxides.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Product Information

| | |
|---------------------|---|
| Inhalation | Specific test data for the substance or mixture is not available. May cause drowsiness and dizziness based on components. May cause irritation of respiratory tract. |
| Eye Contact | Specific test data for the substance or mixture is not available. Expected to be an irritant based on components. May cause redness, itching, and pain. May cause temporary eye irritation. |
| Skin Contact | Specific test data for the substance or mixture is not available. May cause irritation. Prolonged contact may cause redness and irritation. |
| Ingestion | Specific test data for the substance or mixture is not available. Ingestion may cause irritation to mucous membranes. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea. |

Component Information

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|--------------------|-----------|-------------|---------------------------------------|
| Acetone 67-64-1 | - | - | = 50100 mg/m ³ (Rat) 8 h |

Information on toxicological effects

Symptoms May cause redness and tearing of the eyes.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

| | |
|---------------------------------|---|
| Sensitization | No information available. |
| Mutagenic Effects | No information available. |
| Carcinogenicity | Contains no ingredient listed as a carcinogen. |
| Reproductive Toxicity | No information available. |
| STOT - single exposure | No information available. |
| STOT - repeated exposure | No information available. |
| Chronic Toxicity | No known effect based on information supplied. |
| Target Organ Effects | Eyes. Central Nervous System (CNS). Respiratory system. Skin. |
| Aspiration Hazard | No information available. |

Numerical measures of toxicity Product Information

The following values are calculated based on chapter 3.1 of the GHS document

ATEmix (inhalation-dust/mist)

100.20 mg/l

12. ECOLOGICAL INFORMATION

Ecotoxicity

The environmental impact of this product has not been fully investigated.

Persistence and Degradability

No information available.

Bioaccumulation

No information available

| Chemical Name | Log Pow |
|--------------------|---------|
| Acetone 67-64-1 | -0.24 |

Other adverse effects

No information available.

13. DISPOSAL CONSIDERATIONS

Waste treatment methods

Disposal methods This material, as supplied, is a hazardous waste according to federal regulations (40 CFR 261).

Contaminated Packaging Dispose of contents/containers in accordance with local regulations.

US EPA Waste Number D001 U002

| Chemical Name | RCRA | RCRA - Basis for Listing | RCRA - D Series Wastes | RCRA - U Series Wastes |
|--------------------|------|--------------------------|------------------------|------------------------|
| Acetone 67-64-1 | | | | U002 |

California Hazardous Waste Codes 212

This product contains one or more substances that are listed with the State of California as a hazardous waste.

| Chemical Name | California Hazardous Waste |
|--------------------|----------------------------|
| Acetone 67-64-1 | Ignitable |

14. TRANSPORT INFORMATION

DOT

UN-No. UN1090
Proper Shipping Name ACETONE
Hazard Class 3
Packing Group II
Description UN1090, ACETONE, 3, II

TDG

UN-No. UN1090
Proper Shipping Name ACETONE
Hazard Class 3
Packing Group II
Description UN1090, ACETONE, 3, II

MEX

UN-No. UN1090
Proper Shipping Name ACETONE
Hazard Class 3
Packing Group II
Description UN1090 ACETONE, 3, II

ICAO

UN-No. UN1090
Proper Shipping Name ACETONE
Hazard Class 3
Packing Group II
Description UN1090, ACETONE, 3, II

IATA

UN-No. UN1090
Proper Shipping Name ACETONE
Hazard Class 3



| | |
|----------------------|------------------------|
| Packing Group | II |
| Description | UN1090, ACETONE, 3, II |

IMDG/IMO

| | |
|-----------------------------|---------------------------------|
| UN-No. | UN1090 |
| Proper Shipping Name | ACETONE |
| Hazard Class | 3 |
| Packing Group | II |
| EmS No. | F-E, S-D |
| Description | UN1090, ACETONE, 3, II, FP -18C |

RID

| | |
|-----------------------------|-----------------------|
| UN-No. | UN1090 |
| Proper Shipping Name | ACETONE |
| Hazard Class | 3 |
| Packing Group | II |
| Classification code | F1 |
| Description | UN1090 ACETONE, 3, II |

ADR

| | |
|-----------------------------|-----------------------|
| UN-No. | UN1090 |
| Proper Shipping Name | ACETONE |
| Hazard Class | 3 |
| Packing Group | II |
| Classification code | F1 |
| Description | UN1090 ACETONE, 3, II |

ADN

| | |
|-----------------------------|-----------------------|
| UN-No. | UN1090 |
| Proper Shipping Name | ACETONE |
| Hazard Class | 3 |
| Packing Group | II |
| Classification code | F1 |
| Description | UN1090 ACETONE, 3, II |
| Hazard Labels | 3 |
| Limited Quantity | 1 L |
| Ventilation | VE01 |

15. REGULATORY INFORMATION

International Inventories

| | |
|------|--|
| TSCA | Complies |
| DSL | All components are listed either on the DSL or NDSL. |

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory

DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

US Federal Regulations**SARA 313**

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

SARA 311/312 Hazard Categories

| | |
|--|-----|
| Acute Health Hazard | Yes |
| Chronic Health Hazard | No |
| Fire Hazard | Yes |
| Sudden release of pressure hazard | No |
| Reactive Hazard | No |



CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

| Chemical Name | Hazardous Substances RQs | Extremely Hazardous Substances RQs | RQ |
|--------------------|--------------------------|------------------------------------|--|
| Acetone 67-64-1 | 5000 lb | | RQ= 2270 kg final RQ RQ= 5000 lb final RQ |

US State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania | Rhode Island | Illinois |
|--------------------|------------|---------------|--------------|--------------|----------|
| Acetone 67-64-1 | X | X | X | X | |

International Regulations

Mexico

National occupational exposure limits

| Component | Carcinogen Status | Exposure Limits |
|---------------------------------|-------------------|--|
| Acetone 67-64-1 (60 - 100) | | Mexico: TWA= 1000 ppm Mexico: TWA= 2400 mg/m ³ Mexico: STEL= 1260 ppm Mexico: STEL= 3000 mg/m ³ |

Mexico - Occupational Exposure Limits - Carcinogens

Canada

WHMIS Hazard Class

B2 - Flammable liquid

D2B - Toxic materials



16. OTHER INFORMATION

| | | | | |
|-------------|-------------------------|-----------------------|--------------------------|---|
| NFPA | Health Hazards 2 | Flammability 3 | Instability 0 | Physical and Chemical Hazards - Personal Protection X |
| HMIS | Health Hazards 2 | Flammability 3 | Physical Hazard 0 | |



Prepared By Product Stewardship
23 British American Blvd.
Latham, NY 12110
1-800-572-6501

Revision Date 15-Sep-2014

Revision Note No information available

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of Safety Data Sheet

11/10/2020

AEROKROIL**SECTION 1: PRODUCT AND COMPANY IDENTIFICATION**

| | |
|-----------------------------------|--|
| Product Name: | AEROKROIL |
| Product Use: | Penetrant/Lubricant for Industrial Use |
| Manufacturer: | Kano Laboratories, Inc., 1000 E. Thompson Lane Nashville, TN 37211 |
| Emergency Phone Number: | Chemtrec 1 (800) 424-9300 |
| Manufacturer Phone Number: | 615-833-4101 |
| Website: | www.kroil.com |
| SDS Date of Preparation: | November 10, 2020 |

SECTION 2: HAZARDS IDENTIFICATION

GHS / HAZCOM 2012 Classification:

| HEALTH | PHYSICAL |
|---|--|
| Skin Irritation Category 2 Eye Irritation Category 2A Aspiration Hazard Category 1 Skin Sensitization Category 1 | Flammable Aerosol Category 2 Gas Under Pressure: Compressed Gas |

Label Elements

DANGER!

Flammable aerosol.

Contains gas under pressure: may explode if heated. Causes skin irritation.

Causes serious eye irritation.

May cause an allergic skin reaction.

May be fatal if swallowed and enters airways.

Keep away from heat, sparks, open flames, and hot surfaces. No smoking. Do not spray on an open flame or other ignition source.

Pressurized container. Do not pierce or burn, even after use.

Wash thoroughly after handling.

Contaminated clothing must not be allowed out of the workplace.

Wear protective gloves and eye protection.

IF SWALLOWED: Immediately call a POISON CENTER. Do NOT induce vomiting.

IF ON SKIN: Wash with plenty of soap and water. If skin irritation or rash occurs: Get medical attention.

Take off contaminated clothing and wash it before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing. If eye irritation persists: Get medical attention.

In case of fire: Use carbon dioxide, dry chemical or foam to extinguish. Protect from sunlight.

Do not expose to temperatures exceeding 50°C/122°F.

Store locked up.

Dispose of contents and container in accordance with local and national regulations.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

| CHEMICAL NAME | CAS# | % |
|---|--------------------------|--------|
| Severely Hydrotreated Petroleum Distillates | 64742-52-5 64742-53-6 | 30-50 |
| LVP Aliphatic Hydrocarbon | 64742-47-8 | 20-40 |
| Proprietary Additive | Proprietary | 5-15 |
| Diisobutyl Ketone | 108-83-8 | 5-15 |
| Aliphatic Alcohol #1 | 123-42-2 | 1 - <3 |
| Aliphatic Alcohol #2 | 78-83-1 | 1 - <3 |
| Carbon Dioxide Propellant | 124-38-9 | 1-5 |

The exact percentage has been withheld as a trade secret or is a variation in formula.

SECTION 4: FIRST AID MEASURES

EYE: Rinse thoroughly with water for several holding the eye lids open to be sure the material is washed out. Get medical attention if irritation develops or persists.

SKIN: Remove contaminated clothing. Wash contact area thoroughly with soap and water. Get medical attention if irritation or symptoms of exposure develop. Launder clothing before re-use.

INHALATION: Remove victim to fresh air. Give artificial respiration if needed. If breathing is difficult, oxygen should be administered by qualified personnel. Get medical attention if symptoms develop.

INGESTION: DO NOT induce vomiting. Keep the victim calm and warm. Never give anything by mouth to an unconscious or drowsy person. Get immediate medical attention.

MOST IMPORTANT SYMPTOMS AND EFFECTS, ACUTE AND DELAYED: May cause eye and skin irritation. Inhalation of vapors or mist may cause respiratory irritation and central nervous system effects such as headache, dizziness, nausea and vomiting. Harmful or fatal if swallowed. Aspiration into the lungs during ingestion or vomiting may cause lung damage. May cause an allergic skin reaction.

INDICATION OF IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT, IF NEEDED: If swallowed, get immediate medical attention.

SECTION 5: FIRE FIGHTING MEASURES

SUITABLE (AND UNSUITABLE) EXTINGUISHING MEDIA: Use carbon dioxide, dry chemical or foam. Water may be ineffective but can be used to cool containers and structures.

SPECIFIC HAZARDS ARISING FROM THE CHEMICAL: Contents under pressure. Keep away from heat and open flames. Container may rupture or explode in the heat of a fire. Prolonged exposure to temperatures above 120oF may cause cans to burst. Vapors are heavier than air and may travel along surfaces to remote ignition sources and flash back.

Never use welding or cutting torch on or near containers (even empty) because product can ignite explosively. Combustion products may be hazardous: Oxides of carbon, organic compounds, smoke and fumes.

SPECIAL PROTECTIVE EQUIPMENT AND PRECAUTIONS FOR FIRE-FIGHTERS: Wear NIOSH approved positive pressure, self-contained breathing apparatus and full protective clothing. Cool fire exposed containers with water. Protect against bursting cans.

SECTION 6: ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT, AND EMERGENCY PROCEDURES: Wear appropriate protective clothing to prevent eye and skin contact including impervious gloves, safety goggles and respirator if needed. Remove all ignition sources such as open flames, spark producing equipment, pilot lights, etc. Ventilate the area with explosion-proof equipment.

ENVIRONMENTAL PRECAUTIONS: Avoid release to the environment. Report spills and releases as required to appropriate authorities.

METHODS AND MATERIALS FOR CONTAINMENT AND CLEANING UP: Place leaking can in a pail or pan in a well-ventilated area until the pressure has been released. Cover liquid with an inert absorbent material and collect into an appropriate container for disposal.

SECTION 7: HANDLING AND STORAGE

PRECAUTIONS FOR SAFE HANDLING: Avoid breathing vapors, aerosols and mists. Use with adequate ventilation. Avoid contact with the eyes, skin and clothing. Wash exposed skin thoroughly with soap and water after use. Keep product away from heat, sparks, flames and all other sources of ignition. No smoking in storage or use areas. Do not cut, braze, solder, grind or weld on or near containers. Contents under pressure. Do not puncture or incinerate container.

CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES: Store in a cool, well ventilated area at temperatures below 120°F. Do not store in direct sunlight. Store as a Level 3 aerosol.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

| CHEMICAL NAME | EXPOSURE LIMITS |
|---|--|
| Severely Hydrotreated Petroleum Distillates (as mineral oil) | 5 mg/m ³ TWA OSHA PEL (as oil mist) 5 mg/m ³ TWA ACGIH TLV (inhalable fraction) |
| LVP Aliphatic Hydrocarbon | 166 ppm TWA Manufacturer Recommended (vapor) |
| Proprietary Additive | None Established |
| Diisobutyl Ketone | 50 ppm TWA OSHA PEL 25 ppm TWA ACGIH TLV |
| Aliphatic Alcohol #1 | 50 ppm OSHA TWA PEL 50 ppm TWA ACGIH TLV |
| Aliphatic Alcohol #2 | 100 ppm TWA OSHA PEL 50 ppm TWA ACGIH TLV |
| Carbon Dioxide Propellant | 5000 ppm TWA OSHA PEL 5000 ppm TWA ACGIH TLV 30000 ppm STEL ACGIH TLV |

APPROPRIATE ENGINEERING CONTROLS: Use with adequate general or local exhaust ventilation to maintain concentrations below the occupational exposure limits. Use explosion proof electrical equipment and wiring where required.

PERSONAL PROTECTIVE EQUIPMENT:

RESPIRATORY PROTECTION: If the exposure limits listed above are exceeded, a NIOSH approved respirator with organic vapor cartridges may be used. For higher exposures, a supplied air respirator may be required. Respirator selection and use should be based on contaminant type, form and concentration. Follow OSHA 1910.134, ANSI Z88.2 and good Industrial Hygiene practice.

HAND PROTECTION: Impervious gloves are recommended when needed to avoid skin contact.

EYE PROTECTION: Chemical safety goggles recommended.

SKIN PROTECTION: Impervious clothing as required to prevent skin contact and contamination of personal clothing.

HYGIENE MEASURES: Suitable eye wash and washing facilities should be available in the work area.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|----------------------------------|---|
| Appearance: | Slightly reddish liquid packaged as an aerosol | Odor: | Solvent |
| Odor Threshold: | Not available | pH: | Not available |
| Melting/Freezing Point: | Not available | Boiling Point/Range: | Not available |
| Flash Point: | 132°F (55.5°C) TOC | Evaporation Rate: | Not available |
| Flammability: (Solid, Gas) | Not applicable | Flammability Limits: | 10.9% (aliphatic alcohol #2) LEL: 0.7% (petroleum distillates) |
| Vapor Pressure: | Not available | Vapor Density: | Not available |
| Relative Density: | 0.8596 | Solubilities: | Negligible in Water |
| Partition Coefficient: (N-Octanol/Water) | Not available | Autoignition Temperature: | Not available |
| Decomposition Temperature: | Not available | Viscosity: | Not available |

SECTION 10: STABILITY AND REACTIVITY

REACTIVITY: None known.

CHEMICAL STABILITY: Stable under normal conditions of storage or use.

POSSIBILITY OF HAZARDOUS REACTIONS: None known.

CONDITIONS TO AVOID: Avoid heat, sparks, flames and all other sources of ignition.

INCOMPATIBLE MATERIALS: Avoid strong oxidizing agents, reducing agents, acids and bases.

HAZARDOUS DECOMPOSITION PRODUCTS: Combustion will produce oxides of carbon, acetone, acrid fumes and smoke.

SECTION 11: TOXICOLOGICAL INFORMATION

POTENTIAL HEALTH EFFECTS:

EYE: May cause eye irritation with redness, tearing and stinging.

SKIN: May cause irritation with redness, rash, swelling. Prolonged or repeated contact may result in defatting and dermatitis. Repeated skin contact may cause sensitization (allergic skin reaction) in some individuals.

INHALATION: Inhalation of vapors or mists may cause mucous membrane and upper respiratory tract irritation and central nervous system depression. Symptoms may include coughing, wheezing, shortness of breath, headache, dizziness, drowsiness, nausea, fatigue and unconsciousness.

INGESTION: Ingestion is an unlikely route of exposure for aerosol products. Swallowing may cause gastrointestinal irritation with abdominal pain, nausea, vomiting and diarrhea and central nervous system depression with symptoms including headache, dizziness, intoxication, weakness, nausea, and vomiting. Aspiration into the lungs during ingestion or vomiting may cause lung damage.

CHRONIC HAZARDS: Aliphatic Alcohol #1 is suspected of damaging fertility or the unborn child.

CARCINOGEN STATUS: None of the components of this product at greater than 0.1% are listed as carcinogens by OSHA, IARC or NTP.

ACUTE TOXICITY: Toxicological testing has not been performed on this product as a mixture.

LVP Aliphatic Hydrocarbon: Oral rat LD50 > 5000 mg/kg; Dermal rat LD50 > 5000 mg/kg; Inhalation rat LC50 > 2.18 mg/L/4 hr.

Severely Hydrotreated Petroleum Distillates: Oral rat LD50 >5000 mg/kg, Inhalation rat LC50 >5.28 mg/L/4 hr, Dermal rabbit LD50 >2000 mg/kg

Proprietary Additive: Oral rat LD50 3200 mg/kg; Dermal rabbit LD50 5000 mg/kg

Diisobutyl Ketone: Oral rat LD50 5233 mg/kg; Dermal rat LD50 > 2000 mg/kg; Inhalation rat LC50 14.5 mg/L/4 hr.

Aliphatic Alcohol #1: Oral rat LD50 3002 mg/kg; Dermal rat LD50 > 1875 mg/kg; Inhalation rat LC50 > 7.6 mg/L/4 hr.

Aliphatic Alcohol #2: Oral rat LD50 > 2830 mg/kg; Inhalation rat LC50 24.6 mg/L/4 hr; Dermal rabbit LD50 > 2000 mg/kg

Carbon Dioxide: Inhalation rat LC50 167857 ppm/4 hr

SECTION 12: ECOLOGICAL INFORMATION

ECOTOXICITY: No toxicity data available for the product.

LVP Aliphatic Hydrocarbon: 96 hr. LC50 Pimephales promelas > 100 mg/L; 48 hr. EC50 daphnia magna >1000 mg/L; 72 hr.

EC50 Pseudokirchnerella subcapitata > 100 mg/L

Severely Hydrotreated Petroleum Distillates: 96 hr LL50 Oncorhynchus mykiss 2.5 mg/kg, 48 hr EL50 daphnia magna 1.4 mg/L, 72 hr

EL50 Pseudokirchnerella subcapitata 1.3 mg/L

Proprietary Ingredient: 48 hr. LC50 daphnia magna 17-28 mg/L

Diisobutyl Ketone: 96 hr. LC50 Oncorhynchus mykiss 30 mg/L; 48 hr. EC50 daphnia magna 37.2 mg/L, 72 hr.

Aliphatic Alcohol #1: 96 hr. LC50 Oryzias latipes >100 mg/L; 48 hr. EC50 daphnia magna >1000 mg/L; 72 hr. EC50 Pseudokirchnerella subcapitata >1000 mg/L

Aliphatic Alcohol #2: 96 hr LC50 Pimephales promelas 1430 mg/L; 48 hr EC50 daphnia pulex 1100 mg/L; 72 hr EC50 Pseudokirchnerella subcapitata 1799 mg/L

Carbon Dioxide: 96 hr LC50 Oncorhynchus mykiss 35 mg/L

PERSISTENCE AND DEGRADABILITY: Aliphatic Alcohol #1 and Aliphatic Alcohol #2 are readily biodegradable.

BIOACCUMULATIVE POTENTIAL: No data available.

MOBILITY IN SOIL: No data available

OTHER ADVERSE EFFECTS: None known

SECTION 13: DISPOSAL INFORMATION

DISPOSAL INSTRUCTIONS: Dispose of product in accordance with all local, state/provincial and federal regulations.

Do not puncture or incinerate.

CONTAMINATED PACKAGING: Offer empty packaging material to local recycling facilities.

SECTION 14: TRANSPORT INFORMATION

| | UN NUMBER | PROPER SHIPPING NAME | HAZARD CLASS | PACKING GROUP | ENVIRONMENTAL HAZARD |
|----------------------------|-----------|---------------------------------------|--------------|---------------|----------------------|
| DOT / 49 CFR GROUND | | Limited Quantity | | | |
| DOT AIR | UN1950 | Aerosols, Flammable, Limited Quantity | 2.1 | None | None |
| IMDG | UN1950 | Aerosols, Limited Quantity | 2.1 | None | None |
| IATA | UN1950 | Aerosols, Flammable, Limited Quantity | 2.1 | None | None |

Transport in bulk (according to Annex II of MARPOL 73/78 and the IBC Code): Not applicable - product is transported only in packaged form.

Special precautions: None known.

SECTION 15: REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS:


CERCLA 103 Reportable Quantity: This product has a Reportable Quantity (RQ) of 166,666 lbs. (based on the RQ for Aliphatic alcohol #2 of 5,000 lbs present at 3%) maximum. Releases above the RQ must be reported to the National Response Center. Many states have more stringent release reporting requirements. Report spills required under federal, state and local regulations

STATE REPORTING REGULATIONS:

Massachusetts Right To Know: Diacetone Alcohol 123-42-2, Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9

New Jersey Right To Know: Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9, Pine Oil 8002-09-3

Pennsylvania Right To Know: Diacetone Alcohol 123-42-2, Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9

California Proposition 65:  **WARNING:** This product can expose you to chemicals including beta-myrcene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

SARA TITLE III:

Hazard Category for Section 311/312: Refer to Section 2 for the OSHA Hazard Classification

Section 313 Toxic Chemicals: This product contains the following chemicals subject to SARA Title III Section 313 Reporting requirements: None.

Section 302 Extremely Hazardous Substances (TPQ): None

EPA Toxic Substances Control Act (TSCA) Status: All of the components of this product are listed on the TSCA inventory.

Canadian DSL: All of the components of this product are listed on the Canadian Domestic Substances List

SECTION 16: OTHER INFORMATION

HMIS RATINGS: Health - 2 Flammability - 4 Physical Hazard - 0

NFPA RATINGS: Health - 1 Flammability - 2 Instability - 0

SDS REVISION HISTORY: Updated formulation - Section 15

DATE OF PREPARATION: November 20, 2020

DATE OF LAST REVISION: July 01, 2020

The information contained herein has been developed based upon current available scientific data. New information may be developed from time to time which may render the conclusions of this report obsolete. Therefore, no warranty is extended as to the applicability of this information to the user's intended purpose or the consequences of its use or misuse.



GHS SAFETY DATA SHEET

SCIGRIP® 1829 General Purpose Cement

Date Revised: **DEC 2014**Supersedes: **JUL 2014**

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: SCIGRIP® 1829 General Purpose Cement**PRODUCT USE:** General-Purpose Adhesive**SUPPLIER:****MANUFACTURER:** SCIGRIP Smarter Adhesive Solutions

600 Ellis Road, Durham, NC 27703 - USA

P.O. Box 12729, Research Triangle Park, NC 27709 - USA

Tel. 1-919-598-2400

EMERGENCY: Transportation: CHEMTEL Tel. 800-255-3924, +1 813-248-0585 (International)**Medical:** CHEMTEL Tel. 800-255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|-----------------------------|------------------------------|-----------------------------|
| Acute Toxicity: Category 4 | Acute Toxicity: None Known | Flammable Liquid Category 2 |
| Skin Irritation: Category 3 | Chronic Toxicity: None Known | |
| Skin Sensitization: NO | | |
| Eye: Category 2B | | |

GHS LABEL:**Signal Word:**

Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2

| Hazard Statements | Precautionary Statements |
|---|--|
| H225: Highly flammable liquid and vapor | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking |
| H319: Causes serious eye irritation | P261: Avoid breathing dust/fume/gas/mist/vapors/spray |
| H332: Harmful if inhaled | P280: Wear protective gloves/protective clothing/eye protection/face protection |
| H335: May cause respiratory irritation | P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing |
| H336: May cause drowsiness or dizziness | P403+P233: Store in a well ventilated place. Keep container tightly closed |
| EUH019: May form explosive peroxides | P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH | CONCENTRATION |
|---------------------------|---------|-----------|-------------------------|---------------|
| | | | Pre-registration Number | % by Weight |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 69 - 81 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.

* Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).

indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

- Contact with eyes:** Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
- Skin contact:** Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
- Inhalation:** Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
- Ingestion:** Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

SECTION 5 - FIREFIGHTING MEASURES

| | | | | |
|--|--|--------------|------|-----------|
| Suitable Extinguishing Media: | Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. | HMIS | NFPA | 0-Minimal |
| Unsuitable Extinguishing Media: | Water spray or stream. | Health | 2 | 2 |
| Exposure Hazards: | Inhalation and dermal contact | Flammability | 3 | 3 |
| Combustion Products: | Oxides of carbon, hydrogen chloride and smoke | Reactivity | 0 | 0 |
| Protection for Firefighters: | Self-contained breathing apparatus or full-face positive pressure airline masks. | | | 3-Serious |
| | | | | 4-Severe |

SECTION 6 - ACCIDENTAL RELEASE MEASURES

- Personal precautions:** Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).
- Environmental Precautions:** Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
- Methods for Cleaning up:** Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
- Materials not to be used for clean up:** Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

- Handling:** Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.
- Storage:** Store between 40° - 110°F (5° - 43°C). Store in ventilated room or in shade away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL |
|------------------|---------------------------|-----------|------------|----------|-----------|
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | 300 ppm |

- Engineering Controls:** Use local exhaust as needed.
- Monitoring:** Maintain breathing zone airborne concentrations below exposure limits.
- Personal Protective Equipment (PPE):**
- Eye Protection:** Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
- Skin Protection:** Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
- Respiratory Protection:** Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

SCIGRIP® 1829 General Purpose Cement

Date Revised: DEC 2014

Supersedes: JUL 2014

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Light tan, heavy bodied syrupy liquid | Odor Threshold: | 5.4 ppm (MEK) |
| Odor: | Ketone | Evaporation Rate: | > 1.0 (BUAC = 1) |
| pH: | Not Applicable | Flammability: | Category 2 |
| Melting/Freezing Point: | -86°C (-123°F) Based on first melting component: MEK | Flammability Limits: | LEL: 1.4% based on MEK UEL: 11.4% based on MEK |
| Boiling Point: | 80°C (176°F) Based on first boiling component: MEK | Vapor Pressure: | 78 mm Hg @ 20°C (68°F) MEK |
| Flash Point: | -9°C (16°F) TCC based on MEK | Vapor Density: | >2 (Air = 1) |
| Specific Gravity: | 0.862 @23°C (73°F) | Other Data: Viscosity: | Heavy bodied |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | | |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 515°C (959°F) based on MEK | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 600 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | |
|-------------------------------------|---|
| Likely Routes of Exposure: | Inhalation, Eye and Skin Contact |
| Acute symptoms and effects: | |
| Inhalation: | Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages. |
| Eye Contact: | Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid. |
| Skin Contact: | Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact. |
| Ingestion: | May cause nausea, vomiting, diarrhea and mental sluggishness. |
| Chronic (long-term) effects: | None known to humans |
| Toxicity: | LD ₅₀ LC ₅₀ |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) Inhalation 8 hrs. 23,500 mg/m ³ (rat) |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 600 g/l. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

EXCEPTION for Ground Shipping

DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package.
Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D".

TDG INFORMATION

| | |
|---------------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|---|--|
| Precautionary Label Information: | Highly Flammable, Irritant | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R20: Harmful by inhalation. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness | |
| Safety Phrases: | S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. S25: Avoid contact with eyes. | S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. S46: If swallowed, seek medical advise immediately and show this container or label. | |

SECTION 16 - OTHER INFORMATION

| | | |
|---|---|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 12/23/2014 / Updated GHS Standard Format | |
| Intended Use of Product: | General Purpose Adhesive for bonding a wide variety of plastics and nonplastic materials. | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.





MARVEL OIL CO., INC.
2250 W. Pinehurst Blvd., STE 150
Addison, IL 60101

SAFETY DATA SHEET

1. Product and Company Identification

1.1 Product Identifier

Product Name: Marvel Air Tool Oil
Product Code (SKU): MM85R1 (50100), MM080R (50093) - See Section 15 for discontinued SKU's

1.2 Relevant Identified Uses Of The Substance

Product Use: Engine Oil Additive – Fuel additive (EPA Registered)

1.3 Details of the Supplier of the SDS

Company Name: Marvel Oil Company, Inc.
Street Address: 2250 W. Pinehurst Blvd., Suite 150
City, State, Zip Code: Addison, IL 60101

1.4 Emergency Telephone Numbers

Phone Number: 1(630)455-3700
Fax Number: 1(630)455-3868
Transportation: 1(800)424-9300 (CHEMTREC)
Medical Assistance: Call your local Poison Control Center

2. Hazard Identification:

2.1 Classification of the Substance or Mixture

Hazard Classification: Flammable liquid 3
Skin irritation 2
Reproductive Toxicity 2
Aspiration toxicity 1

2.2 Label Elements



Pictogram:

Signal Word: Danger

Hazard Statement: Flammable liquid and vapor. Causes skin irritation.
Suspected of damaging fertility of the un-born child. May be fatal if swallowed and enters airways.

Precautionary Statement: Keep away from heat, sparks, open flames or hot surfaces. Do not smoke. Keep containers tightly closed. Ground all containers and receiving equipment. Use explosion proof electrical, ventilation, and lighting equipment. Use only non-sparking tools. Take precautionary measures against static

discharge. Wear protective gloves, clothing, eye glasses and face shield. Do not handle until all safety precautions have been read and understood. Wash hands thoroughly after handling. If exposed, get medical attention. If on skin or hair, remove immediately all contaminated clothing and launder before re-use. Wash skin with soap and water. If skin irritation occurs, get medical attention. If swallowed, immediately call a poison control center or doctor. Do NOT induce vomiting. Store in a well ventilated place. Dispose of contents and container in accordance with all local, state, national and international regulations.

2.3 Other Hazards

Description of additional HNOC: None

3. Information on Ingredients:

3.1 Substance not applicable

3.2 Mixture

| <u>Component</u> | <u>CAS Number</u> | <u>Concentration (wt%)</u> |
|---|-------------------|----------------------------|
| Petroleum Distillates (Hydrotreated Heavy Naphthenic) | 64742-52-5 | 60-100% |
| Petroleum Distillates (Stoddard Solvent) | 8052-41-3 | 10-30% |
| Tricresyl Phosphate | 1330-78-5 | 0.1-1.0% |
| Ortho Dichlorobenzene | 95-50-1 | 0.1-1.0% |
| Para Dichlorobenzene | 106-46-7 | <0.1% |

4. First Aid Measures:

4.1 Description of First Aid Measures

Inhalation: Remove to fresh air and promote deep breathing. Get medical attention if effects persist or you feel un-well.

Skin: In case of skin contact, wash thoroughly with soap and water. Remove contaminated clothing and footwear. Launder clothing before re-use. Call a physician if irritation develops or persists.

Eyes: In case of eye contact, immediately flush eyes with plenty of water. Remove contact lenses if worn. If irritation persists, get medical attention

Ingestion: If swallowed, do not induce vomiting. Never give anything by mouth to an unconscious person. Immediately call a poison control center or physician.

4.2 Most important symptoms and effects – acute and chronic

Inhalation: May cause respiratory tract irritation. Vapors may cause drowsiness or dizziness.

Skin: Cause skin irritation. Symptoms may include redness, edema, drying, defatting, and cracking of skin.

Eyes: May cause temporary eye irritation. Symptoms may include discomfort or pain, excess blinking and tearing, with redness and swelling.

Ingestion: May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea, and vomiting.

4.3 Indication of any immediate medical attention and special treatment

Symptoms may not appear immediately. Seek medical attention if effects develop or persist and you feel un-well.

5. Fire Fighting Measures:

5.1 Extinguishing media

Carbon dioxide, dry chemical, and alcohol foam

5.2 Special hazards arising from the substance or mixture

CO₂, CO, and hydrocarbons

5.3 Advice for Fire Fighters

Keep up wind of fire. Wear full firefighting turn out gear (full bunker gear) and respiratory protection (SCBA). Cool closed containers exposed to fire with water. See Section 8 for personal protection.

6. Accidental Release Measures:

6.1 Personal precautions, protective equipment, and emergency procedures

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Eliminate all source of ignition.

6.2 Methods and materials for containment and clean up

For containment: Contain and absorb spill with inert material. Place in suitable container for disposal. Do not flush to sewer or allow to enter waterways. See section 8 for PPE.

For clean up: Take up material and place in a suitable container. Vapors may be heavier than air and may travel along the ground to a distant source of ignition. Provide adequate ventilation.

7. Handling and Storage

7.1 Precautions for safe handling

Keep away from source of ignition. Do not smoke. Take precaution to eliminate static discharge. Avoid contact with skin and eyes. Avoid breathing vapor or mist. Do not swallow. Do not eat or drink while handling. Wash hands with soap and water after handling. Use only non-sparking tools.

7.2 Conditions for safe storage including incompatibilities

Keep out of reach of children. Store in a well ventilated place. Do not store above 49°C (120°F).

7.3 Specific end uses

Shelf Life: Shelf life is considered to be 7 – 10 years when properly stored.

8. Exposure Control/Personal Protection:

8.1 Control parameters

| <u>Exposure Limits</u> | <u>8 hr TWA:</u> | <u>(OSHA PEL)</u> | <u>(ACGIH TWA)</u> |
|---|------------------|-------------------|--------------------|
| Petroleum Distillates (Hydrotreated Heavy Naphthenic) | | not applicable | not applicable |
| Petroleum Distillates (Stoddard Solvent) | | 500 ppm | 100 ppm |
| Tricresyl Phosphate | | not applicable | not applicable |
| Ortho Dichlorobenzene | | 50 ppm | 25 ppm |
| Para Dichlorobenzene | | 75 ppm | 10 ppm |

8.2 Exposure controls

Use adequate ventilation to keep exposure below recommended limits. Ensure that eye wash station and safety shower are close to work station.

Hand Protection Equipment: Wear chemical resistant gloves to prevent skin contact.

Eye Protection Equipment: Wear safety glasses or splash goggles to prevent eye contact.

Skin and Body Protection: Wear suitable protective clothing.

Respiration/Ventilation Protection Requirements: Provide good ventilation.

Ingestion Protection Requirements: Do not eat, drink or smoke while handling. Wash hands with soap and water after handling. Launder all clothing and foot wear before re-use.

9. Physical And Chemical Properties:

9.1 Information of basic chemical and physical properties

| | |
|---|--|
| Physical Form: | thin liquid |
| Color: | clear red |
| Odor: | typical oily |
| Odor Threshold: | not available |
| pH: | not applicable – oil based product |
| Melting Point/Freeze Point: | -51°C (-60°F) |
| Initial Boiling Point: | not available |
| Flash Point (Seta Closed Cup): | 53°C (128°F) |
| Flammability Limits: | Explosive Limits: Upper: not available Lower: not available |
| Evaporation Rate: | not available |
| Flammability Solid/Gas: | not applicable |
| Vapor Pressure: | not available |
| Vapor Density: | not available |
| Specific Gravity: | 0.876 |
| Solubility in Water: | insoluble |
| Auto Ignition Temperature: | not available |
| Partition coefficient (n/octonol/water): | not available |
| Viscosity (Kinimatic @ 100°C): | 2.0 – 3.0 cSt |

9.2 Other information

| | |
|------------------------------------|--------|
| % NVM by Weight: | 75.0% |
| % VOC Content (California): | 24.92% |

10. Stability and Reactivity:

10.1 Reactivity

Does not react under normal conditions

10.2 Chemical stability

Stable

10.3 Possibility of hazardous reactions

Does not react under normal conditions

10.4 Conditions to avoid

Heat and incompatible materials

10.5 Incompatible materials

Strong oxidizers such as bleach and peroxides

10.6 Hazardous decomposition products

CO₂, CO and hydrocarbons

11. Toxicological Information:

11.1 Information on Toxicological effects

Marvel Mystery Oil

| | |
|-----------------------|-----------------|
| LD50 – Oral Rat | >2000 mg/Kg |
| LD50 – Dermal Rabbit | >2000 mg/Kg |
| LC50 – Inhalation Rat | >20 mg/L (4 hr) |

Petroleum Distillates Hydrotreated Heavy Naphthenic (64742-52-5)

| | |
|-----------------------|----------------|
| LD50 – Oral Rat | >5000 mg/Kg |
| LD50 – Dermal Rabbit | >5000 mg/Kg |
| LC50 – Inhalation Rat | >5 mg/L (4 hr) |

Tricresyl Phosphate (1330-78-5)

| | |
|-----------------|------------|
| LD50 – Oral Rat | 3000 mg/Kg |
|-----------------|------------|

o-Dichlorobenzene (95-50-1)

| | |
|-----------------------|------------------|
| LD50 – Oral Rat | 500 mg/Kg |
| LD50 – Dermal Rabbit | >10000 mg/Kg |
| LC50 – Inhalation Rat | 8.15 mg/L (4 hr) |

p-Dichlorobenzene (106-46-7)

| | |
|----------------------|-------------|
| LD50 – Oral Rat | >2000 mg/Kg |
| LD50 – Dermal Rabbit | >2000 mg/Kg |

| | |
|-----------------------------------|--|
| Skin corrosion/irritation | Causes skin irritation |
| Serious eye damage/irritation | Based on available data, classification data are not met |
| Respiratory or skin sensitization | Based on available data, classification data are not met |
| Germ cell mutagenicity | Based on available data, classification data are not met |
| Carcinogenicity | Based on available data, classification data are not met |

| | |
|-----------------------------|-------------------------------|
| o-Dichlorobenzene (95-50-1) | IARC Group 3 – Not Classified |
|-----------------------------|-------------------------------|

| | |
|--|--|
| p-dichlorobenzene (106-46-7) | IARC Group 2B – Possible carcinogen to humans. NTP 1-Evidence of Carcinogenicity 3, Reasonably anticipated to be a human Carcinogen |
| Reproductive toxicity | Suspected of damaging fertility of un-born child |
| Specific target organs – single exposure | Based on available data, classification data are not met |
| Specific target organs – repeated exposure | Based on available data, classification data are not met |
| Aspiration hazard | May be fatal if swallowed and enters air ways. |
| Symptoms/injuries after inhalation | May cause respiratory tract irritation. Vapors may cause drowsiness and dizziness. |
| Symptoms/injuries after skin contact | Cause skin irritation. Symptoms may include redness, edema, drying, defatting, and cracking of skin. |
| Symptoms/injuries after eye contact | May cause temporary eye irritation. Symptoms may include discomfort or pain, excess blinking and tearing, with redness and swelling. |
| Symptoms/injuries after ingestion | May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea, and vomiting. |

12. Ecological Information:

12.1 Toxicity

Not recommended for release into aquatic systems without treatment

12.2 Persistence and degradability

Not established

12.3 Bioaccumulative potential

Not established

12.4 Mobility in soil

Not established

12.5 Other adverse effects

None known

13. Disposal Considerations:

13.1 Waste treatment methods

RCRA Hazardous Waste:

Regulated as a hazardous waste (D-001 Ignitable).

Waste Disposal Method:

Dispose of in accordance with local, state and federal regulations

Waste Disposal Vessel:

Metal drums are recommended.

14. Transportation Information:

14.1 UN number

1268

14.2 UN Proper shipping name

Petroleum Distillate n.o.s.

14.3 Transport Hazard class

3

14.4 Packaging group

III

14.5 Marine Pollutant

No

14.6 Transportation in Bulk

Not applicable

14.7 Special precautions

Use limited quantities

15. Regulatory Information:

15.1 US Federal Regulations

TSCA Status: All ingredients are commercially available and listed by the manufacturer under TSCA.

15.2 Foreign Regulations

Canadian Status: All materials contained in this product are listed on the Canadian Domestic Substance List (DSL). Consult Turtle Wax, Inc. regarding status of ingredients.

European Union: All materials contained in this product are listed on EINECS.

AICS: All materials are registered for AICS (Australia)

15.3 State Regulations

State Regulatory Information:

The following chemicals are specifically listed by individual states; other product specific health and safety data in other sections of the SDS may also be applicable for state requirements. For details on your regulatory requirements, contact the appropriate agency in your state.

California Prop 65:

| <u>CAS Number</u> | <u>Concentration</u> | <u>State Code</u> |
|------------------------------|----------------------|-------------------|
| p-Dichlorobenzene (106-46-7) | <0.1% | Cancer |

15.4 HMIS & NFPA Classifications

| | | |
|----------------------|--------------|---|
| HMIS Classification: | Health | 2 |
| | Flammability | 2 |
| | Reactivity | 0 |
| NFPA Classification: | Health | 2 |
| | Flammability | 2 |

Reactivity 0

15.5 Discontinued SKU's All discontinued SKU's used this same formula.

MM080, MM085, MM85R, MM086, MM088R, MM089

16. Other Information:

| | |
|--------------------------|--|
| Reason For Issue | Address Update |
| Prepared By | James Heidel |
| Preparer's Title | Technical Director, R&D |
| SDS Administrator | Jean Mayszak - Technical Compliance Manager, R&D |
| Approval Date | January 26, 2017 |
| Supersedes Date | March 10, 2015 |
| Revision Number | #12 |

This information is, to the best of Turtle Wax, Inc.'s knowledge and belief, accurate and reliable. However, no representation, warranty, or guarantee is made to its accuracy, reliability or completeness. It is the user's responsibility to satisfy oneself as to the suitability and completeness of such information for their own particular use.

(M)SDS Format :

PDF Copy

Print

E-mail

View (M)SDS Section : [1](#) [2](#) [3](#) [4](#) [5](#) [6](#) [7](#) [8](#) [9](#) [10](#) [11](#) [12](#) [13](#) [14](#) [15](#) [16](#)

SAFETY DATA SHEET

SECTION 1 : IDENTIFICATION

Product Name: PS-7030IR
Product Code: PS-7030IR
SDS Manufacturer Number: 3212LTDQTY
Product Description: Presaturated wipes containing 70% Isopropyl alcohol, 30% deionized water
Manufacturer Name: Contec, Inc.
Address: 525 Locust Grove
Spartanburg, South Carolina 29303
USA
Website: www.contecinc.com
General Phone Number: +1-864-503-8333
Emergency Phone Number: Chemtrec® US: 1-800-424-9300 International: 1-703-527-3887
SDS Creation Date: April 30, 2013
SDS Revision Date: November 28, 2018

NFPA

3
1 0

HMIS

| | |
|---------------------|---|
| Health Hazard | 1 |
| Fire Hazard | 3 |
| Reactivity | 0 |
| Personal Protection | X |

SECTION 2 : HAZARD(S) IDENTIFICATION

GHS Pictograms:



Signal Word:

DANGER!

GHS Class:

Flammable Liquid, Category 2.
 Eye Irritant, Category 2.
 Specific Target Organ Toxicity, Single Exposure, Category 3.

Hazard Statements:

Highly flammable liquid and vapor.
 Causes serious eye irritation.
 May cause drowsiness or dizziness.

Precautionary Statements:

Keep away from heat/sparks/open flames — No smoking.
 Take precautionary measures against static discharge.
 In case of fire: Use dry chemical, carbon dioxide to extinguish small fires. Use water for large fires.
 Wear protective gloves, protective clothing, and eye protection.
 Avoid breathing vapors.
 Store in a well-ventilated place. Keep container tightly closed.
 IF IN EYES: Rinse cautiously with water for several minutes.
 If eye irritation persists: Get medical advice/attention.
 IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
 Call a POISON CENTER or doctor/physician if you feel unwell.
 IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
 Dispose of contents/container in accordance with Local, State, Federal and Provincial regulations.

Emergency Overview:

DANGER! Flammable. Irritant. May cause drowsiness or dizziness.

244

| | |
|--|--|
| Route of Exposure: | Eyes. Skin. Inhalation. |
| Potential Health Effects: | |
| Eye: | Eye contact with product or vapors may result in irritation, redness, and blurred vision. May cause pain disproportionate to the level of irritation to eye tissues. Vapor may cause eye irritation experienced as mild discomfort and redness. May cause moderate corneal injury. |
| Skin: | May cause irritation. Repeated exposure may cause a burning sensation and dryness or cracking. Prolonged skin contact is unlikely to result in absorption of harmful amounts. |
| Inhalation: | Inhalation of vapors, fumes or mists of the product may be irritating to the respiratory system. Excessive exposure (400 ppm) may cause eye, nose and throat irritation. Higher levels may cause incoordination, confusion, hypotension, hypothermia, circulatory collapse, respiratory arrest, and death may follow a longer duration and higher levels. In confined or poorly ventilated areas, vapors can readily accumulate and can cause unconsciousness and death. |
| Ingestion: | May cause irritation. Ingesting large amounts may cause injury. May cause central nervous system depression, nausea and vomiting. Aspiration of material into the lungs can cause chemical pneumonitis which can be fatal. |
| Chronic Health Effects: | Prolonged or repeated contact may cause skin irritation. Repeated or prolonged inhalation may cause toxic effects. |
| Signs/Symptoms: | Overexposure may cause headaches and dizziness. Signs and symptoms of excessive exposure include facial flushing, low blood pressure, irregular heartbeats. |
| Target Organs: | Eyes. Skin. Respiratory system. Digestive system. |
| Aggravation of Pre-Existing Conditions: | None generally recognized. |

SECTION 3 : COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS# | Ingredient Percent | EC Num. |
|-------------------|-----------|--------------------|-----------|
| Isopropyl alcohol | 67-63-0 | 70 by Volume | 200-661-7 |
| Deionized water | 7732-18-5 | 30 by Volume | 231-791-2 |

SECTION 4 : FIRST AID MEASURES

| | |
|----------------------|--|
| Eye Contact: | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Skin Contact: | IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. If skin irritation occurs: Get medical advice/attention. |
| Inhalation: | IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Ingestion: | If swallowed, do NOT induce vomiting. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person. |

SECTION 5 : FIRE FIGHTING MEASURES

| | |
|---|--|
| Flash Point: | 20.5 °C (69 °F) |
| Auto Ignition Temperature: | 399 °C (750 °F) |
| Lower Flammable/Explosive Limit: | 2.0 % by volume |
| Upper Flammable/Explosive Limit: | 12.0 % by volume |
| Extinguishing Media: | Use alcohol resistant foam, carbon dioxide, dry chemical, or water fog or spray when fighting fires involving this material. |
| Unsuitable Media: | Do not use a solid water stream as it may scatter and spread fire. |
| Protective Equipment: | In the event of a fire, wear Self-Contained Breathing Apparatus (SCBA), approved or in accordance to NFPA, NIOSH, and/or European Standard EN 137 guidelines or equivalent and full protective gear. |
| Unusual Fire Hazards: | Material burns with an invisible flame. |
| Hazardous Combustion Byproducts: | Oxides of carbon, oxides of nitrogen and other organic substances may be formed. |

Universal Fire And Explosion Hazards: Vapors are heavier than air and may travel along the ground or may be moved by ventilation to locations distant from the point of material handling or release.

NFPA Ratings:

| | |
|--------------------|---|
| NFPA Health: | 1 |
| NFPA Flammability: | 3 |
| NFPA Reactivity: | 0 |

SECTION 6 : ACCIDENTAL RELEASE MEASURES

Personal Precautions: Evacuate area and keep unnecessary and unprotected personnel from entering the spill area. Avoid breathing vapor, aerosol or mist. Avoid contact with skin, eyes and clothing.

Environmental Precautions: Avoid runoff into storm sewers, ditches, and waterways. Comply with all government regulations on reporting releases.

Methods for containment: Spills are very unlikely, because the wiper fabric has absorbed the liquid solvent solution. In the event of a spill, contain with an inert absorbent.

Methods for cleanup: Remove all sources of ignition. Collect the wipes with a non sparking tool and absorb or wipe any residual liquids. Place in a suitable container for proper disposal. Use appropriate protective apparel as described in Section 8. Avoid contact with skin and eyes.

SECTION 7 : HANDLING and STORAGE

Handling: Use with adequate ventilation. Avoid breathing vapor and fumes. Use only in accordance with directions.

Storage: Store in a cool, dry, well ventilated area away from sources of heat, combustible materials, direct sunlight, and incompatible substances. Keep container tightly closed when not in use. Keep away from aldehydes, halogenated organics, halogens, strong acids, strong oxidizers.

Special Handling Procedures: WARNING! Used wipes may catch fire if improperly discarded or stored near ignition sources.

Hygiene Practices: Wash thoroughly after handling. Avoid inhaling vapors, mists, or fumes.

SECTION 8 : EXPOSURE CONTROLS, PERSONAL PROTECTION

Engineering Controls: Use appropriate engineering control such as process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Where such systems are not effective wear suitable personal protective equipment, which performs satisfactorily and meets OSHA or other recognized standards. Consult with local procedures for selection, training, inspection and maintenance of the personal protective equipment.

Eye/Face Protection: Safety glasses with side shields must be worn at all times. If splash hazard exists, wear chemical splash goggles and/or face shield.

Hand Protection Description: Wear appropriate protective gloves. Consult glove manufacturer's data for permeability data. Preferred glove materials include: polyethylene, neoprene, chlorinated polyethylene, natural rubber (latex), polyvinyl chloride (PVC or vinyl), nitrile/butadiene rubber (nitrile or NBR), ethyl vinyl alcohol laminate (EVAL). Avoid gloves made of polyvinyl alcohol (PVA).

Respiratory Protection: Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced. Comply with the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a positive pressure air supplied respirator if there is any potential for an uncontrolled release, exposure levels are not known, or any other circumstances where air purifying respirators may not provide adequate protection.

Other Protective: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower.

EXPOSURE GUIDELINES

Isopropyl alcohol :

| | |
|------------------|---------------------------------------|
| Guideline ACGIH: | TLV-TWA: 200 ppm TLV-STEL: 400 ppm |
| Guideline OSHA: | PEL-TWA: 400 ppm |

SECTION 9 : PHYSICAL and CHEMICAL PROPERTIES

Physical State Appearance: Liquid presaturated wipes.

| | |
|--|-----------------------------------|
| Odor: | Alcohol-like |
| Odor Threshold: | Not determined. |
| Boiling Point: | 82 - 89°C (180 - 192 °F) |
| Melting Point: | Not determined. |
| Specific Gravity: | 0.872 @ 20°C (68°F) |
| Solubility: | Soluble in water. |
| Vapor Density: | Not determined. |
| Vapor Pressure: | 43.0 hPa (32 mm Hg) @ 20°C (68°F) |
| Percent Volatile: | 100% |
| Evaporation Rate: | Not determined. |
| pH: | Not determined. |
| Viscosity: | Not determined. |
| Coefficient of Water/Oil Distribution: | Not determined. |
| Flash Point: | 20.5 °C (69 °F) |
| Auto Ignition Temperature: | 399 °C (750 °F) |

SECTION 10 : STABILITY and REACTIVITY

| | |
|---------------------------|--|
| Chemical Stability: | Stable under normal temperatures and pressures. |
| Hazardous Polymerization: | Not reported. |
| Conditions to Avoid: | Keep away from heat, ignition sources and incompatible materials. |
| Incompatible Materials: | Aldehydes, halogenated organics, halogens, strong acids, strong oxidizers. |

SECTION 11 : TOXICOLOGICAL INFORMATION

Isopropyl alcohol :

| | |
|-------------|--|
| Eye: | Eye - Rabbit Standard Draize test.: 100 mg Eye - Rabbit Standard Draize test.: 10 mg Eye - Rabbit Standard Draize test.: 100 mg/24H (RTECS) |
| Skin: | Administration onto the skin - Rabbit Standard Draize test.: 500 mg Administration onto the skin - Rabbit LD50: 12800 mg/kg [Details of toxic effects not reported other than lethal dose value] (RTECS) |
| Inhalation: | Inhalation - Rat LC50: 16000 ppm/8H [Details of toxic effects not reported other than lethal dose value] Inhalation - Mouse LC50: 53000 mg/m3 [Behavioral - General anesthetic Lungs, Thorax, or Respiration - Other changes] Inhalation - Rat LC50: 72600 mg/m3 [Behavioral - General anesthetic Lungs, Thorax, or Respiration - Other changes] (RTECS) |
| Ingestion: | Oral - Rat LD50: 5045 mg/kg [Behavioral - Altered sleep time (including change in righting reflex) Behavioral - Somnolence (general depressed activity)] Oral - Mouse LD50: 3600 mg/kg [Behavioral - Altered sleep time (including change in righting reflex) Behavioral - Somnolence (general depressed activity)] Oral - Mouse LD50: 3600 mg/kg [Behavioral - General anesthetic] Oral - Rat LD50: 5000 mg/kg [Behavioral - General anesthetic] (RTECS) |

SECTION 12 : ECOLOGICAL INFORMATION

| | |
|---------------------|--|
| Ecotoxicity: | No ecotoxicity data was found for the product. |
| Environmental Fate: | No environmental information found for this product. |

Isopropyl alcohol :

| | |
|--------------|--|
| Ecotoxicity: | LC50; Species: 1400000 ug/L for 48 hr Crangon crangon (Common Shrimp) LC50; 10000000 ug/L for 24 hr Species: Daphnia magna (Water Flea) |
|--------------|--|

LD50; >5000 mg/L for 24 hr Species: Carassius auratus (goldfish)
 LC50; 11,130 mg/L for 48 hr Species: Pimephales promelas (fathead minnows)

Environmental Fate: Isopropanol is expected to have very high mobility in soil.

Bioaccumulation: Bioconcentration in aquatic organisms is low.

SECTION 13 : DISPOSAL CONSIDERATIONS

Waste Disposal: Consult with the US EPA Guidelines listed in 40 CFR Part 261.3 or the EU Directive 2008/98/EC on waste for the classifications of hazardous waste prior to disposal. Furthermore, consult with your state, local, or provincial waste requirements or guidelines, if applicable, to ensure compliance. Arrange disposal in accordance to the EPA and/or state and local guidelines.

WARNING! Used wipes may catch fire if improperly discarded or stored near ignition sources.

Contaminated Packaging: Do not reuse containers without proper cleaning or reconditioning.

SECTION 14 : TRANSPORT INFORMATION

DOT Shipping Name: Solids Containing Flammable Liquid, n.o.s. (Isopropanol). (Limited Quantity)

DOT UN Number: UN3175 (Limited Quantity)

DOT Hazard Class: 4.1

DOT Packing Group: II

IATA Shipping Name: Solids Containing Flammable Liquid, n.o.s. (Isopropanol).

IATA UN Number: UN3175

IATA Hazard Class: 4.1

IATA Packing Group: II

IMDG UN Number : UN3175 (Limited Quantity)

IMDG Shipping Name : Solids Containing Flammable Liquid, n.o.s. (Isopropanol). (Limited Quantity)

IMDG Hazard Class : 4.1

IMDG Packing Group : II

Marine Pollutant: No.

SECTION 15 : REGULATORY INFORMATION

Canada WHMIS: MacIsaac & Associates
 440 Gloucester Street, Suite 2111
 Ottawa, Ontario, K1R 7T8 Canada
 +1 (613) 236-2250

Isopropyl alcohol :

TSCA Inventory Status: Listed

Canada DSL: Listed

EC Number: 200-661-7

Deionized water :

TSCA Inventory Status: Listed

Canada DSL: Listed

EC Number: 231-791-2

SECTION 16 : ADDITIONAL INFORMATION

HMIS Ratings:

| | |
|---------------------------|---|
| HMIS Health Hazard: | 1 |
| HMIS Fire Hazard: | 3 |
| HMIS Reactivity: | 0 |
| HMIS Personal Protection: | X |

SDS Creation Date: April 30, 2013

SDS Revision Date: November 28, 2018

Copyright© 1996-2018 Enviance. All Rights Reserved.



SAFETY DATA SHEET

Preparation Date: 5/15/2016

Revision Date: 10/20/2016

1. IDENTIFICATION

Product identifier

Product code: SLA3502, SLA3151,
SLA1645, SLA3808
Product Name: ACETONE

Other means of identification

Synonyms:

beta-Ketopropane
Dimethyl ketone
Dimethylformaldehyde
Dimethylketal
Ketone propane Ketone,
dimethyl Methyl ketone
Propanone
Pyroacetic acid
Pyroacetic ether
Acétone (French)
Acetona (Spanish)

CAS #: 67-64-1
RTECS # AL3150000
CI#: Not available

Recommended use of the chemical and restrictions on use

Recommended use: Solvent.
Uses advised against No information available

Supplier: ScienceLab.com, Inc.
2700 Greens Rd., Bldg I, Ste 300
Houston, TX 77032
(281)441-4400

Order Online At: <https://www.sciencelab.com>

Emergency telephone number Chemtrec 1-800-424-9300

2. HAZARDS IDENTIFICATION

Classification

This chemical is considered hazardous according to the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Considered a dangerous substance or mixture according to the Globally Harmonized System (GHS)

| | |
|-----------------------------------|------------|
| Serious eye damage/eye irritation | Category 2 |
| Reproductive toxicity | Category 2 |

Product name: ACETONE

| | |
|--|------------|
| Specific target organ toxicity (single exposure) | Category 3 |
| Flammable liquids | Category 2 |

Label elements

Danger

Hazard statements

Causes serious eye irritation
 Suspected of damaging fertility or the unborn child
 May cause respiratory irritation. May cause drowsiness or dizziness
 Highly flammable liquid and vapor



Hazards not otherwise classified (HNOC)

Not Applicable

Other hazards

Causes mild skin irritation
 Repeated exposure may cause skin dryness or cracking

Precautionary Statements - Prevention

Obtain special instructions before use
 Do not handle until all safety precautions have been read and understood
 Wash face, hands and any exposed skin thoroughly after handling
 Wear protective gloves/protective clothing/eye protection/face protection
 Avoid breathing dust/fume/gas/mist/vapors/spray
 Use only outdoors or in a well-ventilated area
 Keep away from heat/sparks/open flames/hot surfaces. — No smoking
 Keep container tightly closed
 Ground/bond container and receiving equipment
 Use explosion-proof electrical/ventilating/lighting/ ? /equipment
 Use only non-sparking tools
 Take precautionary measures against static discharge
 Keep cool

Precautionary Statements - Response

IF exposed or concerned: Get medical advice/attention
 In case of fire: Use CO₂, dry chemical, or foam to extinguish.
 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.
 IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower
 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

Precautionary Statements - Storage

Store locked up
 Store in a well-ventilated place. Keep container tightly closed

Precautionary Statements - Disposal

Dispose of contents/container to an approved waste disposal plant

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Components | CAS-No. | Weight % |
|-------------------------|---------|----------|
| Acetone 67-64-1 | 67-64-1 | 99-100.5 |
| Benzene 71-43-2 | 71-43-2 | 0-0.003 |
| Formaldehyde 50-00-0 | 50-00-0 | 0-0.002 |

4. FIRST AID MEASURES

First aid measures

General Advice:

National Capital Poison Center in the United States can provide assistance if you have a poison emergency and need to talk to a poison specialist. Call 1-800-222-1222

Skin Contact:

Wash off immediately with soap and plenty of water removing all contaminated clothing and shoes. Get medical attention. If skin irritation persists, call a physician.

Eye Contact:

Flush eyes with water for 15 minutes. Get medical attention.

Inhalation:

Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Get medical attention.

Ingestion:

Do not induce vomiting without medical advice. Never give anything by mouth to an unconscious person. Consult a physician if necessary.

Most important symptoms and effects, both acute and delayed

Symptoms

Moderate eye irritation. Mild skin irritation. Nausea. Vomiting. Central nervous system effects. Dizziness. Drowsiness. Fatigue. Narcosis. Ataxia. Staggering gait. Headache. May affect respiration. Respiratory depression. May cause cardiovascular effects. Hypotension. Weak, rapid pulse or rapid heart rate (Tachycardia). May cause metabolic acidosis.

Indication of any immediate medical attention and special treatment needed

Notes to Physician:

Treat symptomatically

Protection of first-aiders

First-Aid Providers: Avoid exposure to blood or body fluids. Wear gloves and other necessary protective clothing. Dispose of contaminated clothing and equipment as bio-hazardous waste

5. FIRE-FIGHTING MEASURES

Extinguishing Media

Suitable Extinguishing Media:

Carbon dioxide (CO₂). Dry chemical. Alcohol-resistant foam. Water spray.

Unsuitable Extinguishing Media:

Do not use a solid (straight) water stream as it may scatter and spread fire.

Specific hazards arising from the chemical

Hazardous Combustion Products:

Carbon monoxide; carbon dioxide

Specific hazards:

Flammable
 May be ignited by heat, sparks or flames
 Vapor may travel considerable distance to source of ignition and flash back
 Vapors may form explosive mixtures with air
 Most vapors are heavier than air. They will spread along the ground and collect in low or confined areas (sewers, basements, tanks)
 Container explosion may occur under fire conditions or when heated
 Fire may produce irritating, corrosive and/or toxic gases

Special Protective Actions for Firefighters**Specific Methods:**

Water mist may be used to cool closed containers. For larger fires, use water spray or fog. Cool containers with flooding quantities of water until well after fire is out.

Special Protective Equipment for Firefighters:

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear

6. ACCIDENTAL RELEASE MEASURES**Personal precautions, protective equipment and emergency procedures****Personal Precautions:**

Ensure adequate ventilation. Keep people away from and upwind of spill/leak. Avoid contact with skin, eyes and clothing. Use personal protective equipment. Remove all sources of ignition. Pay attention to flashback. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use spark-proof tools and explosion-proof equipment. In case of large spill, water spray or vapor suppressing foam may be used to reduce vapors, but may not prevent ignition in closed spaces.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Prevent product from entering drains. Prevent entry into waterways, sewers, basements or confined areas.

Methods and material for containment and cleaning up**Methods for containment**

Stop leak if you can do it without risk. Absorb spill with inert material (e.g. vermiculite, dry sand or earth). In case of large spill, dike if needed. Dike far ahead of liquid spill for later disposal.

Methods for cleaning up

Use appropriate tools to put the spilled material in a suitable chemical waste disposal container. Use only non-sparking tools. Clean contaminated surface thoroughly.

7. HANDLING AND STORAGE**Precautions for safe handling****Technical Measures/Precautions:**

Provide sufficient air exchange and/or exhaust in work rooms. Remove all sources of ignition. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Keep away from incompatible materials.

Safe Handling Advice

Wear personal protective equipment. Use only in well-ventilated areas. Avoid contact with skin, eyes and clothing. Keep away from heat and sources of ignition. Do not breathe vapors or spray mist. Do not ingest. When using do not smoke. Handle in accordance with good industrial hygiene and safety practice.

Conditions for safe storage, including any incompatibilities

Technical Measures/Storage Conditions:

Keep container tightly closed in a dry and well-ventilated place. Store at room temperature in the original container. Keep away from heat and sources of ignition. Store in a segregated and approved area. Store away from incompatible materials.

Incompatible Materials:

Oxidizing agents. Reducing agents. Bases. Acids. activated carbon. chromium trioxide . dioxygen difluoride + carbon dioxide . Potassium dichromate or Sodium dichromate. Potassium t-butoxide. Hydrogen peroxide. Chromic anhydride. Chromyl chloride. Hexachloromelamine. Nitrosyl chloride + Platinum. Nitrosyl chloride. Bromine trifluoride. Thiodiglycol. 2,4,6-trichloro-1,3,5-triazine + water. 2-Methyl-1,3-butadiene. Chloroform.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

National occupational exposure limits

United States

| Components | OSHA | NIOSH | ACGIH | AIHA WHEEL |
|-------------------------|---|--|-----------------------------|------------|
| Acetone 67-64-1 | 1000 ppm TWA 2400 mg/m ³ TWA | 250 ppm TWA 590 mg/m ³ TWA | 750 ppm STEL 500 ppm TWA | None |
| Benzene 71-43-2 | 10 ppm TWA 1 ppm TWA 25 ppm Ceiling 5 ppm STEL | 0.1 ppm TWA 1 ppm STEL | 2.5 ppm STEL 0.5 ppm TWA | None |
| Formaldehyde 50-00-0 | 0.75 ppm TWA 2 ppm STEL | 0.016 ppm TWA 0.1 ppm Ceiling 15 min | 0.3 ppm Ceiling | None |

Canada

| Components | Alberta | British Columbia | Ontario | Quebec |
|-------------------------|---|------------------------------|---------------------------------|---|
| Acetone 67-64-1 | 500 ppm TWA 1200 mg/m ³ TWA 750 ppm STEL 1800 mg/m ³ STEL | 250 ppm TWA 500 ppm STEL | 500 ppm TWA 750 ppm STEL | 500 ppm TWA EV 1190 mg/m ³ TWA EV 1000 ppm STEV 2380 mg/m ³ STEV |
| Benzene 71-43-2 | 0.5 ppm TWA 1.6 mg/m ³ TWA 2.5 ppm STEL 8 mg/m ³ STEL | 0.5 ppm TWA 2.5 ppm STEL | 0.5 ppm TWA | 1 ppm TWA EV 3 mg/m ³ TWA EV 5 ppm STEV 15.5 mg/m ³ STEV |
| Formaldehyde 50-00-0 | 1 ppm Ceiling 1.3 mg/m ³ Ceiling 0.75 ppm TWA 0.9 mg/m ³ TWA | 0.3 ppm TWA 1 ppm Ceiling | 1.5 ppm Ceiling 1.0 ppm STEL | 2 ppm Ceiling 3 mg/m ³ Ceiling |

Australia and Mexico

| Components | Australia | Mexico |
|-------------------------|--|--|
| Acetone 67-64-1 | 1000 ppm STEL 2375 mg/m ³ STEL 1185 mg/m ³ TWA 500 ppm TWA | 1000 ppm TWA 2400 mg/m ³ TWA 1260 ppm STEL 3000 mg/m ³ STEL |
| Benzene 71-43-2 | 1.0 ppm//3.2 mg/m ³ TWA confirmed carcinogen | 1 ppm TWA 3.2 mg/m ³ TWA 5 ppm STEL 16 mg/m ³ STEL |
| Formaldehyde 50-00-0 | 1 ppm/1.2 mg/m ³ TWA 2 ppm/2.5 mg/m ³ STEL probable carcinogen | 2 ppm Ceiling 3 mg/m ³ Ceiling |

Appropriate engineering controls

Engineering measures to reduce exposure:

Ensure adequate ventilation. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors and mist below their respective threshold limit value.

Individual protection measures, such as personal protective equipment**Personal Protective Equipment**

| | |
|----------------------------------|--|
| Eye protection: | Goggles |
| Skin and body protection: | Chemical resistant apron. Long sleeved clothing. Gloves. |
| Respiratory protection: | Vapor respirator. Be sure to use an approved/certified respirator or equivalent. |
| Hygiene measures: | Avoid contact with skin, eyes and clothing. When using, do not eat, drink or smoke. Wash hands before breaks and immediately after handling the product. |

9. PHYSICAL AND CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Physical state: Liquid | Appearance: No information available | Color: Clear. Colorless. |
| Odor: Fruity. Mint-like. Fragrant. Ethereal. | Taste: Pungent. Sweetish. | Formula: C3-H6-O |
| Molecular/Formula weight: 58.08 | Flammability: No information available | Flash point (°C): -20 °C |
| Flashpoint (°C/°F): -20 to -17 °C/-4 to 1.4 °F -9.4 to -9 °C/15.1 to 15.8 °F | Flash Point Tested according to: Closed cup Open cup | Autoignition Temperature (°C/°F): 465 °C/869 °F |
| Lower Explosion Limit (%): 2.5-2.6% | Upper Explosion Limit (%): 12.8% | pH: No information available |
| Melting point/range(°C/°F): -94.7 to -95.4 °C/-138.46 to -139.72 | Decomposition temperature(°C/°F): No information available | Boiling point/range(°C/°F): 56.2 °C/133.2 °F |
| Bulk density: No information available | Density (g/cm3): 0.780 @ 30 °C 0.784 @ 25 °C 0.79 @ 20 °C | Specific gravity: 0.79 @ 20 °C |
| Vapor pressure @ 20°C (kPa): 24 | Evaporation rate: 5.6 (Butyl acetate = 1) | Vapor density: 2.0 |
| VOC content (g/L): 780-790 | Odor threshold (ppm): 62-140 | Partition coefficient (n-octanol/water): - 0.24 |
| Viscosity: No information available | Miscibility: Miscible with water Miscible with Ether Miscible with Chloroform Miscible with Benzene Miscible with alcohol | Solubility: No information available |

10. STABILITY AND REACTIVITY**Reactivity**

10. STABILITY AND REACTIVITY

Reactive with oxidizing agents

Reacts with reducing agents

Reactive with acids

Reacts with strong bases

Acetone ignites on contact with activated carbon, chromium trioxide, dioxygen difluoride + carbon dioxide, potassium-tert-butoxide, sulfuric acid + potassium dichromate

Acetone may form explosive mixtures with chromic anhydride, chromyl chloride, hexachloromelamine, hydrogen peroxide, nitric acid and acetic acid, nitric acid and sulfuric acid, nitrosyl chloride, nitrosyl chloride + platinum, nitrosyl perchlorate, nitryl perchlorate, permonosulfuric acid, potassium tert-butoxide, thiodiglycol, chloroform, bromine trifluoride, thiotriazyl perchlorate, 2,4,6-trichloro-1,3,5-triazine + water, 2-methyl-1,3-butadiene, peroxomonosulfuric acid

An explosion occurred during an attempt to prepare bromoform from acetone by the haloform reaction

Chloroform and acetone interact vigorously and exothermally in presence of solid potassium hydroxide or calcium hydroxide to form 1,1,1-trichloro-2-hydroxy-2-methylpropane

Chemical stability

Stability: Stable under recommended storage conditions

Possibility of Hazardous Reactions: Hazardous polymerization does not occur

Conditions to avoid: Heat. Ignition sources. Incompatible materials.

Incompatible Materials: Oxidizing agents. Reducing agents. Bases. Acids. activated carbon. chromium trioxide . dioxygen difluoride + carbon dioxide . Potassium dichromate or Sodium dichromate. Potassium t-butoxide. Hydrogen peroxide. Chromic anhydride. Chromyl chloride. Hexachloromelamine. Nitrosyl chloride + Platinum. Nitrosyl chloride. Bromine trifluoride. Thiodiglycol. 2,4,6-trichloro-1,3,5-triazine + water. 2-Methyl-1,3-butadiene. Chloroform.

Hazardous decomposition products: Carbon monoxide. Carbon dioxide.

Other Information

Corrosivity: No information available

Special Remarks on Corrosivity: No information available

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Principal Routes of Exposure:

Ingestion. Skin. Eyes. Inhalation.

Acute Toxicity

Component Information

Acetone - 67-64-1

LD50/oral/rat = 5800 mg/kg Oral LD50 Rat

LD50/oral/mouse = 3 gm/kg

LD50/dermal/rabbit = No information available

LD50/dermal/rat = No information available

LC50/inhalation/rat = 50100 mg/m³ Inhalation LC50 Rat 8 h

LC50/inhalation/mouse = 44 gm/m³/4H

Other LD50 or LC50 information = >9400 uL/kg LD50 Dermal Guinea Pig
5340 mg/kg LD50 Oral Rabbit

Benzene - 71-43-2

LD50/oral/rat = 1800 mg/kg (LOLI)
930-6400 mg/kg (RTECS)
810 mg/kg Oral LD50 Rat (LOLI)
LD50/oral/mouse = 4700 mg/kg
LD50/dermal/rabbit = >9400 mg/kg Dermal LD50 Rabbit (RTECS)
>8200 mg/kg (LOLI)
LD50/dermal/rat = No information available
LC50/inhalation/rat = 13050 - 16000 ppm Inhalation LC50 Rat 4 h (EU Commission IUCLID dataset)
44.66 mg/L Inhalation LC50 Rat 4 h (LOLI)
LC50/inhalation/mouse = No information available
Other LD50 or LC50 information = >9400 uL/kg LD50 Dermal Guinea Pig

Formaldehyde - 50-00-0

LD50/oral/rat = 500 mg/kg Oral LD50 Rat (RTECS and LOLI)
100 mg/kg (RTECS)
LD50/oral/mouse = 500 mg/kg (RTECS)
385 mg/kg (RTECS)
42 mg/kg (RTECS)
LD50/dermal/rabbit = 270 mg/kg Dermal LD50 Rabbit
LD50/dermal/rat = No information available
LC50/inhalation/rat = 0.578 mg/L Inhalation LC50 Rat 4 h
LC50/inhalation/mouse = No information available
Other LD50 or LC50 information = 260 mg/kg oral LD50 Guinea Pig

Product Information

LD50/oral/rat =
VALUE- Acute Tox Oral = 5800

LD50/oral/mouse =
Value - Acute Tox Oral = 3000mg/kg

LD50/dermal/rabbit
VALUE-Acute Tox Dermal = 20000mg/kg

LD50/dermal/rat
VALUE -Acute Tox Dermal = No information available

LC50/inhalation/rat
VALUE-Vapor = 76mg/l (4-hr)
VALUE-Gas = No information available
VALUE-Dust/Mist = No information available

LC50/Inhalation/mouse
VALUE-Vapor = No information available
VALUE - Gas = No information available
VALUE - Dust/Mist = No information available

Symptoms

Skin Contact: May cause skin irritation. Mildly to moderately irritating to the skin. It may be absorbed through the skin. If absorbed through skin it may cause systemic effects with symptoms similar to those of ingestion.

Eye Contact: Causes eye irritation. Moderately irritating to the eyes. May cause corneal injury.

Inhalation Irritating to respiratory system. May cause conjunctival irritation. May cause nausea, vomiting. May cause loss of appetite. May affect the brain. May affect the kidneys. May cause muscle weakness. May affect respiration (respiratory depression). Inhalation of high concentrations may cause central nervous system effects characterized by headache, dizziness, unsteady gait, drowsiness, lethargy, sleepiness lightheadness, fainting, narcosis, confusion, loss of coordination, lassitude, speech abnormalities, tremor, unconsciousness, coma. May cause metabolic acidosis. May cause other symptoms similar to those of ingestion.

Ingestion May cause digestive (gastrointestinal) tract irritation. Ingestion may cause nausea, vomiting. It may affect metabolism (ketosis/ketonemia/ketonuria). May cause hyperglycemia. May affect liver . May affect respiration. May affect the cardiovascular system (hypotension). May affect the cardiovascular system (weak rapid pulse, tachycardia). May cause metabolic acidosis. May affect urinary system (kidneys). It may affect the joints. It may affect the skeletal muscles. It may affect behavior/central nervous system (depression, headache, tremors, ataxia, hyperesthesia, stupor, sedation, fatigue, excitement, seizures, coma).

Aspiration hazard No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Chronic Toxicity Prolonged or repeated skin contact may cause defatting and drying of the skin, and brittle nails. Prolonged or repeated inhalation may affect the brain. Prolonged or repeated inhalation may affect the blood (changes in red blood cell count, granulocytopenia). Prolonged or repeated inhalation may affect the cardiovascular system. Prolonged or repeated inhalation may affect the thyroid (evidence of thyroid hyperfunction). Prolonged or repeated ingestion may affect the spleen. Prolonged or repeated ingestion may affect the bladder. Prolonged or repeated ingestion may affect the liver, and kidneys. Prolonged or repeated ingestion may affect the blood (normocytic anemia, macrocytosis). Prolonged or repeated inhalation may cause eye and throat irritation and bronchitis. Prolonged or repeated inhalation may cause nausea, gastritis, loss of appetite, and weight loss. Prolonged or repeated inhalation may cause central nervous system effects such as weakness, dizziness, drowsiness, and vertigo.

Sensitization: No information available

Mutagenic Effects: May affect genetic material
Sex Chromosome Loss and Nondisjunction in Saccharomyces cerevisiae (yeast)
Cytogenetic analysis (Hamster fibroblast)

Carcinogenic effects: Not classifiable as a human carcinogen.

| Components | IARC | ACGIH - Carcinogens | NTP | OSHA HCS - Carcinogens | Australia - Notifiable Carcinogenic Substances | Australia - Prohibited Carcinogenic Substances |
|------------|------------|---|------------|------------------------|--|--|
| Acetone | Not listed | A4 Not Classifiable as a Human Carcinogen | Not listed | Not listed | Not listed | Not listed |

| | | | | | | |
|--------------|--|-------------------------------|------------------------|---|--|------------|
| Benzene | Group 1 - Carcinogenic to Humans - Monograph 100F [2012] Supplement 7 [1987] Monograph 29 [1982] | A1 Confirmed Human Carcinogen | Known Human Carcinogen | Present Cancer hazard - see 29 CFR 1910.1028 | Present when used in feedstock containing more than 50% of Benzene by volume | Not listed |
| Formaldehyde | Group 1 - Carcinogenic to Humans - Monograph 100F [2012] Monograph 88 [2006] Monograph 62 [1995] Supplement 7 [1987] | A2 Suspected Human Carcinogen | Known Human Carcinogen | Present see 29 CFR 1910.1048 | Not listed | Not listed |

ACGIH (American Conference of Governmental Industrial Hygienists)
IARC (International Agency for Research on Cancer)
NTP (National Toxicology Program)
OSHA (Occupational Safety and Health Administration of the US Department of Labor)

Reproductive toxicity Suspected of damaging fertility or the unborn child

Reproductive Effects: No information available
Developmental Effects: Possible risk of harm to the unborn child
Teratogenic Effects: No information available

Specific Target Organ Toxicity

STOT - single exposure Respiratory system. central nervous system.
STOT - repeated exposure No information available
Target Organs: Skin. Central nervous system. Peripheral nervous system. Kidneys. Liver.

12. ECOLOGICAL INFORMATION

Ecotoxicity

Ecotoxicity effects: Aquatic environment.

Acetone - 67-64-1

Freshwater Fish Species Data: 4.74 - 6.33 mL/L LC50 *Oncorhynchus mykiss* 96 h 1
8300 mg/L LC50 *Lepomis macrochirus* 96 h 1
6210 - 8120 mg/L LC50 *Pimephales promelas* 96 h static 1
Water Flea Data: 10294 - 17704 mg/L EC50 *Daphnia magna* 48 h
12600 - 12700 mg/L EC50 *Daphnia magna* 48 h

Benzene - 71-43-2

Freshwater Algae Data: 29 mg/L EC50 *Pseudokirchneriella subcapitata* 72 h
Freshwater Fish Species Data: 10.7-14.7 mg/L LC50 *Pimephales promelas* 96 h flow-through 1
22330-41160 µg/L LC50 *Pimephales promelas* 96 h static 1
70000-142000 µg/L LC50 *Lepomis macrochirus* 96 h static 1
22.49 mg/L LC50 *Lepomis macrochirus* 96 h static 1
28.6 mg/L LC50 *Poecilia reticulata* 96 h static 1
5.3 mg/L LC50 *Oncorhynchus mykiss* 96 h flow-through 1

Acetone - 67-64-1

Water Flea Data: 8.76 - 15.6 mg/L EC50 Daphnia magna 48 h
10 mg/L EC50 Daphnia magna 48 h

Formaldehyde - 50-00-0

Freshwater Fish Species Data: 0.032 - 0.226 mL/L LC50 Oncorhynchus mykiss 96 h flow-through 1
100 - 136 mg/L LC50 Oncorhynchus mykiss 96 h static 1
22.6 - 25.7 mg/L LC50 Pimephales promelas 96 h flow-through 1
23.2 - 29.7 mg/L LC50 Pimephales promelas 96 h static 1
1510 µg/L LC50 Lepomis macrochirus 96 h static 1
41 mg/L LC50 Brachydanio rerio 96 h static 1

Water Flea Data: 11.3 - 18 mg/L EC50 Daphnia magna 48 h
2 mg/L LC50 Daphnia magna 48 h

Persistence and degradability: No information available

Bioaccumulative potential: No information available

Mobility: No information available

13. DISPOSAL CONSIDERATIONS

Disposal Methods

Waste from residues / unused products:

Waste must be disposed of in accordance with Federal, State and Local regulation.

Contaminated packaging:

Empty containers should be taken for local recycling, recovery or waste disposal

| Components | RCRA - F Series Wastes | RCRA - K Series Wastes | RCRA - P Series Wastes | RCRA - U Series Wastes |
|--------------|------------------------|------------------------|------------------------|-----------------------------------|
| Acetone | None | None | None | U002 Ignitable waste |
| Benzene | None | None | None | U019 Ignitable waste, Toxic waste |
| Formaldehyde | None | None | None | U122 |

14. TRANSPORT INFORMATION

DOT

UN-No: UN1090
Proper Shipping Name: Acetone
Hazard Class: 3
Subsidiary Risk: No information available
Packing Group: II
ERG No: 127
Marine Pollutant: No data available
DOT RQ (lbs): 5000 lbs./2270 kg
Special Provisions: No Information available
Symbol(s): R5

TDG (Canada)

UN-No: UN1090
Proper Shipping Name: Acetone
Hazard Class: 3

Product name: ACETONE

14. TRANSPORT INFORMATION

Subsidiary Risk: No information available
Packing Group: II
Marine Pollutant: No Information available

ADR

UN-No: UN1090
Proper Shipping Name: Acetone
Hazard Class: 3
Packing Group: II
Subsidiary Risk: No information available

IMO / IMDG

UN-No: UN1090
Proper Shipping Name: Acetone (Acetone solutions)
Hazard Class: 3
Subsidiary Risk: No information available
Packing Group: II
Marine Pollutant: No information available
EMS: F-E

RID

UN-No: UN1090
Proper Shipping Name: Acetone
Hazard Class: 3
Subsidiary Risk: 3
Packing Group: II

ICAO

UN-No: UN1090
Proper Shipping Name: Acetone
Hazard Class: 3
Subsidiary Risk: No information available
Packing Group: II

IATA

UN-No: UN1090
Proper Shipping Name: Acetone
Hazard Class: 3
Subsidiary Risk: No information available
Packing Group: II
ERG Code: 3H
Special Provisions: No information available

15. REGULATORY INFORMATION

International Inventories

| Components | U.S. TSCA | KOREA KECL | Philippines (PICCS) | Japan ENCS | CHINA | Australia (AICS) | EINECS-No. |
|--------------|-----------|------------------|---------------------|-----------------|---------|------------------|-------------------|
| Acetone | Present | Present KE-29367 | Present | Present (2)-542 | Present | Present | Present 200-662-2 |
| Benzene | Present | Present KE-02150 | Present | Present (3)-1 | Present | Present | Present 200-753-7 |
| Formaldehyde | Present | Present KE-17074 | Present | Present (2)-482 | Present | Present | Present 200-001-8 |

U.S. Regulations

Product name: ACETONE

Acetone

Massachusetts RTK: Present
New Jersey RTK Hazardous Substance List: Present (sn 006)
New Jersey - Discharge Prevention - List of Hazardous Substances: Present
Pennsylvania RTK: Environmental hazard
Pennsylvania RTK - Environmental Hazard List Present
Minnesota - Hazardous Substance List: Present
New York Release Reporting - List of Hazardous Substances:
= 1 lb RQ (land/water)
= 5000 lb RQ (air)
Louisiana Reportable Quantity List for Pollutants: Listed
California Directors List of Hazardous Substances: Present

FDA - Direct Food Additives 21 CFR 173.210
FDA - 21 CFR - Total Food Additives 173.210 175.105 175.320 176.180 176.300 177.2600 73.1 73.30 73.345 73.615

Benzene

Massachusetts RTK: Present
New Jersey RTK Hazardous Substance List: 0197
New Jersey (EHS) List: 0197 500 lb TPQ
New Jersey - Discharge Prevention - List of Hazardous Substances: Present
Pennsylvania RTK: Environmental hazard
Special hazardous substance
Pennsylvania RTK - Environmental Hazard List Present
Pennsylvania RTK - Special Hazardous Substances Present
Michigan - Critical Materials List: Present
Minnesota - Hazardous Substance List: Present
New York Release Reporting - List of Hazardous Substances:
10 lb RQ
1 lb RQ
Connecticut - Carcinogenic Substances: Present
Louisiana Reportable Quantity List for Pollutants: 10lbfinal RQreceives an adjustable RQ of 10 lbs based on potential carcinogenicity in August 14, 1989 final rule
4.54kgfinal RQreceives an adjustable RQ of 10 lbs based on potential carcinogenicity in August 14, 1989 final rule
California Directors List of Hazardous Substances: Present

FDA - 21 CFR - Total Food Additives 172.560 175.105

Formaldehyde

Massachusetts RTK: Present
Massachusetts EHS: carcinogen; extraordinarily hazardous
New Jersey RTK Hazardous Substance List: 0946
New Jersey (EHS) List: 0946 500 lb TPQ
New Jersey - Discharge Prevention - List of Hazardous Substances: Present
New Jersey TCPA - EHS: 175lbTQ
15000lbTQ
Pennsylvania RTK: Environmental hazard
Special hazardous substance
Pennsylvania RTK - Environmental Hazard List Present
Pennsylvania RTK - Special Hazardous Substances Present
Michigan PSM HHC: = 1000 lb TQ
Minnesota - Hazardous Substance List: Present
New York Release Reporting - List of Hazardous Substances:
100 lb RQ
1 lb RQ
Louisiana Reportable Quantity List for Pollutants: 100lbfinal RQ
45.4kgfinal RQ
California Directors List of Hazardous Substances: Present

FDA - Direct Food Additives 21 CFR 173.340
FDA - 21 CFR - Total Food Additives 173.340 175.105 175.210 175.300 176.170 176.180 176.200 177.1200 177.2410
178.3120 573.460

California Prop. 65: Safe Drinking Water and Toxic Enforcement Act of 1986.

Chemicals Known to the State of California to Cause Cancer:

WARNING: This product contains a chemical known to the State of California to cause cancer. (See table below)

Chemicals Known to the State of California to Cause Reproductive Toxicity:

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm (See table below)

| Components | Carcinogen | Developmental Toxicity | Male Reproductive Toxicity | Female Reproductive Toxicity: |
|--------------|------------|------------------------|----------------------------|-------------------------------|
| Acetone | Not Listed | Not Listed | Not Listed | Not Listed |
| Benzene | carcinogen | developmental toxicity | male reproductive toxicity | Not Listed |
| Formaldehyde | carcinogen | Not Listed | Not Listed | Not Listed |

CERCLA/SARA

| Components | CERCLA - Hazardous Substances and their Reportable Quantities | Section 302 Extremely Hazardous Substances and TPQs | Section 302 Extremely Hazardous Substances and RQs | Section 313 - Chemical Category | Section 313 - Reporting <i>de minimis</i> |
|--------------|---|---|--|---------------------------------|---|
| Acetone | 5000 lb final RQ 2270 kg final RQ | None | None | None | None |
| Benzene | 10 lb final RQ 4.54 kg final RQ | None | None | None | 0.1 % de minimis concentration |
| Formaldehyde | 100 lb final RQ 45.4 kg final RQ | 100 lb EPCRA RQ | None | None | 0.1 % de minimis concentration |

U.S. TSCA

| Components | TSCA Section 5(a)2 - Chemicals With Significant New Use Rules (SNURS) | TSCA 8(d) -Health and Safety Reporting |
|--------------|---|--|
| Acetone | Not Applicable | Not Applicable |
| Benzene | Not Applicable | Not Applicable |
| Formaldehyde | Not Applicable | Not Applicable |

Canada

WHMIS hazard class:

B2 Flammable liquid
D2B Toxic materials

Acetone

B2 D2B

Benzene

B2 D2A D2B

Formaldehyde

A B1 D1A D2A D2B

B3 D1A D2A D2B E regulated under Formol

Canada Controlled Products Regulation:

This product has been classified according to the hazard criteria of the CPR (Controlled Products Regulation) and the MSDS contains all of the information required by the CPR.

| Components | WHMIS Ingredient Disclosure List - |
|--------------|------------------------------------|
| Acetone | 1 % |
| Benzene | 0.1 % |
| Formaldehyde | 0.1 % |

Inventory

| Components | Canada (DSL) | Canada (NDSL) |
|--------------|--------------|---------------|
| Acetone | Present | Not Listed |
| Benzene | Present | Not Listed |
| Formaldehyde | Present | Not Listed |

| Components | CEPA Schedule I - Toxic Substances |
|------------|------------------------------------|
| Acetone | Not listed |

| | |
|--------------|---------|
| Benzene | Present |
| Formaldehyde | Present |

| Components | CEPA - 2010 Greenhouse Gases Subject to Mandatory Reporting |
|--------------|---|
| Acetone | Not listed |
| Benzene | Not listed |
| Formaldehyde | Not listed |

EU Classification

R-phrases

- R11 - Highly flammable.
- R36 - Irritating to eyes.
- R66 - Repeated exposure may cause skin dryness or cracking.
- R67 - Vapors may cause drowsiness and dizziness.

S-phrases

- S9 - Keep container in a well-ventilated place.
- S16 - Keep away from sources of ignition - No smoking.
- S26 - In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

| Components | Classification | Concentration Limits: | Safety Phrases |
|--------------|--|---|------------------------------|
| Acetone | F; R11 Xi; R36 R66 R67 | No information | S2 S9 S16 S26 |
| Benzene | F; R11 Xi; R36/38 Carc.Cat.1; R45 Muta.Cat.2; R46 T; R48/23/24/25 Xn; R65 | No information | S53 S45 |
| Formaldehyde | C;R34 Carc. Cat.3;R40 R23 R43 T;R23/24/25 | 0.2%≤C<1% Xi;R43 1%≤C<5% Xn;R40-43 25%≤C T;R23/24/25-34-40-43 5%≤C<25% Xn;R20/21/22-36/37/38-40-43 | S(1/2)-S26-S36/37/39-S45-S51 |

The product is classified in accordance with Annex VI to Directive 67/548/EEC

Indication of danger:

- Xi - Irritant.
- F - Highly flammable.



16. OTHER INFORMATION

Preparation Date: 5/15/2016
Revision Date: 10/20/2016

Disclaimer:

All chemicals may pose unknown hazards and should be used with caution. This Safety Data Sheet (SDS) applies only to the material as packaged. If this product is combined with other materials, deteriorates, or becomes contaminated, it may pose hazards not mentioned in this SDS. The physical properties reported in this SDS are obtained from the literature and do not constitute product specifications. Information contained herein does not constitute a warranty, whether expressed or implied, as to the safety, merchantability or fitness of the goods for a particular purpose.

ScienceLab.com, Inc. assumes no responsibility for results obtained or for incidental or consequential damages, including lost profits, arising from the use of these data. No warranty against infringement of any patent, copyright or trademark is made or implied. It shall be the user's responsibility to develop proper methods of handling and personal protection based on the actual conditions of use. While this SDS is based on technical data judged to be reliable, ScienceLab.com, Inc. assumes no responsibility for the completeness or accuracy of the information contained herein.

End of Safety Data Sheet

SAFETY DATA SHEET

Creation Date 27-Apr-2009

Revision Date 14-Feb-2020

Revision Number 2

1. Identification

Product Name Methanol

Cat No. : 31721

CAS-No 67-56-1
Synonyms Methyl alcohol

Recommended Use Laboratory chemicals.
Uses advised against .
Details of the supplier of the safety data sheet

Company

Alfa Aesar
Thermo Fisher Scientific Chemicals, Inc.
30 Bond Street
Ward Hill, MA 01835-8099
Tel: 800-343-0660
Fax: 800-322-4757
Email: tech@alfa.com
www.alfa.com

Emergency Telephone Number

During normal business hours (Monday-Friday, 8am-7pm EST), call (800) 343-0660.
After normal business hours, call Carechem 24 at (866) 928-0789.

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

| | |
|--|------------|
| Flammable liquids | Category 2 |
| Acute oral toxicity | Category 3 |
| Acute dermal toxicity | Category 3 |
| Acute Inhalation Toxicity - Vapors | Category 3 |
| Specific target organ toxicity (single exposure) | Category 1 |
| Target Organs - Optic nerve, Central nervous system (CNS). | |
| Specific target organ toxicity - (repeated exposure) | Category 1 |
| Target Organs - Kidney, Liver, spleen, Blood. | |

Label Elements

Signal Word

Danger

Hazard Statements

Highly flammable liquid and vapor

Causes damage to organs
 Causes damage to organs through prolonged or repeated exposure
 Toxic if swallowed, in contact with skin or if inhaled



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling
 Do not eat, drink or smoke when using this product
 Wear protective gloves/protective clothing/eye protection/face protection
 Use only outdoors or in a well-ventilated area
 Do not breathe dust/fume/gas/mist/vapors/spray
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking
 Keep container tightly closed
 Ground/bond container and receiving equipment
 Use explosion-proof electrical/ventilating/lighting/equipment
 Use only non-sparking tools
 Take precautionary measures against static discharge
 Keep cool

Response

IF exposed: Call a POISON CENTER or doctor/physician

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
 Call a POISON CENTER or doctor/physician

Skin

Call a POISON CENTER or doctor/physician if you feel unwell
 Wash contaminated clothing before reuse
 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician
 Rinse mouth

Fire

In case of fire: Use CO₂, dry chemical, or foam for extinction

Storage

Store locked up
 Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Other hazards

Poison, may be fatal or cause blindness if swallowed. Vapor harmful. CANNOT BE MADE NON-POISONOUS.
 WARNING. Reproductive Harm - <https://www.p65warnings.ca.gov/>.

3. Composition/Information on Ingredients

| Component | CAS-No | Weight % |
|----------------|---------|----------|
| Methyl alcohol | 67-56-1 | >95 |

4. First-aid measures

| | |
|--|---|
| General Advice | Immediate medical attention is required. Show this safety data sheet to the doctor in attendance. |
| Eye Contact | Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Immediate medical attention is required. |
| Skin Contact | Wash off immediately with plenty of water for at least 15 minutes. Immediate medical attention is required. |
| Inhalation | Remove to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Immediate medical attention is required. |
| Ingestion | Do NOT induce vomiting. Call a physician or poison control center immediately. |
| Most important symptoms and effects | Difficulty in breathing. May cause blindness: Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting |
| Notes to Physician | Treat symptomatically |

5. Fire-fighting measures

| | |
|---|---|
| Suitable Extinguishing Media | Water spray, carbon dioxide (CO ₂), dry chemical, alcohol-resistant foam. Water mist may be used to cool closed containers. |
| Unsuitable Extinguishing Media | Water may be ineffective |
| Flash Point | 9.7 °C / 49.5 °F |
| Method - | No information available |
| Autoignition Temperature | 455 °C / 851 °F |
| Explosion Limits | |
| Upper | 31.00 vol % |
| Lower | 6.0 vol % |
| Sensitivity to Mechanical Impact | No information available |
| Sensitivity to Static Discharge | No information available |

Specific Hazards Arising from the Chemical

Flammable. Risk of ignition. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated. Vapors may form explosive mixtures with air.

Hazardous Combustion Products

Carbon monoxide (CO). Formaldehyde.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPA

| | | | |
|--------------------|--------------------------|-------------------------|--------------------------------|
| Health 1 | Flammability 3 | Instability 0 | Physical hazards N/A |
|--------------------|--------------------------|-------------------------|--------------------------------|

6. Accidental release measures

| | |
|----------------------------------|--|
| Personal Precautions | Evacuate personnel to safe areas. Keep people away from and upwind of spill/leak. Use personal protective equipment as required. Ensure adequate ventilation. Remove all sources of ignition. Take precautionary measures against static discharges. |
| Environmental Precautions | Should not be released into the environment. See Section 12 for additional Ecological |

Information.

Methods for Containment and Clean Up Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Handling Wear personal protective equipment/face protection. Do not breathe mist/vapors/spray. Do not get in eyes, on skin, or on clothing. Use only under a chemical fume hood. Do not ingest. If swallowed then seek immediate medical assistance. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Take precautionary measures against static discharges.

Storage Keep container tightly closed in a dry and well-ventilated place. Keep away from open flames, hot surfaces and sources of ignition. Flammables area.

8. Exposure controls / personal protection

Exposure Guidelines

| Component | ACGIH TLV | OSHA PEL | NIOSH IDLH | Mexico OEL (TWA) |
|----------------|---------------------------------------|--|--|-------------------------------|
| Methyl alcohol | TWA: 200 ppm STEL: 250 ppm Skin | (Vacated) TWA: 200 ppm (Vacated) TWA: 260 mg/m ³ (Vacated) STEL: 250 ppm (Vacated) STEL: 325 mg/m ³ Skin TWA: 200 ppm TWA: 260 mg/m ³ | IDLH: 6000 ppm TWA: 200 ppm TWA: 260 mg/m ³ STEL: 250 ppm STEL: 325 mg/m ³ | TWA: 200 ppm STEL: 250 ppm |

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures Use only under a chemical fume hood. Use explosion-proof electrical/ventilating/lighting/equipment. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures When using do not eat, drink or smoke. Provide regular cleaning of equipment, work area and clothing.

9. Physical and chemical properties

| | |
|-----------------------|--------------------------|
| Physical State | Liquid |
| Appearance | Colorless |
| Odor | Alcohol-like |
| Odor Threshold | No information available |

| | |
|--|-------------------------------|
| pH | Not applicable |
| Melting Point/Range | -98 °C / -144.4 °F |
| Boiling Point/Range | 64.7 °C / 148.5 °F @ 760 mmHg |
| Flash Point | 9.7 °C / 49.5 °F |
| Evaporation Rate | 5.2 (ether = 1) |
| Flammability (solid,gas) | Not applicable |
| Flammability or explosive limits | |
| Upper | 31.00 vol % |
| Lower | 6.0 vol % |
| Vapor Pressure | 128 hPa @ 20 °C |
| Vapor Density | 1.11 |
| Specific Gravity | 0.791 |
| Solubility | Miscible with water |
| Partition coefficient; n-octanol/water | No data available |
| Autoignition Temperature | 455 °C / 851 °F |
| Decomposition Temperature | No information available |
| Viscosity | 0.55 cP at 20 °C |
| Molecular Formula | C H4 O |
| Molecular Weight | 32.04 |
| VOC Content(%) | 100 |
| Surface tension | 0.02255 N/m @ 20°C |

10. Stability and reactivity

| | |
|---|---|
| Reactive Hazard | None known, based on information available |
| Stability | Stable under normal conditions. |
| Conditions to Avoid | Incompatible products. Heat, flames and sparks. Keep away from open flames, hot surfaces and sources of ignition. |
| Incompatible Materials | Strong oxidizing agents, Strong acids, Acid anhydrides, Acid chlorides, Strong bases, Metals, Peroxides |
| Hazardous Decomposition Products | Carbon monoxide (CO), Formaldehyde |
| Hazardous Polymerization | Hazardous polymerization does not occur. |
| Hazardous Reactions | None under normal processing. |

11. Toxicological information

Acute Toxicity

Product Information

Component Information

| Component | LD50 Oral | LD50 Dermal | LC50 Inhalation |
|----------------|----------------------------------|-------------------------------|-------------------------------|
| Methyl alcohol | LD50 > 1187 – 2769 mg/kg (Rat) | LD50 = 17100 mg/kg (Rabbit) | LC50 = 128.2 mg/L (Rat) 4 h |

Toxicologically Synergistic Products Carbon tetrachloride

Delayed and immediate effects as well as chronic effects from short and long-term exposure

| | |
|------------------------|--|
| Irritation | May cause skin and eye irritation |
| Sensitization | No information available |
| Carcinogenicity | The table below indicates whether each agency has listed any ingredient as a carcinogen. |

| Component | CAS-No | IARC | NTP | ACGIH | OSHA | Mexico |
|----------------|---------|------------|------------|------------|------------|------------|
| Methyl alcohol | 67-56-1 | Not listed | Not listed | Not listed | Not listed | Not listed |

Mutagenic Effects No information available

| | |
|--|--|
| Reproductive Effects | No information available. |
| Developmental Effects | Component substance is listed on California Proposition 65 as a developmental hazard. |
| Teratogenicity | No information available. |
| STOT - single exposure | Optic nerve Central nervous system (CNS) |
| STOT - repeated exposure | Kidney Liver spleen Blood |
| Aspiration hazard | No information available |
| Symptoms / effects,both acute and delayed | May cause blindness: Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting |
| Endocrine Disruptor Information | No information available |
| Other Adverse Effects | The toxicological properties have not been fully investigated. |

12. Ecological information

Ecotoxicity

| Component | Freshwater Algae | Freshwater Fish | Microtox | Water Flea |
|----------------|------------------|--|---|-----------------------|
| Methyl alcohol | Not listed | Pimephales promelas: LC50 > 10000 mg/L 96h | EC50 = 39000 mg/L 25 min EC50 = 40000 mg/L 15 min EC50 = 43000 mg/L 5 min | EC50 > 10000 mg/L 24h |

Persistence and Degradability Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility Will likely be mobile in the environment due to its volatility.

| Component | log Pow |
|----------------|---------|
| Methyl alcohol | -0.74 |

13. Disposal considerations

Waste Disposal Methods Should not be released into the environment.

| Component | RCRA - U Series Wastes | RCRA - P Series Wastes |
|--------------------------|------------------------|------------------------|
| Methyl alcohol - 67-56-1 | U154 | - |

14. Transport information

DOT

| | |
|-----------------------------|----------|
| UN-No | UN1230 |
| Proper Shipping Name | METHANOL |
| Hazard Class | 3 |
| Packing Group | II |

TDG

| | |
|--------------------------------|----------|
| UN-No | UN1230 |
| Proper Shipping Name | METHANOL |
| Hazard Class | 3 |
| Subsidiary Hazard Class | 6.1 |
| Packing Group | II |

IATA

| | |
|--------------------------------|----------|
| UN-No | UN1230 |
| Proper Shipping Name | METHANOL |
| Hazard Class | 3 |
| Subsidiary Hazard Class | 6.1 |

| | |
|--------------------------------|----------|
| Packing Group | II |
| IMDG/IMO | |
| UN-No | UN1230 |
| Proper Shipping Name | METHANOL |
| Hazard Class | 3 |
| Subsidiary Hazard Class | 6.1 |
| Packing Group | II |

15. Regulatory information

United States of America Inventory

| Component | CAS-No | TSCA | TSCA Inventory notification - Active/Inactive | TSCA - EPA Regulatory Flags |
|----------------|---------|------|---|-----------------------------|
| Methyl alcohol | 67-56-1 | X | ACTIVE | - |

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

□ - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

| Component | CAS-No | DSL | NDSL | EINECS | PICCS | ENCS | AICS | IECSC | KECL |
|----------------|---------|-----|------|-----------|-------|------|------|-------|----------|
| Methyl alcohol | 67-56-1 | X | - | 200-659-6 | X | X | X | X | KE-23193 |

U.S. Federal Regulations

SARA 313

| Component | CAS-No | Weight % | SARA 313 - Threshold Values % |
|----------------|---------|----------|-------------------------------|
| Methyl alcohol | 67-56-1 | >95 | 1.0 |

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act

| Component | HAPS Data | Class 1 Ozone Depletors | Class 2 Ozone Depletors |
|----------------|-----------|-------------------------|-------------------------|
| Methyl alcohol | X | | - |

OSHA - Occupational Safety and Health Administration Not applicable

CERCLA This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

| Component | Hazardous Substances RQs | CERCLA EHS RQs |
|----------------|--------------------------|----------------|
| Methyl alcohol | 5000 lb | - |

California Proposition 65 This product contains the following Proposition 65 chemicals.

| Component | CAS-No | California Prop. 65 | Prop 65 NSRL | Category |
|----------------|---------|---------------------|--------------|---------------|
| Methyl alcohol | 67-56-1 | Developmental | - | Developmental |

U.S. State Right-to-Know Regulations

| Component | Massachusetts | New Jersey | Pennsylvania | Illinois | Rhode Island |
|----------------|---------------|------------|--------------|----------|--------------|
| Methyl alcohol | X | X | X | X | X |

U.S. Department of Transportation

Reportable Quantity (RQ): Y

DOT Marine Pollutant N

DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations**Mexico - Grade**

Serious risk, Grade 3

16. Other information**Prepared By**Health, Safety and Environmental Department
Email: tech@alfa.com
www.alfa.com**Creation Date**

27-Apr-2009

Revision Date

14-Feb-2020

Print Date

14-Feb-2020

Revision Summary

SDS authoring systems update, replaces ChemGes SDS No. 67-56-1/1.

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS






SAFETY DATA SHEET

1. Product and Company Identification

| | | | |
|-----------------------------|---|-----------------------------|----------------|
| PRODUCT NUMBER: | 1734 | COMPANY PHONE: | 1-800-241-8180 |
| PRODUCT NAME: | GREASE GUN X-TRA | EMERGENCY TELEPHONE: | 1-800-241-8180 |
| PRODUCT DESCRIPTION: | Aerosol Heavy-Duty Red Grease. | INFOTRAC: | 1-800-535-5053 |
| COMPANY INFORMATION: | PRO CHEM, INC. 1475 Bluegrass Lakes Parkway Alpharetta, GA 30004 | | |

2. Hazards Identification

| | | | | | |
|---|--------------------------------------|----------------|---|---|---|
| GHS CLASSIFICATION: Flammable aerosols: Category 1 Skin corrosion/irritation: Category 2 Serious eye damage/eye irritation: Category 2A Germ cell mutagenicity: Category 2 Carcinogenicity: Category 1 Specific target organ toxicity, single exposure: Category 3 narcotic effects Environmental hazards: Not classified. OSHA defined hazards: Not classified. | SIGNAL WORD: DANGER | SYMBOL: |  |  |  |
|---|--------------------------------------|----------------|---|---|---|

HAZARD STATEMENTS:

Extremely flammable aerosol. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing genetic defects. May cause cancer.

PRECAUTIONARY STATEMENTS:

Prevention: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid breathing mist or vapor. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response: IF ON SKIN: Wash with plenty of water. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. IF EXPOSED OR CONCERNED: Get medical advice/attention. Call a poison center/doctor if you feel unwell. Specific treatment (see this label). If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. Collect spillage.

Storage: Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal: Disposal of contents/container in accordance with local/regional/national/international regulations.

HAZARDS NOT OTHERWISE SPECIFIED:

None known.

SUPPLEMENTAL INFORMATION:

None.

3. Composition / Information on Ingredients

| CHEMICAL NAME | CAS | Concentration % by Weight |
|--|------------|---------------------------|
| Trichloroethylene | 79-01-6 | 60-80 |
| Acetone | 67-64-1 | 2.5-10 |
| Carbon Dioxide | 124-38-9 | 2.5-10 |
| Distillates (Petroleum), Hydrotreated Heavy Naphthenic | 64742-52-5 | 2.5-10 |
| 1,2-Butylene Oxide | 106-88-7 | 0.1-1 |
| Other components below reportable levels | | 10-20 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First Aid Measures

EMERGENCY OVERVIEW

GENERAL: If exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

EYES: Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.

SKIN: Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.

INHALATION:

Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

INGESTION:

In the unlikely event of swallowing, contact a physician or poison control center. Rinse mouth.

MOST IMPORTANT SYMPTOMS/EFFECTS, ACUTE AND DELAYED:

May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness,

swelling, and blurred vision. Skin irritation. May cause redness and pain.

INDICATION OF IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT NEEDED:

Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

5. Fire-Fighting Measures

SUITABLE FIRE EXTINGUISHING MEDIA:

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO₂).

UNSUITABLE FIRE EXTINGUISHING MEDIA:

Do not use water jet as an extinguisher, as this will spread the fire.

SPECIFIC HAZARDS ARISING FROM THE CHEMICAL:

Contents under pressure. Pressurized container may explode when exposed to heat or flame.

SPECIFIC FIRE-FIGHTING METHODS:

Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area, if you can do so without risk. In the event of fire and/or explosion, do not breathe fumes.

SPECIAL PROTECTIVE EQUIPMENT FOR FIREFIGHTERS:

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

GENERAL FIRE HAZARDS:

Extremely flammable aerosol.

6. Accidental Release Measures

PERSONAL PRECAUTIONS:

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see Section 8 of the SDS.

ENVIRONMENTAL PRECAUTIONS AND CLEAN-UP METHODS:

Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak, if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand, or earth and place into containers. Prevent entry into waterways, sewer, basements, or confined areas. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see Section 13 of the SDS. Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, watercourses or onto the ground.

7. Handling and Storage

SAFE HANDLING:

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Use only in well-ventilated areas. Should be handled in closed systems, if possible. Wear appropriate personal protective equipment. Avoid release to the environment. Observe good industrial hygiene practices.

SAFE STORAGE & INCOMPATIBILITIES:

Level 1 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122°F. Do not puncture, incinerate, or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Refrigeration recommended. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure Controls / Personal Protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| COMPONENTS | TYPE | VALUE |
|-------------------------------|------|------------------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m ³ 1000 ppm |
| Carbon Dioxide (CAS 124-38-9) | PEL | 9000 mg/m ³ 5000 ppm |

US. OSHA Table Z-2 (29 CFR 1910.1000)

| COMPONENTS | TYPE | VALUE |
|---------------------------------|---------|---------|
| Trichloroethylene (CAS 79-01-6) | Ceiling | 200 ppm |
| | TWA | 100 ppm |

US. ACGIH Threshold Limit Values

| COMPONENTS | TYPE | VALUE |
|---------------------------------|------|-----------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Carbon Dioxide (CAS 124-38-9) | STEL | 30000 ppm |
| | TWA | 5000 ppm |
| Trichloroethylene (CAS 79-01-6) | STEL | 25 ppm |
| | TWA | 10 ppm |

| US. NIOSH: Pocket Guide to Chemical Hazards | | |
|--|------|--------------------------|
| COMPONENTS | TYPE | VALUE |
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 250 ppm |
| Carbon Dioxide (CAS 124-38-9) | STEL | 54000 mg/m3 30000 ppm |
| | TWA | 9000 mg/m3 5000 ppm |
| Trichloroethylene (CAS 79-01-6) | TWA | 25 ppm |
| US. Workplace Environmental Exposure Level (WEEL) Guides | | |
| COMPONENTS | TYPE | VALUE |
| 1,2-Butylene Oxide (CAS 106-88-7) | TWA | 5.9 mg/m3 2 ppm |

BIOLOGICAL LIMIT VALUE:

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|---------------------------------|----------|---------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Trichloroethylene (CAS 79-01-6) | 15 mg/l | Trichloroacetic acid | Urine | * |
| | 0.5 mg/l | Trichloroethano I, without hydrolysis | Blood | * |

* - For sampling details, please see the source document.

ENGINEERING CONTROLS:
Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eyewash facilities and emergency shower must be available when handling this product.

INDIVIDUAL PROTECTION MEASURES, SUCH AS PERSONAL PROTECTIVE EQUIPMENT:

EYE PROTECTION: Chemical respirator with organic vapor cartridge and full facepiece.
SKIN PROTECTION: Wear appropriate chemical resistant gloves. Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.
RESPIRATORY PROTECTION: Chemical respirator with organic vapor cartridge and full facepiece.
THERMAL HAZARDS: Wear appropriate thermal protective clothing, when necessary.
GENERAL HYGIENE CONSIDERATIONS: When using, do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

| 9. Physical & Chemical Properties | | | |
|---|-----------------------------|--------------------------------------|--|
| APPEARANCE: | | FLAMMABILITY(solid/gas): | Not available. |
| Physical State: | Liquid. | Flammability Limit–lower (%): | 8% estimated |
| Form: | Aerosol. | Flammability Limit–upper (%): | 52% estimated |
| Color: | Not available. | Explosive Limit – lower (%): | Not available. |
| ODOR: | Not available. | Explosive Limit – upper (%): | Not available. |
| ODOR THRESHOLD: | Not available. | VAPOR PRESSURE: | 116.37 psig @70°F estimated |
| pH: | Not available. | VAPOR DENSITY: | Not available. |
| MELTING/FREEZING POINT: | Not available. | RELATIVE DENSITY: | 1.049 g/cm3 estimated |
| INITIAL BOILING POINT/RANGE: | 132.89°F (56.05°C) est | SOLUBILITY (water): | Not available. |
| PARTITION COEFFICIENT (n-octanol/water): | Not available. | AUTO-IGNITION TEMP: | 788°F (420°C) estimated |
| VISCOSITY: | Not available. | DECOMPOSITION TEMP: | Not available. |
| SPECIFIC GRAVITY: | 1.049 estimated | FLASH POINT: | 279.6°F (137.5°C) Concentrate + Propellant estimated |
| EVAPORATION RATE: | Not available. | DENSITY: | 1.05 g/cm3 estimated |
| FLAMMABILITY CLASS: | Combustible III B estimated | HEAT OF COMBUSTION: | 3.25 kJ/g estimated |
| HEAT OF COMBUSTION (NFPA 30B): | 2.15 kJ/g estimated | PERCENT VOLATILE: | 76.83% estimated |
| VOC (WEIGHT %): | 76.42% estimated | | |

| 10. Stability & Reactivity Information | |
|--|--|
| REACTIVITY: | The product is stable and non-reactive under normal conditions of use, storage, and transport. |
| CHEMICAL STABILITY: | Material is stable under normal conditions. |
| POSSIBILITY OF HAZARDOUS REACTIONS: | Hazardous polymerization does not occur. |
| INCOMPATIBLE MATERIALS: | Acids. |

CONDITIONS TO AVOID:

Avoid temperatures exceeding the flash point. Contact with incompatible materials.

DECOMPOSITION PRODUCTS:

No hazardous decomposition products are known.

11. Toxicological Information**PRIMARY ROUTE OF ENTRY:**

EYES: Causes serious eye irritation.

SKIN: Causes skin irritation.

INHALATION: May cause drowsiness and dizziness. Headache. Nausea, vomiting. Narcotic effects. Prolonged inhalation may be harmful.

INGESTION: Expected to be a low ingestion hazard.

SYMPTOMS RELATED TO THE PHYSICAL, CHEMICAL AND TOXICOLOGICAL CHARACTERISTICS:

May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

ACUTE TOXICITY:

Narcotic effects.

| COMPONENTS | SPECIES | TEST RESULTS |
|-----------------------|------------|--|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Guinea pig | > 7426 mg/kg, 24 Hours > 9.4 ml/kg, 24 Hours |
| | Rabbit | > 7426 mg/kg, 24 Hours > 9.4 ml/kg, 24 Hours |
| <i>Inhalation</i> | | |
| LC50 | Rat | 55700 ppm, 3 Hours 132 mg/l, 3 Hours 50.1 mg/l |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg 2.2 ml/kg |

Distillates (Petroleum), Hydrotreated Heavy Naphthenic (CAS 64742-52-5)

| | | |
|-------------------|--------|--|
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | > 2000 mg/kg > 2000 mg/kg, 24 Hours |
| <i>Inhalation</i> | | |
| LC50 | Rat | 2.18 mg/l, 4 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5000 mg/kg |

Trichloroethylene (CAS 79-01-6)

| | | |
|-------------------|-----|-------------------------------------|
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rat | 19031 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 12500 ppm, 4 Hours 1044 mg/l/4 h |

* Estimates for product may be based on additional component data not shown.

SKIN CORROSION/IRRITATION:

Causes skin irritation.

SERIOUS EYE DAMAGE/IRRITATION:

Causes serious eye irritation.

RESPIRATORY SENSITIZATION:

Not available.

SKIN SENSITIZATION:

This product is not expected to cause skin sensitization.

GERM CELL MUTAGENICITY:

Suspected of causing genetic defects.

CARCINOGENICITY:

May cause cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

1,2-Butylene Oxide (CAS 106-88-7) 2B Possibly carcinogenic to humans.

Trichloroethylene (CAS 79-01-6) If <1L: Consumer Commodity Carcinogenic to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

US. National Toxicology Program (NTP) Report on Carcinogens

Trichloroethylene (CAS 79-01-6) Reasonably Anticipated to be a Human Carcinogen.

REPRODUCTIVE TOXICITY:

This product is not expected to cause reproductive or developmental effects.

SPECIFIC TARGET ORGAN TOXICITY (single exposure):

May cause drowsiness and dizziness.

SPECIFIC TARGET ORGAN TOXICITY (repeated exposures):

Not classified.

ASPIRATION HAZARD:

Not available.

CHRONIC EFFECTS:

Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological Information**ECOTOXICITY:**

Toxic to aquatic life with long lasting effects.

COMPONENTS

1,2-Butylene Oxide (CAS 106-88-7)

Aquatic

| | |
|-----------|------|
| Algae | IC50 |
| Crustacea | EC50 |
| Fish | LC50 |

SPECIES

| |
|---------|
| Algae |
| Daphnia |
| Fish |

TEST RESULTS

| |
|---------------------|
| 500 mg/L, 72 Hours |
| 69.8 mg/L, 48 Hours |
| 160, 96 Hours |

Acetone (CAS 67-64-1)

Aquatic

| | |
|-----------|------|
| Crustacea | EC50 |
| Fish | LC50 |

| |
|---|
| Water flea (Daphnia magna) |
| Rainbow trout, donaldson trout (Oncorhynchus mykiss) |

| |
|----------------------------|
| 21.6 - 23.9 mg/l, 48 hours |
| 4740 - 6330 mg/l, 96 hours |

Trichloroethylene (CAS 79-01-6)

Aquatic

| | |
|-----------|------|
| Crustacea | EC50 |
| Fish | LC50 |

| |
|--------------------------------|
| Daphnia |
| Fish |
| Flagfish (Jordanella floridae) |

2.2 mg/L, 48 Hours

3.1 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

PERSISTENCE AND DEGRADABILITY:

No data is available on the degradability of this product.

BIOACCUMULATIVE POTENTIAL:

No data available.

Partition coefficient n-octanol / water (log Kow):

| | |
|-------------------|-------|
| Acetone | -0.24 |
| Trichloroethylene | 2.61 |

MOBILITY IN SOIL:

No data available.

OTHER ADVERSE EFFECTS:

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal Consideration**DISPOSAL INSTRUCTIONS:**

Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate, or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways, or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

LOCAL DISPOSAL REGULATIONS:

Dispose in accordance with all applicable regulations.

HAZARDOUS WASTE CODE:

The waste code should be assigned in discussion between the user, the producer, and the waste disposal company.

US RCRA Hazardous Waste U List: Reference

| | |
|---------------------------------|------|
| Acetone (CAS 67-64-1) | U002 |
| Trichloroethylene (CAS 79-01-6) | U228 |

WASTE FROM RESIDUES/UNUSED PRODUCTS:

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

CONTAMINATED PACKAGING:

Empty containers should be taken to an approved waste-handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. Do not reuse empty containers.

14. Transportation Information**DOT:** UN NUMBER: UN1950**UN PROPER SHIPPING NAME:** Aerosols, flammable, (each not exceeding 1 L capacity)**TRANSPORT HAZARD CLASS(ES)**

Class: 2.1

Subsidiary Risk: --

Label(s): 2.1

**PACKING GROUP:** Not applicable.**SPECIAL PRECAUTIONS FOR USER:** Read safety instructions, SDS and emergency procedures before handling.**SPECIAL PROVISIONS:** N82**PACKAGING EXCEPTIONS:** 306**PACKAGING NON BULK:** None.**PACKAGING BULK:** None.

This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking and both may be displayed concurrently.

IATA: **UN NUMBER:** UN1950
UN PROPER SHIPPING NAME: Aerosols, flammable
TRANSPORT HAZARD CLASS(ES)
Class: 2.1
Subsidiary Risk: --
Label(s): 2.1
PACKING GROUP: Not applicable.
ENVIRONMENTAL HAZARDS: Yes
ERG CODE: 10L
SPECIAL PRECAUTIONS FOR USER: Read safety instructions, SDS and emergency procedures before handling.
OTHER INFORMATION:
PASSENGER AND CARGO AIRCRAFT: Allowed.
CARGO AIRCRAFT ONLY: Allowed.
PACKAGING EXCEPTIONS: LTD QTY

IMDG: **UN NUMBER:** UN1950
UN PROPER SHIPPING NAME: AEROSOLS
TRANSPORT HAZARD CLASS(ES)
Class: 2.1
Subsidiary Risk: --
Label(s): 2.1
PACKING GROUP: Not applicable.
ENVIRONMENTAL HAZARDS:
Marine pollutant: Yes.
EmS: F-D, S-U
SPECIAL PRECAUTIONS FOR USER: Read safety instructions, SDS and emergency procedures before handling.
PACKAGING EXCEPTIONS: LTD QTY
TRANSPORT IN BULK ACCORDING TO ANNEX II OF MARPOL 73/78 and the IBC CODE:
 Not applicable.



15. Regulatory Information

US FEDERAL REGULATIONS:

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200. All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D): Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

1,2-Butylene Oxide (CAS 106-88-7) Listed.

Acetone (CAS 67-64-1) Listed.

Trichloroethylene (CAS 79-01-6) Listed.

SARA 304 Emergency release notification: Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050): Not listed.

SUPERFUND AMENDMENTS AND REAUTHORIZATION ACT of 1986 (SARA):

Hazard categories:
 Immediate Hazard – Yes.
 Delayed Hazard – Yes.
 Fire Hazard – Yes.
 Pressure Hazard – No.
 Reactivity Hazard – No.

SARA 302 Extremely hazardous substance: Not listed.

SARA 311/312 Hazardous Chemical: No.

| SARA 313 (TRI reporting) Chemical name | CAS number | % by wt. |
|--|------------|----------|
| Trichloroethylene | 79-01-6 | 60 - 80 |
| 1,2-Butylene Oxide | 106-88-7 | 0.1 - 1 |

OTHER FEDERAL REGULATIONS

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

1,2-Butylene Oxide (CAS 106-88-7) Trichloroethylene (CAS 79-01-6)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130): Not regulated.

Safe Drinking Water Act (SDWA): Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

US STATE REGULATIONS

US. Massachusetts RTK - Substance List

1,2-Butylene Oxide (CAS 106-88-7)

Acetone (CAS 67-64-1)

Carbon Dioxide (CAS 124-38-9)

Trichloroethylene (CAS 79-01-6)

US. New Jersey Worker and Community Right-to-Know Act

1,2-Butylene Oxide (CAS 106-88-7)

Acetone (CAS 67-64-1)

Carbon Dioxide (CAS 124-38-9)

Trichloroethylene (CAS 79-01-6)

US. Pennsylvania Worker and Community Right-to-Know Law

1,2-Butylene Oxide (CAS 106-88-7)

Acetone (CAS 67-64-1)

Carbon Dioxide (CAS 124-38-9)

Trichloroethylene (CAS 79-01-6)

US. Rhode Island RTK

1,2-Butylene Oxide (CAS 106-88-7)

Acetone (CAS 67-64-1)

Trichloroethylene (CAS 79-01-6)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

Trichloroethylene (CAS 79-01-6) Listed: April 1, 1988

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | No |
| Canada | Domestic Substances List (DSL) | No |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | No |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | No |
| New Zealand | New Zealand Inventory | No |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other Information**N/A = Not Applicable; N/D = Not Determined****DISCLAIMER:**

To the best of our knowledge, information contained herein is accurate. However, there is no assumption of liability for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazard, which exists. The information contained in this SDS was obtained from current and reliable sources; however, the data is provided without any warranty, expressed or implied, regarding its correctness or accuracy. Since the conditions or handling, storage and disposal of this product are beyond the control of the manufacturer, the manufacturer will not be responsible for loss, injury, or expense arising out of the products improper use. No warranty, expressed or inferred, regarding the product described in this SDS shall be created or inferred by any statement in this SDS. Various government agencies may have specific regulations regarding the transportation, handling, storage, use, or disposal of this product, which may not be covered by this SDS. The user is responsible for full compliance.



Liquid BR5512-LAB Heavy Duty Liquid Alkaline Cleaner

Revision: 2020-09-06

Version: 01.0

1. IDENTIFICATION

Product name: Liquid BR5512-LAB
Heavy Duty Liquid Alkaline Cleaner

Product Code: 02857154, 02857471, 57833330

SDS #: MS0801144

Recommended use:

- Professional cleaning/maintenance product for food & beverage industries
- This product is intended to be diluted prior to use

Uses advised against: Uses other than those identified are not recommended

Manufacturer, importer, supplier:

| | |
|--|---|
| US Headquarters Diversey, Inc. 1300 Altura Rd., Suite 125 Fort Mill, SC 29708 Phone: 1-888-352-2249 SDS Internet Address: https://sds.diversey.com | Canadian Headquarters Diversey Canada, Inc. 6150 Kennedy Road Unit 3 Mississauga, Ontario L5T 2J4 Phone: 1-800-668-7171 |
|--|---|

Emergency telephone number: 1-800-851-7145; 1-651-917-6133 (Int'l)

2. HAZARDS IDENTIFICATION

Classification for the undiluted product

| | |
|--|-------------|
| Acute oral toxicity | Category 4 |
| Skin corrosion/irritation | Category 1A |
| Serious eye damage/eye irritation | Category 1 |
| Specific target organ toxicity (repeated exposure) | Category 2 |
| Metal Corrosion: | Category 1 |



Signal word:

Danger.

Hazard Statements

CAUSES SEVERE SKIN BURNS AND SERIOUS EYE DAMAGE. HARMFUL IF SWALLOWED. MAY CAUSE DAMAGE TO ORGANS THROUGH PROLONGED OR REPEATED EXPOSURE. MAY BE CORROSIVE TO METALS.

Precautionary Statements

Causes burns/ serious damage to mouth, throat and stomach. Keep container tightly closed. Keep only in original container. Do not breathe spray. Avoid contact with eyes, skin and clothing. Wash affected areas thoroughly after handling. Do not eat, drink or smoke when using this product. Wear chemical-splash goggles, chemical-resistant gloves and protective footwear. IF SWALLOWED: Rinse mouth. DO NOT induce vomiting unless directed to do so by medical personnel. Drink a cupful of milk or water. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water for at least 15 minutes. Wash contaminated clothing before reuse. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing for at least 15 minutes. Immediately call a Poison Center (1-800-851-7145) or physician. Absorb spillage to prevent material damage. Store in corrosive-resistant container with a resistant inner liner. Dispose of in accordance with all federal, state and local applicable regulations.

SUPPLEMENTAL INFORMATION: Mix only with water. DO NOT MIX WITH ANY OTHER PRODUCT OR CHEMICAL. Can react to release hazardous gases. May vigorously react with acids resulting in spattering and excessive heat.

Health hazards not otherwise classified (HHNOC) - Not applicable
Physical hazards not otherwise classified (PHNOC) - Not applicable

Classification for the diluted product @ 4.8% w/w

Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2A



Signal word: Warning.

Hazard and Precautionary Statements

CAUSES SKIN AND SERIOUS EYE IRRITATION.

Avoid contact with eyes, skin and clothing. Wash affected areas thoroughly after handling. May cause irritation to mouth, throat and stomach. Wear chemical-splash goggles and chemical-resistant gloves. IF SWALLOWED: Rinse mouth. Drink a cupful of milk or water. IF ON SKIN: Wash with plenty of soap and water. If skin irritation occurs: Get medical advice or attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing for at least 15 minutes. Dispose of in accordance with all federal, state and local applicable regulations. SUPPLEMENTAL INFORMATION: Mix only with water. May vigorously react with acids resulting in spattering and excessive heat.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Classified Ingredients

4. FIRST AID MEASURES

Undiluted Product:

Eyes: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing for at least 15 minutes.

Skin: IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water for at least 15 minutes.

Inhalation: IF INHALED: Remove person to fresh air and keep comfortable for breathing.

Ingestion: IF SWALLOWED: Rinse mouth. DO NOT induce vomiting unless directed to do so by medical personnel. Drink a cupful of milk or water.

Most Important Symptoms/Effects: No information available.

Immediate medical attention and special treatment needed Not applicable.

Aggravated Medical Conditions: Individuals with chronic respiratory disorders such as asthma, chronic bronchitis, emphysema, etc., may be more susceptible to irritating effects.

Diluted Product:

Eyes: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing for at least 15 minutes.

Skin: IF ON SKIN: Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention

Inhalation: No specific first aid measures are required

Ingestion: IF SWALLOWED: Rinse mouth. Drink a cupful of milk or water.

5. FIRE-FIGHTING MEASURES

Specific methods: No special methods required

Suitable extinguishing media: The product is not flammable. Extinguish fire using agent suitable for surrounding fire.

Specific hazards: Corrosive material (See sections 8 and 10).

Special protective equipment for firefighters: As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

Extinguishing media which must not be used for safety reasons: No information available.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions: Put on appropriate personal protective equipment (see Section 8.).
Environmental precautions and clean-up methods: Clean-up methods - large spillage. Absorb spill with inert material (e.g. dry sand or earth), then place in a chemical waste container. Use a water rinse for final clean-up.

7. HANDLING AND STORAGE

Handling: Avoid contact with skin, eyes and clothing. Do not taste or swallow. Avoid breathing vapors or mists. Use only with adequate ventilation. Remove and wash contaminated clothing and footwear before re-use. Wash thoroughly after handling. Mix only with water. May react to release hazardous gases. May vigorously react with acids resulting in spattering and excessive heat. Product residue may remain on/in empty containers. All precautions for handling the product must be used in handling the empty container and residue.

Storage: Protect from freezing. Keep tightly closed in a dry, cool and well-ventilated place. KEEP OUT OF REACH OF CHILDREN.

Aerosol Level (if applicable): Not applicable.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure Guidelines:

Undiluted Product:

Engineering measures to reduce exposure:

Good general ventilation should be sufficient to control airborne levels. Respiratory protection is not required if good ventilation is maintained.

Personal Protective Equipment

Eye protection: Chemical-splash goggles.
Hand protection: Chemical-resistant gloves.
Skin and body protection: Protective footwear. If major exposure is possible, wear suitable protective clothing and footwear.
Respiratory protection: In case of insufficient ventilation wear suitable respiratory equipment. A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use.
Hygiene measures: Handle in accordance with good industrial hygiene and safety practice.

Diluted Product:

Engineering measures to reduce exposure:

Good general ventilation should be sufficient to control airborne levels.

Personal Protective Equipment

Eye protection: Chemical-splash goggles.
Hand protection: Chemical-resistant gloves.
Skin and body protection: No personal protective equipment required under normal use conditions.
Respiratory protection: No personal protective equipment required under normal use conditions.
Hygiene measures: Handle in accordance with good industrial hygiene and safety practice.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State: Liquid

Evaporation Rate: No information available

Odor threshold: No information available.

Melting point/range: Not determined

Autoignition temperature: No information available

Solubility in other solvents: No information available

Density: Specific gravity: 1.29 Kg/L

Bulk density: No information available

Flash point (°F): > 200 °F > 93.4 °C

Viscosity: No information available

VOC: 0 %

Flammability (Solid or Gas): Not applicable

Sustained combustion: Not applicable

Explosion limits: - upper: Not determined - **lower:** Not determined

Color: Clear, Colorless

Odor: No Odor/Odorless

Boiling point/range: Not determined

Decomposition temperature: Not determined Not applicable

Solubility: Completely Soluble

Relative Density (relative to water): 1.29

Vapor density: No information available

Vapor pressure: No information available.

Partition coefficient (n-octanol/water): No information available

Elemental Phosphorus: 0 % by wt.

pH: 14.5

Corrosion to metals: Metal corrosive

> 200 °F > 93.4 °C

VOC % by wt. at use dilution: 0

* - Title 17, California Code of Regulations, Division 3, Chapter 1, Subchapter 8.5, Article 2, Consumer Products, Sections 94508

10. STABILITY AND REACTIVITY

| | |
|--|---|
| Reactivity: | Not Applicable |
| Stability: | The product is stable |
| Possibility of hazardous reactions: | May vigorously react with acids resulting in spattering and excessive heat. |
| Hazardous decomposition products: | None reasonably foreseeable. |
| Materials to avoid: | Acids. Strong oxidising agents. Do not mix with any other product or chemical unless specified in the use directions. |
| Conditions to avoid: | No information available. |

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure:

Eye contact, Skin contact, Inhalation, Ingestion

Delayed, immediate, or chronic effects and symptoms from short and long-term exposure

Skin contact: Corrosive. Causes severe burns. Symptoms may include burns, blisters, redness and pain (which may be delayed).

Eye contact: Corrosive. Causes serious eye damage. Symptoms may include pain, burning sensation, redness, watering, blurred vision or loss of vision.

Ingestion: Causes burns/ serious damage to mouth, throat and stomach. Symptoms may include stomach pain and nausea. Harmful if swallowed. Symptoms may include vomiting, nausea, and/or feeling of general unwellness.

Inhalation: May cause irritation and corrosive effects to nose, throat and respiratory tract. Symptoms may include coughing and difficulty breathing.

Sensitization: No known effects.

Target Organs (SE): None known

Target Organs (RE): No information available

Carcinogen Listings: None of the components in this product at $\geq 0.1\%$ are listed as a carcinogen by IARC, NTP or OSHA.

Numerical measures of toxicity

ATE - Oral (mg/kg): 950

ATE - Inhalatory, mists (mg/l): >20

12. ECOLOGICAL INFORMATION

Ecotoxicity: No information available.

Persistence and Degradability: No information available.

Bioaccumulation: No information available.

13. DISPOSAL CONSIDERATIONS

Waste from residues / unused products (undiluted product): This product, as sold, if discarded or disposed, is a hazardous waste according to Federal regulations (40 CFR 261.4 (b)(4)). Under RCRA, it is the responsibility of the user of the product to determine, at the time of disposal, whether the waste solution meets RCRA criteria for hazardous waste. Dispose in compliance with all Federal, state, provincial, and local laws and regulations.

Waste from residues / unused products (diluted product): This product, when diluted as stated on this SDS, is a hazardous waste according to Federal regulations (40 CFR 261.4 (b)(4)). Under RCRA, it is the responsibility of the user of the product to determine, at the time of disposal, whether the waste solution meets RCRA criteria for hazardous waste. Dispose in compliance with all Federal, state, provincial, and local laws and regulations.

RCRA Hazard Class (undiluted product): D002 Corrosive Waste

RCRA Hazard Class (diluted product): D002 Corrosive Waste

Contaminated Packaging: Do not re-use empty containers.

14. TRANSPORT INFORMATION

DOT (Ground) Bill of Lading Description: UN3266, CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S., (potassium hydroxide, sodium hydroxide), 8, II

IMDG (Ocean) Bill of Lading Description: UN3266, CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S., (potassium hydroxide, sodium hydroxide), 8, II

15. REGULATORY INFORMATION

International Inventories at CAS# Level

CERCLA/ SARA

| Ingredient(s) | CAS # | Weight % | CERCLA/SARA RQ (lbs) | Section 302 TPQ (lbs) | Section 313 |
|---------------------|-----------|------------|----------------------|-----------------------|-------------|
| Potassium hydroxide | 1310-58-3 | 10 - 30% | 1000 | | |
| Sodium hydroxide | 1310-73-2 | 0.5 - 1.5% | 1000 | | |

16. OTHER INFORMATION

NFPA (National Fire Protection Association)

Rating Scale: (Low Hazard) 0 - 4 (Extreme Hazard)

Health 3

Flammability 0

Instability 0

Special Hazards -

Diluted Product:

Revision: 2020-09-06

Version: 01.0

Reason for revision:

Not applicable

Prepared by:

North American Regulatory Affairs

Additional advice:

• Does not contain an added fragrance

Notice to Reader: This document has been prepared using data from sources considered technically reliable. It does not constitute a warranty, express or implied, as to the accuracy of the information contained within. Actual conditions of use and handling are beyond seller's control. User is responsible to evaluate all available information when using product for any particular use and to comply with all Federal, State, Provincial and Local laws and regulations.

1. Product and Company Identification

| | |
|--------------------------------------|--|
| Product identifier | Nu-Brite 4x (4291-90) |
| Other means of identification | Not available |
| Recommended use | Coil Cleaner |
| Recommended restrictions | None known. |
| Manufacturer information | Nu-Calgon 2611 Schuetz Road St. Louis, MO 63043 US Phone: 314-469-7000 / 800-554-5499 Emergency Phone: 1-800-424-9300 (CHEMTREC) |
| Supplier | See above. |

2. Hazards Identification

| | | |
|-----------------------------------|-----------------------------------|------------|
| Physical hazards | Corrosive to metals | Category 1 |
| Health hazards | Skin corrosion/irritation | Category 1 |
| | Serious eye damage/eye irritation | Category 1 |
| Environmental hazards | Not classified. | |
| WHMIS 2015 defined hazards | Not classified | |
| Label elements | | |



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | May be corrosive to metals. Causes severe skin burns and eye damage. |
| Precautionary statement | |
| Prevention | Keep only in original packaging. Do not breathe mist or vapor. Wash thoroughly after handling. Wear protective gloves, protective clothing, eye protection and face protection. |
| Response | Absorb spillage to prevent material-damage. IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water. Wash contaminated clothing before reuse. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor. Specific treatment (see information on this label). IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| Storage | Store locked up. Store in a corrosion resistant container with a resistant inner liner. |
| Disposal | Dispose of container in accordance with local, regional, national and international regulations. |

| | |
|--|-------------|
| WHMIS 2015: Health Hazard(s) not otherwise classified (HHNOC) | None known |
| WHMIS 2015: Physical Hazard(s) not otherwise classified (PHNOC) | None known |
| Hazard(s) not otherwise classified (HNOC) | None known. |
| Supplemental information | None. |

3. Composition/Information on Ingredients

Mixture

| Chemical name | Common name and synonyms | CAS number | % |
|---|--------------------------|-------------|--------|
| Alkyl polyglycoside | | 110615-47-9 | 1-5* |
| Glucopyranose, oligomeric, decyl octyl glycosides | | 68515-73-1 | 1-5* |
| Sodium hydroxide | | 1310-73-2 | 15-40* |

All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

Composition comments US GHS: The exact percentage (concentration) of composition has been withheld as a trade secret in accordance with paragraph (i) of §1910.1200.
*CANADA GHS: The exact percentage (concentration) of composition has been withheld as a trade secret.

4. First Aid Measures

| | |
|---|--|
| Inhalation | IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor. |
| Skin contact | IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water. Immediately call a POISON CENTER or doctor. Specific treatment (see information on this label). Wash contaminated clothing before reuse. |
| Eye contact | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor. |
| Ingestion | IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. Immediately call a POISON CENTER or doctor. |
| Most important symptoms/effects, acute and delayed | Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. |
| General information | If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Avoid contact with eyes and skin. Wear rubber gloves and chemical splash goggles. Keep out of reach of children. |

5. Fire Fighting Measures

| | |
|--|---|
| Suitable extinguishing media | Foam. Carbon dioxide. Dry chemical. |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Firefighters should wear a self-contained breathing apparatus. |
| Special protective equipment and precautions for firefighters | Firefighters should wear full protective clothing including self-contained breathing apparatus. |
| Fire-fighting equipment/instructions | Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| Hazardous combustion products | May include and are not limited to: Oxides of carbon. |

6. Accidental Release Measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Stop leak if you can do so without risk. Prevent entry into waterways, sewer, basements or confined areas. Large Spills: Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Absorb spillage to prevent material damage. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. |
| Environmental precautions | Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground. Do not discharge into lakes, streams, ponds or public waters. |

7. Handling and Storage

| | |
|---|--|
| Precautions for safe handling | Use only with adequate ventilation. Do not breathe mist or vapor. Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure. Wear appropriate personal protective equipment. Wash thoroughly after handling. Use good industrial hygiene practices in handling this material. Keep container tightly closed. When using do not eat or drink. |
| Conditions for safe storage, including any incompatibilities | Store locked up. Store in a cool, dry place out of direct sunlight. Store in a corrosion resistant container with a resistant inner liner. Store in a closed container away from incompatible materials. Store away from incompatible materials (see Section 10 of the SDS). Keep out of reach of children. |

8. Exposure Controls/Personal Protection

Occupational exposure limits

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

| Components | Type | Value |
|----------------------------------|---------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | Ceiling | 2 mg/m ³ |

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

| Components | Type | Value |
|----------------------------------|---------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | Ceiling | 2 mg/m ³ |

Canada. Manitoba OELs (Reg. 217/2006, The Workplace Safety And Health Act)

| Components | Type | Value |
|----------------------------------|---------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | Ceiling | 2 mg/m ³ |

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

| Components | Type | Value |
|----------------------------------|---------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | Ceiling | 2 mg/m ³ |

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

| Components | Type | Value |
|----------------------------------|---------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | Ceiling | 2 mg/m ³ |

Canada. Saskatchewan OELs (Occupational Health and Safety Regulations, 1996, Table 21)

| Components | Type | Value |
|----------------------------------|---------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | Ceiling | 2 mg/m ³ |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|----------------------------------|------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | PEL | 2 mg/m ³ |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|----------------------------------|---------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | Ceiling | 2 mg/m ³ |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|----------------------------------|---------|---------------------|
| Sodium hydroxide (CAS 1310-73-2) | Ceiling | 2 mg/m ³ |

Biological limit values No biological exposure limits noted for the ingredient(s).

Exposure guidelines Chemicals listed in section 3 that are not listed here do not have established limit values for ACGIH.

Appropriate engineering controls Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles) and a face shield.

| | |
|---------------------------------------|--|
| Skin protection | |
| Hand protection | Rubber gloves. Confirm with a reputable supplier first. |
| Other | Wear appropriate chemical resistant clothing. As required by employer code. |
| Respiratory protection | Where exposure guideline levels may be exceeded, use an approved NIOSH respirator. Respirator should be selected by and used under the direction of a trained health and safety professional following requirements found in OSHA's respirator standard (29 CFR 1910.134), CAN/CSA-Z94.4 and ANSI's standard for respiratory protection (Z88.2). |
| Thermal hazards | Not applicable. |
| General hygiene considerations | When using do not eat or drink. |

9. Physical and Chemical Properties

| | |
|---|--|
| Appearance | Liquid |
| Physical state | Liquid. |
| Form | Liquid |
| Color | Brown |
| Odor | Bland. |
| Odor threshold | Not available. |
| pH | 12.7 (1% in water) 14 (Concentrate) |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | Not available. |
| Pour point | Not available. |
| Specific gravity | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Flash point | Not available. |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not applicable. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Relative density | Not available. |
| Solubility(ies) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Oxidizing properties | Not oxidizing. |

10. Stability and Reactivity

| | |
|---|---|
| Reactivity | May be corrosive to metals. Reacts violently with acids. This product may react with strong oxidizing agents. |
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |
| Chemical stability | Stable under recommended storage conditions. |
| Conditions to avoid | Do not mix with other chemicals. |
| Incompatible materials | Acids. Strong oxidizing agents. Metals. |

11. Toxicological Information

Routes of exposure Eye, Skin contact, Inhalation, Ingestion.

Information on likely routes of exposure

- Ingestion** Causes digestive tract burns. May cause stomach distress, nausea or vomiting.
- Inhalation** May cause irritation to the respiratory system. Prolonged inhalation may be harmful.
- Skin contact** Causes severe skin burns.
- Eye contact** Causes serious eye damage.

Symptoms related to the physical, chemical and toxicological characteristics Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|---------------------------------------|---------------|--|
| Alkyl polyglycoside (CAS 110615-47-9) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | > 2000 mg/kg, 24 Hours, ECHA |
| <i>Inhalation</i> | | |
| LC50 | Not available | |
| <i>Oral</i> | | |
| LD50 | Rat | > 5000 mg/kg, ECHA > 2000 mg/kg, ECHA |

Glucopyranose, oligomeric, decyl octyl glycosides (CAS 68515-73-1)

| | | |
|-------------------|---------------|--|
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | > 2000 mg/kg, 24 Hours, ECHA |
| <i>Inhalation</i> | | |
| LC50 | Not available | |
| <i>Oral</i> | | |
| LD50 | Rat | > 5000 mg/kg, ECHA > 2000 mg/kg, BASF |

Sodium hydroxide (CAS 1310-73-2)

| | | |
|-------------------|---------------|-----------------|
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Not available | |
| <i>Inhalation</i> | | |
| LC50 | Not available | |
| <i>Oral</i> | | |
| LD50 | Rabbit | 325 mg/kg, ECHA |

Skin corrosion/irritation Causes severe skin burns and eye damage.

- Exposure minutes** Not available.
- Erythema value** Not available.
- Oedema value** Not available.

Serious eye damage/eye irritation Causes serious eye damage.

- Corneal opacity value** Not available.
- Iris lesion value** Not available.
- Conjunctival reddening value** Not available.
- Conjunctival oedema value** Not available.
- Recover days** Not available.

Respiratory or skin sensitization

Canada - Alberta OELs: Irritant

Sodium hydroxide (CAS 1310-73-2) Irritant

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Mutagenicity Non-hazardous by WHMIS/OSHA criteria.

Carcinogenicity Non-hazardous by WHMIS/OSHA criteria.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Teratogenicity Non-hazardous by WHMIS/OSHA criteria.

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological Information

Ecotoxicity Components of this product have been identified as having potential environmental concerns. See below

Ecotoxicological data

| Components | | Species | Test Results |
|----------------------------------|------|--|------------------------------|
| Sodium hydroxide (CAS 1310-73-2) | | | |
| Aquatic | | | |
| Crustacea | EC50 | Water flea (<i>Ceriodaphnia dubia</i>) | 34.59 - 47.13 mg/L, 48 hours |
| Fish | LC50 | Western mosquitofish (<i>Gambusia affinis</i>) | 125 mg/L, 96 hours |

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Mobility in soil No data available.

Mobility in general Not available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal Considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code D002: Waste Corrosive material [pH <=2 or =>12.5, or corrosive to steel]
The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport Information

Transport of Dangerous Goods (TDG) Proof of Classification Classification Method: Classified as per Part 2, Sections 2.1 – 2.8 of the Transportation of Dangerous Goods Regulations. If applicable, the technical name and the classification of the product will appear below.

U.S. Department of Transportation (DOT)

Basic shipping requirements:

UN number UN3266
Proper shipping name Corrosive liquid, basic, inorganic, n.o.s.
Technical name Sodium hydroxide
Hazard class 8
Packing group II

Special provisions 386, B2, IB2, T11, TP2, TP27
Packaging non bulk 202
Packaging bulk 242

Transportation of Dangerous Goods (TDG - Canada)

Basic shipping requirements:

UN number UN3266
Proper shipping name CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S.
Technical name SODIUM HYDROXIDE
Hazard class 8
Packing group II
Special provisions 16

IATA/ICAO (Air)

Basic shipping requirements:

UN number UN3266
Proper shipping name Corrosive liquid, basic, inorganic, n.o.s.
Technical name Sodium hydroxide
Hazard class 8
Packing group II

IMDG (Marine Transport)

Basic shipping requirements:

UN number UN3266
Proper shipping name CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S.
Technical name Sodium hydroxide
Hazard class 8
Packing group II

DOT



IATA; IMDG; TDG



15. Regulatory Information

Canadian federal regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Not regulated.

WHMIS 2015 Exemptions Not applicable

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

All chemicals used are on the TSCA inventory.

CERCLA Hazardous Substance List (40 CFR 302.4)

Sodium hydroxide (CAS 1310-73-2) Listed.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
 Delayed Hazard - No
 Fire Hazard - No
 Pressure Hazard - No
 Reactivity Hazard - No

SARA 302 Extremely hazardous substance No

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
 Not regulated.

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

US state regulations**US - California Hazardous Substances (Director's): Listed substance**

Sodium hydroxide (CAS 1310-73-2) Listed.

US - Illinois Chemical Safety Act: Listed substance

Sodium hydroxide (CAS 1310-73-2)

US - Louisiana Spill Reporting: Listed substance

Sodium hydroxide (CAS 1310-73-2) Listed.

US - Minnesota Haz Subs: Listed substance

Sodium hydroxide (CAS 1310-73-2) Listed.

US - New Jersey RTK - Substances: Listed substance

Sodium hydroxide (CAS 1310-73-2)

US - Texas Effects Screening Levels: Listed substance

Glucopyranose, oligomeric, decyl octyl glycosides (CAS 68515-73-1) Listed.

Sodium hydroxide (CAS 1310-73-2) Listed.

US. Massachusetts RTK - Substance List

Sodium hydroxide (CAS 1310-73-2)

US. New Jersey Worker and Community Right-to-Know Act

Not regulated.

US. Pennsylvania Worker and Community Right-to-Know Law

Sodium hydroxide (CAS 1310-73-2)

US. Rhode Island RTK

Sodium hydroxide (CAS 1310-73-2)

US. California Proposition 65

This product is not subject to warning labeling under the California Proposition 65 regulation.

Inventory status


| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

16. Other Information

| LEGEND | |
|----------|---|
| Severe | 4 |
| Serious | 3 |
| Moderate | 2 |
| Slight | 1 |
| Minimal | 0 |

| | |
|---------------------|-----|
| HEALTH | / 3 |
| FLAMMABILITY | 0 |
| PHYSICAL HAZARD | 0 |
| PERSONAL PROTECTION | X |



Disclaimer

Information contained herein was obtained from sources considered technically accurate and reliable. While every effort has been made to ensure full disclosure of product hazards, in some cases data is not available and is so stated. Since conditions of actual product use are beyond control of the supplier, it is assumed that users of this material have been fully trained according to the requirements of all applicable legislation and regulatory instruments. No warranty, expressed or implied, is made and supplier will not be liable for any losses, injuries or consequential damages which may result from the use of or reliance on any information contained in this document. The information in the sheet was written based on the best knowledge and experience currently available.

Issue date

03-January-2019

Version #

01

Effective date

03-January-2019

Prepared by

Nu-Calgon Technical Service Phone: (314) 469-7000

Other information

For an updated SDS, please contact the supplier/manufacturer listed on the first page of the document.



SAFETY DATA SHEET

Section 1 – Product & Company Identification

Product Name:
RIDGID Extreme Performance Thread Cutting Oil (United States)

Product Catalog No.:
74012, 74047, 76767

Recommended Use:
Thread Cutting

Restrictions on Use:
Industrial use only

Company Information:

| <u>North America</u> | <u>Australia</u> |
|--|--|
| Ridge Tool Company 400 Clark Street Elyria, Ohio 44035-6001 1-800-519-3456 (8:00 am – 5:00 pm EST, M-F) Emergency Telephone call 9-1-1 or local emergency number www.RIDGID.com | Ridge Tool Australia 127 Metrolink Circuit Campbellfield, VIC 3061 1-800-743-443 (8:30 am – 5:00 pm AEST, M-F) Emergency Telephone call 000 or local emergency number www.RIDGID.com.au |

Issue Date: May 1, 2018

Revision: K

• Français – 11
• Castellano – pág. 21

Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 2 – Hazards Identification

Hazard Classification**Health Hazards**

Serious Eye Damage/Eye Irritation Category 2A

Label Elements**Hazard Symbol:**

Signal Word: Warning

Hazard Statement: Causes serious eye irritation.

Precautionary Statements

Prevention: Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

Response: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Other hazards which do not result in GHS classification: None.

Unknown toxicity - Health

| | |
|--|--------|
| Acute toxicity, oral | 31.6 % |
| Acute toxicity, dermal | 8 % |
| Acute toxicity, inhalation, vapor | 48.1 % |
| Acute toxicity, inhalation, dust or mist | 44.8 % |



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 3 – Composition / Information On Ingredients

General information: This product does not contain silicone or chlorinated additives.

Hazardous Component(s):

| Chemical name | CAS-No. | Concentration |
|---------------|--------------|---------------|
| Paraffin oils | Confidential | 20 - <50% |
| Mineral oil | Confidential | 20 - <50% |
| Zinc compound | Confidential | 5 - <10% |

Specific chemical identities and/or exact percentages have been withheld as trade secrets.

Section 4 – First Aid Measures

Ingestion: Rinse mouth thoroughly. Call a POISON CENTER/doctor if you feel unwell. Do NOT induce vomiting.

Inhalation: Move to fresh air. Call a POISON CENTER/doctor if you feel unwell.

Skin Contact: Remove contaminated clothing and shoes. Wash contact areas with soap and water. If skin irritation occurs: Get medical advice/attention.

Eye contact: Immediately flush with plenty of water for at least 15 minutes. If easy to do, remove contact lenses. Get medical attention.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: Get medical attention if symptoms occur.

Section 5 – Fire Fighting Measures

General Fire Hazards: No unusual fire or explosion hazards noted.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Water spray, fog, CO₂, dry chemical, or regular foam. Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Specific hazards arising from the chemical: Heat may cause the containers to explode. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

Section 6 – Accidental Release Measures

Personal precautions, protective equipment and emergency procedures: See Section 8 of the SDS for Personal Protective Equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep unauthorized personnel away. Ensure adequate ventilation.

Methods and material for containment and cleaning up: Absorb spill with vermiculite or other inert material, then place in a container for chemical waste. Dike far ahead of larger spill for later recovery and disposal.

Environmental Precautions: Do not contaminate water sources or sewer. Prevent further leakage or spillage if safe to do so.

Section 7 – Handling And Storage

Precautions for safe handling: Avoid contact with eyes. Wash hands thoroughly after handling. Observe good industrial hygiene practices. Wear appropriate personal protective equipment. Do not expose to intense heat as product may expand and pressurize container.

Conditions for safe storage, including any incompatibilities: Store in original tightly closed container. Avoid contact with oxidizing agents. Store away from incompatible materials. Shelf Life: 720 Days



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 8 – Exposure Controls / Personal Protection

Exposure Limits

| Chemical name | Type | Exposure Limit Values | Source |
|-------------------------------------|------|-----------------------|---|
| Paraffin oils - Inhalable fraction. | TWA | 5 mg/m ³ | US. ACGIH Threshold Limit Values (03 2014) |
| Paraffin oils - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| Paraffin oils - Mist. | TWA | 5 mg/m ³ | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Mineral oil - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (01 2017) |
| Mineral oil - Mist. | TWA | 5 mg/m ³ | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Mineral oil - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |

Protective Measures:

Provide easy access to water supply and eye wash facilities. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Respiratory Protection:

In case of inadequate ventilation use suitable respirator. Seek advice from supervisor on the company's respiratory protection standards.

Eye Protection:

Wear safety glasses with side shields (or goggles).

Skin and Body Protection:

Wear protective clothing appropriate for the risk of exposure. Be aware of other hazards such as rotating parts. Contact health and safety professional or manufacturer for specific information.

Hygiene measures:

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing to remove contaminants. Discard contaminated footwear that cannot be cleaned.

Section 9 – Physical And Chemical Properties

Appearance

Physical state:

Liquid

Form:

No data available.

Color:

Amber



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

| | |
|--|--|
| Odor: | Mild petroleum/solvent |
| Odor threshold: | No data available. |
| pH: | No data available. |
| Melting point/freezing point: | No data available. |
| Initial boiling point and boiling range: | No data available. |
| Flash Point: | 196.11 °C (385.00 °F) |
| Evaporation rate: | No data available. |
| Flammability (solid, gas): | No data available. |
| Upper/lower limit on flammability or explosive limits | |
| Flammability limit - upper (%): | No data available. |
| Flammability limit - lower (%): | No data available. |
| Explosive limit - upper (%): | No data available. |
| Explosive limit - lower (%): | No data available. |
| Vapor pressure: | No data available. |
| Vapor density: | No data available. |
| Relative density: | 0.88 |
| Solubility(ies) | |
| Solubility in water: | Insoluble |
| Solubility (other): | No data available. |
| Partition coefficient (n-octanol/water): | No data available. |
| Auto-ignition temperature: | No data available. |
| Decomposition temperature: | No data available. |
| Viscosity: | 38 mm ² /s (40 °C, Measured) |
| Other information | |
| VOC: | 1.99 % (Method 24) 6.1 g/l (ASTM E 1868-10) |

Section 10 – Stability And Reactivity

| | |
|--|--|
| Reactivity: | Not reactive during normal use. |
| Chemical Stability: | Material is stable under normal conditions. |
| Possibility of hazardous reactions: | None under normal conditions. |
| Conditions to avoid: | Avoid heat or contamination. |
| Incompatible Materials: | No data available. |
| Hazardous Decomposition Products: | Thermal decomposition or combustion may liberate carbon oxides and other toxic gases or vapors. Contains a component which may release flammable substances, including trimethylpentene, by distillation in systems with solvent recovery. This may lead to accumulation in the solvent circuit. |



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 11 – Toxicological Information

Information on likely routes of exposure

- Ingestion:** May be ingested by accident. Ingestion may cause irritation and malaise. May be harmful if swallowed.
- Inhalation:** Inhalation is the primary route of exposure. In high concentrations, vapors, fumes or mists may irritate nose, throat and mucus membranes.
- Skin Contact:** Prolonged or repeated skin contact may cause drying, cracking, or irritation.
- Eye contact:** Causes serious eye irritation.

Symptoms related to the physical, chemical and toxicological characteristics

- Ingestion:** No data available.
- Inhalation:** No data available.
- Skin Contact:** No data available.
- Eye contact:** No data available.

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

Oral
Product: Not classified for acute toxicity based on available data.

Dermal
Product: Not classified for acute toxicity based on available data.

Inhalation
Product: Not classified for acute toxicity based on available data.

Repeated dose toxicity
Product: No data available.

Skin Corrosion/Irritation
Product: No data available.

Serious Eye Damage/Eye Irritation
Product: No data available.

Respiratory or Skin Sensitization
Product: No data available.

Carcinogenicity
Product: No data available.



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):

No carcinogenic components identified

Germ Cell Mutagenicity

In vitro

Product: No data available.

In vivo

Product: No data available.

Reproductive toxicity

Product: No data available.

Specific Target Organ Toxicity - Single Exposure

Product: No data available.

Specific Target Organ Toxicity - Repeated Exposure

Product: No data available.

Aspiration Hazard

Product: No data available.

Other effects: No data available.

Section 12 – Ecological Information

General information: This product has not been evaluated for ecological toxicity or other environmental effects.

Section 13 – Disposal Consideration

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws. Dispose of waste at an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal. It is the responsibility of the product user or owner to determine at the time of disposal, which waste regulations must be applied.

Contaminated Packaging: Empty containers should be taken to an approved waste handling site for recycling or disposal.



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 14 – Transportation Information

DOT

Not regulated.

IMDG

Not regulated.

IATA

Not regulated.

Section 15 – Regulatory Information

US Federal Regulations

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

None present or none present in regulated quantities.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate (Acute) Health Hazards
Serious eye damage or eye irritation

SARA 313 (TRI Reporting)

| <u>Chemical Identity</u> | <u>Reporting threshold for other users</u> | <u>Reporting threshold for manufacturing and processing</u> |
|--------------------------|--|---|
| Zinc compound | 10000 lbs | 25000 lbs. |

US State Regulations

US. California Proposition 65

No ingredient regulated by CA Prop 65 present.



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 16 – Other Information

Prepared by: Ridge Tool Company (Operating Standard 6-108)

Issue Date: May 1, 2018

Last Revision Date: March 30, 2017

RIDGE TOOL BELIEVES THE STATEMENTS, TECHNICAL INFORMATION AND RECOMMENDATIONS CONTAINED HEREIN ARE RELIABLE BUT THEY ARE GIVEN WITHOUT WARRANTY OR GUARANTEE OF ANY KIND, EXPRESSED OR IMPLIED, AND WE ASSUME NO RESPONSIBILITY FOR ANY LOSS, DAMAGE OR EXPENSE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THEIR USE.

MATERIAL SAFETY DATA SHEET

SPOTCHECK® DEVELOPER SKD-S2

1. IDENTIFICATION

Company: MAGNAFLUX
Address: 3624 West Lake Avenue, Glenview, Illinois 60026
Telephone No.: 847-657-5300 (Off-Hour Emergency Number - CHEMTREC - 1-800-424-9300).
Product Use: Penetrant inspection developer
Packages: 1 gallon can, 5 gallon pail, 55 gallon drum, aerosol
NFPA Rating: Health 1, Flammability 3, (aerosol 4), Reactivity 0
PIN (Canada): UN 1993
Revision Date: September 5, 2012

2. COMPOSITION/INFORMATION ON INGREDIENTS

| Ingredient | Wt./Wt.% | CAS# | TLV | PEL | LD ₅₀ | LC ₅₀ |
|---|----------|------------|---------------|----------|----------------------|------------------|
| 2-propanol | 40 – 70 | 67-63-0 | 400 ppm | 400 ppm | 3.6 g/kg(oral/mouse) | Not available |
| 2-propanone | 10 – 30 | 67-64-1 | 750 ppm | 750 ppm | 6 g/kg (oral/rat) | Not available |
| Isobutane (propellant – aerosol only) | 30 | 75-28-5 | Not available | 1000 ppm | Not available | Not available |
| Talc | 1 - 3 | 14807-96-6 | Not available | 2 mg/me | Not available | Not available |

3. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

Extremely flammable white liquid and aerosol. Fast evaporating vapors can reach hazardous levels quickly in unventilated spaces.

POTENTIAL HEALTH EFFECTS & SIGNS AND SYMPTOMS OF EXPOSURE:

Skin Contact: Can irritate by removing natural skin oils on long or repeated exposures.
Eyes: Irritating, but does not damage eye tissue.
Inhalation: Causes dizziness and nausea.
Ingestion: Not significant in small (mouthful) amounts.
Medical conditions known to be aggravated by exposure to product: None

4. FIRST AID

Skin Contact: Remove contaminated clothing. Wash exposed areas with soap and water. Use soothing lotion.
Eyes: Rinse carefully under upper and lower eyelids using plenty of water.
Inhalation: Remove to fresh air if dizzy or nauseated.
Ingestion: Do not induce vomiting. Accidental ingestion of a single mouthful is not expected to cause significant harm.
NOTE: In all severe cases, contact physician immediately. Local telephone operators can furnish number of regional poison control center.

5. FIRE HAZARD

Conditions of flammability: Non-aerosol and aerosol: Ignition will occur if used near flames, arcs or other ignition sources.
Flash point: 2°F (-16°C) (Pensky-Martens closed cup).
Flammable limits in air: 2% to 15%.
Extinguishing media: Carbon dioxide, foam, water.
Special fire fighting procedures: Keep containers cool with water spray.
Hazardous combustion products: Soot, oxides of carbon.
Unusual fire hazards: Aerosol cans may burst over 130°F (54°C) and add to existing fire.

6. ACCIDENTAL RELEASE MEASURES

Turn off or remove sources of ignition. Mop up or sweep up with absorbent. (For disposal, see Section 13.)

7. HANDLING AND STORAGE

Avoid breathing vapors. Avoid eye contact. Avoid repeated or prolonged skin contact. Store away from heat source. Do not spray around arcs or flame.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Controls: Use where ventilation will carry vapors away from occupied areas.
Personal protection : Wear safety glasses to protect eyes. Wear nitrile rubber gloves if hand exposure is unavoidable. Respirator with filter if sprayed in enclosed, unventilated space.

MAGNAFLUX

A Division of Illinois Tool Works Inc.
 3624 WEST LAKE AVENUE ■ GLENVIEW, ILLINOIS 60026
 TEL 847.657.5300 ■ FAX 847.657.5388
 www.magnaflex.com

9. **PHYSICAL PROPERTIES**

| | | | |
|--------------------------------------|---------------------------|--------------------------|--|
| <i>Initial boiling point (bulk):</i> | 132° F (55°C) (ASTM D-86) | <i>Vapor pressure:</i> | Bulk: 150mm @ 100°F (38°C). Aerosol: 65 psi @ 75°F (24°C) |
| <i>Percent volatile:</i> | 90% | <i>Vapor density:</i> | 3 |
| <i>Density/sp. gravity:</i> | 0.87 | <i>Evaporation rate:</i> | 0.4 of ether |
| <i>Water solubility:</i> | 90 | <i>Appearance:</i> | White liquid |
| <i>pH:</i> | Neutral | <i>Odor:</i> | Alcohol odor |

10. **STABILITY AND REACTIVITY**

| | |
|--|--------------------------------------|
| <i>Stability:</i> | Stable |
| <i>Incompatibility:</i> | None |
| <i>Hazardous decomposition products:</i> | When burning, soot, oxides of carbon |
| <i>Reactivity:</i> | None |

11. **TOXICOLOGICAL INFORMATION**

| | |
|--------------------------------------|---|
| <i>Carcinogenicity:</i> | Contains no known or suspected carcinogens listed with OSHA, IARC, NTP, or ACGIH. |
| <i>Threshold limit value (Bulk):</i> | 400 ppm |
| <i>WHMIS information (Canada):</i> | According to available information, the ingredients have not been found to show reproductive toxicity, teratogenicity, mutagenicity, skin sensitization, or synergistic toxic effects with other materials. |

12. **ECOLOGICAL INFORMATION**

No data is available on SKD-S2.

13. **DISPOSAL**

| | |
|--|------------------|
| Send to a licensed waste facility for proper disposal. | |
| <i>RCRA:</i> | Hazardous waste. |
| <i>U.S. EPA Waste Number:</i> | D001 |

14. **TRANSPORTATION (These are guidelines, in all cases refer to 49 CFR for proper classification)**

U.S. DOT: 49 CFR 172.101 Hazardous Materials Table

| | <u>Non-Aerosol</u> | <u>Aerosol</u> |
|----------------------------------|--|--------------------|
| <i>Proper shipping name:</i> | Flammable Liquid, n.o.s. (Isopropanol, acetone) | Consumer commodity |
| <i>Hazard class or division:</i> | 3 | ORM-D |
| <i>Identification No.:</i> | UN1993 | None |
| <i>Packing Group:</i> | II | None |

IATA: List of Dangerous Goods

| | <u>Non-aerosol</u> | <u>Aerosol</u> |
|----------------------------------|--|---------------------|
| <i>Proper shipping name:</i> | Flammable liquid, n.o.s. (Isopropanol, Acetone) | Aerosols, flammable |
| <i>Hazard class or division:</i> | 3 | 2.1 |
| <i>Identification No.:</i> | UN1993 | UN1950 |
| <i>Packing Group:</i> | II | - |

IMDG: General Index

| | <u>Non-aerosol</u> | <u>Aerosol</u> |
|----------------------------------|--|----------------|
| <i>Proper shipping name:</i> | FLAMMABLE LIQUID, N.O.S. (ISOPROPANOL, ACETONE) | AEROSOLS |
| <i>Hazard class or division:</i> | 3.2 | 2.1 |
| <i>Identification No.:</i> | UN1993 | UN1950 |
| <i>Packing Group:</i> | II | - |

15. **REGULATORY INFORMATION**

| | |
|-------------------------------------|---|
| <i>TSCA:</i> | All ingredients are listed in TSCA inventory. |
| <i>CERCLA:</i> | Reportable quantity (RQ) for Acetone = 5000 lbs. |
| <i>SARA TITLE III, Section 313:</i> | Acetone. |
| <i>California Proposition 65:</i> | This product contains trace amount of chemicals known to the State of California to cause cancer and to cause birth defects or other reproductive harm. |
| <i>WHMIS Class (Canada):</i> | Non-Aerosol: B-2, D-2B - Aerosol: A, B-5, D-2B |

Note: This MSDS has been prepared to meet WHMIS (Canada) requirements with the exception of using 16 headings.

16. **OTHER INFORMATION**

| | |
|----------------------------|----------------------------|
| <i>Revision Statement:</i> | Review |
| <i>Supersedes:</i> | October 26, 2004 |
| <i>Prepared by:</i> | Tamie Simmons, R&D Manager |



SAFETY DATA SHEET
DDP SPECIALTY ELECTRONIC MATERIALS
US 9, LLC

Product name: MOLYKOTE® D Paste

Issue Date: 10/17/2018

Print Date: 04/30/2020

DDP SPECIALTY ELECTRONIC MATERIALS US 9, LLC encourages and expects you to read and understand the entire (M)SDS, as there is important information throughout the document. We expect you to follow the precautions identified in this document unless your use conditions would necessitate other appropriate methods or actions.

1. IDENTIFICATION

Product name: MOLYKOTE® D Paste

Recommended use of the chemical and restrictions on use

Identified uses: Lubricants and lubricant additives

COMPANY IDENTIFICATION

DDP SPECIALTY ELECTRONIC MATERIALS
US 9, LLC
974 Centre Road
Wilmington DE 19805
UNITED STATES

Customer Information Number:

833-338-7668

SDSQuestion-NA@dupont.com

EMERGENCY TELEPHONE NUMBER

24-Hour Emergency Contact: 1-800-424-9300

Local Emergency Contact: 800-424-9300

2. HAZARDS IDENTIFICATION

Hazard classification

GHS classification in accordance with 29 CFR 1910.1200

Not a hazardous substance or mixture.

Other hazards

No data available

3. COMPOSITION/INFORMATION ON INGREDIENTS

Chemical nature: Inorganic and organic compounds, in mineral oil

This product is a mixture.

Component

CASRN

Concentration

| | | |
|--|------------|---------------------|
| White mineral oil (petroleum) | 8042-47-5 | >= 20.0 - <= 30.0 % |
| Distillates (petroleum), hydrotreated heavy naphthenic | 64742-52-5 | >= 10.0 - <= 14.0 % |
| Distillates, petroleum, solvent-refined heavy naphthenic | 64741-96-4 | >= 4.0 - <= 6.0 % |
| Solvent dewaxed heavy paraffinic distillates | 64742-65-0 | >= 1.9 - <= 2.8 % |
| Paraffin/Hydrocarbon waxes | 8002-74-2 | >= 1.2 - <= 2.2 % |
| Lithium 12-hydroxyoctadecanoate | 7620-77-1 | >= 1.2 - <= 1.7 % |
| Petroleum Distillates, Hydrotreated, Heavy Paraffinic | 64742-54-7 | >= 0.9 - <= 1.2 % |

4. FIRST AID MEASURES

Description of first aid measures

General advice:

If potential for exposure exists refer to Section 8 for specific personal protective equipment.

Inhalation: Move person to fresh air; if effects occur, consult a physician.

Skin contact: Wash off with plenty of water.

Eye contact: Flush eyes thoroughly with water for several minutes. Remove contact lenses after the initial 1-2 minutes and continue flushing for several additional minutes. If effects occur, consult a physician, preferably an ophthalmologist. Suitable emergency eye wash facility should be available in work area.

Ingestion: No emergency medical treatment necessary.

Most important symptoms and effects, both acute and delayed: Aside from the information found under Description of first aid measures (above) and Indication of immediate medical attention and special treatment needed (below), any additional important symptoms and effects are described in Section 11: Toxicology Information.

Indication of any immediate medical attention and special treatment needed

Notes to physician: No specific antidote. Treatment of exposure should be directed at the control of symptoms and the clinical condition of the patient.

5. FIREFIGHTING MEASURES

Suitable extinguishing media: Water spray Alcohol-resistant foam Carbon dioxide (CO₂) Dry chemical

Unsuitable extinguishing media: None known.

Special hazards arising from the substance or mixture

Hazardous combustion products: Metal oxides Carbon oxides Oxides of phosphorus
Formaldehyde

Unusual Fire and Explosion Hazards: Exposure to combustion products may be a hazard to health.

Advice for firefighters

Fire Fighting Procedures: Use extinguishing measures that are appropriate to local circumstances and the surrounding environment. Use water spray to cool unopened containers. Remove undamaged containers from fire area if it is safe to do so. Evacuate area.

Special protective equipment for firefighters: Wear self-contained breathing apparatus for firefighting if necessary. Use personal protective equipment.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures: Follow safe handling advice and personal protective equipment recommendations.

Environmental precautions: Discharge into the environment must be avoided. Prevent further leakage or spillage if safe to do so. Retain and dispose of contaminated wash water. Local authorities should be advised if significant spillages cannot be contained.

Methods and materials for containment and cleaning up: Wipe up or scrape up and contain for salvage or disposal. Local or national regulations may apply to releases and disposal of this material, as well as those materials and items employed in the cleanup of releases. You will need to determine which regulations are applicable. For large spills, provide dyking or other appropriate containment to keep material from spreading. If dyked material can be pumped, Sections 13 and 15 of this SDS provide information regarding certain local or national requirements.
See sections: 7, 8, 11, 12 and 13.

7. HANDLING AND STORAGE

Precautions for safe handling: Take care to prevent spills, waste and minimize release to the environment. Handle in accordance with good industrial hygiene and safety practice. Take care to prevent spills, waste and minimize release to the environment. Handle in accordance with good industrial hygiene and safety practice.
Use only with adequate ventilation. See Engineering measures under EXPOSURE CONTROLS/PERSONAL PROTECTION section.

Conditions for safe storage: Keep in properly labelled containers. Store in accordance with the particular national regulations.

Do not store with the following product types: Strong oxidizing agents.
Unsuitable materials for containers: None known.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

If exposure limits exist, they are listed below. If no exposure limits are displayed, then no values are applicable.

| Component | Regulation | Type of listing | Value/Notation |
|--|------------|-------------------------|----------------|
| White mineral oil (petroleum) | OSHA P0 | TWA | 5 mg/m3 |
| | OSHA Z-1 | TWA Mist | 5 mg/m3 |
| | ACGIH | TWA Inhalable fraction | 5 mg/m3 |
| Distillates (petroleum), hydrotreated heavy naphthenic | OSHA Z-1 | TWA Mist | 5 mg/m3 |
| | ACGIH | TWA Inhalable fraction | 5 mg/m3 |
| Distillates, petroleum, solvent-refined heavy naphthenic | OSHA Z-1 | TWA Mist | 5 mg/m3 |
| | ACGIH | TWA Inhalable fraction | 5 mg/m3 |
| Solvent dewaxed heavy paraffinic distillates | OSHA P0 | TWA Mist | 5 mg/m3 |
| | OSHA Z-1 | TWA Mist | 5 mg/m3 |
| | ACGIH | TWA Inhalable fraction | 5 mg/m3 |
| Paraffin/Hydrocarbon waxes | ACGIH | TWA | 2 mg/m3 |
| | OSHA P0 | TWA | 2 mg/m3 |
| | ACGIH | TWA Fumes | 2 mg/m3 |
| Lithium 12-hydroxyoctadecanoate | ACGIH | TWA Inhalable fraction | 10 mg/m3 |
| | ACGIH | TWA Respirable fraction | 3 mg/m3 |
| Petroleum Distillates, Hydrotreated, Heavy Paraffinic | OSHA Z-1 | TWA Mist | 5 mg/m3 |
| | ACGIH | TWA Inhalable fraction | 5 mg/m3 |
| | CAL PEL | PEL particulate | 5 mg/m3 |

Although some of the components of this product may have exposure guidelines, no exposure would be expected under normal handling conditions due to the physical state of the material.

Exposure controls

Engineering controls: Use local exhaust ventilation, or other engineering controls to maintain airborne levels below exposure limit requirements or guidelines. If there are no applicable exposure limit requirements or guidelines, general ventilation should be sufficient for most operations. Local exhaust ventilation may be necessary for some operations.

Individual protection measures

Eye/face protection: Use chemical goggles.

Skin protection

Hand protection: Use gloves chemically resistant to this material when prolonged or frequently repeated contact could occur. Examples of preferred glove barrier materials include: Chlorinated polyethylene. Neoprene. Nitrile/butadiene rubber ("nitrile" or "NBR"). Polyethylene. Ethyl vinyl alcohol laminate ("EVAL"). Polyvinyl alcohol ("PVA"). Viton. Examples of acceptable glove barrier materials include: Butyl rubber. Natural rubber ("latex"). Polyvinyl chloride ("PVC" or "vinyl"). NOTICE: The selection of a specific glove for a particular application and duration of use in a workplace should also take into account all relevant workplace factors such as, but not limited to: Other chemicals which may be handled, physical requirements (cut/puncture protection, dexterity, thermal protection), potential body reactions to glove materials, as well as the instructions/specifications provided by the glove supplier.

Other protection: Wear clean, body-covering clothing.

Respiratory protection: Respiratory protection should be worn when there is a potential to exceed the exposure limit requirements or guidelines. If there are no applicable exposure limit requirements or guidelines, wear respiratory protection when adverse effects, such as respiratory irritation or discomfort have been experienced, or where indicated by your risk assessment process. For most conditions no respiratory protection should be needed; however, if discomfort is experienced, use an approved air-purifying respirator.

The following should be effective types of air-purifying respirators: Organic vapor cartridge with a particulate pre-filter.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

| | |
|--|---|
| Physical state | paste |
| Color | off-white |
| Odor | slight |
| Odor Threshold | No data available |
| pH | Not applicable |
| Melting point/range | No data available |
| Freezing point | No data available |
| Boiling point (760 mmHg) | Not applicable |
| Flash point | Not applicable |
| Evaporation Rate (Butyl Acetate = 1) | Not applicable |
| Flammability (solid, gas) | Not classified as a flammability hazard |
| Lower explosion limit | No data available |
| Upper explosion limit | No data available |
| Vapor Pressure | Not applicable |
| Relative Vapor Density (air = 1) | No data available |
| Relative Density (water = 1) | 1.27 |
| Water solubility | No data available |
| Partition coefficient: n-octanol/water | No data available |
| Auto-ignition temperature | No data available |

| | |
|----------------------------------|--|
| Decomposition temperature | No data available |
| Dynamic Viscosity | Not applicable |
| Kinematic Viscosity | Not applicable |
| Explosive properties | Not explosive |
| Oxidizing properties | The substance or mixture is not classified as oxidizing. |
| Molecular weight | No data available |
| Particle size | No data available |

NOTE: The physical data presented above are typical values and should not be construed as a specification.

10. STABILITY AND REACTIVITY

Reactivity: Not classified as a reactivity hazard.

Chemical stability: Stable under normal conditions.

Possibility of hazardous reactions: Can react with strong oxidizing agents.

Conditions to avoid: None known.

Incompatible materials: Oxidizing agents

Hazardous decomposition products

No hazardous decomposition products are known.

11. TOXICOLOGICAL INFORMATION

Toxicological information appears in this section when such data is available.

Acute toxicity

Acute oral toxicity

Very low toxicity if swallowed. Harmful effects not anticipated from swallowing small amounts.

As product: Single dose oral LD50 has not been determined.

Based on information for component(s):

LD50, Rat, > 5,000 mg/kg Estimated.

Acute dermal toxicity

Prolonged skin contact is unlikely to result in absorption of harmful amounts.

As product: The dermal LD50 has not been determined.

Based on information for component(s):

LD50, Rabbit, > 2,000 mg/kg Estimated.

Acute inhalation toxicity

Brief exposure (minutes) is not likely to cause adverse effects. Vapor from heated material may cause respiratory irritation.
As product: The LC50 has not been determined.

Skin corrosion/irritation

Brief contact is essentially nonirritating to skin.

Serious eye damage/eye irritation

May cause moderate eye irritation.
Corneal injury is unlikely.

Sensitization

For skin sensitization:

Contains component(s) which did not cause allergic skin sensitization in guinea pigs.
Contains component(s) which have not demonstrated the potential for contact allergy in mice.

For respiratory sensitization:

No relevant data found.

Specific Target Organ Systemic Toxicity (Single Exposure)

Evaluation of available data suggests that this material is not an STOT-SE toxicant.

Specific Target Organ Systemic Toxicity (Repeated Exposure)

Contains component(s) which have been reported to cause effects on the following organs in animals:
Liver.

Carcinogenicity

Contains component(s) which did not cause cancer in laboratory animals.

Teratogenicity

Contains component(s) which, in laboratory animals, have been toxic to the fetus only at doses toxic to the mother. Contains component(s) which did not cause birth defects in laboratory animals.

Reproductive toxicity

Contains component(s) which did not interfere with reproduction in animal studies.

Mutagenicity

Contains component(s) which were negative in some in vitro genetic toxicity studies and positive in others. Contains component(s) which were negative in animal genetic toxicity studies.

Aspiration Hazard

Based on physical properties, not likely to be an aspiration hazard.

COMPONENTS INFLUENCING TOXICOLOGY:

White mineral oil (petroleum)

Acute inhalation toxicity

LC50, Rat, male and female, 4 Hour, dust/mist, > 5 mg/l OECD Test Guideline 403

Distillates (petroleum), hydrotreated heavy naphthenic

Acute inhalation toxicity

LC50, Rat, 4 Hour, dust/mist, > 5.53 mg/l OECD Test Guideline 403

Distillates, petroleum, solvent-refined heavy naphthenic**Acute inhalation toxicity**

LC50, Rat, male and female, 4 Hour, dust/mist, > 5 mg/l

Solvent dewaxed heavy paraffinic distillates**Acute inhalation toxicity**

LC50, Rat, male and female, 4 Hour, dust/mist, > 5 mg/l No deaths occurred at this concentration.

Paraffin/Hydrocarbon waxes**Acute inhalation toxicity**

The LC50 has not been determined.

Lithium 12-hydroxyoctadecanoate**Acute inhalation toxicity**

The LC50 has not been determined.

Petroleum Distillates, Hydrotreated, Heavy Paraffinic**Acute inhalation toxicity**

For this family of materials: LC50, Rat, 4 Hour, vapour, 2.18 mg/l

12. ECOLOGICAL INFORMATION

Ecotoxicological information appears in this section when such data is available.

Toxicity**White mineral oil (petroleum)****Acute toxicity to fish**

Material is practically non-toxic to aquatic organisms on an acute basis (LC50/EC50/EL50/LL50 >100 mg/L in the most sensitive species tested).
LL50, Oncorhynchus mykiss (rainbow trout), static test, 96 Hour, > 100 mg/l, OECD Test Guideline 203

Acute toxicity to aquatic invertebrates

LL50, Daphnia magna (Water flea), static test, 48 Hour, > 100 mg/l, OECD Test Guideline 202

Acute toxicity to algae/aquatic plants

NOEC, Pseudokirchneriella subcapitata (green algae), 72 Hour, 100 mg/l, OECD Test Guideline 201

Chronic toxicity to fish

NOEC, Oncorhynchus mykiss (rainbow trout), 28 d, 1,000 mg/l

Chronic toxicity to aquatic invertebrates

NOEC, Daphnia magna (Water flea), 21 d, 1,000 mg/l

Distillates (petroleum), hydrotreated heavy naphthenic**Acute toxicity to fish**

Material is practically non-toxic to aquatic organisms on an acute basis (LC50/EC50/EL50/LL50 >100 mg/L in the most sensitive species tested).

LL50, Pimephales promelas (fathead minnow), 96 Hour, > 100 mg/l, OECD Test Guideline 203

Acute toxicity to aquatic invertebrates

EL50, Daphnia magna (Water flea), 48 Hour, > 10,000 mg/l

Acute toxicity to algae/aquatic plants

EL50, Pseudokirchneriella subcapitata (green algae), 72 Hour, > 100 mg/l, OECD Test Guideline 201

NOELR, Pseudokirchneriella subcapitata (green algae), 72 Hour, 100 mg/l, OECD Test Guideline 201

Toxicity to bacteria

NOEC, 10 min, >= 1.93 mg/l

Chronic toxicity to aquatic invertebrates

NOELR, Daphnia magna (Water flea), 21 d, 10 mg/l

Distillates, petroleum, solvent-refined heavy naphthenic

Acute toxicity to fish

Material is practically non-toxic to aquatic organisms on an acute basis (LC50/EC50/EL50/LL50 >100 mg/L in the most sensitive species tested).

LL50, Pimephales promelas (fathead minnow), Static, 96 Hour, > 100 mg/l

Acute toxicity to aquatic invertebrates

Gammarus fasciatus (freshwater shrimp), semi-static test, 96 Hour, > 1,000 mg/l

Acute toxicity to algae/aquatic plants

ErC50, Pseudokirchneriella subcapitata (green algae), Static, 72 Hour, Growth rate, > 100 mg/l

Toxicity to bacteria

Based on data from similar materials

NOEC, 10 min, > 1.93 mg/l, DIN 38 412 Part 8

Chronic toxicity to aquatic invertebrates

Based on data from similar materials

NOEC, Daphnia magna (Water flea), 21 d, 10 mg/l

Solvent dewaxed heavy paraffinic distillates

Acute toxicity to fish

Material is practically non-toxic to aquatic organisms on an acute basis (LC50/EC50/EL50/LL50 >100 mg/L in the most sensitive species tested).

LL50, Pimephales promelas (fathead minnow), static test, 96 Hour, > 100 mg/l

Acute toxicity to aquatic invertebrates

EL50, Daphnia magna (Water flea), static test, 48 Hour, > 10,000 mg/l

Acute toxicity to algae/aquatic plants

NOEC, Pseudokirchneriella subcapitata (green algae), static test, 72 Hour, Growth rate, > 100 mg/l

Toxicity to bacteria

Based on data from similar materials

NOEC, 10 min, > 1.93 mg/l, DIN 38 412 Part 8

Chronic toxicity to aquatic invertebrates

Based on data from similar materials

NOEC, Daphnia magna (Water flea), 21 d, 10 mg/l

Paraffin/Hydrocarbon waxes

Acute toxicity to fish

Based on information for component(s):

Material is practically non-toxic to aquatic organisms on an acute basis (LC50/EC50/EL50/LL50 >100 mg/L in the most sensitive species tested).

Lithium 12-hydroxyoctadecanoate

Acute toxicity to fish

Material is practically non-toxic to aquatic organisms on an acute basis (LC50/EC50/EL50/LL50 >100 mg/L in the most sensitive species tested).

LC50, Oncorhynchus mykiss (rainbow trout), semi-static test, 96 Hour, > 100 mg/l, OECD Test Guideline 203

Acute toxicity to aquatic invertebrates

EC50, Daphnia magna (Water flea), static test, 48 Hour, > 100 mg/l, OECD Test Guideline 202

Acute toxicity to algae/aquatic plants

EC50, Pseudokirchneriella subcapitata (green algae), static test, 72 Hour, Growth rate, > 160 mg/l, OECD Test Guideline 201

Petroleum Distillates, Hydrotreated, Heavy Paraffinic

Acute toxicity to fish

Typical for this family of materials.

Material is practically non-toxic to aquatic organisms on an acute basis (LC50/EC50/EL50/LL50 >100 mg/L in the most sensitive species tested).

For this family of materials:

LC50, Oncorhynchus mykiss (rainbow trout), semi-static test, 96 Hour, > 100 mg/l

Acute toxicity to aquatic invertebrates

For this family of materials:

EC50, Daphnia magna (Water flea), semi-static test, 48 Hour, > 100 mg/l

Acute toxicity to algae/aquatic plants

NOELR, Pseudokirchneriella subcapitata (green algae), 72 Hour, >100, OECD Test Guideline 201

ErC50, Pseudokirchneriella subcapitata (green algae), 72 Hour, >100, OECD Test Guideline 201

Toxicity to bacteria

Based on data from similar materials

NOEC, 10 min, > 1.93 mg/l, DIN 38 412 Part 8

Chronic toxicity to aquatic invertebrates

NOEC, Daphnia magna (Water flea), semi-static test, 21 d, number of offspring, 10 mg/l

Persistence and degradability

White mineral oil (petroleum)

Biodegradability: Based on stringent OECD test guidelines, this material cannot be considered as readily biodegradable; however, these results do not necessarily mean that the material is not biodegradable under environmental conditions. Material is inherently biodegradable (reaches > 20% biodegradation in OECD test(s) for inherent biodegradability).

10-day Window: Fail

Biodegradation: 0 - 24 %

Exposure time: 28 d

Method: OECD Test Guideline 301B or Equivalent

Theoretical Oxygen Demand: 3.50 mg/mg

Photodegradation

Test Type: Half-life (indirect photolysis)

Sensitization: OH radicals

Atmospheric half-life: 1.291 d

Method: Estimated.

Distillates (petroleum), hydrotreated heavy naphthenic

Biodegradability: Material is expected to biodegrade very slowly (in the environment). Fails to pass OECD/EEC tests for ready biodegradability.

10-day Window: Fail

Biodegradation: 31 %

Exposure time: 28 d

Method: OECD Test Guideline 301F

Distillates, petroleum, solvent-refined heavy naphthenic

Biodegradability: Material is expected to biodegrade very slowly (in the environment). Fails to pass OECD/EEC tests for ready biodegradability.

10-day Window: Fail

Biodegradation: 2 - 4 %

Exposure time: 28 d

Solvent dewaxed heavy paraffinic distillates

Biodegradability: Material is expected to biodegrade very slowly (in the environment). Fails to pass OECD/EEC tests for ready biodegradability.

10-day Window: Fail

Biodegradation: 2 %

Exposure time: 28 d

Method: OECD Test Guideline 301B

Paraffin/Hydrocarbon waxes

Biodegradability: Material is readily biodegradable. Passes OECD test(s) for ready biodegradability.

10-day Window: Pass

Biodegradation: 80 %

Exposure time: 28 d

Method: OECD Test Guideline 301B or Equivalent

Lithium 12-hydroxyoctadecanoate

Biodegradability: Material is readily biodegradable. Passes OECD test(s) for ready biodegradability.

10-day Window: Pass

Biodegradation: 78 %
Exposure time: 28 d
Method: OECD Test Guideline 301C

Petroleum Distillates, Hydrotreated, Heavy Paraffinic

Biodegradability: For this family of materials: Based on stringent OECD test guidelines, this material cannot be considered as readily biodegradable; however, these results do not necessarily mean that the material is not biodegradable under environmental conditions.
10-day Window: Fail
Biodegradation: 1.5 - 29 %
Exposure time: 28 d
Method: OECD Test Guideline 301B or Equivalent

Bioaccumulative potential

White mineral oil (petroleum)

Bioaccumulation: Bioconcentration potential is high (BCF > 3000 or Log Pow between 5 and 7).
Partition coefficient: n-octanol/water(log Pow): 5.18 Measured
Bioconcentration factor (BCF): 1,900 Fish

Distillates (petroleum), hydrotreated heavy naphthenic

Bioaccumulation: No relevant data found.

Distillates, petroleum, solvent-refined heavy naphthenic

Bioaccumulation: Bioconcentration potential is moderate (BCF between 100 and 3000 or Log Pow between 3 and 5).
Partition coefficient: n-octanol/water(log Pow): 3 - 6 Estimated.

Solvent dewaxed heavy paraffinic distillates

Bioaccumulation: Bioconcentration potential is high (BCF > 3000 or Log Pow between 5 and 7).
Partition coefficient: n-octanol/water(log Pow): 3.9 - 6 Estimated.

Paraffin/Hydrocarbon waxes

Bioaccumulation: Bioconcentration potential is low (BCF less than 100 or log Pow greater than 7).
Partition coefficient: n-octanol/water(log Pow): > 6 Calculated.

Lithium 12-hydroxyoctadecanoate

Bioaccumulation: No relevant data found.

Petroleum Distillates, Hydrotreated, Heavy Paraffinic

Bioaccumulation: For this family of materials: Bioconcentration potential is low (BCF less than 100 or log Pow greater than 7).

Mobility in soil

White mineral oil (petroleum)

Potential for mobility in soil is low (Koc between 500 and 2000).
Partition coefficient (Koc): 510 Estimated.

Distillates (petroleum), hydrotreated heavy naphthenic

No relevant data found.

Distillates, petroleum, solvent-refined heavy naphthenic

No relevant data found.

Solvent dewaxed heavy paraffinic distillates

No relevant data found.

Paraffin/Hydrocarbon waxes

No relevant data found.

Lithium 12-hydroxyoctadecanoate

No relevant data found.

Petroleum Distillates, Hydrotreated, Heavy Paraffinic

No relevant data found.

13. DISPOSAL CONSIDERATIONS

Disposal methods: DO NOT DUMP INTO ANY SEWERS, ON THE GROUND, OR INTO ANY BODY OF WATER. All disposal practices must be in compliance with all Federal, State/Provincial and local laws and regulations. Regulations may vary in different locations. Waste characterizations and compliance with applicable laws are the responsibility solely of the waste generator. AS YOUR SUPPLIER, WE HAVE NO CONTROL OVER THE MANAGEMENT PRACTICES OR MANUFACTURING PROCESSES OF PARTIES HANDLING OR USING THIS MATERIAL. THE INFORMATION PRESENTED HERE PERTAINS ONLY TO THE PRODUCT AS SHIPPED IN ITS INTENDED CONDITION AS DESCRIBED IN MSDS SECTION: Composition Information. FOR UNUSED & UNCONTAMINATED PRODUCT, the preferred options include sending to a licensed, permitted: Incinerator or other thermal destruction device. For additional information, refer to: Handling & Storage Information, MSDS Section 7 Stability & Reactivity Information, MSDS Section 10 Regulatory Information, MSDS Section 15

Treatment and disposal methods of used packaging: Empty containers should be recycled or otherwise disposed of by an approved waste management facility. Waste characterizations and compliance with applicable laws are the responsibility solely of the waste generator. Do not re-use containers for any purpose.

14. TRANSPORT INFORMATION

DOT

Not regulated for transport

Classification for SEA transport (IMO-IMDG):

Not regulated for transport

**Transport in bulk
according to Annex I or II
of MARPOL 73/78 and the
IBC or IGC Code**

Consult IMO regulations before transporting ocean bulk

Classification for AIR transport (IATA/ICAO):

Not regulated for transport

This information is not intended to convey all specific regulatory or operational requirements/information relating to this product. Transportation classifications may vary by container volume and may be influenced by regional or country variations in regulations. Additional transportation system information can be obtained through an authorized sales or customer service representative. It is the responsibility of the transporting organization to follow all applicable laws, regulations and rules relating to the transportation of the material.

15. REGULATORY INFORMATION

Superfund Amendments and Reauthorization Act of 1986 Title III (Emergency Planning and Community Right-to-Know Act of 1986) Sections 311 and 312

No SARA Hazards

Superfund Amendments and Reauthorization Act of 1986 Title III (Emergency Planning and Community Right-to-Know Act of 1986) Section 313

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Comprehensive Environmental Response, Compensation, and Liability Act of 1980 (CERCLA) Section 103

This material does not contain any components with a CERCLA RQ.

Pennsylvania Right To Know

The following chemicals are listed because of the additional requirements of Pennsylvania law:

| Components | CASRN |
|--|------------|
| Calcium hydroxide | 1305-62-0 |
| White mineral oil (petroleum) | 8042-47-5 |
| Distillates (petroleum), hydrotreated heavy naphthenic | 64742-52-5 |
| Hydroxylapatite | 1306-06-5 |
| Distillates, petroleum, solvent-refined heavy naphthenic | 64741-96-4 |
| Solvent dewaxed heavy paraffinic distillates | 64742-65-0 |
| Paraffin/Hydrocarbon waxes | 8002-74-2 |
| Petroleum Distillates, Hydrotreated, Heavy Paraffinic | 64742-54-7 |

California Prop. 65

WARNING: This product can expose you to chemicals including Solvent dewaxed heavy paraffinic distillates, Petroleum Distillates, Hydrotreated, Heavy Paraffinic, which is/are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

United States TSCA Inventory (TSCA)

The product contains an intentional component that is subject to a restriction. Production and/or use is limited by the conditions of the restriction.

16. OTHER INFORMATION

Hazard Rating System

NFPA

| Health | Flammability | Instability |
|--------|--------------|-------------|
| 0 | 1 | 0 |

HMIS

| Health | Flammability | Physical Hazard |
|--------|--------------|-----------------|
| 0/ | 1 | 0 |

Revision

Identification Number: 1288466 / A776 / Issue Date: 10/17/2018 / Version: 5.0

Most recent revision(s) are noted by the bold, double bars in left-hand margin throughout this document.

Legend

| | |
|----------|---|
| ACGIH | USA. ACGIH Threshold Limit Values (TLV) |
| CAL PEL | California permissible exposure limits for chemical contaminants (Title 8, Article 107) |
| OSHA P0 | USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000 |
| OSHA Z-1 | USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants |
| PEL | Permissible exposure limit |
| TWA | 8-hour, time-weighted average |

Full text of other abbreviations

AICS - Australian Inventory of Chemical Substances; ASTM - American Society for the Testing of Materials; bw - Body weight; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CMR - Carcinogen, Mutagen or Reproductive Toxicant; DIN - Standard of the German Institute for Standardisation; DOT - Department of Transportation; DSL - Domestic Substances List (Canada); ECx - Concentration associated with x% response; EHS - Extremely Hazardous Substance; ELx - Loading rate associated with x% response; EmS - Emergency Schedule; ENCS - Existing and New Chemical Substances (Japan); ErCx - Concentration associated with x% growth rate response; ERG - Emergency Response Guide; GHS - Globally Harmonized System; GLP - Good Laboratory Practice; HMIS - Hazardous Materials Identification System; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; IBC - International Code for the Construction and Equipment of Ships carrying Dangerous Chemicals in Bulk; IC50 - Half maximal inhibitory concentration; ICAO - International Civil Aviation Organization; IECSC - Inventory of Existing Chemical Substances in China; IMDG - International Maritime Dangerous Goods; IMO - International Maritime Organization; ISHL - Industrial Safety and Health Law (Japan); ISO - International Organisation for Standardization; KECI - Korea Existing Chemicals Inventory; LC50 - Lethal Concentration to 50 % of a test population; LD50 - Lethal Dose to 50% of a test population (Median Lethal Dose); MARPOL - International Convention for the Prevention of Pollution from Ships; MSHA - Mine Safety and Health Administration; n.o.s. - Not Otherwise Specified; NFPA - National Fire Protection Association; NO(A)EC - No Observed (Adverse) Effect Concentration; NO(A)EL - No Observed (Adverse) Effect Level; NOELR - No Observable Effect Loading Rate; NTP - National Toxicology Program; NZIoC - New Zealand Inventory of Chemicals; OECD - Organization for Economic Co-operation and Development; OPPTS - Office of Chemical Safety and Pollution Prevention; PBT - Persistent, Bioaccumulative and Toxic substance; PICCS - Philippines Inventory of Chemicals and Chemical Substances; (Q)SAR - (Quantitative) Structure Activity Relationship; RCRA - Resource Conservation and Recovery Act; REACH - Regulation (EC) No 1907/2006 of the European

Parliament and of the Council concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals; RQ - Reportable Quantity; SADT - Self-Accelerating Decomposition Temperature; SARA - Superfund Amendments and Reauthorization Act; SDS - Safety Data Sheet; TCSI - Taiwan Chemical Substance Inventory; TSCA - Toxic Substances Control Act (United States); UN - United Nations; UNRTDG - United Nations Recommendations on the Transport of Dangerous Goods; vPvB - Very Persistent and Very Bioaccumulative

Information Source and References

This SDS is prepared by Product Regulatory Services and Hazard Communications Groups from information supplied by internal references within our company.

DDP SPECIALTY ELECTRONIC MATERIALS US 9, LLC urges each customer or recipient of this (M)SDS to study it carefully and consult appropriate expertise, as necessary or appropriate, to become aware of and understand the data contained in this (M)SDS and any hazards associated with the product. The information herein is provided in good faith and believed to be accurate as of the effective date shown above. However, no warranty, express or implied, is given. Regulatory requirements are subject to change and may differ between various locations. It is the buyer's/user's responsibility to ensure that his activities comply with all federal, state, provincial or local laws. The information presented here pertains only to the product as shipped. Since conditions for use of the product are not under the control of the manufacturer, it is the buyer's/user's duty to determine the conditions necessary for the safe use of this product. Due to the proliferation of sources for information such as manufacturer-specific (M)SDSs, we are not and cannot be responsible for (M)SDSs obtained from any source other than ourselves. If you have obtained an (M)SDS from another source or if you are not sure that the (M)SDS you have is current, please contact us for the most current version.

US

Safety Data Sheet



1. Identification

Product Name: PTOUCH 2X +SSPR 6PK SATIN HEIRLOOM WHITE
Revision Date: 4/29/2019

Product Identifier: 249076
Supercedes Date: 11/2/2018

Recommended Use: Topcoat/Aerosols

Supplier: Rust-Oleum Corporation
 11 Hawthorn Parkway
 Vernon Hills, IL 60061
 USA
Manufacturer: Rust-Oleum Corporation
 11 Hawthorn Parkway
 Vernon Hills, IL 60061
 USA

Preparer: Regulatory Department

Emergency Telephone: 24 Hour Hotline: 847-367-7700

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

38% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|--|
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Carcinogenicity, category 2 | H351 | Suspected of causing cancer. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |
| STOT, repeated exposure, category 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| Eye Irritation, category 2A | H319 | Causes serious eye irritation. |

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|-----------|--|
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P201 | Obtain special instructions before use. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P405 | Store locked up. |

| | |
|----------------|--|
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P260 | Do not breathe dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|--|----------------|-----------------------|-----------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| Titanium Dioxide | 13463-67-7 | 10-25 | Not Available | Not Available |
| n-Butane | 106-97-8 | 2.5-10 | GHS04 | H280 |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 2.5-10 | GHS02-GHS07 | H226-315-319-332 |
| n-Butyl Acetate | 123-86-4 | 2.5-10 | GHS02-GHS07 | H226-336 |
| Naphtha, Petroleum, Hydrotreated Light | 64742-49-0 | 2.5-10 | GHS08 | H304 |
| Hydrotreated Light Distillate | 64742-47-8 | 2.5-10 | GHS08 | H304 |
| Hydrous Magnesium Silicate | 14807-96-6 | 1.0-2.5 | Not Available | Not Available |
| Ethylbenzene | 100-41-4 | 1.0-2.5 | GHS02-GHS07- GHS08 | H225-304-332-351-373 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately. Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. Closed containers may explode when exposed to extreme heat due to buildup of steam. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Evacuate area and fight fire from a safe distance. Full protective equipment including self-contained breathing apparatus should be used. Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Use only in a well-ventilated area. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Remove contaminated clothing and laundry before reuse. Use only with adequate ventilation. Avoid contact with eyes, skin and clothing.

STORAGE: Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Contents under pressure. Do not expose to heat or store above 120 ° F. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials. Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|---|------------|-----------------------|-------------------|--------------------|--------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 20.0 | N.E. | N.E. | 1000 ppm | N.E. |
| Titanium Dioxide | 13463-67-7 | 15.0 | 10 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 10.0 | 100 ppm | 150 ppm | 100 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 5.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| Naphtha, Petroleum, Hydrotreated Light | 64742-49-0 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Hydrotreated Light Distillate | 64742-47-8 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Hydrous Magnesium Silicate | 14807-96-6 | 5.0 | 2 mg/m3 | N.E. | N.E. | N.E. |
| Ethylbenzene | 100-41-4 | 5.0 | 20 ppm | N.E. | 100 ppm | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use impervious gloves to prevent skin contact and absorption of this material through the skin. Nitrile or Neoprene gloves may afford adequate skin protection. Use gloves to prevent prolonged skin contact.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application. Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Specific Gravity: | 0.820 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 0.9 - 13.0 |
| Boiling Range, °C: | -37 - 537 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalis.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: Substance may cause slight skin irritation. Prolonged or repeated contact may cause skin irritation. May cause skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010) May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage.

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|--|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 1330-20-7 | Xylenes (o-, m-, p- isomers) | 3500 mg/kg Rat | >4350 mg/kg Rabbit | 29.08 mg/L Rat |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 64742-49-0 | Naphtha, Petroleum, Hydrotreated Light | >5000 mg/kg Rat | >3160 mg/kg Rabbit | >4951 mg/L Rat |
| 64742-47-8 | Hydrotreated Light Distillate | >5000 mg/kg Rat | >2000 mg/kg Rabbit | >5000 mg/L Rat |
| 14807-96-6 | Hydrous Magnesium Silicate | 6000 | N.E. | 30 |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Dispose of material in accordance to local, state, and federal regulations and ordinances. Do not allow to enter waterways, wastewater, soil, storm drains or sewer systems. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation. Do not incinerate closed containers.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|---|-----------------------------|---------------------|---------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint and Related Spray Products in Ltd Qty | Aerosols | Aerosols, flammable | Aerosols |
| Hazard Class: | N.A. | 2 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Carcinogenicity, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure)

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------------|----------------|
| Xylenes (o-, m-, p- isomers) | 1330-20-7 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65:

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

16. Other Information**HMIS RATINGS**

Health: 2* Flammability: 4 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: 2 Flammability: 4 Instability: 0

Maximum Incremental Reactivity 0.95

SDS REVISION DATE: 4/29/2019

REASON FOR REVISION: Revision Description Changed
 Product Composition Changed
 Substance and/or Product Properties Changed in Section(s):
 01 - Identification
 02 - Hazard Identification
 16 - Other Information
 Revision Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

1.) Identification of the Mixture and of the Company

Product identifier: **Crown Brite Galvanize Coating 65% Zinc Rich - Aerosol**

Product name:
7008 Crown Brite Galvanize Coating 65% Zinc Rich

Relevant identified uses of the substance: Use on damaged galvanized surfaces, structural steel, automobiles, chain link fences, guard rails, hand rails, bridges, TV and radio towers, heat ducts, welded joints, storage tanks, signs and sign posts, equipment (farming, mining and construction, power plant, railroad, offshore, etc.), gutters, pipelines, transformers, corrugated metal buildings and anywhere the bright look of hot-dipped surfaces is desired. Ideal for industrial type application, (e.g., aviation, marine, manufacturing, petroleum).

Uses advised against: Do not apply at temperatures below 40°F (4°C), or if rain is imminent within 6 hours of application

| | |
|-----------------------------|---|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe Industries Incorporated |
| For Product Information: | 1-800-227-0196 |
| Emergency telephone number: | 1-800-424-9300 (CHEMTREC – 24 hrs) |

2. Hazards identification

Classifications

Physical Hazards: Aerosol - Category 1
 Flam. Liq. 2
 Flam. Liq. 3
 Liquified Gas
 Flam. Gas 1

Health Hazards: Asp. Tox. 1
 Skin Irr. 2
 Eye Irrit. 2
 STOT SE 3

Environmental Hazards: Aquatic Acute 1
 Aquatic Chronic 1
 Aquatic Tox. 2



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Labeling

Signal Word: Danger

Hazard Statements: H220 – Extremely flammable gas.
H222 – Extremely Flammable Aerosol
H224 – Extremely flammable liquid and vapor.
H225 – Highly flammable liquid and vapour.
H226 – Flammable liquid and vapour.
H229 – Pressurized container: may burst if heated
H315 – Causes skin irritation.
H304 – May be fatal if swallowed and enters airways
H319 – Causes serious eye irritation.
H336 – May cause drowsiness or dizziness.
H400 – Very toxic to aquatic life.
H410 – Very toxic to aquatic life with long lasting effects.
H411 – Toxic to aquatic life with long lasting effects.

Precautionary Statements: P101 - If medical advice is needed, have product container or label at hand
P102 - Keep out of reach of children
P103 - Read label before use
P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking
P211 - Do not spray on an open flame or other ignition source
P251 - Pressurized container: Do not pierce or burn, even after use
P261 - Avoid breathing dust/fume/gas/mist/vapours/spray
P262 - Do not get in eyes, on skin, or on clothing
P264 - Wash ... thoroughly after handling
P280 - Wear protective gloves/eye protection/face protection

P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.
P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F
P501 - Dispose of contents/container in accordance with local/regional/national/international regulation

Symbols/Pictograms:



3. Composition / Information on Ingredients

Composition



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|---------------------------------|-----------------|------------|---------------|----------------|---|---|
| Acetone | Propanone | 67-64-1 | 200-662-2 | 30-60% | Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 | H225 H319 H336 |
| Hydrocarbon Propellant | LPG | 68476-86-8 | 270-705-8 | 10-30% | Liquified Gas Flam. Gas 1 | H220 H229 |
| Zinc Powder | Zinc Dust | 7440-66-6 | 231-175-3 | 10-30% | Aquatic Acute 1 Aquatic Chronic 1 | H400 H410 |
| n-Butyl Acetate | n-Butyl Ester | 123-86-4 | 204-658-1 | 10-30% | Flam. Liq. 3 STOT SE 3 | H226 H336 |
| Aliphatic Petroleum Distillates | Solvent Naphtha | 64742-89-8 | 265-192-2 | 1-5% | H224 H304 H315 H336 H411 | GHS02 GHS07 GHS08 Dgr GHS09 |

Other Product Information

Chemical Identity: Mixture

4.) First Aid Measures

| | |
|---|---|
| General Advice: | If symptoms persist, always call a doctor. |
| Inhalation First Aid: | Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately. |
| Skin Contact First Aid: | Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. |
| Eye Contact First Aid: | If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately. |
| Ingestion First Aid: | If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |
| Most Important Symptoms/Effects: | Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects. |

5. Fire Fighting Measures

| | |
|---------------------------------|--|
| Flammable Properties: | Aerosol |
| Auto Ignition Temperature: | Not Available |
| Suitable extinguishing media: | Carbon dioxide, dry chemical, water spray. |
| Unsuitable extinguishing media: | None known |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Special hazards arising from the substance or mixture:

None known

Hazardous combustion products:

Carbon dioxide, Carbon monoxide

Fire & Explosion Hazards:

Closed Containers may rupture due to the buildup of pressure from extreme temperatures.

Precautions for fire-fighters: Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.
- 2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling:

Flammable Aerosol, use in a well ventilated area.
Do not use near sources of ignition.
Do not to eat, drink and smoke while working with this material.
Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
Storage Temperature: 32° to 120°F (0° to 49°C).
No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
Keep away from sources of ignition.
Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|---------------------------------|------------|-----------------|------------------|----------------|-----------------|
| Acetone | 67-64-1 | 250PPM | 500PPM | 1000PPM | N/A |
| Hydrocarbon Propellant | 68476-86-8 | N/A | N/A | N/A | N/A |
| Zinc Powder | 7440-66-6 | N/A | N/A | N/A | N/A |
| n-Butyl Acetate | 123-86-4 | 50PPM | 150PPM | N/A | N/A |
| Aliphatic Petroleum Distillates | 64742-89-8 | N/A | N/A | N/A | N/A |

*Values are based on the 2019 Guide to Occupational Exposure Values by ACGIH

9. Information on Basic Physical and Chemical Properties

| | |
|--|---|
| Appearance: Metallic gray | Odor: Ketone Odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: <0° F (-18° C) | Evaporation Rate: Faster than n-Butyl Acetate |
| Flammability Solid/Gas: Flammable gas | LEL: 0.9% UEL: 12.8% |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions

Chemical stability: Stable under normal conditions

Conditions to avoid: Heat and ignition sources

Incompatible materials: Strong Oxidizing Agents

Hazardous decomposition products: Will not occur

11. Toxicological Information



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: (Acetone) 5800 mg/kg (Rat-Oral)
(Acetone) 21000 ppm/8 hr (Rat-Inha)

Eye irritation data: Eye Irrit 2

Skin irritation/sensitization/absorption data: Skin Irrit 2
Reproductive toxicity data: N/AV

Mutagenicity data: N/AV

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure: Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV
IARC: N/AV
OSHA: TLV-A4

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|--------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference 49 CFR 172.101 |

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|----------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|---|
| UN1950 | Aerosols, Flammable | 2.1 | Not Applicable | Not Applicable | Reference IATA Dangerous Goods Regulation |

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 10/2/19



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Supersedes: 6/6/2018

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.



SAFETY DATA SHEET

1. Identification

Product number 1000000074
Product identifier 19 OZ GLEME GLASS CLEANER LT 12PK
Revision date 08-19-2014
Company information Claire Manufacturing Co.
1005 S. Westgate Drive
Addison, IL 60101 United States
Company phone General Assistance 1-630-543-7600
Emergency telephone US 1-866-836-8855
Emergency telephone outside US 1-952-852-4646
Version # 02
Supersedes date 08-06-2014
Recommended use Glass Cleaner
Recommended restrictions None known.

2. Hazard(s) identification

Physical hazards Gases under pressure Liquefied gas
Health hazards Not classified.
Environmental hazards Not classified.
OSHA defined hazards Not classified.

Label elements



Signal word Warning
Hazard statement Contains gas under pressure; may explode if heated.
Precautionary statement
Prevention Observe good industrial hygiene practices.
Response Wash hands after handling.
Storage Protect from sunlight. Store in a well-ventilated place.
Disposal Dispose of waste and residues in accordance with local authority requirements.
Hazard(s) not otherwise classified (HNOC) The Safety Information Sheet Chemicals of hazardous chemical can be obtained through phone, email or on the company website.
Supplemental information Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|----------|
| 2-Butoxyethanol | | 111-76-2 | 2.5 - 10 |
| Ethyl Alcohol | | 64-17-5 | 2.5 - 10 |
| Butane | | 106-97-8 | 1 - 2.5 |
| Propane | | 74-98-6 | 1 - 2.5 |
| Other components below reportable levels | | | 90 - 100 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Move to fresh air. Get medical attention if symptoms persist. |
| Skin contact | Get medical attention if irritation develops and persists. |
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Water fog. Foam. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire-fighting equipment/instructions | In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Cool containers exposed to heat with water spray and remove container, if no risk is involved. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Move container from fire area if it can be done without risk. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate personal protective equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. See Section 8 of the SDS for Personal Protective Equipment. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. Ground and bond containers when transferring material. Do not re-use empty containers. Do not get this material in contact with skin. Avoid prolonged exposure. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. Store in a well-ventilated place. Refrigeration recommended. Store away from incompatible materials (see Section 10 of the SDS). Level 1 Aerosol (NFPA 30B) |

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|--------------------------------|------|------------------------------------|
| 2-Butoxyethanol (CAS 111-76-2) | PEL | 240 mg/m3 |
| Ethyl Alcohol (CAS 64-17-5) | PEL | 50 ppm 1900 mg/m3 |
| Propane (CAS 74-98-6) | PEL | 1000 ppm 1800 mg/m3 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|--------------------------------|------|----------|
| 2-Butoxyethanol (CAS 111-76-2) | TWA | 20 ppm |
| Butane (CAS 106-97-8) | STEL | 1000 ppm |
| Ethyl Alcohol (CAS 64-17-5) | STEL | 1000 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|--------------------------------|------|--------------------------------|
| 2-Butoxyethanol (CAS 111-76-2) | TWA | 24 mg/m3 |
| Butane (CAS 106-97-8) | TWA | 5 ppm 1900 mg/m3 800 ppm |
| Ethyl Alcohol (CAS 64-17-5) | TWA | 1900 mg/m3 1000 ppm |
| Propane (CAS 74-98-6) | TWA | 1800 mg/m3 1000 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|--------------------------------|----------|--|---------------------|---------------|
| 2-Butoxyethanol (CAS 111-76-2) | 200 mg/g | Butoxyacetic acid (BAA), with hydrolysis | Creatinine in urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

2-Butoxyethanol (CAS 111-76-2) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

2-Butoxyethanol (CAS 111-76-2) Skin designation applies.

US - Tennessee OELs: Skin designation

2-Butoxyethanol (CAS 111-76-2) Can be absorbed through the skin.

US NIOSH Pocket Guide to Chemical Hazards: Skin designation

2-Butoxyethanol (CAS 111-76-2) Can be absorbed through the skin.

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

2-Butoxyethanol (CAS 111-76-2) Can be absorbed through the skin.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Hand protection Wear protective gloves.

Skin protection

Other Wear appropriate chemical resistant clothing.

| | |
|---------------------------------------|---|
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

| | |
|---|--|
| Appearance | Clear. |
| Physical state | Liquid. |
| Form | Aerosol. Liquefied gas. |
| Color | Colorless. Pale yellow |
| Odor | Butyl |
| Odor threshold | Not available. |
| pH | 9.5 - 10.5 estimated |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 212 °F (100 °C) estimated |
| Flash point | -156.0 °F (-104.4 °C) Propellant estimated |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 80 - 100 psig @70F estimated |
| Vapor density | Not available. |
| Relative density | 0.97 g/cm3 estimated |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Aerosol spray enclosed space | |
| Deflagration density | > 2.52 g/cm3 Tested |
| Aerosol spray ignition distance | < 15 cm Tested estimated |
| Density | 0.97 g/cm3 estimated |
| Flammability class | Flammable IB estimated |
| Heat of combustion | 3.34 kJ/g estimated |
| Heat of combustion (NFPA 30B) | 3.21 kJ/g estimated |
| Percent volatile | 99.39 % estimated |
| Specific gravity | 0.97 estimated |
| VOC (Weight %) | 9.78 % estimated |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. Hazardous polymerization does not occur. |
| Conditions to avoid | Avoid temperatures exceeding the flash point. Contact with incompatible materials. Fire or intense heat may cause violent rupture of packages. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Ingestion | Expected to be a low ingestion hazard. |
| Inhalation | Prolonged inhalation may be harmful. |
| Skin contact | 2-Butoxy ethanol may be absorbed through the skin in toxic amounts if contact is repeated and prolonged. These effects have not been observed in humans. |

No adverse effects due to skin contact are expected.

| | |
|--------------------|--|
| Eye contact | Direct contact with eyes may cause temporary irritation. |
|--------------------|--|

| | |
|---|--|
| Symptoms related to the physical, chemical and toxicological characteristics | Direct contact with eyes may cause temporary irritation. |
|---|--|

Information on toxicological effects

| | |
|-----------------------|---|
| Acute toxicity | Expected to be a low hazard for usual industrial or commercial handling by trained personnel. |
|-----------------------|---|

| Product | Species | Test Results |
|---|----------------|---|
| 19 OZ GLEME GLASS CLEANER LT 12PK (CAS Mixture) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Guinea pig | 8024.9819 ml/kg, 24 Hours estimated 254.7059 ml/kg, 4 Days estimated |
| | Rabbit | 6518.1216 mg/kg, 24 Hours estimated 5238.5664 ml/kg, 24 Hours estimated |
| | Rat | 69782.4531 mg/kg, 24 Hours estimated |
| <i>Inhalation</i> | | |
| LC100 | Cat | 2571.4285 % estimated |
| LC50 | Cat | 2554.7151 mg/l, 4.5 Hours estimated 1306.521 mg/l, 6 Hours estimated |
| | Mouse | 35342.8555 mg/l, 120 Minutes estimated 2375.8462 mg/l, 134 Minutes estimated 1485.7142 %, 120 Minutes estimated 457.1429 mm/l, 2 Hours estimated |
| | Rabbit | 13956.4902 ppm, 7 Hours estimated |
| | Rat | 15065.334 ppm, 4 Hours estimated 8635.582 mg/l, 6 Hours estimated 1092.8505 mg/l, 4 Hours estimated 75.2338 mg/l/4h estimated |
| <i>Oral</i> | | |
| LD100 | Rabbit | 24249.4023 mg/kg estimated |
| LD50 | Dog | 24249.4023 mg/kg estimated |
| | Guinea pig | 41869.4727 mg/kg estimated |

| Product | Species | Test Results |
|--------------------------------|------------|---|
| | Rat | 16992.5254 mg/kg estimated |
| Components | Species | Test Results |
| 2-Butoxyethanol (CAS 111-76-2) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Guinea pig | 230 ml/kg, 24 Hours 7.3 ml/kg, 4 Days |
| | Rabbit | 450 ml/kg, 24 Hours 435 mg/kg, 24 Hours 220 mg/kg 0.63 ml/kg |
| | Rat | > 2000 mg/kg, 24 Hours |
| <i>Inhalation</i> | | |
| LC50 | Rabbit | 400 ppm, 7 Hours |
| | Rat | 450 ppm, 4 Hours 2.21 mg/l/4h |
| <i>Oral</i> | | |
| LD100 | Rabbit | 695 mg/kg |
| LD50 | Dog | > 695 mg/kg |
| | Guinea pig | 1200 mg/kg |
| | Rat | 530 - 2800 mg/kg 470 mg/kg |
| Butane (CAS 106-97-8) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l |
| Ethyl Alcohol (CAS 64-17-5) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Cat | 85.41 mg/l, 4.5 Hours 43.68 mg/l, 6 Hours |
| | Mouse | > 60000 ppm 79.43 mg/l, 134 Minutes |
| | Rat | > 115.9 mg/l, 4 Hours 51.3 mg/l, 6 Hours |
| <i>Oral</i> | | |
| LD50 | Monkey | 6000 mg/kg |
| | Mouse | 10500 ml/kg |
| | Rat | 7800 ml/kg 7060 mg/kg |
| <i>Other</i> | | |
| LD50 | Mouse | 6000 mg/kg |
| | Rat | 4070 mg/kg |

| Components | Species | Test Results |
|-----------------------|---------|------------------------|
| Propane (CAS 74-98-6) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes |
| | | 52 %, 120 Minutes |
| | Rat | 1355 mg/l |
| | | 658 mg/l/4h |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.

Serious eye damage/eye irritation Direct contact with eyes may cause temporary irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

IARC Monographs. Overall Evaluation of Carcinogenicity

2-Butoxyethanol (CAS 111-76-2) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not an aspiration hazard. Not likely, due to the form of the product.

Chronic effects Prolonged inhalation may be harmful. May be harmful if absorbed through skin.

2-Butoxy ethanol may be absorbed through the skin in toxic amounts if contact is repeated and prolonged. These effects have not been observed in humans.

12. Ecological information

Ecotoxicity Harmful to aquatic life with long lasting effects.

| Product | Species | Test Results |
|---|--|-------------------------------------|
| 19 OZ GLEME GLASS CLEANER LT 12PK (CAS Mixture) | | |
| Aquatic | | |
| Crustacea | EC50 Daphnia | 53501.5 mg/L, 48 Hours estimated |
| Fish | LC50 Fish | 42462.0469 mg/l, 96 hours estimated |
| Components | Species | Test Results |
| 2-Butoxyethanol (CAS 111-76-2) | | |
| Aquatic | | |
| Crustacea | EC50 Daphnia | 1819 mg/L, 48 Hours |
| Fish | LC50 Inland silverside (Menidia beryllina) | 1250 mg/l, 96 hours |
| Ethyl Alcohol (CAS 64-17-5) | | |
| Aquatic | | |
| Crustacea | EC50 Water flea (Daphnia magna) | 7700 - 11200 mg/l, 48 hours |
| Fish | LC50 Fathead minnow (Pimephales promelas) | > 100.1 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------|-------|
| 2-Butoxyethanol | 0.83 |
| Butane | 2.89 |
| Ethyl Alcohol | -0.31 |
| Propane | 2.36 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Consult authorities before disposal. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. Do not re-use empty containers.

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Label(s) | None |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Packaging exceptions | 306 |
| Packaging non bulk | None |
| Packaging bulk | None |

This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking and both may be displayed concurrently.

IATA

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, non-flammable |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Label(s) | 2.2 |
| Packing group | Not applicable. |
| Environmental hazards | No. |
| ERG Code | 2L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Other information | |
| Passenger and cargo aircraft | Allowed. |
| Cargo aircraft only | Allowed. |
| Packaging Exceptions | LTD QTY |

IMDG

| | |
|---|---|
| UN number | UN1950 |
| UN proper shipping name | AEROSOLS |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Label(s) | None |
| Packing group | Not applicable. |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | Not available. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Packaging Exceptions | LTD QTY |
| Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code | Not applicable. |

DOT**IATA; IMDG****15. Regulatory information**

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|------------------------|
| Hazard categories | Immediate Hazard - No |
| | Delayed Hazard - No |
| | Fire Hazard - No |
| | Pressure Hazard - Yes |
| | Reactivity Hazard - No |

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. Massachusetts RTK - Substance List

2-Butoxyethanol (CAS 111-76-2)

Butane (CAS 106-97-8)

Ethyl Alcohol (CAS 64-17-5)

Propane (CAS 74-98-6)

US. New Jersey Worker and Community Right-to-Know Act

2-Butoxyethanol (CAS 111-76-2)

Butane (CAS 106-97-8)

Ethyl Alcohol (CAS 64-17-5)

Propane (CAS 74-98-6)

US. Pennsylvania Worker and Community Right-to-Know Law

2-Butoxyethanol (CAS 111-76-2)

Butane (CAS 106-97-8)

Ethyl Alcohol (CAS 64-17-5)

Propane (CAS 74-98-6)

US. Rhode Island RTK

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | No |
| New Zealand | New Zealand Inventory | No |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 08-06-2014
Revision date 08-19-2014
Version # 02

References

EPA: AQUIRE database
NLM: Hazardous Substances Data Base
US. IARC Monographs on Occupational Exposures to Chemical Agents

Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Revision Information

Product and Company Identification: Alternate Trade Names
GHS: Classification

1 Identification

- **Product identifier**
- **Trade name:** **Hilti HIT-HY 200-R**
- **Container size:** 330 ml, 500 ml
- **Relevant identified uses of the substance or mixture and uses advised against**
- **Sector of Use** Building and construction work
- **Application of the substance / the mixture** Adhesive anchoring system for rebar and anchor fastenings in concrete.
- **Details of the supplier of the safety data sheet**
- **Manufacturer/Supplier:**
Hilti, Inc.
5400 South 122nd East Ave.
US-Tulsa, OK 74146
Phone: (800) 879-8000
Fax: (800) 879-7000
Español: (800) 879-5000
- **Information department:**
anchor.hse@hilti.com
see section 16
- **Emergency telephone number:**
Chem-Trec
Tel.: 1 800 424 9300 (USA, PR, Virgin Islands, Canada)
Tel.: 703 527 3887 (Other countries)

2 Hazard(s) identification

- **Classification of the substance or mixture**
Aquatic Acute 1 H400 Very toxic to aquatic life.
Eye Irrit. 2A H319 Causes serious eye irritation.
Skin Sens. 1 H317 May cause an allergic skin reaction.
- **Label elements**
- **GHS label elements** The product is classified and labeled according to the Globally Harmonized System (GHS).
- **Hazard pictograms**



GHS07 GHS09

- **Signal word** Warning
- **Hazard-determining components of labeling:**
Hydroxypropyl methacrylate
dibenzoyl peroxide
- **Hazard statements**
H319 Causes serious eye irritation.
H317 May cause an allergic skin reaction.
H400 Very toxic to aquatic life.
- **Precautionary statements**
P280 Wear protective gloves/protective clothing/eye protection/face protection.
P262 Do not get in eyes, on skin, or on clothing.
P305+P351+P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P333+P313 If skin irritation or rash occurs: Get medical advice/attention.
P337+P313 If eye irritation persists: Get medical advice/attention.
P302+P352 If on skin: Wash with plenty of water.
- **Classification system**
- **NFPA ratings (scale 0-4)**



Health = 2
Fire = 1
Reactivity = 1

(Contd. on page 2)


US EN

Trade name: Hilti HIT-HY 200-R

(Contd. of page 1)

- **Other hazards**
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.

- **Additional information:**



- **Information pertaining to particular dangers for man and environment: A**
H317 May cause an allergic skin reaction.

- **Information pertaining to particular dangers for man and environment: B**
H319 Causes serious eye irritation.
H317 May cause an allergic skin reaction.
H400 Very toxic to aquatic life.

3 Composition/information on ingredients

- **Chemical characterization: Mixtures**
- **Description:**
2-Component-Foilpack, contains:
Component A: Urethane methacrylate resin, inorganic filler
Component B: Dibenzoylperoxide, phlegmatized

Mixture of the substances listed below with nonhazardous additions.

- **Dangerous components:**

- **Dangerous components A:**

| | | |
|------------|-------------------------------|--------|
| 27813-02-1 | Hydroxypropyl methacrylate | 5-10% |
| 2082-81-7 | tetramethylene dimethacrylate | 10-15% |
| 14808-60-7 | Quartz (SiO ₂) | 40-50% |
| 1344-28-1 | aluminium oxide | 5-10% |

- **Dangerous components B:**

| | | |
|------------|----------------------------|--------|
| 94-36-0 | dibenzoyl peroxide | 10-15% |
| 14808-60-7 | Quartz (SiO ₂) | 40-50% |
| 1344-28-1 | aluminium oxide | 15-25% |

4 First-aid measures

- **Description of first aid measures**
- **General information** Immediately remove any clothing soiled by the product.
- **After inhalation** Take affected persons into fresh air and keep quiet.
- **After skin contact** Immediately wash with water and soap and rinse thoroughly.
- **After eye contact**
Rinse opened eye for several minutes under running water. Then consult a doctor.
Protect unharmed eye.
- **After swallowing**
Rinse out mouth and then drink plenty of water.
Seek immediate medical advice.
- **Information for doctor**
- **Most important symptoms and effects, both acute and delayed** Allergic reactions
- **Indication of any immediate medical attention and special treatment needed**
No further relevant information available.

-US EN-

(Contd. on page 3)

Trade name: Hilti HIT-HY 200-R

(Contd. of page 2)

5 Fire-fighting measures

- **Extinguishing media**
- **Suitable extinguishing agents**
CO₂, extinguishing powder or water spray. Fight larger fires with water spray or alcohol resistant foam.
Sand
- **For safety reasons unsuitable extinguishing agents** Water with full jet.
- **Special hazards arising from the substance or mixture**
In case of fire, the following can be released:
Carbon monoxide (CO)
Carbondioxide (CO₂)
Nitrogen oxides (NO_x)
In certain fire conditions, traces of other toxic gases cannot be excluded.
- **Advice for firefighters**
- **Protective equipment:** Wear self-contained respiratory protective device.

6 Accidental release measures

- **Personal precautions, protective equipment and emergency procedures**
Wear protective clothing.
Ensure adequate ventilation
- **Environmental precautions:** Do not allow to penetrate the ground/soil.
- **Methods and material for containment and cleaning up:**
Pick up mechanically.
Clean the affected area carefully; suitable cleaners are:
organic solvent
Ensure adequate ventilation.
Dispose contaminated material as waste according to item 13.
- **Reference to other sections**
See Section 7 for information on safe handling
See Section 8 for information on personal protection equipment.
See Section 13 for disposal information.

7 Handling and storage

- **Handling**
- **Precautions for safe handling**
Check the expiry date: see imprint on manifold (month/year). Do not use expired mortar!
The usual precautionary measures for handling chemicals should be followed.
- **Information about protection against explosions and fires:**
No special measures required.
Keep ignition sources away - Do not smoke.
- **Conditions for safe storage, including any incompatibilities**
- **Storage**
- **Requirements to be met by storerooms and receptacles:**
Keep in a cool, dry and dark place; 41 °F / 5 °C to 77 °F / 25 °C.
- **Information about storage in one common storage facility:** Store away from foodstuffs.
- **Further information about storage conditions:** Protect from heat and direct sunlight.
- **Storage class**
As per VCI (1991) storage classification concept.
11
- **Specific end use(s)** Adhesive mortar for anchor and rebar fastenings

8 Exposure controls/personal protection

- **Additional information about design of technical systems:** No further data; see item 7.
- **Control parameters**
- **Components with limit values that require monitoring at the workplace:**
The product does not contain any relevant quantities of materials with critical values that have to be monitored at the workplace.
The product has a pasty consistency. Exposure limit values for respirable dusts are not relevant for this product.

(Contd. on page 4)

US EN

Trade name: Hilti HIT-HY 200-R

(Contd. of page 3)

· **Additional information:** The lists that were valid during the creation were used as basis.

· **Exposure controls**

· **Personal protective equipment**

· **General protective and hygienic measures**

The usual precautionary measures for handling chemicals should be followed.

Do not eat, drink, smoke or sniff while working.

Keep away from foodstuffs, beverages and feed.

Wash hands before breaks and at the end of work.

Avoid contact with the eyes and skin.

· **Breathing equipment:** Not required.

· **Protection of hands:**



Protective gloves.

Only use chemical-protective gloves with CE-labeling of category III.

EN 374

Avoid direct contact with the chemical/ the product/ the preparation by organizational measures.

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.

· **Material of gloves**

Nitrile rubber, NBR

Recommended thickness of the material: ≥ 0.12 mm

· **Penetration time of glove material**

The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed.

· **Not suitable are gloves made of the following materials:**

Natural rubber, NR

Leather gloves

Strong gloves

· **Eye protection:**



Tightly sealed goggles.

EN 166 / EN 170

· **Body protection:**



Protective work clothing.

9 Physical and chemical properties

· **Information on basic physical and chemical properties**

· **General Information**

· **Appearance:**

Form: Pasty
Color: Component A: grey
 Component B: white

· **Odor:** Ester-like

· **Odour threshold:** Not determined

· **pH-value:** Componente A: not applicable
 Componente B: ~ 7

· **Change in condition**

Melting point/Melting range: Not determined.

Boiling point/Boiling range: undetermined

· **Flash point:** Component A: > 109 °C (DIN EN ISO 1523)
 Component B: not applicable

· **Flammability (solid, gaseous)** Not determined

(Contd. on page 5)

Trade name: Hilti HIT-HY 200-R

(Contd. of page 4)

| | |
|---|---|
| · Ignition temperature: | 355 °C (671 °F) |
| · Decomposition temperature: | Component A: not relevant Component B: SADT 65 °C UN test H4 |
| · Auto igniting: | Product is not selfigniting. |
| · Danger of explosion: | Product does not present an explosion hazard. |
| · Explosion limits: | |
| Lower: | Not determined |
| Upper: | Not determined |
| · Vapor pressure at 20 °C (68 °F): | < 0.1 hPa (< 0 mm Hg) |
| · Density at 20 °C (68 °F): | 1.8 g/cm ³ (15.021 lbs/gal) (DIN 51757) |
| · Relative density | Not determined |
| · Vapour density | Not determined |
| · Evaporation rate | Not determined |
| · Solubility in / Miscibility with Water: | Not miscible or difficult to mix |
| · Partition coefficient (n-octanol/water): | Not determined |
| · Viscosity: | |
| dynamic at 20 °C (68 °F): | 50 Pa.s (DIN 53019) |
| kinematic at 20 °C (68 °F): | > 20 s (ISO 2431) |
| · Solvent separation test | Not determined |
| · Solvent content: | |
| Organic solvents: | None |
| Water: | Component B: ~ 20% |
| · Other information | VOC Content: 7 g/l (EPA Method 24) |

10 Stability and reactivity

- **Reactivity**
- **Chemical stability**
- **Thermal decomposition / conditions to be avoided:**
To avoid thermal decomposition do not overheat.
No decomposition if used and stored according to specifications.
- **Possibility of hazardous reactions** No dangerous reactions known
- **Conditions to avoid** No further relevant information available.
- **Incompatible materials:** No further relevant information available.
- **Hazardous decomposition products:** No dangerous decomposition products known

11 Toxicological information

- **Information on toxicological effects**
- **Acute toxicity:**
- **Primary irritant effect:**
- **on the skin:** No irritant effect.
- **on the eye:** Irritating effect.
- **Sensitization:** Sensitization possible through skin contact.
- **Additional toxicological information:**
The product shows the following dangers according to the calculation method of the General EU Classification Guidelines for Preparations as issued in the latest version:
Irritant
- **Carcinogenic categories**

· NTP (National Toxicology Program)

 14808-60-7 | Quartz (SiO₂)

K

US EN

(Contd. on page 6)

Trade name: Hilti HIT-HY 200-R

(Contd. of page 5)

12 Ecological information

- **Toxicity**
- **Aquatic toxicity:** No further relevant information available.
- **Persistence and degradability** No further relevant information available.
- **Behavior in environmental systems:**
- **Bioaccumulative potential** No further relevant information available.
- **Mobility in soil** No further relevant information available.
- **Additional ecological information:**
- **According to the formulation contains the following heavy metals and compounds from the EU guideline NO. 2006/11/EC:**
None
- **General notes:** The product does not contain organically bounded halogens (AOX-free).
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.
- **Other adverse effects** No further relevant information available.

13 Disposal considerations

- **Waste treatment methods**
- **Recommendation**
Full or only partially emptied cartridges must be disposed of as special waste in accordance with official regulations.

· **European waste catalogue:**

| | |
|-----------|--|
| 08 04 09* | waste adhesives and sealants containing organic solvents or other dangerous substances |
| 20 01 27* | paint, inks, adhesives and resins containing dangerous substances |

- **Uncleaned packagings:**
- **Recommendation:** Disposal must be made according to official regulations.

14 Transport information

- | | |
|---------------------------------------|-----------------|
| · UN-Number | Void |
| · DOT, ADR, ADN, IMDG, IATA | Void |
| · UN proper shipping name | Void |
| · DOT, ADR, ADN, IMDG, IATA | Void |
| · Transport hazard class(es) | |
| · DOT, ADN | |
| · Class | Void |
| · ADR, IMDG, IATA | |
| · Class | Void |
| · Label | Void |
| · Packing group | |
| · DOT, ADR, IMDG, IATA | Void |
| · Environmental hazards: | |
| · Marine pollutant: | No |
| · Special marking (ADR): | None |
| · Special marking (IATA): | None |
| · Special precautions for user | Not applicable. |
| · Danger code (Kemler): | Void |
| · EMS Number: | Void |
| · Segregation groups | Void |

· **Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code** Not applicable.

· **Transport/Additional information:** Not dangerous according to the above specifications.
available oxygen content < 1 %

(Contd. on page 7)

Trade name: Hilti HIT-HY 200-R

(Contd. of page 6)

- UN "Model Regulation": -
- HS-Code: 3214 10 10: Glaziers' putty, grafting putty, resin cements, caulking compounds and other mastics

15 Regulatory information

· Safety, health and environmental regulations/legislation specific for the substance or mixture

· Section 355 (Extremely hazardous substances):

None of the ingredients is listed.

· Section 313 (Specific toxic chemical listings):

1344-28-1 aluminium oxide

94-36-0 Dibenzoyl peroxide

· TSCA (Toxic Substances Control Act):

All ingredients are listed.

· Proposition 65:

· Chemicals known to cause cancer:

None of the ingredients are listed.

· Carcinogenicity categories

· EPA (Environmental Protection Agency)

None of the ingredients is listed.

· TLV (Threshold Limit Value established by ACGIH)

 14808-60-7 Quartz (SiO₂)

A2

1344-28-1 aluminium oxide

A4

94-36-0 Dibenzoyl peroxide

A4

· MAK (German Maximum Workplace Concentration)

 14808-60-7 Quartz (SiO₂)

1

1344-28-1 aluminium oxide

2

· NIOSH-Ca (National Institute for Occupational Safety and Health)

 14808-60-7 Quartz (SiO₂)

· National regulations

The product is subject to be labeled according with the prevailing version of the regulations on hazardous substances.

· Information about limitation of use: Employment restrictions concerning young persons must be observed.

· Chemical safety assessment: not required.

16 Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

· Relevant phrases

R3 Extreme risk of explosion by shock, friction, fire or other sources of ignition.

R7 May cause fire.

R36 Irritating to eyes.

R43 May cause sensitisation by skin contact.

R50 Very toxic to aquatic organisms.

H241 Heating may cause a fire or explosion.

H317 May cause an allergic skin reaction.

H319 Causes serious eye irritation.

H400 Very toxic to aquatic life.

· Department issuing SDS:

(Contd. on page 8)

Trade name: Hilti HIT-HY 200-R

(Contd. of page 7)

Hilti Entwicklungsgesellschaft mbH

Hiltistrasse 6

D-86916 Kaufering

Tel.: +49 8191 906310

Fax: +49 8191 90176310

e-mail: anchor.hse@hilti.com

None

· **Contact:** Mechthild Krauter· **Date of preparation / last revision** 05/18/2015 / 2· **Abbreviations and acronyms:**

RID: Règlement international concernant le transport des marchandises dangereuses par chemin de fer (Regulations Concerning the International Transport of Dangerous Goods by Rail)

ICAO: International Civil Aviation Organisation

ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road)

IMDG: International Maritime Code for Dangerous Goods

DOT: US Department of Transportation

IATA: International Air Transport Association

ACGIH: American Conference of Governmental Industrial Hygienists

EINECS: European Inventory of Existing Commercial Chemical Substances

ELINCS: European List of Notified Chemical Substances

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA)

Eye Irrit. 2A: Serious eye damage/eye irritation, Hazard Category 2A

Skin Sens. 1: Sensitisation - Skin, Hazard Category 1

Aquatic Acute 1: Hazardous to the aquatic environment - AcuteHazard, Category 1

· *** Data compared to the previous version altered.**

US EN

SAFETY DATA SHEET

K20829007

Section 1. Identification

Product name : KRYLON® Industrial RUST TOUGH® UTILI-COAT™ Rust Preventive Enamel (Aerosol) Gray Primer
Product code : K20829007
Other means of identification : Not available.
Product type : Aerosol.
Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : Krylon Products Group
101 Prospect Avenue NW
Cleveland, OH 44115

Emergency telephone number of the company : US/Canada: (800) 424-9300
Mexico: CHEMTREC Mexico 01-800-681-9531. Available 24 hours and 365 days per year

Product Information Telephone Number : US/Canada: (800) 247-3266
Mexico: Not Available

Regulatory Information Telephone Number : US/Canada: (216) 566-2902
Mexico: Not Available

Transportation Emergency Telephone Number : US/Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year


Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 2
TOXIC TO REPRODUCTION - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 1
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown acute toxicity: 16.1% (oral), 17.2% (dermal), 27.3% (inhalation)

GHS label elements

Hazard pictograms

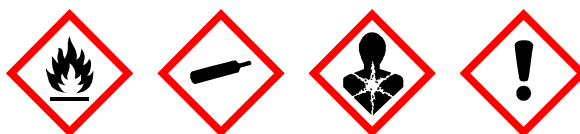

Signal word : Danger

Date of issue/Date of revision : 10/13/2020 **Date of previous issue** : 5/13/2020

Version : 16

1/19

K20829007

KRYLON® Industrial RUST TOUGH® UTILI-COAT™ Rust Preventive Enamel (Aerosol) Gray Primer

SHW-85-NA-GHS-US

Section 2. Hazards identification

- Hazard statements** : Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 May be fatal if swallowed and enters airways.
 Causes serious eye irritation.
 May cause respiratory irritation.
 May cause drowsiness or dizziness.
 Suspected of causing cancer.
 Suspected of damaging fertility or the unborn child.
 Causes damage to organs through prolonged or repeated exposure. (lungs)
- Precautionary statements**
- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves, protective clothing and eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.
- Response** : IF exposed or concerned: Get medical advice or attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or doctor. Do NOT induce vomiting. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice or attention.
- Storage** : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Keep container tightly closed.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Supplemental label elements** DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY.
 Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.
- Hazards not otherwise classified** : DANGER: Rags, steel wool, other waste soaked with this product, and sanding residue may spontaneously catch fire if improperly discarded. Immediately place rags, steel wool, other waste soaked with this product, and sanding residue in a sealed, water-filled, metal container. Dispose of in accordance with local fire regulations.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.

CAS number/other identifiers

| Ingredient name | % by weight | CAS number |
|-----------------------------------|-------------|------------|
| Acetone | ≥25 - ≤50 | 67-64-1 |
| Propane | ≥10 - ≤25 | 74-98-6 |
| Ethylbenzene | ≤10 | 100-41-4 |
| Dimethyl Carbonate | ≤10 | 616-38-6 |
| Butane | ≤10 | 106-97-8 |
| Talc | ≤10 | 14807-96-6 |
| 2-Methyl-1-propanol | <3 | 78-83-1 |
| Titanium Dioxide | ≤3 | 13463-67-7 |
| Lt. Aliphatic Hydrocarbon Solvent | ≤3 | 64742-89-8 |

Section 3. Composition/information on ingredients

| | | |
|-------------------------------------|------|------------|
| Light Aliphatic Hydrocarbon Solvent | ≤3 | 64742-49-0 |
| Light Aliphatic Hydrocarbon Solvent | ≤2.8 | 68410-97-9 |
| Xylene, mixed isomers | ≤0.3 | 1330-20-7 |
| Heptane | ≤0.3 | 142-82-5 |
| Octane | ≤0.3 | 111-65-9 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness

Section 4. First aid measures

- Inhalation** : Adverse symptoms may include the following:
 - respiratory tract irritation
 - coughing
 - nausea or vomiting
 - headache
 - drowsiness/fatigue
 - dizziness/vertigo
 - unconsciousness
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
 - nausea or vomiting
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
 - carbon dioxide
 - carbon monoxide
 - phosphorus oxides
 - metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Section 5. Fire-fighting measures

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Section 7. Handling and storage

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|---------------------|------------|--|
| Acetone | 67-64-1 | ACGIH TLV (United States, 3/2020). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 250 ppm 10 hours. TWA: 590 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m ³ 8 hours. |
| Propane | 74-98-6 | NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2020). Oxygen Depletion [Asphyxiant]. Explosive potential. ACGIH TLV (United States, 3/2020). TWA: 20 ppm 8 hours. |
| Ethylbenzene | 100-41-4 | NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 435 mg/m ³ 10 hours. STEL: 125 ppm 15 minutes. STEL: 545 mg/m ³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m ³ 8 hours. |
| Dimethyl Carbonate | 616-38-6 | None. |
| Butane | 106-97-8 | NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m ³ 10 hours. ACGIH TLV (United States, 3/2020). Explosive potential. STEL: 1000 ppm 15 minutes. |
| Talc | 14807-96-6 | NIOSH REL (United States, 10/2016). TWA: 2 mg/m ³ 10 hours. Form: Respirable fraction ACGIH TLV (United States, 3/2020). TWA: 2 mg/m ³ 8 hours. Form: Respirable fraction |
| 2-Methyl-1-propanol | 78-83-1 | ACGIH TLV (United States, 3/2020). TWA: 50 ppm 8 hours. TWA: 152 mg/m ³ 8 hours. NIOSH REL (United States, 10/2016). |

Section 8. Exposure controls/personal protection

| | | |
|--|---|--|
| Titanium Dioxide | 13463-67-7 | <p>TWA: 50 ppm 10 hours. TWA: 150 mg/m³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 300 mg/m³ 8 hours. ACGIH TLV (United States, 3/2020). TWA: 10 mg/m³ 8 hours. OSHA PEL (United States, 5/2018). TWA: 15 mg/m³ 8 hours. Form: Total dust None. None. None. ACGIH TLV (United States, 3/2020). TWA: 100 ppm 8 hours. TWA: 434 mg/m³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours. ACGIH TLV (United States, 3/2020). TWA: 400 ppm 8 hours. TWA: 1640 mg/m³ 8 hours. STEL: 500 ppm 15 minutes. STEL: 2050 mg/m³ 15 minutes. NIOSH REL (United States, 10/2016). TWA: 85 ppm 10 hours. TWA: 350 mg/m³ 10 hours. CEIL: 440 ppm 15 minutes. CEIL: 1800 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 500 ppm 8 hours. TWA: 2000 mg/m³ 8 hours.</p> |
| Lt. Aliphatic Hydrocarbon Solvent Light Aliphatic Hydrocarbon Solvent Light Aliphatic Hydrocarbon Solvent Xylene, mixed isomers | 64742-89-8 64742-49-0 68410-97-9 1330-20-7 | <p>None. None. None. ACGIH TLV (United States, 3/2020). TWA: 100 ppm 8 hours. TWA: 434 mg/m³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours. ACGIH TLV (United States, 3/2020). TWA: 400 ppm 8 hours. TWA: 1640 mg/m³ 8 hours. STEL: 500 ppm 15 minutes. STEL: 2050 mg/m³ 15 minutes. NIOSH REL (United States, 10/2016). TWA: 85 ppm 10 hours. TWA: 350 mg/m³ 10 hours. CEIL: 440 ppm 15 minutes. CEIL: 1800 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 500 ppm 8 hours. TWA: 2000 mg/m³ 8 hours.</p> |
| Heptane | 142-82-5 | <p>NIOSH REL (United States, 10/2016). TWA: 75 ppm 10 hours. TWA: 350 mg/m³ 10 hours. CEIL: 385 ppm 15 minutes. CEIL: 1800 mg/m³ 15 minutes. ACGIH TLV (United States, 3/2020). TWA: 300 ppm 8 hours. OSHA PEL (United States, 5/2018). TWA: 500 ppm 8 hours. TWA: 2350 mg/m³ 8 hours.</p> |
| Octane | 111-65-9 | <p>OSHA PEL (United States, 5/2018). TWA: 500 ppm 8 hours. TWA: 2000 mg/m³ 8 hours.</p> |

Occupational exposure limits (Canada)

| Ingredient name | CAS # | Exposure limits |
|-----------------|---------|--|
| acetone | 67-64-1 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1200 mg/m³ 8 hours. 15 min OEL: 1800 mg/m³ 15 minutes. 8 hrs OEL: 500 ppm 8 hours. 15 min OEL: 750 ppm 15 minutes. CA British Columbia Provincial (Canada, 1/2020). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. CA Ontario Provincial (Canada, 6/2019).</p> |

Date of issue/Date of revision

: 10/13/2020

Date of previous issue

: 5/13/2020

Version : 16

7/19

K20829007

KRYLON® Industrial RUST TOUGH® UTILI-COAT™ Rust Preventive Enamel (Aerosol)
Gray Primer

SHW-85-NA-GHS-US

Section 8. Exposure controls/personal protection

| | | |
|----------------|----------|--|
| Normal propane | 74-98-6 | <p>TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. CA Quebec Provincial (Canada, 7/2019). TWAEV: 500 ppm 8 hours. TWAEV: 1190 mg/m³ 8 hours. STEV: 1000 ppm 15 minutes. STEV: 2380 mg/m³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 750 ppm 15 minutes. TWA: 500 ppm 8 hours. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 1000 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 1/2020). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> |
| Ethylbenzene | 100-41-4 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 8 hrs OEL: 434 mg/m³ 8 hours. 15 min OEL: 543 mg/m³ 15 minutes. 15 min OEL: 125 ppm 15 minutes. CA British Columbia Provincial (Canada, 1/2020). TWA: 20 ppm 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 20 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 125 ppm 15 minutes. STEV: 543 mg/m³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 125 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| Butane | 106-97-8 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 800 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 1/2020). Explosive potential.</p> |

Section 8. Exposure controls/personal protection

| | | |
|-------------------------|------------|--|
| talc (none asbestiform) | 14807-96-6 | <p>STEL: 1000 ppm 15 minutes. CA British Columbia Provincial (Canada, 1/2020). TWA: 2 mg/m³ 8 hours. Form: Respirable CA Quebec Provincial (Canada, 7/2019). TWAEV: 3 mg/m³ 8 hours. Form: Respirable dust. CA Ontario Provincial (Canada, 6/2019). TWA: 2 mg/m³ 8 hours. Form: Respirable fraction. TWA: 2 f/cc 8 hours. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 2 mg/m³ 8 hours. Form: Respirable particulate CA Saskatchewan Provincial (Canada, 7/2013). TWA: 2 mg/m³ 8 hours. Form: respirable fraction</p> |
| Isobutyl alcohol | 78-83-1 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 50 ppm 8 hours. 8 hrs OEL: 152 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 50 ppm 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 50 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 50 ppm 8 hours. TWAEV: 152 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 60 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> |
| Titanium dioxide | 13463-67-7 | <p>CA British Columbia Provincial (Canada, 1/2020). TWA: 10 mg/m³ 8 hours. Form: Total dust TWA: 3 mg/m³ 8 hours. Form: respirable fraction CA Quebec Provincial (Canada, 7/2019). TWAEV: 10 mg/m³ 8 hours. Form: Total dust. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 10 mg/m³ 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 10 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 20 mg/m³ 15 minutes. TWA: 10 mg/m³ 8 hours.</p> |
| Xylene | 1330-20-7 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 651 mg/m³ 15 minutes. 15 min OEL: 150 ppm 15 minutes. 8 hrs OEL: 434 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes.</p> |

Section 8. Exposure controls/personal protection

| | | |
|--|--|---|
| | | <p>CA Quebec Provincial (Canada, 7/2019). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 651 mg/m³ 15 minutes.</p> <p>CA Ontario Provincial (Canada, 6/2019). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
|--|--|---|

Occupational exposure limits (Mexico)

| | CAS # | Exposure limits |
|---------------------|--------------|--|
| Acetone | 67-64-1 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. |
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Ethylbenzene | 100-41-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| 2-methylpropan-1-ol | 78-83-1 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 50 ppm 8 hours. |

Appropriate engineering controls

: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 7
- Melting point/freezing point** : Not available.
- Boiling point/boiling range** : Not available.
- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 5.6 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 0.9%
Upper: 12.8%
- Vapor pressure** : 101.3 kPa (760 mm Hg) [at 20°C]
- Vapor density** : 1.55 [Air = 1]
- Relative density** : 0.81
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
- Molecular weight** : Not applicable.
- Aerosol product**
- Type of aerosol** : Spray
- Heat of combustion** : 28.422 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.

Date of issue/Date of revision

: 10/13/2020

Date of previous issue

: 5/13/2020

Version : 16

11/19

K20829007

KRYLON® Industrial RUST TOUGH® UTILI-COAT™ Rust Preventive Enamel (Aerosol)
Gray Primer

SHW-85-NA-GHS-US

Section 10. Stability and reactivity

Conditions to avoid : Avoid all possible sources of ignition (spark or flame).

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------------------|-----------------------|---------|--------------------------|----------|
| Acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| Ethylbenzene | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |
| Dimethyl Carbonate | LD50 Dermal | Rabbit | >5 g/kg | - |
| | LD50 Oral | Rat | 13 g/kg | - |
| Butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| 2-Methyl-1-propanol | LC50 Inhalation Vapor | Rat | 19200 mg/m ³ | 4 hours |
| | LD50 Dermal | Rabbit | 3400 mg/kg | - |
| | LD50 Oral | Rat | 2460 mg/kg | - |
| Light Aliphatic Hydrocarbon Solvent | LD50 Oral | Rat | 5.17 g/kg | - |
| Xylene, mixed isomers | LC50 Inhalation Gas. | Rat | 6700 ppm | 4 hours |
| | LD50 Oral | Rat | 4300 mg/kg | - |
| Heptane | LC50 Inhalation Gas. | Rat | 48000 ppm | 4 hours |
| | LC50 Inhalation Vapor | Rat | 103 g/m ³ | 4 hours |
| Octane | LC50 Inhalation Gas. | Rat | 25260 ppm | 4 hours |
| | LC50 Inhalation Vapor | Rat | 118 g/m ³ | 4 hours |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-------------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 ppm | - |
| | Eyes - Mild irritant | Rabbit | - | 10 UI | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 20 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| Ethylbenzene | Skin - Mild irritant | Rabbit | - | 395 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 15 mg | - |
| Talc | Skin - Mild irritant | Human | - | 72 hours 300 ug l | - |
| Titanium Dioxide | Skin - Mild irritant | Human | - | 72 hours 300 ug l | - |
| Xylene, mixed isomers | Eyes - Mild irritant | Rabbit | - | 87 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 5 mg | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 UI | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 100 % | - |

Sensitization

Section 11. Toxicological information

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Ethylbenzene | - | 2B | - |
| Talc | - | 3 | - |
| Titanium Dioxide | - | 2B | - |
| Xylene, mixed isomers | - | 3 | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|-------------------------------------|------------|-------------------|------------------------------|
| Acetone | Category 3 | - | Respiratory tract irritation |
| Propane | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Ethylbenzene | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Butane | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| 2-Methyl-1-propanol | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Lt. Aliphatic Hydrocarbon Solvent | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Light Aliphatic Hydrocarbon Solvent | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Light Aliphatic Hydrocarbon Solvent | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Xylene, mixed isomers | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Heptane | Category 3 | - | Respiratory tract irritation |
| Octane | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| | Category 3 | - | Narcotic effects |

Specific target organ toxicity (repeated exposure)

Section 11. Toxicological information

| Name | Category | Route of exposure | Target organs |
|-------------------------------------|------------|-------------------|---------------|
| Acetone | Category 2 | - | - |
| Propane | Category 2 | - | - |
| Ethylbenzene | Category 2 | - | - |
| Butane | Category 2 | - | - |
| Talc | Category 1 | inhalation | lungs |
| 2-Methyl-1-propanol | Category 2 | - | - |
| Lt. Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Light Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Light Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Xylene, mixed isomers | Category 2 | - | - |
| Heptane | Category 2 | - | - |
| Octane | Category 2 | - | - |

Aspiration hazard

| Name | Result |
|-------------------------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Lt. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Xylene, mixed isomers | ASPIRATION HAZARD - Category 1 |
| Heptane | ASPIRATION HAZARD - Category 1 |
| Octane | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Section 11. Toxicological information

Skin contact : Adverse symptoms may include the following:
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Ingestion : Adverse symptoms may include the following:
 nausea or vomiting
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : Causes damage to organs through prolonged or repeated exposure.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : Suspected of damaging the unborn child.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : Suspected of damaging fertility.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|---------------------|-----------------|
| Oral | 24353.89 mg/kg |
| Dermal | 184783.26 mg/kg |
| Inhalation (vapors) | 74.27 mg/l |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|--------------------------------------|---|----------|
| Acetone | Acute EC50 7200000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 4.42589 ml/L Marine water | Crustaceans - Acartia tonsa - Copepodid | 48 hours |
| | Acute LC50 7460000 µg/l Fresh water | Daphnia - Daphnia cucullata | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |

Section 12. Ecological information

| | | | |
|-----------------------------------|---------------------------------------|---|----------|
| Ethylbenzene | Chronic NOEC 5 µg/l Marine water | Fish - Gasterosteus aculeatus - Larvae | 42 days |
| | Acute EC50 4600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 3600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 6.53 mg/l Marine water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| | Acute EC50 2.93 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| 2-Methyl-1-propanol | Acute LC50 4200 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| | Acute LC50 600 mg/l Marine water | Crustaceans - Artemia salina | 48 hours |
| | Acute LC50 1030000 µg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| Titanium Dioxide | Acute LC50 1330000 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| | Chronic NOEC 4000 µg/l Fresh water | Daphnia - Daphnia magna | 21 days |
| | Acute LC50 >1000000 µg/l Marine water | Fish - Fundulus heteroclitus | 96 hours |
| Lt. Aliphatic Hydrocarbon Solvent | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| Xylene, mixed isomers | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| Heptane | Acute LC50 375000 µg/l Fresh water | Fish - Oreochromis mossambicus | 96 hours |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| Ethylbenzene | - | - | Readily |
| 2-Methyl-1-propanol | - | - | Readily |
| Xylene, mixed isomers | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------------------|--------------------|-------------|-----------|
| Lt. Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Light Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Light Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Xylene, mixed isomers | - | 8.1 to 25.9 | low |
| Heptane | - | 552 | high |
| Octane | - | 198.7 | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|---|---|---|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | - ERG No. 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | - Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Emergency schedules F-D, S-U Dependent upon container size, this product may ship under the Limited Quantity shipping exception. |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Section 14. Transport information

Transport in bulk according to IMO instruments : Not available.

Proper shipping name : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

- International lists** :
- Australia inventory (AICS)**: Not determined.
 - China inventory (IECSC)**: Not determined.
 - Japan inventory (ENCS)**: Not determined.
 - Japan inventory (ISHL)**: Not determined.
 - Korea inventory (KECI)**: Not determined.
 - New Zealand Inventory of Chemicals (NZIoC)**: Not determined.
 - Philippines inventory (PICCS)**: Not determined.
 - Taiwan Chemical Substances Inventory (TCSI)**: Not determined.
 - Thailand inventory**: Not determined.
 - Turkey inventory**: Not determined.
 - Vietnam inventory**: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A | Calculation method |
| CARCINOGENICITY - Category 2 | Calculation method |
| TOXIC TO REPRODUCTION - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 1 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Section 16. Other information

Date of printing : 10/13/2020
Date of issue/Date of revision : 10/13/2020
Date of previous issue : 5/13/2020
Version : 16
Key to abbreviations : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
N/A = Not available
SGG = Segregation Group
UN = United Nations

✔ Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Material name : ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS
Material number : R25435

Manufacturer or supplier's details

Company : Zep Inc.
Address : 350 Joe Frank Harris Parkway, SE
Emerson, GA 30137
Telephone : 404-352-1680

Emergency telephone numbers

For SDS Information : Compliance Services 1-877-428-9937
For a Medical Emergency : 877-541-2016 Toll Free - All Calls Recorded
For a Transportation Emergency : CHEMTREC: 800-424-9300 - All Calls Recorded.
In the District of Columbia 202-483-7616

Recommended use of the chemical and restrictions on use

Recommended use : Degreaser

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

| | |
|------------|---------------|
| Appearance | liquid |
| Colour | clear, orange |
| Odour | strong |

GHS Classification

Flammable liquids : Category 3
Skin irritation : Category 2
Eye irritation : Category 2A
Skin sensitisation : Category 1
Aspiration hazard : Category 1

GHS label elements

Hazard pictograms : 

Signal word : Danger

Hazard statements : H226 Flammable liquid and vapour.
H304 May be fatal if swallowed and enters airways.
H315 Causes skin irritation.
H317 May cause an allergic skin reaction.
H319 Causes serious eye irritation.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

Precautionary statements : **Prevention:**
P210 Keep away from heat/sparks/open flames/hot surfaces.
No smoking.
P233 Keep container tightly closed.
P240 Ground/bond container and receiving equipment.
P241 Use explosion-proof electrical/ ventilating/ lighting
equipment.
P242 Use only non-sparking tools.
P243 Take precautionary measures against static discharge.
P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264 Wash skin thoroughly after handling.
P272 Contaminated work clothing should not be allowed out of
the workplace.
P280 Wear protective gloves/ eye protection/ face protection.
Response:
P301 + P310 IF SWALLOWED: Immediately call a POISON
CENTER/doctor.
P303 + P361 + P353 IF ON SKIN (or hair): Take off
immediately all contaminated clothing. Rinse skin with
water/shower.
P305 + P351 + P338 IF IN EYES: Rinse cautiously with water
for several minutes. Remove contact lenses, if present and
easy to do. Continue rinsing.
P331 Do NOT induce vomiting.
P333 + P313 If skin irritation or rash occurs: Get medical
advice/ attention.
P337 + P313 If eye irritation persists: Get medical advice/
attention.
P362 Take off contaminated clothing and wash before reuse.
P370 + P378 In case of fire: Use dry sand, dry chemical or
alcohol-resistant foam to extinguish.
Storage:
P403 + P235 Store in a well-ventilated place. Keep cool.
Disposal:
P501 Dispose of contents/container in accordance with local
regulation.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Concentration [%] |
|-------------------------------------|-------------|-------------------|
| d-limonene | 5989-27-5 | >= 70 - < 90 |
| 4-Nonylphenol branched, ethoxylated | 127087-87-0 | >= 5 - < 10 |
| p-mentha-1,4-diene | 99-85-4 | >= 1 - < 5 |
| linalool | 78-70-6 | >= 1 - < 5 |
| 7-methyl-3-methyleneocta-1,6-diene | 123-35-3 | >= 1 - < 5 |

The exact percentages of disclosed substances are withheld as trade secrets.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : If unconscious, place in recovery position and seek medical
advice.
If symptoms persist, call a physician.
- In case of skin contact : In case of contact, immediately flush skin with soap and plenty
of water.
If skin irritation persists, call a physician.
- In case of eye contact : Flush eyes with water at least 15 minutes. Get medical
attention if eye irritation develops or persists.
Remove contact lenses.
Protect unharmed eye.
Keep eye wide open while rinsing.
- If swallowed : Clean mouth with water and drink afterwards plenty of water.
Keep respiratory tract clear.
Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
DO NOT induce vomiting unless directed to do so by a
physician or poison control center.
- Most important symptoms
and effects, both acute and
delayed : Effects are immediate and delayed.
Symptoms may include irritation, redness, pain, and rash.
Causes skin irritation.
Causes serious eye irritation.
Review section 2 of SDS to see all potential hazards.
- Notes to physician : Treat symptomatically. Symptoms may be delayed.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Alcohol-resistant foam
Carbon dioxide (CO₂)
Dry chemical
- Unsuitable extinguishing
media : High volume water jet
- Specific hazards during
firefighting : Do not allow run-off from fire fighting to enter drains or water
courses.
- Hazardous combustion
products : Carbon dioxide (CO₂)
Carbon monoxide
Smoke
- Specific extinguishing
methods : Use extinguishing measures that are appropriate to local
circumstances and the surrounding environment.
- Further information : Collect contaminated fire extinguishing water separately. This
must not be discharged into drains.
Fire residues and contaminated fire extinguishing water must
be disposed of in accordance with local regulations.
For safety reasons in case of fire, cans should be stored
separately in closed containments.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

Special protective equipment for firefighters : Use a water spray to cool fully closed containers.
: Wear self-contained breathing apparatus for firefighting if necessary.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.
Remove all sources of ignition.
Evacuate personnel to safe areas.
Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
If the product contaminates rivers and lakes or drains inform respective authorities.

Methods and materials for containment and cleaning up : Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

SECTION 7. HANDLING AND STORAGE

Advice on safe handling : Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the application area.
Take precautionary measures against static discharges.
Provide sufficient air exchange and/or exhaust in work rooms.
Open drum carefully as content may be under pressure.
Dispose of rinse water in accordance with local and national regulations.
Persons susceptible to skin sensitisation problems or asthma, allergies, chronic or recurrent respiratory disease should not be employed in any process in which this mixture is being used.

Conditions for safe storage : No smoking.
Keep container tightly closed in a dry and well-ventilated place.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Observe label precautions.
Electrical installations / working materials must comply with the technological safety standards.

Materials to avoid : Keep away from oxidizing agents and strongly acid or alkaline materials.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|------------|-----------|-------------------------------------|---|---------|
| d-limonene | 5989-27-5 | TWA | 30 ppm | US WEEL |

Engineering measures : effective ventilation in all processing areas

Personal protective equipment

Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment.

Hand protection

Material : Protective gloves

Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.

Eye protection

: Tightly fitting safety goggles
Wear face-shield and protective suit for abnormal processing problems.

Skin and body protection

: Impervious clothing
Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

: When using do not eat or drink.
When using do not smoke.
Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|------------------------------|---------------------------------|
| Appearance | : liquid |
| Colour | : clear, orange |
| Odour | : strong |
| Odour Threshold | : No data available |
| pH | : Not applicable |
| Melting point/freezing point | : No data available |
| Boiling point | : 170 °C |
| Flash point | : 53.9 °C Method: closed cup |
| Evaporation rate | : < 1 |
| Upper explosion limit | : No data available |
| Lower explosion limit | : No data available |
| Vapour pressure | : 2.533 hPa |
| Relative vapour density | : No data available |

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

| | |
|--|---------------------|
| Density | : 0.864 g/cm3 |
| Solubility(ies) | |
| Water solubility | : emulsifiable |
| Solubility in other solvents | : Not applicable |
| Partition coefficient: n- octanol/water | : No data available |
| Auto-ignition temperature | : not determined |
| Thermal decomposition | : No data available |
| Viscosity | |
| Viscosity, kinematic | : 3.8 mm2/s (20 °C) |

SECTION 10. STABILITY AND REACTIVITY

| | |
|---------------------------------------|---|
| Reactivity | : Stable |
| Chemical stability | : Stable under normal conditions. |
| Possibility of hazardous reactions | : Vapours may form explosive mixture with air. No decomposition if stored and applied as directed. |
| Conditions to avoid | : Extremes of temperature and direct sunlight. Heat, flames and sparks. |
| Incompatible materials | : Acids Oxidizing agents |
| Hazardous decomposition products | : Carbon monoxide, carbon dioxide and unburned hydrocarbons (smoke). Nitrogen oxides (NOx) |

SECTION 11. TOXICOLOGICAL INFORMATION

Potential Health Effects

| | |
|---------------------------------|---|
| Aggravated Medical Condition | : None known. |
| Symptoms of Overexposure | : Effects are immediate and delayed. Symptoms may include irritation, redness, pain, and rash. |

Carcinogenicity:

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

| | |
|--------------|---|
| ACGIH | human carcinogen by IARC. No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH. |
| OSHA | No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens. |
| NTP | No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP. |

Acute toxicity

Product:

Acute oral toxicity : Acute toxicity estimate : > 5,000 mg/kg
Method: Calculation method

Acute dermal toxicity : Acute toxicity estimate : > 5,000 mg/kg
Method: Calculation method

Components:

d-limonene:

Acute oral toxicity : LD50 Oral Rat: 4,400 mg/kg

Acute dermal toxicity : LD50 Dermal Rabbit: > 5,000 mg/kg

4-Nonylphenol branched, ethoxylated:

Acute oral toxicity : LD50 Oral Rat: 16,000 mg/kg

Acute dermal toxicity : LD50 Rabbit: 2,573 mg/kg

7-methyl-3-methyleneocta-1,6-diene:

Acute oral toxicity : LD50 Oral Rat: > 5,000 mg/kg

Acute dermal toxicity : LD50 Dermal Rabbit: > 5,000 mg/kg

Skin corrosion/irritation

Product:

Remarks: Irritating to skin.

Serious eye damage/eye irritation

Product:

Remarks: Severe eye irritation

Respiratory or skin sensitisation

Product:

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

Remarks: Causes sensitisation.

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

Aspiration toxicity

No data available

Further information

Product:

Remarks: Solvents may degrease the skin.

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

No data available

Persistence and degradability

No data available

Bioaccumulative potential

Product:

Partition coefficient: n- : Remarks: No data available
octanol/water

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Regulation

40 CFR Protection of Environment; Part 82 Protection of
Stratospheric Ozone - CAA Section 602 Class I

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

| | |
|-----------------------------------|---|
| Remarks | Substances This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B). |
| Additional ecological information | : No data available |

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

| | |
|------------------------|--|
| Waste from residues | : The product should not be allowed to enter drains, water courses or the soil. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of in accordance with local regulations. |
| Contaminated packaging | : Empty remaining contents. Dispose of as unused product. Do not re-use empty containers. Do not burn, or use a cutting torch on, the empty drum. |

SECTION 14. TRANSPORT INFORMATION

Transportation Regulation: 49 CFR (USA):
UN1993, Flammable liquids, n.o.s., (D-LIMONENE), 3, III

Transportation Regulation: IMDG (Vessel):
UN1993, FLAMMABLE LIQUID, N.O.S., (D-LIMONENE), 3, III, MP: (D-LIMONENE)

Transportation Regulation: IATA (Cargo Air):
UN1993, Flammable liquid, n.o.s., (D-LIMONENE), 3, III, MP: (D-LIMONENE)

Transportation Regulation: IATA (Passenger Air):
UN1993, Flammable liquid, n.o.s., (D-LIMONENE), 3, III, MP: (D-LIMONENE)

Transportation Regulation: TDG (Canada):
UN1993, FLAMMABLE LIQUID, N.O.S., (D-LIMONENE), 3, III

The product as delivered to the customer conforms to packaging requirements for shipment by road under US Department of Transportation (DOT) regulations. Additional transportation classifications noted above are for reference only, and not a certification or warranty of the suitability of the packaging for shipment under these alternative transport regulations.

SECTION 15. REGULATORY INFORMATION

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

TSCA list : No substances are subject to a Significant New Use Rule.

No substances are subject to TSCA 12(b) export notification requirements.

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Flammable (gases, aerosols, liquids, or solids)
Skin corrosion or irritation
Serious eye damage or eye irritation
Respiratory or skin sensitisation
Aspiration hazard

SARA 302 : No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 : This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

California Prop. 65



WARNING: This product can expose you to chemicals including 7-methyl-3-methyleneocta-1,6-diene, which is/are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

The components of this product are reported in the following inventories:

DSL This product contains one or more components that are listed on the Canadian NDSL. All other components are on the Canadian DSL.
TSCA On TSCA Inventory

For information on the country notification status for other regions please contact the manufacturer's regulatory group.

Inventory Acronym and Validity Area Legend:

TSCA (USA), DSL (Canada), NDSL (Canada)

SECTION 16. OTHER INFORMATION

SAFETY DATA SHEET

{ error: graphic file not found: C:\Program Files (x86)\SAP\FrontEnd\sapgui\WWI\graphics\ZepIncLogo.BMP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS


Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

Further information

NFPA:



HMIS III:

| | |
|-----------------|---|
| HEALTH | 2 |
| FLAMMABILITY | 2 |
| PHYSICAL HAZARD | 0 |

0 = not significant, 1 = Slight,
2 = Moderate, 3 = High
4 = Extreme, * = Chronic

OSHA - GHS Label Information:

Hazard pictograms :



Signal word :

Danger:

Hazard statements :

Flammable liquid and vapour. May be fatal if swallowed and enters airways. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation.

Precautionary statements :

Prevention: Keep away from heat/sparks/open flames/hot surfaces. No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ ventilating/ lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray. Wash skin thoroughly after handling. Contaminated work clothing should not be allowed out of the workplace. Wear protective gloves/ eye protection/ face protection.

Response: IF SWALLOWED: Immediately call a POISON CENTER/doctor. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Do NOT induce vomiting. If skin irritation or rash occurs: Get medical advice/ attention. If eye irritation persists: Get medical advice/ attention. Take off contaminated clothing and wash before reuse. In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

Storage: Store in a well-ventilated place. Keep cool.

Disposal: Dispose of contents/container in accordance with local regulation.

| | |
|----------------|------------|
| Version: | 3.0 |
| Revision Date: | 01/22/2018 |
| Print Date: | 12/23/2020 |

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. Users should make their own investigations to determine the suitability and applicability of the information for their particular purposes. This SDS has been prepared by the Compliance Services organization supporting this manufacturer, supplier or distributor.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

ZEP PRO CITRUS SOLVENT DEGREASER 5G OBS

Version 3.0

Revision Date 01/22/2018

Print Date 12/23/2020

Zep Inc. markets products under well recognized and established brand names such as Zep®, Zep Commercial®, Zep Professional®, Enforcer®, National Chemical™, Selig™, Misty®, Next Dimension™, Petro®, i-Chem®, TimeMist®, TimeWick™, MicrobeMax®, Country Vet®, Konk®, Original Bike Spirits®, Blue Coral®, Black Magic®, Rain-X®, Niagara National™, FC Forward Chemicals®, Rexodan®, Mykal™, and a number of private labeled brands.

Safety Data Sheet



SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

Ulti-Plex Grease EP NLGI 1, 2

Product Use: Commercial Grease
Product Number(s): 250185, 250186

Company Identification

Chevron Products Company
a division of Chevron U.S.A. Inc.
6001 Bollinger Canyon Rd.
San Ramon, CA 94583
United States of America
www.chevronlubricants.com

Transportation Emergency Response

CHEMTREC: (800) 424-9300 or (703) 527-3887

Health Emergency

Chevron Emergency & Information Center: Located in the USA. International collect calls accepted. (800) 231-0623 or (510) 231-0623

Product Information

email : lubemsds@chevron.com
Product Information: 1 (800) 582-3835, LUBETEK@chevron.com

SECTION 2 HAZARDS IDENTIFICATION

CLASSIFICATION: Acute aquatic toxicant: Category 2. Chronic aquatic toxicant: Category 3.

Environmental Hazards: Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

PRECAUTIONARY STATEMENTS:

Prevention: Avoid release to the environment.

Disposal: Dispose of contents/container in accordance with applicable local/regional/national/international regulations.

HAZARDS NOT OTHERWISE CLASSIFIED: Heating may release highly toxic and flammable hydrogen sulfide (H₂S). Do not attempt rescue without supplied-air respiratory protection.

SECTION 3 COMPOSITION/ INFORMATION ON INGREDIENTS

| COMPONENTS | CAS NUMBER | AMOUNT |
|--|------------|-------------------|
| Highly refined mineral oil (C15 - C50) | Mixture | 70 - 99 %weight |
| Distillates, hydrotreated middle | 64742-46-7 | 1 - 30 %weight |
| Zinc dialkyldithiophosphate | 68649-42-3 | 3 - < 5 %weight |
| Phosphoric acid ester, amine salt | Mixture | 0.3 - < 1 %weight |

SECTION 4 FIRST AID MEASURES

Description of first aid measures

Eye: No specific first aid measures are required. As a precaution, remove contact lenses, if worn, and flush eyes with water.

Skin: Wash skin with water immediately and remove contaminated clothing and shoes. Get medical attention if any symptoms develop. To remove the material from skin, use soap and water. Discard contaminated clothing and shoes or thoroughly clean before reuse.

Ingestion: No specific first aid measures are required. Do not induce vomiting. As a precaution, get medical advice.

Inhalation: No specific first aid measures are required. If exposed to excessive levels of material in the air, move the exposed person to fresh air. Get medical attention if coughing or respiratory discomfort occurs. If exposure to hydrogen sulfide (H₂S) gas is possible during an emergency, wear an approved, positive pressure air-supplying respirator. Move the exposed person to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention.

Most important symptoms and effects, both acute and delayed

IMMEDIATE HEALTH EFFECTS

Eye: Not expected to cause prolonged or significant eye irritation.

Skin: Skin contact may cause drying or defatting of the skin. Symptoms may include pain, itching, discoloration, swelling, and blistering. High-Pressure Equipment Information: Accidental high-velocity injection under the skin of materials of this type may result in serious injury. Seek medical attention at once should an accident like this occur. The initial wound at the injection site may not appear to be serious at first; but, if left untreated, could result in disfigurement or amputation of the affected part.

Contact with the skin is not expected to cause an allergic skin response. Not expected to be harmful to internal organs if absorbed through the skin.

Ingestion: Not expected to be harmful if swallowed.

Inhalation: Not expected to be harmful if inhaled. Contains a petroleum-based mineral oil. May cause respiratory irritation or other pulmonary effects following prolonged or repeated inhalation of oil mist at airborne levels above the recommended mineral oil mist exposure limit. Symptoms of respiratory irritation may include coughing and difficulty breathing. Hydrogen sulfide has a strong rotten-egg odor. However, with continued exposure and at high levels, H₂S may deaden a person's sense of smell. If the rotten egg odor is no longer noticeable, it may not necessarily mean that exposure has stopped. At low levels, hydrogen sulfide causes irritation of the eyes, nose, and throat. Moderate levels can cause headache, dizziness, nausea, and vomiting, as well as coughing and difficulty breathing. Higher levels can cause shock, convulsions, coma, and death. After a serious exposure, symptoms usually begin immediately.

The U.S. National Institute for Occupational Safety and Health (NIOSH) considers air concentrations of hydrogen sulfide gas greater than 100 ppm to be Immediately Dangerous to Life and Health (IDLH).

DELAYED OR OTHER HEALTH EFFECTS: Not classified

Indication of any immediate medical attention and special treatment needed

Note to Physicians: Administration of 100% oxygen and supportive care is the preferred treatment for poisoning by hydrogen sulfide gas. For additional information on H₂S, see Chevron MSDS No. 301. In an accident involving

high-pressure equipment, this product may be injected under the skin. Such an accident may result in a small, sometimes bloodless, puncture wound. However, because of its driving force, material injected into a fingertip can be deposited into the palm of the hand. Within 24 hours, there is usually a great deal of swelling, discoloration, and intense throbbing pain. Immediate treatment at a surgical emergency center is recommended.

SECTION 5 FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

PROTECTION OF FIRE FIGHTERS:

Fire Fighting Instructions: This material will burn although it is not easily ignited. See Section 7 for proper handling and storage. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus.

Combustion Products: Highly dependent on combustion conditions. A complex mixture of airborne solids, liquids, and gases including carbon monoxide, carbon dioxide, and unidentified organic compounds will be evolved when this material undergoes combustion. Combustion may form oxides of: Sulfur, Zinc, Phosphorus, Lithium, Nitrogen, Boron.

SECTION 6 ACCIDENTAL RELEASE MEASURES

Protective Measures: Eliminate all sources of ignition in vicinity of spilled material.

Spill Management: Clean up spills immediately, observing precautions in Exposure Controls/Personal Protection section. Stop the source of the release if you can do it without risk. Contain release to prevent further contamination of soil, surface water or groundwater. Clean up spill as soon as possible, observing precautions in Exposure Controls/Personal Protection. Use appropriate techniques such as applying non-combustible absorbent materials or pumping. Where feasible and appropriate, remove contaminated soil. Place contaminated materials in disposable containers and dispose of in a manner consistent with applicable regulations.

Reporting: Report spills to local authorities and/or the U.S. Coast Guard's National Response Center at (800) 424-8802 as appropriate or required.

SECTION 7 HANDLING AND STORAGE

General Handling Information: Avoid contaminating soil or releasing this material into sewage and drainage systems and bodies of water.

Precautionary Measures: Do not get in eyes, on skin, or on clothing. Do not breathe gas. Wash thoroughly after handling.

Unusual Handling Hazards: Toxic quantities of hydrogen sulfide (H₂S) may be present in storage tanks and bulk transport vessels which contain or have contained this material. Persons opening or entering these compartments should first determine if H₂S is present. See Exposure Controls/Personal Protection -Section 8. Do not attempt rescue of a person over exposed to H₂S without wearing approved supplied-air or self-contained breathing equipment. If there is a potential for exceeding one-half the occupational exposure standard, monitoring of hydrogen sulfide levels is required. Since the sense of smell cannot be relied upon to detect the presence of H₂S, the concentration should be measured by the use of fixed or portable devices.

Static Hazard: Electrostatic charge may accumulate and create a hazardous condition when handling this material. To minimize this hazard, bonding and grounding may be necessary but may not, by themselves, be sufficient. Review all operations which have the potential of generating and accumulating an electrostatic charge and/or a flammable atmosphere (including tank and container filling, splash filling, tank cleaning, sampling, gauging, switch loading, filtering, mixing, agitation, and vacuum truck operations) and use appropriate mitigating procedures.

Container Warnings: Container is not designed to contain pressure. Do not use pressure to empty container or it may rupture with explosive force. Empty containers retain product residue (solid, liquid, and/or vapor) and can be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, static electricity, or other sources of ignition. They may explode and cause injury or death. Empty containers should be completely drained, properly closed, and promptly returned to a drum reconditioner or disposed of properly.

SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

GENERAL CONSIDERATIONS:

Consider the potential hazards of this material (see Section 2), applicable exposure limits, job activities, and other substances in the work place when designing engineering controls and selecting personal protective equipment. If engineering controls or work practices are not adequate to prevent exposure to harmful levels of this material, the personal protective equipment listed below is recommended. The user should read and understand all instructions and limitations supplied with the equipment since protection is usually provided for a limited time or under certain circumstances.

ENGINEERING CONTROLS:

Use in a well-ventilated area.

PERSONAL PROTECTIVE EQUIPMENT

Eye/Face Protection: No special eye protection is normally required. Where splashing is possible, wear safety glasses with side shields as a good safety practice.

Skin Protection: Wear protective clothing to prevent skin contact. Selection of protective clothing may include gloves, apron, boots, and complete facial protection depending on operations conducted. Suggested materials for protective gloves include: Neoprene, Nitrile Rubber, Silver Shield, Viton.

Respiratory Protection: No respiratory protection is normally required.

If material is heated and emits hydrogen sulfide, determine if airborne concentrations are below the occupational exposure limit for hydrogen sulfide. If not, wear an approved positive pressure air-supplying respirator. For more information on hydrogen sulfide, see Chevron MSDS No. 301. If user operations generate an oil mist, determine if airborne concentrations are below the occupational exposure limit for mineral oil mist. If not, wear an approved respirator that provides adequate protection from the measured concentrations of this material. For air-purifying respirators use a particulate cartridge.

Use a positive pressure air-supplying respirator in circumstances where air-purifying respirators may not provide adequate protection.

Occupational Exposure Limits:

| Component | Agency | Form | TWA | STEL | Ceiling | Notation |
|--|----------|------|---------|----------|---------|----------|
| Highly refined mineral oil (C15 - C50) | ACGIH | -- | 5 mg/m3 | 10 mg/m3 | -- | -- |
| Highly refined mineral oil (C15 - C50) | OSHA Z-1 | -- | 5 mg/m3 | -- | -- | -- |

Consult local authorities for appropriate values.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Attention: the data below are typical values and do not constitute a specification.

Color: Purple

Physical State: Semi-solid

Odor: Petroleum odor

Odor Threshold: No data available

pH: Not Applicable

Vapor Pressure: No data available

Vapor Density (Air = 1): No data available

Initial Boiling Point: No data available

Solubility: Soluble in hydrocarbon solvents; insoluble in water.

Freezing Point: No data available

Melting Point: 232°C (449.6°F) (Minimum)

Density: No data available

Viscosity: 22 mm²/s @ 100°C (212°F) (Minimum)
Evaporation Rate: No data available
Decomposition temperature: No data available
Octanol/Water Partition Coefficient: No data available

FLAMMABLE PROPERTIES:

Flammability (solid, gas): No Data Available

Flashpoint: (Cleveland Open Cup) 204 °C (399 °F) (Minimum)

Autoignition: No data available

Flammability (Explosive) Limits (% by volume in air): Lower: Not Applicable Upper: Not Applicable

SECTION 10 STABILITY AND REACTIVITY

Reactivity: May react with strong acids or strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

Chemical Stability: This material is considered stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.

Incompatibility With Other Materials: Not applicable

Hazardous Decomposition Products: Hydrogen Sulfide (Elevated temperatures), Alkyl Mercaptans (Elevated temperatures)

Hazardous Polymerization: Hazardous polymerization will not occur.

SECTION 11 TOXICOLOGICAL INFORMATION

Information on toxicological effects

Serious Eye Damage/Irritation: The eye irritation hazard is based on evaluation of data for similar materials.

Skin Corrosion/Irritation: The skin irritation hazard is based on evaluation of data for similar materials.

Skin Sensitization: The skin sensitization hazard is based on evaluation of data for product components.

Acute Dermal Toxicity: The acute dermal toxicity hazard is based on evaluation of data for similar materials.

Acute Oral Toxicity: The acute oral toxicity hazard is based on evaluation of data for similar materials.

Acute Inhalation Toxicity: The acute inhalation toxicity hazard is based on evaluation of data for similar materials.

Acute Toxicity Estimate: Not Determined

Germ Cell Mutagenicity: The hazard evaluation is based on data for components or a similar material.

Carcinogenicity: The hazard evaluation is based on data for components or a similar material.

Reproductive Toxicity: The hazard evaluation is based on data for components or a similar material.

Specific Target Organ Toxicity - Single Exposure: The hazard evaluation is based on data for components or a similar material.

Specific Target Organ Toxicity - Repeated Exposure: The hazard evaluation is based on data for components or a similar material.

ADDITIONAL TOXICOLOGY INFORMATION:

This product contains petroleum base oils which may be refined by various processes including severe solvent extraction, severe hydrocracking, or severe hydrotreating. None of the oils requires a cancer warning under the OSHA Hazard Communication Standard (29 CFR 1910.1200). These oils have not been listed in the National Toxicology Program (NTP) Annual Report nor have they been classified by the International Agency for Research on Cancer (IARC) as; carcinogenic to humans (Group 1), probably carcinogenic to humans (Group 2A), or possibly

carcinogenic to humans (Group 2B).

These oils have not been classified by the American Conference of Governmental Industrial Hygienists (ACGIH) as: confirmed human carcinogen (A1), suspected human carcinogen (A2), or confirmed animal carcinogen with unknown relevance to humans (A3).

SECTION 12 ECOLOGICAL INFORMATION

ECOTOXICITY

This material is expected to be toxic to aquatic organisms and may cause long-term adverse effects in the aquatic environment.

The product has not been tested. The statement has been derived from the properties of the individual components.

MOBILITY

No data available.

PERSISTENCE AND DEGRADABILITY

This material is not expected to be readily biodegradable. The biodegradability of this material is based on an evaluation of data for the components or a similar material.

The product has not been tested. The statement has been derived from the properties of the individual components.

POTENTIAL TO BIOACCUMULATE

Bioconcentration Factor: No data available.

Octanol/Water Partition Coefficient: No data available

SECTION 13 DISPOSAL CONSIDERATIONS

Use material for its intended purpose or recycle if possible. Oil collection services are available for used oil recycling or disposal. Place contaminated materials in containers and dispose of in a manner consistent with applicable regulations. Contact your sales representative or local environmental or health authorities for approved disposal or recycling methods.

SECTION 14 TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

DOT Shipping Description: NOT REGULATED AS HAZARDOUS MATERIAL UNDER 49 CFR

IMO/IMDG Shipping Description: NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER THE IMDG CODE

ICAO/IATA Shipping Description: NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER ICAO

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC code:

Not applicable

SECTION 15 REGULATORY INFORMATION

EPCRA 311/312 CATEGORIES: Not applicable

REGULATORY LISTS SEARCHED:

| | |
|---------------------|----------------------|
| 01-1=IARC Group 1 | 03=EPCRA 313 |
| 01-2A=IARC Group 2A | 04=CA Proposition 65 |
| 01-2B=IARC Group 2B | 05=MA RTK |
| 02=NTP Carcinogen | 06=NJ RTK |
| | 07=PA RTK |

The following components of this material are found on the regulatory lists indicated.

Zinc dialkyldithiophosphate 06, 07

CHEMICAL INVENTORIES:

All components comply with the following chemical inventory requirements: AICS (Australia), DSL (Canada), IECSC (China), KECI (Korea), PICCS (Philippines), TSCA (United States).

One or more components does not comply with the following chemical inventory requirements: ENCS (Japan).

NEW JERSEY RTK CLASSIFICATION:

Under the New Jersey Right-to-Know Act L. 1983 Chapter 315 N.J.S.A. 34:5A-1 et. seq., the product is to be identified as follows: PETROLEUM OIL (Grease)

SECTION 16 OTHER INFORMATION

NFPA RATINGS: Health: 2 Flammability: 1 Reactivity: 0

HMIS RATINGS: Health: 0 Flammability: 1 Reactivity: 0
(0-Least, 1-Slight, 2-Moderate, 3-High, 4-Extreme, PPE:- Personal Protection Equipment Index recommendation, *-Chronic Effect Indicator). These values are obtained using the guidelines or published evaluations prepared by the National Fire Protection Association (NFPA) or the National Paint and Coating Association (for HMIS ratings).

REVISION STATEMENT: This revision updates the following sections of this Safety Data Sheet:
1,2,3,4,5,6,7,8,9,10,12,14,15,16

Revision Date: March 07, 2019

ABBREVIATIONS THAT MAY HAVE BEEN USED IN THIS DOCUMENT:

| | |
|---|--|
| TLV - Threshold Limit Value | TWA - Time Weighted Average |
| STEL - Short-term Exposure Limit | PEL - Permissible Exposure Limit |
| GHS - Globally Harmonized System | CAS - Chemical Abstract Service Number |
| ACGIH - American Conference of Governmental Industrial Hygienists | IMO/IMDG - International Maritime Dangerous Goods Code |
| API - American Petroleum Institute | SDS - Safety Data Sheet |
| HMIS - Hazardous Materials Information System | NFPA - National Fire Protection Association (USA) |
| DOT - Department of Transportation (USA) | NTP - National Toxicology Program (USA) |
| IARC - International Agency for Research on Cancer | OSHA - Occupational Safety and Health Administration |
| NCEL - New Chemical Exposure Limit | EPA - Environmental Protection Agency |
| SCBA - Self-Contained Breathing Apparatus | |

Prepared according to the 29 CFR 1910.1200 (2012) by Chevron Energy Technology Company, 6001 Bollinger

Canyon Road, San Ramon, CA 94583.

The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.



Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909
EU/CLP GHS

Synonyms: Ultra Low Sulfur Diesel; Low Sulfur Diesel; No. 2 Diesel; Motor Vehicle Diesel Fuel; Non-Road Diesel Fuel; Locomotive/Marine Diesel Fuel

*** Section 1 - Product and Company Identification ***

Manufacturer Information

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

Phone: 732-750-6000 Corporate EHS

Emergency # 800-424-9300 CHEMTREC

*** Section 2 - Hazards Identification ***

GHS Classification:

Flammable Liquids - Category 3
Skin Corrosion/Irritation – Category 2
Germ Cell Mutagenicity – Category 2
Carcinogenicity - Category 2
Specific Target Organ Toxicity (Single Exposure) - Category 3 (respiratory irritation, narcosis)
Aspiration Hazard – Category 1
Hazardous to the Aquatic Environment, Acute Hazard – Category 3

GHS LABEL ELEMENTS

Symbol(s)



Signal Word

DANGER

Hazard Statements

Flammable liquid and vapor.
Causes skin irritation.
Suspected of causing genetic defects.
Suspected of causing cancer.
May cause respiratory irritation.
May cause drowsiness or dizziness.
May be fatal if swallowed and enters airways.
Harmful to aquatic life.

Precautionary Statements

Prevention

Keep away from heat/sparks/open flames/hot surfaces. No smoking
Keep container tightly closed.
Ground/bond container and receiving equipment.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Use explosion-proof electrical/ventilating/lighting/equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Wear protective gloves/protective clothing/eye protection/face protection.
Wash hands and forearms thoroughly after handling.
Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Avoid breathing fume/mist/vapours/spray.

Response

In case of fire: Use water spray, fog or foam to extinguish.
IF ON SKIN (or hair): Wash with plenty of soap and water. Remove/Take off immediately all contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical advice/attention.
IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell.
If swallowed: Immediately call a poison center or doctor. Do NOT induce vomiting.
IF exposed or concerned: Get medical advice/attention.

Storage

Store in a well-ventilated place. Keep cool.
Keep container tightly closed.
Store locked up.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

* * * Section 3 - Composition / Information on Ingredients * * *

| CAS # | Component | Percent |
|------------|----------------------|---------|
| 68476-34-6 | Fuels, diesel, no. 2 | 100 |
| 91-20-3 | Naphthalene | <0.1 |

A complex mixture of hydrocarbons with carbon numbers in the range C9 and higher.

* * * Section 4 - First Aid Measures * * *

First Aid: Eyes

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

First Aid: Skin

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or with waterless hand cleanser. Obtain medical attention if irritation or redness develops. Thermal burns require immediate medical attention depending on the severity and the area of the body burned.

First Aid: Ingestion

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Monitor for breathing difficulties. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

First Aid: Inhalation

Remove person to fresh air. If person is not breathing, provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

* * * Section 5 - Fire Fighting Measures * * *

General Fire Hazards

See Section 9 for Flammability Properties.

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

Hazardous Combustion Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

Extinguishing Media

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, and other gaseous agents.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

Unsuitable Extinguishing Media

None

Fire Fighting Equipment/Instructions

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment. Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing. Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

* * * Section 6 - Accidental Release Measures * * *

Recovery and Neutralization

Carefully contain and stop the source of the spill, if safe to do so.

Materials and Methods for Clean-Up

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal. Caution, flammable vapors may accumulate in closed containers.

Emergency Measures

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Personal Precautions and Protective Equipment

Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

Environmental Precautions

Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Prevention of Secondary Hazards

None

* * * Section 7 - Handling and Storage * * *

Handling Procedures

Handle as a combustible liquid. Keep away from heat, sparks, excessive temperatures and open flame! No smoking or open flame in storage, use or handling areas. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents."

Storage Procedures

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks."

Incompatibilities

Keep away from strong oxidizers.

* * * Section 8 - Exposure Controls / Personal Protection * * *

Component Exposure Limits

Fuels, diesel, no. 2 (270-676-1)

- ACGIH: 100 mg/m³ TWA (inhalable fraction and vapor, as total hydrocarbons, listed under Diesel fuel)
Skin - potential significant contribution to overall exposure by the cutaneous route (listed under Diesel fuel)
- Belgium: 100 mg/m³ TWA (as total hydrocarbon, aerosol and vapor)
Skin (listed under Gas oil)
- Portugal: 100 mg/m³ TWA [VLE-MP] (aerosol and vapor, as total Hydrocarbons, listed under Fuel diesel)

Naphthalene (202-049-5)

- ACGIH: 15 ppm STEL
10 ppm TWA

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

| | |
|--------------|--|
| | Skin - potential significant contribution to overall exposure by the cutaneous route |
| Austria: | 10 ppm TWA [TMW]; 50 mg/m ³ TWA [TMW] skin notation |
| Belgium: | 15 ppm STEL; 80 mg/m ³ STEL 10 ppm TWA; 53 mg/m ³ TWA Skin |
| Denmark: | 10 ppm TWA; 50 mg/m ³ TWA |
| Finland: | 2 ppm STEL; 10 mg/m ³ STEL 1 ppm TWA; 5 mg/m ³ TWA |
| France: | 10 ppm TWA [VME]; 50 mg/m ³ TWA [VME] |
| Germany: | 0.1 ppm TWA AGW (The risk of damage to the embryo or fetus can be excluded when MAK and BAT values are observed, inhalable fraction, exposure factor 1); 0.5 mg/m ³ TWA AGW (The risk of damage to the embryo or fetus can be excluded when MAK and BAT values are observed, inhalable fraction, exposure factor 1) |
| Greece: | 10 ppm TWA; 50 mg/m ³ TWA |
| Ireland: | 15 ppm STEL; 75 mg/m ³ STEL 10 ppm TWA; 50 mg/m ³ TWA |
| Netherlands: | 80 mg/m ³ STEL 50 mg/m ³ TWA |
| Portugal: | 10 ppm TWA [VLE-MP] |
| Spain: | 15 ppm STEL [VLA-EC]; 80 mg/m ³ STEL [VLA-EC] 10 ppm TWA [VLA-ED]; 53 mg/m ³ TWA [VLA-ED] skin - potential for cutaneous exposure |
| Sweden: | 10 ppm LLV; 50 mg/m ³ LLV 15 ppm STV; 80 mg/m ³ STV |

Engineering Measures

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

Personal Protective Equipment: Respiratory

A NIOSH/MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

Personal Protective Equipment: Hands

Gloves constructed of nitrile, neoprene, or PVC are recommended.

Personal Protective Equipment: Eyes

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

Personal Protective Equipment: Skin and Body

Chemical protective clothing such as of E.I. DuPont TyChem®, Saranex® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

*** Section 9 - Physical & Chemical Properties ***

| | | | |
|--|-------------------------------|--|---------------------------------|
| Appearance: | Clear, straw-yellow. | Odor: | Mild, petroleum distillate odor |
| Physical State: | Liquid | pH: | ND |
| Vapor Pressure: | 0.009 psia @ 70 °F (21 °C) | Vapor Density: | >1.0 |
| Boiling Point: | 320 to 690 °F (160 to 366 °C) | Melting Point: | ND |
| Solubility (H2O): | Negligible | Specific Gravity: | 0.83-0.876 @ 60°F (16°C) |
| Evaporation Rate: | Slow; varies with conditions | VOC: | ND |
| Percent Volatile: | 100% | Octanol/H2O Coeff.: | ND |
| Flash Point: | >125 °F (>52 °C) minimum | Flash Point Method: | PMCC |
| Upper Flammability Limit (UFL): | 7.5 | Lower Flammability Limit (LFL): | 0.6 |
| Burning Rate: | ND | Auto Ignition: | 494°F (257°C) |

*** Section 10 - Chemical Stability & Reactivity Information ***

Chemical Stability

This is a stable material.

Hazardous Reaction Potential

Will not occur.

Conditions to Avoid

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources.

Incompatible Products

Keep away from strong oxidizers.

Hazardous Decomposition Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

*** Section 11 - Toxicological Information ***

Acute Toxicity

A: General Product Information

Harmful if swallowed.

B: Component Analysis - LD50/LC50

Naphthalene (91-20-3)

Inhalation LC50 Rat >340 mg/m³ 1 h; Oral LD50 Rat 490 mg/kg; Dermal LD50 Rat >2500 mg/kg; Dermal LD50 Rabbit >20 g/kg

Potential Health Effects: Skin Corrosion Property/Stimulativeness

Practically non-toxic if absorbed following acute (single) exposure. May cause skin irritation with prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are repeatedly exposed.

Potential Health Effects: Eye Critical Damage/ Stimulativeness

Contact with eyes may cause mild irritation.

Potential Health Effects: Ingestion

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Potential Health Effects: Inhalation

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

Respiratory Organs Sensitization/Skin Sensitization

This product is not reported to have any skin sensitization effects.

Generative Cell Mutagenicity

This material has been positive in a mutagenicity study.

Carcinogenicity

A: General Product Information

Suspected of causing cancer.

Studies have shown that similar products produce skin tumors in laboratory animals following repeated applications without washing or removal. The significance of this finding to human exposure has not been determined. Other studies with active skin carcinogens have shown that washing the animal's skin with soap and water between applications reduced tumor formation.

B: Component Carcinogenicity

Fuels, diesel, no. 2 (68476-34-6)

ACGIH: A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans (listed under Diesel fuel)

Naphthalene (91-20-3)

ACGIH: A4 - Not Classifiable as a Human Carcinogen

NTP: Reasonably Anticipated To Be A Human Carcinogen (Possible Select Carcinogen)

IARC: Monograph 82 [2002] (Group 2B (possibly carcinogenic to humans))

Reproductive Toxicity

This product is not reported to have any reproductive toxicity effects.

Specified Target Organ General Toxicity: Single Exposure

This product is not reported to have any specific target organ general toxicity single exposure effects.

Specified Target Organ General Toxicity: Repeated Exposure

This product is not reported to have any specific target organ general toxicity repeat exposure effects.

Aspiration Respiratory Organs Hazard

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

*** Section 12 - Ecological Information ***

Ecotoxicity

A: General Product Information

Keep out of sewers, drainage areas and waterways. Report spills and releases, as applicable, under Federal and State regulations.

B: Component Analysis - Ecotoxicity - Aquatic Toxicity

Fuels, diesel, no. 2 (68476-34-6)

Test & Species

| | Conditions |
|--------------------------------|------------------------|
| 96 Hr LC50 Pimephales promelas | 35 mg/L [flow-through] |

Naphthalene (91-20-3)

Test & Species

| | Conditions |
|---------------------------------|-------------------------------|
| 96 Hr LC50 Pimephales promelas | 5.74-6.44 mg/L [flow-through] |
| 96 Hr LC50 Oncorhynchus mykiss | 1.6 mg/L [flow-through] |
| 96 Hr LC50 Oncorhynchus mykiss | 0.91-2.82 mg/L [static] |
| 96 Hr LC50 Pimephales promelas | 1.99 mg/L [static] |
| 96 Hr LC50 Lepomis macrochirus | 31.0265 mg/L [static] |
| 72 Hr EC50 Skeletonema costatum | 0.4 mg/L |
| 48 Hr LC50 Daphnia magna | 2.16 mg/L |
| 48 Hr EC50 Daphnia magna | 1.96 mg/L [Flow through] |
| 48 Hr EC50 Daphnia magna | 1.09 - 3.4 mg/L [Static] |

Persistence/Degradability

No information available.

Bioaccumulation

No information available.

Mobility in Soil

No information available.

*** Section 13 - Disposal Considerations ***

Waste Disposal Instructions

See Section 7 for Handling Procedures. See Section 8 for Personal Protective Equipment recommendations.

Disposal of Contaminated Containers or Packaging

Dispose of contents/container in accordance with local/regional/national/international regulations.

*** Section 14 - Transportation Information ***

IATA Information

Shipping Name: Diesel Fuel

UN #: 1202 Hazard Class: 3 Packing Group: III

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

ICAO Information

Shipping Name: Diesel Fuel

UN #: 1202 Hazard Class: 3 Packing Group: III

IMDG Information

Shipping Name: Diesel Fuel

UN #: 1202 Hazard Class: 3 Packing Group: III

*** Section 15 - Regulatory Information ***

Regulatory Information

Component Analysis – Inventory

| Component/CAS | EC # | EEC | CAN | TSCA |
|------------------------------------|-----------|--------|-----|------|
| Fuels, diesel, no. 2 68476-34-6 | 270-676-1 | EINECS | DSL | Yes |
| Naphthalene 91-20-3 | 202-049-5 | EINECS | DSL | Yes |

*** Section 16 - Other Information ***

Key/Legend

ACGIH = American Conference of Governmental Industrial Hygienists; ADG = Australian Code for the Transport of Dangerous Goods by Road and Rail; ADR/RID = European Agreement of Dangerous Goods by Road/Rail; AS = Standards Australia; DFG = Deutsche Forschungsgemeinschaft; DOT = Department of Transportation; DSL = Domestic Substances List; EEC = European Economic Community; EINECS = European Inventory of Existing Commercial Chemical Substances; ELINCS = European List of Notified Chemical Substances; EU = European Union; HMIS = Hazardous Materials Identification System; IARC = International Agency for Research on Cancer; IMO = International Maritime Organization; IATA = International Air Transport Association; MAK = Maximum Concentration Value in the Workplace; NDSL = Non-Domestic Substances List; NFPA = National Fire Protection Association; NOHSC = National Occupational Health & Safety Commission; NTP = National Toxicology Program; STEL = Short-term Exposure Limit; TDG = Transportation of Dangerous Goods; TLV = Threshold Limit Value; TSCA = Toxic Substances Control Act; TWA = Time Weighted Average

Literature References

None

Other Information

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.

End of Sheet

MATERIAL SAFETY DATA SHEET

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: Sheila Shine (Liquid)

GENERAL USE: Polishing agent, Cleaner. Do not use on Floors and Bathtubs. May pose slipping hazard.



PRODUCT DESCRIPTION: Clear liquid, wintergreen odor. **USA and Canada**

| | | | |
|--|--|--|--|
| MANUFACTURER'S NAME Sheila Shine, Inc. | | DATE PREPARED: July 26, 2007 | Page 1 of 4 |
| ADDRESS (NUMBER, STREET, P.O. BOX) 1201 NW 1st Ave. | | SUPERSEDES: May 22, 2007 | |
| (CITY, STATE AND ZIP CODE) Miami, FL 33136 | | COUNTRY USA | TELEPHONE NUMBER FOR INFORMATION (305) 379-1881 |
| DISTRIBUTOR'S NAME Same | | EMERGENCY TELEPHONE NUMBER ChemTel Inc. 1- (800) 255-3924 Intl. + 01 (813) 248-0585 | |
| ADDRESS (NUMBER, STREET, P.O. BOX) | | TELEPHONE NUMBER FOR INFORMATION | |
| (CITY, STATE AND ZIP CODE) | | EMERGENCY TELEPHONE NUMBER | |

SECTION 2 - HAZARDOUS INGREDIENTS

| HAZARDOUS COMPONENTS | CAS # | % (by weight) | OSHA PEL | | ACGIH TWA | | SARA TITLE III | RQ LBS |
|---|------------|------------------|-----------------|-------|-----------|-------|-------------------|-----------|
| | | | PPM | MG/M3 | PPM | MG/M3 | | |
| Perchloroethylene (a,b,c,d,e,f,g) | 127-18-4 | 10 - 30 | 100 | 200 | 25 | | Yes | 100 |
| Severely solvent refined light paraffinic petroleum oil | 64741-89-5 | 30 - 60 | 5 (oil mist) | | | | | |
| Xylene (mixed) (a,b,c) | 1330-20-7 | 7 - 13 | 100 | 435 | 100 | | Yes | 1000 |
| Heavy paraffinic petroleum oil (h) | 64741-88-4 | 10 - 30 | 5 (mist) | | 5 (mist) | | | |
| Ethylbenzene (a,c,d) | 100-41-4 | 1 - 5 | 100 | 435 | 125 | 545 | Yes | 1000 |
| Methyl salicylate | 119-36-8 | < 0.1 | not established | | | | | |

(a,c) See Section 15

(b) Indicates that the Resource Conservation and Recovery Act (RCRA) has determined the waste for this chemical is listed as hazardous and must be handled according to regulations in 40 CFR 260-281.

(d) Indicates substance appears on National Toxicology Program (NTP) list of carcinogens, International Agency for Research on Cancer (IARC) list of carcinogens or is regulated by the Occupational Safety and Health Administration (OSHA) as a possible carcinogen.

(e) Indicates listing in Table Z - 2, 29 CFR 1910.1000, value shown is 8-hour Time Weighted Average. See table for acceptable ceiling concentration limits and acceptable maximum peak above the acceptable ceiling concentration.

(f) California Prop 65, Safe Drinking Water and Toxic Enforcement Act of 1986, chemicals known to the state to cause cancer or reproductive toxicity. A person in the course of doing business must warn others who may consume, come into contact with, or otherwise be exposed to this chemical.

(g) Product is listed or defined as a marine pollutant in IMDG Code or 49 CFR 172.101 Appendix B, List of Marine Pollutants and must be classified as an Environmentally Hazardous Substance, Class 9, in addition to any other defined hazards for this product.

(h) IARC has determined that residual fuels are possibly carcinogenic to humans. Handling procedures and safety precautions in the MSDS should be followed to minimize employee's exposure.

SECTION 3 - HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

Danger! May be fatal if swallowed, inhaled or absorbed through the skin. Affects liver, kidneys, central nervous system and gastrointestinal tract. Causes severe eye irritation. Causes irritation to skin and respiratory tract. Environmental hazard. Flammable, harmful. Hazard Symbols - Xn, N. Risk Phrases - R40, 51/53

POTENTIAL HEALTH EFFECTS

INHALATION: High concentrations are irritating to the respiratory tract; may cause headache, dizziness, nausea, vomiting or even death in confined or poorly ventilated areas. The primary effect of inhalation is narcosis.

SKIN: Brief contact may cause slight irritation; prolonged contact may cause moderate irritation or dermatitis. This problem may be accentuated by liquid becoming trapped against the skin by contaminated clothing and shoes.

EYES: High vapor concentration or contact may cause irritation, discomfort or pain. May cause slight transient corneal injury.

INGESTION: Swallowing of this material may result in irritation of the mouth and GI tract. Vomiting and subsequent aspiration into the lungs may lead to chemical pneumonia and pulmonary edema which is a potentially fatal condition.

CARCINOGENICITY
This is or contains a component (perchloroethylene) that has been reported to be carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification. IARC Rating: 2A; NTP Rating: Clear evidence.

NTP? Yes IARC MONOGRAPHS? Yes OSHA REGULATED? No 405

MATERIAL SAFETY DATA SHEET

PRODUCT NAME: Sheila Shine (Liquid)
July 26, 2007

Page 2 of 4

SECTION 4 - FIRST AID MEASURES

INHALATION: Remove affected person to fresh air; provide oxygen if breathing is difficult; if affected person is not breathing, administer CPR and seek emergency medical attention.

SKIN: Remove contaminated clothing; wash affected area with soap and water; launder contaminated clothing before reuse; if irritation persists, seek medical attention.

EYES: Check for and remove contact lenses. Flush eyes with clear running water for 15 minutes while holding eyelids open; if irritation persists, seek medical attention.

INGESTION: If conscious drink large amounts of water; DO NOT induce vomiting. Take affected person immediately to a hospital; do not give anything by mouth to unconscious person.

SECTION 5 - FIRE FIGHTING MEASURES

FLASH POINT (METHOD USED)

132.8° F (56° C) TOC

FLAMMABLE LIMITS

LEL: Not determined

UEL: Not determined

AUTOIGNITION TEMPERATURE: Not determined

NFPA CLASS: **IC**

GENERAL HAZARDS: Product is flammable and vapors concentrated in a confined or poorly ventilated area can be ignited upon contact with a high energy spark, flame or high intensity source of heat such as welding spark. Products of combustion include compounds of carbon, chlorine, hydrogen and oxygen, including carbon monoxide and phosgene. Toxic gases will form upon combustion.

EXTINGUISHING MEDIA

Carbon dioxide, water fog, dry chemical, chemical foam. Do not use solid stream of water since stream will scatter and spread fire

FIRE FIGHTING PROCEDURES

Fire fighters should wear NIOSH / MSHA approved, self - contained breathing apparatus for possible exposure to hydrogen chloride and phosgene. Fine water spray can be used to keep fire - exposed containers cool.

UNUSUAL FIRE AND EXPLOSION HAZARDS

Vapors concentrated in a confined or poorly ventilated area can be ignited upon contact with a high energy spark, flame or high intensity source of heat such as welding spark.

HAZARDOUS COMBUSTION PRODUCTS

In case of a fire, phosgene, chlorides, oxides of carbon, hydrocarbons, fumes or vapors, and toxic smoke may be produced.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: CAUTION - FLAMMABLE. Evacuate and ventilate area; confine and absorb into absorbent; place material into approved containers for disposal; for spills in excess of allowable quantities (RQ) notify the National Response Center (800) 424 - 8802; refer to CERCLA 40 CFR 302 and SARA Title III, Section 313 40 CFR 372 for detailed instructions concerning reporting requirements. Do not discharge into lakes, ponds, streams or public waters.

SECTION 7 - HANDLING AND STORAGE

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE: Keep container closed when not in use; protect containers from abuse; protect from extreme temperatures. CAUTION - FLAMMABLE - keep away from all sources of ignition. "Empty" containers may contain residue which may form explosive vapors. Do not weld or cut near empty container that has not been professionally reconditioned. Use non-sparking tools when opening and closing containers. Maintain well ventilated work areas to minimize exposure when handling this material. Do not use on Floors. May pose slipping hazard.

SECTION 8 - EXPOSURE CONTROLS / PERSONAL PROTECTION

ENGINEERING CONTROLS

The use of local exhaust ventilation is recommended to control emissions near the source. Provide mechanical ventilation of confined spaces. Use explosion-proof ventilation equipment.

PERSONAL PROTECTION:

RESPIRATORY PROTECTION: None required while threshold limits are kept below maximum allowable concentrations; if TWA exceeds limits, NIOSH approved respirator must be worn. Refer to 29 CFR 1910.134 or European Standard EN 149 for complete regulations. DO NOT enter low - lying areas without self - contained breathing apparatus where vapors may be present. Inhalation could be fatal.

PROTECTIVE GLOVES: Neoprene, butyl or nitrile rubber gloves with cuffs.

EYE PROTECTION: Chemical splash goggles. Refer to 29 CFR 1910.133 or European Standard EN166.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Safety eyewash station nearby.

WORK / HYGIENIC PRACTICES: Practice safe workplace habits. Minimize body contact with this, as well as all chemicals in general.

406

MATERIAL SAFETY DATA SHEET

PRODUCT NAME: Sheila Shine (Liquid)
July 26, 2007

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---------------------------------------|--|
| VAPOR PRESSURE 10 mm Hg @ 20° C | VAPOR DENSITY (AIR = 1) > 1 |
| SPECIFIC GRAVITY (WATER = 1) 0.964 | EVAPORATION RATE (n-Butyl Acetate = 1) < 1 |
| SOLUBILITY IN WATER Negligible | FREEZING POINT Not determined |
| pH Not applicable | APPEARANCE AND ODOR Clear liquid, wintergreen odor |
| BOILING POINT 234° F (112° C) | PHYSICAL STATE Liquid |
| VISCOSITY Like that of water | VOLATILE ORGANIC COMPOUNDS (Total VOC's) 8.03 pounds / gallon (957 grams / liter) |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|-------------------------------------|---|
| STABILITY UNSTABLE: STABLE: X | CONDITIONS TO AVOID: Extreme temperatures, open flames. |
|-------------------------------------|---|

INCOMPATIBILITY (MATERIALS TO AVOID): Strong oxidizers, strong acids.

HAZARDOUS DECOMPOSITION OR BYPRODUCTS: Decomposition will not occur if handled and stored properly. In case of a fire, oxides of carbon, hydrocarbons, fumes or vapors, and smoke may be produced.

| | |
|---|---------------------------|
| HAZARDOUS POLYMERIZATION MAY OCCUR: WILL NOT OCCUR: X | CONDITIONS TO AVOID: None |
|---|---------------------------|

SECTION 11 - TOXICOLOGICAL INFORMATION

| Hazardous Ingredients | CAS # | EINECS # | LD50 of Ingredient (Specify Species and Route) | LC50 of Ingredient (Specify Species) |
|---|------------|-----------|---|---|
| Perchloroethylene (a,b,c,d,e,f,g) | 127-18-4 | 204-825-9 | 2629 mg / kg Oral - rat | 34,200 mg / m3 Inhalation - rat |
| Severely solvent refined light paraffinic petroleum oil | 64741-89-5 | 265-091-3 | > 5 gm / kg Oral - rat | Not established |
| Xylene (mixed) (a,b,c) | 1330-20-7 | 215-535-7 | 4300 mg / kg Oral - rat | 5000 ppm / 4H Inhalation - rat |
| Heavy paraffinic petroleum oil (h) | 64741-88-4 | 265-090-8 | > 5000 mg / kg Oral - rat | > 3.9 mg / liter Inhalation - rat |
| Ethylbenzene (a,c,d) | 100-41-4 | 202-849-4 | 3500 mg / kg Oral - rat | 4000 ppm/4H(LCLo) Inhalation - rat |
| Methyl salicylate | 119-36-8 | 204-317-7 | 887 mg / kg Oral - rat | Not established |

SECTION 12 - ECOLOGICAL INFORMATION

No data are available on the adverse effects of this material on the environment. Neither COD nor BOD data are available. Based on the chemical composition of this product it is assumed that the mixture can be treated in an acclimatized biological waste treatment plant system in limited quantities. However, such treatment should be evaluated and approved for each specific biological system. One of the ingredients in this mixture (perchloroethylene) is classified as a Marine Pollutant.

SECTION 13 - DISPOSAL CONSIDERATIONS

WASTE DISPOSAL METHOD: Dispose of in accordance with local, state, and federal regulations. This product may produce hazardous vapors in a closed disposal container creating a dangerous environment. Refer to 40 CFR 260 - 299 for complete waste disposal regulations. Consult your local, state, or federal agency before disposing of any chemicals. Do not flush to sanitary sewer or waterway.

SECTION 14 - TRANSPORT INFORMATION

| | |
|---|---|
| PROPER SHIPPING NAME: Flammable liquids, toxic, n.o.s. (Petroleum distillates, Perchloroethylene) | |
| DOT HAZARD CLASS / Pack Group: 3 (6.1) / III | IATA HAZARD CLASS / Pack Group: 3 (6.1) / III |
| REFERENCE: 49 CFR 173.150, .203, .242 | IMDG HAZARD CLASS: 3 (6.1) / III |
| UN / NA IDENTIFICATION NUMBER: UN 1992 | RID/ADR Dangerous Goods Code: 3 (6.1) / III |
| LABEL: FLAMMABLE, TOXIC | UN TDG Class / Pack Group: 3 (6.1) / III |
| HAZARD SYMBOLS: F, T | Hazard Identification Number (HIN): 36 |

Note: Transportation information provided is for reference only. Customer is urged to consult 49 CFR 100 - 177, IMDG, IATA, EC, United Nations TDG, and WHMIS (Canada) TDG information manuals for detailed regulations and exceptions covering specific container sizes, packaging materials and methods of shipping.

MATERIAL SAFETY DATA SHEET

PRODUCT NAME: Sheila Shine (Liquid)
July 26, 2007

SECTION 15 - REGULATORY INFORMATION

TSCA (Toxic Substance Control Act)

All components of this product are listed on the U.S. Toxic Substances Control Act Chemical Inventory (TSCA Inventory) or are exempted from listing because a Low Volume Exemption has been granted in accordance with 40 CFR 723.50.

SARA TITLE III (Superfund Amendments and Reauthorization Act)

311/312 Hazard Categories
Immediate health, fire hazard

313 Reportable Ingredients:

(a) Indicates a toxic chemical subject to annual reporting requirements of Section 313 of the Emergency Planning and Community Right-To-Know Act of 1986 and of 40 CFR 372.

CERCLA (Comprehensive Response Compensation and Liability Act)

(c) The Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) has notification requirements for releases or spills to the environment of the Reportable Quantity (RQ for this mixture = 400 lbs) or greater amounts, according to 40 CFR 302.

California Prop 65, Safe Drinking Water and Toxic Enforcement Act of 1986

There is a reportable chemical present (perchloroethylene) known to the state of California to cause cancer or reproductive toxicity.

CPR (Canadian Controlled Products Regulations)

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations. WHMIS Classification: B3, D1B, D2A, D2B

IDL (Canadian Ingredient Disclosure List)

Components of this product identified by CAS number and listed on the Canadian Ingredient Disclosure List are shown in Section 2.

DSL / NDSL (Canadian Domestic Substances List / Non-Domestic Substances List)

Components of this product identified by CAS number are listed on the DSL or NDSL, or are otherwise in compliance with the New Substances Notification (NSN) regulations. Only ingredients classified as "hazardous" are listed in Section 2 unless otherwise indicated.

EINECS (European Inventory of Existing Commercial Chemical Substances)

Components of this product identified by CAS numbers are on the European Inventory of Existing Commercial Chemical Substances.

EC Risk Phrases

R40 Limited evidence of a carcinogenic effect.
R51/53 Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

SYMBOL(S) REQUIRED FOR LABEL

Harmful Environment Hazard



EC Safety Phrases

S2 Keep out of the reach of children.
S23 Do not breathe vapour.
S36/37 Wear suitable protective clothing and gloves.
S61 Avoid release to the environment. Refer to special instructions / safety data sheets.

SECTION 16 - OTHER INFORMATION

Specific toxicity tests have not been conducted on this product. Our hazard evaluation is based on Information from similar products, the ingredients, technical literature, and/or professional experience.

HMIS HAZARD RATINGS

| | | | |
|-----------------|---|---------------------------|--------------|
| HEALTH | 2 | * = Chronic Health Hazard | 2 = MODERATE |
| FLAMMABILITY | 3 | 0 = INSIGNIFICANT | 3 = HIGH |
| PHYSICAL HAZARD | 0 | 1 = SLIGHT | 4 = EXTREME |

PERSONAL PROTECTIVE EQUIPMENT B Safety Glasses, Gloves

REVISION SUMMARY:

This MSDS has been revised in the following sections: No changes noted

MSDS Prepared by: Comprehensive Data Base, Inc.
P.O. Box 395
Intercession City, FL 33848 USA
(863) 644 - 3298 www.compdatabase.com or www.msds.cc

The information contained herein is believed to be accurate but is not warranted to be so. Data and calculations are based on information furnished by the manufacturer of the product and manufacturers of the components of the product. Users are advised to confirm in advance of need that information is current, applicable and suited to the circumstances of use. Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Furthermore, vendor assumes no responsibility for injury caused by abnormal use of this material, even if reasonable safety procedures are followed. Any questions regarding this product should be directed to the manufacturer of the product described in Section 1.

Material Safety Data Sheet

0816OI, 0826OI Series RD PRO 100% Silicone Sealant – RTV – Acetoxy Cure

MSDS No. 0080A, Rev. 7

Emergency Phone No.
800-535-5053 - INFOTRAC

SECTION 1 – PRODUCT NAME & MANUFACTURER INFORMATION

| | | | |
|--|--|--------------|--|
| PRODUCT NAME | RD PRO 100% Silicone Sealant – Industrial Grade – RTV – Acetoxy Cure | | |
| MANUFACTURER'S NAME & TELEPHONE NUMBER | Red Devil, Inc. | 918-825-5744 | |
| STREET ADDRESS | 4175 Webb Street | | |
| CITY / STATE / ZIP | Pryor, Oklahoma 74361 | | |

SECTION 2 – COMPOSITION / HAZARDOUS INGREDIENTS

| | % | TLV | PEL | UNITS |
|--|------|-----|-----|-------|
| PRODUCT CONSISTS OF: | | | | |
| Ethyltriacetoxysilane (17689-77-9) | < 6% | NE | NE | |
| Methyltriacetoxysilane ** (4253-34-3) | < 6% | 10 | 10 | ppm |
| Titanium Dioxide *** (13463-67-7) (In white & colors only) | < 5% | 10 | 15 | mg/m3 |
| Silica, amorphous *** (7631-86-9) | < 13 | 20 | 20 | mg/m3 |
| Hydroxy-terminated Dimethyl Siloxane (70131-67-8) | > 50 | 10 | 10 | ppm |
| Polydimethylsiloxane (63148-62-9) | < 10 | 10 | 10 | ppm |
| Non-hazardous ingredients* | > 10 | NA | NA | |

*Unlisted ingredients are not considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). **Observe limits for acetic acid formed during curing on exposure to water or humid air. ***Inhalation of particulates unlikely due to product's physical state.
Calculated VOC: < 3%/wt (<30 g/L). CARB Compliance: Yes. Prop 65 Ingredients: None.

SECTION 3 – HAZARDS IDENTIFICATION

| | | | | | |
|---|--|---|---|--|---|
| PRIMARY ROUTE(S) OF ENTRY | <input checked="" type="checkbox"/> Skin Contact | <input checked="" type="checkbox"/> Skin Absorption | <input checked="" type="checkbox"/> Eye Contact | <input checked="" type="checkbox"/> Inhalation | <input checked="" type="checkbox"/> Ingestion |
| EMERGENCY OVERVIEW | Clear/opaque or colored paste. Harmful if swallowed or absorbed through skin. May cause eye & skin irritation. May cause nose, throat & respiratory tract irritation. | | | | |
| EFFECTS OF OVEREXPOSURE | <u>Acute:</u> (Eye) – Direct contact may cause moderate irritation. (Skin) – May cause moderate irritation. (Inhalation) – Slight irritation to respiratory passages. (Oral) – No significant effects expected from a single short-term exposure. <u>Prolonged/Repeated Exposure:</u> No known applicable information. | | | | |
| MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE | None known. | | | | |

SECTION 4 – FIRST AID MEASURES

| | |
|--------------|---|
| SKIN CONTACT | Wash w/ soap & water for @ least 15 minutes. Get medical attention if symptoms persist. Remove & wash contaminated clothing. |
| EYE CONTACT | Immediately flush w/ large quantities of water for @ least 15 minutes until irritation subsides. Get medical attention. |
| INHALATION | No first aid should be needed under normal use. Remove to fresh air if needed. |
| INGESTION | Not intended for ingestion. No first aid should be needed. Get medical attention if irritation persists. Treat according to person's condition & specifics of exposure. |

SECTION 5 – FIRE FIGHTING MEASURES

| | | | |
|-------------------------------------|--|-------------------------------------|----|
| FLAMMABLE | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | | |
| EXTINGUISHING MEDIA | Carbon Dioxide, Dry Chemical, Foam, Water Spray | | |
| FLASHPOINT (°F) & METHOD | > 212F (Closed Cup) | UPPER EXPLOSIVE LIMIT (% BY VOLUME) | NE |
| LOWER EXPLOSIVE LIMIT (% BY VOLUME) | NE | AUTOIGNITION TEMPERATURE (°F) | NE |
| UNUSUAL FIRE & EXPLOSION HAZARDS | None | | |
| SPECIAL FIREFIGHTING PROCEDURES | Wear self-contained breathing apparatus pressure demand (NIOSH approved or equivalent) & full protective gear. Use water spray to cool exposed surfaces. Thermal breakdown of this product during fire or high heat conditions may evolve the following hazardous decomposition products: Silicon dioxide. Carbon oxides & traces of incompletely burned carbon compounds. Formaldehyde. | | |

SECTION 6 – ACCIDENTAL RELEASE MEASURES

| | |
|------------|---|
| PROCEDURES | Wear proper protective equipment (Section 8). Use absorbent material or scrape up dried material & place in approved container. |
|------------|---|

SECTION 7 – HANDLING & STORAGE

| | |
|---------------------------------|--|
| HANDLING PROCEDURES & EQUIPMENT | Keep out of reach of children & pets. Do not take internally. Do not breathe vapors. Use w/ adequate ventilation. Product evolves acetic acid when exposed to water or humid air. Provide ventilation during use to control acetic acid within exposure guidelines or use appropriate respirator. Avoid eye contact. Avoid skin contact. |
| STORAGE REQUIREMENTS | Keep container closed & store away from water or moisture. Avoid extreme heat or cold. Store away from oxidizing materials. When heated to temperatures above 300F in presence of air, product may form formaldehyde vapors. |

SECTION 8 – EXPOSURE CONTROL / PERSONAL PROTECTION

| | |
|-------------------|---|
| RESPIRATORY | No respiratory protection should be needed. As Engineering Controls, Local & General Ventilation is recommended. Provide adequate ventilation to control exposures within guidelines of OSHA PEL: TWA 10 ppm & ACGIH TLV: TWA 10 ppm, STEL 15 ppm. Use respiratory protection if adequate local exhaust ventilation unavailable. OSHA respirator regulations 29 CFR 1910.134 should be followed, using NIOSH/MSHA approved respirators. <u>Spills</u> : Full face respirator. |
| EYEWEAR | Goggles or safety glasses w/ side shields. Avoid eye contact. |
| CLOTHING / GLOVES | Nitrile rubber or butyl rubber gloves. Avoid skin contact. |
| HYGENIC PRACTICES | Remove & wash contaminated clothing before re-use. Wash hands before breaks & @ end of workday. |

SECTION 9 – PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|------------------------|--------------------------|-----------------------|--|
| PHYSICAL STATE | Viscous paste | ODOR & APPEARANCE | Clear or colored paste w/ acetic acid odor |
| SPECIFIC GRAVITY | Approximately 1.0 to 1.1 | VAPOR DENSITY (AIR=1) | NE |
| EVAPORATION RATE | NE | BOILING RANGE (°F) | NE |
| pH | NE | SOLUBILITY IN WATER | NE |
| VAPOR PRESSURE (MM Hg) | NE | %WT VOLATILE (TNV) | NE |

SECTION 10 – STABILITY AND REACTIVITY

| | | |
|---|---|--|
| STABILITY | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Stable under normal conditions. |
| INCOMPATABILITY | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | <u>Materials to Avoid</u> : Water, moisture or humid air can cause hazardous vapors to form (Sec. 8). Oxidizing material can cause a reaction. |
| CONDITIONS TO AVOID | None. | |
| HAZARDOUS POLYMERIZATION/HAZARDOUS DECOMPOSITION PRODUCTS | Hazardous polymerization will not occur under normal conditions. Normal decomposition products, ie: COx, NOx. | |

SECTION 11 – TOXICOLOGICAL INFORMATION / CARCINOGENICITY

| | |
|--|--|
| ACGIH | No known applicable information. This product does not contain carcinogens (@0.1% or greater) as defined by IARC, NTP or OSHA. |
| OSHA | No known applicable information. See above. |
| IARC | No known applicable information. See above. |
| NTP | No known applicable information. See above. |
| DATA WITH POSSIBLE RELEVANCE TO HUMANS | No known applicable information. See above. |

SECTION 12 – ECOLOGICAL INFORMATION

| | | | | |
|------------------|---|--------|---------------|-------|
| AQUATIC TOXICITY | Complete information is not yet available. | | | |
| | <u>Ecotoxicity Classification Criteria:</u> | | | |
| | Hazard Parameters (LC50 or EC50) | High | Medium | Low |
| | Acute Aquatic Toxicity mg/L | <= 1 | >1 & <= 100 | >100 |
| | Acute Terrestrial Toxicity | <= 100 | >100 & <=2000 | >2000 |
| | (Table adapted from "Environmental Toxicology & Risk Assessment", ASTM STP 1179, p. 34, 1993) | | | |
| | (Table can be used to classify the ecotoxicity of this product when ecotoxicity data is listed above. Please read the other information presented in the section concerning the overall ecological safety of this material. | | | |

SECTION 13 – DISPOSAL CONSIDERATIONS

| | |
|---|--|
| WASTE DISPOSAL | Dispose of material in accordance w/ Federal, State & Local regulations. |
| EPA WASTE CODE IF DISCARDED (40CFR Sec.261) | None. <u>RCRA Hazard Class (40 CFR 261)</u> : Not classified as a hazardous waste. State or local laws may impose additional regulatory requirements regarding disposal. |

SECTION 14 – TRANSPORT INFORMATION

| | |
|------------------------------|--|
| SPECIAL SHIPPING INFORMATION | <u>DOT Road Shipment Information (49 CFR 172.101)</u> : Not subject to DOT. <u>Ocean Shipment (IMDG)</u> : Not subject to IMDG code. <u>Air Shipment (IATA)</u> : Not subject to IATA regulations. |
|------------------------------|--|

SECTION 15 – REGULATORY INFORMATION

| | | | |
|-------------------------------|--|-----------------|---|
| CERCLA – SARA HAZARD CATEGORY | Section 304 CERCLA: None. Section 302 (Extremely Hazardous Substances): None. Section 312 (Hazard Class): Acute: Yes. Chronic: No. Fire: No. Pressure: No. Reactive: No. | U.S. STATE REGS | See Section 16. |
| SARA 313 | None present or none present in regulated quantities. | TSCA | All ingredients either on TSCA Inventory or exempt. |

SECTION 16 – OTHER INFORMATION / SPECIAL PRECAUTIONS / LEGEND

Prop 65 Ingredients: (Known to State of California to cause cancer) None. NJ Right-to-Know: (Top 5 Ingredients): Hydroxy-terminated Dimethyl Siloxane (70131-67-8), Silica, amorphous (7631-86-9), Methyltriacetoxysilane (4253-34-3), Ethyltriacetoxysilane (17689-77-9), Polydimethylsiloxane (63148-62-9). Pennsylvania Right-to-Know (Non-Haz @ >3%): Dimethyl siloxane, hydroxy-terminated (70131-67-8). Ingredients Known to State of California to cause birth defects or reproductive harm: None. NFPA Profile: Health: 2, Flammability: 1, Reactivity: 0. HMIS Profile: Health: 1, Flammability: 0, Reactivity: 0, PPE: B. INTERNATIONAL EMERGENCY NUMBER: 352-323-3500 - INFOTRAC

LEGEND: NA – Not Applicable, NE – Not Established, UN – Unavailable, VOC – Volatile Organic Compound, PEL – Permissible Exposure Limit, TLV – Threshold Limit Value, STEL – Short Term Exposure Limit, MSDS – Material Safety Data Sheet, ACGIH – American Conference of Governmental Industrial Hygienists, SARA – Superfund Amendments & Reauthorization Act of 1986, OSHA – Occupational Safety & Health Administration, HMIS – Hazardous Materials Identification System, NTP – National Toxicology Program, CEIL – Ceiling Exposure Limit, CASRN (CAS Number) – Chemical Abstracts Service Registry Number, TSCA – Toxic Substances Control Act, NFPA – National Fire Protection Association.

| | | |
|--------------------------------------|---------------------------------|------------------|
| Reviewed By: <u>Larry G. Brandon</u> | VP Technology & General Manager | January 27, 2014 |
| NAME | TITLE | DATE |

The information contained herein has been developed based upon currently available scientific data. New information may be developed from time to time which may render the conclusions of this report obsolete. Therefore, no warranty is extended as to the applicability of this information to the user's intended purpose or for the consequences of its use or misuse.

SAFETY DATA SHEET

1. Identification

Product identifier Isopropyl Alcohol 99%

Other means of identification

CAS number 67-63-0

Synonyms IPA, Isopropyl Alcohol, Isopropanol.

Recommended use General purpose solvent.

Recommended restrictions Use in accordance with manufacturer's recommendations.

Manufacturer/Importer/Supplier/Distributor information

Company Name Greenfield Global USA Inc.

Address 1101 Isaac Shelby Drive
Shelbyville, KY 40065
USA

Telephone 502.232.7600

Fax 502.633.6100

Company Name Greenfield Global USA Inc.

Address 58 Vale Road
Brookfield, CT 06804
USA

Telephone 203.740.3471

Fax 203.740.3481

Emergency phone number

USA CHEMTREC: 1.800.424.9300 (CCN 17213)

International CHEMTREC: +1.703.527.3887 (CCN 17213)

2. Hazard(s) identification

Physical hazards Flammable liquids Category 2

Health hazards Serious eye damage/eye irritation Category 2A
Specific target organ toxicity, single exposure Category 3 narcotic effects

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Highly flammable liquid and vapor. Causes serious eye irritation. May cause drowsiness or dizziness.

Precautionary statement

Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist/vapors/spray. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/eye protection/face protection.

| | |
|--|---|
| Response | If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. In case of fire: Use appropriate media to extinguish. |
| Storage | Keep cool. Store in a well-ventilated place. Keep container tightly closed. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | None known. |
| Supplemental information | None. |

3. Composition/information on ingredients

Substances

| Chemical name | Common name and synonyms | CAS number | % |
|-------------------|--------------------------|------------|-----|
| Isopropyl alcohol | | 67-63-0 | 100 |

Composition comments All concentrations are in percent by weight unless otherwise indicated.

4. First-aid measures

| | |
|---|---|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a poison center or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Rinse skin with water/shower. Get medical attention if irritation develops and persists. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. Get medical attention if symptoms occur. |
| Most important symptoms/effects, acute and delayed | May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Water fog. Alcohol resistant foam. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. Combustion products may include: carbon oxides. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. Use water spray to keep fire-exposed containers cool. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist/vapors/spray. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
|--|--|

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Take precautionary measures against static discharge. Use only non-sparking tools. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions**7. Handling and storage****Precautions for safe handling**

Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. When using do not smoke. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid contact with eyes. Avoid prolonged exposure. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in tightly closed container. Store in a well-ventilated place. Keep in an area equipped with sprinklers. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

| Material | Type | Value |
|---------------------------------|------|-----------|
| Isopropyl alcohol (CAS 67-63-0) | PEL | 980 mg/m3 |
| | | 400 ppm |

US. ACGIH Threshold Limit Values

| Material | Type | Value |
|---------------------------------|------|---------|
| Isopropyl alcohol (CAS 67-63-0) | STEL | 400 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Material | Type | Value |
|---------------------------------|------|------------|
| Isopropyl alcohol (CAS 67-63-0) | STEL | 1225 mg/m3 |
| | | 500 ppm |
| | TWA | 980 mg/m3 |
| | | 400 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Material | Value | Determinant | Specimen | Sampling Time |
|---------------------------------|---------|-------------|----------|---------------|
| Isopropyl alcohol (CAS 67-63-0) | 40 mg/l | Acetone | Urine | * |

* - For sampling details, please see the source document.

Appropriate engineering controls

Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Chemical goggles are recommended.

| | |
|---------------------------------------|--|
| Skin protection | |
| Hand protection | Nitrile, butyl rubber or neoprene gloves are recommended. Other suitable gloves can be recommended by the glove supplier. Be aware that the liquid may penetrate the gloves. Frequent change is advisable. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. Respirator type: Chemical respirator with organic vapor cartridge. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|---|---|
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Colorless. |
| Odor | Alcohol-like. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | -129.1 °F (-89.5 °C) |
| Initial boiling point and boiling range | 181.4 °F (83 °C) |
| Flash point | 53.6 °F (12.0 °C) Closed Cup |
| Evaporation rate | 3 |
| Flammability (solid, gas) | Not applicable. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 2 % v/v |
| Flammability limit - upper (%) | 12.7 % v/v |
| Vapor pressure | 43.2 hPa (68 °F (20 °C)) |
| Vapor density | 2.1 |
| Relative density | 0.785 g/cm ³ (77 °F (25 °C)) |
| Solubility(ies) | |
| Solubility (water) | completely soluble |
| Partition coefficient (n-octanol/water) | 0.05 |
| Auto-ignition temperature | 750.2 °F (399 °C) |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Heat of combustion (NFPA 30B) | 27.4 kJ/g |
| Molecular formula | C ₃ -H ₈ -O |
| Molecular weight | 60.1 g/mol |
| Oxidizing properties | Not oxidizing. |

10. Stability and reactivity

| | |
|---------------------------|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. Hygroscopic |

| | |
|---|---|
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |
| Conditions to avoid | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Avoid direct light. Contact with incompatible materials. |
| Incompatible materials | Chlorine. Isocyanates. Strong oxidizing agents. Acid anhydrides. Aluminum. Halogenated compounds. Acids. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful. |
| Skin contact | Repeated exposure may cause skin dryness or cracking. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be harmful if swallowed. |

Symptoms related to the physical, chemical and toxicological characteristics May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision.

Information on toxicological effects

Acute toxicity

| Product | Species | Test Results |
|---------------------------------|---------|--------------------|
| Isopropyl alcohol (CAS 67-63-0) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | 12870 mg/kg |
| Inhalation | | |
| <i>Vapor</i> | | |
| LC50 | Rat | 72.6 mg/l, 4 Hours |
| Oral | | |
| LD50 | Rat | 4710 mg/kg |

Skin corrosion/irritation Repeated exposure may cause skin dryness or cracking.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

| | |
|----------------------------------|---|
| Respiratory sensitization | Not a respiratory sensitizer. |
| Skin sensitization | This product is not expected to cause skin sensitization. |

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

NTP Report on Carcinogens

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure May cause drowsiness and dizziness.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Product | | Species | Test Results |
|---------------------------------|------|---------------------|------------------------|
| Isopropyl alcohol (CAS 67-63-0) | | | |
| Aquatic | | | |
| <i>Acute</i> | | | |
| Crustacea | LC50 | Daphnia magna | > 10000 mg/l, 24 hours |
| Fish | LC50 | Pimephales promelas | 9640 mg/l, 96 hours |
| <i>Chronic</i> | | | |
| Crustacea | EC50 | Daphnia magna | > 100 mg/l, 21 days |
| | NOEC | Daphnia magna | 141 mg/l, 16 days |
| | | | 30 mg/l, 21 days |

Persistence and degradability No data is available on the degradability of this substance.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

0.05

Mobility in soil Expected to be mobile in soil.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Incinerate the material under controlled conditions in an approved incinerator. Do not incinerate sealed containers. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1219 |
| UN proper shipping name | Isopropanol |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | IB2, T4, TP1 |
| Packaging exceptions | 4b, 150 |
| Packaging non bulk | 202 |
| Packaging bulk | 242 |

IATA

| | |
|-----------------------------------|-------------|
| UN number | UN1219 |
| UN proper shipping name | Isopropanol |
| Transport hazard class(es) | |
| Class | 3 |

Subsidiary risk -
Packing group II
Environmental hazards No
ERG Code 3L
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1219
UN proper shipping name ISOPROPANOL
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards
Marine pollutant No
EmS F-E, S-D
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Isopropyl alcohol (CAS 67-63-0) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical Yes

Classified hazard categories Flammable (gases, aerosols, liquids, or solids)
 Serious eye damage or eye irritation
 Specific target organ toxicity (single or repeated exposure)

SARA 313 (TRI reporting)

| Chemical name | CAS number | % by wt. |
|-------------------|------------|----------|
| Isopropyl alcohol | 67-63-0 | 100 |

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

FEMA Priority Substances Respiratory Health and Safety in the Flavor Manufacturing Workplace

Isopropyl alcohol (CAS 67-63-0) Low priority

US state regulations

US. Massachusetts RTK - Substance List

Isopropyl alcohol (CAS 67-63-0)

US. New Jersey Worker and Community Right-to-Know Act

Isopropyl alcohol (CAS 67-63-0)

US. Pennsylvania Worker and Community Right-to-Know Law

Isopropyl alcohol (CAS 67-63-0)

US. Rhode Island RTK

Isopropyl alcohol (CAS 67-63-0)

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 2016 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Isopropyl alcohol (CAS 67-63-0)

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| Taiwan | Taiwan Chemical Substance Inventory (TCSI) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 11-June-2018 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

Disclaimer This product is subject to Greenfield Global USA Inc.'s terms and conditions, which can be found at <http://www.greenfield.com/tc-po-us/>. Greenfield cannot anticipate all conditions under which this information and this product, or the products of other manufacturers in combination with this product, may be used. The user is responsible for the proper and safe use, handling, storage and disposal of the product, and assumes liability for any loss, injury, damage or expense arising from any failure to do so. The data in this sheet is based on information and experience available at the time of writing.

1. Identification

Product identifier MAP-Pro™ Premium Hand Torch Fuel

Other means of identification

SDS number WC001

Product code Varies

Recommended use Hand Torch Fuel

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer/Supplier Worthington Cylinder Corporation

Address 300 E. Breed St., Chilton, WI 5301
United States

Contact person Ann Stiefvater

E-mail address Ann.Stiefvater@worthingtonindustries.com

Telephone number 1-920-849-1740

Emergency telephone number 1-703-527-3887 International / CHEMTREC 1-800-424-9300 Domestic

2. Hazard(s) identification

Physical hazards Flammable gases Category 1
Gases under pressure Compressed gas

Health hazards Not classified.

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Extremely flammable gas. Contains gas under pressure; may explode if heated.

Precautionary statement

Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

Response Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so.

Storage Protect from sunlight. Store in a well-ventilated place.

Disposal Dispose of waste and residues in accordance with local authority requirements.

Hazard(s) not otherwise classified (HNOC) May displace oxygen and cause rapid suffocation.

3. Composition/information on ingredients

Substances

| Chemical name | Common name and synonyms | CAS number | % |
|---------------|--------------------------|------------|------------|
| Propylene | | 115-07-1 | 99.5 - 100 |

Impurities

| Chemical name | CAS number | % |
|---------------|------------|---------|
| Propane | 74-98-6 | 0 - 0.5 |

| | |
|---|--|
| Composition comments | All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume. |
| 4. First-aid measures | |
| Inhalation | Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Call a physician or poison control center immediately. |
| Skin contact | Remove contaminated clothing immediately and wash skin with soap and water. Get medical attention if irritation develops and persists. If frostbite occurs, immerse involved area in warm water (between 100 F/38 C and 110 F/43 C, not exceeding 112 F/44 C). Keep immersed for 20 to 40 minutes. Seek medical assistance. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention immediately. |
| Ingestion | Ingestion is not a typical route of exposure for gases or liquefied gases. |
| Most important symptoms/effects, acute and delayed | Exposure to rapidly expanding gas or vaporizing liquid may cause frostbite ("cold burn"). Very high exposure can cause suffocation from lack of oxygen. May cause drowsiness or dizziness. |
| Indication of immediate medical attention and special treatment needed | Exposure may aggravate pre-existing respiratory disorders. Treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |
| 5. Fire-fighting measures | |
| Suitable extinguishing media | Dry chemical, CO ₂ , water spray, fog, or foam. |
| Unsuitable extinguishing media | None known. |
| Specific hazards arising from the chemical | Selection of respiratory protection for firefighting: follow the general fire precautions indicated in the workplace. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire-fighting equipment/instructions | Move container from fire area if it can be done without risk. Do not extinguish fires unless gas flow can be stopped safely; explosive re-ignition may occur. Promptly isolate the scene by removing all persons from the vicinity of the incident. No action shall be taken involving any personal risk or without suitable training. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus. Stop flow of material. Use water to keep fire exposed containers cool and to protect personnel effecting shutoff. If a leak or spill has not ignited, use water spray to disperse the vapors and to protect personnel attempting to stop leak. Prevent runoff from fire control or dilution from entering streams, sewers or drinking water supply. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Extremely flammable gas. |
| 6. Accidental release measures | |
| Personal precautions, protective equipment and emergency procedures | Evacuate the area promptly. No action shall be taken involving any personal risk or without suitable training. Keep unnecessary personnel away. Ensure adequate ventilation. In case of inadequate ventilation, use respiratory protection. Wear appropriate personal protective equipment (See Section 8). |
| Methods and materials for containment and cleaning up | Ventilate well, stop flow of gas or liquid if possible. Immediately contact emergency personnel. For waste disposal, see Section 13 of the SDS. |
| Environmental precautions | Should not be released into the environment. Prevent further leakage or spillage if safe to do so. Prevent from entering into soil, ditches, sanitary sewers, waterways and/or groundwater. |
| 7. Handling and storage | |
| Precautions for safe handling | Eliminate all sources of ignition. Wear appropriate personal protective equipment (See Section 8). Eating, drinking, and smoking should be prohibited in areas where this material is handled, stored, and processed. Do not breathe gas. Do not get in eyes, on skin, on clothing. Use only with adequate ventilation. |
| Conditions for safe storage, including any incompatibilities | Store in accordance with local, regional, national, and international regulations. Secure cylinders in an upright position at all times, close all valves when not in use. Store in a cool, dry, well-ventilated place. Keep container tightly closed and sealed until ready for use. Protect cylinders from damage. |

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Impurities | Type | Value |
|-----------------------|------|------------------------------------|
| Propane (CAS 74-98-6) | PEL | 1800 mg/m ³ 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|--------------------------|------|---------|
| Propylene (CAS 115-07-1) | TWA | 500 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Impurities | Type | Value |
|-----------------------|------|------------------------------------|
| Propane (CAS 74-98-6) | TWA | 1800 mg/m ³ 1000 ppm |

| | |
|--|---|
| Biological limit values | No biological exposure limits noted for the ingredient(s). |
| Exposure guidelines | Follow standard monitoring procedures. |
| Appropriate engineering controls | Provide adequate ventilation. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. |
| Individual protection measures, such as personal protective equipment | |
| Eye/face protection | Wear approved safety glasses or goggles. |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear protective clothing appropriate for the risk of exposure. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. |
| Thermal hazards | Contact with liquefied gas might cause frostbites, in some cases with tissue damage. Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Do not eat, drink or smoke when using the product. Wash thoroughly after handling. Provide eyewash station and safety shower. Handle in accordance with good industrial hygiene and safety practices. |

9. Physical and chemical properties

| | |
|---|---------------------------------------|
| Appearance | Colorless liquefied gas. |
| Physical state | Gas. |
| Form | Compressed liquefied gas. |
| Color | Colorless |
| Odor | Hydrocarbon or mercaptan if odorized. |
| Odor threshold | Not available. |
| pH | Not applicable. |
| Melting point/freezing point | -301 °F (-185 °C) |
| Flash point | -162.0 °F (-107.8 °C) |
| Evaporation rate | Not applicable. |
| Flammability (solid, gas) | Extremely flammable gas. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 2 % |
| Flammability limit - upper (%) | 11 % |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 109.73 PSIG (21°C) |
| Vapor density | 1.5 (0°C) |

| | |
|--|----------------------------|
| Relative density | 0.52 (liquid) |
| Solubility(ies) | |
| Solubility (water) | Slightly soluble in water. |
| Partition coefficient (n-octanol/water) | 1.77 |
| Auto-ignition temperature | 927 °F (497.22 °C) |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| VOC (Weight %) | 100 % |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Stable under normal temperature conditions and recommended use. |
| Possibility of hazardous reactions | Polymerization will not occur. |
| Conditions to avoid | Heat, flames and sparks. |
| Incompatible materials | Strong oxidizing agents. Strong acids. Halogens. |
| Hazardous decomposition products | Carbon oxides. Hydrocarbons. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Ingestion | Not likely, due to the form of the product. |
| Inhalation | High concentrations: Suffocation (asphyxiant) hazard - if allowed to accumulate to concentrations that reduce oxygen below safe breathing levels. Breathing of high concentrations may cause dizziness, light-headedness, headache, nausea and loss of coordination. Continued inhalation may result in unconsciousness. |
| Skin contact | Contact with liquefied gas may cause frostbite. |
| Eye contact | Contact with liquefied gas may cause frostbite. |

Symptoms related to the physical, chemical and toxicological characteristics Exposure to rapidly expanding gas or vaporizing liquid may cause frostbite ("cold burn"). Very high exposure can cause suffocation from lack of oxygen. May cause drowsiness or dizziness.

Information on toxicological effects

Acute toxicity High concentration: Suffocation (asphyxiant) hazard - if allowed to accumulate to concentrations that reduce oxygen below safe breathing levels.

| Components | Species | Test Results |
|---|--|-------------------|
| Propylene (CAS 115-07-1) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Mouse | 680 mg/l, 2 Hours |
| | Rat | 658 mg/l, 4 Hours |
| Skin corrosion/irritation | Contact with liquefied gas might cause frostbites, in some cases with tissue damage. | |
| Serious eye damage/eye irritation | Direct contact with liquefied gas may cause eye damage from frostbite. | |
| Respiratory or skin sensitization | | |
| Respiratory sensitization | Not classified. | |
| Skin sensitization | Not classified. | |
| Germ cell mutagenicity | Not classified. | |
| Carcinogenicity | Not classified. | |
| IARC Monographs. Overall Evaluation of Carcinogenicity | | |
| Propylene (CAS 115-07-1) | 3 Not classifiable as to carcinogenicity to humans. | |
| Reproductive toxicity | Not classified. | |

| | |
|---|---|
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not classified. |
| Chronic effects | May cause central nervous system effects. |

12. Ecological information

| | |
|--|--|
| Ecotoxicity | Not expected to be harmful to aquatic organisms. |
| Persistence and degradability | The product is readily biodegradable. |
| Bioaccumulative potential | The product is not expected to bioaccumulate. |
| Partition coefficient n-octanol / water (log Kow) | |
| Propylene (CAS 115-07-1) | 1.77 |
| Propane (CAS 74-98-6) | 2.36 |
| Mobility in soil | May evaporate quickly. |
| Mobility in general | May evaporate quickly. |
| Other adverse effects | None known. |

13. Disposal considerations

| | |
|--|---|
| Disposal instructions | Use the container until empty. Do not dispose of any non-empty container. Empty containers have residual vapor that is flammable and explosive. Cylinders should be emptied and returned to a hazardous waste collection point. Do not puncture or incinerate even when empty. Dispose in accordance with all applicable regulations. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | D001: Waste Flammable material with a flash point <140 °F |
| Waste from residues / unused products | Dispose of in accordance with local regulations. |
| Contaminated packaging | Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1077 |
| UN proper shipping name | Propylene |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | 19, T50 |
| Packaging exceptions | 306 |
| Packaging non bulk | 304 |
| Packaging bulk | 314, 315 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1077 |
| UN proper shipping name | Propylene |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Environmental hazards | No. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|-----------------------------------|-----------|
| UN number | UN1077 |
| UN proper shipping name | Propylene |
| Transport hazard class(es) | |
| Class | 2.1 |

Subsidiary risk -
Label(s) 2.1
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS F-D, S-U
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
 All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|--------------------------|--------|
| Propane (CAS 74-98-6) | LISTED |
| Propylene (CAS 115-07-1) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
 Delayed Hazard - No
 Fire Hazard - Yes
 Pressure Hazard - Yes
 Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical Yes

SARA 313 (TRI reporting)

| Chemical name | CAS number | % by wt. |
|---------------|------------|------------|
| Propylene | 115-07-1 | 99.5 - 100 |

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Propane (CAS 74-98-6)
 Propylene (CAS 115-07-1)

Clean Water Act (CWA) Section 112(r) (40 CFR 68.130) Hazardous substance

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations This product does not contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

US. Massachusetts RTK - Substance List

Propane (CAS 74-98-6)
 Propylene (CAS 115-07-1)

US. New Jersey Worker and Community Right-to-Know Act

Propane (CAS 74-98-6)
 Propylene (CAS 115-07-1)

US. Pennsylvania Worker and Community Right-to-Know Law

Propane (CAS 74-98-6)
 Propylene (CAS 115-07-1)

US. Rhode Island RTK

Propane (CAS 74-98-6)
 Propylene (CAS 115-07-1)

US. California Proposition 65**US - California Proposition 65 - Carcinogens & Reproductive Toxicity (CRT): Listed substance**

Not listed.

International Inventories


| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------------|---|
| Issue date | 07-December-2012 |
| Revision date | 28-April-2014 |
| Version # | 02 |
| Further information | HMIS® is a registered trade and service mark of the NPCA. HMIS Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe * = Chronic hazard. Health: 1. Flammability: 4. Physical hazard: 1. |

NFPA Ratings**Disclaimer**

All information in this Material Safety Data Sheet is believed to be accurate and reliable. However, no guarantee or warranty of any kind is made with regard to the accuracy of information or the suitability of the recommendations contained herein. It is the user's responsibility to assess the safety and toxicity of this product under their own conditions of use and to comply with all applicable laws and regulations.

SAFETY DATA SHEET

SC0739000

Section 1. Identification

Product name : WL™739 Silver Galvanizing Compound Aerosol

Product code : SC0739000

Other means of identification : Not available.

Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : Sprayon Products Group
101 W. Prospect Avenue,
Cleveland, Ohio 44115

Emergency telephone number of the company : US / Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Product Information Telephone Number : US / Canada: (800) 247-3266
Mexico: Not Available

Regulatory Information Telephone Number : US / Canada: (216) 566-2902
Mexico: Not Available

Transportation Emergency Telephone Number : US / Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year


Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 2
TOXIC TO REPRODUCTION - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 1
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown acute toxicity: 24.6% (oral), 25.7% (dermal), 24.6% (inhalation)

GHS label elements

Hazard pictograms :

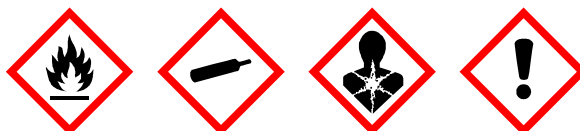

Date of issue/Date of revision : 10/15/2020 **Date of previous issue** : 5/13/2020

SC0739000 WL™739 Silver Galvanizing Compound Aerosol

Version : 25

SHW-85-NA-GHS-US

1/22

427

Section 2. Hazards identification

- Signal word** : Danger
- Hazard statements** : Extremely flammable aerosol. Contains gas under pressure; may explode if heated. May be fatal if swallowed and enters airways. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure.
- Precautionary statements**
- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves, protective clothing and eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.
- Response** : IF exposed or concerned: Get medical advice or attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or doctor. Do NOT induce vomiting. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice or attention.
- Storage** : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Keep container tightly closed.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Supplemental label elements** DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY.
Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.
- CAS number/other identifiers**

| Ingredient name | % by weight | CAS number |
|-------------------------------------|-------------|------------|
| Acetone | ≥10 - ≤25 | 67-64-1 |
| Propane | ≥10 - ≤25 | 74-98-6 |
| Butane | ≥10 - ≤25 | 106-97-8 |
| Lt. Aliphatic Hydrocarbon Solvent | ≤10 | 64742-89-8 |
| Xylene, mixed isomers | ≤8.3 | 1330-20-7 |
| Aluminum | ≤3 | 7429-90-5 |
| Light Aromatic Hydrocarbons | ≤3 | 64742-95-6 |
| Med. Aliphatic Hydrocarbon Solvent | ≤3 | 64742-88-7 |
| trimethylbenzene | ≤1.6 | 25551-13-7 |
| Light Aliphatic Hydrocarbon Solvent | <1 | 64742-49-0 |

Section 3. Composition/information on ingredients

| | | |
|-------------------------------------|------|------------|
| Light Aliphatic Hydrocarbon Solvent | <1 | 68410-97-9 |
| Ethylbenzene | <1 | 100-41-4 |
| 1,2,4-Trimethylbenzene | <1 | 95-63-6 |
| 1,3,5-Trimethylbenzene | <1 | 108-67-8 |
| Heavy Aromatic Naphtha | ≤0.3 | 64742-94-5 |
| Heptane | ≤0.3 | 142-82-5 |
| Cumene | ≤0.3 | 98-82-8 |
| 1,2,3-Trimethylbenzene | ≤0.3 | 526-73-8 |
| Toluene | ≤0.3 | 108-88-3 |
| Light Aliphatic Hydrocarbon | ≤0.3 | 64742-47-8 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

Section 4. First aid measures

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting
reduced fetal weight
increase in fetal deaths
skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
metal oxide/oxides

Section 5. Fire-fighting measures

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

Section 7. Handling and storage

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|--|-------------------------|--|
| Acetone | 67-64-1 | ACGIH TLV (United States, 3/2020). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 250 ppm 10 hours. TWA: 590 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m ³ 8 hours. |
| Propane | 74-98-6 | NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2020). Oxygen Depletion [Asphyxiant]. Explosive potential. NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m ³ 10 hours. ACGIH TLV (United States, 3/2020). Explosive potential. STEL: 1000 ppm 15 minutes. |
| Butane | 106-97-8 | NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m ³ 10 hours. ACGIH TLV (United States, 3/2020). Explosive potential. STEL: 1000 ppm 15 minutes. |
| Lt. Aliphatic Hydrocarbon Solvent Xylene, mixed isomers | 64742-89-8 1330-20-7 | None. ACGIH TLV (United States, 3/2020). TWA: 100 ppm 8 hours. TWA: 434 mg/m ³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m ³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m ³ 8 hours. |
| Aluminum | 7429-90-5 | NIOSH REL (United States, 10/2016). TWA: 5 mg/m ³ 10 hours. Form: Respirable fraction TWA: 10 mg/m ³ 10 hours. Form: Total OSHA PEL (United States, 5/2018). TWA: 5 mg/m ³ , (as Al) 8 hours. Form: Respirable fraction |

Section 8. Exposure controls/personal protection

| | | |
|---|---|--|
| <p>Light Aromatic Hydrocarbons Med. Aliphatic Hydrocarbon Solvent</p> | <p>64742-95-6 64742-88-7</p> | <p>TWA: 15 mg/m³, (as Al) 8 hours. Form: Total dust ACGIH TLV (United States, 3/2020). TWA: 1 mg/m³ 8 hours. Form: Respirable fraction None. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 400 mg/m³ 8 hours.</p> |
| <p>trimethylbenzene</p> | <p>25551-13-7</p> | <p>ACGIH TLV (United States, 3/2020). TWA: 25 ppm 8 hours. TWA: 123 mg/m³ 8 hours.</p> |
| <p>Light Aliphatic Hydrocarbon Solvent Light Aliphatic Hydrocarbon Solvent Ethylbenzene</p> | <p>64742-49-0 68410-97-9 100-41-4</p> | <p>None. None. ACGIH TLV (United States, 3/2020). TWA: 20 ppm 8 hours. NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 435 mg/m³ 10 hours. STEL: 125 ppm 15 minutes. STEL: 545 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
| <p>1,2,4-Trimethylbenzene</p> | <p>95-63-6</p> | <p>ACGIH TLV (United States, 3/2020). TWA: 25 ppm 8 hours. TWA: 123 mg/m³ 8 hours. NIOSH REL (United States, 10/2016). TWA: 25 ppm 10 hours. TWA: 125 mg/m³ 10 hours.</p> |
| <p>1,3,5-Trimethylbenzene</p> | <p>108-67-8</p> | <p>ACGIH TLV (United States, 3/2020). TWA: 25 ppm 8 hours. TWA: 123 mg/m³ 8 hours. NIOSH REL (United States, 10/2016). TWA: 25 ppm 10 hours. TWA: 125 mg/m³ 10 hours.</p> |
| <p>Heavy Aromatic Naphtha Heptane</p> | <p>64742-94-5 142-82-5</p> | <p>None. ACGIH TLV (United States, 3/2020). TWA: 400 ppm 8 hours. TWA: 1640 mg/m³ 8 hours. STEL: 500 ppm 15 minutes. STEL: 2050 mg/m³ 15 minutes. NIOSH REL (United States, 10/2016). TWA: 85 ppm 10 hours. TWA: 350 mg/m³ 10 hours. CEIL: 440 ppm 15 minutes. CEIL: 1800 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 500 ppm 8 hours. TWA: 2000 mg/m³ 8 hours.</p> |
| <p>Cumene</p> | <p>98-82-8</p> | <p>ACGIH TLV (United States, 3/2020). TWA: 50 ppm 8 hours. NIOSH REL (United States, 10/2016). Absorbed through skin. TWA: 50 ppm 10 hours. TWA: 245 mg/m³ 10 hours. OSHA PEL (United States, 5/2018).</p> |

Section 8. Exposure controls/personal protection

| | | |
|-----------------------------|------------|---|
| 1,2,3-Trimethylbenzene | 526-73-8 | <p>Absorbed through skin. TWA: 50 ppm 8 hours. TWA: 245 mg/m³ 8 hours.</p> <p>ACGIH TLV (United States, 3/2020). TWA: 25 ppm 8 hours. TWA: 123 mg/m³ 8 hours.</p> <p>NIOSH REL (United States, 10/2016). TWA: 25 ppm 10 hours. TWA: 125 mg/m³ 10 hours.</p> |
| Toluene | 108-88-3 | <p>OSHA PEL Z2 (United States, 2/2013). TWA: 200 ppm 8 hours. CEIL: 300 ppm AMP: 500 ppm 10 minutes.</p> <p>NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 375 mg/m³ 10 hours. STEL: 150 ppm 15 minutes. STEL: 560 mg/m³ 15 minutes.</p> <p>ACGIH TLV (United States, 3/2020). TWA: 20 ppm 8 hours.</p> |
| Light Aliphatic Hydrocarbon | 64742-47-8 | <p>ACGIH TLV (United States, 3/2020). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapor) 8 hours.</p> |

Occupational exposure limits (Canada)

| Ingredient name | CAS # | Exposure limits |
|-----------------|---------|---|
| acetone | 67-64-1 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1200 mg/m³ 8 hours. 15 min OEL: 1800 mg/m³ 15 minutes. 8 hrs OEL: 500 ppm 8 hours. 15 min OEL: 750 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 1/2020). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes.</p> <p>CA Ontario Provincial (Canada, 6/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 7/2019). TWAEV: 500 ppm 8 hours. TWAEV: 1190 mg/m³ 8 hours. STEV: 1000 ppm 15 minutes. STEV: 2380 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 750 ppm 15 minutes. TWA: 500 ppm 8 hours.</p> |
| Normal propane | 74-98-6 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 7/2019). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours.</p> <p>CA Ontario Provincial (Canada, 6/2019). TWA: 1000 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada,</p> |

Section 8. Exposure controls/personal protection

| | | |
|---|------------|--|
| Butane | 106-97-8 | <p>7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 1/2020). Oxygen Depletion [Asphyxiant]. Explosive potential. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 800 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 1/2020). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |
| Xylene | 1330-20-7 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 651 mg/m³ 15 minutes. 15 min OEL: 150 ppm 15 minutes. 8 hrs OEL: 434 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes. CA Quebec Provincial (Canada, 7/2019). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 651 mg/m³ 15 minutes. CA Ontario Provincial (Canada, 6/2019). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| Medium aliphatic solvent naphtha (petroleum) C9-C12 | 64742-88-7 | <p>CA Ontario Provincial (Canada, 6/2019). TWA: 525 mg/m³ 8 hours.</p> |
| Trimethylbenzene | 25551-13-7 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 123 mg/m³ 8 hours. 8 hrs OEL: 25 ppm 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 25 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 25 ppm 8 hours. TWAEV: 123 mg/m³ 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 25 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 30 ppm 15 minutes.</p> |

Section 8. Exposure controls/personal protection

| | | |
|--------------|----------|--|
| Ethylbenzene | 100-41-4 | <p>TWA: 25 ppm 8 hours. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 8 hrs OEL: 434 mg/m³ 8 hours. 15 min OEL: 543 mg/m³ 15 minutes. 15 min OEL: 125 ppm 15 minutes. CA British Columbia Provincial (Canada, 1/2020). TWA: 20 ppm 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 20 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 125 ppm 15 minutes. STEV: 543 mg/m³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 125 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| Cumene | 98-82-8 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 50 ppm 8 hours. 8 hrs OEL: 246 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 25 ppm 8 hours. STEL: 75 ppm 15 minutes. CA Ontario Provincial (Canada, 6/2019). TWA: 50 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 50 ppm 8 hours. TWAEV: 246 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 74 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> |
| Toluene | 108-88-3 | <p>CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 50 ppm 8 hours. 8 hrs OEL: 188 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 20 ppm 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 20 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). Absorbed through skin. TWAEV: 50 ppm 8 hours. TWAEV: 188 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). Absorbed through skin. STEL: 60 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> |

[Occupational exposure limits \(Mexico\)](#)

Section 8. Exposure controls/personal protection

| | CAS # | Exposure limits |
|-----------------------|------------|--|
| Acetone | 67-64-1 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. |
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Xylene, mixed isomers | 1330-20-7 | NOM-010-STPS-2014 (Mexico, 4/2016). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. |
| trimethylbenzene | 25551-13-7 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 25 ppm 8 hours. |
| Ethylbenzene | 100-41-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |
| Toluene | 108-88-3 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Section 8. Exposure controls/personal protection

Respiratory protection : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

Physical state : Liquid.
Color : Not available.
Odor : Not available.
Odor threshold : Not available.
pH : 7
Melting point/freezing point : Not available.
Boiling point/boiling range : Not available.
Flash point : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
Evaporation rate : 5.6 (butyl acetate = 1)
Flammability (solid, gas) : Not available.
Lower and upper explosive (flammable) limits : Lower: 0.7%
Upper: 12.8%
Vapor pressure : 101.3 kPa (760 mm Hg) [at 20°C]
Vapor density : 1.55 [Air = 1]
Relative density : 0.88
Solubility : Not available.
Partition coefficient: n-octanol/water : Not available.
Auto-ignition temperature : Not available.
Decomposition temperature : Not available.
Viscosity : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
Molecular weight : Not applicable.
Aerosol product
Type of aerosol : Spray
Heat of combustion : 26.067 kJ/g

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.
Chemical stability : The product is stable.
Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid : Avoid all possible sources of ignition (spark or flame).
Incompatible materials : No specific data.
Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------------------|-----------------------|---------|--------------------------|----------|
| Acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| Butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| Xylene, mixed isomers | LC50 Inhalation Gas. | Rat | 6700 ppm | 4 hours |
| | LD50 Oral | Rat | 4300 mg/kg | - |
| Light Aromatic Hydrocarbons | LD50 Oral | Rat | 8400 mg/kg | - |
| trimethylbenzene | LD50 Oral | Rat | 8970 mg/kg | - |
| Light Aliphatic Hydrocarbon Solvent | LD50 Oral | Rat | 5.17 g/kg | - |
| Ethylbenzene | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |
| 1,2,4-Trimethylbenzene | LC50 Inhalation Vapor | Rat | 18000 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | 5 g/kg | - |
| 1,3,5-Trimethylbenzene | LC50 Inhalation Vapor | Rat | 24000 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | 5000 mg/kg | - |
| Heptane | LC50 Inhalation Gas. | Rat | 48000 ppm | 4 hours |
| | LC50 Inhalation Vapor | Rat | 103 g/m ³ | 4 hours |
| Cumene | LC50 Inhalation Vapor | Rat | 39000 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | 1400 mg/kg | - |
| Toluene | LC50 Inhalation Vapor | Rat | 49 g/m ³ | 4 hours |
| | LD50 Oral | Rat | 636 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-----------------------------|--------------------------|---------|-------|-----------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 ppm | - |
| | Eyes - Mild irritant | Rabbit | - | 10 UI | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 20 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| Xylene, mixed isomers | Skin - Mild irritant | Rabbit | - | 395 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 87 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 5 mg | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 UI | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| Light Aromatic Hydrocarbons | Skin - Moderate irritant | Rabbit | - | 100 % | - |
| trimethylbenzene | Eyes - Mild irritant | Rabbit | - | 24 hours 100 UI | - |
| | Eyes - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| Ethylbenzene | Eyes - Severe irritant | Rabbit | - | 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 15 mg | - |
| 1,3,5-Trimethylbenzene | Eyes - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| Heavy Aromatic Naphtha | Skin - Mild irritant | Rabbit | - | 24 hours 500 UI | - |
| Cumene | Eyes - Mild irritant | Rabbit | - | 24 hours 500 mg | - |

Date of issue/Date of revision

: 10/15/2020

Date of previous issue

: 5/13/2020

Version : 25

13/22

SC0739000

WL™ 739 Silver Galvanizing Compound Aerosol

SHW-85-NA-GHS-US

Section 11. Toxicological information

| | | | | | |
|--------------------------|--------------------------|--------|--------------|--------------|---|
| Toluene | Eyes - Mild irritant | Rabbit | - | mg | - |
| | Skin - Mild irritant | Rabbit | - | 86 mg | - |
| | | | | 24 hours 10 | - |
| | Skin - Moderate irritant | Rabbit | - | mg | - |
| | | | | 24 hours 100 | - |
| | Eyes - Mild irritant | Rabbit | - | 0.5 minutes | - |
| | Eyes - Mild irritant | Rabbit | - | 100 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 870 ug | - |
| | | | 24 hours 2 | - | |
| | | | mg | - | |
| Skin - Mild irritant | Pig | - | 24 hours 250 | - | |
| | | | UI | - | |
| Skin - Mild irritant | Rabbit | - | 435 mg | - | |
| Skin - Moderate irritant | Rabbit | - | 24 hours 20 | - | |
| | | | mg | - | |
| Skin - Moderate irritant | Rabbit | - | 500 mg | - | |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|--|
| Xylene, mixed isomers | - | 3 | - |
| Ethylbenzene | - | 2B | - |
| Cumene | - | 2B | Reasonably anticipated to be a human carcinogen. |
| Toluene | - | 3 | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|-----------------------------------|------------|-------------------|------------------------------|
| Acetone | Category 3 | - | Respiratory tract irritation |
| Propane | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Butane | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Lt. Aliphatic Hydrocarbon Solvent | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Xylene, mixed isomers | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Light Aromatic Hydrocarbons | Category 3 | - | Respiratory tract |

Section 11. Toxicological information

| | | | |
|-------------------------------------|--------------------------|---|--|
| Med. Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | - | irritation Narcotic effects Respiratory tract irritation |
| Light Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| Light Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| Ethylbenzene | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| 1,2,4-Trimethylbenzene | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| 1,3,5-Trimethylbenzene | Category 3 | - | Respiratory tract irritation |
| Heavy Aromatic Naphtha Heptane | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| Cumene | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| 1,2,3-Trimethylbenzene | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| Toluene | Category 3 | - | Respiratory tract irritation |
| | Category 3 | | Narcotic effects |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|-------------------------------------|------------|-------------------|---------------|
| Acetone | Category 2 | - | - |
| Propane | Category 2 | - | - |
| Butane | Category 2 | - | - |
| Lt. Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Xylene, mixed isomers | Category 2 | - | - |
| Light Aromatic Hydrocarbons | Category 2 | - | - |
| Med. Aliphatic Hydrocarbon Solvent | Category 1 | - | - |
| Light Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Light Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Ethylbenzene | Category 2 | - | - |
| Heptane | Category 2 | - | - |
| Cumene | Category 2 | - | - |
| Toluene | Category 2 | - | - |

Aspiration hazard

| Name | Result |
|-------------------------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Lt. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Xylene, mixed isomers | ASPIRATION HAZARD - Category 1 |
| Light Aromatic Hydrocarbons | ASPIRATION HAZARD - Category 1 |
| Med. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| trimethylbenzene | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |

Section 11. Toxicological information

| | |
|-------------------------------------|--------------------------------|
| Light Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |
| 1,2,4-Trimethylbenzene | ASPIRATION HAZARD - Category 1 |
| 1,3,5-Trimethylbenzene | ASPIRATION HAZARD - Category 1 |
| Heavy Aromatic Naphtha | ASPIRATION HAZARD - Category 1 |
| Heptane | ASPIRATION HAZARD - Category 1 |
| Cumene | ASPIRATION HAZARD - Category 1 |
| 1,2,3-Trimethylbenzene | ASPIRATION HAZARD - Category 1 |
| Toluene | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
 nausea or vomiting
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Long term exposure

Section 11. Toxicological information

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : Causes damage to organs through prolonged or repeated exposure.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : Suspected of damaging the unborn child.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : Suspected of damaging fertility.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|---------------------|----------------|
| Oral | 22849.56 mg/kg |
| Dermal | 15788.04 mg/kg |
| Inhalation (gases) | 97518.39 ppm |
| Inhalation (vapors) | 791.75 mg/l |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-----------------------------------|--------------------------------------|---|----------|
| Acetone | Acute EC50 7200000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 4.42589 ml/L Marine water | Crustaceans - Acartia tonsa - Copepodid | 48 hours |
| | Acute LC50 7460000 µg/l Fresh water | Daphnia - Daphnia cucullata | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| | Chronic NOEC 5 µg/l Marine water | Fish - Gasterosteus aculeatus - Larvae | 42 days |
| Lt. Aliphatic Hydrocarbon Solvent | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| Xylene, mixed isomers | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| Aluminum | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute LC50 38000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 120 µg/l Fresh water | Fish - Oncorhynchus mykiss - Embryo | 96 hours |
| | Chronic NOEC 9 mg/l Fresh water | Aquatic plants - Ceratophyllum demersum | 3 days |
| trimethylbenzene | Acute LC50 5600 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| Ethylbenzene | Acute EC50 4600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 3600 µg/l Fresh water | Algae - Pseudokirchneriella | 96 hours |

Section 12. Ecological information

| | | | |
|-----------------------------|------------------------------------|---|----------|
| 1,2,4-Trimethylbenzene | Acute EC50 6.53 mg/l Marine water | subcapitata Crustaceans - Artemia sp. - Nauplii | 48 hours |
| | Acute EC50 2.93 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| 1,3,5-Trimethylbenzene | Acute LC50 4200 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| | Acute LC50 4910 µg/l Marine water | Crustaceans - Elasmopus pecteniscus - Adult | 48 hours |
| Heptane Cumene | Acute LC50 7720 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute LC50 13000 µg/l Marine water | Crustaceans - Cancer magister - Zoea | 48 hours |
| Toluene | Acute LC50 12520 µg/l Fresh water | Fish - Carassius auratus | 96 hours |
| | Chronic NOEC 400 µg/l Fresh water | Daphnia - Daphnia magna | 21 days |
| Light Aliphatic Hydrocarbon | Acute LC50 375000 µg/l Fresh water | Fish - Oreochromis mossambicus | 96 hours |
| | Acute EC50 2600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| Toluene | Acute EC50 7.4 mg/l Marine water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| | Acute EC50 10.6 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| Toluene | Acute LC50 2700 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| | Acute EC50 12500 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| Toluene | Acute EC50 11600 µg/l Fresh water | Crustaceans - Gammarus pseudolimnaeus - Adult | 48 hours |
| | Acute EC50 6000 µg/l Fresh water | Daphnia - Daphnia magna - Juvenile (Fledgling, Hatchling, Weanling) | 48 hours |
| Light Aliphatic Hydrocarbon | Acute LC50 5500 µg/l Fresh water | Fish - Oncorhynchus kisutch - Fry | 96 hours |
| | Chronic NOEC 1000 µg/l Fresh water | Daphnia - Daphnia magna | 21 days |
| Light Aliphatic Hydrocarbon | Acute LC50 2200 µg/l Fresh water | Fish - Lepomis macrochirus | 4 days |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-----------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| Xylene, mixed isomers | - | - | Readily |
| Light Aromatic Hydrocarbons | - | - | Readily |
| Ethylbenzene | - | - | Readily |
| Toluene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------------------|--------------------|-------------|-----------|
| Lt. Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Xylene, mixed isomers | - | 8.1 to 25.9 | low |
| Light Aromatic Hydrocarbons | - | 10 to 2500 | high |
| Light Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Light Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| 1,2,4-Trimethylbenzene | - | 243 | low |
| 1,3,5-Trimethylbenzene | - | 161 | low |
| Heavy Aromatic Naphtha | - | 99 to 5780 | high |
| Heptane | - | 552 | high |
| Cumene | - | 35.48 | low |
| 1,2,3-Trimethylbenzene | - | 194.98 | low |

Section 12. Ecological information

| | | | |
|---------|---|----|-----|
| Toluene | - | 90 | low |
|---------|---|----|-----|

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. 126 | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. 126 | - ERG No. 126 | - | Emergency schedules F-D, S-U |

Section 14. Transport information

| | | | | | |
|--|---|---|---|---|---|
| | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. |
|--|---|---|---|---|---|

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to IMO instruments : Not available.

Proper shipping name : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

- International lists** :
- Australia inventory (AICS)**: Not determined.
 - China inventory (IECSC)**: Not determined.
 - Japan inventory (ENCS)**: Not determined.
 - Japan inventory (ISHL)**: Not determined.
 - Korea inventory (KECI)**: Not determined.
 - New Zealand Inventory of Chemicals (NZIoC)**: Not determined.
 - Philippines inventory (PICCS)**: Not determined.
 - Taiwan Chemical Substances Inventory (TCSI)**: Not determined.
 - Thailand inventory**: Not determined.
 - Turkey inventory**: Not determined.
 - Vietnam inventory**: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| | | |
|--|---|----------------------------------|
| Date of issue/Date of revision : 10/15/2020 | Date of previous issue : 5/13/2020 | Version : 25 |
| SC0739000 | WL™ 739 Silver Galvanizing Compound Aerosol | 20/22 SHW-85-NA-GHS-US |

Section 16. Other information

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A | Calculation method |
| CARCINOGENICITY - Category 2 | Calculation method |
| TOXIC TO REPRODUCTION - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 1 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Date of printing : 10/15/2020

Date of issue/Date of revision : 10/15/2020

Date of previous issue : 5/13/2020

Version : 25

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- N/A = Not available
- SGG = Segregation Group
- UN = United Nations

Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

LA-CO Industries, Inc.

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

Date of issue: 12/19/2014

Revision date: 06/07/2018

Version: 2.0

SECTION 1: Identification

1.1. Identification

Product form : Mixture
Trade name : VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

1.2. Recommended use and restrictions on use

Use of the substance/mixture : Substance for industrial application.
Restrictions on use : No additional information available

1.3. Supplier

LA-CO Industries, Inc.
1201 Pratt Boulevard
Elk Grove Village, IL. 60007-5746
Phone: (847) 956-7600
Fax: (847) 956-9885
E-mail: customer_service@laco.com



1.4. Emergency telephone number

Emergency number : 24-hour emergency: CHEMTREC- U.S. : 1-800-424-9300 International: +1-703-527-3887

SECTION 2: Hazard(s) identification

2.1. Classification of the substance or mixture

GHS-US classification

Not classified

2.2. GHS Label elements, including precautionary statements

GHS-US labelling

No labelling applicable

2.3. Other hazards which do not result in classification

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

This mixture does not contain any substances to be mentioned according to the criteria of section 3.2 of HazCom 2012

SECTION 4: First-aid measures

4.1. Description of first aid measures

First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).
First-aid measures after inhalation : Assure fresh air breathing.
First-aid measures after skin contact : Wash skin with mild soap and water.
First-aid measures after eye contact : Rinse eyes with water as a precaution.
First-aid measures after ingestion : Call a POISON CENTER/doctor if you feel unwell.

4.2. Most important symptoms and effects (acute and delayed)

Symptoms/effects : Not expected to present a significant hazard under anticipated conditions of normal use.
Symptoms/effects after inhalation : In high concentrations : May cause drowsiness or dizziness.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

4.3. Immediate medical attention and special treatment, if necessary

No special procedures required.

SECTION 5: Fire-fighting measures

5.1. Suitable (and unsuitable) extinguishing media

Suitable extinguishing media : Dry powder. Foam. Water fog.

Unsuitable extinguishing media : None known.

5.2. Specific hazards arising from the chemical

Fire hazard : No particular fire or explosion hazard.

Reactivity : No dangerous reactions known.

5.3. Special protective equipment and precautions for fire-fighters

Firefighting instructions : Do not allow run-off from fire fighting to enter drains or water courses.

Protection during firefighting : Do not enter fire area without proper protective equipment, including respiratory protection. Fire-resistant protective clothing. Wear a self contained breathing apparatus. EN469.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : This product is not hazardous.

6.1.1. For non-emergency personnel

Emergency procedures : Evacuate unnecessary personnel.

6.1.2. For emergency responders

Emergency procedures : No additional risk management measures required.

6.2. Environmental precautions

Contains no substances known to be hazardous to the environment.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Wipe up with absorbent material (for example cloth).

6.4. Reference to other sections

Section 13: disposal information. Section 7: safe handling. Section 8: personal protective equipment.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Does not necessitate any specific/particular technical measures.

Hygiene measures : Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Store in original container.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

No additional information available

8.2. Appropriate engineering controls

Appropriate engineering controls : Ensure good ventilation of the work station.

8.3. Individual protection measures/Personal protective equipment

Personal protective equipment:

Avoid all unnecessary exposure.

Hand protection:

None under normal use.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

Eye protection:

No special eye protection equipment recommended under normal conditions of use

Respiratory protection:

No special respiratory protection equipment is recommended under normal conditions of use with adequate ventilation

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|----------------------|
| Physical state | : Liquid |
| Appearance | : Viscous liquid. |
| Colour | : light yellow-green |
| Odour | : No data available |
| Odour threshold | : No data available |
| pH | : No data available |
| Melting point | : -10 °C |
| Freezing point | : No data available |
| Boiling point | : 105 °C |
| Flash point | : > 107 °C |
| Relative evaporation rate (butylacetate=1) | : No data available |
| Flammability (solid, gas) | : No data available |
| Vapour pressure | : No data available |
| Relative vapour density at 20 °C | : No data available |
| Relative density | : No data available |
| Solubility | : Soluble in water. |
| Log Pow | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |
| Explosive limits | : No data available |
| Explosive properties | : No data available |
| Oxidising properties | : No data available |

9.2. Other information

VOC content : 30 %

SECTION 10: Stability and reactivity

10.1. Reactivity

No dangerous reactions known.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

None known.

10.5. Incompatible materials

Water reactive.

10.6. Hazardous decomposition products

No dangerous decomposition products known.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

SECTION 11: Toxicological information

11.1. Information on toxicological effects

| | |
|-----------------------------------|--|
| Acute toxicity (oral) | : Not classified |
| Acute toxicity (dermal) | : Not classified |
| Acute toxicity (inhalation) | : Not classified |
| Skin corrosion/irritation | : Not classified |
| Serious eye damage/irritation | : Not classified |
| Respiratory or skin sensitisation | : Not classified |
| Germ cell mutagenicity | : Not classified |
| Carcinogenicity | : Not classified |
| Reproductive toxicity | : Not classified |
| STOT-single exposure | : Not classified |
| STOT-repeated exposure | : Not classified |
| Aspiration hazard | : Not classified |
| Viscosity, kinematic | : No data available |
| Likely routes of exposure | : Skin and eye contact. Inhalation. |
| Symptoms/effects | : Not expected to present a significant hazard under anticipated conditions of normal use. |
| Symptoms/effects after inhalation | : In high concentrations : May cause drowsiness or dizziness. |

SECTION 12: Ecological information

12.1. Toxicity

No additional information available

12.2. Persistence and degradability

No additional information available

12.3. Bioaccumulative potential

No additional information available

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

No additional information available

SECTION 13: Disposal considerations

13.1. Disposal methods

Waste disposal recommendations : Dispose in a safe manner in accordance with local/national regulations.

SECTION 14: Transport information

Department of Transportation (DOT)

In accordance with DOT

Not regulated.

Transportation of Dangerous Goods

Not regulated.

Transport by sea

Not regulated.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

Air transport

Not regulated.

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory

15.2. International regulations

CANADA

No additional information available

EU-Regulations

No additional information available

National regulations

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

All components are listed on the EEC inventory European Inventory of Existing Commercial Chemical Substances (EINECS).

All ingredients are listed in the Toxic Substances Control Act (TSCA).

All ingredients are listed on the Canadian Domestic Substances List (DSL) or Non-Domestic Substances List (NDSL).

15.3. US State regulations

WARNING: This product can expose you to Diethanolamine, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

| Component | Carcinogenicity | Developmental toxicity | Reproductive toxicity male | Reproductive toxicity female | No significant risk level (NSRL) | Maximum allowable dose level (MADL) |
|--|-----------------|------------------------|----------------------------|------------------------------|----------------------------------|-------------------------------------|
| Diethanolamine(111-42-2) | X | | | | | |
| sodium orthophenylphenoxide (132-27-4) | X | | | | | |
| amides, coco, N,N-bis(hydroxyethyl)(6860 3-42-9) | X | | | | | |

SECTION 16: Other information

Revision date : 06/07/2018

Data sources : Canadian Centre for Occupational Health and Safety. Accessed at: http://www.ccohs.ca/oshanswers/legisl/whmis_classifi.html. European Chemicals Agency (ECHA) Registered Substances list. Accessed at <http://echa.europa.eu/>. Krister Forsberg and S.Z. Mansdorf, "Quick Selection Guide to Chemical Protective Clothing", Fifth Edition. OSHA 29CFR 1910.1200 Hazard Communication Standard. REGULATION (EC) No 1272/2008 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 16 December 2008 on classification, labelling and packaging of substances and mixtures, amending and repealing Directives 67/548/EEC and 1999/45/EC, and amending Regulation (EC) No 1907/2006. TSCA Chemical Substance Inventory. Accessed at <http://www.epa.gov/oppt/existingchemicals/pubs/tscainventory/howto.html>. National Fire Protection Association. Fire Protection Guide to Hazardous Materials; 10th edition.

Other information : None.

Abbreviations and acronyms:


VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

| | |
|--|---|
| | ACGIH (American Conference of Government Industrial Hygienists) |
| | ATE: Acute Toxicity Estimate |
| | CAS (Chemical Abstracts Service) number |
| | CLP: Classification, Labelling, Packaging. |
| | EC50: Environmental Concentration associated with a response by 50% of the test population. |
| | GHS: Globally Harmonized System (of Classification and Labeling of Chemicals). |
| | LD50: Lethal Dose for 50% of the test population |
| | OSHA: Occupational Safety & Health Administration |
| | PBT: Persistent, Bioaccumulative, Toxic |
| | PNEC: Predicted No Effect Level |
| | STEL: Short Term Exposure Limits |
| | TSCA: Toxic Substances Control Act |
| | TWA: Time Weighted Average |

- NFPA health hazard : 1 - Materials that, under emergency conditions, can cause significant irritation.
- NFPA fire hazard : 1 - Materials that must be preheated before ignition can occur.
- NFPA reactivity : 0 - Normally stable, even under fire exposure conditions, and not reactive with water.



Indication of changes:
General information.

SDS Prepared by: The Redstone Group, LLC
6077 Frantz Rd.
Suite 206
Dublin, OH USA 43016
T 614-923-7472
www.redstonegrp.com

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product

SAFETY DATA SHEET

1. Identification

| | | |
|---|--|--|
| Product identifier | MAP-Pro™ Premium Hand Torch Fuel | |
| Other means of identification | | |
| SDS number | WC001 | |
| Product code | MAP-Pro™, PRO-Max™ | |
| CAS number | 115-07-1 | |
| Recommended use | Hand Torch Fuel | |
| Recommended restrictions | None known. | |
| Manufacturer/Importer/Supplier/Distributor information | | |
| Manufacturer/Supplier | Worthington Cylinder Corporation | |
| Address | 300 E. Breed St. Chilton, WI 53014 United States | |
| E-mail | SDSRequest@worthingtonindustries.com | |
| Telephone | 1-800-359-9678 | |
| Emergency telephone | CHEMTREC 1-800-424-9300 (USA) 1-703-527-3887 International (CCN 24850) | |

2. Hazard(s) identification

| | | |
|-----------------------------|----------------------|---------------|
| Physical hazards | Flammable gases | Category 1 |
| | Gases under pressure | Liquefied gas |
| Health hazards | Not classified. | |
| OSHA defined hazards | Simple asphyxiant | |
| Label elements | | |



| | | |
|--|---|--|
| Signal word | Danger | |
| Hazard statement | Extremely flammable gas. Contains gas under pressure; may explode if heated. May displace oxygen and cause rapid suffocation. | |
| Precautionary statement | | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Use only with adequate ventilation. | |
| Response | Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so. | |
| Storage | Protect from sunlight. Store in a well-ventilated place. | |
| Disposal | Dispose of waste and residues in accordance with local authority requirements. | |
| Hazard(s) not otherwise classified (HNOC) | Contact with liquefied gas may cause frostbite. | |
| Supplemental information | None. | |

3. Composition/information on ingredients

Substances

| Chemical name | Common name and synonyms | CAS number | % |
|---------------|--------------------------|------------|------------|
| Propylene | | 115-07-1 | 99.5 - 100 |

Impurities

| Chemical name | Common name and synonyms | CAS number | % |
|---------------|--------------------------|------------|---------|
| Propane | | 74-98-6 | 0 - 0.5 |

Composition comments Gas concentrations are in percent by volume.

4. First-aid measures

Inhalation

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory tract irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

Skin contact

Not likely, due to the form of the product. If frostbite occurs, immerse affected area in warm water (not exceeding 105°F/41°C). Keep immersed for 20 to 40 minutes. Get medical attention immediately.

Eye contact

Not likely, due to the form of the product. If frostbite occurs, immediately flush eyes with plenty of warm water (not exceeding 105°F/41°C) for at least 15 minutes. If easy to do, remove contact lenses. Get medical attention promptly if symptoms persist or occur after washing.

Ingestion

This material is a gas under normal atmospheric conditions and ingestion is unlikely.

Most important symptoms/effects, acute and delayed

Exposure to rapidly expanding gas or vaporizing liquid may cause frostbite ("cold burn"). Very high exposure can cause suffocation from lack of oxygen. Symptoms may include loss of mobility/consciousness. Victim may not be aware of asphyxiation. Asphyxiation may bring about unconsciousness without warning and so rapidly that victim may be unable to protect themselves.

Indication of immediate medical attention and special treatment needed

Exposure may aggravate pre-existing respiratory disorders. Provide general supportive measures and treat symptomatically.

General information

First aid personnel must be aware of own risk during rescue. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

5. Fire-fighting measures

Suitable extinguishing media

Dry chemical powder. Carbon dioxide (CO₂). Water fog. Foam.

Unsuitable extinguishing media

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

Extremely flammable gas. May form explosive mixtures with air. Gas may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions

Do not extinguish fires unless gas flow can be stopped safely; explosive re-ignition may occur. Promptly isolate the scene by removing all persons from the vicinity of the incident. No action shall be taken involving any personal risk or without suitable training. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus. Stop flow of material. Use water to keep fire exposed containers cool and to protect personnel effecting shutoff. If a leak or spill has not ignited, use water spray to disperse the vapors and to protect personnel attempting to stop leak. Prevent runoff from fire control or dilution from entering streams, sewers or drinking water supply.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials. Cool containers exposed to flames with water until well after the fire is out.

General fire hazards

Extremely flammable gas. Contents under pressure. Pressurized container may explode when exposed to heat or flame.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Evacuate the area promptly. No action shall be taken involving any personal risk or without suitable training. In the event of a leak evacuate all personnel until ventilation can restore oxygen concentrations to safe levels. Keep unnecessary personnel away. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Wear appropriate personal protective equipment (See Section 8).

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. If possible, turn leaking containers so that gas escapes rather than liquid. Isolate area until gas has dispersed. For waste disposal, see section 13 of the SDS.

Environmental precautions

Should not be released into the environment. Prevent further leakage or spillage if safe to do so.

7. Handling and storage

Precautions for safe handling

Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Do not smoke. All equipment used when handling the product must be grounded. Do not breathe gas. Avoid prolonged exposure. Do not enter storage areas or confined spaces unless adequately ventilated. Use only outdoors or in a well-ventilated area. Oxygen concentration should not fall below 19.5 % at sea level (pO₂ = 135 mmHg). Mechanical ventilation or local exhaust ventilation may be required. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Do not store, incinerate, or heat this material above 120 degrees Fahrenheit. Keep away from heat, sparks and open flame. This material can accumulate static charge which may cause spark and become an ignition source. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Protect cylinders from damage. Stored containers should be periodically checked for general condition and leakage. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Impurities | Type | Value |
|-----------------------|------|------------------------------------|
| Propane (CAS 74-98-6) | PEL | 1800 mg/m ³ 1000 ppm |

US. ACGIH Threshold Limit Values

| Material | Type | Value |
|--------------------------|------|---------|
| Propylene (CAS 115-07-1) | TWA | 500 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Impurities | Type | Value |
|-----------------------|------|------------------------------------|
| Propane (CAS 74-98-6) | TWA | 1800 mg/m ³ 1000 ppm |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Exposure guidelines

Follow standard monitoring procedures.

Appropriate engineering controls

Provide adequate ventilation and minimize the risk of inhalation of gas. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear approved safety glasses or goggles. Face shield is recommended.

Skin protection

Hand protection

Wear cold insulating gloves.

Skin protection

Other

Wear protective clothing appropriate for the risk of exposure.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. The type of respiratory protection selected must comply with the requirements set forth in OSHA's Respiratory Protection Standard (29 CFR 1910.134).

WARNING! Air-purifying respirators do not protect workers in oxygen deficient atmospheres.

Thermal hazards

Contact with liquefied gas might cause frostbites, in some cases with tissue damage. Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Do not eat, drink or smoke when using the product. Wash thoroughly after handling. Provide eyewash station and safety shower. Handle in accordance with good industrial hygiene and safety practices.

9. Physical and chemical properties

Appearance

| | |
|----------------|------|
| Physical state | Gas. |
|----------------|------|

| | |
|---|---|
| Form | Compressed liquefied gas. |
| Color | Colorless. |
| Odor | Hydrocarbon or mercaptan if odorized. |
| Odor threshold | Not determined. |
| pH | Not applicable. |
| Melting point/freezing point | -301 °F (-185 °C) |
| Initial boiling point and boiling range | -54.4 °F (-48 °C) |
| Boiling point pressure | 101.33 kPa |
| Flash point | -162.0 °F (-107.8 °C) |
| Evaporation rate | Not determined. |
| Flammability (solid, gas) | Extremely flammable gas. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 2 % v/v |
| Flammability limit - upper (%) | 11 % v/v |
| Vapor pressure | 109.73 PSIG |
| Vapor pressure temp. | 69.8 °F (21 °C) |
| Vapor density | 1.5 (gas) (Air=1) (32 °F (0 °C)) |
| Relative density | 0.52 (liquid) (Water=1) (68 °F (20 °C)) |
| Solubility(ies) | |
| Solubility (water) | 384 mg/l - Slightly soluble in water. |
| Partition coefficient (n-octanol/water) | 1.77 |
| Auto-ignition temperature | 927 °F (497.22 °C) |
| Decomposition temperature | Not determined. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Kinematic viscosity | Not determined. |
| Molecular formula | C3-H6 |
| Molecular weight | 42 g/mol |
| Oxidizing properties | Not oxidizing. |
| Particle size | Not applicable. |
| Percent volatile | 100 % |
| Surface tension | 16.7 mN/m (194 °F (90 °C)) |
| VOC | 100 % EPA estimated |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | Reacts violently with strong oxidants, nitrites, inorganic chlorides, chlorites and perchlorates causing fire and explosion hazard. |
| Chemical stability | Stable under normal temperature conditions and recommended use. |
| Possibility of hazardous reactions | Polymerization will not occur. May form explosive mixture with air. This product may react with oxidizing agents. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. Strong acids. Halogens. Nitrates. |
| Hazardous decomposition products | Thermal decomposition of this product can generate carbon monoxide and carbon dioxide. Hydrocarbons. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | High concentrations: Suffocation (asphyxiant) hazard - if allowed to accumulate to concentrations that reduce oxygen below safe breathing levels. Breathing of high concentrations may cause dizziness, light-headedness, headache, nausea and loss of coordination. Continued inhalation may result in unconsciousness. |
| Skin contact | Contact with liquefied gas may cause frostbite. |
| Eye contact | Contact with liquefied gas may cause frostbite. |
| Ingestion | This material is a gas under normal atmospheric conditions and ingestion is unlikely. |

Symptoms related to the physical, chemical and toxicological characteristics

Exposure to rapidly expanding gas or vaporizing liquid may cause frostbite ("cold burn"). Very high exposure can cause suffocation from lack of oxygen. Symptoms may include loss of mobility/consciousness. Victim may not be aware of asphyxiation. Asphyxiation may bring about unconsciousness without warning and so rapidly that victim may be unable to protect themselves.

Information on toxicological effects

Acute toxicity Not expected to be acutely toxic.

Toxicological data

| Impurities | Species | Test Results |
|---|--|---|
| Propane (CAS 74-98-6) | | |
| Acute | | |
| Inhalation | | |
| Gas | | |
| LC50 | Rat | > 80000 ppm, 15 Minutes |
| Skin corrosion/irritation | Not classified. | |
| Serious eye damage/eye irritation | Not classified. | |
| Respiratory or skin sensitization | | |
| Respiratory sensitization | Not a respiratory sensitizer. | |
| Skin sensitization | This product is not expected to cause skin sensitization. | |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. | |
| Carcinogenicity | Not classifiable as to carcinogenicity to humans. | |
| IARC Monographs. Overall Evaluation of Carcinogenicity | | |
| Propylene (CAS 115-07-1) | | 3 Not classifiable as to carcinogenicity to humans. |
| NTP Report on Carcinogens | | |
| Not listed. | | |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053) | | |
| Not listed. | | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. | |
| Specific target organ toxicity - single exposure | Not classified. | |
| Specific target organ toxicity - repeated exposure | Not classified. | |
| Aspiration hazard | Not relevant, due to the form of the product. | |
| Chronic effects | Exposure over a long period of time may cause central nervous system effects. | |

12. Ecological information

| | |
|--|---|
| Ecotoxicity | The product is not expected to be hazardous to the environment. |
| Persistence and degradability | Not relevant, due to the form of the product. |
| Bioaccumulative potential | Not relevant, due to the form of the product. |
| Partition coefficient n-octanol / water (log Kow) | |
| Propylene (CAS 115-07-1) | 1.77 |
| Mobility in soil | Not relevant, due to the form of the product. |

Other adverse effects The product contains volatile organic compounds which have a photochemical ozone creation potential.

13. Disposal considerations

Disposal instructions Use the container until empty. Do not dispose of any non-empty container. Empty containers have residual vapor that is flammable and explosive. Cylinders should be emptied and returned to a hazardous waste collection point. Do not puncture or incinerate even when empty. Dispose in accordance with all applicable regulations.

Local disposal regulations Dispose of in accordance with local regulations.

Hazardous waste code D001: Waste Flammable material with a flash point <140 °F
The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose in accordance with all applicable regulations.

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport information

DOT

UN number UN1077
UN proper shipping name Propylene
Transport hazard class(es)
Class 2.1
Subsidiary risk -
Label(s) 2.1
Packing group -
Environmental hazards
Marine pollutant No
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions 19, T50
Packaging exceptions 306
Packaging non bulk 304
Packaging bulk 314, 315

IATA

UN number UN1077
UN proper shipping name Propylene
Transport hazard class(es)
Class 2.1
Subsidiary risk -
Label(s) 2.1
Packing group -
Environmental hazards No
ERG Code 10L
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1077
UN proper shipping name PROPYLENE
Transport hazard class(es)
Class 2.1
Subsidiary risk -
Packing group -
Environmental hazards
Marine pollutant No
EmS F-D, S-U
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)Propane (CAS 74-98-6) Listed.
Propylene (CAS 115-07-1) Listed.**SARA 304 Emergency release notification**

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not listed.

Toxic Substances Control Act (TSCA)

This substance is on the TSCA 8(b) inventory and is designated "active".

Superfund Amendments and Reauthorization Act of 1986 (SARA)**SARA 302 Extremely hazardous substance**

Not listed.

SARA 311/312 Hazardous chemical Yes**Classified hazard categories** Flammable (gases, aerosols, liquids, or solids)
Gas under pressure
Simple asphyxiant
Hazard not otherwise classified (HNOC)**SARA 313 (TRI reporting)**

| Chemical name | CAS number | % by wt. |
|---------------|------------|------------|
| Propylene | 115-07-1 | 99.5 - 100 |

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)**Safe Drinking Water Act (SDWA)** Not regulated.**US state regulations****US. Massachusetts RTK - Substance List**Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)**US. New Jersey Worker and Community Right-to-Know Act**Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)**US. Pennsylvania Worker and Community Right-to-Know Law**Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)**US. Rhode Island RTK**Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)**California Proposition 65**California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.**US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))**

Propylene (CAS 115-07-1)

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Industrial Chemicals (AICIS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| Taiwan | Taiwan Chemical Substance Inventory (TCSI) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------|--|
| Issue date | 07-December-2012 |
| Revision date | 10-March-2021 |
| Version # | 04 |
| HMIS® ratings | Health: 2 Flammability: 4 Physical hazard: 3 |

NFPA ratings



Disclaimer

All information in this Safety Data Sheet is believed to be accurate and reliable. However, no guarantee or warranty of any kind is made with regard to the accuracy of information or the suitability of the recommendations contained herein. It is the user's responsibility to assess the safety and toxicity of this product under their own conditions of use and to comply with all applicable laws and regulations.

**BREAK-FREE DIV OF SAN/BAR CORP -- BREAK-FREE LIQUID MACHINIST,
AEROSOL -- 6850-00D002841**

==== Product Identification =====

Product ID: BREAK-FREE LIQUID MACHINIST, AEROSOL

MSDS Date: 06/21/1993

FSC: 6850

NIIN: 00D002841

MSDS Number: CCBKC

=== Responsible Party ===

Company Name: BREAK-FREE DIV OF SAN/BAR CORP

Address: 1035 S LINWOOD AVE

Box: 25020

City: SANTA ANA

State: CA

ZIP: 92799-5020

Country: US

Info Phone Num: 714-953-1900

Emergency Phone Num: 714-953-1900

Preparer's Name: DONALD E. YODER

CAGE: 65983

=== Contractor Identification ===

Company Name: BREAK-FREE INC

Address: 13386 INTERNATIONAL PARKWAY

Box: City: JACKSONVILLE

State: FL

ZIP: 32218

Country: US

Phone: 800-428-0588 / 904-741-5400

CAGE: 65983

==== Composition/Information on Ingredients =====

Ingred Name: PETROLEUM HYDROCARBON

CAS: 64742-47-8

RTECS #: OA5504000

Fraction by Wt: 19.6%

Other REC Limits: NONE RECOMMENDED

Ingred Name: DIETHYLENE GLYCOL MONOBUTYL ETHER ACETATE

CAS: 124-17-4

RTECS #: KJ9275000

Fraction by Wt: 5.1%

Other REC Limits: NONE RECOMMENDED

Ingred Name: CARBON DIOXIDE

CAS: 124-38-9

RTECS #: FF6400000

Fraction by Wt: 2.0%

Other REC Limits: NONE RECOMMENDED

OSHA PEL: 5000 PPM

ACGIH TLV: 5000PPM/30000STEL; 96

Ingred Name: SYNTHETIC & PARAFINIC OILS & OTHER PROPRIETARY INGREDIENTS

Fraction by Wt: 72.3%

Other REC Limits: NONE RECOMMENDED

Ingred Name:INSOLUBLE BARIUM COMPOUNDS
Fraction by Wt: 1.0%
Other REC Limits:NONE RECOMMENDED

=====
Hazards Identification
=====

LD50 LC50 Mixture:LD50 > 500 MG/KG
Routes of Entry: Inhalation:YES Skin:YES Ingestion:YES
Reports of Carcinogenicity:NTP:NO IARC:NO OSHA:NO
Health Hazards Acute and Chronic:INHALATION MAY CAUSE IRRITATION TO NOSE AND THROAT. SOLVENT VAPORS MAY CAUSE CNS EFFECTS, DEATH. MAY CAUSE TRANSIENT EYE IRRITATION. MAY BE ABSORBED THROUGH THE SKIN AND CAUSE SYSTEMIC EFFECTS TO BLO OD, LIVER AND KIDNEYS. MAY CUASE IRRITATION TO DIGESTIVE TRACT. IF INHALED AS LIQUID THROUGH LUNGS, SYSTEMIC EFFECTS.
Explanation of Carcinogenicity:THIS COMPOUND CONTAINS NO INGREDIENTS AT CONCENTRATIONS OF 0.1% OR GREATER THAT ARE CARCINOGENS OR SUSPECT CARCINOGENS.
Effects of Overexposure:NOSE/THROAT IRRITATION, LIGHTHEADEDNESS, DIZZINESS, NAUSEA, UNCONSCIOUSNESS, DEATH, IRREGULAR HEARTBEAT, EYE IRRITATION, BLOOD DAMAGE, KIDNEY DAMAGE, LIVER DAMAGE, GI TRACT IRRITATAION.
Medical Cond Aggravated by Exposure:PRE-EXISTING SKIN, EYE AND RESPIRATORY DISORDERS MAY BE AGGRAVATED BY EXPOSURE TO THIS PRODUCT.

=====
First Aid Measures
=====

First Aid:EYES: FLUSH WITH RUNNING WATER FOR 15 MINUTES WHILE LIFTING EYELIDS. SKIN: FLUSH WITH WATER. REMOVE CONTAMINATED CLOTHING. INHALATION: REMOVE VICTIM TO FRESH AIR. GIVE OXYGEN OR ARTIFICIAL RESPIRATION AS REQUIRED. GET MEDICAL ATTENTION. INGESTION- DO NOT INDUCE VOMITING. SEEK MEDICAL ATTENTION.

=====
Fire Fighting Measures
=====

Flash Point:NONFLAMMABLE
Lower Limits:NOT GIVEN
Upper Limits:NOT GIVEN
Extinguishing Media:CARBON DIOXIDE, FOAM, DRY CHEMICAL, WATER SPRAY.
Fire Fighting Procedures:USE NORMAL PROCEDURES FOR OIL. WATER AND FOAM MAY CAUSE FROTHING. WEAR NIOSH-APPROVED SELF- CONTAINED BREATHING APPARATUS.
Unusual Fire/Explosion Hazard:SOLVENT VAPORS, WHEN CONCENTRATED IN CONFINED OR POORLY VENTILATED AREAS, MAY FLASH UPON CONTACT WITH FLAMES, SPARKS OR HIGH INTENSITY HEAT SOURCES.

=====
Accidental Release Measures
=====

Spill Release Procedures:WIPE UP SMALL SPILLS OR USE ABSORBENT MATERIAL TO SOAK UP. STORE IN CLOSED CONTAINERS. DO NOT FLUSH TO SEWER. LARGE SPILLS: VENTILATE IF NEEDED. USE PROPER PROTECTIVE EQUIPMENT. DIKE AREA AND USE A GO OD ABSORBENT TO SOAK UP SPILL.
Neutralizing Agent:NONE SPECIFIED BY MANUFACTURER.

=====
Handling and Storage
=====

Handling and Storage Precautions:DO NOT SORE ABOVE 120F. DO NOT USE AROUND OPEN FLAMES. MAINTAIN ADEQUATE VENTILATION AND KEEP FROM CHILDREN.

Other Precautions:VAPOR IS FLAMMABLE AND HEAVIER THAN AIR AND MAY TRAVEL TO SOURCE OF IGNITION AND FLASHBACK. USE WATER TO KEEP FIRE EXPOSED CONTAINERS COOL TO REDUCE PRESSURE.

===== Exposure Controls/Personal Protection =====

Respiratory Protection:NONE NORMALLY REQUIRED. FOR EMERGENCIES OR FOR WORKING IN CONFINED AREAS WITH LOW AIR EXCHANGE RATES, FOLLOW OSHA STD. 29CFR 1910.133.

Ventilation:GENERAL DILUTION OR LOCAL EXHAUST SUFFICIENT TO MAINTAIN ADEQUATE AIR EXCHANGE TO AVOID VAPOR BUILD-UP.V'S.

Protective Gloves:POLYETHYLENE, NEOPRENE OR PVC.

Eye Protection:AS NEEDED.

Other Protective Equipment:AN EMERGENCY EYEWASH AND SHOWER SHOULD BE AVAILABLE.

Work Hygienic Practices:DO NOT SMOKE, EAT OR DRINK WHILE USING TH EPRODUCT. WASH HANDS WITH SOAP AND WATER BEFORE SMOKING, EATING, ETC.

Supplemental Safety and Health

LAUNDER CONTAMINATED CLOTHING BEFORE RE-USE.

===== Physical/Chemical Properties =====

HCC:V2

Boiling Pt:B.P. Text:NOT GIVEN

Melt/Freeze Pt:M.P/F.P Text:NOT GIVEN

Decomp Temp:Decomp Text:NOT GIVEN

Vapor Pres:90PSIG

Vapor Density:NOT GIVEN

Spec Gravity:0.89

Evaporation Rate & Reference:< 1 (N-BUTYL ACETATE=1)

Solubility in Water:MODERATE (<10%)

Appearance and Odor:LIGHT BROWN CLEAR, OILY LIQUID, NEAR NEUTRAL ODOR

Percent Volatiles by Volume:20 %

===== Stability and Reactivity Data =====

Stability Indicator/Materials to Avoid:YES

STRONG OXIDIZERS.

Stability Condition to Avoid:KEEP FROM OPEN FLAMES.

Hazardous Decomposition Products:OXIDES OF CARBON, SULFUR, NITROGEN AND PTFE POWDER.

===== Disposal Considerations =====

Waste Disposal Methods:DISPOSE IN ACCORDANCE WITH FEDERAL, STATE AND LOCAL REGULATIONS. TREAT THIS TYPE OF WASTE AS WASTE OIL.

INCINERATION IS NORMALLY PREFERRED. NEVER DUMP INTO THE SEWER OR ON THE GROUND OR INTO ANY NAVIG ABLE WATERS, STREAMS, LAKES OR RIVERS.

Disclaimer (provided with this information by the compiling agencies): This information is formulated for use by elements of the Department of Defense. The United States of America in no manner whatsoever,

expressly or implied, warrants this information to be accurate and disclaims all liability for its use. Any person utilizing this document should seek competent professional advice to verify and assume responsibility for the suitability of this information to their particular situation.



PB Penetrating Catalyst

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom2012

Date of issue: 9/24/2019

Revision date: 9/24/2019

Version: 1.0

SECTION 1: Identification

1.1. Identification

Product name : PB Penetrating Catalyst
Product code : 16-PB, 8-PB, 8-PBS, PB-TS, 20-PB, 26-PB, 16-PB-DS

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Penetrant

1.3. Details of the supplier of the safety datasheet

Manufacturer

The Blaster Corporation
8500 Sweet Valley Drive
Valley View, Ohio 44125 - USA
T (216) 901-5800 - F (216) 901-5801
www.blastercorp.com

1.4. Emergency telephone number

Emergency number : ChemTel 800-255-3924

SECTION 2: Hazard(s) identification

2.1. Classification of the substance or mixture

GHS-US classification

Flam. Aerosol 2
Gases under Pressure (Dissolved gas)
Asp. Tox. 1

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US) :



Signal word (GHS-US) : Danger
Hazard statements (GHS-US) : Flammable aerosol. Contains gas under pressure; may explode if heated. May be fatal if swallowed and enters airways.
Precautionary statements (GHS-US) : Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. If swallowed: Immediately call a poison center/doctor. Do NOT induce vomiting. Store locked up. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Dispose of contents/container in accordance with local, regional, national and/or international regulation.

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/information on ingredients

3.1. Substances

Not applicable

PB Penetrating Catalyst

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

3.2. Mixtures

| Name | Product identifier | % |
|---|---------------------|---------|
| Petroleum distillates, hydrotreated light | (CAS No) 64742-47-8 | 50 - 60 |
| Solvent naphtha, petroleum, heavy aromatic | (CAS No) 64742-94-5 | 20 - 30 |
| Distillates, petroleum, hydrotreated heavy naphthenic | (CAS No) 64742-52-5 | 20 - 30 |
| Carbon dioxide | (CAS No) 124-38-9 | 1 - 4 |

SECTION 4: First aid measures

4.1. Description of first aid measures

| | |
|---------------------------------------|--|
| First-aid measures after inhalation | : If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical advice/attention if you feel unwell. |
| First-aid measures after skin contact | : If irritation occurs, flush skin with plenty of water. Get medical attention if irritation persists. Remove affected clothing and wash all exposed skin area with mild soap and water, followed by warm water rinse. |
| First-aid measures after eye contact | : Rinse immediately with plenty of water. Obtain medical attention if pain, blinking or redness persists. Direct contact with the eyes is likely to be irritating. |
| First-aid measures after ingestion | : IF SWALLOWED: immediately call a POISON CENTER or doctor/physician. Do NOT induce vomiting. |

4.2. Most important symptoms and effects, both acute and delayed

| | |
|--------------------------------------|--|
| Symptoms/injuries after inhalation | : May cause respiratory tract irritation. |
| Symptoms/injuries after skin contact | : May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin. |
| Symptoms/injuries after eye contact | : May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with possible redness and swelling. |
| Symptoms/injuries after ingestion | : May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting. |

4.3. Indication of any immediate medical attention and special treatment needed

Symptoms may not appear immediately. In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

SECTION 5: Firefighting measures

5.1. Extinguishing media

| | |
|--------------------------------|---|
| Suitable extinguishing media | : Carbon dioxide, dry chemical, halons or foam. |
| Unsuitable extinguishing media | : Do not use a heavy water stream. |

5.2. Special hazards arising from the substance or mixture

| | |
|------------------|---|
| Fire hazard | : Flammable aerosol. Products of combustion may include, and are not limited to: oxides of carbon and oxides of nitrogen. |
| Explosion hazard | : Heat may build pressure, rupturing closed containers, spreading fire and increasing risk of burns and injuries. |
| Reactivity | : No dangerous reaction known under conditions of normal use. |

5.3. Advice for firefighters

| | |
|--------------------------------|--|
| Firefighting instructions | : DO NOT fight fire when fire reaches explosives. Evacuate area. Exercise caution when fighting any chemical fire. |
| Protection during firefighting | : Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Vapors may be heavier than air and may travel along the ground to a distant ignition source and flash back. Use water spray to keep fire-exposed containers cool. |

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

| | |
|------------------|--|
| General measures | : Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Isolate from fire, if possible, without unnecessary risk. Remove ignition sources. Use special care to avoid static electric charges. |
|------------------|--|

6.1.1. For non-emergency personnel

| | |
|----------------------|-----------------------------------|
| Emergency procedures | : Evacuate unnecessary personnel. |
|----------------------|-----------------------------------|

6.1.2. For emergency responders

| | |
|----------------------|--|
| Protective equipment | : Equip cleanup crew with proper protection. |
|----------------------|--|

PB Penetrating Catalyst

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Emergency procedures : Ventilate area.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

For containment : Eliminate sources of ignition. Contain and/or absorb spill with inert material (e.g. sand, vermiculite), then place in a suitable container. Do not flush to sewer or allow to enter waterways. Use appropriate Personal Protective Equipment (PPE).

Methods for cleaning up : Scoop up material and place in a disposal container. Provide ventilation.

6.4. Reference to other sections

See section 8 for further information on protective clothing and equipment and section 13 for advice on waste disposal.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Do not spray on an open flame or other ignition source. Keep away from sources of ignition - No smoking. Use non-sparking tools. Use explosion-proof equipment. Take precautionary measures against static discharge. Avoid contact with skin and eyes. Do not swallow. Do not breathe gas, fumes, vapour or spray. When using do not eat, drink or smoke. Use only outdoors or in a well-ventilated area. Do not pierce or burn, even after use.

Hygiene measures : Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Proper grounding procedures to avoid static electricity should be followed.

Storage conditions : Keep locked up and out of reach of children. Do not expose to temperatures exceeding 50 °C/ 122 °F. Store away from direct sunlight or other heat sources. Keep in fireproof place.

Storage area : Store in a well-ventilated place.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Petroleum distillates, hydrotreated light (64742-47-8) | | |
|--|-------------------------------------|------------------------|
| Not applicable | | |
| Solvent naphtha, petroleum, heavy aromatic (64742-94-5) | | |
| Not applicable | | |
| Distillates, petroleum, hydrotreated heavy naphthenic (64742-52-5) | | |
| Not applicable | | |
| Carbon dioxide (124-38-9) | | |
| ACGIH | ACGIH TWA (ppm) | 5000 ppm |
| ACGIH | ACGIH STEL (ppm) | 30000 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 9000 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 5000 ppm |

8.2. Exposure controls

Appropriate engineering controls : Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits.

Hand protection : Wear chemically resistant protective gloves.

Eye protection : Safety glasses or goggles are recommended when using product.

Skin and body protection : Wear suitable protective clothing.

Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Environmental exposure controls : Maintain levels below Community environmental protection thresholds.

Other information : Do not eat, smoke or drink where material is handled, processed or stored. Wash hands carefully before eating or smoking. Handle according to established industrial hygiene and safety practices.

PB Penetrating Catalyst

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|----------------------|
| Physical state | : Liquid |
| Appearance | : Clear. Aerosol. |
| Colour | : Orange |
| Odour | : Characteristic |
| Odour threshold | : No data available |
| pH | : No data available |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : 356 °F (180 °C) |
| Flash point | : > 141 °F (> 61 °C) |
| Relative evaporation rate (butylacetate=1) | : No data available |
| Flammability (solid, gas) | : Flammable aerosol. |
| Vapour pressure | : No data available |
| Relative vapour density at 20 °C | : No data available |
| Relative density | : 0.9 |
| Solubility | : No data available |
| Partition coefficient n-octanol/water | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |
| Explosive limits | : No data available |
| Explosive properties | : No data available |
| Oxidising properties | : No data available |

9.2. Other information

| | |
|--------------------|-------------|
| Heat of Combustion | : 45.8 kJ/g |
| Flame Projection | : 0 inches |
| Flashback | : None |

SECTION 10: Stability and reactivity

10.1. Reactivity

No dangerous reaction known under conditions of normal use.

10.2. Chemical stability

Stable under normal storage conditions. Flammable aerosol. Contents under pressure. Container may explode if heated. Do not puncture. Do not burn. Extreme risk of explosion by shock, friction, fire or other sources of ignition.

10.3. Possibility of hazardous reactions

No dangerous reaction known under conditions of normal use.

10.4. Conditions to avoid

Sources of ignition. Heat. Incompatible materials.

10.5. Incompatible materials

Strong oxidizing agents.

10.6. Hazardous decomposition products

May include, and are not limited to: oxides of carbon and oxides of nitrogen.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Not classified.

PB Penetrating Catalyst

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

| PB Penetrating Catalyst | |
|--|---|
| LD50 oral rat | > 2000 mg/kg (Calculated Acute Toxicity Estimate) |
| LD50 dermal rabbit | > 2000 mg/kg (Calculated Acute Toxicity Estimate) |
| LC50 inhalation rat | > 5 mg/l/4h (Calculated Acute Toxicity Estimate) |
| Petroleum distillates, hydrotreated light (64742-47-8) | |
| LD50 oral rat | > 5000 mg/kg |
| LD50 dermal rabbit | > 2000 mg/kg |
| LC50 inhalation rat | > 5.2 mg/l/4h |
| Solvent naphtha, petroleum, heavy aromatic (64742-94-5) | |
| LD50 oral rat | > 5000 mg/kg |
| LD50 dermal rabbit | > 2 ml/kg |
| LC50 inhalation rat | > 590 mg/m ³ (Exposure time: 4 h) |

| | |
|--|--|
| Skin corrosion/irritation | : Notclassified. |
| Serious eye damage/irritation | : Notclassified. |
| Respiratory or skin sensitisation | : Notclassified. |
| Germ cell mutagenicity | : Notclassified. |
| Carcinogenicity | : Notclassified. |
| Reproductive toxicity | : Not classified. |
| Specific target organ toxicity (single exposure) | : Notclassified. |
| Specific target organ toxicity (repeated exposure) | : Not classified. |
| Aspiration hazard | : May be fatal if swallowed and enters airways. |
| Symptoms/injuries after inhalation | : May cause respiratory tract irritation. |
| Symptoms/injuries after skin contact | : May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin. |
| Symptoms/injuries after eye contact | : May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with possible redness and swelling. |
| Symptoms/injuries after ingestion | : May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting. |
| Other information | : Likely routes of exposure: ingestion, inhalation, skin and eye. |

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general : May cause long-term adverse effects in the aquatic environment.

| Petroleum distillates, hydrotreated light (64742-47-8) | |
|---|---|
| LC50 fish 1 | 45 mg/l (Exposure time: 96 h - Species: Pimephales promelas [flow-through]) |
| LC50 fish 2 | 2.2 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [static]) |
| Solvent naphtha, petroleum, heavy aromatic (64742-94-5) | |
| LC50 fish 1 | 19 mg/l (Exposure time: 96 h - Species: Pimephales promelas [static]) |
| EC50 Daphnia 1 | 0.95 mg/l (Exposure time: 48 h - Species: Daphnia magna) |
| LC50 fish 2 | 2.34 mg/l (Exposure time: 96 h - Species: Oncorhynchus mykiss) |
| Distillates, petroleum, hydrotreated heavy naphthenic (64742-52-5) | |
| LC50 fish 1 | > 5000 mg/l (Exposure time: 96 h - Species: Oncorhynchus mykiss) |
| EC50 Daphnia 1 | > 1000 mg/l (Exposure time: 48 h - Species: Daphnia magna) |

12.2. Persistence and degradability

| PB Penetrating Catalyst | |
|--------------------------------|------------------|
| Persistence and degradability | Not established. |

PB Penetrating Catalyst

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

12.3. Bioaccumulative potential

| PB Penetrating Catalyst | |
|---|----------------------|
| Bioaccumulative potential | Not established. |
| Petroleum distillates, hydrotreated light (64742-47-8) | |
| BCF fish 1 | 61 - 159 |
| Solvent naphtha, petroleum, heavy aromatic (64742-94-5) | |
| BCF fish 1 | 61 - 159 |
| Partition coefficient n-octanol/water | 2.9 - 6.1 |
| Carbon dioxide (124-38-9) | |
| BCF fish 1 | (no bioaccumulation) |

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

Effect on the global warming : No known effects from this product.

Other information : Avoid release to the environment.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste disposal recommendations : This material must be disposed of in accordance with all local, state, provincial, and federal regulations. The generation of waste should be avoided or minimized wherever possible.

Additional information : Flammable vapours may accumulate in the container.

SECTION 14: Transport information

DOT, IATA & IMO

UN-No. : UN1950
Proper Shipping Name : AEROSOLS, flammable, limited quantities

Class : 2.1
Hazard labels :



Other information : No supplementary information available.
Special transport precautions : Do not handle until all safety precautions have been read and understood.

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory.

15.2. International regulations

No additional information available

US State regulations

California Proposition 65 - This product contains, or may contain, trace quantities of a substance(s) known to the state of

15.3. California to cause cancer, developmental and/or reproductive harm

PB Penetrating Catalyst

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

| Naphthalene (91-20-3) | | | | |
|---|---|---|---|-----------------------------------|
| U.S. - California - Proposition 65 - Carcinogens List | U.S. - California - Proposition 65 - Developmental Toxicity | U.S. - California - Proposition 65 - Reproductive Toxicity - Female | U.S. - California - Proposition 65 - Reproductive Toxicity - Male | Non-significant risk level (NSRL) |
| Yes | No | No | No | 5.8 µg/day |

| Carbon dioxide (124-38-9) |
|--|
| U.S. - New Jersey - Right to Know Hazardous Substance List U.S. - Pennsylvania - RTK (Right to Know) List |

SECTION 16: Other information

Date of issue : 9/24/2019
 Revision date : 9/24/2019
 Other information : None.

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.



Safety Data Sheet

Issue Date: 30-Dec-2014

Revision Date: N/A

Version 1

1. IDENTIFICATION

Product Identifier

Product Name Coastal SAE 80W-90 Limited Slip Gear Oil

Other means of identification

SDS # WUI-060

Recommended use of the chemical and restrictions on use

Recommended Use Lubricant.

Details of the supplier of the safety data sheet

Supplier Address

Warren Oil Company, LLC
915 E. Jefferson Ave.
West Memphis, AR 72301

Emergency Telephone Number

Company Phone Number 1-800-428-9284
Emergency Telephone (24 hr) CHEMTREC 1-800-424-9300

2. HAZARDS IDENTIFICATION

Appearance Clear amber liquid **Physical State** Liquid **Odor** Petroleum

Classification

This chemical does not meet the hazardous criteria set forth by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200). However, this Safety Data Sheet (SDS) contains valuable information critical to the safe handling and proper use of this product. This SDS should be retained and available for employees and other users of this product.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% |
|--|------------|----------|
| Petroleum distillates, hydrotreated heavy paraffinic | 64742-54-7 | 50-60 |
| Residual oils (petroleum), solvent refined | 64742-01-4 | 10-20 |
| Distillates, petroleum, solvent refined heavy paraffinic | 64741-88-4 | 10-20 |

If Chemical Name/CAS No is "proprietary" and/or Weight-% is listed as a range, the specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. FIRST-AID MEASURES

First Aid Measures

Eye Contact Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

| | |
|---------------------|---|
| Skin Contact | No treatment is necessary under ordinary circumstances. Remove contaminated clothing. Wash contaminated area thoroughly with soap and water. If redness or irritation occurs and persists, seek medical attention. |
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. If breathing is difficult, give oxygen. If not breathing give artificial respiration, preferably mouth-to-mouth. Call a POISON CENTER or doctor/physician. |
| Ingestion | If swallowed, do not induce vomiting. If victim exhibits signs of lung aspiration such as coughing or choking, seek immediate medical attention. |

Most important symptoms and effects

| | |
|-----------------|---|
| Symptoms | Expected to be a minor eye irritant. Repeated or prolonged skin contact may cause dermatitis. |
|-----------------|---|

Indication of any immediate medical attention and special treatment needed

| | |
|---------------------------|------------------------|
| Notes to Physician | Treat symptomatically. |
|---------------------------|------------------------|

5. FIRE-FIGHTING MEASURES**Suitable Extinguishing Media**

Dry chemical. Foam. Carbon dioxide (CO₂).

Unsuitable Extinguishing Media Not determined.

Specific Hazards Arising from the Chemical

Dense smoke may be generated while burning.

Hazardous Combustion Products Carbon monoxide. Carbon dioxide (CO₂). Other oxides.

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Avoid breathing smoke and vapor. Water may be used to cool containers exposed to heat or flame.

6. ACCIDENTAL RELEASE MEASURES**Personal precautions, protective equipment and emergency procedures**

Personal Precautions Use personal protective equipment as required.

Methods and material for containment and cleaning up

Methods for Containment Remove sources of ignition. Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams.

Methods for Clean-Up Take up small spills with absorbent pads. Large spills may be taken up with pump or vacuum.

7. HANDLING AND STORAGE**Precautions for safe handling**

Advice on Safe Handling Handle in accordance with good industrial hygiene and safety practice.

Conditions for safe storage, including any incompatibilities

| | |
|-------------------------------|--|
| Storage Conditions | Keep containers tightly closed in a dry, cool and well-ventilated place. |
| Incompatible Materials | Strong oxidizing agents. |

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines This product, as supplied, does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies

Appropriate engineering controls

Engineering Controls Ensure adequate ventilation, especially in confined areas. Showers. Eyewash stations.

Individual protection measures, such as personal protective equipment

| | |
|---------------------------------|---|
| Eye/Face Protection | Avoid contact with eyes. |
| Skin and Body Protection | Wear suitable protective clothing. |
| Respiratory Protection | Respiratory protection is not required under conditions of normal use. If vapor or mist is generated when the material is heated or handled, use organic vapor respirator with a dust or mist filter. |

General Hygiene Considerations Handle in accordance with good industrial hygiene and safety practice.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | | | |
|-----------------------|--------------------|-----------------------|----------------|
| Physical State | Liquid | Odor | Petroleum |
| Appearance | Clear amber liquid | Odor Threshold | Not determined |
| Color | Clear amber | | |

| Property | Values | Remarks • Method |
|------------------------------|-----------------------|------------------|
| pH | Not determined | |
| Melting Point/Freezing Point | Not determined | |
| Boiling Point/Boiling Range | Not determined | |
| Flash Point | 218.3 °C / 425 °F | ASTM D-92 |
| Evaporation Rate | Not determined | |
| Flammability (Solid, Gas) | Liquid-Not applicable | |
| Upper Flammability Limits | Not established | |
| Lower Flammability Limit | Not established | |
| Vapor Pressure | Not determined | |
| Vapor Density | No data available | |
| Specific Gravity | 0.90 | |
| Water Solubility | insoluble | |
| Solubility in other solvents | Not determined | |
| Partition Coefficient | Not determined | |
| Auto-ignition Temperature | No data available | |
| Decomposition Temperature | Not determined | |
| Kinematic Viscosity | Not determined | |
| Dynamic Viscosity | Not determined | |
| Explosive Properties | Not determined | |
| Oxidizing Properties | Not determined | |

10. STABILITY AND REACTIVITY

Reactivity

Not reactive under normal conditions.

Chemical Stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

None under normal processing.

Conditions to Avoid

Incompatible Materials.

Incompatible Materials

Strong oxidizing agents.

Hazardous Decomposition Products

Carbon monoxide. Carbon dioxide (CO₂). Other oxides.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Product Information

Eye Contact Avoid contact with eyes.

Skin Contact Avoid contact with skin.

Inhalation Do not inhale.

Ingestion Do not ingest.

Component Information

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|--|----------------------|-------------------------|-------------------------|
| Distillates, petroleum, solvent refined heavy paraffinic 64741-88-4 | > 5000 mg/kg (Rat) | > 2000 mg/kg (Rabbit) | = 2.18 mg/L (Rat) 4 h |
| Residual oils (petroleum), solvent refined 64742-01-4 | > 5000 mg/kg (Rat) | > 2000 mg/kg (Rabbit) | = 2.18 mg/L (Rat) 4 h |

Information on physical, chemical and toxicological effects

Symptoms Please see Section 4 of this SDS for symptoms.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Carcinogenicity This product does not contain any carcinogens or potential carcinogens as listed by OSHA, IARC or NTP.

Numerical measures of toxicity

Not determined

12. ECOLOGICAL INFORMATION

Ecotoxicity

The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Component Information

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to microorganisms | Crustacea |
|---|----------------------|--|----------------------------|------------------------------------|
| Petroleum distillates, hydrotreated heavy paraffinic 64742-54-7 | | 5000: 96 h Oncorhynchus mykiss mg/L LC50 | | 1000: 48 h Daphnia magna mg/L EC50 |
| Distillates, petroleum, solvent refined heavy paraffinic 64741-88-4 | | 5000: 96 h Oncorhynchus mykiss mg/L LC50 | | 1000: 48 h Daphnia magna mg/L EC50 |
| Residual oils (petroleum), solvent refined 64742-01-4 | | 5000: 96 h Oncorhynchus mykiss mg/L LC50 | | 1000: 48 h Daphnia magna mg/L EC50 |

Persistence/Degradability

Not determined.

Bioaccumulation

Not determined.

Mobility

Not determined

Other Adverse Effects

Not determined

13. DISPOSAL CONSIDERATIONS

Waste Treatment Methods

Disposal of Wastes

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated Packaging

Disposal should be in accordance with applicable regional, national and local laws and regulations.

14. TRANSPORT INFORMATION

Note

Please see current shipping paper for most up to date shipping information, including exemptions and special circumstances.

DOT

Not regulated

IATA

Not regulated

IMDG

Not regulated

15. REGULATORY INFORMATION

International Inventories

| Chemical Name | TSCA | DSL | NDSL | EINECS | ELINCS | ENCS | IECSC | KECL | PICCS | AICS |
|--|---------|-----|------|---------|--------|---------|-------|---------|-------|------|
| Petroleum distillates, hydrotreated heavy paraffinic | Present | X | | Present | | Present | X | Present | X | X |
| Residual oils (petroleum), solvent refined | Present | X | | Present | | | X | Present | X | X |
| Distillates, petroleum, solvent refined heavy paraffinic | Present | X | | Present | | Present | X | Present | X | X |

Legend:

- TSCA - United States Toxic Substances Control Act Section 8(b) Inventory*
- DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List*
- EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances*
- ENCS - Japan Existing and New Chemical Substances*
- IECSC - China Inventory of Existing Chemical Substances*
- KECL - Korean Existing and Evaluated Chemical Substances*
- PICCS - Philippines Inventory of Chemicals and Chemical Substances*
- AICS - Australian Inventory of Chemical Substances*

US Federal Regulations

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355).

SARA 311/312 Hazard Categories

- Acute Health Hazard** No
- Chronic Health Hazard** No
- Fire Hazard** No
- Sudden Release of Pressure Hazard** No
- Reactive Hazard** No

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

US State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

This product does not contain any substances regulated under applicable state right-to-know regulations

16. OTHER INFORMATION

| | | | | |
|--------------------|-----------------------|---------------------|-------------------------|----------------------------|
| <u>NFPA</u> | Health Hazards | Flammability | Instability | Special Hazards |
| | 0 | 1 | 0 | Not determined |
| <u>HMIS</u> | Health Hazards | Flammability | Physical Hazards | Personal Protection |
| | 1 | 1 | 0 | Not determined |

Issue Date: 29-Oct-2013
 Revision Date: 18-Nov-2014
 Revision Note: New format

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

SAFETY DATA SHEET

K00789007

Section 1. Identification

Product name : RUST TOUGH® Rust Preventive Enamel (Aerosol)
Flat Black

Product code : K00789007

Other means of identification : Not available.

CAS # : Not applicable.

Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Not applicable.

Manufacturer : Krylon Products Group
101 Prospect Avenue NW
Cleveland, OH 44115

Emergency telephone number of the company : (216) 566-2917

Product Information Telephone Number : (800) 247-3266

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SKIN CORROSION/IRRITATION - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
SKIN SENSITIZATION - Category 1
CARCINOGENICITY - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (lungs) - Category 1
ASPIRATION HAZARD - Category 1

Percentage of the mixture consisting of ingredient(s) of unknown oral toxicity: 40.9%
Percentage of the mixture consisting of ingredient(s) of unknown dermal toxicity: 61.4%
Percentage of the mixture consisting of ingredient(s) of unknown inhalation toxicity: 62.5%

GHS label elements

Hazard pictograms :



Date of issue/Date of revision :

8/23/2017

Date of previous issue :

8/3/2017

Version : 6.01

1/18

Section 2. Hazards identification

- Signal word** : Danger
- Hazard statements** : Extremely flammable aerosol.
Contains gas under pressure; may explode if heated.
Causes serious eye irritation.
Causes skin irritation.
May cause an allergic skin reaction.
Suspected of causing cancer.
May be fatal if swallowed and enters airways.
May cause respiratory irritation.
May cause drowsiness or dizziness.
Causes damage to organs through prolonged or repeated exposure. (lungs)

Precautionary statements

- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling. Contaminated work clothing must not be allowed out of the workplace. Pressurized container: Do not pierce or burn, even after use.

- Response** : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting. IF ON SKIN: Wash with plenty of soap and water. Wash contaminated clothing before reuse. If skin irritation or rash occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

- Storage** : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.

- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.

- Supplemental label elements** DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY.
Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.

- Hazards not otherwise classified** : DANGER: Rags, steel wool, other waste soaked with this product, and sanding residue may spontaneously catch fire if improperly discarded. Immediately place rags, steel wool, other waste soaked with this product, and sanding residue in a sealed, water-filled, metal container. Dispose of in accordance with local fire regulations.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.

CAS number/other identifiers

Section 3. Composition/information on ingredients

| Ingredient name | % by weight | CAS number |
|-----------------------------------|-------------|------------|
| Propane | 20.4 | 74-98-6 |
| Acetone | 18.84 | 67-64-1 |
| n-Butyl Acetate | 10.65 | 123-86-4 |
| Talc | 10.4 | 14807-96-6 |
| Butane | 9.6 | 106-97-8 |
| Lt. Aliphatic Hydrocarbon Solvent | 9.44 | 64742-89-8 |
| Xylene | 2.04 | 1330-20-7 |
| Ethyl 3-Ethoxypropionate | 1.7 | 763-69-9 |
| Carbon Black | 0.79 | 1333-86-4 |
| Ethylbenzene | 0.64 | 100-41-4 |
| Unsaturated Fatty Acids | 0.37 | 85711-46-2 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Wash with plenty of soap and water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. In the event of any complaints or symptoms, avoid further exposure. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : Causes skin irritation. May cause an allergic skin reaction.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Date of issue/*Date of revision* : 8/23/2017 *Date of previous issue* : 8/3/2017 *Version* : 6.01 3/18

Section 4. First aid measures

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
phosphorus oxides
metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Date of issue/*Date of revision* : 8/23/2017 *Date of previous issue* : 8/3/2017 *Version* : 6.01 4/18

Section 5. Fire-fighting measures

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Persons with a history of skin sensitization problems should not be employed in any process in which this product is used. Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Date of issue/Date of revision : 8/23/2017 **Date of previous issue** : 8/3/2017 **Version** : 6.01 5/18

Section 7. Handling and storage

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | Exposure limits |
|---|--|
| Propane | <p>NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m³ 10 hours.</p> <p>OSHA PEL (United States, 6/2016). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m³ 8 hours.</p> |
| Acetone | <p>ACGIH TLV (United States, 3/2016). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes.</p> <p>NIOSH REL (United States, 10/2016). TWA: 250 ppm 10 hours. TWA: 590 mg/m³ 10 hours.</p> <p>OSHA PEL (United States, 6/2016). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m³ 8 hours.</p> |
| n-Butyl Acetate | <p>NIOSH REL (United States, 10/2016). TWA: 150 ppm 10 hours. TWA: 710 mg/m³ 10 hours. STEL: 200 ppm 15 minutes. STEL: 950 mg/m³ 15 minutes.</p> <p>OSHA PEL (United States, 6/2016). TWA: 150 ppm 8 hours. TWA: 710 mg/m³ 8 hours.</p> <p>ACGIH TLV (United States, 3/2016). STEL: 150 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> |
| Talc | <p>NIOSH REL (United States, 10/2016). TWA: 2 mg/m³ 10 hours. Form: Respirable fraction</p> <p>ACGIH TLV (United States, 3/2016). TWA: 2 mg/m³ 8 hours. Form: Respirable fraction</p> |
| Butane | <p>NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m³ 10 hours.</p> <p>ACGIH TLV (United States, 3/2016). STEL: 1000 ppm 15 minutes.</p> |
| Lt. Aliphatic Hydrocarbon Solvent Xylene | <p>None.</p> <p>ACGIH TLV (United States, 3/2016). TWA: 100 ppm 8 hours. TWA: 434 mg/m³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m³ 15 minutes.</p> <p>OSHA PEL (United States, 6/2016). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
| Ethyl 3-Ethoxypropionate | None. |

Date of issue/Date of revision

: 8/23/2017

Date of previous issue

: 8/3/2017

Version : 6.01

6/18

Section 8. Exposure controls/personal protection

| | |
|-------------------------|--|
| Carbon Black | <p>NIOSH REL (United States, 10/2016). TWA: 3.5 mg/m³ 10 hours. TWA: 0.1 mg of PAHs/cm³ 10 hours. OSHA PEL (United States, 6/2016). TWA: 3.5 mg/m³ 8 hours. ACGIH TLV (United States, 3/2016). TWA: 3 mg/m³ 8 hours. Form: Inhalable fraction</p> |
| Ethylbenzene | <p>ACGIH TLV (United States, 3/2016). TWA: 20 ppm 8 hours. NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 435 mg/m³ 10 hours. STEL: 125 ppm 15 minutes. STEL: 545 mg/m³ 15 minutes. OSHA PEL (United States, 6/2016). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
| Unsaturated Fatty Acids | None. |

Occupational exposure limits (Canada)

| Ingredient name | Exposure limits |
|-----------------|---|
| Propane | <p>CA Alberta Provincial (Canada, 4/2009). 8 hrs OEL: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 7/2016). TWA: 1000 ppm 8 hours. CA Québec Provincial (Canada, 1/2014). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours. CA Ontario Provincial (Canada, 7/2015). TWA: 1000 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours.</p> |
| Acetone | <p>CA Alberta Provincial (Canada, 4/2009). 8 hrs OEL: 1200 mg/m³ 8 hours. 15 min OEL: 1800 mg/m³ 15 minutes. 8 hrs OEL: 500 ppm 8 hours. 15 min OEL: 750 ppm 15 minutes. CA British Columbia Provincial (Canada, 7/2016). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. CA Ontario Provincial (Canada, 7/2015). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. CA Québec Provincial (Canada, 1/2014). TWAEV: 500 ppm 8 hours. TWAEV: 1190 mg/m³ 8 hours. STEV: 1000 ppm 15 minutes. STEV: 2380 mg/m³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 750 ppm 15 minutes. TWA: 500 ppm 8 hours.</p> |

Section 8. Exposure controls/personal protection

n-Butyl Acetate

CA Alberta Provincial (Canada, 4/2009).
 15 min OEL: 200 ppm 15 minutes.
 15 min OEL: 950 mg/m³ 15 minutes.
 8 hrs OEL: 150 ppm 8 hours.
 8 hrs OEL: 713 mg/m³ 8 hours.

CA British Columbia Provincial (Canada, 7/2016).

TWA: 20 ppm 8 hours.

CA Ontario Provincial (Canada, 7/2015).

TWA: 150 ppm 8 hours.

STEL: 200 ppm 15 minutes.

CA Québec Provincial (Canada, 1/2014).

TWAEV: 150 ppm 8 hours.

TWAEV: 713 mg/m³ 8 hours.

STEV: 200 ppm 15 minutes.

STEV: 950 mg/m³ 15 minutes.

CA Saskatchewan Provincial (Canada, 7/2013).

STEL: 200 ppm 15 minutes.

TWA: 150 ppm 8 hours.

Butane

CA Alberta Provincial (Canada, 4/2009).

8 hrs OEL: 1000 ppm 8 hours.

CA British Columbia Provincial (Canada, 7/2016).

TWA: 600 ppm 8 hours.

STEL: 750 ppm 15 minutes.

CA Québec Provincial (Canada, 1/2014).

TWAEV: 800 ppm 8 hours.

TWAEV: 1900 mg/m³ 8 hours.

CA Ontario Provincial (Canada, 7/2015).

TWA: 800 ppm 8 hours.

CA Saskatchewan Provincial (Canada, 7/2013).

STEL: 1250 ppm 15 minutes.

TWA: 1000 ppm 8 hours.

Xylene

CA Alberta Provincial (Canada, 4/2009).

8 hrs OEL: 100 ppm 8 hours.

15 min OEL: 651 mg/m³ 15 minutes.

15 min OEL: 150 ppm 15 minutes.

8 hrs OEL: 434 mg/m³ 8 hours.

CA British Columbia Provincial (Canada, 7/2016).

TWA: 100 ppm 8 hours.

STEL: 150 ppm 15 minutes.

CA Québec Provincial (Canada, 1/2014).

TWAEV: 100 ppm 8 hours.

TWAEV: 434 mg/m³ 8 hours.

STEV: 150 ppm 15 minutes.

STEV: 651 mg/m³ 15 minutes.

CA Ontario Provincial (Canada, 7/2015).

STEL: 150 ppm 15 minutes.

TWA: 100 ppm 8 hours.

CA Saskatchewan Provincial (Canada, 7/2013).

STEL: 150 ppm 15 minutes.

TWA: 100 ppm 8 hours.

Ethylbenzene

CA Alberta Provincial (Canada, 4/2009).

8 hrs OEL: 100 ppm 8 hours.

Section 8. Exposure controls/personal protection

| | |
|--|---|
| | <p>8 hrs OEL: 434 mg/m³ 8 hours. 15 min OEL: 543 mg/m³ 15 minutes. 15 min OEL: 125 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 7/2016). TWA: 20 ppm 8 hours.</p> <p>CA Ontario Provincial (Canada, 7/2015). TWA: 20 ppm 8 hours.</p> <p>CA Québec Provincial (Canada, 1/2014). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 125 ppm 15 minutes. STEV: 543 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 125 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
|--|---|

Occupational exposure limits (Mexico)

| Ingredient name | Exposure limits |
|-----------------|--|
| Propane | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Acetone | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. |
| n-Butyl Acetate | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 150 ppm 8 hours. STEL: 200 ppm 15 minutes. |
| Butane | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Xylene | NOM-010-STPS-2014 (Mexico, 4/2016). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. |
| Ethylbenzene | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

| | | | | | | |
|---------------------------------------|-------------|-------------------------------|------------|----------------|--------|------|
| Date of issue/Date of revision | : 8/23/2017 | Date of previous issue | : 8/3/2017 | Version | : 6.01 | 9/18 |
|---------------------------------------|-------------|-------------------------------|------------|----------------|--------|------|

Section 8. Exposure controls/personal protection

Skin protection

- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 7
- Melting point** : Not available.
- Boiling point** : Not available.
- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 5.6 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 0.9%
Upper: 12.8%
- Vapor pressure** : 101.3 kPa (760 mm Hg) [at 20°C]
- Vapor density** : 1.55 [Air = 1]
- Relative density** : 0.78
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
- Molecular weight** : Not applicable.
- Aerosol product**
- Type of aerosol** : Spray
- Heat of combustion** : 27.011 kJ/g

Section 10. Stability and reactivity

| | |
|---|--|
| Reactivity | : No specific test data related to reactivity available for this product or its ingredients. |
| Chemical stability | : The product is stable. |
| Possibility of hazardous reactions | : Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | : Avoid all possible sources of ignition (spark or flame). |
| Incompatible materials | : No specific data. |
| Hazardous decomposition products | : Under normal conditions of storage and use, hazardous decomposition products should not be produced. |

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|--|-----------------------|---------|--------------------------|----------|
| Acetone n-Butyl Acetate | LD50 Oral | Rat | 5800 mg/kg | - |
| | LD50 Dermal | Rabbit | >17600 mg/kg | - |
| | LD50 Oral | Rat | 10768 mg/kg | - |
| Butane Xylene | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| | LC50 Inhalation Gas. | Rat | 5000 ppm | 4 hours |
| Ethyl 3-Ethoxypropionate Carbon Black | LD50 Oral | Rat | 4300 mg/kg | - |
| | LD50 Oral | Rat | 3200 mg/kg | - |
| Ethylbenzene | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|--------------------------------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 parts per million | - |
| | Eyes - Mild irritant | Rabbit | - | 10 microliters | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 milligrams | - |
| | Eyes - Severe irritant | Rabbit | - | 20 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 milligrams | - |
| n-Butyl Acetate | Skin - Mild irritant | Rabbit | - | 395 milligrams | - |
| | Eyes - Moderate irritant | Rabbit | - | 100 milligrams | - |
| Talc | Skin - Moderate irritant | Rabbit | - | 24 hours 500 milligrams | - |
| | Skin - Mild irritant | Human | - | 72 hours 300 Micrograms Intermittent | - |
| Xylene | Eyes - Mild irritant | Rabbit | - | 87 milligrams | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 5 milligrams | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 microliters | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 milligrams | - |

Date of issue/Date of revision : 8/23/2017 Date of previous issue : 8/3/2017 Version : 6.01 11/18

Section 11. Toxicological information

| | | | | | |
|--------------------------|--|------------------|--------|--|--------|
| Ethyl 3-Ethoxypropionate | Skin - Moderate irritant Skin - Mild irritant | Rabbit Rabbit | - - | 100 Percent 24 hours 500 milligrams | - - |
| Ethylbenzene | Eyes - Severe irritant Skin - Mild irritant | Rabbit Rabbit | - - | 500 milligrams 24 hours 15 milligrams | - - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Talc | - | 3 | - |
| Xylene | - | 3 | - |
| Carbon Black | - | 2B | - |
| Ethylbenzene | - | 2B | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|-----------------------------------|------------|-------------------|---|
| Propane | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| Acetone | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| n-Butyl Acetate | Category 3 | Not applicable. | Narcotic effects |
| Butane | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| Lt. Aliphatic Hydrocarbon Solvent | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| Xylene | Category 3 | Not applicable. | Respiratory tract irritation |
| Ethylbenzene | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |

Specific target organ toxicity (repeated exposure)

Section 11. Toxicological information

| Name | Category | Route of exposure | Target organs |
|-----------------------------------|------------|-------------------|----------------|
| Propane | Category 2 | Not determined | Not determined |
| Acetone | Category 2 | Not determined | Not determined |
| Talc | Category 1 | Inhalation | lungs |
| Butane | Category 2 | Not determined | Not determined |
| Lt. Aliphatic Hydrocarbon Solvent | Category 2 | Not determined | Not determined |
| Xylene | Category 2 | Not determined | Not determined |
| Ethylbenzene | Category 2 | Not determined | Not determined |

Aspiration hazard

| Name | Result |
|-----------------------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Lt. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Xylene | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : Causes skin irritation. May cause an allergic skin reaction.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Date of issue/*Date of revision* : 8/23/2017 *Date of previous issue* : 8/3/2017 *Version* : 6.01 13/18

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : Causes damage to organs through prolonged or repeated exposure. Once sensitized, a severe allergic reaction may occur when subsequently exposed to very low levels.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|--------------------|---------------|
| Oral | 58769.6 mg/kg |
| Dermal | 20790.8 mg/kg |
| Inhalation (gases) | 91920.4 ppm |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-----------------------------------|-------------------------------------|---|----------|
| Acetone | Acute EC50 7200000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 6000000 µg/l Fresh water | Crustaceans - Gammarus pulex | 48 hours |
| | Acute LC50 6900 mg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| | Chronic NOEC 0.1 mg/l Fresh water | Fish - Fundulus heteroclitus | 4 weeks |
| n-Butyl Acetate | Acute LC50 32 mg/l Marine water | Crustaceans - Artemia salina | 48 hours |
| | Acute LC50 18000 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| Lt. Aliphatic Hydrocarbon Solvent | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| | | | |
| Xylene | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| Ethylbenzene | Acute EC50 4600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 3600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 6530 µg/l Fresh water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| | Acute EC50 2930 µg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| | Acute LC50 4200 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |

Persistence and degradability

Date of issue/Date of revision : 8/23/2017 **Date of previous issue** : 8/3/2017 **Version** : 6.01 14/18

Section 12. Ecological information

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| n-Butyl Acetate | - | - | Readily |
| Xylene | - | - | Readily |
| Ethylbenzene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-----------------------------------|--------------------|-------------|-----------|
| Lt. Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Xylene | - | 8.1 to 25.9 | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|----------------------------|--|--|--|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| | | | | | |

Date of issue/Date of revision : 8/23/2017 Date of previous issue : 8/3/2017 Version : 6.01 15/18

Section 14. Transport information

| | | | | | |
|-------------------------------|-----------------------|---|-----------------------|---|-------------------------------------|
| Additional information | - | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). | - | - | Emergency schedules F-D, S-U |
| | ERG No. 126 | ERG No. 126 | ERG No. 126 | | |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Proper shipping name : Not available.
Ship type : Not available.
Pollution category : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 2 |
| Flammability | | 3 |
| Physical hazards | | 0 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

Section 16. Other information

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| SKIN CORROSION/IRRITATION - Category 2 | Calculation method |
| SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A | Calculation method |
| SKIN SENSITIZATION - Category 1 | Calculation method |
| CARCINOGENICITY - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (lungs) - Category 1 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Date of printing : 8/23/2017

Date of issue/Date of revision : 8/23/2017

Date of previous issue : 8/3/2017

Version : 6.01

Key to abbreviations : ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 UN = United Nations

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by Sherwin-Williams, including but not limited to the incorporation of non Sherwin-Williams products or the use or addition of products in proportions not specified by Sherwin-Williams. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

Date of issue/Date of revision : 8/23/2017 **Date of previous issue** : 8/3/2017 **Version** : 6.01 17/18

Air Tool Lubricant

Date of Previous Version: 2016-23-05

Revision Date: 2017-01-11

SAFETY DATA SHEET

1. IDENTIFICATION

Product identifier

Product name: Air Tool Lubricant

Other means of identification

Product Code(s): ATL004, ATL016, ATL032, ATL128, ATL55, A145-4, A145-16, A145-32, A145-128

Substance/mixture: Mixture

Recommended use of the chemical and restrictions on use

Identified uses: Lubricant, pneumatic tools.

Uses advised against: Do not use for any purpose other than the one for which it is intended

Details of the supplier of the safety data sheet

Supplier Address: Coilhose Pneumatics/Acme Automotive
19 Kimberly Road
East Brunswick, NJ 08816
Phone: +1 800-526-2100

Contact Point: Customer Service

E-mail Address: info@coilhose.com

Emergency telephone number

Company Phone Number: +1 (732) 390-8480 – 8:00AM to 7:00PM EST Monday thru Friday

Emergency telephone: POISON CONTROL: +1 800-222-1222 (24h)

2. HAZARDS IDENTIFICATION

Classification

Aspiration toxicity - Category 1

Label elements



DANGER

May be fatal if swallowed and enters airways

Ingestion: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician Do NOT induce vomiting

Precautionary Statements – Storage: Store locked up

Precautionary Statements – Disposal: Dispose of contents/ container to an approved waste disposal plant

Air Tool Lubricant

Date of Previous Version: 2016-23-05

Revision Date: 2017-01-11

Unknown Acute Toxicity: Not applicable

Hazards not otherwise classified (HNOC): None known

Other information

Physical-Chemical Properties: Contaminated surfaces will be extremely slippery.

Environmental properties: Should not be released into the environment.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS-No | Weight % |
|---|------------|----------|
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | 64742-65-0 | 60-70 |
| Distillates (petroleum), solvent-refined heavy paraffinic | 64741-88-4 | 20-30 |

* The exact percentage (concentration) of composition has been withheld as a trade secret

Additional information: There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

4. FIRST AID MEASURES

First aid measures for different exposure routes

General advice: IN CASE OF SERIOUS OR PERSISTENT CONDITIONS, CALL A DOCTOR OR EMERGENCY MEDICAL CARE.

Eye contact: Rinse thoroughly with plenty of water, also under the eyelids.

Skin contact: Remove contaminated clothing and shoes. Wash skin with soap and water. Wash contaminated clothing before reuse. High pressure jets may cause skin damage. In this case, the casualty should be sent immediately to hospital.

Inhalation: Move to fresh air.

Ingestion: Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Call a physician or Poison Control Center immediately.

Most important symptoms/effects, acute and delayed

Skin contact: Not classified. High pressure injection of the products under the skin may have very serious consequences even though no symptom or injury may be apparent.

Eye contact: Not classified.

Inhalation: Not classified. Inhalation of vapors in high concentration may cause irritation of respiratory system. Aspiration into lungs can produce severe lung damage.

Ingestion: May be fatal if swallowed and enters airways. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea.

Symptoms: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Difficulty breathing. Coughing and/ or wheezing.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician: Treat symptomatically.

Air Tool Lubricant

Date of Previous Version: 2016-23-05

Revision Date: 2017-01-11

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media: Carbon dioxide (CO₂). ABC powder. Foam. Water spray or fog.

Unsuitable Extinguishing Media: None Known.

Specific hazards arising from the chemical: In a fire or if heated, a pressure increase will occur and the container may burst.

Hazardous thermal decomposition products: No specific data.

Sensitivity to Mechanical Impact: None.

Sensitivity to Static Discharge: None.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Evacuate non-essential personnel

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

General Information: Do not touch or walk through spilled material. Contaminated surfaces will be extremely slippery. Use personal protective equipment. Ensure adequate ventilation. Remove all sources of ignition.

Other information See Section 12 for additional information.

Environmental precautions

General Information: Do not allow material to contaminate ground water system. Try to prevent the material from entering drains or water courses. Local authorities should be advised if significant spillages cannot be contained.

Methods and materials for containment and cleaning up

Methods for cleaning up: Dam up. Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13). Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Advice on safe handling: When using, do not eat, drink or smoke. For personal protection see section 8. Use only in well-ventilated areas. Do not breathe vapors or spray mist. Avoid contact with skin, eyes and clothing.

Prevention of fire and explosion: Take precautionary measures against static discharges. Ground/bond containers, tanks and transfer/receiving equipment.

Hygiene measures: Ensure the application of strict rules of hygiene by the personnel exposed to the risk of contact with the product. Regular cleaning of equipment, work area and clothing is recommended. Wash hands before breaks and immediately after handling the product. Do not use abrasives, solvents or fuels. Do not dry hands with rags that have been contaminated with product. Do not put product contaminated rags into workwear pockets.

Air Tool Lubricant

Date of Previous Version: 2016-23-05

Revision Date: 2017-01-11

Conditions for safe storage, including any incompatibilities

Technical measures/Storage conditions: Keep away from food, drink and animal feeding stuffs. Keep in a bounded area. Keep container tightly closed. Keep preferably in the original container. Otherwise reproduce all indication of the regulation label on the new container. Do not remove the hazard labels of the containers (even if they are empty). Design the installations in order to avoid accidental emissions of product (due to seal breakage, for example) onto hot casings or electrical contacts. Protect from frost, heat and sunlight. Protect from moisture.

Materials to Avoid: Strong oxidizing agents.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

| Chemical Name | CAS-No | ACGIH | OSHA | Mexico |
|---|------------|---|-----------------------------------|---|
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | 64742-65-0 | TWA: 5 mg/m ³ 8 hours. Form: Inhalable fraction | TWA: 5 mg/m ³ 8 hours. | LMPE-PPT: 5 mg/m ³ 8 hours. Form: mist LMPE-CT: 10 mg/m ³ 15 minutes. Form: mist |
| Distillates (petroleum), solvent-refined heavy paraffinic | 64741-88-4 | TWA: 5 mg/m ³ 8 hours. Form: Inhalable fraction | TWA: 5 mg/m ³ 8 hours. | LMPE-PPT: 5 mg/m ³ 8 hours. Form: mist LMPE-CT: 10 mg/m ³ 15 minutes. |

Exposure controls

Engineering Measures Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Individual protection measures, such as personal protective equipment

General Information: If the product is used in mixtures, it is recommended that you contact the appropriate protective equipment suppliers. These recommendations apply to the product as supplied.

Eye/Face Protection: If splashes are likely to occur, wear: Safety glasses with side-shields.

Skin and body protection: Wear suitable protective clothing. Protective shoes or boots.

Hand Protection: Hydrocarbon-proof gloves. Fluorinated rubber. Nitrile rubber. Please observe the instructions regarding permeability and breakthrough time which are provided by the supplier of the gloves. Also take into consideration the specific local conditions under which the product is used, such as the danger of cuts, abrasion, and the contact time.

Respiratory protection: None required under normal usage. If exposure limits are exceeded or irritation is experienced, IOSH/MSHA approved respiratory protection should be worn. Positive-pressure supplied air respirators may be required for high airborne contaminant concentrations. Respiratory protection must be provided in accordance with current local regulations.

Hygiene measures: Ensure the application of strict rules of hygiene by the personnel exposed to the risk of contact with the product. Regular cleaning of equipment, work area and clothing is recommended. Wash hands before breaks and immediately after handling the product. Do not use abrasives, solvents or fuels. Do not dry hands with rags that have been contaminated with product. Do not put product contaminated rags into workwear pockets.



Person Protective Equipment Pictograms:

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical and chemical properties

Air Tool Lubricant

Date of Previous Version: 2016-23-05

Revision Date: 2017-01-11

Appearance:

| | |
|----------------|--------------------------|
| Color | Yellow |
| Physical State | Liquid |
| Odor Threshold | No information available |

| <u>Property</u> | <u>Values</u> | <u>Remarks</u> | <u>Method</u> |
|------------------------------------|-------------------------|---|---------------|
| pH | | No information available | |
| Melting point/range | | No information available | |
| Boiling point/boiling range | | No information available | |
| Flash point | | No information available | |
| Evaporation rate | | No information available | |
| Flammability Limits in Air upper | | No information available | |
| Upper | - | No information available | |
| Lower | - | No information available | |
| Vapor Pressure | | No information available | |
| Vapor density | | No information available | |
| Relative density | | No information available | |
| Solubility | | Insoluble in the following materials: cold water and hot water. | |
| Water solubility | | No information available | |
| Solubility in other solvents | | No information available | |
| logPow | | No information available | |
| Autoignition temperature | | No information available | |
| Decomposition temperature | | No information available | |
| Viscosity, kinematic | 0.05 cm ² /s | @ 40 °C (104°F) | ASTM D 445 |
| Explosive properties | | Not explosive | |
| Oxidizing Properties | | Not applicable | |
| Possibility of hazardous reactions | | Not applicable | |
| Other information | | | |
| Freezing Point | | No information available | |
| Pour point | | No information available | |

10. STABILITY AND REACTIVITY

| | |
|--|---|
| Reactivity: | No information available. |
| Chemical stability: | Stable under recommended storage conditions. |
| Possibility of hazardous reactions: | None under normal processing. |
| Conditions to Avoid: | Heat (temperatures above flash point), sparks, ignition points, flames, static electricity. |
| Incompatible Materials: | Strong oxidizing agents. |
| Hazardous Decomposition : | Products None under normal use. |

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Air Tool Lubricant

Date of Previous Version: 2016-23-05

Revision Date: 2017-01-11

Product Information Product does not present an acute toxicity hazard based on known or supplied information.

Information on likely routes of exposure

Principle Routes of Exposure Inhalation, Ingestion, Eye contact, Skin contact.

Numerical measures of toxicity - Product Information

Component Information

| Chemical Name | ACGIH | IARC | EPA | NIOSH | NTP | OSHA |
|---|-------|------|-----|-------|-----|------|
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | A4 | - | - | - | - | - |
| Distillates (petroleum), solvent-refined heavy paraffinic | A4 | - | - | - | - | - |

Information on toxicological effects

Symptoms: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Difficulty breathing. Coughing and/ or wheezing.

Skin contact: Defatting to the skin. May cause skin dryness and irritation.

Eye contact: No known significant effects or critical hazards.

Inhalation: No known significant effects or critical hazards

Ingestion: May be fatal if swallowed and enters airways. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Sensitization: No known significant effects or critical hazards.

Carcinogenicity: No known significant effects or critical hazards.

Mutagenicity: No known significant effects or critical hazards.

Reproductive toxicity: No known significant effects or critical hazards.

Aspiration Hazard: May be fatal if swallowed and enters airways. Risk of serious damage to the lungs (by aspiration).

12. ECOLOGICAL INFORMATION

Ecotoxicity

Acute aquatic toxicity - Product Information

No information available

Chronic aquatic toxicity - Product Information

No information available

Chronic aquatic toxicity - Component Information

13. DISPOSAL CONSIDERATIONS

Waste treatment

Air Tool Lubricant

Date of Previous Version: 2016-23-05

Revision Date: 2017-01-11

Waste Disposal Methods: Dispose of in accordance with local regulations.

Contaminated packaging: Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. TRANSPORT INFORMATION

DOT: Not regulated

TDG: Not regulated

MEX: Not regulated

ICAO/IATA: Not regulated

IMDG/IMO: Not regulated

ADR/RID: Not regulated

AND: Not regulated

15. REGULATORY INFORMATION

U.S. Federal Regulations

United States Lists:

USA TSCA : All components are listed or exempted.

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

SARA 311/312 Hazard Categories

| | |
|---|-----|
| Acute Health Hazard: | Yes |
| Chronic Health Hazard: | No |
| Fire Hazard: | No |
| Sudden Release of Pressure Hazard: | No |
| Reactive Hazard: | No |

Clean Water Act

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42).

Clean Air Act, Section 112 Hazardous Air Pollutants (HAPs) (see 40 CFR 61)

This product does not contain any substances regulated as hazardous air pollutants (HAPS) under Section 112 of the Clean Air Act Amendments of 1990.

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level pertaining to releases of this material.

U.S. State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

New Jersey : The following components are listed: MINERAL OIL (UNTREATED and MILDLYTREATED)

Air Tool Lubricant

Date of Previous Version: 2016-23-05

Revision Date: 2017-01-11

Canada

Canadian lists:

Canadian NPRI : None of the components are listed.

Canada inventory : All components are listed or exempted.

Canadian PCP/DIN Number : Not available.

International regulations

International: **Australia inventory (AICS)**: All components are listed or exempted.

China inventory (IECSC): All components are listed or exempted.

Japan inventory: Not determined.

Korea inventory: All components are listed or exempted.

Malaysia Inventory (EHS Register): Not determined.

New Zealand Inventory of Chemicals (NZIoC): All components are listed or exempted.

Philippines inventory (PICCS): Not determined.

Taiwan inventory (CSNN): Not determined.

16. OTHER INFORMATION

| | | | | |
|------|-----------------|----------------|-------------------|---------------------------------|
| NFPA | Health Hazard 1 | Flammability 1 | Instability 0 | Physical and chemical hazards – |
| HMIS | Health Hazard 1 | Flammability 1 | Physical Hazard 0 | Personal Protection X |

NFPA (National Fire Protection Association) HMIS (Hazardous Material Information System)

This safety data sheet serves to complete but not to replace the technical product sheets. The information contained herein is given in good faith and is accurate to the best of knowledge at the date indicated above. It is understood by the user that any use of the product for purposes other than those for which it was designed entails potential risk. The information given herein in no way dispenses the user from knowing and applying all provisions regulating his activity. The user bears sole liability for the precautions required when using the product. The regulatory texts indicated herein are intended to aid the user to fulfil his obligations. This list is not to be considered complete and exhaustive. It is the user's responsibility to ensure that he is subject to no other obligations than those mentioned.



Revision Number: 003.3

Issue date: 08/07/2017

1. PRODUCT AND COMPANY IDENTIFICATION

Product name: LOCTITE LB 8014 FOODGRADE ANTI-SEIZE known as LOCTITE® Food Grade Anti-Seize
Product type: Lubricant
Restriction of Use: None identified
Company address: Henkel Corporation
 One Henkel Way
 Rocky Hill, Connecticut 06067

IDH number: 1167237

Item number: 1167237
Region: United States

Contact information:
 Telephone: +1 (860) 571-5100
 MEDICAL EMERGENCY Phone: Poison Control Center
 1-877-671-4608 (toll free) or 1-303-592-1711
 TRANSPORT EMERGENCY Phone: CHEMTREC
 1-800-424-9300 (toll free) or 1-703-527-3887
 Internet: www.henkelna.com

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

DANGER: CAUSES SKIN IRRITATION.
 CAUSES SERIOUS EYE DAMAGE.

| HAZARD CLASS | HAZARD CATEGORY |
|--------------------|-----------------|
| SKIN IRRITATION | 2 |
| SERIOUS EYE DAMAGE | 1 |

PICTOGRAM(S)



Precautionary Statements

Prevention: Wash affected area thoroughly after handling. Wear protective gloves, eye protection, and face protection.

Response: IF ON SKIN: Wash with plenty of water. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation occurs: Get medical attention. Take off contaminated clothing.

Storage: Not prescribed

Disposal: Not prescribed

Classification complies with OSHA Hazard Communication Standard (29 CFR 1910.1200) and is consistent with the provisions of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

| Hazardous Component(s) | CAS Number | Percentage* |
|---|------------|-------------|
| Mineral oil | Unknown | 40 - 50 |
| White mineral oil (petroleum), highly refined | 8042-47-5 | 10 - 20 |

IDH number: 1167237

Product name: LOCTITE LB 8014 FOODGRADE ANTI-SEIZE known as LOCTITE® Food Grade Anti-Seize

| | | |
|---------------------|------------|---------|
| Calcium dihydroxide | 1305-62-0 | 10 - 20 |
| Talc | 14807-96-6 | 5 - 10 |

* Exact percentages may vary or are trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

| | |
|----------------------|---|
| Inhalation: | Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. If symptoms develop and persist, get medical attention. |
| Skin contact: | Wash with soap and water. If symptoms develop and persist, get medical attention. |
| Eye contact: | Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. If symptoms develop and persist, get medical attention. |
| Ingestion: | Do not induce vomiting. Never give anything by mouth to an unconscious person. If symptoms develop and persist, get medical attention. |
| Symptoms: | See Section 11. |

5. FIRE FIGHTING MEASURES

| | |
|---|--|
| Extinguishing media: | Water spray (fog), foam, dry chemical or carbon dioxide. |
| Special firefighting procedures: | Wear self-contained breathing apparatus and full protective clothing, such as turn-out gear. |
| Unusual fire or explosion hazards: | Closed containers may rupture (due to build up of pressure) when exposed to extreme heat. |
| Hazardous combustion products: | Oxides of carbon. Toxic and irritating vapors. |

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

| | |
|-----------------------------------|--|
| Environmental precautions: | Do not allow product to enter sewer or waterways. |
| Clean-up methods: | Keep unnecessary personnel away. Scrape up as much material as possible. Clean residue with soap and water. Store in a partly filled, closed container until disposal. Refer to Section 8 "Exposure Controls / Personal Protection" prior to clean up. |

7. HANDLING AND STORAGE

| | |
|------------------|---|
| Handling: | Avoid contact with eyes, skin and clothing. Do not breathe gas/fumes/vapor/spray. Wash thoroughly after handling. Refer to Section 8. |
| Storage: | Keep in a cool, well ventilated area away from heat, sparks and open flame. Keep container tightly closed until ready for use. |

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

| Hazardous Component(s) | ACGIH TLV | OSHA PEL | AIHA WEEL | OTHER |
|---|--|--|-----------|--------|
| Mineral oil | 5 mg/m ³ TWA mist 10 mg/m ³ STEL mist | 5 mg/m ³ TWA mist | None | None |
| White mineral oil (petroleum), highly refined | 5 mg/m ³ TWA Inhalable fraction. | 5 mg/m ³ TWA mist 5 mg/m ³ PEL Mist. | None | None |
| Calcium dihydroxide | 5 mg/m ³ TWA | 5 mg/m ³ PEL Respirable fraction. 15 mg/m ³ PEL Total dust. | None | None |
| Talc | 2 mg/m ³ TWA Respirable fraction. | 0.1 mg/m ³ TWA Respirable. 2.4 MPPCF TWA Respirable. 20 MPPCF TWA | None | 50 ppm |

| | |
|--------------------------------|---|
| Engineering controls: | Use only with adequate ventilation. Local exhaust ventilation is recommended when general ventilation is not sufficient to control airborne contamination below occupational exposure limits. |
| Respiratory protection: | Use NIOSH approved respirator if there is potential to exceed exposure limit(s). Observe OSHA regulations for respirator use (29 CFR 1910.134). |
| Eye/face protection: | Safety goggles or safety glasses with side shields. Full face protection should be used if the potential for splashing or spraying of product exists. Safety showers and eye wash stations should be available. |
| Skin protection: | Use impermeable gloves and protective clothing as necessary to prevent skin contact. |

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|------------------------------|
| Physical state: | Paste |
| Color: | White |
| Odor: | Mild |
| Odor threshold: | Not available. |
| pH: | Not available. |
| Vapor pressure: | Not determined |
| Boiling point/range: | Not available. |
| Melting point/ range: | Not available. |
| Specific gravity: | 1.18 |
| Vapor density: | Not available. |
| Flash point: | 154 °C (309.2 °F) calculated |
| Flammable/Explosive limits - lower: | Not available. |
| Flammable/Explosive limits - upper: | Not available. |
| Autoignition temperature: | Not available. |
| Flammability: | Not applicable |
| Evaporation rate: | Not available. |
| Solubility in water: | Insoluble |
| Partition coefficient (n-octanol/water): | Not determined |
| VOC content: | < 3 % |
| Viscosity: | Not available. |
| Decomposition temperature: | Not available. |

10. STABILITY AND REACTIVITY

| | |
|--|---|
| Stability: | Stable under normal conditions of storage and use. |
| Hazardous reactions: | Will not occur. |
| Hazardous decomposition products: | Oxides of carbon. Hydrocarbons. Irritating organic vapours. |
| Incompatible materials: | Oxidizing agents. |
| Reactivity: | Not available. |
| Conditions to avoid: | Excessive heat. Store away from incompatible materials. |

11. TOXICOLOGICAL INFORMATION

Relevant routes of exposure: Skin, Inhalation, Eyes, Ingestion

Potential Health Effects/Symptoms

| | |
|----------------------|--|
| Inhalation: | This product has low volatility and is not expected to cause respiratory tract irritation during normal conditions of use. |
| Skin contact: | Causes skin irritation. |
| Eye contact: | Causes serious eye damage. |
| Ingestion: | Not expected under normal conditions of use. May cause gastrointestinal tract irritation if swallowed. |

| Hazardous Component(s) | LD50s and LC50s | Immediate and Delayed Health Effects |
|---|-------------------------------|--|
| Mineral oil | None | No Data |
| White mineral oil (petroleum), highly refined | None | Irritant |
| Calcium dihydroxide | Oral LD50 (Rat) = 7,340 mg/kg | Irritant, Corrosive |
| Talc | None | Irritant, Lung, Some evidence of carcinogenicity |

| Hazardous Component(s) | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen (Specifically Regulated) |
|---|----------------|-----------------|--|
| Mineral oil | No | No | No |
| White mineral oil (petroleum), highly refined | No | No | No |
| Calcium dihydroxide | No | No | No |
| Talc | No | Group 2B | No |

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Follow all local, state, federal and provincial regulations for disposal.
Hazardous waste number: Not a RCRA hazardous waste.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any package/configuration.

U.S. Department of Transportation Ground (49 CFR)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

International Air Transportation (ICAO/IATA)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

Water Transportation (IMO/IMDG)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

15. REGULATORY INFORMATION

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory.
TSCA 12 (b) Export Notification: None above reporting de minimis
CERCLA/SARA Section 302 EHS: None above reporting de minimis.
CERCLA/SARA Section 311/312: Immediate Health, Delayed Health
CERCLA/SARA Section 313: None above reporting de minimis.
California Proposition 65: This product contains a chemical known in the State of California to cause cancer. This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Canada Regulatory Information

CEPA DSL/NDSL Status: All components are listed on or are exempt from listing on the Canadian Domestic Substances List.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: New Safety Data Sheet format.

Prepared by: Cara R. Rivera, Regulatory Affairs Specialist
Issue date: 08/07/2017

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.

This is the HTML version of the file <http://www.amerplastics.com/nl/attachments/369/en-psx-60-part-a.html>. Google automatically generates HTML versions of documents as we crawl the web.

Tip: To quickly find your search term on this page, press **Ctrl+F** or **⌘-F** (Mac) and use the find bar.

SAFETY DATA SHEET

PSX 60 Part A

Page : 1 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product form : Mixture
Trade name/designation : PSX 60 Part A

1.2. Relevant identified uses of the substance or mixture and uses advised against

1.2.1. Relevant identified uses

Main use category : Industrial uses, Professional uses
Use of the substance/mixture : Adhesives, sealants

1.2.2. Uses advised against

No data available

1.3. Details of the supplier of the safety data sheet

NOV Fiber Glass Systems
Pan Oven 20, 4191MZ Geldermalsen
The Netherlands
T +31 610560118
evert.riswick@nov.com - www.fgspipe.com

1.4. Emergency telephone number

Emergency number : + 1-760-476-3961
This telephone number is available 24 hours per day, 7 days per week.

| Country | Official advisory body | Address | Emergency number |
|-----------------------|--|---|--|
| IRELAND (REPUBLIC OF) | National Poisons Information Centre Beaumont Hospital | Beaumont Hospital Beaumont Road 9 Dublin | +353 18 37 99 64/+353 1 809 21 66 |
| UNITED KINGDOM | National Poisons Information Service (Newcastle Centre) Regional Drugs and Therapeutics Centre, Wolfson Unit | Claremont Place Newcastle-upon-Tyne NE1 4LP Newcastle | 0844 892 0111 (UK only, Monday to Friday, 08.00 to 18.00 hours, healthcare professionals only) |

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

Classification according to Regulation (EC) No. 1272/2008 [CLP] Mixture/Substance: SDS EU 2015: According to Regulation (EU) 2015/830 (REACH Annex II)

Skin Irrit. 2 H315
 Eye Irrit. 2 H319
 Skin Sens. 1 H317
 Repr. 1A H360FD
 STOT RE 1 H372
 Aquatic Chronic 2 H411

Full text of H-statements: see section 16

2.2. Label elements

Labelling according to Regulation (EC) No. 1272/2008 [CLP] Extra labelling to display/Extra classification(s) to display

Hazard pictograms :

GHS07

GHS08

GHS09

Page 2

SAFETY DATA SHEET

PSX 60 Part A

Page : 2 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

Signal word : Danger

Hazardous ingredients : dibutyltin di(acetate), Quartz, Phenol, polymer with formaldehyde, glycidyl ether

Hazard statements : H315 - Causes skin irritation.
 H317 - May cause an allergic skin reaction.
 H319 - Causes serious eye irritation.
 H360FD - May damage fertility. May damage the unborn child.
 H372 - Causes damage to organs through prolonged or repeated exposure.
 H411 - Toxic to aquatic life with long lasting effects.

Precautionary statements : P201 - Obtain special instructions before use.
 P280 - Wear protective gloves/protective clothing/eye protection/face protection.
 P281 - Use personal protective equipment as required.
 P260 - Do not breathe dust/fume/gas/mist/vapours/spray.
 P337+P313 - If eye irritation persists: Get medical advice/attention.
 P308+P313 - IF exposed or concerned: Get medical advice/attention.
 P273 - Avoid release to the environment.

2.3. Other hazards

Adverse physicochemical, human health and environmental effects : Mechanical cutting, grinding, drilling or sanding. : Risk of dust explosion.

Other hazards : Results of PBT and vPvB assessment : Not applicable.

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable

3.2. Mixture

| Substance name | Product identifier | % | Classification according to Regulation (EC) No. |
|----------------|--------------------|---|---|
|----------------|--------------------|---|---|

514

| | | | |
|---|---|---------|---|
| Phenol, polymer with formaldehyde, glycidyl ether | (CAS No.) 28064-14-4 (EC No) 608-164-0 (EC Index) - | 40 - 70 | 1272/2008 [CLP] Skin Irrit. 2, H315 Eye Irrit. 2, H319 Skin Sens. 1, H317 Aquatic Chronic 2, H411 |
| Quartz | (CAS No.) 14808-60-7 (EC No) 238-878-4 | 10 - 20 | STOT RE 1, H372 |
| Siloxane, dimethyl, methoxyphenyl with phenyl silsesquioxane methoxy-terminated | (CAS No.) 68957-04-0 | < 2 | Acute Tox. 4 (Oral), H302 |
| dibutyltin di(acetate) | (CAS No.) 1067-33-0 (EC No) 213-928-8 | < 1 | Skin Corr. 1B, H314 Skin Sens. 1, H317 Muta. 2, H341 Repr. 1A, H360FD STOT SE 1, H370 STOT RE 1, H372 Aquatic Chronic 1, H410 |
| Methanol substance with a Community workplace exposure limit substance with national workplace exposure limit(s) (AT, BE, BG, CY, CZ, DE, DK, ES, FI, FR, GB, GI, GR, HU, IE, IT, LT, LU, LV, MT, NL, PL, PT, RO, SE, SK) | (CAS No.) 67-56-1 (EC No) 200-659-6 (EC Index) 603-001-00-X | < 0,05 | Flam. Liq. 2, H225 Acute Tox. 3 (Oral), H301 Acute Tox. 3 (Dermal), H311 Acute Tox. 3 (Inhalation:vapour), H331 STOT SE 1, H370 |

Specific concentration limits:**Substance name**

Methanol

Product identifier(CAS No.) 67-56-1
(EC No) 200-659-6
(EC Index) 603-001-00-X**Specific concentration limits**(3 <= C < 10) STOT SE 2, H371
(C >= 10) STOT SE 1, H370

Full text of H-statements: see section 16

SAFETY DATA SHEET

Page : 3 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

PSX 60 Part A**SECTION 4: First aid measures****4.1. Description of first aid measures**

| | |
|----------------------|--|
| Additional advice | : Never give anything by mouth to an unconscious person or a person with cramps. IF exposed or concerned: Get medical advice/attention. |
| Inhalation | : Allow breathing of fresh air. Allow the victim to rest. |
| Skin contact | : Wash with plenty of soap and water. Wash contaminated clothing before reuse. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | : Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| In case of ingestion | : Rinse mouth. Do NOT induce vomiting. Obtain emergency medical attention. |

4.2. Most important symptoms and effects, both acute and delayed

| | |
|-------------------|--|
| Symptoms/injuries | : May damage fertility. May damage the unborn child. Causes damage to organs through prolonged or repeated exposure. |
| Inhalation | : May cause irritation or asthma-like symptoms. |
| Skin contact | : Causes skin irritation. May cause an allergic skin reaction. |
| Eye contact | : Causes serious eye irritation. |
| Ingestion | : May cause gastrointestinal irritation, nausea, vomiting and diarrhoea. |

4.3. Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media : Water spray. Alcohol resistant foam. Dry extinguishing powder. Carbon dioxide.

Unsuitable extinguishing media : Strong water jet.

5.2. Special hazards arising from the substance or mixture

Specific hazards : Non flammable. Heating causes rise in pressure with risk of bursting.

Explosion hazard : Mechanical cutting, grinding, drilling or sanding. : Risk of dust explosion.

Hazardous decomposition products in case of fire : Aldehydes. Carbon oxides (CO, CO₂). Phenol.

5.3. Advice for firefighters

Firefighting instructions : Special protective equipment for firefighters. In case of fire: Wear self-contained breathing apparatus. Use water spray jet to protect personnel and to cool endangered containers. Do not allow run-off from fire-fighting to enter drains or water courses. Dispose of waste in accordance with environmental legislation. Evacuate personnel to a safe area. Use water spray or fog for cooling exposed containers.

Protection during firefighting : Do not enter fire area without proper protective equipment, including respiratory protection.

SECTION 6: Accidental release measures**6.1. Personal precautions, protective equipment and emergency procedures****6.1.1. For non-emergency personnel**

Protective equipment : Use personal protective equipment as required. Concerning personal protective equipment to use, see section 8.

For non-emergency personnel : Evacuate personnel to a safe area. Stay upwind/keep distance from source. Provide adequate ventilation. Do not breathe dust. Avoid contact with skin, eyes and clothing. Avoid generation of dust. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Ensure equipment is adequately grounded. Use explosion-proof machinery, apparatus, ventilation facilities, tools etc.

Measures in case of dust release : Exclude sources of ignition and ventilate the area. Do not breathe dust.

SAFETY DATA SHEET

Page : 4 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

PSX 60 Part A**6.1.2. For emergency responders**

Protective equipment : Equip cleanup crew with proper protection. For further information refer to section 8: "Exposure controls/personal protection".

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters. Avoid release to the environment.

6.3. Methods and material for containment and cleaning up

For containment : Stop leak if safe to do so.

Methods for cleaning up : Take up mechanically, placing in appropriate containers for disposal. Dispose of waste product or used containers according to local regulations. Avoid generation of dust. Knock down dust with water spray jet. Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Collect spillage. Store away from other materials. Use non-sparking tools.

6.4. Reference to other sections

See Heading 8. Concerning disposal elimination after cleaning, see section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling

: Provide adequate ventilation. Use personal protective equipment as required. Concerning personal protective equipment to use, see section 8. Do not breathe dust. Avoid contact with skin, eyes and clothing. Take any precaution to avoid mixing with incompatible materials. See also section 10. Ensure proper process control to avoid excess waste discharge (temperature, concentration, pH, time). Do not allow contact with soil, surface or ground water. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Avoid generation of dust. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Ensure equipment is adequately grounded. Use explosion-proof machinery, apparatus, ventilation facilities, tools etc. Use only non-sparking tools. Keep good industrial hygiene.

Hygiene measures

: Wash hands before breaks and immediately after using the product. When using do not eat, drink or smoke. Keep away from food, drink and animal feedingstuffs. Keep work clothes separately. Take off contaminated clothing. Wash contaminated clothing before reuse. Contaminated work clothing should not be allowed out of the workplace.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures

: Keep in a dry, cool and well-ventilated place. Do not store near or with any of the incompatible materials listed in section 10.

Storage conditions

: Keep only in the original container in a cool, well ventilated place away from : Keep container closed when not in use.

Storage temperature

: < 38 °C

Heat and ignition sources

: Keep away from open flames, hot surfaces and sources of ignition. Keep out of direct sunlight.

Packaging materials

: Keep/Store only in original container.

7.3. Specific end use(s)

No data available.

SECTION 8: Exposure controls/personal protection**8.1. Control parameters****Quartz (14808-60-7)**

| | | |
|----------|----------------------------------|---|
| Austria | MAK (mg/m ³) | 0,15 mg/m ³ (yearly average, valid till 12/31/2013-alveolar dust, respirable fraction) |
| Belgium | Limit value (mg/m ³) | 0,1 mg/m ³ (alveolar dust) |
| Bulgaria | OEL TWA (mg/m ³) | 0,07 mg/m ³ (respirable fraction) |

SAFETY DATA SHEET

Page : 5 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

PSX 60 Part A**Quartz (14808-60-7)**

| | | |
|----------------|--|--|
| Croatia | GVI (granična vrijednost izloženosti) (mg/m ³) | 0,1 mg/m ³ 0,1 mg/m ³ (regulated under Quartz sand-respirable dust) |
| Czech Republic | Expoziční limity (PEL) (mg/m ³) | 0,1 mg/m ³ (dust) |
| Denmark | Grænseværdie (langvarig) (mg/m ³) | 0,3 mg/m ³ (total) 0,1 mg/m ³ (respirable) |
| Estonia | OEL TWA (mg/m ³) | 0,1 mg/m ³ (respirable dust) |
| Finland | HTP-arvo (8h) (mg/m ³) | 0,05 mg/m ³ (respirable) |
| France | VME (mg/m ³) | 0,1 mg/m ³ (restrictive limit-alveolar fraction) |
| Hungary | AK-érték | 0,15 mg/m ³ (respirable) |

| | | |
|-----------------|--|--|
| Ireland | OEL (8 hours ref) (mg/m ³) | 0,1 mg/m ³ (respirable dust) |
| Ireland | OEL (15 min ref) (mg/m ³) | 0,3 mg/m ³ (calculated-respirable dust) |
| Lithuania | IPRV (mg/m ³) | 0,1 mg/m ³ (Silicon dioxide variation-respirable fraction) |
| Netherlands | Grenswaarde TGG 8H (mg/m ³) | 0,075 mg/m ³ (respirable dust) |
| Poland | NDS (mg/m ³) | 2 mg/m ³ (>50% free crystalline silica-inhalable fraction) 0,3 mg/m ³ (>50% free crystalline silica-respirable fraction) 4,0 mg/m ³ (2% to 50% free crystalline silica-inhalable fraction) 1,0 mg/m ³ (2% to 50% free crystalline silica-respirable fraction) |
| Portugal | OEL TWA (mg/m ³) | 0,025 mg/m ³ (respirable fraction) |
| Romania | OEL TWA (mg/m ³) | 0,1 mg/m ³ (respirable fraction, dust) |
| Slovakia | NPHV (priemerná) (mg/m ³) | 0,1 mg/m ³ (in Cristobalite or Tridymite-total aerosol) |
| Slovenia | OEL TWA (mg/m ³) | 0,15 mg/m ³ (respirable fraction) |
| Spain | VLA-ED (mg/m ³) | 0,05 mg/m ³ (reclassified IARC group 2A to group 1-respirable fraction) |
| Sweden | nivågränsvärde (NVG) (mg/m ³) | 0,1 mg/m ³ (respirable dust) |
| United Kingdom | WEL TWA (mg/m ³) | 0,1 mg/m ³ (respirable) |
| United Kingdom | WEL STEL (mg/m ³) | 0,3 mg/m ³ (calculated-respirable) |
| Norway | Grenseverdier (AN) (mg/m ³) | 0,3 mg/m ³ (Dust containing .alpha.-Quartz, Cristobalite and/or Tridymite is evaluated by summation formula-total dust) 0,1 mg/m ³ (Dust containing .alpha.-Quartz, Cristobalite and/or Tridymite is evaluated by summation formula-respirable dust) |
| Norway | Grenseverdier (Korttidsverdi) (mg/m ³) | 0,3 mg/m ³ (Dust containing .alpha.-Quartz, Cristobalite and/or Tridymite is evaluated by summation formula-total dust) 0,1 mg/m ³ (Dust containing .alpha.-Quartz, Cristobalite and/or Tridymite is evaluated by summation formula-respirable dust) |
| Switzerland | VME (mg/m ³) | 0,15 mg/m ³ (respirable dust) |
| Australia | TWA (mg/m ³) | 0,1 mg/m ³ (respirable dust) |
| Canada (Quebec) | VEMP (mg/m ³) | 0,1 mg/m ³ (respirable dust) |
| USA - ACGIH | ACGIH TWA (mg/m ³) | 0,025 mg/m ³ (respirable fraction) |
| USA - IDLH | US IDLH (mg/m ³) | 50 mg/m ³ (respirable dust) |

SAFETY DATA SHEET

Page : 6 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

PSX 60 Part A

Quartz (14808-60-7)USA - NIOSH NIOSH REL (TWA) (mg/m³) 0,05 mg/m³ (respirable dust)**Methanol (67-56-1)**EU IOELV TWA (mg/m³) 260 mg/m³

EU IOELV TWA (ppm) 200 ppm

| | | |
|----------------|---|---|
| Austria | MAK (mg/m ³) | 260 mg/m ³ |
| Austria | MAK (ppm) | 200 ppm |
| Austria | MAK Short time value (mg/m ³) | 1040 mg/m ³ |
| Austria | MAK Short time value (ppm) | 800 ppm |
| Belgium | Limit value (mg/m ³) | 266 mg/m ³ |
| Belgium | Limit value (ppm) | 200 ppm |
| Belgium | Short time value (mg/m ³) | 333 mg/m ³ |
| Belgium | Short time value (ppm) | 250 ppm |
| Bulgaria | OEL TWA (mg/m ³) | 260,0 mg/m ³ |
| Bulgaria | OEL TWA (ppm) | 200 ppm |
| Croatia | GVI (granična vrijednost izloženosti) (mg/m ³) | 260 mg/m ³ |
| Croatia | GVI (granična vrijednost izloženosti) (ppm) | 200 ppm |
| Cyprus | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Cyprus | OEL TWA (ppm) | 200 ppm |
| Czech Republic | Expoziční limity (PEL) (mg/m ³) | 250 mg/m ³ |
| Denmark | Grænseværdie (langvarig) (mg/m ³) | 260 mg/m ³ |
| Denmark | Grænseværdie (langvarig) (ppm) | 200 ppm |
| Estonia | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Estonia | OEL TWA (ppm) | 200 ppm |
| Estonia | OEL STEL (mg/m ³) | 350 mg/m ³ |
| Estonia | OEL STEL (ppm) | 250 ppm |
| Finland | HTP-arvo (8h) (mg/m ³) | 270 mg/m ³ |
| Finland | HTP-arvo (8h) (ppm) | 200 ppm |
| Finland | HTP-arvo (15 min) | 330 mg/m ³ |
| Finland | HTP-arvo (15 min) (ppm) | 250 ppm |
| France | VME (mg/m ³) | 260 mg/m ³ (restrictive limit) |
| France | VME (ppm) | 200 ppm (restrictive limit) |
| France | VLE (mg/m ³) | 1300 mg/m ³ |
| France | VLE (ppm) | 1000 ppm |
| Germany | TRGS 900 Occupational exposure limit value (mg/m ³) | 270 mg/m ³ (The risk of damage to the embryo or fetus can be excluded when AGW and BGW values are observed) |
| Germany | TRGS 900 Occupational exposure limit value (ppm) | 200 ppm (The risk of damage to the embryo or fetus can be excluded when AGW and BGW values are observed) |
| Germany | TRGS 903 (BGW) | 30 mg/l (Medium: urine - Time: end of shift - Parameter: Methanol) 30 mg/l (Medium: urine - Time: end of several shifts - Parameter: Methanol (for long-term exposures)) |
| Gibraltar | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Gibraltar | OEL TWA (ppm) | 200 ppm |
| Greece | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Greece | OEL TWA (ppm) | 200 ppm |

SAFETY DATA SHEET

PSX 60 Part A

Methanol (67-56-1)

| | | |
|----------------|---|--|
| Greece | OEL STEL (mg/m ³) | 325 mg/m ³ |
| Greece | OEL STEL (ppm) | 250 ppm |
| Hungary | AK-érték | 260 mg/m ³ |
| Ireland | OEL (8 hours ref) (mg/m ³) | 260 mg/m ³ |
| Ireland | OEL (8 hours ref) (ppm) | 200 ppm |
| Ireland | OEL (15 min ref) (mg/m ³) | 780 mg/m ³ (calculated) |
| Ireland | OEL (15 min ref) (ppm) | 600 ppm (calculated) |
| Italy | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Italy | OEL TWA (ppm) | 200 ppm |
| Latvia | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Latvia | OEL TWA (ppm) | 200 ppm |
| Lithuania | IPRV (mg/m ³) | 260 mg/m ³ |
| Lithuania | IPRV (ppm) | 200 ppm |
| Luxembourg | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Luxembourg | OEL TWA (ppm) | 200 ppm |
| Malta | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Malta | OEL TWA (ppm) | 200 ppm |
| Netherlands | Grenswaarde TGG 8H (mg/m ³) | 133 mg/m ³ |
| Netherlands | Grenswaarde TGG 8H (ppm) | 100 ppm |
| Poland | NDS (mg/m ³) | 100 mg/m ³ |
| Poland | NDSch (mg/m ³) | 300 mg/m ³ |
| Portugal | OEL TWA (mg/m ³) | 260 mg/m ³ (indicative limit value) |
| Portugal | OEL TWA (ppm) | 200 ppm (indicative limit value) |
| Portugal | OEL STEL (ppm) | 250 ppm |
| Romania | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Romania | OEL TWA (ppm) | 200 ppm |
| Romania | OEL STEL (ppm) | 5 ppm |
| Slovakia | NPHV (priemerná) (mg/m ³) | 260 mg/m ³ |
| Slovakia | NPHV (priemerná) (ppm) | 200 ppm |
| Slovenia | OEL TWA (mg/m ³) | 260 mg/m ³ |
| Slovenia | OEL TWA (ppm) | 200 ppm |
| Spain | VLA-ED (mg/m ³) | 266 mg/m ³ (indicative limit value) |
| Spain | VLA-ED (ppm) | 200 ppm (indicative limit value) |
| Sweden | nivågränsvärde (NVG) (mg/m ³) | 250 mg/m ³ |
| Sweden | nivågränsvärde (NVG) (ppm) | 200 ppm |
| Sweden | kortidsvärde (KTV) (mg/m ³) | 350 mg/m ³ |
| Sweden | kortidsvärde (KTV) (ppm) | 250 ppm |
| United Kingdom | WEL TWA (mg/m ³) | 266 mg/m ³ |
| United Kingdom | WEL TWA (ppm) | 200 ppm |
| United Kingdom | WEL STEL (mg/m ³) | 333 mg/m ³ |
| United Kingdom | WEL STEL (ppm) | 250 ppm |
| Norway | Grenseverdier (AN) (mg/m ³) | 130 mg/m ³ |
| Norway | Grenseverdier (AN) (ppm) | 100 ppm |

PSX 60 Part A

Supersedes :

Methanol (67-56-1)

| | | |
|-----------------|--|------------------------|
| Norway | Grenseverdier (Korttidsverdi) (mg/m ³) | 130 mg/m ³ |
| Norway | Grenseverdier (Korttidsverdi) (ppm) | 100 ppm |
| Switzerland | VME (mg/m ³) | 260 mg/m ³ |
| Switzerland | VME (ppm) | 200 ppm |
| Switzerland | VLE (mg/m ³) | 1040 mg/m ³ |
| Switzerland | VLE (ppm) | 800 ppm |
| Australia | TWA (mg/m ³) | 262 mg/m ³ |
| Australia | TWA (ppm) | 200 ppm |
| Australia | STEL (mg/m ³) | 328 mg/m ³ |
| Australia | STEL (ppm) | 250 ppm |
| Canada (Quebec) | VECD (mg/m ³) | 328 mg/m ³ |
| Canada (Quebec) | VECD (ppm) | 250 ppm |
| Canada (Quebec) | VEMP (mg/m ³) | 262 mg/m ³ |
| Canada (Quebec) | VEMP (ppm) | 200 ppm |
| USA - ACGIH | ACGIH TWA (ppm) | 200 ppm |
| USA - ACGIH | ACGIH STEL (ppm) | 250 ppm |
| USA - IDLH | US IDLH (ppm) | 6000 ppm |
| USA - NIOSH | NIOSH REL (TWA) (mg/m ³) | 260 mg/m ³ |
| USA - NIOSH | NIOSH REL (TWA) (ppm) | 200 ppm |
| USA - NIOSH | NIOSH REL (STEL) (mg/m ³) | 325 mg/m ³ |
| USA - NIOSH | NIOSH REL (STEL) (ppm) | 250 ppm |
| USA - OSHA | OSHA PEL (TWA) (mg/m ³) | 260 mg/m ³ |
| USA - OSHA | OSHA PEL (TWA) (ppm) | 200 ppm |

Additional information : Atmospheric monitoring at regular intervals. Personal monitoring

8.2. Exposure controls

| | |
|------------------------------|--|
| Engineering control measures | : Local exhaust and general ventilation must be adequate to meet exposure standards. Organisational measures to prevent /limit releases, dispersion and exposure. Mechanical cutting, grinding, drilling or sanding. : Potential dust explosion hazard. Explosion-proof apparatus have to be used. Ensure equipment is adequately grounded. |
| Hand protection | : Wear suitable gloves resistant to chemical penetration. Butyl rubber. Nitrile rubber. Neoprene. The quality of the protective gloves resistant to chemicals must be chosen as a function of the specific working place concentration and quantity of hazardous substances. |
| Eye protection | : Safety glasses with side shields (EN166) |
| Body protection | : Wear suitable protective clothing |
| Respiratory protection | : In case of insufficient ventilation, wear suitable respiratory equipment. Effective dust mask (EN 149). Half-face mask (EN 140). Full face mask (EN 136). Filter type: ABEK + P (EN 143). The filter class must be suitable for the maximum contaminant concentration (gas/vapour/aerosol/particulates) that may arise when handling the product. If the concentration is exceeded, self-contained breathing apparatus must be used. (EN 137). Wear appropriate mask |

SECTION 9: Physical and chemical properties**9.1. Information on basic physical and chemical properties**

| | |
|----------------|----------|
| Physical state | : liquid |
| Appearance | : Paste. |

SAFETY DATA SHEET

Page : 9 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

PSX 60 Part A

| | |
|--|---|
| Colour | : Black. |
| Odour | : slight. epoxy-like. |
| Odour threshold | : No data available |
| pH | : No data available |
| Relative evaporation rate (butylacetate=1) | : No data available |
| Melting point/freezing point | : No data available |
| Freezing point | : No data available |
| Initial boiling point and boiling range | : No data available |
| Flash point | : > 200 °C |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Flammability (solid, gas) | : Non flammable |
| Vapour pressure | : < 1 mmHg (20 °C) |
| Vapour density | : ≈ 1 (Air = 1.0) |
| Relative density | : No data available |
| Solubility | : No data available. Water: Negligible |
| Partition coefficient n-octanol/water | : No data available |
| Kinematic viscosity | : No data available |
| Dynamic viscosity | : 600000 - 400000 cP (@25°C) |
| Explosive properties | : Not applicable. |
| Oxidising properties | : Not applicable. |
| Explosive limits | : No data available |

9.2. Other information

No data available

SECTION 10: Stability and reactivity**10.1. Reactivity**

Non flammable. Danger of polymerisation.

10.2. Chemical stability

The product is stable under storage at normal ambient temperatures.

10.3. Possibility of hazardous reactions

Exothermic reaction with: Amines, alcohols, Strong acids and strong bases, Strong oxidizing agents, Heat. Risk of dust explosion.

10.4. Conditions to avoid

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids and strong bases. alcohols. Strong oxidizing agents. Amines. Catalyst.

10.6. Hazardous decomposition products

fume. Carbon monoxide. Carbon dioxide. Phenols. Aldehydes.

SECTION 11: Toxicological information**11.1. Information on toxicological effects**

Acute toxicity : Not classified (Based on available data, the classification criteria are not met.)

Phenol, polymer with formaldehyde, glycidyl ether (28064-14-4)

LD50/oral/rat

> 2000 mg/kg

SAFETY DATA SHEET

Page : 10 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

PSX 60 Part A

Phenol, polymer with formaldehyde, glycidyl ether (28064-14-4)

LD50/dermal/rat > 2000 mg/kg

dibutyltin di(acetate) (1067-33-0)

LD50/oral/rat 32 mg/kg

Methanol (67-56-1)

LD50/oral/rat 6200 mg/kg

LC50/inhalation/4h/rat (ppm) 22500 ppm (Exposure time: 8 h)

Skin corrosion/irritation : Causes skin irritation.

pH: No data available

Serious eye damage/eye irritation : Causes serious eye irritation.

pH: No data available

Respiratory or skin sensitisation : May cause an allergic skin reaction.

Germ cell mutagenicity : Not classified

Based on available data, the classification criteria are not met.

Carcinogenicity : Not classified

Based on available data, the classification criteria are not met.

Reproductive toxicity : May damage fertility. May damage the unborn child.

STOT-single exposure : Not classified

Based on available data, the classification criteria are not met.

STOT-repeated exposure : Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard : Not classified

Based on available data, the classification criteria are not met.

Other adverse effects : Based on available data, the classification criteria are not met.

Other information : Symptoms related to the physical, chemical and toxicological characteristics. For further information see section 4.

SECTION 12: Ecological information**12.1. Toxicity**

Environmental properties : Toxic to aquatic life with long lasting effects.

Ecology - water : Toxic to aquatic life with long lasting effects.

Phenol, polymer with formaldehyde, glycidyl ether (28064-14-4)

LC50 fish 1 > 1 - 10

Methanol (67-56-1)

LC50 fish 1 28200 mg/l (Exposure time: 96 h - Species: Pimephales promelas [flow-through])

EC50 Daphnia 1 > 10000 mg/l

LC50 fish 2 > 100 mg/l (Exposure time: 96 h - Species: Pimephales promelas [static])

12.2. Persistence and degradability**PSX 60 Part A**

Persistence and degradability No data available.

12.3. Bioaccumulative potential

PSX 60 Part A

Partition coefficient n-octanol/water

No data available

Bioaccumulative potential

Not established.

Methanol (67-56-1)

BCF fish 1

< 10

Partition coefficient n-octanol/water

-0,77

SAFETY DATA SHEET

Page : 11 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

PSX 60 Part A**12.4. Mobility in soil****PSX 60 Part A**

Ecology - soil

No data available.

12.5. Results of PBT and vPvB assessment

No data available

12.6. Other adverse effects

Additional information

: Avoid release to the environment

SECTION 13: Disposal considerations**13.1. Waste treatment methods**

Waste disposal recommendations

: Do not allow contact with soil, surface or ground water. Dispose of empty containers and wastes safely. Safe handling: see section 7. Refer to manufacturer/supplier for information on recovery/recycling. Recycling is preferred to disposal or incineration. If recycling is not possible, eliminate in accordance with local valid waste disposal regulations.

Additional information

: Handle contaminated packages in the same way as the substance itself. Dispose of contaminated materials in accordance with current regulations.

Further ecological information

: Avoid release to the environment.

Codes of waste (2001/573/EC,
75/442/EEC, 91/689/EEC): This material and its container must be disposed of as hazardous waste
Waste codes should be assigned by the user based on the application for which the product was used.**SECTION 14: Transport information**

In accordance with ADR / RID / IMDG / IATA / ADN

14.1. UN number

UN number

: 3082

UN-No

: 3082

UN-No

: 3082

UN-No. (ADN)

: 3082

UN-No. (RID)

: 3082

14.2. UN proper shipping name

Proper Shipping Name

: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S.

Proper Shipping Name (IMDG)

: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S.

Proper Shipping Name (IATA)

: Environmentally hazardous substance, liquid, n.o.s.

Proper Shipping Name (ADN)

: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S.

Proper Shipping Name (RID)

: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S.

Transport document description (ADR) : UN 3082 ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (Phenol, polymer with formaldehyde, glycidyl ether), 9, III, (E)

Transport document description (IMDG) : UN 3082 ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S., 9, III, MARINE POLLUTANT/ENVIRONMENTALLY HAZARDOUS

14.3. Transport hazard class(es)

ADR

Transport hazard class(es) (ADR) : 9

Danger labels (ADR) : 9

:

SAFETY DATA SHEET

Page : 12 / 16
 Revision nr : 1.0
 Issue date : 07/07/2015
 Supersedes :

PSX 60 Part A

IMDG

Transport hazard class(es) (IMDG) : 9

Danger labels (IMDG) : 9

:

IATA

Transport hazard class(es) (IATA) : 9

Hazard labels (IATA) : 9

:

ADN

Transport hazard class(es) (ADN) : 9

Danger labels (ADN) : 9

:

RID

Transport hazard class(es) (RID) : 9

Danger labels (RID) : 9

:

14.4. Packing group

Packing group (ADR) : III
 Packing group (IMDG) : III
 Packing group (IATA) : III
 Packing group (ADN) : III
 Packing group (RID) : III

14.5. Environmental hazards

Dangerous for the environment : Yes
 Marine pollutant : Yes
 Other information : No supplementary information available

Page 13**SAFETY DATA SHEET**

Page : 13 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

PSX 60 Part A**14.6. Special precautions for user**

Special precautions for user : No data available

- Overland transport

Classification code (ADR) : M6
 Special Provisions : 274, 335, 601
 Limited quantities (ADR) : 51
 Excepted quantities (ADR) : E1
 Packing instructions (ADR) : P001, IBC03, LP01, R001
 Special packing provisions (ADR) : PP1
 Mixed packing provisions (ADR) : MP19
 Portable tank and bulk container instructions (ADR) : T4
 Portable tank and bulk container special provisions (ADR) : TP1, TP29
 Tank code (ADR) : LGBV
 Vehicle for tank carriage : AT
 Transport category (ADR) : 3
 Special provisions for carriage - Packages (ADR) : V12
 Special provisions for carriage - Loading, unloading and handling (ADR) : CV13
 Hazard identification number (Kemler No.) : 90
 Orange plates :

| | |
|--|--------------|
| tunnel restriction code | : E |
| EAC code | : •3Z |
| - Transport by sea | |
| Special provisions (IMDG) | : 274, 335 |
| Limited quantities (IMDG) | : 5 L |
| Excepted quantities (IMDG) | : E1 |
| Packing instructions (IMDG) | : P001, LP01 |
| Special packing provisions (IMDG) | : PP1 |
| IBC packing instructions (IMDG) | : IBC03 |
| Tank instructions (IMDG) | : T4 |
| Tank special provisions (IMDG) | : TP2, TP29 |
| EmS-No. (Fire) | : F-A |
| EmS-No. (Spillage) | : S-F |
| Stowage category (IMDG) | : A |
| - Air transport | |
| PCA Excepted quantities (IATA) | : E1 |
| PCA Limited quantities (IATA) | : Y964 |
| PCA limited quantity max net quantity (IATA) | : 30kgG |
| PCA packing instructions (IATA) | : 964 |
| PCA max net quantity (IATA) | : 450L |
| CAO packing instructions (IATA) | : 964 |

SAFETY DATA SHEET

PSX 60 Part A

Page : 14 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

| | |
|-----------------------------|-------------------|
| CAO max net quantity (IATA) | : 450L |
| Special provisions (IATA) | : A97, A158, A197 |
| ERG code (IATA) | : 9L |

- Inland waterway transport

| | |
|-----------------------------------|----------------|
| Classification code (ADN) | : M6 |
| Special provisions (ADN) | : 274, 335, 61 |
| Limited quantities (ADN) | : 5 L |
| Excepted quantities (ADN) | : E1 |
| Carriage permitted (ADN) | : T |
| Equipment required (ADN) | : PP |
| Number of blue cones/lights (ADN) | : 0 |
| Carriage prohibited (ADN) | : No |
| Not subject to ADN | : No |

- Rail transport

| | |
|----------------------------|---------------------------|
| Classification code (RID) | : M6 |
| Special provisions (RID) | : 274, 335, 601 |
| Limited quantities (RID) | : 5L |
| Excepted quantities (RID) | : E1 |
| Packing instructions (RID) | : P001, IBC03, LP01, R001 |

| | |
|---|--------------|
| Special packing provisions (RID) | : PP1 |
| Mixed packing provisions (RID) | : MP19 |
| Portable tank and bulk container instructions (RID) | : T4 |
| Portable tank and bulk container special provisions (RID) | : TP1, TP29 |
| Tank codes for RID tanks (RID) | : LGBV |
| Transport category (RID) | : 3 |
| Special provisions for carriage – Packages (RID) | : W12 |
| Special provisions for carriage - Loading, unloading and handling (RID) | : CW13, CW31 |
| Colis express (express parcels) (RID) | : CE8 |
| Hazard identification number (RID) | : 90 |
| Carriage prohibited (RID) | : No |

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Code: IBC : No data available.

SECTION 15: Regulatory information

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

15.1.1. EU-Regulations

The following restrictions are applicable according to Annex XVII of the REACH Regulation (EC) No 1907/2006:

3. Liquid substances or mixtures which are regarded as dangerous in accordance with Directive 1999/45/EC or are fulfilling the criteria for any of the following hazard classes or categories set out in Annex I to Regulation (EC) No 1272/2008

Phenol, polymer with formaldehyde, glycidyl ether - Methanol

3.a. Substances or mixtures fulfilling the criteria for any of the following hazard classes or categories set out in Annex I to Regulation (EC) No 1272/2008: Hazard classes 2.1 to 2.4, 2.6 and 2.7, 2.8 types A and B, 2.9, 2.10, 2.12, 2.13 categories 1 and 2, 2.14 categories 1 and 2, 2.15 types A to F

Methanol

SAFETY DATA SHEET

PSX 60 Part A

Page : 15 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

3.b. Substances or mixtures fulfilling the criteria for any of the following hazard classes or categories set out in Annex I to Regulation (EC) No 1272/2008: Hazard classes 3.1 to 3.6, 3.7 adverse effects on sexual function and fertility or on development, 3.8 effects other than narcotic effects, 3.9 and 3.10

PSX 60 Part A - Phenol, polymer with formaldehyde, glycidyl ether - Quartz - dibutyltin di(acetate) - Siloxane, dimethyl, methoxyphenyl with phenyl silsesquioxane methoxy-terminated - Methanol

3.c. Substances or mixtures fulfilling the criteria for any of the following hazard classes or categories set out in Annex I to Regulation (EC) No 1272/2008: Hazard class 4.1

PSX 60 Part A - Phenol, polymer with formaldehyde, glycidyl ether - dibutyltin di(acetate)

40. Substances classified as flammable gases category 1 or 2, flammable liquids categories 1, 2 or 3, flammable solids category 1 or 2, substances and mixtures which, in contact with water, emit flammable gases, category 1, 2 or 3, pyrophoric liquids category 1 or pyrophoric solids category 1, regardless of whether they appear in Part 3 of Annex VI to Regulation (EC) No 1272/2008 or not.

Methanol

Contains no substance on the REACH candidate list

Contains no REACH Annex XIV substances

15.1.2. National regulations

Germany

VwVwS Annex reference : Water hazard class (WGK) 3, severe hazard to waters (Classification according to VwVwS, Annex 4)

12th Ordinance Implementing the Federal Immission Control Act - 12.BImSchV : Is not subject of the 12. BImSchV (Hazardous Incident Ordinance)

Netherlands

SZW-lijst van kankerverwekkende stoffen : Quartz is listed

SZW-lijst van mutagene stoffen : None of the components are listed

NIET-limitatieve lijst van voor de voortplanting giftige stoffen – Borstvoeding : None of the components are listed

NIET-limitatieve lijst van voor de voortplanting giftige stoffen – Vruchtbaarheid : None of the components are listed

NIET-limitatieve lijst van voor de voortplanting giftige stoffen – Ontwikkeling : Methanol is listed

Denmark

Classification remarks : Emergency management guidelines for the storage of flammable liquids must be followed

Recommendations Danish Regulation : Young people below the age of 18 years are not allowed to use the product
Pregnant/breastfeeding women working with the product must not be in direct contact with the product

15.2. Chemical safety assessment

Chemical safety assessments for substances in this mixture were not carried out.

SECTION 16: Other information

Sources of key data used to compile the datasheet : REGULATION (EC) No 1272/2008 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 16 December 2008 on classification, labelling and packaging of substances and mixtures, amending and repealing Directives 67/548/EEC and 1999/45/EC, and amending Regulation (EC) No 1907/2006.

Other information : None.

SAFETY DATA SHEET**PSX 60 Part A**

Page : 16 / 16

Revision nr : 1.0

Issue date : 07/07/2015

Supersedes :

Full text of H- and EUH-statements:

| | |
|----------------------------------|--|
| Acute Tox. 3 (Dermal) | Acute toxicity (dermal), Category 3 |
| Acute Tox. 3 (Inhalation:vapour) | Acute toxicity (inhal.), Category 3 |
| Acute Tox. 3 (Oral) | Acute toxicity Category 3 |
| Acute Tox. 4 (Oral) | Acute toxicity Category 4 |
| Aquatic Chronic 1 | Hazardous to the aquatic environment - chronic hazard category 1 |
| Aquatic Chronic 2 | Hazardous to the aquatic environment - chronic hazard category 2 |
| Eye Irrit. 2 | Serious eye damage/eye irritation Category 2 |
| Flam. Liq. 2 | Flammable liquids, Category 2 |
| Muta. 2 | Germ cell mutagenicity, hazard categories 2 |

| | |
|---------------|---|
| Repr. 1A | Reproductive toxicity, Category 1A |
| Skin Corr. 1B | Skin corrosion/irritation, Category 1B |
| Skin Irrit. 2 | Skin corrosion/irritation, Category 2 |
| Skin Sens. 1 | Skin sensitisation, hazard category 1 |
| STOT RE 1 | Specific target organ toxicity — Repeated exposure, Category 1 |
| STOT SE 1 | Specific target organ toxicity — single exposure, Category 1 |
| H225 | Highly flammable liquid and vapour. |
| H301 | Toxic if swallowed. |
| H302 | Harmful if swallowed. |
| H311 | Toxic in contact with skin. |
| H314 | Causes severe skin burns and eye damage. |
| H315 | Causes skin irritation. |
| H317 | May cause an allergic skin reaction. |
| H319 | Causes serious eye irritation. |
| H331 | Toxic if inhaled. |
| H341 | Suspected of causing genetic defects. |
| H360FD | May damage fertility. May damage the unborn child. |
| H370 | Causes damage to organs. |
| H372 | Causes damage to organs through prolonged or repeated exposure. |
| H410 | Very toxic to aquatic life with long lasting effects. |
| H411 | Toxic to aquatic life with long lasting effects. |

The contents and format of this SDS are in accordance with EEC Commission Directive 1999/45/EC, 67/548/EC, 1272/2008/EC and EEC Commission Regulation 1907/2006/EC (REACH) Annex II.

DISCLAIMER OF LIABILITY The information in this SDS was obtained from sources which we believe are reliable. However, the information is provided without any warranty, express or implied, regarding its correctness. The conditions or methods of handling, storage, use or disposal of the product are beyond our control and may be beyond our knowledge. For this and other reasons, we do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of the product. This SDS was prepared and is to be used only for this product. If the product is used as a component in another product, this SDS information may not be applicable.



SAFETY DATA SHEET

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Trade name or designation of the mixture LPS® Heavy-Duty Silicone (Aerosol)
Registration number -
Synonyms None.
Part Number 01516, M01516
Issue date 15-October-2015
Version number 03
Revision date 12-May-2017
Supersedes date 03-January-2017

1.2. Relevant identified uses of the substance or mixture and uses advised against

Identified uses An industrial lubricant designed to reduce mechanical wear and to extend equipment life of machinery where rubber and plastics are involved and where silicone can be tolerated.
Uses advised against None known.

1.3. Details of the supplier of the safety data sheet

Supplier Alsco Ltd
Company name Unit 13 Hillmead Industrial Estate
Address Marshall Road
Swindon, Wiltshire
United Kingdom SN5 5FZ
Telephone +44 1793 733 900
In Case of Emergency +001 703-527-3887
Manufacturer
Company name ITW Pro Brands
Address 4647 Hugh Howell Rd., Tucker, GA 30084 (U.S.A.)
Website <http://www.lpslabs.com>
e-mail lpssds@itwprobrands.com

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

The mixture has been assessed and/or tested for its physical, health and environmental hazards and the following classification applies.

Classification according to Directive 67/548/EEC or 1999/45/EC as amended

Classification R10

The full text for all R-phrases is displayed in section 16.

Classification according to Regulation (EC) No 1272/2008 as amended

Physical hazards
Aerosols Category 2 H223 - Flammable aerosol.
H229 - Pressurized container: May burst if heated.

Hazard summary

Physical hazards Flammable.
Health hazards Occupational exposure to the substance or mixture may cause adverse health effects.
Environmental hazards Not classified for hazards to the environment.
Specific hazards None known.
Main symptoms Direct contact with eyes may cause temporary irritation.

2.2. Label elements

Label according to Regulation (EC) No. 1272/2008 as amended

Contains: 4-chloro-3-methylphenol Sodium Salt, Naphtha, Petroleum, Hydrotreated Heavy, Petroleum gases, Liquefied, Sweetened, Poly (Dimethylsiloxane), Sodium Benzoate, Sorbitan monooleate

Hazard pictograms**Signal word**

Warning

Hazard statementsH223
H229Flammable aerosol.
Pressurized container: May burst if heated.**Precautionary statements****Prevention**P210
P211
P251Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
Do not spray on an open flame or other ignition source.
Do not pierce or burn, even after use.**Response**

Wash hands after handling.

Storage

P410 + P412

Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal

Dispose of waste and residues in accordance with local authority requirements.

Supplemental label information None known.**2.3. Other hazards** None known.**SECTION 3: Composition/information on ingredients****3.2. Mixtures****General information**

| Chemical name | % | CAS-No. / EC No. | REACH Registration No. | INDEX No. | Notes |
|--|---------|--|------------------------|--------------|--------------|
| Naphtha, Petroleum, Hydrotreated Heavy | 10 - 20 | 64742-48-9 265-150-3 | - | 649-327-00-6 | |
| Classification: | | DSD: Xn;R65, R66 CLP: Asp. Tox. 1;H304 | | | P P |
| Petroleum gases, Liquefied, Sweetened | 10 - 20 | 68476-86-8 270-705-8 | - | 649-203-00-1 | |
| Classification: | | DSD: F+;R12, Carc. Cat. 1;R45, Muta. Cat. 2;R46 CLP: Muta. 1B;H340, Carc. 1A;H350 | | | K,S K,S,U |
| Poly (Dimethylsiloxane) | 1 - 3 | 63148-62-9 | - | - | |
| Classification: | | DSD: N;R51/53 CLP: Aquatic Chronic 2;H411 | | | |
| 4-chloro-3-methylphenol Sodium Salt | 0,1 - 1 | 15733-22-9 239-825-8 | - | - | |
| Classification: | | DSD: - CLP: - | | | |
| Sodium Benzoate | 0,1 - 1 | 532-32-1 208-534-8 | - | - | |
| Classification: | | DSD: - CLP: - | | | |
| Sorbitan monooleate | 0,1 - 1 | 1338-43-8 215-665-4 | - | - | |
| Classification: | | DSD: - CLP: - | | | |

List of abbreviations and symbols that may be used above

DSD: Directive 67/548/EEC.

CLP: Regulation No. 1272/2008.

#: This substance has been assigned Union workplace exposure limit(s).

M: M-factor

PBT: persistent, bioaccumulative and toxic substance.

vPvB: very persistent and very bioaccumulative substance.

All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

Note K: The classification as a carcinogen or mutagen need not apply if it can be shown that the substance contains less than 0,1 % w/w 1,3-butadiene (EINECS No 203-450-8).

Note P: The classification as a carcinogen or mutagen need not apply if it can be shown that the substance contains less than 0,1 % w/w benzene (EINECS No 200-753-7).

Note S: This substance may not require a label according to Article 17 (see section 1.3 of Annex I) (Table 3.1). This substance may not require a label according to Article 23 of Directive 67/548/EEC (see section 8 of Annex VI to that Directive) (Table 3.2).

Note U: When put on the market gases have to be classified as "Gases under pressure", in one of the groups compressed gas, liquefied gas, refrigerated liquefied gas or dissolved gas. The group depends on the physical state in which the gas is packaged and therefore has to be assigned case by case.

Composition comments The full text for all R- and H-phrases is displayed in section 16.

SECTION 4: First aid measures

General information Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

4.1. Description of first aid measures

Inhalation Move to fresh air. Call a physician if symptoms develop or persist.

Skin contact Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.

Eye contact Rinse with water. Get medical attention if irritation develops and persists.

Ingestion In the unlikely event of swallowing contact a physician or poison control centre. Rinse mouth.

4.2. Most important symptoms and effects, both acute and delayed Skin irritation. May cause redness and pain.

4.3. Indication of any immediate medical attention and special treatment needed Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

SECTION 5: Firefighting measures

General fire hazards Flammable aerosol.

5.1. Extinguishing media

Suitable extinguishing media Water spray. Alcohol resistant foam. Powder. Carbon dioxide (CO₂).

Unsuitable extinguishing media Do not use water jet as an extinguisher, as this will spread the fire.

5.2. Special hazards arising from the substance or mixture Contents under pressure. Pressurised container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

5.3. Advice for firefighters

Special protective equipment for firefighters Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

Special fire fighting procedures Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Specific methods Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. Use water spray to cool unopened containers. In the event of fire and/or explosion do not breathe fumes.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

For non-emergency personnel Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. Use personal protection recommended in Section 8 of the SDS.

For emergency responders Keep unnecessary personnel away. Use personal protection recommended in Section 8 of the SDS.

6.2. Environmental precautions Avoid discharge into drains, water courses or onto the ground.

6.3. Methods and material for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Stop leak if you can do so without risk. Use water spray to reduce vapours or divert vapour cloud drift. Isolate area until gas has dispersed. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil etc) away from spilled material.

Large Spills: Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Scoop up used absorbent into drums or other appropriate container. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use.

6.4. Reference to other sections

Use personal protection recommended in Section 8 of the SDS. For waste disposal, see section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Pressurised container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

7.2. Conditions for safe storage, including any incompatibilities

Level 1 Aerosol.

Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C. Keep away from heat, sparks and open flame. This material can accumulate static charge which may cause spark and become an ignition source. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

7.3. Specific end use(s)

Not available.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Occupational exposure limits

Germany. DFG MAK List (advisory OELs). Commission for the Investigation of Health Hazards of Chemical Compounds in the Work Area (DFG)

| Components | Type | Value |
|---|------|-----------------------|
| Naphtha, Petroleum, Hydrotreated Heavy (CAS 64742-48-9) | TWA | 300 mg/m ³ |
| | | 50 ppm |

Romania. OELs. Protection of workers from exposure to chemical agents at the workplace

| Components | Type | Value |
|--|------|-----------------------|
| Poly (Dimethylsiloxane) (CAS 63148-62-9) | STEL | 300 mg/m ³ |
| | TWA | 200 mg/m ³ |

Switzerland. SUVA Grenzwerte am Arbeitsplatz

| Components | Type | Value |
|---|------|---------------------------------|
| Naphtha, Petroleum, Hydrotreated Heavy (CAS 64742-48-9) | STEL | 600 mg/m ³ |
| | | 100 ppm |
| | TWA | 300 mg/m ³ 50 ppm |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Recommended monitoring procedures

Follow standard monitoring procedures.

Derived no effect levels (DNELs)

Not available.

Predicted no effect concentrations (PNECs)

Not available.

8.2. Exposure controls

| | |
|--|--|
| Appropriate engineering controls | Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product. |
| Individual protection measures, such as personal protective equipment | |
| General information | Use personal protective equipment as required. Personal protection equipment should be chosen according to the CEN standards and in discussion with the supplier of the personal protective equipment. |
| Eye/face protection | Wear safety glasses with side shields (or goggles). |
| Skin protection | |
| - Hand protection | Wear appropriate chemical resistant gloves. |
| - Other | Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended. |
| Respiratory protection | In case of insufficient ventilation, wear suitable respiratory equipment. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| Hygiene measures | When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |
| Environmental exposure controls | Environmental manager must be informed of all major releases. |

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Appearance

| | |
|---|-----------------------------------|
| Physical state | Gas. |
| Form | Aerosol |
| Colour | White. |
| Odour | Mild. |
| Odour threshold | Not established |
| pH | 9,1 |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 100 °C (212 °F) |
| Flash point | 61,1 °C (142,0 °F) Tag closed cup |
| Evaporation rate | < 1 BuAc |
| Flammability (solid, gas) | Flammable gas. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1,3 % |
| Flammability limit - upper (%) | 9,5 |
| Vapour pressure | 17,5 mm Hg @ 20°C |
| Vapour density | > 1 |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Emulsifies |
| Partition coefficient (n-octanol/water) | < 1 |
| Auto-ignition temperature | > 300 °C (> 572 °F) |
| Decomposition temperature | Not available. |
| Viscosity | 5000 - 12000 cP @ 25°C |
| Explosive properties | Not explosive. |
| Oxidising properties | Not oxidising. |

9.2. Other information

| | |
|---------------------------|-----------------|
| Density | 7,82 |
| Heat of combustion | < 20 kJ/g |
| Percent volatile | Not established |

| | |
|------------------|---|
| Specific gravity | 0,92 - 0,94 |
| VOC | 20 % per U.S. State and Federal Consumer Product Regulations. |

SECTION 10: Stability and reactivity

| | |
|--|---|
| 10.1. Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| 10.2. Chemical stability | Material is stable under normal conditions. |
| 10.3. Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| 10.4. Conditions to avoid | Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| 10.5. Incompatible materials | Strong oxidising agents. |
| 10.6. Hazardous decomposition products | Carbon oxides. |

SECTION 11: Toxicological information

General information Occupational exposure to the substance or mixture may cause adverse effects.

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | Prolonged inhalation may be harmful. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | May cause discomfort if swallowed. However, ingestion is not likely to be a primary route of occupational exposure. |

Symptoms Skin irritation. May cause redness and pain.

11.1. Information on toxicological effects

Acute toxicity Not known.

| Components | Species | Test results |
|--|--|------------------------|
| Naphtha, Petroleum, Hydrotreated Heavy (CAS 64742-48-9) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 1900 mg/kg, 24 Hours |
| Inhalation | | |
| <i>Vapour</i> | | |
| LC50 | Rat | > 4,96 mg/l, 4 Hours |
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. | |
| Serious eye damage/eye irritation | Direct contact with eyes may cause temporary irritation. | |
| Respiratory sensitisation | Not a respiratory sensitizer. | |
| Skin sensitisation | This product is not expected to cause skin sensitisation. | |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. | |
| Carcinogenicity | | |
| Hungary. 26/2000 EüM Ordinance on protection against and preventing risk relating to exposure to carcinogens at work (as amended) | | |
| Naphtha, Petroleum, Hydrotreated Heavy (CAS 64742-48-9) | | |
| Petroleum gases, Liquefied, Sweetened (CAS 68476-86-8) | | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. | |
| Specific target organ toxicity - single exposure | Not classified. | |
| Specific target organ toxicity - repeated exposure | Not classified. | |
| Aspiration hazard | Not an aspiration hazard. | |
| Mixture versus substance information | No information available. | |
| Other information | None known. | |

SECTION 12: Ecological information

12.1. Toxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test results |
|--|--|---|
| Poly (Dimethylsiloxane) (CAS 63148-62-9) | | |
| Aquatic | | |
| Fish | LC50 | Channel catfish (<i>Ictalurus punctatus</i>) 2,36 - 4,15 mg/l, 96 hours |
| Sodium Benzoate (CAS 532-32-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| 12.2. Persistence and degradability | No data is available on the degradability of this product. | |
| 12.3. Bioaccumulative potential | | |
| Partition coefficient n-octanol/water (log Kow) | | |
| LPS® Heavy-Duty Silicone (Aerosol) | < 1 | |
| Bioconcentration factor (BCF) | Not available. | |
| 12.4. Mobility in soil | No data available. | |
| 12.5. Results of PBT and vPvB assessment | Not available. | |
| 12.6. Other adverse effects | None known. | |

SECTION 13: Disposal considerations

13.1. Waste treatment methods

| | |
|-------------------------------------|---|
| Residual waste | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers. |
| EU waste code | The Waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Disposal methods/information | Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Special precautions | Dispose in accordance with all applicable regulations. |

SECTION 14: Transport information

ADR

| | |
|---|---|
| 14.1. UN number | UN1950 |
| 14.2. UN proper shipping name | Aerosols, flammable |
| 14.3. Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Hazard No. (ADR) | Not available. |
| Tunnel restriction code | Not available. |
| 14.4. Packing group | Not available. |
| 14.5. Environmental hazards | No. |
| 14.6. Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

RID

| | |
|---|---|
| 14.1. UN number | UN1950 |
| 14.2. UN proper shipping name | Aerosols, flammable |
| 14.3. Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| 14.4. Packing group | Not available. |
| 14.5. Environmental hazards | No. |
| 14.6. Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

ADN

| | |
|------------------------------------|---|
| 14.1. UN number | UN1950 |
| 14.2. UN proper shipping name | Aerosols, flammable |
| 14.3. Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| 14.4. Packing group | Not available. |
| 14.5. Environmental hazards | No. |
| 14.6. Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IATA

| | |
|------------------------------------|---|
| 14.1. UN number | UN1950 |
| 14.2. UN proper shipping name | Aerosols, flammable |
| 14.3. Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| 14.4. Packing group | Not available. |
| 14.5. Environmental hazards | No. |
| 14.6. Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|------------------------------------|---|
| 14.1. UN number | UN1950 |
| 14.2. UN proper shipping name | Aerosols, flammable |
| 14.3. Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| 14.4. Packing group | Not available. |
| 14.5. Environmental hazards | |
| Marine pollutant | No. |
| EmS | Not available. |
| 14.6. Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

14.7. Transport in bulk according to Annex II of Marpol and the IBC Code

Not applicable.

ADN; ADR; IATA; IMDG; RID



SECTION 15: Regulatory information

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

EU regulations

Regulation (EC) No. 1005/2009 on substances that deplete the ozone layer, Annex I and II, as amended

Not listed.

Regulation (EC) No. 850/2004 On persistent organic pollutants, Annex I as amended

Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 1 as amended

Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 2 as amended
Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 3 as amended
Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex V as amended
Not listed.

Regulation (EC) No. 166/2006 Annex II Pollutant Release and Transfer Registry, as amended
Not listed.

Regulation (EC) No. 1907/2006, REACH Article 59(10) Candidate List as currently published by ECHA
Not listed.

Authorisations

Regulation (EC) No. 1907/2006, REACH Annex XIV Substances subject to authorization, as amended
Not listed.

Restrictions on use

Regulation (EC) No. 1907/2006, REACH Annex XVII Substances subject to restriction on marketing and use as amended

Petroleum gases, Liquefied, Sweetened (CAS 68476-86-8)
Naphtha, Petroleum, Hydrotreated Heavy (CAS 64742-48-9)

Directive 2004/37/EC: on the protection of workers from the risks related to exposure to carcinogens and mutagens at work, as amended.

Naphtha, Petroleum, Hydrotreated Heavy (CAS 64742-48-9)
Petroleum gases, Liquefied, Sweetened (CAS 68476-86-8)

Other EU regulations

Directive 2012/18/EU on major accident hazards involving dangerous substances, as amended

Petroleum gases, Liquefied, Sweetened (CAS 68476-86-8)

Other regulations

The product is classified and labelled in accordance with Regulation (EC) 1272/2008 (CLP Regulation) as amended. This Safety Data Sheet complies with the requirements of Regulation (EC) No 1907/2006, as amended.

National regulations

Follow national regulation for work with chemical agents.

15.2. Chemical safety assessment

No Chemical Safety Assessment has been carried out.

SECTION 16: Other information

List of abbreviations

Not available.

References

Not available.

Information on evaluation method leading to the classification of mixture

The classification for health and environmental hazards is derived by a combination of calculation methods and test data, if available.

Full text of any statements or R-phrases and H-statements under Sections 2 to 15

R10 Flammable.
R12 Extremely flammable.
R45 May cause cancer.
R46 May cause heritable genetic damage.
R51/53 Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.
R65 Harmful: may cause lung damage if swallowed.
R66 Repeated exposure may cause skin dryness or cracking.
H304 May be fatal if swallowed and enters airways.
H340 May cause genetic defects.
H350 May cause cancer.
H411 Toxic to aquatic life with long lasting effects.

Revision information

This document has undergone significant changes and should be reviewed in its entirety.

Training information

Follow training instructions when handling this material.

Disclaimer

ITW Pro Brands cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

Lucas SAE 80W-90 Gear Oil



Section 1. Identification

GHS product identifier : Lucas SAE 80W-90 Gear Oil
Other means of identification : Not available.
Product number : 10043, 10046, 10066, 10067, 10069

Relevant identified uses of the substance or mixture and uses advised against

Lubricating oil.

Supplier's details : Lucas Oil Products, Inc
302 North Sheridan Street
Corona, California 92880-2067
Toll Free: (800) 342-2512
Tel: (951) 270-0154
Fax: (951) 270-1902
Website: www.LucasOil.com

Emergency telephone number (with hours of operation) : (951) 493-1149
(951) 847-5949
Markn@lucasoil.com

7:00A.M. to 5:00P.M. Monday thru Friday

Section 2. Hazards identification

OSHA/HCS status : While this material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200), this SDS contains valuable information critical to the safe handling and proper use of the product. This SDS should be retained and available for employees and other users of this product.

Classification of the substance or mixture : Not classified.

GHS label elements

Signal word : No signal word.

Hazard statements : No known significant effects or critical hazards.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Not applicable.

Response : Not applicable.

Storage : Not applicable.

Disposal : Not applicable.

Hazards not otherwise classified : None known.





Section 3. Composition/information on ingredients

Substance/mixture : Mixture
 Other means of identification : Not available.

CAS number/other identifiers

CAS number : Not applicable.
 Product code : Not available.

| Ingredient name | % | CAS number |
|--|--------------------|--------------------------|
| Lubricating oils, petroleum, c>25, hydrotreated bright stock-based Dec-1-ene, oligomers, hydrogenated | 30 - 60 10 - 30 | 72623-83-7 68037-01-4 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Get medical attention if irritation occurs.

Inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if symptoms occur. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.

Skin contact : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur.

Ingestion : Wash out mouth with water. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Do not induce vomiting unless directed to do so by medical personnel. Get medical attention if symptoms occur.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Inhalation : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Over-exposure signs/symptoms

Eye contact : No known significant effects or critical hazards.

Inhalation : No known significant effects or critical hazards.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.

Specific treatments : No specific treatment.

Protection of first-aiders : No action shall be taken involving any personal risk or without suitable training.

See toxicological information (Section 11)



Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media : None known.

Specific hazards arising from the chemical : No specific fire or explosion hazard.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
nitrogen oxides
sulfur oxides
metal oxide/oxides

Special protective actions for fire-fighters : No special precaution is required.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Put on appropriate personal protective equipment.

For emergency responders : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill : Stop leak if without risk. Move containers from spill area. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8).

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.



Section 7. Handling and storage

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|--|--|
| Lubricating oils, petroleum, c>25, hydrotreated bright stock-based | ACGIH TLV (United States, 3/2012). TWA: 5 mg/m ³ 8 hours. Form: Inhalable fraction NIOSH REL (United States, 6/2009). TWA: 5 mg/m ³ 10 hours. Form: Mist STEL: 10 mg/m ³ 15 minutes. Form: Mist OSHA PEL (United States, 6/2010). TWA: 5 mg/m ³ 8 hours. |

Appropriate engineering controls : No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne contaminants. If this product contains ingredients with exposure limits, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure below any recommended or statutory limits.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Use a properly fitted, air-purifying or supplied air respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.



Section 9. Physical and chemical properties

Appearance

| | |
|--|---|
| Physical state | : Liquid. [Clear.] |
| Color | : Amber. |
| Odor | : Petroleum. Sulfur. |
| Odor threshold | : Not available. |
| pH | : Not available. |
| Melting point | : Not available. |
| Boiling point | : >260°C (>500°F) |
| Flash point | : Closed cup: 212.77°C (415°F) |
| Burning time | : Not applicable. |
| Burning rate | : Not applicable. |
| Evaporation rate | : Not available. |
| Flammability (solid, gas) | : Not available. |
| Lower and upper explosive (flammable) limits | : Not available. |
| Vapor pressure | : Not available. |
| Vapor density | : Not available. |
| Relative density | : 0.9042 |
| Solubility | : Negligible at 25°C |
| Solubility in water | : Not available. |
| Partition coefficient: n-octanol/water | : Not available. |
| Auto-ignition temperature | : Not available. |
| Decomposition temperature | : Not available. |
| SADT | : Not available. |
| Viscosity | : Kinematic (100°C (212°F)): 0.15 cm ² /s (15 cSt) |

Section 10. Stability and reactivity

| | |
|------------------------------------|--|
| Reactivity | : No specific test data related to reactivity available for this product or its ingredients. |
| Chemical stability | : The product is stable. |
| Possibility of hazardous reactions | : Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | : No specific data. |
| Incompatible materials | : Reactive or incompatible with the following materials: oxidizing materials. |
| Hazardous decomposition products | : Under normal conditions of storage and use, hazardous decomposition products should not be produced. |

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

There is no data available.

Irritation/Corrosion

Skin : There is no data available.

Section 11. Toxicological information

Eyes : There is no data available.

Respiratory : There is no data available.

Sensitization

Skin : There is no data available.

Respiratory : There is no data available.

Mutagenicity

There is no data available.

Carcinogenicity

There is no data available.

Reproductive toxicity

There is no data available.

Teratogenicity

There is no data available.

Specific target organ toxicity (single exposure)

There is no data available. **Specific target organ**

toxicity (repeated exposure) There is no data available.

Aspiration hazard

| Name | Result |
|---|--|
| Lubricating oils, petroleum, c>25, hydrotreated bright stock-based Dec-1-ene, oligomers, hydrogenated | ASPIRATION HAZARD - Category 1 ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Inhalation : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No known significant effects or critical hazards.

Inhalation : No known significant effects or critical hazards.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : No known significant effects or critical hazards.

Potential delayed effects : No known significant effects or critical hazards.

Long term exposure

Potential immediate effects : No known significant effects or critical hazards.

Potential delayed effects : No known significant effects or critical hazards.

Potential chronic health effects

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.



Section 11. Toxicological information

- Mutagenicity** : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

There is no data available.

Section 12. Ecological information

Toxicity

There is no data available.

Persistence and degradability

There is no data available.

Bioaccumulative potential

There is no data available.

Mobility in soil

- Soil/water partition coefficient (K_{oc})** : There is no data available.

- Other adverse effects** : No known significant effects or critical hazards.

Section 13. Disposal considerations

- Disposal methods** : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | IMDG | IATA |
|----------------------------|--------------------|----------------|----------------|
| UN number | Not regulated. | Not regulated. | Not regulated. |
| UN proper shipping name | - | - | - |
| Transport hazard class(es) | - | - | - |
| Packing group | - | - | - |





Section 14. Transport information

| | | | |
|------------------------|-----|-----|-----|
| Environmental hazards | No. | No. | No. |
| Additional information | - | - | - |

Special precautions for user : Transport within user's premises: always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) CDR Exempt/Partial exemption: Not determined
 United States inventory (TSCA 8b): All components are listed or exempted.
 Clean Water Act (CWA) 307: Antimony, dialkyl dithiocarbamate

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Not applicable.

Composition/information on ingredients

No products were found.

SARA 313

| | Product name | CAS number | % |
|---------------------------------|-----------------------------------|------------|-------|
| Form R - Reporting requirements | Antimony, dialkyl dithiocarbamate | 15890-25-2 | 1 - 5 |
| Supplier notification | Antimony, dialkyl dithiocarbamate | 15890-25-2 | 1 - 5 |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : None of the components are listed.

New York : None of the components are listed.





Section 15. Regulatory information

- [New Jersey](#) : The following components are listed: Lubricating oils, petroleum, c>25, hydrotreated bright stock-based; Distillates (petroleum), hydrotreated heavy paraffinic; Distillates (petroleum), hydrotreated heavy naphthenic; Antimony, dialkyl dithiocarbamate
- [Pennsylvania](#) : The following components are listed: Antimony, dialkyl dithiocarbamate
- [California Prop. 65](#)
No products were found.
- [International regulations](#)
- [International lists](#) : Australia inventory (AICS): All components are listed or exempted.
China inventory (IECSC): All components are listed or exempted.
Japan inventory: Not determined.
Korea inventory: All components are listed or exempted.
Malaysia Inventory (EHS Register): Not determined.
New Zealand Inventory of Chemicals (NZIoC): All components are listed or exempted.
Philippines inventory (PICCS): All components are listed or exempted.
Taiwan inventory (CSNN): Not determined.
- [Chemical Weapons Convention List Schedule I Chemicals](#) : Not listed
- [Chemical Weapons Convention List Schedule II Chemicals](#) : Not listed
- [Chemical Weapons Convention List Schedule III Chemicals](#) : Not listed

Section 16. Other information

[Hazardous Material Information System \(U.S.A.\)](#)

Health : 0 Flammability : 1 Physical hazards : 0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

[National Fire Protection Association \(U.S.A.\)](#)

Health : 0 Flammability : 1 Instability : 0

Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

[History](#)

- [Date of issue mm/dd/yyyy](#) : 12/30/2012
- [Version](#) : 1
- [Revised Section\(s\)](#) : Not applicable.
- [Prepared by](#) : KMK Regulatory Services Inc.



Section 16. Other information

Key to abbreviations

- : ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

11/10/2020

AEROKROIL

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

| | |
|----------------------------|--|
| Product Name: | AEROKROIL |
| Product Use: | Penetrant/Lubricant for Industrial Use |
| Manufacturer: | Kano Laboratories, Inc., 1000 E. Thompson Lane Nashville, TN 37211 |
| Emergency Phone Number: | Chemtrec 1 (800) 424-9300 |
| Manufacturer Phone Number: | 615-833-4101 |
| Website: | www.kroil.com |
| SDS Date of Preparation: | November 10, 2020 |

SECTION 2: HAZARDS IDENTIFICATION

GHS / HAZCOM 2012 Classification:

| HEALTH | PHYSICAL |
|---|--|
| Skin Irritation Category 2 Eye Irritation Category 2A Aspiration Hazard Category 1 Skin Sensitization Category 1 | Flammable Aerosol Category 2 Gas Under Pressure: Compressed Gas |

Label Elements

DANGER!

Flammable aerosol.

Contains gas under pressure: may explode if heated. Causes skin irritation.

Causes serious eye irritation.

May cause an allergic skin reaction.

May be fatal if swallowed and enters airways.

Keep away from heat, sparks, open flames, and hot surfaces. No smoking. Do not spray on an open flame or other ignition source.

Pressurized container. Do not pierce or burn, even after use.

Wash thoroughly after handling.

Contaminated clothing must not be allowed out of the workplace.

Wear protective gloves and eye protection.

IF SWALLOWED: Immediately call a POISON CENTER. Do NOT induce vomiting.

IF ON SKIN: Wash with plenty of soap and water. If skin irritation or rash occurs: Get medical attention.

Take off contaminated clothing and wash it before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing. If eye irritation persists: Get medical attention.

In case of fire: Use carbon dioxide, dry chemical or foam to extinguish. Protect from sunlight.

Do not expose to temperatures exceeding 50°C/122°F.

Store locked up.

Dispose of contents and container in accordance with local and national regulations.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

| CHEMICAL NAME | CAS# | % |
|---|--------------------------|--------|
| Severely Hydrotreated Petroleum Distillates | 64742-52-5 64742-53-6 | 30-50 |
| LVP Aliphatic Hydrocarbon | 64742-47-8 | 20-40 |
| Proprietary Additive | Proprietary | 5-15 |
| Diisobutyl Ketone | 108-83-8 | 5-15 |
| Aliphatic Alcohol #1 | 123-42-2 | 1 - <3 |
| Aliphatic Alcohol #2 | 78-83-1 | 1 - <3 |
| Carbon Dioxide Propellant | 124-38-9 | 1-5 |

The exact percentage has been withheld as a trade secret or is a variation in formula.

SECTION 4: FIRST AID MEASURES

EYE: Rinse thoroughly with water for several holding the eye lids open to be sure the material is washed out. Get medical attention if irritation develops or persists.

SKIN: Remove contaminated clothing. Wash contact area thoroughly with soap and water. Get medical attention if irritation or symptoms of exposure develop. Launder clothing before re-use.

INHALATION: Remove victim to fresh air. Give artificial respiration if needed. If breathing is difficult, oxygen should be administered by qualified personnel. Get medical attention if symptoms develop.

INGESTION: DO NOT induce vomiting. Keep the victim calm and warm. Never give anything by mouth to an unconscious or drowsy person. Get immediate medical attention.

MOST IMPORTANT SYMPTOMS AND EFFECTS, ACUTE AND DELAYED: May cause eye and skin irritation. Inhalation of vapors or mist may cause respiratory irritation and central nervous system effects such as headache, dizziness, nausea and vomiting. Harmful or fatal if swallowed. Aspiration into the lungs during ingestion or vomiting may cause lung damage. May cause an allergic skin reaction.

INDICATION OF IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT, IF NEEDED: If swallowed, get immediate medical attention.

SECTION 5: FIRE FIGHTING MEASURES

SUITABLE (AND UNSUITABLE) EXTINGUISHING MEDIA: Use carbon dioxide, dry chemical or foam. Water may be ineffective but can be used to cool containers and structures.

SPECIFIC HAZARDS ARISING FROM THE CHEMICAL: Contents under pressure. Keep away from heat and open flames. Container may rupture or explode in the heat of a fire. Prolonged exposure to temperatures above 120oF may cause cans to burst. Vapors are heavier than air and may travel along surfaces to remote ignition sources and flash back.

Never use welding or cutting torch on or near containers (even empty) because product can ignite explosively. Combustion products may be hazardous: Oxides of carbon, organic compounds, smoke and fumes.

SPECIAL PROTECTIVE EQUIPMENT AND PRECAUTIONS FOR FIRE-FIGHTERS: Wear NIOSH approved positive pressure, self-contained breathing apparatus and full protective clothing. Cool fire exposed containers with water. Protect against bursting cans.

SECTION 6: ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT, AND EMERGENCY PROCEDURES: Wear appropriate protective clothing to prevent eye and skin contact including impervious gloves, safety goggles and respirator if needed. Remove all ignition sources such as open flames, spark producing equipment, pilot lights, etc. Ventilate the area with explosion-proof equipment.

ENVIRONMENTAL PRECAUTIONS: Avoid release to the environment. Report spills and releases as required to appropriate authorities.

METHODS AND MATERIALS FOR CONTAINMENT AND CLEANING UP: Place leaking can in a pail or pan in a well-ventilated area until the pressure has been released. Cover liquid with an inert absorbent material and collect into an appropriate container for disposal.

SECTION 7: HANDLING AND STORAGE

PRECAUTIONS FOR SAFE HANDLING: Avoid breathing vapors, aerosols and mists. Use with adequate ventilation. Avoid contact with the eyes, skin and clothing. Wash exposed skin thoroughly with soap and water after use. Keep product away from heat, sparks, flames and all other sources of ignition. No smoking in storage or use areas. Do not cut, braze, solder, grind or weld on or near containers. Contents under pressure. Do not puncture or incinerate container.

CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES: Store in a cool, well ventilated area at temperatures below 120°F. Do not store in direct sunlight. Store as a Level 3 aerosol.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

| CHEMICAL NAME | EXPOSURE LIMITS |
|---|--|
| Severely Hydrotreated Petroleum Distillates (as mineral oil) | 5 mg/m ³ TWA OSHA PEL (as oil mist) 5 mg/m ³ TWA ACGIH TLV (inhalable fraction) |
| LVP Aliphatic Hydrocarbon | 166 ppm TWA Manufacturer Recommended (vapor) |
| Proprietary Additive | None Established |
| Diisobutyl Ketone | 50 ppm TWA OSHA PEL 25 ppm TWA ACGIH TLV |
| Aliphatic Alcohol #1 | 50 ppm OSHA TWA PEL 50 ppm TWA ACGIH TLV |
| Aliphatic Alcohol #2 | 100 ppm TWA OSHA PEL 50 ppm TWA ACGIH TLV |
| Carbon Dioxide Propellant | 5000 ppm TWA OSHA PEL 5000 ppm TWA ACGIH TLV 30000 ppm STEL ACGIH TLV |

APPROPRIATE ENGINEERING CONTROLS: Use with adequate general or local exhaust ventilation to maintain concentrations below the occupational exposure limits. Use explosion proof electrical equipment and wiring where required.

PERSONAL PROTECTIVE EQUIPMENT:

RESPIRATORY PROTECTION: If the exposure limits listed above are exceeded, a NIOSH approved respirator with organic vapor cartridges may be used. For higher exposures, a supplied air respirator may be required. Respirator selection and use should be based on contaminant type, form and concentration. Follow OSHA 1910.134, ANSI Z88.2 and good Industrial Hygiene practice.

HAND PROTECTION: Impervious gloves are recommended when needed to avoid skin contact.

EYE PROTECTION: Chemical safety goggles recommended.

SKIN PROTECTION: Impervious clothing as required to prevent skin contact and contamination of personal clothing.

HYGIENE MEASURES: Suitable eye wash and washing facilities should be available in the work area.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|----------------------------------|---|
| Appearance: | Slightly reddish liquid packaged as an aerosol | Odor: | Solvent |
| Odor Threshold: | Not available | pH: | Not available |
| Melting/Freezing Point: | Not available | Boiling Point/Range: | Not available |
| Flash Point: | 132°F (55.5°C) TOC | Evaporation Rate: | Not available |
| Flammability: (Solid, Gas) | Not applicable | Flammability Limits: | 10.9% (aliphatic alcohol #2) LEL: 0.7% (petroleum distillates) |
| Vapor Pressure: | Not available | Vapor Density: | Not available |
| Relative Density: | 0.8596 | Solubilities: | Negligible in Water |
| Partition Coefficient: (N-Octanol/Water) | Not available | Autoignition Temperature: | Not available |
| Decomposition Temperature: | Not available | Viscosity: | Not available |

SECTION 10: STABILITY AND REACTIVITY

REACTIVITY: None known.

CHEMICAL STABILITY: Stable under normal conditions of storage or use.

POSSIBILITY OF HAZARDOUS REACTIONS: None known.

CONDITIONS TO AVOID: Avoid heat, sparks, flames and all other sources of ignition.

INCOMPATIBLE MATERIALS: Avoid strong oxidizing agents, reducing agents, acids and bases.

HAZARDOUS DECOMPOSITION PRODUCTS: Combustion will produce oxides of carbon, acetone, acrid fumes and smoke.

SECTION 11: TOXICOLOGICAL INFORMATION

POTENTIAL HEALTH EFFECTS:

EYE: May cause eye irritation with redness, tearing and stinging.

SKIN: May cause irritation with redness, rash, swelling. Prolonged or repeated contact may result in defatting and dermatitis. Repeated skin contact may cause sensitization (allergic skin reaction) in some individuals.

INHALATION: Inhalation of vapors or mists may cause mucous membrane and upper respiratory tract irritation and central nervous system depression. Symptoms may include coughing, wheezing, shortness of breath, headache, dizziness, drowsiness, nausea, fatigue and unconsciousness.

INGESTION: Ingestion is an unlikely route of exposure for aerosol products. Swallowing may cause gastrointestinal irritation with abdominal pain, nausea, vomiting and diarrhea and central nervous system depression with symptoms including headache, dizziness, intoxication, weakness, nausea, and vomiting. Aspiration into the lungs during ingestion or vomiting may cause lung damage.

CHRONIC HAZARDS: Aliphatic Alcohol #1 is suspected of damaging fertility or the unborn child.

CARCINOGEN STATUS: None of the components of this product at greater than 0.1% are listed as carcinogens by OSHA, IARC or NTP.

ACUTE TOXICITY: Toxicological testing has not been performed on this product as a mixture.

LVP Aliphatic Hydrocarbon: Oral rat LD50 > 5000 mg/kg; Dermal rat LD50 > 5000 mg/kg; Inhalation rat LC50 > 2.18 mg/L/4 hr.

Severely Hydrotreated Petroleum Distillates: Oral rat LD50 >5000 mg/kg, Inhalation rat LC50 >5.28 mg/L/4 hr, Dermal rabbit LD50 >2000 mg/kg

Proprietary Additive: Oral rat LD50 3200 mg/kg; Dermal rabbit LD50 5000 mg/kg

Diisobutyl Ketone: Oral rat LD50 5233 mg/kg; Dermal rat LD50 > 2000 mg/kg; Inhalation rat LC50 14.5 mg/L/4 hr.

Aliphatic Alcohol #1: Oral rat LD50 3002 mg/kg; Dermal rat LD50 > 1875 mg/kg; Inhalation rat LC50 > 7.6 mg/L/4 hr.

Aliphatic Alcohol #2: Oral rat LD50 > 2830 mg/kg; Inhalation rat LC50 24.6 mg/L/4 hr; Dermal rabbit LD50 > 2000 mg/kg

Carbon Dioxide: Inhalation rat LC50 167857 ppm/4 hr

SECTION 12: ECOLOGICAL INFORMATION

ECOTOXICITY: No toxicity data available for the product.

LVP Aliphatic Hydrocarbon: 96 hr. LC50 Pimephales promelas > 100 mg/L; 48 hr. EC50 daphnia magna >1000 mg/L; 72 hr.

EC50 Pseudokirchnerella subcapitata > 100 mg/L

Severely Hydrotreated Petroleum Distillates: 96 hr LL50 Oncorhynchus mykiss 2.5 mg/kg, 48 hr EL50 daphnia magna 1.4 mg/L, 72 hr

EL50 Pseudokirchnerella subcapitata 1.3 mg/L

Proprietary Ingredient: 48 hr. LC50 daphnia magna 17-28 mg/L

Diisobutyl Ketone: 96 hr. LC50 Oncorhynchus mykiss 30 mg/L; 48 hr. EC50 daphnia magna 37.2 mg/L, 72 hr.

Aliphatic Alcohol #1: 96 hr. LC50 Oryzias latipes >100 mg/L; 48 hr. EC50 daphnia magna >1000 mg/L; 72 hr. EC50 Pseudokirchnerella subcapitata >1000 mg/L

Aliphatic Alcohol #2: 96 hr LC50 Pimephales promelas 1430 mg/L; 48 hr EC50 daphnia pulex 1100 mg/L; 72 hr EC50 Pseudokirchnerella subcapitata 1799 mg/L

Carbon Dioxide: 96 hr LC50 Oncorhynchus mykiss 35 mg/L

PERSISTENCE AND DEGRADABILITY: Aliphatic Alcohol #1 and Aliphatic Alcohol #2 are readily biodegradable.

BIOACCUMULATIVE POTENTIAL: No data available.

MOBILITY IN SOIL: No data available

OTHER ADVERSE EFFECTS: None known

SECTION 13: DISPOSAL INFORMATION

DISPOSAL INSTRUCTIONS: Dispose of product in accordance with all local, state/provincial and federal regulations.

Do not puncture or incinerate.

CONTAMINATED PACKAGING: Offer empty packaging material to local recycling facilities.

SECTION 14: TRANSPORT INFORMATION

| | UN NUMBER | PROPER SHIPPING NAME | HAZARD CLASS | PACKING GROUP | ENVIRONMENTAL HAZARD |
|----------------------------|-----------|---------------------------------------|--------------|---------------|----------------------|
| DOT / 49 CFR GROUND | | Limited Quantity | | | |
| DOT AIR | UN1950 | Aerosols, Flammable, Limited Quantity | 2.1 | None | None |
| IMDG | UN1950 | Aerosols, Limited Quantity | 2.1 | None | None |
| IATA | UN1950 | Aerosols, Flammable, Limited Quantity | 2.1 | None | None |

Transport in bulk (according to Annex II of MARPOL 73/78 and the IBC Code): Not applicable - product is transported only in packaged form.

Special precautions: None known.

SECTION 15: REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS:


CERCLA 103 Reportable Quantity: This product has a Reportable Quantity (RQ) of 166,666 lbs. (based on the RQ for Aliphatic alcohol #2 of 5,000 lbs present at 3%) maximum. Releases above the RQ must be reported to the National Response Center. Many states have more stringent release reporting requirements. Report spills required under federal, state and local regulations

STATE REPORTING REGULATIONS:

Massachusetts Right To Know: Diacetone Alcohol 123-42-2, Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9

New Jersey Right To Know: Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9, Pine Oil 8002-09-3

Pennsylvania Right To Know: Diacetone Alcohol 123-42-2, Isbutanol 78-83-1, Diisobutyl Ketone 108-83-8, Carbon Dioxide 124-38-9

California Proposition 65:  **WARNING:** This product can expose you to chemicals including beta-myrcene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

SARA TITLE III:

Hazard Category for Section 311/312: Refer to Section 2 for the OSHA Hazard Classification

Section 313 Toxic Chemicals: This product contains the following chemicals subject to SARA Title III Section 313 Reporting requirements: None.

Section 302 Extremely Hazardous Substances (TPQ): None

EPA Toxic Substances Control Act (TSCA) Status: All of the components of this product are listed on the TSCA inventory.

Canadian DSL: All of the components of this product are listed on the Canadian Domestic Substances List

SECTION 16: OTHER INFORMATION

HMIS RATINGS: Health - 2 Flammability - 4 Physical Hazard - 0

NFPA RATINGS: Health - 1 Flammability - 2 Instability - 0

SDS REVISION HISTORY: Updated formulation - Section 15

DATE OF PREPARATION: November 20, 2020

DATE OF LAST REVISION: July 01, 2020

The information contained herein has been developed based upon current available scientific data. New information may be developed from time to time which may render the conclusions of this report obsolete. Therefore, no warranty is extended as to the applicability of this information to the user's intended purpose or the consequences of its use or misuse.

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Material name : ZEP MORADO SUPER CLEANER

Material number : 000000000000085689

Manufacturer or supplier's details

Company : Zep Inc.

Address : 350 Joe Frank Harris Parkway, SE
Emerson, GA 30137

Telephone : 404-352-1680

Emergency telephone numbers**For SDS Information** : Compliance Services 1-877-428-9937**For a Medical Emergency** : 877-541-2016 Toll Free - All Calls Recorded**For a Transportation** : CHEMTREC: 800-424-9300 - All Calls Recorded.**Emergency** : In the District of Columbia 202-483-7616**Recommended use of the chemical and restrictions on use**

Recommended use : Cleaner

SECTION 2. HAZARDS IDENTIFICATION**Emergency Overview**

| | |
|------------|------------|
| Appearance | liquid |
| Colour | purple |
| Odour | ether-like |

GHS Classification

Skin corrosion : Category 1

Serious eye damage : Category 1

GHS label elements

Hazard pictograms :



Signal word : Danger

Hazard statements : H314 Causes severe skin burns and eye damage.

Precautionary statements : **Prevention:**
 P264 Wash skin thoroughly after handling.
 P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.
Response:
 P301 + P330 + P331 IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

P303 + P361 + P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.

P304 + P340 + P310 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/doctor.

P305 + P351 + P338 + P310 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor.

P363 Wash contaminated clothing before reuse.

Disposal:

P501 Dispose of contents/container in accordance with local regulation.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Concentration [%] |
|-------------------------------------|------------|-------------------|
| Alcohols, C9-11, ethoxylated | 68439-46-3 | >= 1 - < 5 |
| 2-butoxyethanol | 111-76-2 | >= 1 - < 5 |
| sodium hydroxide | 1310-73-2 | >= 1 - < 5 |
| Fatty acids, tall-oil, sodium salts | 61790-45-2 | >= 1 - < 5 |

The exact percentages of disclosed substances are withheld as trade secrets.

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
Get medical attention immediately.
- If inhaled : If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : Immediate medical treatment is necessary as untreated wounds from corrosion of the skin heal slowly and with difficulty.
Wash off immediately with plenty of water for at least 15 minutes.
If skin irritation persists, call a physician.
Remove contaminated clothing and shoes.
Wash contaminated clothing before reuse.
- In case of eye contact : Small amounts splashed into eyes can cause irreversible tissue damage and blindness.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

- Continue rinsing eyes during transport to hospital.
Remove contact lenses.
Protect unharmed eye.
Keep eye wide open while rinsing.
If eye irritation persists, consult a specialist.
- If swallowed : Keep respiratory tract clear.
Never give anything by mouth to an unconscious person.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Take victim immediately to hospital.
Do not give milk or alcoholic beverages.
- Most important symptoms and effects, both acute and delayed : Effects are immediate and delayed.
Symptoms may include blistering, irritation, burns, and pain.
Effects are dependent on exposure (dose, concentration, contact time).
Causes severe skin burns and eye damage.
Review section 2 of SDS to see all potential hazards.
- Notes to physician : Treat symptomatically. Symptoms may be delayed.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Dry chemical
Water spray jet
Alcohol-resistant foam
Carbon dioxide (CO₂)
- Unsuitable extinguishing media : High volume water jet
- Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.
- Hazardous combustion products : Carbon dioxide (CO₂)
Carbon monoxide
Smoke
- Specific extinguishing methods : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
- Further information : Collect contaminated fire extinguishing water separately. This must not be discharged into drains.
Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations.
Standard procedure for chemical fires.
- Special protective equipment for firefighters : Wear self-contained breathing apparatus for firefighting if necessary.

SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, : Use personal protective equipment.

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

- protective equipment and emergency procedures
- Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
If the product contaminates rivers and lakes or drains, inform respective authorities.
- Methods and materials for containment and cleaning up : Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust).
Keep in suitable, closed containers for disposal.

SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the application area.
Do not breathe vapours or spray mist.
Take precautionary measures against static discharges.
Provide sufficient air exchange and/or exhaust in work rooms.
Dispose of rinse water in accordance with local and national regulations.
- Conditions for safe storage : Keep container tightly closed in a dry and well-ventilated place.
Observe label precautions.
Electrical installations / working materials must comply with the technological safety standards.
- Materials to avoid : Store and keep away from, oxidizing agents and acids.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION
Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|------------------|-----------|----------------------------------|---|-----------|
| 2-butoxyethanol | 111-76-2 | TWA | 20 ppm | ACGIH |
| | | TWA | 5 ppm 24 mg/m ³ | NIOSH REL |
| | | TWA | 50 ppm 240 mg/m ³ | OSHA Z-1 |
| | | TWA | 25 ppm 120 mg/m ³ | OSHA P0 |
| | | PEL | 20 ppm 97 mg/m ³ | CAL PEL |
| sodium hydroxide | 1310-73-2 | C | 2 mg/m ³ | ACGIH |
| | | C | 2 mg/m ³ | NIOSH REL |
| | | TWA | 2 mg/m ³ | OSHA Z-1 |
| | | C | 2 mg/m ³ | OSHA P0 |

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

| | | | | |
|--|--|---|---------|---------|
| | | C | 2 mg/m3 | CAL PEL |
|--|--|---|---------|---------|

Biological occupational exposure limits

| Component | CAS-No. | Control parameters | Biological specimen | Sampling time | Permissible concentration | Basis |
|-----------------|----------|-------------------------|---------------------|--|---------------------------|-----------|
| 2-BUTOXYETHANOL | 111-76-2 | Butoxyacetic acid (BAA) | Urine | End of shift (As soon as possible after exposure ceases) | 200.mg/g Creatinine | ACGIH BEI |

Engineering measures : effective ventilation in all processing areas

Personal protective equipment

Respiratory protection : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines.

Hand protection

Material

Remarks

: Protective gloves

: The suitability for a specific workplace should be discussed with the producers of the protective gloves.

Eye protection

: Access to clean water to rinse eyes must be available, options include: eye wash stations or showers, or eye wash bottles with pure water.

Tightly fitting safety goggles

Wear face-shield and protective suit for abnormal processing problems.

Skin and body protection

: Impervious clothing

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

: When using do not eat or drink.

When using do not smoke.

Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance : liquid

Colour : purple

Odour : ether-like

Odour Threshold : No data available

pH : 13.5

Melting point/freezing point : No data available

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

| | |
|--|----------------------------------|
| Boiling point | : 98.9 °C |
| Flash point | : does not flash |
| Evaporation rate | : 1 |
| Upper explosion limit | : No data available |
| Lower explosion limit | : No data available |
| Vapour pressure | : not determined |
| Relative vapour density | : No data available |
| Density | : 1.0230 g/cm ³ |
| Solubility(ies) | |
| Water solubility | : soluble |
| Solubility in other solvents | : not determined |
| Partition coefficient: n-octanol/water | : No data available |
| Auto-ignition temperature | : not determined |
| Thermal decomposition | : No data available |
| Viscosity | |
| Viscosity, kinematic | : 6.6 mm ² /s (20 °C) |

SECTION 10. STABILITY AND REACTIVITY

| | |
|------------------------------------|---|
| Reactivity | : Stable |
| Chemical stability | : Stable under normal conditions. |
| Possibility of hazardous reactions | : No decomposition if stored and applied as directed. |
| Conditions to avoid | : Heat, flames and sparks. |
| Incompatible materials | : Acids Oxidizing agents This product contains sodium hydroxide or potassium hydroxide that may corrode some soft metals and may react with tin, zinc, aluminum to form hydrogen gas. |
| Hazardous decomposition products | : Carbon monoxide, carbon dioxide and unburned hydrocarbons (smoke). |

SECTION 11. TOXICOLOGICAL INFORMATION

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

Potential Health Effects

- Aggravated Medical Condition : None known.
- Symptoms of Overexposure : Effects are immediate and delayed. Symptoms may include blistering, irritation, burns, and pain. Effects are dependent on exposure (dose, concentration, contact time).

Carcinogenicity:

- IARC** No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
- ACGIH** Confirmed animal carcinogen with unknown relevance to humans
- OSHA** 2-butoxyethanol 111-76-2
No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.
- NTP** No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

Acute toxicity**Product:**

- Acute oral toxicity : Acute toxicity estimate : > 5,000 mg/kg
Method: Calculation method
- Acute inhalation toxicity : Acute toxicity estimate : > 200 mg/l
Exposure time: 4 h
Test atmosphere: vapour
Method: Calculation method
- Acute dermal toxicity : Acute toxicity estimate : > 5,000 mg/kg
Method: Calculation method

Components:**Alcohols, C9-11, ethoxylated:**

- Acute oral toxicity : LD50 Oral Rat: 1,400 mg/kg

2-butoxyethanol:

- Acute oral toxicity : LD50 Oral Rat: 880 mg/kg

- Acute dermal toxicity : LD50 Dermal Rabbit: 1,060 mg/kg

sodium hydroxide:

- Acute dermal toxicity : Acute toxicity estimate Rabbit: 1,350 mg/kg

Skin corrosion/irritation**Product:**

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

Remarks: Extremely corrosive and destructive to tissue.

Serious eye damage/eye irritation**Product:**

Remarks: May cause irreversible eye damage.

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

Aspiration toxicity

No data available

Further information**Product:**

Remarks: No data available

SECTION 12. ECOLOGICAL INFORMATION**Ecotoxicity****Components:****sodium hydroxide :**

Toxicity to fish : LC50 (Gambusia affinis (Mosquito fish)): 125 mg/l
Exposure time: 96 h
Test Method: static test

LC50 (Oncorhynchus tshawytscha (chinook salmon)):
152 mg/l
Exposure time: 96 h

LC50 (Oncorhynchus mykiss (rainbow trout)): 40 mg/l

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

Exposure time: 48 h

Toxicity to daphnia and other aquatic invertebrates : EC50 (Daphnia magna (Water flea)): 34 - 47 mg/l
Exposure time: 48 h

EC50 (Crangon crangon (shrimp)): 33 - 100 mg/l
Exposure time: 48 h

Persistence and degradability

No data available

Bioaccumulative potential
Product:

Partition coefficient: n-octanol/water : Remarks: No data available

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Regulation 40 CFR Protection of Environment; Part 82 Protection of Stratospheric Ozone - CAA Section 602 Class I Substances

Remarks This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

Additional ecological information : Not applicable

Components:
sodium hydroxide :

Additional ecological information : Harmful to aquatic life.

SECTION 13. DISPOSAL CONSIDERATIONS
Disposal methods

Waste from residues : Do not dispose of waste into sewer.
Do not contaminate ponds, waterways or ditches with chemical or used container.
Dispose of in accordance with local regulations.

Contaminated packaging : Empty remaining contents.
Dispose of as unused product.
Do not re-use empty containers.

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

SECTION 14. TRANSPORT INFORMATION

Transportation Regulation: 49 CFR (USA):
UN3266, Corrosive liquid, basic, inorganic, n.o.s., (SODIUM HYDROXIDE), 8, II

Transportation Regulation: IMDG (Vessel):
UN3266, CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S., (SODIUM HYDROXIDE), 8, II

Transportation Regulation: IATA (Cargo Air):
UN3266, Corrosive liquid, basic, inorganic, n.o.s., (SODIUM HYDROXIDE), 8, II

Transportation Regulation: IATA (Passenger Air):
UN3266, Corrosive liquid, basic, inorganic, n.o.s., (SODIUM HYDROXIDE), 8, II

Transportation Regulation: TDG (Canada):
UN3266, CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S., (SODIUM HYDROXIDE), 8, II

The product as delivered to the customer conforms to packaging requirements for shipment by road under US Department of Transportation (DOT) regulations. Additional transportation classifications noted above are for reference only, and not a certification or warranty of the suitability of the packaging for shipment under these alternative transport regulations.

SECTION 15. REGULATORY INFORMATION

TSCA list : No substances are subject to a Significant New Use Rule.

No substances are subject to TSCA 12(b) export notification requirements.

EPCRA - Emergency Planning and Community Right-to-Know Act
CERCLA Reportable Quantity

| Components | CAS-No. | Component RQ (lbs) | Calculated product RQ (lbs) |
|------------------|-----------|--------------------|-----------------------------|
| sodium hydroxide | 1310-73-2 | 1000 | * |

*: Calculated RQ exceeds reasonably attainable upper limit.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Skin corrosion or irritation
Serious eye damage or eye irritation

SARA 302 : No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 : The following components are subject to reporting levels established by SARA Title III, Section 313:

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

2-butoxyethanol

111-76-2

3.4 %

California Prop. 65

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.


The components of this product are reported in the following inventories:

DSL All components of this product are on the Canadian DSL
TSCA On TSCA Inventory

For information on the country notification status for other regions please contact the manufacturer's regulatory group.

Inventory Acronym and Validity Area Legend:

TSCA (USA), DSL (Canada), NDSL (Canada)

SECTION 16. OTHER INFORMATION**Further information****NFPA:****HMIS III:**

| | |
|------------------------|----------|
| HEALTH | 3 |
| FLAMMABILITY | 1 |
| PHYSICAL HAZARD | 0 |

0 = not significant, 1 =Slight,
 2 = Moderate, 3 = High
 4 = Extreme, * = Chronic

OSHA - GHS Label Information:

Hazard pictograms



Signal word

: **Danger:**

Hazard statements

: Causes severe skin burns and eye damage.

Precautionary statements

:

Prevention: Wash skin thoroughly after handling. Wear protective gloves/ protective clothing/ eye protection/ face protection.
Response: IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. IF ON SKIN (or

ZEP MORADO SUPER CLEANER

Version 4.2

Revision Date 03/31/2020

Print Date 05/29/2020

hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/doctor. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor. Wash contaminated clothing before reuse.

Disposal: Dispose of contents/container in accordance with local regulation.

| | |
|----------------|------------|
| Version: | 4.2 |
| Revision Date: | 03/31/2020 |
| Print Date: | 05/29/2020 |

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. Users should make their own investigations to determine the suitability and applicability of the information for their particular purposes. This SDS has been prepared by the Compliance Services organization supporting this manufacturer, supplier or distributor.

Zep Inc. markets products under well recognized and established brand names such as Zep®, Zep Commercial®, Zep Professional®, Enforcer®, National Chemical™, Selig™, Misty®, Next Dimension™, Petro®, i-Chem®, TimeMist®, TimeWick™, MicrobeMax®, Country Vet®, Konk®, Original Bike Spirits®, Blue Coral®, Black Magic®, Rain-X®, Niagara National™, FC Forward Chemicals®, Rexodan®, Mykal™, and a number of private labeled brands.

SAFETY DATA SHEET

1. Identification

Product identifier: NAPA MAC'S 1073 BATTERY TERMINAL PROTECTOR NON CHLORINATED

Other means of identification

SDS number: RE1000036023

Recommended restrictions

Product use: Coating

Restrictions on use: Not known.

Manufacturer/Importer/Distributor Information

Manufacturer

Company Name: NAPA BALKAMP
Address: 1601 Whitaker Rd
INDIANAPOLIS, IN 46168
Telephone: 317-837-2800
Fax:

Emergency telephone number: 1-866-836-8855

2. Hazard(s) identification

Hazard Classification

Physical Hazards

Flammable aerosol Category 1

Health Hazards

Skin Corrosion/Irritation Category 2

Serious Eye Damage/Eye Irritation Category 2A

Toxic to reproduction Category 2

Specific Target Organ Toxicity -
Single Exposure Category 3¹

Specific Target Organ Toxicity -
Repeated Exposure Category 2

Aspiration Hazard Category 1

Target Organs

1. Narcotic effect.

Environmental Hazards

Acute hazards to the aquatic
environment Category 3

Label Elements

Hazard Symbol:



Signal Word:

Danger

Hazard Statement: Extremely flammable aerosol.
Causes skin irritation.
Causes serious eye irritation.
Suspected of damaging fertility or the unborn child.
May cause drowsiness or dizziness.
May cause damage to organs through prolonged or repeated exposure.
May be fatal if swallowed and enters airways.
Harmful to aquatic life.

Precautionary Statements

Prevention: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Use only outdoors or in a well-ventilated area. Do not breathe dust/fume/gas/mist/vapors/spray. Avoid release to the environment.

Response: IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. IF ON SKIN: Wash with plenty of water. If skin irritation occurs: Get medical advice/attention. IF SWALLOWED: Immediately call a POISON CENTER/doctor. Do NOT induce vomiting. Call a POISON CENTER/doctor if you feel unwell. Specific treatment (see on this label). Take off contaminated clothing.

Storage: Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store locked up. Store in a well-ventilated place. Keep container tightly closed.

Disposal: Dispose of contents/container to an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.

Hazard(s) not otherwise classified (HNOC): None.

3. Composition/information on ingredients

Mixtures

| Chemical Identity | CAS number | Content in percent (%)* |
|---|------------|-------------------------|
| Petrolatum | 8009-03-8 | 20 - <50% |
| Benzene, methyl- | 108-88-3 | 10 - <25% |
| Propane | 74-98-6 | 10 - <20% |
| Butane | 106-97-8 | 10 - <20% |
| 2-Propanone | 67-64-1 | 10 - <20% |
| Distillates (petroleum), hydrotreated light | 64742-47-8 | 5 - <10% |

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First-aid measures

Ingestion: Call a physician or poison control center immediately. Rinse mouth. Never give liquid to an unconscious person. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Inhalation: Move to fresh air.

Skin Contact: Immediately flush with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash contaminated clothing before reuse. Get medical attention.

Eye contact: Immediately flush with plenty of water for at least 15 minutes. If easy to do, remove contact lenses. Get medical attention.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.

Hazards: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: No data available.

5. Fire-fighting measures

General Fire Hazards: Use water spray to keep fire-exposed containers cool. Fight fire from a protected location. Move containers from fire area if you can do so without risk.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical: Vapors may travel considerable distance to a source of ignition and flash back.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures: Ventilate closed spaces before entering them. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Keep upwind. See Section 8 of the SDS for Personal Protective Equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep unauthorized personnel away.

Methods and material for containment and cleaning up: Absorb spill with vermiculite or other inert material, then place in a container for chemical waste.

Notification Procedures: Prevent entry into waterways, sewer, basements or confined areas. Stop the flow of material, if this is without risk. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk.

Environmental Precautions: Do not contaminate water sources or sewer. Prevent further leakage or spillage if safe to do so. Avoid release to the environment.

7. Handling and storage

Precautions for safe handling: Avoid contact with eyes. Wash hands thoroughly after handling. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Do not handle until all safety precautions have been read and understood. Obtain special instructions before use. Use personal protective equipment as required. Avoid contact with skin.

Conditions for safe storage, including any incompatibilities: Store locked up. Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Aerosol Level 2

8. Exposure controls/personal protection

Control Parameters

Occupational Exposure Limits

| Chemical Identity | Type | Exposure Limit Values | Source |
|---|-----------|-----------------------|---|
| Petrolatum - Inhalable fraction. | TWA | 5 mg/m3 | US. ACGIH Threshold Limit Values (01 2010) |
| Petrolatum - Mist. | REL | 5 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | STEL | 10 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 5 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| Benzene, methyl- | TWA | 5 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | STEL | 150 ppm 560 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | REL | 100 ppm 375 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | TWA | 100 ppm 375 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | Ceiling | 300 ppm | US. OSHA Table Z-2 (29 CFR 1910.1000) (02 2006) |
| | TWA | 20 ppm | US. ACGIH Threshold Limit Values (2008) |
| Propane | TWA | 200 ppm | US. OSHA Table Z-2 (29 CFR 1910.1000) (02 2006) |
| | MAX. CONC | 500 ppm | US. OSHA Table Z-2 (29 CFR 1910.1000) (02 2006) |
| | STEL | 150 ppm 560 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | REL | 1,000 ppm 1,800 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| Butane | TWA | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | REL | 800 ppm 1,900 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | STEL | 1,000 ppm | US. ACGIH Threshold Limit Values (03 2018) |
| 2-Propanone | TWA | 800 ppm 1,900 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | STEL | 1,000 ppm 2,400 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | PEL | 1,000 ppm 2,400 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | TWA | 250 ppm | US. ACGIH Threshold Limit Values (03 2015) |
| | TWA | 750 ppm 1,800 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | STEL | 500 ppm | US. ACGIH Threshold Limit Values (03 2015) |
| Distillates (petroleum), hydrotreated light | REL | 250 ppm 590 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | REL | 100 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| Distillates (petroleum), hydrotreated light - Non-aerosol. - as total hydrocarbon vapor | TWA | 200 mg/m3 | US. ACGIH Threshold Limit Values (2008) |
| | TWA | 400 ppm 1,600 mg/m3 | US. ACGIH Threshold Limit Values (2008) |
| | TWA | 400 ppm 1,600 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Distillates (petroleum), hydrotreated heavy naphthenic | PEL | 500 ppm 2,000 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | REL | 5 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| Distillates (petroleum), hydrotreated heavy naphthenic - Mist. | STEL | 10 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 5 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | TWA | 5 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Distillates (petroleum), hydrotreated heavy naphthenic | Ceil_Time | 1,800 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2010) |

| | | | |
|--|-----|-----------|--|
| Distillates (petroleum), hydrotreated heavy naphthenic - Inhalable fraction. | TWA | 5 mg/m3 | US. ACGIH Threshold Limit Values (03 2014) |
| Distillates (petroleum), hydrotreated heavy naphthenic | REL | 350 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2010) |

Biological Limit Values

| Chemical Identity | Exposure Limit Values | Source |
|--|--------------------------------|---------------------|
| Benzene, methyl- (toluene: Sampling time: End of shift.) | 0.03 mg/l (Urine) | ACGIH BEL (03 2013) |
| Benzene, methyl- (o-Cresol, with hydrolysis: Sampling time: End of shift.) | 0.3 mg/g (Creatinine in urine) | ACGIH BEL (03 2013) |
| Benzene, methyl- (toluene: Sampling time: Prior to last shift of work week.) | 0.02 mg/l (Blood) | ACGIH BEL (03 2013) |
| 2-Propanone (acetone: Sampling time: End of shift.) | 25 mg/l (Urine) | ACGIH BEL (03 2015) |

Appropriate Engineering Controls No data available.

Individual protection measures, such as personal protective equipment

General information: Provide easy access to water supply and eye wash facilities. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Eye/face protection: Wear safety glasses with side shields (or goggles).

Skin Protection

Hand Protection: No data available.

Other: Wear suitable protective clothing. Wear chemical-resistant gloves, footwear, and protective clothing appropriate for the risk of exposure. Contact health and safety professional or manufacturer for specific information.

Respiratory Protection: In case of inadequate ventilation use suitable respirator. Seek advice from local supervisor.

Hygiene measures: Observe good industrial hygiene practices. Avoid contact with eyes. When using do not smoke. Do not handle until all safety precautions have been read and understood. Obtain special instructions before use. Wash contaminated clothing before reuse. Avoid contact with skin. Wash hands before breaks and immediately after handling the product.

9. Physical and chemical properties

Appearance

Physical state: liquid
Form: Spray Aerosol
Color: No data available.

Odor: No data available.

Odor threshold: No data available.

pH: No data available.

Melting point/freezing point: No data available.

Initial boiling point and boiling range: Estimated 56.05 °C

Flash Point: Estimated -104.4 °C

Evaporation rate: No data available.

| | |
|--|---------------------------|
| Flammability (solid, gas): | No data available. |
| Upper/lower limit on flammability or explosive limits | |
| Flammability limit - upper (%): | Estimated 10.3 %(V) |
| Flammability limit - lower (%): | Estimated 2.1 %(V) |
| Explosive limit - upper (%): | No data available. |
| Explosive limit - lower (%): | No data available. |
| Vapor pressure: | 2,757 - 4,136 hPa (20 °C) |
| Vapor density: | No data available. |
| Density: | No data available. |
| Relative density: | No data available. |
| Solubility(ies) | |
| Solubility in water: | No data available. |
| Solubility (other): | No data available. |
| Partition coefficient (n-octanol/water): | No data available. |
| Auto-ignition temperature: | No data available. |
| Decomposition temperature: | No data available. |
| Viscosity: | No data available. |

10. Stability and reactivity

| | |
|--|---|
| Reactivity: | No data available. |
| Chemical Stability: | Material is stable under normal conditions. |
| Possibility of hazardous reactions: | No data available. |
| Conditions to avoid: | Avoid heat or contamination. |
| Incompatible Materials: | No data available. |
| Hazardous Decomposition Products: | No data available. |

11. Toxicological information

Information on likely routes of exposure

| | |
|----------------------|--------------------|
| Inhalation: | No data available. |
| Skin Contact: | No data available. |
| Eye contact: | No data available. |
| Ingestion: | No data available. |

Symptoms related to the physical, chemical and toxicological characteristics

| | |
|----------------------|--------------------|
| Inhalation: | No data available. |
| Skin Contact: | No data available. |
| Eye contact: | No data available. |
| Ingestion: | No data available. |

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

Oral

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Petrolatum
LD 50 (Rat): > 5,000 mg/kg
LD 50 (Rat): > 5,000 mg/kg
LD 50 (Rat): > 5,000 mg/kg
LD 50 (Rat): > 5,000 mg/kg

Benzene, methyl- LD 50 (Rat): 5,580 mg/kg

2-Propanone LD 50 (Rat): 5,800 mg/kg

Distillates (petroleum),
hydrotreated light LD 50 (Rat): > 5,000 mg/kg

Dermal

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Petrolatum
LD 50 (Rabbit): > 3,600 mg/kg
LD 50 (Rabbit): > 2,000 mg/kg
LD 50 (Rat): > 2,000 mg/kg

Benzene, methyl- LD 50 (Rabbit): > 5,000 mg/kg

2-Propanone LD 50 (Rabbit): > 7,426 mg/kg

Distillates (petroleum),
hydrotreated light LD 50 (Rabbit): > 2,000 mg/kg

Inhalation

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Benzene, methyl-
LC 50 (Rat): 28.1 mg/l
LC 50: > 100 mg/l

Propane
LC 50: > 100 mg/l
LC 50: > 100 mg/l

Butane
LC 50: > 100 mg/l
LC 50: > 100 mg/l

2-Propanone
LC 50 (Rat): 50.1 mg/l
LC 50: > 5 mg/l

Distillates (petroleum),
hydrotreated light
LC 50: > 5 mg/l
LC 50: > 20 mg/l

Repeated dose toxicity

Product: No data available.

Specified substance(s):

Petrolatum
LOAEL (Rat(Male), Oral, 13 Weeks): 125 mg/kg Oral Read-across from supporting substance (structural analogue or surrogate), Key study
NOAEL (Rat(Female, Male), Oral, 2 yr): 5,000 mg/kg Oral Experimental result, Key study
NOAEL (Rat(Female, Male), Oral, 2 yr): > 5,700 mg/kg Oral Read-across from supporting substance (structural analogue or surrogate), Supporting study

| | |
|---|---|
| Benzene, methyl- | NOAEL (Rat(Female, Male), Oral, 90 d): 1.5 mg/kg Oral Read-across from supporting substance (structural analogue or surrogate), Key study NOAEL (Rat(Female, Male), Oral, 90 d): 1,500 mg/kg Oral Read-across from supporting substance (structural analogue or surrogate), Key study LOAEL (Rat(Female, Male), Oral, 13 Weeks): 1,250 mg/kg (Target Organ(s): Liver, Kidney) Oral Experimental result, Key study NOAEL (Rat(Female, Male), Inhalation): 625 ppm(m) Inhalation Experimental result, Key study NOAEL (Rat(Female, Male), Inhalation - vapor): 2,355 mg/l Inhalation Experimental result, Key study |
| Propane | NOAEL (Rat(Female, Male), Inhalation, >= 28 d): 4,000 ppm(m) Inhalation Experimental result, Key study LOAEL (Rat(Female, Male), Inhalation, >= 28 d): 12,000 ppm(m) Inhalation Experimental result, Key study |
| Butane | LOAEL (Rat(Female, Male), Inhalation, >= 28 d): 12,000 ppm(m) Inhalation Experimental result, Key study NOAEL (Rat(Female, Male), Inhalation, >= 28 d): 4,000 ppm(m) Inhalation Experimental result, Key study |
| 2-Propanone | NOAEL (Rat(Male), Oral, 13 Weeks): 10,000 ppm(m) Oral Experimental result, Key study |
| Distillates (petroleum), hydrotreated light | NOAEL (Rat(Female, Male), Inhalation): >= 24 mg/m3 Inhalation Experimental result, Key study NOAEL (Rat(Female), Oral, 70 - 147 d): 750 mg/kg Oral Experimental result, Key study |

Skin Corrosion/Irritation

Product: No data available.

Specified substance(s):

| | |
|---|--|
| Petrolatum | in vivo (Rabbit): Not irritant Read-across from supporting substance (structural analogue or surrogate), Key study in vivo (Rabbit): Not irritant Read-across from supporting substance (structural analogue or surrogate), Key study |
| Benzene, methyl- | in vivo (Rabbit): Irritating Experimental result, Key study |
| 2-Propanone | in vivo (Rabbit): Not irritant Experimental result, Supporting study |
| Distillates (petroleum), hydrotreated light | in vivo (Rabbit): Not irritant Experimental result, Key study |

Serious Eye Damage/Eye Irritation

Product: No data available.

Specified substance(s):

| | |
|---|---|
| Petrolatum | Rabbit, 24 - 72 hrs: Not irritating Rabbit, 24 - 72 hrs: Not irritating Rabbit, 24 - 72 hrs: Not irritating |
| Benzene, methyl- | Rabbit, 24 - 72 hrs: Not irritating |
| 2-Propanone | Irritating. Rabbit, 24 hrs: Minimum grade of severe eye irritant |
| Distillates (petroleum), hydrotreated light | Rabbit, 24 - 72 hrs: Not irritating |

Respiratory or Skin Sensitization

Product: No data available.

Specified substance(s):

| | |
|--|--|
| Petrolatum | Skin sensitization:, in vivo (Guinea pig): Non sensitising |
| | Skin sensitization:, in vivo (Guinea pig): Non sensitising |
| Benzene, methyl- | Skin sensitization:, in vivo (Guinea pig): Non sensitising |
| 2-Propanone | Skin sensitization:, in vivo (Guinea pig): Non sensitising |
| Distillates (petroleum), hydrotreated light | Skin sensitization:, in vivo (Guinea pig): Non sensitising |

Carcinogenicity

Product: No data available.

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):

No carcinogenic components identified

Germ Cell Mutagenicity

In vitro

Product: No data available.

In vivo

Product: No data available.

Reproductive toxicity

Product: No data available.

Specified substance(s):

Benzene, methyl- Suspected of damaging fertility or the unborn child.

Specific Target Organ Toxicity - Single Exposure

Product: No data available.

Specified substance(s):

Benzene, methyl- Inhalation - vapor: Narcotic effect. - Category 3 with narcotic effects.
2-Propanone Inhalation - vapor: Narcotic effect. - Category 3 with narcotic effects.

Specific Target Organ Toxicity - Repeated Exposure

Product: No data available.

Specified substance(s):

Benzene, methyl- Category 2

Target Organs

Specific Target Organ Toxicity - Single Exposure: Narcotic effect.

Aspiration Hazard

Product: No data available.

Specified substance(s):

Benzene, methyl- May be fatal if swallowed and enters airways.
Distillates (petroleum),
hydrotreated light May be fatal if swallowed and enters airways.

Other effects: No data available.

12. Ecological information

Ecotoxicity:

Acute hazards to the aquatic environment:

Fish

Product: No data available.

Specified substance(s):

| | |
|------------------|--|
| Petrolatum | LL 50 (Pimephales promelas, 96 h): > 100 mg/l Read-across from supporting substance (structural analogue or surrogate), Key study NOAEL (Pimephales promelas, 96 h): >= 100 mg/l Read-across from supporting substance (structural analogue or surrogate), Key study LL 50 (Oncorhynchus mykiss, 96 h): > 1,000 mg/l QSAR QSAR, Supporting study |
| Benzene, methyl- | LC 50 (Oncorhynchus kisutch, 96 h): 5.5 mg/l Experimental result, Key study |
| Propane | LC 50 (Various, 96 h): 147.54 mg/l QSAR QSAR, Key study |
| Butane | LC 50 (Various, 96 h): 147.54 mg/l QSAR QSAR, Key study |
| 2-Propanone | LC 50 (Oncorhynchus mykiss, 96 h): 5,540 mg/l Experimental result, Key study |

Aquatic Invertebrates

Product: No data available.

Specified substance(s):

| | |
|------------------|--|
| Petrolatum | NOAEL (Daphnia magna, 48 h): >= 10,000 mg/l Read-across from supporting substance (structural analogue or surrogate), Key study LL 50 (Gammarus pulex, 96 h): > 10,000 mg/l Read-across from supporting substance (structural analogue or surrogate), Key study EC 50 (Daphnia magna, 48 h): > 10,000 mg/l Read-across from supporting substance (structural analogue or surrogate), Key study LL 50 (Daphnia magna, 48 h): > 1,000 mg/l QSAR QSAR, Supporting study LL 50 (Gammarus pulex, 24 h): > 10,000 mg/l Read-across from supporting substance (structural analogue or surrogate), Key study |
| Benzene, methyl- | LC 50 (Water flea (Daphnia magna), 48 h): 54.6 - 174.7 mg/l Mortality LC 50 (Ceriodaphnia dubia, 2 d): 3.78 mg/l Experimental result, Key study |
| Butane | LC 50 (Daphnia sp., 48 h): 69.43 mg/l QSAR QSAR, Key study |
| 2-Propanone | LC 50 (Daphnia pulex, 48 h): 8,800 mg/l Experimental result, Key study |

Chronic hazards to the aquatic environment:

Fish

Product: No data available.

Specified substance(s):

| | |
|---|--|
| Petrolatum | NOAEL (Oncorhynchus mykiss): >= 1,000 mg/l QSAR QSAR, Supporting study LL 50 (Oncorhynchus mykiss): > 1,000 mg/l QSAR QSAR, Supporting study |
| Benzene, methyl- | NOAEL (Oncorhynchus kisutch): 1.39 mg/l Experimental result, Key study LOAEL (Oncorhynchus kisutch): 2.77 mg/l Experimental result, Key study |
| Distillates (petroleum), hydrotreated light | NOAEL (Oncorhynchus mykiss): 0.098 mg/l QSAR QSAR, Key study |

Aquatic Invertebrates

Product: No data available.

| | |
|--------------------------------|--|
| Specified substance(s): | |
| Petrolatum | NOAEL (Daphnia magna): 10 mg/l Read-across from supporting substance (structural analogue or surrogate), Key study NOAEL (Daphnia magna): >= 1,000 mg/l QSAR QSAR, Supporting study |
| Benzene, methyl- | LOAEL (Ceriodaphnia dubia): 2.76 mg/l Experimental result, Key study NOAEL (Ceriodaphnia dubia): 0.74 mg/l Experimental result, Key study |
| 2-Propanone | LOAEL (Daphnia magna): 2,212 mg/l Experimental result, Key study NOAEL (Daphnia magna): 2,212 mg/l Experimental result, Key study |

Toxicity to Aquatic Plants

Product: No data available.

Persistence and Degradability

Biodegradation

Product: No data available.

Specified substance(s):

| | |
|---|--|
| Petrolatum | 31 % (28 d) Detected in water. Read-across from supporting substance (structural analogue or surrogate), Supporting study |
| Benzene, methyl- | 100 % (14 d) Detected in water. Experimental result, Weight of Evidence study 86 % Detected in water. Experimental result, Weight of Evidence study |
| Propane | 100 % (385.5 h) Detected in water. Experimental result, Key study 50 % (3.19 d) Detected in water. QSAR, Weight of Evidence study |
| Butane | 100 % (385.5 h) Detected in water. Experimental result, Key study |
| 2-Propanone | 90.9 % (28 d) Detected in water. Experimental result, Key study |
| Distillates (petroleum), hydrotreated light | 61 % Detected in water. Experimental result, Supporting study |

BOD/COD Ratio

Product: No data available.

Bioaccumulative potential

Bioconcentration Factor (BCF)

Product: No data available.

Specified substance(s):

| | |
|------------------|--|
| Benzene, methyl- | Leuciscus idus, Bioconcentration Factor (BCF): 90 Aquatic sediment Experimental result, Key study |
| 2-Propanone | Haddock, adult, Bioconcentration Factor (BCF): 0.69 Aquatic sediment Experimental result, Not specified |

Partition Coefficient n-octanol / water (log Kow)

Product: No data available.

Mobility in soil: No data available.

Known or predicted distribution to environmental compartments

| | |
|---|--------------------|
| Petrolatum | No data available. |
| Benzene, methyl- | No data available. |
| Propane | No data available. |
| Butane | No data available. |
| 2-Propanone | No data available. |
| Distillates (petroleum), hydrotreated light | No data available. |

Other adverse effects: Harmful to aquatic organisms.

13. Disposal considerations

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws.

Contaminated Packaging: No data available.

14. Transport information

DOT

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| UN Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es) | |
| Class: | 2.1 |
| Label(s): | – |
| Packing Group: | II |
| Marine Pollutant: | No |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

IMDG

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| UN Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es) | |
| Class: | 2 |
| Label(s): | – |
| EmS No.: | |
| Packing Group: | – |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

IATA

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es): | |
| Class: | 2.1 |
| Label(s): | – |
| Packing Group: | – |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

15. Regulatory information

US Federal Regulations

Restrictions on use: Not known.

**TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)
US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)**

None present or none present in regulated quantities.

CERCLA Hazardous Substance List (40 CFR 302.4):

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Benzene, methyl- | lbs. 1000 |
| Propane | lbs. 100 |
| Butane | lbs. 100 |
| 2-Propanone | lbs. 5000 |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Fire Hazard
Immediate (Acute) Health Hazards
Delayed (Chronic) Health Hazard
Flammable aerosol
Skin Corrosion/Irritation
Serious Eye Damage/Eye Irritation
Toxic to reproduction
Specific Target Organ Toxicity - Single Exposure
Specific Target Organ Toxicity - Repeated Exposure
Aspiration Hazard

SARA 302 Extremely Hazardous Substance

| <u>Chemical Identity</u> | <u>Reportable quantity</u> | <u>Threshold Planning Quantity</u> |
|---|----------------------------|------------------------------------|
| 2-Propanone | | |
| Distillates (petroleum), hydrotreated light | | |

SARA 304 Emergency Release Notification

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|---|----------------------------|
| Benzene, methyl- | lbs. 1000 |
| Propane | lbs. 100 |
| Butane | lbs. 100 |
| 2-Propanone | lbs. 5000 |
| Distillates (petroleum), hydrotreated light | |

SARA 311/312 Hazardous Chemical

| <u>Chemical Identity</u> | <u>Threshold Planning Quantity</u> |
|--|------------------------------------|
| Petrolatum | 10000 lbs |
| Benzene, methyl- | 10000 lbs |
| Propane | 10000 lbs |
| Butane | 10000 lbs |
| 2-Propanone | 10000 lbs |
| Distillates (petroleum), hydrotreated light | 10000 lbs |
| Distillates (petroleum), hydrotreated heavy naphthenic | 10000 lbs |

SARA 313 (TRI Reporting)

| <u>Chemical Identity</u> | <u>Reporting threshold for other users</u> | <u>Reporting threshold for manufacturing and processing</u> |
|--------------------------|--|---|
| Benzene, methyl- | lbs | lbs. |

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130):

Clean Water Act Section 311 Hazardous Substances (40 CFR 117.3)

US State Regulations

US. California Proposition 65

This product contains chemical(s) known to the State of California to cause cancer and/or to cause birth defects or other reproductive harm.

Benzene, methyl- Developmental toxin. 03 2008

US. New Jersey Worker and Community Right-to-Know Act
Chemical Identity

Petrolatum
Benzene, methyl-
Propane
Butane
2-Propanone
Distillates (petroleum), hydrotreated light

US. Massachusetts RTK - Substance List

No ingredient regulated by MA Right-to-Know Law present.

US. Pennsylvania RTK - Hazardous Substances

Chemical Identity

Petrolatum
Benzene, methyl-
Propane
Butane
2-Propanone
Distillates (petroleum), hydrotreated light

US. Rhode Island RTK

No ingredient regulated by RI Right-to-Know Law present.

International regulations

Montreal protocol

2-Propanone
Distillates (petroleum), hydrotreated light

Stockholm convention

2-Propanone
Distillates (petroleum), hydrotreated light

Rotterdam convention

2-Propanone
Distillates (petroleum), hydrotreated light

Kyoto protocol

Inventory Status:

| | |
|--|--|
| Australia AICS: | On or in compliance with the inventory |
| Canada DSL Inventory List: | On or in compliance with the inventory |
| Canada NDSL Inventory: | Not in compliance with the inventory. |
| Ontario Inventory: | Not in compliance with the inventory. |
| China Inv. Existing Chemical Substances: | On or in compliance with the inventory |
| Japan (ENCS) List: | Not in compliance with the inventory. |
| Japan ISHL Listing: | Not in compliance with the inventory. |
| Japan Pharmacopoeia Listing: | Not in compliance with the inventory. |
| Korea Existing Chemicals Inv. (KECI): | On or in compliance with the inventory |
| Mexico INSQ: | Not in compliance with the inventory. |
| New Zealand Inventory of Chemicals: | Not in compliance with the inventory. |
| Philippines PICCS: | On or in compliance with the inventory |
| Taiwan Chemical Substance Inventory: | On or in compliance with the inventory |
| US TSCA Inventory: | On or in compliance with the inventory |
| EINECS, ELINCS or NLP: | Not in compliance with the inventory. |

16. Other information, including date of preparation or last revision

Issue Date: 02/03/2020

Revision Information: No data available.

Version #: 1.0

Further Information: No data available.

Disclaimer: This information is provided without warranty. The information is believed to be correct. This information should be used to make an independent determination of the methods to safeguard workers and the environment.

MATERIAL SAFETY DATA SHEET

Isopropyl Alcohol 99% (minimum)

This MSDS is valid for all grades that start with catalog number 231

1. IDENTIFICATION OF SUBSTANCE / MIXTURE AND OF SUPPLIER

Product Identifier: High Purity Chemicals
Synonyms: Isopropanol; Isopropyl Alcohol; 2-Propanol; sec-propyl alcohol; dimethylcarbinol; sec-propanol; Rubbing alcohol; 1-Methylethanol; IPA 99%
Other means of identification: CAS No. 67-63-0
EINECS No. 200-661-7
Recommended use of the chemical and restrictions on use:

Supplier Details:

Pharmco Products, Inc.
58 Vale Road, Brookfield,
CT 06804, USA.
Tel: 203.740.3471
Fax: 203.740.3481
CCN17213

Pharmco Products, Inc.
1101 Isaac Shelby Drive, Shelbyville,
KY 40065, USA.
Tel: 502.232.7600
Fax: 502.633.6100
CCN17213

Emergency Contact: CHEMTREC: 1.800.424.9300 (USA) / +1.703.527.3887 (International)

2. HAZARDS IDENTIFICATION

OSHA Hazards:


Flammable liquid, Target Organ Effect, Irritant

Target Organs:

Cardiovascular system, Gastrointestinal tract, Kidney, Liver, Nerves

**Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)**

NFPA



GHS label elements, including precautionary statements



Signal Word:

DANGER!

Hazard statement(s)

| | |
|------|------------------------------------|
| H225 | Highly flammable liquid and vapor. |
| H319 | Causes serious eye irritation. |
| H336 | May cause drowsiness or dizziness. |

Precautionary statement(s)

| | |
|--------------------|--|
| P261 | Avoid breathing dust/fumes/gas/mist/vapors. |
| P312 | Call a POISON CENTER or doctor/ physician if you feel unwell. |
| P501 | Dispose of contents and container to an approved waste disposal plant. |
| P240 | Ground/bond container and receiving equipment. |
| P337 + P313 | If eye irritation persists: Get medical attention. |
| P305 + P351 + P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Seek medical attention. |
| P304 + P340 | IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. |
| P303 + P361 + P353 | IF ON SKIN (or hair): Remove immediately all contaminated clothing. Rinse skin with water. |
| P370 + P378 | In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction. |
| P210 | Keep away from heat, sparks, open flames, and hot surfaces. No |

**Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)**

| | |
|-------------|--|
| | smoking. |
| P233 | Keep container tightly closed. |
| P102 | Keep out of reach of children. |
| P403 + P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P403 + P235 | Store in a well-ventilated place. Keep cool. |
| P405 | Store locked up. |
| P243 | Take precautionary measures against static discharge. |
| P241 | Use explosion-proof electrical, ventilating, and lighting equipment. |
| P242 | Use only non-sparking tools. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P264 | Wash hands thoroughly after handling. |
| P280 | Wear protective gloves and eye and face protection. |

GHS Classification(s)

- Eye Irritation (Category 2)
- Flammable Liquids (Category 2)
- Specific target organ toxicity - single exposure (Category 3)

Other hazards which do not result in classification:

Potential Health Effects:

| Organ | Description |
|------------|--|
| Eyes | Causes eye irritation. |
| Ingestion | May be harmful if swallowed. |
| Inhalation | May be harmful if inhaled. Causes respiratory tract irritation. Vapors may cause drowsiness and dizziness. |
| Skin | May be harmful if absorbed through skin. Causes skin irritation. |

3. COMPOSITION AND INFORMATION ON INGREDIENTS

| | |
|-------------------------------|---|
| Chemical identity: | Isopropyl Alcohol |
| Common name / Synonym: | Isopropanol; Isopropyl Alcohol; 2-Propanol; sec-propyl alcohol; dimethylcarbinol; sec-propanol; Rubbing alcohol; 1-Methylethanol; IPA 99% |
| CAS number: | 67-63-0 |
| EINECS number: | 200-661-7 |
| ICSC number: | 0554 |
| RTECS #: | NT8050000 |
| UN #: | 1219 |
| EC #: | 603-117-00-0 |

| % Weight | Material | CAS |
|----------|-------------------|---------|
| 100 | Isopropyl Alcohol | 67-63-0 |

**Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)**

4. FIRST AID MEASURES

General advice

Take proper precautions to ensure your own health and safety before attempting rescue and providing first aid. Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

Skin

Wash skin with soap and copious amounts of water. Seek medical attention.

Inhalation

Remove person to fresh air. If signs/symptoms continue, get medical attention. Give oxygen or artificial respiration as needed.

Eyes

Thoroughly flush the eyes with large amounts of clean low-pressure water for at least 15 minutes, occasionally lifting the upper and lower eyelids. If irritation persists, seek medical attention.

Ingestion

DO NOT induce vomiting. If vomiting does occur, have victim lean forward to prevent aspiration. Rinse mouth with water. Seek medical attention. Never give anything by mouth to an unconscious individual.

5. FIRE FIGHTING MEASURES

Suitable (and unsuitable) extinguishing media:

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Specific hazards arising from the chemical (e.g., nature of any hazardous combustion products):

Carbon oxides expected to be the primary hazardous combustion product.

Special protective equipment and precautions for firefighters:

Wear self-contained breathing apparatus and protective clothing to prevent contact with skin and eyes. Keep unopened containers cool by spraying with water.

Flammable Properties

Classification

OSHA/NFPA Class IB Flammable Liquid.

Flash point

12 °C (53 °F) - Closed Cup

Autoignition temperature

399 °C (750 °F)

**Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)**

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures:

Do not inhale vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapors accumulating to form explosive concentrations. Vapors can accumulate in low areas.

Environmental precautions:

Stop leak / contain spill if possible and safe to do so. Prevent product from entering drains.

Methods and materials for containment and cleaning up:

Contain spill, then collect with an electrically protected vacuum cleaner or by wet-brushing and put the material into a convenient waste disposal container. Keep container closed.

7. HANDLING AND STORAGE

Precautions for safe handling:

Do not get on skin or in eyes. Do not inhale vapor or mist. Keep away from sources of ignition - No smoking. Take measures to prevent the buildup of electrostatic charge.

Conditions for safe storage, including any incompatibilities:

Keep container tightly closed in a cool, dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Control parameters, e.g., occupational exposure limit values or biological limit values:

Occupational Exposure Limits

| Component | Source | Type | Value | Note |
|-------------------|------------|------|---------|------|
| Isopropyl Alcohol | US (ACGIH) | TWA | 200 ppm | |
| Isopropyl Alcohol | US(ACGIH) | STEL | 400 ppm | |
| Isopropyl Alcohol | US (OSHA) | TWA | 400 ppm | |

Appropriate engineering controls:

General room or local exhaust ventilation is usually required to meet exposure limit(s). Electrical equipment should be grounded and conform to applicable electrical code.

Individual protection measures, such as personal protective equipment:

Respiratory protection:

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

**Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)**

Hand protection:

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Eye protection:

Use chemical safety goggles and/or a full face shield where splashing is possible. Use equipment approved by appropriate government standards, such as NIOSH (US) or EN166 (EU) Maintain eye wash fountain and quick-drench facilities in work area.

Skin and body protection:

Wear impervious, flame retardant, antistatic protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Hygiene measures:

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|--|
| Appearance (physical state, color, etc.) | Liquid. Colorless. |
| Initial boiling point and boiling range | 83 °C (181 °F) |
| Flash point | 12 °C (53 °F) - Closed Cup |
| Upper / Lower flammability or explosive limits | 2.0% (V) / 12.7% (V) |
| Vapor Density | 2.1 |
| Relative Density | 0.858 g/cm ³ at 25 °C (77 °F) |
| Auto-ignition temperature | 399 °C (750 °F) |
| Formula (ISOPROPYL ALCOHOL) | C ₃ H ₈ O |
| Molecular Weight (ISOPROPYL ALCOHOL) | 60.1 g/mol |

10. STABILITY AND REACTIVITY

| | |
|---|--|
| Chemical Stability | Stable under recommended storage conditions. |
| Possibility of hazardous reactions | Vapors may form explosive mixture with air. |
| Conditions to avoid (e.g., static discharge, shock or vibration) | Heat, flames and sparks. Extreme temperatures and direct sunlight. |
| Incompatible materials | Oxidizing agents, Acid anhydrides, Aluminium, Halogenated compounds, Acids |
| Hazardous decomposition products | Hazardous decomposition products formed under fire conditions. - Carbon oxides |

11. TOXICOLOGICAL INFORMATION

**Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)**

- Isopropyl Alcohol 67-63-0

Product Summary:

Long-term exposure (2 years) to Isopropyl Alcohol via inhalation at concentrations up to 5000 ppm caused no exposure related increases in tumors in animals. This substance is not classified for carcinogenicity by IARC, OSHA, NTP, or the EPA.

Acute Toxicity:

| | | | |
|--------------|--------|--------------|---------|
| LC50 (vapor) | Rat | 19,000 ppm | 8 hours |
| LD50 (oral) | Rat | 4,396 mg/kg | |
| LD50 (oral) | Mouse | 3,600 mg/kg | |
| LD50 (skin) | Rabbit | 12,870 mg/kg | |

Irritation:

Eyes (ISOPROPANOL)

Mildly irritating to the eye at an airborne concentration of 400 ppm, unpleasant at 800 ppm.

Skin

Slightly irritating to the skin. Repeated contact with neat product may dry the skin causing cracking and/or fissuring.

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Other Hazards

| Organ | Description |
|-----------|---|
| Eyes | Produces irritation, characterized by a burning sensation, redness, tearing, inflammation, and possible corneal injury. May cause transient corneal injury |
| Ingestion | Causes gastrointestinal irritation with nausea, vomiting and diarrhea. May cause kidney damage. May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drowsiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal. The probable oral lethal dose in humans is 240 ml (2696 mg/kg), but ingestion of only 20 ml (224 mg/kg) has caused poisoning. |

**Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)**

| | |
|------------|--|
| Inhalation | Inhalation of high concentrations may cause central nervous system effects characterized by nausea, headache, dizziness, unconsciousness and coma. May cause narcotic effects in high concentration. Causes upper respiratory tract irritation. Inhalation of vapors may cause drowsiness and dizziness. |
| Skin | May cause irritation with pain and stinging, especially if the skin is abraded. Isopropanol has a low potential to cause allergic skin reactions; however, rare cases of allergic contact dermatitis have been reported. May be absorbed through intact skin. Dermal absorption has been considered toxicologically insignificant. |
| Chronic | Prolonged exposure can be irritating to mucosal membranes, skin, respiratory system. Can cause liver and kidney damage. |

12. ECOLOGICAL INFORMATION

- Isopropyl Alcohol 67-63-0

Ecotoxicity (aquatic and terrestrial, where available):

Acute Fish Toxicity (ISOPROPANOL)

LC50 / 96 hours Pimephales promelas: 9,640 mg/L

Toxicity to Aquatic Plants (ISOPROPANOL)

EC50 / 72 hours Scenedesmus subspicatus > 1,000 mg/L

Toxicity to Microorganisms (ISOPROPANOL)

EC50 / 3 hours Activated sludge > 1,000 mg/L

Persistence and degradability:

Readily biodegradable (77% degraded in 10 days). Expected to be hydrolytically stable, but rapidly degraded following atmospheric releases.

Bioaccumulative potential:

Bioconcentration factor (BCF) of 3.16. (Predicted bioconcentration factor). Significant bioaccumulation is not expected based on predicted BCF of 3.16.

13. DISPOSAL CONSIDERATIONS

Description of waste residues and information on their safe handling and methods of disposal, including the disposal of any contaminated packaging:

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material.

Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)

14. TRANSPORT INFORMATION

Description of waste residues and information on their safe handling and methods of disposal:

| | |
|-------------------------------|-------------|
| UN number | UN1219 |
| UN proper shipping name | Isopropanol |
| Transport hazard class(es) | 3 |
| Packing group (if applicable) | II |

IMDG

UN-Number: UN1219 Class: 3 Packing Group: II

EMS-No: F-E, S-D

Proper shipping name: ISOPROPANOL

Marine pollutant: No

IATA

UN-Number: UN1219 Class: 3 Packing Group: II

Proper shipping name: UNIsopropanol

15. REGULATORY INFORMATION

Safety, health and environmental regulations specific for the product in question:

OSHA Hazards

Flammable liquid, Target Organ Effect, Irritant

All ingredients are on the following inventories or are exempted from listing

| Country | Notification |
|--------------------------|--------------|
| Australia | AICS |
| Canada | DSL |
| China | IECS |
| European Union | EINECS |
| Japan | ENCS/ISHL |
| Korea | ECL |
| New Zealand | NZIoC |
| Philippines | PICCS |
| United States of America | TSCA |

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA title III, Section 313: ISOPROPYL ALCOHOL (CAS# 67-63-0) Revision date: 1987-01-01.

SARA 311/312 Hazards

Acute Health Hazard

**Product Information: 203.740.3471 Emergency Assistance (CHEMTREC): 1.800.424.9300 (USA)
+1.703.527.3887 (INT)**

Chronic Health Hazard
Fire Hazard

CERCLA

No chemicals in this material with known CAS numbers are subject to the reporting requirements of CERCLA

Massachusetts Right To Know Components

Isopropyl Alcohol CAS-No. 67-63-0 Revision Date 1987-01-01

Pennsylvania Right To Know Components

Isopropyl Alcohol CAS-No. 67-63-0 Revision Date 1987-01-01

New Jersey Right To Know Components

Isopropyl Alcohol CAS-No. 67-63-0 Revision Date 1987-01-01

California Prop 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION: INCLUDING INFORMATION ON PREPARATION AND REVISION OF THE SDS

Disclaimer

PHARMCO-AAPER believes that the information on this MSDS was obtained from reliable sources. However, the information is provided without any warranty, expressed or implied, regarding its correctness. Some information presented and conclusions drawn herein are from sources other than direct test data on the substance itself. The conditions or methods of handling, storage, use and disposal of the product are beyond our control and may be beyond our knowledge. For this and other reasons, PHARMCO-AAPER does not assume responsibility and expressly disclaims liability for loss, damage, or expense arising out of or in any way connected with handling, storage, use, or disposal of this product. If the product is used as a component in another product, this MSDS information may not be applicable. Information is correct to the best of our knowledge at the date of the MSDS publication.

Air Tool Lubricant

Date of Previous Version: 2015-10-05

Revision Date: 2016-02-11

SAFETY DATA SHEET According to the Hazard Communication Standard, 29 CFR 1910.1200

1. IDENTIFICATION

Product identifier

Product name: Air Tool Lubricant

Other means of identification

Product Code(s): ATL004, ATL016, ATL032, ATL128, ATL55, A145-4, A145-16, A145-32, A145-128

Substance/mixture: Mixture

Recommended use of the chemical and restrictions on use

Identified uses: Lubricant, pneumatic tools.

Uses advised against: Do not use for any purpose other than the one for which it is intended

Details of the supplier of the safety data sheet

Supplier Address: Coilhose Pneumatics/Acme Automotive
19 Kimberly Road
East Brunswick, NJ 08816
Phone: +1 800-526-2100

Contact Point: Customer Service

E-mail Address: info@coilhose.com

Emergency telephone number

Company Phone Number: +1 (732) 390-8480 – 8:00AM to 7:00PM EST Monday thru Friday

Emergency telephone: POISON CONTROL: +1 800-222-1222 (24h)

2. HAZARDS IDENTIFICATION

Classification

Aspiration toxicity - Category 1

Label elements



DANGER

May be fatal if swallowed and enters airways

Ingestion:

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician Do NOT induce vomiting

Precautionary Statements – Storage:

Air Tool Lubricant

Date of Previous Version: 2015-10-05

Revision Date: 2016-02-11

Store locked up

Precautionary Statements – Disposal:

Dispose of contents/ container to an approved waste disposal plant

Unknown Acute Toxicity:

Not applicable

Hazards not otherwise classified (HNOC):

None known

Other information

Physical-Chemical Properties: Contaminated surfaces will be extremely slippery.

Environmental properties: Should not be released into the environment.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS-No | Weight % |
|--|------------|----------|
| Distillates (petroleum), hydrotreated heavy paraffinic | 64742-54-7 | 95-100 |

* The exact percentage (concentration) of composition has been withheld as a trade secret

Additional information: Product containing mineral oil with less than 3% DMSO extract as measured by IP 346

4. FIRST AID MEASURES

First aid measures for different exposure routes

General advice: IN CASE OF SERIOUS OR PERSISTENT CONDITIONS, CALL A DOCTOR OR EMERGENCY MEDICAL CARE.

Eye contact: Rinse thoroughly with plenty of water, also under the eyelids.

Skin contact: Remove contaminated clothing and shoes. Wash skin with soap and water. Wash contaminated clothing before reuse. High pressure jets may cause skin damage. In this case, the casualty should be sent immediately to hospital.

Inhalation: Move to fresh air.

Ingestion: Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Call a physician or Poison Control Center immediately.

Most important symptoms/effects, acute and delayed

Skin contact: Not classified. High pressure injection of the products under the skin may have very serious consequences even though no symptom or injury may be apparent.

Eye contact: Not classified.

Inhalation: Not classified. Inhalation of vapors in high concentration may cause irritation of respiratory system. Aspiration into lungs can produce severe lung damage.

Ingestion: May be fatal if swallowed and enters airways. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea.

Symptoms: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Difficulty breathing. Coughing and/ or wheezing.

Air Tool Lubricant

Date of Previous Version: 2015-10-05

Revision Date: 2016-02-11

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician: Treat symptomatically.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media: Carbon dioxide (CO₂). ABC powder. Foam. Water spray or fog.

Unsuitable Extinguishing Media: Do not use a solid water stream as it may scatter and spread fire.

Special Hazard: Incomplete combustion and thermolysis may produce gases of varying toxicity such as carbon monoxide, carbon dioxide, various hydrocarbons, aldehydes and soot. These may be highly dangerous if inhaled in confined spaces or at high concentration.

Explosion Data

Sensitivity to Mechanical Impact: None.

Sensitivity to Static Discharge: None.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Evacuate non-essential personnel

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

General Information: Do not touch or walk through spilled material. Contaminated surfaces will be extremely slippery. Use personal protective equipment. Ensure adequate ventilation. Remove all sources of ignition.

Other information See Section 12 for additional information.

Environmental precautions

General Information: Do not allow material to contaminate ground water system. Try to prevent the material from entering drains or water courses. Local authorities should be advised if significant spillages cannot be contained.

Methods and materials for containment and cleaning up

Methods for cleaning up: Dam up. Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13). Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Advice on safe handling: When using, do not eat, drink or smoke. For personal protection see section 8. Use only in well-ventilated areas. Do not breathe vapors or spray mist. Avoid contact with skin, eyes and clothing.

Prevention of fire and explosion: Take precautionary measures against static discharges. Ground/bond containers, tanks and transfer/receiving equipment.

Hygiene measures: Ensure the application of strict rules of hygiene by the personnel exposed to the risk of contact with the product. Regular cleaning of equipment, work area and clothing is recommended. Wash hands before breaks and immediately after handling the product. Do not use abrasives,

Air Tool Lubricant

Date of Previous Version: 2015-10-05

Revision Date: 2016-02-11

solvents or fuels. Do not dry hands with rags that have been contaminated with product. Do not put product contaminated rags into workwear pockets.

Conditions for safe storage, including any incompatibilities

Technical measures/Storage conditions: Keep away from food, drink and animal feeding stuffs. Keep in a bounded area. Keep container tightly closed. Keep preferably in the original container. Otherwise reproduce all indication of the regulation label on the new container. Do not remove the hazard labels of the containers (even if they are empty). Design the installations in order to avoid accidental emissions of product (due to seal breakage, for example) onto hot casings or electrical contacts. Protect from frost, heat and sunlight. Protect from moisture.

Materials to Avoid: Strong oxidizing agents.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure limits: Mineral oil mist:
USA: OSHA (PEL) TWA 5 mg/m³, NIOSH (REL) TWA 5 mg/m³, STEL 10 mg/m³, ACGIH (TLV) TWA 5 mg/m³ (highly refined).

Exposure controls

Engineering Measures Apply technical measures to comply with the occupational exposure limits.

Individual protection measures, such as personal protective equipment

General Information: If the product is used in mixtures, it is recommended that you contact the appropriate protective equipment suppliers. These recommendations apply to the product as supplied.

Eye/Face Protection: If splashes are likely to occur, wear: Safety glasses with side-shields.

Skin and body protection: Wear suitable protective clothing. Protective shoes or boots.

Hand Protection: Hydrocarbon-proof gloves. Fluorinated rubber. Nitrile rubber. Please observe the instructions regarding permeability and breakthrough time which are provided by the supplier of the gloves. Also take into consideration the specific local conditions under which the product is used, such as the danger of cuts, abrasion, and the contact time.

Respiratory protection: None required under normal usage. If exposure limits are exceeded or irritation is experienced, IOSH/MSHA approved respiratory protection should be worn. Positive-pressure supplied air respirators may be required for high airborne contaminant concentrations. Respiratory protection must be provided in accordance with current local regulations.

Hygiene measures: Ensure the application of strict rules of hygiene by the personnel exposed to the risk of contact with the product. Regular cleaning of equipment, work area and clothing is recommended. Wash hands before breaks and immediately after handling the product. Do not use abrasives, solvents or fuels. Do not dry hands with rags that have been contaminated with product. Do not put product contaminated rags into workwear pockets.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical and chemical properties

Appearance: limpid

Color yellow liquid
Physical State @20°C Characteristic
Odor Characteristic
Odor Threshold No information available

| <u>Property</u> | <u>Values</u> | <u>Remarks</u> | <u>Method</u> |
|-----------------|---------------|----------------|---------------|
|-----------------|---------------|----------------|---------------|

Air Tool Lubricant

Date of Previous Version: 2015-10-05

Revision Date: 2016-02-11

| | | | |
|------------------------------------|--------------------------|--------------------------|--|
| pH | | Not applicable | |
| Melting point/range | | No information available | |
| Boiling point/boiling range | | Not applicable | |
| Flash point | >= 197.8 °C >= 388 °F | | Cleveland Open Cup (COC) ASTM D 92 Cleveland Open Cup (COC) ASTM D 92 |
| Evaporation rate | | No information available | |
| Flammability Limits in Air upper | | No information available | |
| Upper | - | No information available | |
| Lower | - | No information available | |
| Vapor Pressure | | No information available | |
| Vapor density | | No information available | |
| Relative density | 0.860 | @ 15 °C | ASTM D 1298 |
| Density | 860 kg/m3 | @ 15 °C | ASTM D 1298 |
| Water solubility | | Not applicable | |
| Solubility in other solvents | | No information available | |
| logPow | | No information available | |
| Autoignition temperature | | No information available | |
| Decomposition temperature | | No information available | |
| Viscosity, kinematic | 18.9 - 24.2 mm2/s | @ 40 °C | ASTM D 445 |
| Explosive properties | Not explosive | | |
| Oxidizing Properties | Not applicable | | |
| Possibility of hazardous reactions | Not applicable | | |
| Other information | | | |
| Freezing Point | | No information available | |
| Pour point | -20 °C | | Cleveland Open Cup (COC) |

10. STABILITY AND REACTIVITY

| | |
|-------------------------------------|---|
| Reactivity: | No information available. |
| Chemical stability: | Stable under recommended storage conditions. |
| Possibility of hazardous reactions: | None under normal processing. |
| Conditions to Avoid: | Heat (temperatures above flash point), sparks, ignition points, flames, static electricity. |
| Incompatible Materials: | Strong oxidizing agents. |
| Hazardous Decomposition : | Products None under normal use. |

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Product Information Product does not present an acute toxicity hazard based on known or supplied information.

Information on likely routes of exposure

Principle Routes of Exposure Inhalation, Ingestion, Eye contact, Skin contact.

Numerical measures of toxicity - Product Information

Air Tool Lubricant

Date of Previous Version: 2015-10-05

Revision Date: 2016-02-11

Component Information

| Chemical Name | LD50 Oral | LD50 Dermal | LC50 Inhalation |
|---|---------------------------------------|--|---|
| Distillates (petroleum), hydrotreated heavy paraffinic 64742-54-7 | LD50 > 5000 mg/kg bw (rat - OECD 420) | LD50 > 5000 mg/kg bw (rabbit - OECD 402) | LC50 (4h) > 5 mg/l (aerosol) (rat - OECD 403) |

Information on toxicological effects

- Symptoms:** Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Difficulty breathing. Coughing and/ or wheezing.
- Skin contact:** Not classified. High pressure injection of the products under the skin may have very serious consequences even though no symptom or injury may be apparent.
- Eye contact:** Not classified.
- Inhalation:** Not classified. Inhalation of vapors in high concentration may cause irritation of respiratory system. Aspiration into lungs can produce severe lung damage.
- Ingestion:** May be fatal if swallowed and enters airways. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

- Sensitization Not classified as a sensitizer.
 Carcinogenicity This product is not classified carcinogenic.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|---|-------|------|-----|------|
| Distillates (petroleum), hydrotreated heavy paraffinic 64742-54-7 | - | - | | - |

- Mutagenicity:** This product is not classified as mutagenic.
- Reproductive toxicity:** This product does not present any known or suspected reproductive hazards.
- Aspiration Hazard:** May be fatal if swallowed and enters airways. Risk of serious damage to the lungs (by aspiration).

12. ECOLOGICAL INFORMATION

Ecotoxicity

Acute aquatic toxicity - Product Information

No information available

Acute aquatic toxicity - Component Information

| Chemical Name | Toxicity to algae | Toxicity to fish | Toxicity to daphnia and other aquatic | Toxicity to microorganisms |
|---|---|--|--|----------------------------|
| Distillates (petroleum), hydrotreated heavy paraffinic 64742-54-7 | EL50 (48h) > 100 mg/l (Pseudokirchnerella subcapitata - OECD 201) | LL50 (96h) > 100 mg/l (Oncorhynchus mykiss - OECD 203) | EL50 (48h) > 10000 mg/l (Daphnia magna - OECD 202) | |

Chronic aquatic toxicity - Product Information

No information available

Chronic aquatic toxicity - Component Information

Air Tool Lubricant

Date of Previous Version: 2015-10-05

Revision Date: 2016-02-11

| Chemical Name | Toxicity to algae | Toxicity to daphnia and other aquatic | Toxicity to fish | Toxicity to microorganisms |
|--|-------------------|--|---|----------------------------|
| Distillates (petroleum), hydrotreated heavy paraffinic64742-54-7 | | NOEL (21d) 10 mg/l (Daphnia magna - QSAR Petrotox) | NOEL (14/28d) > 1000 mg/l (Oncorhynchus mykiss - QSAR Petrotox) | |

Effects on terrestrial organisms: No information available.

Persistence and degradability

General Information: No information available.

Bioaccumulative potential

Product Information: No information available.

logPow: No information available

Mobility

Soil: Given its physical and chemical characteristics, the product generally shows low soil mobility

Air: Loss by evaporation is limited

Water: Insoluble The product spreads on the surface of the water.

Other adverse effects

General Information: No information available

13. DISPOSAL CONSIDERATIONS

Waste treatment

Waste Disposal Methods: Dispose of in accordance with local regulations.

Contaminated packaging: Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. TRANSPORT INFORMATION

DOT: Not regulated

TDG: Not regulated

MEX: Not regulated

ICAO/IATA: Not regulated

IMDG/IMO: Not regulated

ADR/RID: Not regulated

AND: Not regulated

15. REGULATORY INFORMATION

International Inventories: All the substances contained in this product are listed or exempted from listing in the following inventories:
U.S.A. (TSCA)

Air Tool Lubricant

Date of Previous Version: 2015-10-05

Revision Date: 2016-02-11

U.S. Federal Regulations

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

SARA 311/312 Hazard Categories

| | |
|------------------------------------|-----|
| Acute Health Hazard: | Yes |
| Chronic Health Hazard: | No |
| Fire Hazard: | No |
| Sudden Release of Pressure Hazard: | No |
| Reactive Hazard: | No |

Clean Water Act

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42).

Clean Air Act, Section 112 Hazardous Air Pollutants (HAPs) (see 40 CFR 61)

This product does not contain any substances regulated as hazardous air pollutants (HAPS) under Section 112 of the Clean Air Act Amendments of 1990.

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level pertaining to releases of this material.

U.S. State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

No information available

16. OTHER INFORMATION

| | | | | |
|------|-----------------|----------------|-------------------|---------------------------------|
| NFPA | Health Hazard 1 | Flammability 1 | Instability 0 | Physical and chemical hazards – |
| HMIS | Health Hazard 1 | Flammability 1 | Physical Hazard 0 | Personal Protection X |

NFPA (National Fire Protection Association) HMIS (Hazardous Material Information System)

This safety data sheet serves to complete but not to replace the technical product sheets. The information contained herein is given in good faith and is accurate to the best of knowledge at the date indicated above. It is understood by the user that any use of the product for purposes other than those for which it was designed entails potential risk. The information given herein in no way dispenses the user from knowing and applying all provisions regulating his activity. The user bears sole liability for the precautions required when using the product. The regulatory texts indicated herein are intended to aid the user to fulfil his obligations. This list is not to be considered complete and exhaustive. It is the user's responsibility to ensure that he is subject to no other obligations than those mentioned.

Safety Data Sheet



1. Identification

Product Name: PVTLBL SSPR 6PK QUICKC GLOSS WHITE **Revision Date:** 2/22/2018
Product Identifier: J2850830 **Supersedes Date:** 10/30/2015
Product Use/Class: Primer/Aerosol
Supplier: Rust-Oleum Corporation
 11 Hawthorn Parkway
 Vernon Hills, IL 60061
 USA **Manufacturer:** Rust-Oleum Corporation
 11 Hawthorn Parkway
 Vernon Hills, IL 60061
 USA
Preparer: Regulatory Department
Emergency Telephone: 24 Hour Hotline: 847-367-7700

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

34% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|---|
| Carcinogenicity, category 2 | H351 | Suspected of causing cancer. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Eye Irritation, category 2 | H319 | Causes serious eye irritation. |
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |

GHS LABEL PRECAUTIONARY STATEMENTS

P201 Obtain special instructions before use.

| | |
|----------------|--|
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P261 | Avoid breathing dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|-------------------------------|----------------|-----------------------|--------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| n-Butane | 106-97-8 | 10-25 | GHS04 | H280 |
| Hydrotreated Light Distillate | 64742-47-8 | 2.5-10 | GHS08 | H304 |
| Titanium Dioxide | 13463-67-7 | 2.5-10 | Not Available | Not Available |

| | | | | |
|--|------------|---------|-------------------|--------------------------|
| n-Butyl Acetate | 123-86-4 | 2.5-10 | GHS02-GHS07 | H226-336 |
| Naphtha, Petroleum, Hydrotreated Light | 64742-49-0 | 2.5-10 | GHS08 | H304 |
| Solvent Naphtha, Light Aromatic | 64742-95-6 | 2.5-10 | GHS07-GHS08 | H304-332 |
| 1,2,4-Trimethylbenzene | 95-63-6 | 1.0-2.5 | GHS02-GHS07-GHS08 | H226-304-315-319-332-335 |
| Naphtha (petroleum), heavy aromatic | 64742-94-5 | 0.1-1.0 | GHS07-GHS08 | H304-312 |
| Ethylbenzene | 100-41-4 | 0.1-1.0 | GHS02-GHS07-GHS08 | H225-304-332-351-373 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only in a well-ventilated area. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Keep away from heat, sparks, flame and sources of ignition. Contents under pressure. Do not expose to heat or store above 120 ° F. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL- TWA | OSHA PEL- CEILING |
|---|------------|-----------------------|-------------------|--------------------|------------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 25.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butane | 106-97-8 | 15.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Hydrotreated Light Distillate | 64742-47-8 | 10.0 | N.E. | N.E. | N.E. | N.E. |
| Titanium Dioxide | 13463-67-7 | 10.0 | 10 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| n-Butyl Acetate | 123-86-4 | 10.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| Naphtha, Petroleum, Hydrotreated Light | 64742-49-0 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Solvent Naphtha, Light Aromatic | 64742-95-6 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Naphtha (petroleum), heavy aromatic | 64742-94-5 | 1.0 | N.E. | N.E. | N.E. | N.E. |
| Ethylbenzene | 100-41-4 | 1.0 | 20 ppm | N.E. | 100 ppm | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Use impervious gloves to prevent skin contact and absorption of this material through the skin. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications. Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Relative Density: | 0.724 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n- octanol/water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 0.9 - 13.0 |
| Boiling Range, °C: | -37 - 204 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalis.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: Substance may cause slight skin irritation. May cause skin irritation. Allergic reactions are possible. Prolonged or repeated contact may cause skin irritation.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed. Aspiration hazard if swallowed; can enter lungs and cause damage.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010)

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|--|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 64742-47-8 | Hydrotreated Light Distillate | >5000 mg/kg Rat | >2000 mg/kg Rabbit | >5000 mg/L Rat |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 64742-49-0 | Naphtha, Petroleum, Hydrotreated Light | >5000 mg/kg Rat | >3160 mg/kg Rabbit | >4951 mg/L Rat |
| 64742-95-6 | Solvent Naphtha, Light Aromatic | 8400 mg/kg Rat | >2000 mg/kg Rabbit | N.E. |
| 95-63-6 | 1,2,4-Trimethylbenzene | 3280 mg/kg Rat | >3160 mg/kg Rabbit | 18 mg/L Rat |
| 64742-94-5 | Naphtha (petroleum), heavy aromatic | >5000 mg/kg Rat | >1795 mg/kg Rabbit | 36 mg/L Rat |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. Dispose of material in accordance to local, state, and federal regulations and ordinances. Do not allow to enter waterways, wastewater, soil, storm drains or sewer systems. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|--------------------------------------|-----------------------------|-------------------|--------------------------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint Products in Limited Quantities | Aerosols | Aerosols | Paint Products in Limited Quantities |
| Hazard Class: | N.A. | 2.1 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

No Information

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------|----------------|
| 1,2,4-Trimethylbenzene | 95-63-6 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

| |
|------------------------------|
| 16. Other Information |
|------------------------------|

HMIS RATINGS

| | | | |
|-------------------|------------------------|---------------------------|-------------------------------|
| Health: 2* | Flammability: 4 | Physical Hazard: 0 | Personal Protection: X |
|-------------------|------------------------|---------------------------|-------------------------------|

NFPA RATINGS

| | | |
|------------------|------------------------|-----------------------|
| Health: 2 | Flammability: 4 | Instability: 0 |
|------------------|------------------------|-----------------------|

| | |
|---|-----|
| VOLATILE ORGANIC COMPOUNDS, g/L: | 540 |
|---|-----|

| | |
|---------------------------|-----------|
| SDS REVISION DATE: | 2/22/2018 |
|---------------------------|-----------|

| | |
|-----------------------------|--|
| REASON FOR REVISION: | Regulatory Formula Source Changed Product Composition Changed Substance and/or Product Properties Changed in Section(s): 02 - Hazard Identification 09 - Physical & Chemical Properties 15 - Regulatory Information 16 - Other Information Statement(s) Changed |
|-----------------------------|--|

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.



SAFETY DATA SHEET

DATE: 1.2.19 Rev 9

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: Marking Chalk Blue Dye

USE OF PRODUCT: Chalk Box Marking Chalk

MANUFACTURER: Keson LLC

ADDRESS: 810 Commerce St., Aurora, IL 60504

EMERGENCY PHONE: 1-800-345-3766 (8am to 5pm Central Time, Monday – Friday)

SECTION 2: HAZARDS IDENTIFICATION

OSHA GHS Hazard Statements (Warning Label)

DANGER: May cause cancer (lung)

EMERGENCY OVERVIEW:

Product Description: These products are colored, finely powdered, odorless chalks. Health Hazards: Inhalation of dusts from this product may irritate the respiratory system. Skin and eye contact may cause mechanical abrasion.

Flammability Hazards: These chalks are not flammable. Finely divided dusts from these products can form explosive mixtures in air. If involved in a fire, these products may decompose to form iron oxides, aluminum oxides, silicon dioxide, sulfur dioxide, magnesium oxides, carbon oxides and calcium oxides.

POTENTIAL HEALTH EFFECTS

EYES: May cause irritation. Chalk dust is discomforting and abrasive to the eyes.

SKIN: Prolonged contact may cause irritation. When the product is used as intended, it is unlikely to cause problems.

INGESTION: Ingestion of large amount may cause internal irritation. Ingestion is considered an unlikely route of entry in commercial or industrial environments.

INHALATION: May irritate the respiratory system. When the product is used as intended, it is unlikely to cause problems.

Chronic: Repeated or prolonged inhalation exposure to crystalline silica dust beyond exposure limits may cause chronic lung injury (silicosis). Prolonged inhalation of iron oxide dust is known to produce a benign lung condition known as siderosis. When the product is used as intended, dust levels should not exceed exposure limits. See Sections 8 and 11.



DANGER

Hazard Ratings:

Hazardous Material Identification System (HMIS): Health 1*, Flammability 0, Reactivity 0
*chronic effects

National Fire Protection Association (NFPA): Health 1, Flammability 0, Reactivity 0

Obtain special instructions before use. May cause cancer by inhalation. Avoid breathing dust or fume. Causes serious eye irritation. Causes mild skin irritation. Do not handle until all safety precautions have been read and understood. Wear protective gloves and eye protection.



SAFETY DATA SHEET

DATE: 1.2.19 Rev 9

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

| Substance name | Value (%) | CAS No. | EC No. |
|-------------------|-----------|------------|--------|
| Ultra Marine Blue | 100 | 57455-37-5 | None |

SECTION 4: FIRST AID MEASURES

EYES: If product enters the eye do not rub, rubbing may cause abrasions. Flush eyes with copious amounts of water for 15 minutes, occasionally lifting upper and lower eyelids. If adverse effects persist after flushing with water, get medical aid.

SKIN: Wet clothing first to minimize dust generation, then; remove contaminated clothing and shoes. Wash contaminated clothing before wearing again. Wash infected areas with water and soap. Get medical attention in the event of irritation.

INGESTION: If this material is swallowed, CALL PHYSICIAN OR POISON CONTROL CENTER FOR MOST CURRENT INFORMATION. If professional advice is not available, seek immediate medical attention. If alert, victim should drink up to three glasses of water. Do not induce vomiting. Never induce vomiting or give diluents (milk or water) to someone who is unconscious, having convulsions, or unable to swallow. If victim is convulsing, maintain an open airway and obtain emergency medical attention.

INHALATION: If dust or particulates are inhaled, Remove from exposure and move to fresh air immediately. Encourage to blow nose to ensure clear breathing passages. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid if cough or other symptoms appear.

NOTES TO PHYSICIANS OR FIRST AID PROVIDERS: Show this data safety sheet to medical professionals.

SECTION 5: FIRE-FIGHTING MEASURES

EXTINGUISHING MEDIA: Substance is noncombustible, however; the containers may burn, releasing carbon monoxide and carbon dioxide. Use appropriate extinguishing media for the combustible material involved in a fire.

SPECIAL FIRE FIGHTING PROCEDURES: As in any fire, wear self-contained breathing apparatus in pressure demand and full protective gear.

FIRE EXTINGUISHING MEDIA: Unless incompatibilities exist for surrounding materials, carbon dioxide, water spray, "ABC" type chemical extinguishers, foam, dry chemical and halon extinguishers can be used to fight fires involving this material.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Finely divided dusts from this material pose a hazard of an air/dust explosion in presence of an ignition source

HAZARDOUS DECOMPOSITION PRODUCTS: If oxidation of this product should occur, heat will be liberated which could cause surrounding combustibles to burn.



SAFETY DATA SHEET

DATE: 1.2.19 Rev 9

SECTION 6: ACCIDENTAL RELEASE MEASURES

ACCIDENTAL RELEASE MEASURES: Wear appropriate personal protective equipment. Do not allow this material to be released into the environment. Recover the product whenever possible. Avoid generating dust when sweeping or shoveling up. If required, wet the material with water to prevent creating dust. Pick up and place in a suitable container for reclamation or disposal.

Cleanup of Small Spills: Solids should be gently covered with wet absorbent pads. Clean spill with pad and dispose of properly. Decontaminate the spill area (three times) using a bleach and detergent solution and then rinse with clean water.

Large Spills: Restrict access to the spill areas. For spills of greater than 5 g, be sure not to generate dusts by gently covering with damp absorbent sheets, spill-control pads, pillows, cloths, or towels. The dispersion of particles into surrounding air and the possibility of inhalation is a serious matter and should be treated as such. Do not apply chemical in-activators as they may produce hazardous by-products. Sweep up or vacuum spilled solid (an explosion-proof vacuum should be used), avoiding the generation of airborne dusts. Decontaminate the area thoroughly.

All Spills: Use procedures described above and then place all spill residues in an appropriate, labeled container and seal. Move to a secure area. Dispose of in accordance with Federal, State, and local hazardous waste disposal regulations (see Section 13, Disposal Considerations). For spills on water, contain, minimize dispersion and collect. Dispose of recovered material and report spill per regulatory requirements.

SECTION 7: HANDLING AND STORAGE

PRECAUTIONS FOR SAFE HANDLING: All employees who handle this material should be trained to handle it safely. Open containers slowly on a stable surface. As with all chemicals, avoid getting this product ON YOU or IN YOU. Wash thoroughly after handling this product. Do not eat, drink, smoke, or apply cosmetics while handling this product. Avoid breathing airborne dusts generated by this product. Use in a well-ventilated area. Ensure this product is used with adequate ventilation and personal protective equipment (see Section 8, Exposure Controls and Personal Protection). Avoid airborne dusts generated by this product. Clean work areas routinely to prevent accumulation of dust. Clean up spills promptly.

CONDITIONS FOR SAFE STORAGE: Empty containers may contain residual amounts of this product; therefore, empty containers should be handled with care. Store containers in a cool, dry location, away from direct sunlight, sources of intense heat, or where freezing is possible. Store away from incompatible materials (see Section 10, Stability and Reactivity). Have appropriate extinguishing equipment in the storage area (e.g., sprinkler system, portable fire extinguishers). Keep container tightly closed when not in use. Refer to NFPA 654, *Prevention of Fire and Dust Explosions from the Manufacturing, Processing and Handling of Combustible Particulate Solids* for additional information on storage.

SPECIFIC END USE(S): These products are used in chalk line devices in construction. Follow all industry standards for use of this product.

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Always use this product in areas where adequate ventilation is provided. Decontaminate equipment thoroughly, before maintenance begins. Collect all residue and dispose of according to applicable or applicable federal, state, provincial and local standards.



SAFETY DATA SHEET

DATE: 1.2.19 Rev 9

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Limit 8-Hour TWA¹(mg/m³)

| Component | CAS No. | % by weight | OSHA PEL | ACGIH TLV | NIOSH REL |
|-------------------|------------|-------------|----------|-----------|-----------|
| Ultra Marine Blue | 57455-37-5 | 100 | None | None | None |

¹TWA = Time-weighted average

²Total dust.

³Respirable dust.

⁴Calcium carbonate may contain crystalline silica at levels between 0.1 and 1.0 % and varies naturally.

⁵Using the OSHA quartz formula, this PEL was calculated assuming crystalline silica content of 1.0% in this ingredient.

SPECIAL NOTE: The following information is provided to assist employers in complying with OSHA regulations found in 29 CFR Subpart I (beginning at 1910.132, including U.S. Federal OSHA Respiratory Protection (29 CFR 1910.134), OSHA Eye Protection 29 CFR 1910.133, OSHA Hand Protection 29 CFR 1910.138, OSHA Foot Protection 29 CFR 1910.136 and OSHA Body Protection 29 CFR 1910.132), equivalent standards of Canada (including CSA Respiratory Standard Z94.4-02, Z94.3-M1982, Industrial Eye and Face Protectors and CSA Standard Z195-02, Protective Footwear), or standards of EU member states (including EN 529:2005 for respiratory PPE, CEN/TR 15419:2006 for hand protection, and CR 13464:1999 for face/eye protection). Please reference applicable regulations and standards for relevant details.

ENGINEERING CONTROLS: Facilities storing or utilizing this material should have potable water available for washing of eyes and skin. Use sufficient general area ventilation. To ensure exposure levels are maintained below the limits provided in this section if applicable.

VENTILATION: Local ventilation should be used.

RESPIRATORY PROTECTION: Maintain airborne contaminant concentrations below exposure limits listed above. For materials without listed exposure limits, minimize respiratory exposure. If necessary, use only respiratory protection authorized under appropriate regulations. Oxygen levels below 20% are considered IDLH by U.S. OSHA. In such atmospheres, use of a full-face piece pressure/demand SCBA or a full face piece, supplied air respirator with auxiliary self-contained air supply is required under U.S. OSHA's Respiratory Protection Standard (1910.134-1998).

EYE PROTECTION: Wear safety goggles/glasses as appropriate for the task if dust or other particulates are present. Face shields maybe recommended if solutions are made. If necessary, refer to appropriate regulations.

SKIN PROTECTION: Use appropriate protective clothing for the task. Full-body protective clothing and gloves are recommended for emergency response procedures. If necessary, refer to the U.S. OSHA Technical Manual (Section VII: Personal Protective Equipment) or other appropriate regulations.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT: No information found.

WORK HYGIENIC PRACTICES: Wash contaminated clothing before reuse.

EXPOSURE GUIDELINES: No information found.



SAFETY DATA SHEET

DATE: 1.2.19 Rev 9

| PROTECTIVE EQUIPMENT | | | |
|----------------------|---------------|-------|---------------|
| EYES | RESPIRATORY | HANDS | BODY |
| | SEE SECTION 8 | | SEE SECTION 8 |

For Routine Industrial Use and Handling Applications

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate
3 = Serious 4 = Severe * = Chronic hazard

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: Powder – Blue Color

ODOR: Odorless

pH AS SUPPLIED: 8.5-9.5 (at 10% solids)

BOILING POINT: No Data Available

MELTING POINT: Decomposes

F: 1517 Deg

C: 825Deg

FREEZING POINT: No Data Available.

VAPOR PRESSURE (mmHg): No Data Available.

VAPOR DENSITY (AIR = 1): No Data Available.

SPECIFIC GRAVITY (H₂O = 1): No Data Available.

EVAPORATION RATE: No Data Available.

SECTION 10: STABILITY AND REACTIVITY

STABILITY: Stable under normal temperatures and pressures.

CONDITIONS TO AVOID (STABILITY): Incompatible materials

INCOMPATIBILITY (MATERIAL TO AVOID): Strong oxidizing agents, acids, aluminum, fluorine, magnesium, peroxides, hydrazine, calcium hypochlorite, performic acid, and bromine pentafluoride.

HAZARDOUS DECOMPOSITION OR BY-PRODUCTS: Carbon monoxide, carbon dioxide, calcium oxide.

HAZARDOUS POLYMERIZATION: Does not occur.



SAFETY DATA SHEET

DATE: 1.2.19 Rev 9

SECTION 11: TOXICOLOGICAL INFORMATION

TOXICOLOGICAL INFORMATION: SYMPTOMS OF EXPOSURE BY ROUTE OF EXPOSURE: The most significant routes of industrial exposure to this product are by skin or eye contact and inhalation.

INHALATION: If dusts or particulates from these products are inhaled, irritation of the nose, throat, and lungs can occur. Symptoms may include sneezing, coughing, nasal congestion, and difficulty breathing. Symptoms are generally alleviated upon exposure to fresh air. If heated, chronic exposure to concentrations of silicon dioxide fume may cause chronic obstructive lung disease. Inhalation of iron oxide fume or dust is cause of pulmonary roentgen graphic appearance called siderosis, or an accumulation of iron that leads to reduced lung capacity. Chronic inhalation exposure to this material may cause silicosis, pulmonary fibrosis, bronchitis or present a hazard of cancer, due to the presence of Crystalline Silica.

CONTACT WITH SKIN or EYES: Skin contact may cause abrasion, redness, and discomfort. Prolonged and repeated skin exposure may cause dermatitis (dry, red skin). Direct eye contact with these products may cause stinging, abrasions, and redness. Dust can cause mechanical irritation to the eye. Repeated contact of dust with the eyes can cause conjunctivitis a disease that may cause eyes to become pink and sore), or can cause discoloration of the eyes.

SKIN ABSORPTION: This product does not pose a hazard of skin absorption.

INGESTION: Ingestion is an unlikely route of occupational exposure to this product. In the unlikely event that dusts from the product are ingested nausea, vomiting, and diarrhea may result. Repeated ingestion of iron compounds can cause vomiting, diarrhea, pink urine, black stool, and liver or kidney damage. Repeated ingestion of iron compounds can also cause siderosis, which is an accumulation of iron in tissues.

Chronic: Repeated inhalation exposure of crystalline silica above safe levels may cause adverse effects to the respiratory system. Chronic inhalation may result in pulmonary fibrosis.

SECTION 11 NOTES: The International Agency for Research on Cancer (IARC) classified (quartz) crystalline silica (cs) as a probable carcinogen and in 1997 reclassified it as a Group 1 carcinogen, i.e., that there was sufficient evidence for carcinogenicity in experimental animals and sufficient evidence for carcinogenicity in humans. In its Ninth Annual Report on Carcinogens, the National Toxicology Program (NTP) listed crystalline silica as a known human carcinogen, based on sufficient evidence of carcinogenicity from studies in humans indicating a causal relationship between exposure to respirable crystalline silica and increased lung cancer rates in workers exposed to crystalline silica dust. The International Agency for Research on Cancer (IARC) has evaluated crystalline silica and determined that "crystalline silica inhaled in the form of quartz or cristobalite from occupational sources is carcinogenic to humans (Group 1)."

SECTION 12: ECOLOGICAL INFORMATION

ECOLOGICAL INFORMATION: Safe practices must be in place to prevent environmental contamination.

SECTION 12 NOTES: These products have not been tested for aquatic or animal toxicity. All release to terrestrial, atmospheric and aquatic environments should be avoided.



SAFETY DATA SHEET

DATE: 1.2.19 Rev 9

SECTION 13: DISPOSAL CONSIDERATIONS

WASTE DISPOSAL METHOD: Waste from residue of this product is NOT hazardous waste according to the EPA regulations. Disposal by landfill may be acceptable. Waste disposal must follow all US Federal, State and Local (EPA) regulations, Canadian and European Governmental Guidelines.

SECTION 14: TRANSPORT INFORMATION

U.S. DEPARTMENT OF TRANSPORTATION: (DOT) These products are not classified as dangerous goods under the DOT regulations 49CFR: 172.101

WATER TRANSPORTATION: (IMO) Not classified as dangerous

AIR TRANSPORTATION: (ATA) Not classified as dangerous

SECTION 15: REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS

OSHA: Components are listed as air contaminants. Regulation standards -29CFR. Standard number 1910.100 Table 2-1

TSCA (TOXIC SUBSTANCE CONTROL ACT): All components are listed on the TSCA inventory

CERCLA (COMPREHENSIVE RESPONSE COMPENSATION, AND LIABILITY ACT): Not Listed

SARA TITLE III (SUPERFUND AMENDMENTS AND REAUTHORIZATION ACT): The components of this product has been reviewed on the EAP Hazards Categories in section 311-312 and is considered a chronic health risk.

STATE REGULATIONS: This product can expose you to chemicals including Crystalline Silica which is known to the State of California to cause cancer. For more information, visit www.p65Warnings.ca.gov

CANADA WHIMS: (Workplace Hazardous Materials Information System) This SDS sheet contains all of the information needed by the CPR. (Controlled Products Regulation)

WHIMS CLASSIFICATION D2A: Very toxic (carcinogenicity)

EU CLASSIFICATION, LABELING: This product does meet the definition of hazard class described by the EUROPEAN UNION COUNCIL DIRECTIVE EC# 1272/2008. Classification information for components Crystalline Silica. EU Classification (xn) Harmful EU risk r68/20 harmful: Risk of irreversible damage through inhalation.



SAFETY DATA SHEET


DATE: 1.2.19 Rev 9

SECTION 16: OTHER INFORMATION

Hazard Ratings:

Hazardous Material Identification System (HMIS): Health 1*, Flammability 0, Reactivity 0*chronic effects


National Fire Protection Association (NFPA): Health 1, Flammability 0, Reactivity 0

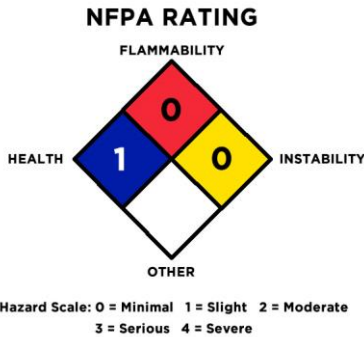

The contents and format of this SDS are in accordance with the U.S. Hazard Communication Standard 29 CFR 1910.1200; the Canadian CPR, and Workplace Hazardous Materials Information System (WHMIS); and EEC Commission Directive 1999/45/EC, and EEC Commission Regulation 1907/2006/EC (REACH) Annex II.

DISCLAIMER OF LIABILITY The information in this SDS was obtained from sources which we believe are correct. However, the information is provided without any warranty, regarding its correctness. The conditions or methods of handling, storage, use or disposal of the product are beyond our control. For this and other reasons, we do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of the product. This SDS was prepared and is to be used only for this product. If the product is used as a component in another product, this SDS information may not be applicable.

End of document

| | | |
|---|--|---------------------------|
|  | | Page: 1 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL VV838 | | Version: 1.9 |

29 CFR 1910.1200 (OSHA HazCom 2012)

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : Valvoline™ SAE 80W-90
HP GEAR OIL


| | |
|---|---|
| <p>Details of the supplier of the safety data sheet Valvoline LLC 100 Valvoline Way Lexington, KY 40509 United States of America (USA) 1-800-TEAMVAL (1-800-832-6825)</p> <p>SDS@valvoline.com</p> | <p>Emergency telephone number 1-800-VALVOLINE (1-800-825-8654)</p> <p>Regulatory Information Number 1-800-TEAMVAL (1-800-832-6825)</p> <p>Product Information 1-800-TEAMVAL (1-800-832-6825)</p> |
|---|---|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Skin sensitization : Category 1

GHS label elements

Hazard pictograms : 

Signal Word : Warning

Hazard Statements : May cause an allergic skin reaction.

Precautionary Statements : **Prevention:**
Avoid breathing dust/ fume/ gas/ mist/ vapors/ spray.
Contaminated work clothing must not be allowed out of the workplace.
Wear protective gloves.
Response:
IF ON SKIN: Wash with plenty of soap and water.
If skin irritation or rash occurs: Get medical advice/ attention.
Wash contaminated clothing before reuse.
Disposal:

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

Dispose of contents/ container to an approved waste disposal plant.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Classification | Concentration (%) |
|--|------------|--|-------------------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | Not a hazardous substance or mixture. | >=60.00 - < 70.00 |
| OLEFINSULFIDE | 68937-96-2 | Skin Sens. 1B; H317 | >=1.50 - < 5.00 |
| React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched) | | Flam. Liq. 4; H227 Acute Tox. 4; H302 Eye Dam. 1; H318 Skin Sens. 1; H317 | >=0.50 - < 1.00 |

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : If breathed in, move person into fresh air.
If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : Remove contaminated clothing. If irritation develops, get medical attention.
If on skin, rinse well with water.
First aid is not normally required. However, it is recommended that exposed areas be cleaned by washing with soap and water.
Wash contaminated clothing before re-use.
- In case of eye contact : Flush eyes with water as a precaution.



| | |
|--|---------------------------|
| SAFETY DATA SHEET | Revision Date: 09/07/2018 |
| | Print Date: 10/28/2020 |
| | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL VV838 | Version: 1.9 |

Remove contact lenses.
Protect unharmed eye.
If eye irritation persists, consult a specialist.

If swallowed : Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.

Most important symptoms and effects, both acute and delayed : No symptoms known or expected.
May cause an allergic skin reaction.

Notes to physician : No hazards which require special first aid measures.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Water spray
Foam
Carbon dioxide (CO2)
Dry chemical

Unsuitable extinguishing media : High volume water jet

Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous combustion products : carbon dioxide and carbon monoxide
Hydrocarbons
Sulphur oxides

Specific extinguishing methods :

Product is compatible with standard fire-fighting agents.

Further information : Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations.

Special protective equipment for firefighters : In the event of fire, wear self-contained breathing apparatus.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and : Use personal protective equipment.
Persons not wearing protective equipment should be excluded

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

- emergency procedures : from area of spill until clean-up has been completed.
- Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
If the product contaminates rivers and lakes or drains inform respective authorities.
- Methods and materials for containment and cleaning up : Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust).
Keep in suitable, closed containers for disposal.
- Other information : Comply with all applicable federal, state, and local regulations.

SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Do not breathe vapours/dust.
Do not smoke.
Persons susceptible to skin sensitisation problems or asthma, allergies, chronic or recurrent respiratory disease should not be employed in any process in which this mixture is being used.
Container hazardous when empty.
Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
Smoking, eating and drinking should be prohibited in the application area.
For personal protection see section 8.
Dispose of rinse water in accordance with local and national regulations.
- Conditions for safe storage : Keep container tightly closed in a dry and well-ventilated place.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|--|------------|-------------------------------|--|----------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | TWA | 5 mg/m3 Mist | OSHA Z-1 |
| | | TWA | 5 mg/m3 | ACGIH |

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

| | | | | |
|--|--|-----|------------------------|-----------|
| | | | Inhalable fraction | |
| | | TWA | 5 mg/m3 Mist | OSHA P0 |
| | | TWA | 5 mg/m3 Mist | NIOSH REL |
| | | ST | 10 mg/m3 Mist | NIOSH REL |
| | | PEL | 5 mg/m3 particulate | CAL PEL |

Engineering measures : Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Personal protective equipment

Respiratory protection : Respiratory protection is not required under normal conditions of use.

Hand protection

Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.

Eye protection : Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.

Skin and body protection : Wear as appropriate:
Impervious clothing
Safety shoes
Choose body protection according to the amount and concentration of the dangerous substance at the work place.
Discard gloves that show tears, pinholes, or signs of wear.
Wear resistant gloves (consult your safety equipment supplier).

Hygiene measures : Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Physical state : liquid
 Colour : amber
 Odour : No data available
 Odour Threshold : No data available
 pH : No data available

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

| | |
|--|---|
| Melting point/freezing point | : No data available |
| Boiling point/boiling range | : > 424.9 °F / 218.3 °C (1013.333 hPa) |
| Flash point | : 394 - 480 °F / 201 - 249 °C Method: Cleveland open cup |
| Evaporation rate | : > 1 Ethyl Ether |
| Flammability (solid, gas) | : No data available |
| Upper explosion limit | : No data available |
| Lower explosion limit | : No data available |
| Vapour pressure | : < 0.1000000 mmHg |
| Relative vapour density | : > 1AIR=1 |
| Relative density | : 0.89 (60.00 °F) |
| Density | : 0.8916 g/cm ³ (15.56 °C) |
| Solubility(ies) | |
| Water solubility | : No data available |
| Solubility in other solvents | : No data available |
| Partition coefficient: n-octanol/water | : No data available |
| Thermal decomposition | : No data available |
| Viscosity | |
| Viscosity, dynamic | : No data available |
| Viscosity, kinematic | : 146 mm ² /s (40 °C) |
| Oxidizing properties | : No data available |

SECTION 10. STABILITY AND REACTIVITY

| | |
|--------------------|---|
| Reactivity | : No decomposition if stored and applied as directed. |
| Chemical stability | : Stable under recommended storage conditions. |

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

Possibility of hazardous reactions : Product will not undergo hazardous polymerization.

Conditions to avoid : None known.

Incompatible materials : Strong oxidizing agents

Hazardous decomposition products : carbon dioxide and carbon monoxide
Sodium oxides

SECTION 11. TOXICOLOGICAL INFORMATION**Information on likely routes of exposure**

Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Not classified based on available information.

Product:

Acute dermal toxicity : Acute toxicity estimate: > 5,000 mg/kg
Method: Calculation method

Components:**DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:**

Acute oral toxicity : LD50 (Rat): > 15 g/kg

Acute dermal toxicity : LD50 (Rabbit): > 5 g/kg


OLEFINSULFIDE:

Acute oral toxicity : LD50 (Rat): > 2,000 mg/kg
Method: OECD Test Guideline 401
Assessment: Not classified as acutely toxic by ingestion under GHS.
Remarks: No mortality observed at this dose.

Acute dermal toxicity : LD50 (Rat): > 2,000 mg/kg
Method: OECD Test Guideline 402
Assessment: Not classified as acutely toxic by dermal absorption under GHS.
Remarks: No mortality observed at this dose.

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Acute oral toxicity : LD50 (Rat): ca. 2,000 mg/kg
Method: OECD Test Guideline 401
Assessment: The component/mixture is classified as acute

| | | |
|--|--|---------------------------|
|  | | Page: 8 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL | | Version: 1.9 |
| VV838 | | |

oral toxicity, category 4.

Skin corrosion/irritation

Not classified based on available information.

Product:

Remarks : May cause skin irritation in susceptible persons.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Assessment : Slight, transient irritation
 Result : Slight, transient irritation

OLEFINSULFIDE:

Result : Mild skin irritation

Serious eye damage/eye irritation

Not classified based on available information.

Product:

Remarks : Vapours may cause irritation to the eyes, respiratory system and the skin.

Remarks : Unlikely to cause eye irritation or injury.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Result : No eye irritation
 Assessment : No eye irritation

OLEFINSULFIDE:

Result : Slight, transient irritation

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Result : Corrosive

Respiratory or skin sensitisation

Skin sensitisation

May cause an allergic skin reaction.

Respiratory sensitisation

Not classified based on available information.

Product:

Remarks : May cause allergic skin reaction.

Components:

OLEFINSULFIDE:

Test Type : Maximisation Test
 Species : Guinea pig
 Assessment : The product is a skin sensitiser, sub-category 1B.
 Method : OECD Test Guideline 406

**SAFETY DATA SHEET**

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Test Type : Local lymph node assay
Species : Mouse
Method : OECD Test Guideline 429
Result : May cause sensitisation by skin contact.

Germ cell mutagenicity

Not classified based on available information.

Components:**OLEFINSULFIDE:**

Genotoxicity in vitro : Test Type: in vitro assay
Result: Positive results were obtained in some in vitro tests.

Genotoxicity in vivo : Test Type: Micronucleus test
Species: Mouse
Cell type: Bone marrow
Method: OECD Test Guideline 474
Result: negative

Carcinogenicity

Not classified based on available information.

Components:**DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:**

Carcinogenicity - Assessment : Classified based on DMSO extract content < 3% (Regulation (EC) 1272/2008, Annex VI, Part 3, Note L)

IARC No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

OSHA No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

NTP No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

Reproductive toxicity

Not classified based on available information.

STOT - single exposure

Not classified based on available information.

STOT - repeated exposure

Not classified based on available information.

Aspiration toxicity

Not classified based on available information.

Product:

No aspiration toxicity classification

Components:**DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:**

No aspiration toxicity classification

**SAFETY DATA SHEET**

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

Further information**Product:**

Remarks : No data available

SECTION 12. ECOLOGICAL INFORMATION**Ecotoxicity****Product:**

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Acute aquatic toxicity Category 3; Harmful to aquatic life.

Long-term (chronic) aquatic hazard : Chronic aquatic toxicity Category 3; Harmful to aquatic life with long lasting effects.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Toxicity to fish : LL50 (Fish): > 100 mg/l
Exposure time: 96 hToxicity to daphnia and other aquatic invertebrates : EL50 (Aquatic invertebrates): > 10,000 mg/l
Exposure time: 48 hToxicity to algae : EL50 (Algae, algal mat (Algae)): > 100 mg/l
Exposure time: 72 h

Toxicity to fish (Chronic toxicity) : NOEC (Fish): 10 mg/l

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Aquatic invertebrates): 10 mg/l

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Not classified based on available information.

Long-term (chronic) aquatic hazard : Not classified based on available information.

OLEFINSULFIDE:

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Harmful to aquatic life.

Long-term (chronic) aquatic hazard : Harmful to aquatic life with long lasting effects.

| | |
|--|---------------------------|
| SAFETY DATA SHEET | Revision Date: 09/07/2018 |
| | Print Date: 10/28/2020 |
| | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL VV838 | Version: 1.9 |

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Toxicity to fish : LL50 (Oncorhynchus mykiss (rainbow trout)): ca. 24 mg/l
 Exposure time: 96 h
 Test Type: static test
 Test substance: WAF
 Method: OECD Test Guideline 203

Toxicity to daphnia and other aquatic invertebrates : EL50 (Daphnia magna (Water flea)): ca. 91.4 mg/l
 Exposure time: 48 h
 Test Type: static test
 Test substance: WAF
 Method: OECD Test Guideline 202

Toxicity to algae : ErC50 (Pseudokirchneriella subcapitata (green algae)): 15 mg/l
 End point: Growth inhibition
 Exposure time: 96 h
 Test Type: static test
 Method: OECD Test Guideline 201

NOEC (Pseudokirchneriella subcapitata (green algae)): 3.3 mg/l
 End point: Growth inhibition
 Exposure time: 96 h
 Test Type: static test
 Method: OECD Test Guideline 201

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Daphnia magna (Water flea)): 0.12 mg/l
 Exposure time: 21 d
 End point: Reproduction Test
 Test Type: semi-static test
 Test substance: WAF
 Method: OECD Test Guideline 211

Ecotoxicology Assessment Short-term (acute) aquatic hazard : Toxic to aquatic life.


Long-term (chronic) aquatic hazard : Toxic to aquatic life with long lasting effects.

Persistence and degradability

Components:

OLEFINSULFIDE:

Biodegradability : Result: Not readily biodegradable.
 Biodegradation: 13 %
 Exposure time: 28 d
 Method: OECD Test Guideline 301B

| | | |
|--|--|---------------------------|
|  | | Page: 12 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL | | Version: 1.9 |
| VV838 | | |

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Biodegradability : Result: Not readily biodegradable.
 Biodegradation: 7.4 %
 Exposure time: 28 d
 Method: Modified Sturm Test

No data available

Bioaccumulative potential

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Partition coefficient: n- : log Pow: Expected > 7
 octanol/water

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Partition coefficient: n- : Remarks: No data available
 octanol/water

No data available

Mobility in soil

Components:

No data available

Other adverse effects

No data available

Product:

Additional ecological information : An environmental hazard cannot be excluded in the event of unprofessional handling or disposal., Harmful to aquatic life with long lasting effects.

Components:

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

General advice : The product should not be allowed to enter drains, water courses or the soil.
 Do not contaminate ponds, waterways or ditches with chemical or used container.
 Send to a licensed waste management company.

Dispose of in accordance with all applicable local, state and federal regulations.

Contaminated packaging : Empty remaining contents.
 Dispose of as unused product.
 Empty containers should be taken to an approved waste handling site for recycling or disposal.
 Do not re-use empty containers.



SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

SECTION 14. TRANSPORT INFORMATION

International transport regulations

REGULATION

| ID NUMBER | PROPER SHIPPING NAME | *HAZARD CLASS | SUBSIDIARY HAZARDS | PACKING GROUP | MARINE POLLUTANT / LTD. QTY. |
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|
| | | | | | |

U.S. DOT - ROAD

| |
|---------------------|
| Not dangerous goods |
| |

CFR_RAIL_C

| |
|---------------------|
| Not dangerous goods |
| |

U.S. DOT - INLAND WATERWAYS

| |
|---------------------|
| Not dangerous goods |
| |

TDG_ROAD_C

| |
|---------------------|
| Not dangerous goods |
| |

TDG_RAIL_C

| |
|---------------------|
| Not dangerous goods |
| |

TDG_INWT_C

| |
|---------------------|
| Not dangerous goods |
| |

INTERNATIONAL MARITIME DANGEROUS GOODS

| |
|---------------------|
| Not dangerous goods |
| |

INTERNATIONAL AIR TRANSPORT ASSOCIATION - CARGO

| |
|---------------------|
| Not dangerous goods |
| |


INTERNATIONAL AIR TRANSPORT ASSOCIATION - PASSENGER

| |
|---------------------|
| Not dangerous goods |
| |

MX_DG

| |
|---------------------|
| Not dangerous goods |
| |

*ORM = ORM-D, CBL = COMBUSTIBLE LIQUID

| | | |
|---|--|---------------------------|
|  | | Page: 14 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL | | Version: 1.9 |
| VV838 | | |

| | |
|------------------|----|
| Marine pollutant | no |
|------------------|----|

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Respiratory or skin sensitisation

California Prop. 65

This product contains a chemical that is at or below California Propositions 65's "safe harbor level" for carcinogenicity as determined via a risk assessment. Therefore, the chemical is not required to be listed as a Prop 65 chemical on the SDS or label.

This product contains a chemical that is at or below California Propositions 65's "safe harbor level" for reproductive/developmental toxicity as determined via a risk assessment. Therefore, the chemical is not required to be listed as a Prop 65 chemical on the SDS or label.

The components of this product are reported in the following inventories:

- DSL : All components of this product are on the Canadian DSL
- AICS : On the inventory, or in compliance with the inventory
- ENCS : On the inventory, or in compliance with the inventory
- KECI : On the inventory, or in compliance with the inventory
- PICCS : On the inventory, or in compliance with the inventory
- IECSC : On the inventory, or in compliance with the inventory
- TSCA : On TSCA Inventory

TSCA list

No substances are subject to TSCA 12(b) export notification requirements.

SECTION 16. OTHER INFORMATION

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437


Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

Further information

Revision Date: 09/07/2018
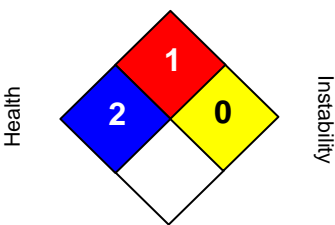
| NFPA: | HMIS III: | | | | | | |
|--|--|---------------|----------|---------------------|----------|------------------------|----------|
| <p style="text-align: center;">Flammability</p>  <p style="text-align: center;">Special hazard.</p> | <table border="1" style="width: 100%;"> <tr> <td style="background-color: blue; color: white;">HEALTH</td> <td style="text-align: center;">2</td> </tr> <tr> <td style="background-color: red; color: white;">FLAMMABILITY</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="background-color: yellow; color: black;">PHYSICAL HAZARD</td> <td style="text-align: center;">0</td> </tr> </table> <p>0 = not significant, 1 = Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 2 | FLAMMABILITY | 1 | PHYSICAL HAZARD | 0 |
| HEALTH | 2 | | | | | | |
| FLAMMABILITY | 1 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Combustible Liquid Class IIIB

Full text of H-Statements

- H227 Combustible liquid.
- H302 Harmful if swallowed.
- H317 May cause an allergic skin reaction.
- H318 Causes serious eye damage.

Sources of key data used to compile the Safety Data Sheet

Valvoline internal data including own and sponsored test reports

The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Valvoline's Environmental Health and Safety Department (1-800-VALVOLINE).


List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists

BEI : Biological Exposure Index

CAS : Chemical Abstracts Service (Division of the American Chemical Society).

CMR : Carcinogenic, Mutagenic or Toxic for Reproduction

| | | |
|--|--|---------------------------|
|  | | Page: 16 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL | | Version: 1.9 |
| VV838 | | |

FG : Food grade
 GHS : Globally Harmonized System of Classification and Labeling of Chemicals.
 H-statement : Hazard Statement
 IATA : International Air Transport Association.
 IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization
 ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"
 IMDG : International Maritime Code for Dangerous Goods
 ISO : International Organization for Standardization
 logPow : octanol-water partition coefficient
 LCxx : Lethal Concentration, for xx percent of test population
 LDxx : Lethal Dose, for xx percent of test population.
 ICxx : Inhibitory Concentration for xx of a substance
 Ecxx : Effective Concentration of xx
 N.O.S.: Not Otherwise Specified
 OECD : Organization for Economic Co-operation and Development
 OEL : Occupational Exposure Limit
 P-Statement : Precautionary Statement
 PBT : Persistent , Bioaccumulative and Toxic
 PPE : Personal Protective Equipment
 STEL : Short-term exposure limit
 STOT : Specific Target Organ Toxicity
 TLV : Threshold Limit Value
 TWA : Time-weighted average
 vPvB : Very Persistent and Very Bioaccumulative
 WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act
 DOT : Department of Transportation
 FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act
 HMIRC : Hazardous Materials Information Review Commission
 HMIS : Hazardous Materials Identification System
 NFPA : National Fire Protection Association
 NIOSH : National Institute for Occupational Safety and Health
 OSHA : Occupational Safety and Health Administration
 PMRA : Health Canada Pest Management Regulatory Agency
 RTK : Right to Know
 WHMIS : Workplace Hazardous Materials Information System



SAFETY DATA SHEET

1. Identification

Product identifier: Water-Based Stainless Steel Maintainer

Other means of identification

SDS number: RE1000028859

Recommended restrictions

Product Use: Cleaner

Restrictions on use: Not known.

Manufacturer/Importer/Distributor Information

Manufacturer

Company Name: CLAIRE MANUFACTURING COMPANY
Address: 1000 Integram Dr
Pacific, MO 63069
Telephone: 1-630-543-7600
Fax:

Emergency telephone number: 1-866-836-8855

2. Hazard(s) identification

Hazard Classification

Physical Hazards

Flammable aerosol Category 1

Health Hazards

Aspiration Hazard Category 1

Environmental Hazards

Acute hazards to the aquatic environment Category 3

Label Elements

Hazard Symbol:



Signal Word: Danger



Hazard Statement: Extremely flammable aerosol.
May be fatal if swallowed and enters airways.
Harmful to aquatic life.

Precautionary Statements

Prevention: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Avoid release to the environment.

Response: IF SWALLOWED: Immediately call a POISON CENTER/doctor/... Do NOT induce vomiting.

Storage: Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store locked up.

Disposal: Dispose of contents/container to an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.

Hazard(s) not otherwise classified (HNOC): None.

3. Composition/information on ingredients

Mixtures

| Chemical Identity | CAS number | Content in percent (%)* |
|---|------------|-------------------------|
| Butane | 106-97-8 | 10 - <20% |
| Distillates (petroleum), hydrotreated light | 64742-47-8 | 10 - <25% |
| White mineral oil (petroleum) | 8042-47-5 | 10 - <20% |
| Propane | 74-98-6 | 1 - <5% |
| Siloxanes and Silicones, di-Me | 63148-62-9 | 1 - <5% |

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First-aid measures

Ingestion: Call a physician or poison control center immediately. Rinse mouth. Never give liquid to an unconscious person. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Inhalation: Move to fresh air.

Skin Contact: Remove contaminated clothing and wash the skin thoroughly with soap and water after work.

Eye contact: Rinse immediately with plenty of water.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.



Hazards: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: No data available.

5. Fire-fighting measures

General Fire Hazards: Use water spray to keep fire-exposed containers cool. Fight fire from a protected location. Move containers from fire area if you can do so without risk.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical: Vapors may travel considerable distance to a source of ignition and flash back.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures: Ventilate closed spaces before entering them. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Keep upwind.

Methods and material for containment and cleaning up: Stop the flow of material, if this is without risk. Absorb with sand or other inert absorbent.

Notification Procedures: ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk.

Environmental Precautions: Avoid release to the environment. Prevent further leakage or spillage if safe to do so.



7. Handling and storage

| | |
|--|---|
| Precautions for safe handling: | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. |
| Conditions for safe storage, including any incompatibilities: | Store locked up. Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Aerosol Level 1 |

8. Exposure controls/personal protection

Control Parameters

Occupational Exposure Limits

| Chemical Identity | Type | Exposure Limit Values | Source |
|---|---------|-----------------------|--|
| Butane | REL | 800 ppm 1,900 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | TWA | 800 ppm 1,900 mg/m3 | US. Tennessee. OELs. Occupational Exposure Limits, Table Z1A (06 2008) |
| | STEL | 1,000 ppm | US. ACGIH Threshold Limit Values (03 2018) |
| | TWA | 800 ppm 1,900 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | AN ESL | 3,000 ppb | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | AN ESL | 7,100 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | TWA PEL | 800 ppm 1,900 mg/m3 | US. California Code of Regulations, Title 8, Section 5155. Airborne Contaminants (09 2006) |
| | ST ESL | 66,000 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | ST ESL | 28,000 ppb | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| Distillates (petroleum), hydrotreated light - Non-aerosol. - as total hydrocarbon vapor | TWA | 200 mg/m3 | US. ACGIH Threshold Limit Values (2008) |
| Distillates (petroleum), hydrotreated light | REL | 100 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| Distillates (petroleum), hydrotreated light - Non-aerosol. - as total hydrocarbon vapor | TWA | 200 mg/m3 | US. ACGIH Threshold Limit Values (2008) |
| Distillates (petroleum), hydrotreated light | ST ESL | 3,500 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | AN ESL | 350 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| White mineral oil (petroleum) - Mist. | REL | 5 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 5 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | STEL | 10 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | TWA | 5 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| White mineral oil (petroleum) - Inhalable fraction. | TWA | 5 mg/m3 | US. ACGIH Threshold Limit Values (01 2010) |
| White mineral oil (petroleum) | TWA PEL | 5 mg/m3 | US. California Code of Regulations, Title 8, |



| | | | |
|--|---------|-----------------------|--|
| - Mist. | | | Section 5155. Airborne Contaminants (09 2006) |
| | TWA | 5 mg/m3 | US. Tennessee. OELs. Occupational Exposure Limits, Table Z1A (06 2008) |
| White mineral oil (petroleum) - Vapor. | AN ESL | 100 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | ST ESL | 1,000 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| Propane | REL | 1,000 ppm 1,800 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | TWA PEL | 1,000 ppm 1,800 mg/m3 | US. California Code of Regulations, Title 8, Section 5155. Airborne Contaminants (09 2006) |
| | TWA | 1,000 ppm 1,800 mg/m3 | US. Tennessee. OELs. Occupational Exposure Limits, Table Z1A (06 2008) |
| | TWA | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |

Appropriate Engineering Controls No data available.

Individual protection measures, such as personal protective equipment

General information: Use personal protective equipment as required. Personal protection equipment should be chosen according to the CEN standards and in discussion with the supplier of the personal protective equipment.

Eye/face protection: Wear goggles/face shield.

Skin Protection

Hand Protection: No data available.

Other: No data available.

Respiratory Protection: In case of inadequate ventilation use suitable respirator. Seek advice from local supervisor.

Hygiene measures: When using do not smoke. Observe good industrial hygiene practices.

9. Physical and chemical properties

Appearance

Physical state: liquid
Form: Spray Aerosol
Color: No data available.

Odor: No data available.

Odor threshold: No data available.

pH: No data available.

Melting point/freezing point: No data available.

Initial boiling point and boiling range: No data available.

Flash Point: -104.44 °C

Evaporation rate: No data available.

Flammability (solid, gas): No data available.



Upper/lower limit on flammability or explosive limits

| | |
|--|-------------------------------------|
| Flammability limit - upper (%): | No data available. |
| Flammability limit - lower (%): | No data available. |
| Explosive limit - upper (%): | No data available. |
| Explosive limit - lower (%): | No data available. |
| Vapor pressure: | 3,240.5359 - 4,619.4874 hPa (20 °C) |
| Vapor density: | No data available. |
| Density: | No data available. |
| Relative density: | No data available. |
| Solubility(ies) | |
| Solubility in water: | No data available. |
| Solubility (other): | No data available. |
| Partition coefficient (n-octanol/water): | No data available. |
| Auto-ignition temperature: | No data available. |
| Decomposition temperature: | No data available. |
| Viscosity: | No data available. |

10. Stability and reactivity

| | |
|-------------------------------------|---|
| Reactivity: | No data available. |
| Chemical Stability: | Material is stable under normal conditions. |
| Possibility of hazardous reactions: | No data available. |
| Conditions to avoid: | Avoid heat or contamination. |
| Incompatible Materials: | No data available. |
| Hazardous Decomposition Products: | No data available. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------|--------------------|
| Inhalation: | No data available. |
| Skin Contact: | No data available. |
| Eye contact: | No data available. |
| Ingestion: | No data available. |

Symptoms related to the physical, chemical and toxicological characteristics

| | |
|---------------|--------------------|
| Inhalation: | No data available. |
| Skin Contact: | No data available. |



Eye contact: No data available.

Ingestion: No data available.

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

Oral

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Distillates (petroleum),
hydrotreated light LD 50 (Rat): > 5,000 mg/kg

White mineral oil
(petroleum) LD 50 (Rat): > 5,000 mg/kg

Dermal

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Distillates (petroleum),
hydrotreated light LD 50 (Rabbit): > 2,000 mg/kg

White mineral oil
(petroleum) LD 50 (Rabbit): > 2,000 mg/kg

Inhalation

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Butane LC 50 (Mouse): 1,237 mg/l

Distillates (petroleum),
hydrotreated light LC 50: > 5 mg/l
LC 50: > 20 mg/l

White mineral oil
(petroleum) LC 50 (Rat): > 5 mg/l
LC 50: > 20 mg/l

Propane LC 50 (Mouse): 1,237 mg/l

Repeated dose toxicity

Product: No data available.

Specified substance(s):

Butane NOAEL (Rat(Female, Male), Inhalation, >= 28 d): 4,000 ppm(m) Inhalation
Experimental result, Key study
LOAEL (Rat(Female, Male), Inhalation, >= 28 d): 12,000 ppm(m) Inhalation
Experimental result, Key study



| | |
|---|--|
| Distillates (petroleum), hydrotreated light | NOAEL (Rat(Female, Male), Inhalation): \geq 24 mg/m ³ Inhalation Experimental result, Key study NOAEL (Rat(Female), Oral, 70 - 147 d): 750 mg/kg Oral Experimental result, Key study |
| White mineral oil (petroleum) | NOAEL (Rat(Female, Male), Oral, 90 d): \geq 20,000 ppm(m) Oral Experimental result, Key study NOAEL (Rabbit(Female, Male), Dermal): 1,000 mg/kg Dermal Read-across from supporting substance (structural analogue or surrogate), Key study LOAEL (Rat(Female, Male), Inhalation): 210 mg/m ³ Inhalation Experimental result, Key study |
| Propane | NOAEL (Rat(Female, Male), Inhalation, \geq 28 d): 4,000 ppm(m) Inhalation Experimental result, Key study LOAEL (Rat(Female, Male), Inhalation, \geq 28 d): 12,000 ppm(m) Inhalation Experimental result, Key study |

Skin Corrosion/Irritation

Product: No data available.

Specified substance(s):

Distillates (petroleum), hydrotreated light in vivo (Rabbit): Not irritant Experimental result, Key study

White mineral oil (petroleum) in vivo (Rabbit): Not irritant Experimental result, Key study

Serious Eye Damage/Eye Irritation

Product: No data available.

Specified substance(s):

Distillates (petroleum), hydrotreated light Rabbit, 24 - 72 hrs: Not irritating

White mineral oil (petroleum) Rabbit, 24 - 72 hrs: Not irritating

Respiratory or Skin Sensitization

Product: No data available.

Specified substance(s):

Distillates (petroleum), hydrotreated light Skin sensitization:, in vivo (Guinea pig): Non sensitising

White mineral oil (petroleum) Skin sensitization:, in vivo (Guinea pig): Non sensitising

Carcinogenicity

Product: No data available.

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified



US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):
No carcinogenic components identified

Germ Cell Mutagenicity

In vitro
Product: No data available.

In vivo
Product: No data available.

Reproductive toxicity
Product: No data available.

Specific Target Organ Toxicity - Single Exposure
Product: No data available.

Specific Target Organ Toxicity - Repeated Exposure
Product: No data available.

Aspiration Hazard
Product: No data available.

Specified substance(s):
Distillates (petroleum),
hydrotreated light
White mineral oil
(petroleum)
May be fatal if swallowed and enters airways.
May be fatal if swallowed and enters airways.

Other effects: No data available.

12. Ecological information

Ecotoxicity:

Acute hazards to the aquatic environment:

Fish
Product: No data available.

Specified substance(s):
Butane LC 50 (Various, 96 h): 147.54 mg/l QSAR QSAR, Key study
Distillates (petroleum),
hydrotreated light LC 50 (Rainbow trout,donaldson trout (Oncorhynchus mykiss), 96 h): 2.9 mg/l Mortality
NOAEL (Oncorhynchus mykiss, 96 h): 2 mg/l Experimental result, Key study
White mineral oil NOAEL (Oncorhynchus mykiss, 96 h): >= 100 mg/l Experimental result, Key



| | |
|--------------------------------|---|
| (petroleum) | study LL 50 (Oncorhynchus mykiss, 96 h): > 100 mg/l Experimental result, Key study |
| Propane | LC 50 (Various, 96 h): 147.54 mg/l QSAR QSAR, Key study |
| Siloxanes and Silicones, di-Me | LC 50 (Redear sunfish (Lepomis microlophus), 96 h): 26.27 - 56.73 mg/l Mortality |

Aquatic Invertebrates

Product: No data available.

Specified substance(s):

| | |
|---|--|
| Butane | LC 50 (Daphnia sp., 48 h): 69.43 mg/l QSAR QSAR, Key study |
| Distillates (petroleum), hydrotreated light | EC 50 (Daphnia magna, 24 h): 4.6 mg/l Experimental result, Key study NOAEL (Daphnia magna, 48 h): 0.3 mg/l Experimental result, Key study EC 50 (Daphnia magna, 48 h): 1.4 mg/l Experimental result, Key study |
| White mineral oil (petroleum) | NOAEL (Daphnia magna, 48 h): >= 100 mg/l Experimental result, Key study |
| Siloxanes and Silicones, di-Me | LC 50 (Water flea (Daphnia magna), 48 h): 44.5 mg/l Mortality |

Chronic hazards to the aquatic environment:

Fish

Product: No data available.

Specified substance(s):

| | |
|---|--|
| Distillates (petroleum), hydrotreated light | NOAEL (Oncorhynchus mykiss): 0.098 mg/l QSAR QSAR, Key study |
| White mineral oil (petroleum) | NOAEL (Oncorhynchus mykiss): >= 1,000 mg/l QSAR QSAR, Supporting study |

Aquatic Invertebrates

Product: No data available.

Specified substance(s):

| | |
|---|---|
| Distillates (petroleum), hydrotreated light | NOAEL (Daphnia magna): 1.2 mg/l Experimental result, Key study EC 50 (Daphnia magna): 0.81 mg/l Experimental result, Key study |
| White mineral oil (petroleum) | NOAEL (Daphnia magna): >= 1,000 mg/l QSAR QSAR, Supporting study |

Toxicity to Aquatic Plants

Product: No data available.

Persistence and Degradability

Biodegradation

Product: No data available.

Specified substance(s):



| | |
|--|--|
| Butane | 100 % (385.5 h) Detected in water. Experimental result, Key study 50 % (3.19 d) Detected in water. QSAR, Weight of Evidence study |
| Distillates (petroleum), hydrotreated light | 61 % Detected in water. Experimental result, Supporting study |
| White mineral oil (petroleum) | 31 % (28 d) Detected in water. Read-across from supporting substance (structural analogue or surrogate), Supporting study |
| Propane | 100 % (385.5 h) Detected in water. Experimental result, Key study 50 % (3.19 d) Detected in water. QSAR, Weight of Evidence study |

BOD/COD Ratio

Product: No data available.

Bioaccumulative potential

Bioconcentration Factor (BCF)

Product: No data available.

Partition Coefficient n-octanol / water (log Kow)

Product: No data available.

Mobility in soil: No data available.

Known or predicted distribution to environmental compartments

| | |
|--|--------------------|
| Butane | No data available. |
| Distillates (petroleum), hydrotreated light | No data available. |
| White mineral oil (petroleum) | No data available. |
| Propane | No data available. |
| Siloxanes and Silicones, di- Me | No data available. |

Other adverse effects: Harmful to aquatic organisms.

13. Disposal considerations

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws.

Contaminated Packaging: No data available.



14. Transport information

DOT

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| UN Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es) | |
| Class: | 2.1 |
| Label(s): | – |
| Packing Group: | II |
| Marine Pollutant: | No |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

IMDG

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| UN Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es) | |
| Class: | 2 |
| Label(s): | – |
| EmS No.: | |
| Packing Group: | – |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

IATA

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es): | |
| Class: | 2.1 |
| Label(s): | – |
| Packing Group: | – |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

15. Regulatory information

US Federal Regulations

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

None present or none present in regulated quantities.



CERCLA Hazardous Substance List (40 CFR 302.4):

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Butane | lbs. 100 |
| Propane | lbs. 100 |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Fire Hazard
Immediate (Acute) Health Hazards
Flammable aerosol
Aspiration Hazard

SARA 302 Extremely Hazardous Substance

None present or none present in regulated quantities.

SARA 304 Emergency Release Notification

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Butane | lbs. 100 |
| Propane | lbs. 100 |

SARA 311/312 Hazardous Chemical

| <u>Chemical Identity</u> | <u>Threshold Planning Quantity</u> |
|--|------------------------------------|
| Butane | 10000 lbs |
| Distillates (petroleum), hydrotreated light | 10000 lbs |
| White mineral oil (petroleum) | 10000 lbs |
| Propane | 10000 lbs |
| Siloxanes and Silicones, di-Me | 10000 lbs |

SARA 313 (TRI Reporting)

None present or none present in regulated quantities.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130):

Clean Water Act Section 311 Hazardous Substances (40 CFR 117.3)

US State Regulations

US. California Proposition 65

No ingredient requiring a warning under CA Prop 65.

US. New Jersey Worker and Community Right-to-Know Act

Chemical Identity

Butane
Distillates (petroleum), hydrotreated light
White mineral oil (petroleum)
Propane

US. Massachusetts RTK - Substance List

No ingredient regulated by MA Right-to-Know Law present.



US. Pennsylvania RTK - Hazardous Substances

Chemical Identity

Butane
Distillates (petroleum), hydrotreated light
White mineral oil (petroleum)
Propane

US. Rhode Island RTK

No ingredient regulated by RI Right-to-Know Law present.

International regulations

Montreal protocol

Not applicable

Stockholm convention

Not applicable

Rotterdam convention

Not applicable

Kyoto protocol

Not applicable



Inventory Status:

| | |
|--|--|
| Australia AICS: | On or in compliance with the inventory |
| Canada DSL Inventory List: | On or in compliance with the inventory |
| EINECS, ELINCS or NLP: | Not in compliance with the inventory. |
| Japan (ENCS) List: | Not in compliance with the inventory. |
| China Inv. Existing Chemical Substances: | On or in compliance with the inventory |
| Korea Existing Chemicals Inv. (KECI): | On or in compliance with the inventory |
| Canada NDSL Inventory: | Not in compliance with the inventory. |
| Philippines PICCS: | On or in compliance with the inventory |
| US TSCA Inventory: | On or in compliance with the inventory |
| New Zealand Inventory of Chemicals: | On or in compliance with the inventory |
| Japan ISHL Listing: | Not in compliance with the inventory. |
| Japan Pharmacopoeia Listing: | Not in compliance with the inventory. |
| Mexico INSQ: | Not in compliance with the inventory. |
| Ontario Inventory: | On or in compliance with the inventory |
| Taiwan Chemical Substance Inventory: | On or in compliance with the inventory |

16. Other information, including date of preparation or last revision

| | |
|------------------------------|---|
| Issue Date: | 06/10/2019 |
| Revision Information: | No data available. |
| Version #: | 1.0 |
| Further Information: | No data available. |
| Disclaimer: | This information is provided without warranty. The information is believed to be correct. This information should be used to make an independent determination of the methods to safeguard workers and the environment. |



SAFETY DATA SHEET

1. Identification

Product identifier LPS® Anti-Spatter

Other means of identification
Part Number 02116

Recommended use A water-based emulsion for releasing welding spatter.

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information
Manufacturer
Manufacturer

Company name ITW Pro Brands
Address 4647 Hugh Howell Rd.
Tucker, GA 30084
Country (U.S.A.)
Tel: +1 770-243-8800

In Case of Emergency 1-800-424-9300 (inside U.S.)
+001 703-527-3887 (outside U.S.)

Website www.lpslabs.com
E-mail lpssds@itwprobrands.com

2. Hazard(s) identification

Physical hazards Gases under pressure Compressed gas

Health hazards Not classified.

Environmental hazards Not classified.

OSHA defined hazards Not classified.

Label elements



Signal word Warning

Hazard statement Contains gas under pressure; may explode if heated.

Precautionary statement

Prevention Observe good industrial hygiene practices.

Response Wash hands after handling.

Storage Protect from sunlight. Store in a well-ventilated place.

Disposal Dispose of waste and residues in accordance with local authority requirements.

Hazard(s) not otherwise classified (HNOC) None known.

Supplemental information None known.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|---------|
| Water | | 7732-18-5 | > 95 |
| Lecithin | | 8002-43-5 | 1 - 3 |
| 1-(3-Chloroallyl)-3,5,7-triaza-1-azoniaadamantane chloride | | 4080-31-3 | 0.1 - 1 |

| Chemical name | Common name and synonyms | CAS number | % |
|------------------------------|--------------------------|------------|---------|
| Alcohols, C10-16,ethoxylated | | 68002-97-1 | 0.1 - 1 |
| Nitrogen | | 7727-37-9 | 0.1 - 1 |

4. First-aid measures

| | |
|---|--|
| Inhalation | Move to fresh air. Call a physician if symptoms develop or persist. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | No specific first aid measures noted. |
| Ingestion | Not likely, due to the form of the product. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Water fog. Foam. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Cool containers exposed to flames with water until well after the fire is out. |
| General fire hazards | Contents under pressure. Pressurized container may explode when exposed to heat or flame. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. Use personal protection recommended in Section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Refer to attached safety data sheets and/or instructions for use. Stop leak if you can do so without risk. Isolate area until gas has dispersed. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|--------------------------------------|--|
| Precautions for safe handling | Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. Ground and bond containers when transferring material. Do not re-use empty containers. Avoid prolonged exposure. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
|--------------------------------------|--|

Conditions for safe storage, including any incompatibilities

Level 1 Aerosol.

Contents under pressure. Do not expose to heat or store at temperatures above 120°F/49°C as can may burst. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. Store in a well-ventilated place. Stored containers should be periodically checked for general condition and leakage. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

US. Workplace Environmental Exposure Level (WEEL) Guides

| Components | Type | Value | Form |
|--------------------------------|------|----------|----------|
| Propylene Glycol (CAS 57-55-6) | TWA | 10 mg/m3 | Aerosol. |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves.

Other

Wear suitable protective clothing.

Respiratory protection

If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state

Gas.

Form

Aerosol.

Color

Opaque. Milky.

Odor

Not significant.

Odor threshold

Not established

pH

8.5 - 9

Melting point/freezing point

Not established

Initial boiling point and boiling range

212 °F (100 °C) - dispensed liquid

Flash point

None

Evaporation rate

1 (water = 1)

Flammability (solid, gas)

Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)

Not established

Flammability limit - upper (%)

Not established

Explosive limit - lower (%)

Not established

Explosive limit - upper (%)

Not established

Vapor pressure

Not established

Vapor density

Not established

| | |
|--|---|
| Relative density | 0.99 - 1.01 @ 20°C (water = 1) |
| Solubility(ies) | |
| Solubility (water) | 100 % |
| Partition coefficient (n-octanol/water) | < 1 |
| Auto-ignition temperature | Not established |
| Decomposition temperature | Not established |
| Viscosity | Not established |
| Other information | |
| Explosive properties | Not explosive. |
| Heat of combustion | < 20 kJ/g |
| Oxidizing properties | Not oxidizing. |
| Percent volatile | 95 - 97 % |
| VOC | 0 % per US State & Federal Consumer Product Regulations |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |
| Conditions to avoid | Heat. Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | Carbon oxides. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | Prolonged inhalation may be harmful. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity Not expected to be acutely toxic.

| Components | Species | Test Results |
|--|--|------------------------|
| 1-(3-Chloroallyl)-3,5,7-triaza-1-azoniaadamantane chloride (CAS 4080-31-3) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | 565 mg/kg |
| Oral | | |
| LD50 | Rat | 500 mg/kg |
| Propylene Glycol (CAS 57-55-6) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg, 24 Hours |
| Oral | | |
| LD50 | Rat | 22000 mg/kg |
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. | |
| Serious eye damage/eye irritation | Direct contact with eyes may cause temporary irritation. | |

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not likely, due to the form of the product.

Chronic effects Prolonged inhalation may be harmful.

Further information This product has no known adverse effect on human health.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | | Species | Test Results |
|--------------------------------|------|--------------------------------------|------------------------|
| Propylene Glycol (CAS 57-55-6) | | | |
| Aquatic | | | |
| Crustacea | EC50 | Water flea (Daphnia magna) | > 10000 mg/l, 48 hours |
| Fish | LC50 | Fathead minnow (Pimephales promelas) | 710 mg/l, 96 hours |

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

| | |
|--|-------|
| LPS® Anti-Spatter | < 1 |
| 1-(3-Chloroallyl)-3,5,7-triaza-1-azoniaadamantane chloride | -0.1 |
| Nitrogen | 0.67 |
| Propylene Glycol | -0.92 |

Mobility in soil No data available.

Other adverse effects None known.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
D003: Waste Reactive material

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, non-flammable, (each not exceeding 1 L capacity) |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Label(s) | 2.2 |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Packaging exceptions | 306 |
| Packaging non bulk | None |
| Packaging bulk | None |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, non-flammable |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Packing group | Not applicable. |
| Environmental hazards | No. |
| ERG Code | 2L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Other information | |
| Passenger and cargo aircraft | Allowed with restrictions. |
| Cargo aircraft only | Allowed with restrictions. |

IMDG

| | |
|---|---|
| UN number | UN1950 |
| UN proper shipping name | AEROSOLS, NON-FLAMMABLE |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Label(s) | 2.2 |
| Packing group | Not applicable. |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-D, S-U |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code | Not applicable. |

DOT





General information Ensure compliance with applicable regulations.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories
 Immediate Hazard - No
 Delayed Hazard - No
 Fire Hazard - No
 Pressure Hazard - Yes
 Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations WARNING: This product contains a chemical known to the State of California to cause cancer.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | No |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | No |
| New Zealand | New Zealand Inventory | Yes |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)
A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 01-29-2017

Version # 01


Disclaimer ITW Pro Brands cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Revision information This document has undergone significant changes and should be reviewed in its entirety.

SECTION: 1 IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY / UNDERTAKING

- 1.1 Product Name: Weldcote Blue Coolant & Weldcote Red Coolant
Product Identification: Coolant
- Product Specification:
- 1.2 Relevant identified uses of the substance or mixture and uses advised against:
- 1.2.1 Relevant identified uses: For welding consumables and related products.
- 1.2.2 Uses advised: Reference the [7. Handling and storage]
- 1.3 Details of the supplier of the safety data sheet:
- Supplier: Weldcote Metals Inc.
842 Oak Grove Rd.
Kings Mountain, NC 28086
- Emergency telephone number: (800) 424-9300 or (704) 739-4115
- Email: info@weldcotemetals.com

SECTION: 2 HAZARDS IDENTIFICATION

- 2.1 Classification of the mixture:
The product is placed on the market in solid form
- 2.1.1 Classification in accordance with GHS-US
- | | |
|----------------|------|
| Acute Toxicity | H302 |
| Eye irritation | H320 |
- Label elements:
- 2.2 GHS-US labeling
- Hazard Pictograms (GHS-US):
- 
- Signal word (GHS-US): Danger
- Hazard statements (GHS-US):
- H302 Harmful if swallowed
- H320 Causes eye irritation
- H373 May cause damage to organs (kidney) through prolonged or repeated exposure if swallowed
- Precautionary statements:
- P260 Do not breathe dust/fume/gas/mist/vapours/spray
- P264 Wash skin thoroughly after handling
- P270 So not eat, drink or smoke when using this product.
- P301+ P312+P330 IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell. Rinse mouth.
- P314 Get medical advice/attention if you feel unwell.
- P501 Dispose of contents and container in accordance with local regional/national international regulations.
- 2.3 Other hazards: No additional information available
- 2.4 Unknown acute toxicity (GHS-US): No data available.

SECTION: 3 COMPOSITION/INFORMATION ON INGREDIENTS

- 3.1 Substances: No data available
 Full Text of H-phrases: see section 16
- 3.2 Mixtures: The mixture contains dangerous substances:

| Substance name | Product Identifier (CAS No) | % Percent | GHS-US classification | |
|-----------------|--|-----------|--------------------------|-------------------|
| Ethylene glycol | C ₂ H ₆ O ₂ | 107-21-1 | 10 - <25 | Acute Tox 4, H302 |

SECTION: 4 FIRST AID MEASURES

- 4.1 Description of first aid measures:
First-aid measures after inhalation: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen and get medical attention.
First-aid measures after skin contact: Flush with water for at least 15 minutes. Seek medical attention if irritation develops or persists.
First-aid measures after eye contact: Immediately flush eyes with water and continue washing for at least 15 minutes. Obtain medical attention if discomfort persists.
First-aid measures after ingestion: Do NOT induce vomiting. Get immediate medical attention.
- 4.2 Most important symptoms and effects, both acute and delayed:
Symptoms/injuries after inhalation: Short-term (acute) overexposure to the gases, fumes, and dusts may include irritation of the eyes, lungs, nose, and throat. Some toxic gases associated with welding may cause pulmonary edema, asphyxiation, and death. Acute overexposure may include signs and symptoms such as watery eyes, nose and throat irritation, headache, dizziness, difficulty in breathing, frequent coughing, or chest pain. The presence of chromium/chromate in fume can cause irritation of nasal membranes and skin. The presence of nickel compounds in fume can cause metallic taste, nausea, tightness of chest, fever, and allergic reaction. Excessive inhalation or ingestion of manganese can produce manganese poisoning. Overexposure to manganese compounds may affect the central nervous system, symptoms of which are languor, sleepiness, muscular weakness, emotional disturbances, and spastic gait resembling Parkinsonism. These symptoms can become progressive and permanent if not treated. Excessive inhalation of fumes may cause "Metal Fume Fever" with Flu-like symptoms such as chills, fever, body aches, vomiting, sweating, etc.
- Symptoms/injuries after skin contact: Dusts may cause irritation.
Symptoms/injuries after eye contact: Causes eye irritation.
Symptoms/injuries after ingestion: Not an anticipated route of exposure during normal product handling. May be harmful if ingested.
- 4.3 Indication of any immediate medical attention and special treatment needed: No data available.

SECTION: 5 FIREFIGHTING MEASURES

- 5.1 Extinguishing media:
Suitable extinguishing media: Use extinguishing media appropriate for surrounding fire.
Unsuitable extinguishing media: No data available.
- 5.2 Special hazards arising from the substance or mixture: Fire may produce irritating or poisonous gases.
Fire hazard: Not flammable
Explosion hazard: None known
- 5.3 Advice for firefighters: In the event of fire, wear self-contained breathing apparatus and full protective gear.

SECTION: 6 ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures:
 - For non-emergency personnel: Wear appropriate personal protective equipment as specified in Section 8. Ensure adequate ventilation.
 - For emergency responders: No data available.
- 6.2 Environmental precautions: Avoid release into the environment. Avoid dispersal of spilled material and contact with soil, ground and surface water drains and sewers.
- 6.3 Methods and material for containment and cleaning up: Take up mechanically. Collect the material in labeled containers and dispose of according to local and regional authority requirements.
- 6.4 Reference to other sections: See Section 7 for information of safe handling. See Section 8 for information on personal protection equipment. See Section 13 for disposal information.

SECTION: 7 HANDLING AND STORAGE

- 7.1 Precautions and safe handling: Welding may produce dust, fumes and gases hazardous to health. Avoid breathing dust, fumes and gases. Use adequate ventilation. Keep away from sources of ignition. Avoid contact with skin, eyes and clothing. Do not eat, drink and smoke in work areas.
- 7.2 Conditions for safe storage, including and incompatibilities: Store in cool, dry and well-ventilated place. Keep away from incompatible materials. Keep away from heat and open flame.
- 7.3 Specific end use(s): For welding consumables and related products.

SECTION: 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

- 8.1 Control parameters: Exposure limits were not established for this product

| Ethylene glycol | (CAS No) 107-21-1 | |
|-----------------|-------------------------------------|-----------|
| USA ACGIH | ACGIH (TWA) (mg/m ³) | 100 mg/m3 |
| USA OSHA | OSHA PEL (TWA) (mg/m ³) | 100 mg/m3 |

- 8.2 Exposure controls:
 - Appropriate engineering controls: local exhaust and general ventilation must be adequate to meet exposure standards.
 - Hand protection: Wear welding gloves.
 - Eye protection: Wear helmet or face shield with filter lens of appropriate shade number. See ANSI/ASC Z49.1 Section 4.2. Provide protective screens and flash goggles, if necessary, to shield others.
 - Skin and body protection: Wear head and body protection, which help to prevent injury from radiation, sparks, flame and electrical shock. See ANSI Z49.1. At a minimum this includes welder's gloves and a protective face shield, and may include arm protectors, aprons, hats, shoulder protection, as well as dark substantial clothing. Train the employee not to touch live electrical parts and to insulate him/herself from work and ground. Welders should not wear short sleeve shirts or short pants.
 - Respiratory protection: If exposure limits are exceeded or irritation is experienced, NIOSH approved respiratory protection should be worn.

SECTION: 9 PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties:

| | |
|--|--------------------------------|
| Physical state: | - liquid |
| Appearances: | - Clear Colorless liquid |
| Color: | - Clear |
| Odor: | - Odorless |
| Odor threshold: | - Not determined |
| pH: | - 6 |
| Relative evaporation rate (butyl acetate = 1): | - No data available |
| Melting point: | - (-7°C) |
| Freezing point: | - No data available |
| Initial boiling point and boiling range: | - (93°C) |
| Flash point: | - No data available |
| Self ignition temperature: | - Product is not self igniting |
| Decomposition temperature: | - No data available |
| Flammability (solid, gas): | - No data available |
| Vapour pressure: | - 24(MMHG) |
| Relative vapour density at 20· C: | - 1.025 (Air = 1) |
| Relative density: | - No data available |
| Solubility(ies) | - Fully miscible |
| Log Pow: | - No data available |
| Log Kow: | - No data available |
| Viscosity, kinematic: | - No data available |
| Viscosity, dynamic: | - No data available |
| Explosive properties: | - No data available |
| Oxidizing properties: | - No data available |
| Explosive limits: | - No data available |

9.2 Other information: No additional information available.

SECTION: 10 STABILITY AND REACTIVITY

10.1 Reactivity: No additional information available.

10.2 Chemical stability: The product is stable under normal conditions. When using it may produce dangerous fumes and gases.

10.3 Possibility of hazardous reactions: Will not occur.

10.4 Conditions to avoid: None

10.5 Incompatible materials: None

10.6 Hazardous decomposition products: Welding fumes and gases cannot be classified simply. The composition and quantity of both are dependent upon the metal being welded, the process, procedure and welding consumables used. Other conditions which also influence the composition and quantity of the fumes and gases to which workers may be exposed include: coating on the metal being welded (i.e. paint, painting, galvanizing), the number of welders, the volume of the work area, the quality and the amount of ventilation, the position of the welders head with respect to the fume plume, as well as the presence of contaminants in the atmosphere (such as chlorinated hydrocarbon vapors from the cleaning and degreasing activities).

When an electrode is consumed, the fume and gas decomposition products generated are different in percent and form from the ingredients listed in Section 3. Fume and gas decomposition, and not the ingredients in the electrode, are important. The concentration of a given fume or gas component may decrease or increase by many times the original concentration. Also, new compounds not in the electrodes may form. Decomposition products of normal operation include those originating from the volatilization, reaction or oxidation of the materials shown in Section 3, plus those from the base metal coating, etc., as noted above. Reasonable expected fume constituents of this product would include: Complex oxides of iron, manganese, silicon, chromium, nickel, columbium, molybdenum, copper, carbon dioxide, carbon monoxide, ozone and nitrogen Oxides. Some products will also contain antimony, barium, molybdenum, aluminum, columbium, magnesium, strontium, tungsten, and or zirconium. Fume limit for chromium, nickel and or manganese may be reached before limit of 5 mg/m3 of general welding fumes is reached.

Gaseous reaction products may include carbon monoxide and carbon dioxide. Ozone and nitrogen oxides may be formed by the radiation from the arc. Determine the composition and quantity of fumes and gases to which workers are exposed by taking an air sample from inside the welder's helmet if worn or in the worker's breathing zone. Improve ventilation if exposures are not below limits. See ANSI/AWS F1.1, F1.3 and F1.5, available from the American Welding Society, 550 N.W. Lejeune Road, Miami, FL 33126.

SECTION: 11 TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects:

Acute toxicity: Harmful if swallowed

| Substance name | CAS number | LD50 oral rat (mg/kg) | ATE (oral) (mg/kg) | Comments |
|---|------------|--|--------------------|----------|
| Ethylene glycol | 107-21-1 | 4700 mg/kg | 10,626 mg/kg | |
| Skin corrosion/irritation: | | May cause skin irritation | | |
| Serious eye damage/irritation: | | May cause eye irritation | | |
| Respiratory or skin sensitization: | | May cause an allergic skin reaction. | | |
| Germ cell mutagenicity: | | May cause damage to organs | | |
| Carcinogenicity: | | Not classified | | |
| Reproductive toxicity | | Not classified | | |
| Specific target organ toxicity (single exposure): | | Not classified | | |
| Specific target organ toxicity (repeated exposure): | | Causes damage to organs through prolonged or repeated exposure | | |

SECTION: 12 ECOLOGICAL INFORMATION

12.1 Toxicity:

Ecology - general: No data available.

| Ethylene glycol | (CAS No) 107-21-1 |
|--------------------------------|---|
| LC50 fishes 1 | 18,500 mg/l (Exposure time: 96 h - species: Oncorhynchus mykiss) |
| EC50 Daphnia 1 | 74,000 mg/l (Exposure time: 24 h - species: Daphnia magna [static]) |
| EC50 other aquatic organisms 1 | 10,000 mg/l (Exposure time: 96 h - species: Leuciscus idus [static]) |
| LC50 fish 2 | 32,000 mg/l (Exposure time: 96 h - species: Pimephales promelas ([semi-static]) |

12.2 Persistence and degradability: No additional information available.

12.3 Bioaccumulative potential: No additional information available.

12.4 Mobility in soil: No additional information available.

12.5 Other adverse effects: No additional information available.

SECTION: 13 DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods: Dispose of in accordance with local and national regulations.

Waste disposal recommendations: Dispose of contents/container in accordance with local/regional/national/international regulations.

SECTION: 14 TRANSPORT INFORMATION

In accordance with DOT / ADR / RID / ADNR / IMDG / ICAO / IATA

14.1 UN Number: Not a dangerous good in sense of transport regulations

14.2 UN proper shipping name: Not applicable

SECTION: 15 REGULATORY INFORMATION

15.1 US Federal Regulations:

| | |
|---|-------------------|
| Ethylene glycol | (CAS No) 107-21-1 |
| Listed on the United States TSCA (Toxic Substances Control Act) Inventory | |
| Listed on SARA Section 313 (Specific toxic chemical listings) | |
| SARA Section 313 - Emission Reporting 1.0% (dust or fume only) | |

15.2 US State Regulations:

| | | | | |
|---|---|---|---|-----------------------------------|
| Ethylene glycol (CAS No) 107-21-1 | | | | |
| U.S. - California - Proposition 65 - Carcinogens List | U.S. - California - Proposition 65 - Developmental Toxicity | U.S. California - Proposition 65 - Reproductive Toxicity - Female | U.S. California - Proposition 65 - Reproductive Toxicity - Male | No Significance risk level (NSRL) |
| Yes | Yes | Yes | Yes | |

| | |
|--|-------------------|
| Ethylene glycol | (CAS No) 107-21-1 |
| U.S. - Massachusetts - Right To Know List | |
| U.S. - Minnesota - Hazardous Substance List | |
| U.S. - New Jersey - Right to Know Hazardous Substance List | |
| U.S. - Pennsylvania - RTK (Right to Know) List | |

SECTION: 16 OTHER INFORMATION

Full text of H-phrases:

| | |
|---------------|--|
| Carc. 1A | Carcinogenicity, Category 1A |
| Eye Irrit. 2A | Serious eye damage/eye irritation Category 2A |
| H315 | Causes skin irritation |
| H319 | Causes serious eye irritation |
| H335 | May cause respiratory irritation |
| H336 | May cause drowsiness or dizziness |
| H351 | Suspected of causing cancer |
| H373 | May cause damage to organs through prolonged or repeated exposure. |



- NFPA health hazard: 2 – Exposure could cause irritation but only minor residual injury even if no treatment is given.
- NFPA fire hazard: 0 – Materials that will not burn.
- MFPA reactivity: 0 – Normally stable, even under fire exposure conditions, and are not reactive with water

HMIS III Rating

- Health: 2 - Moderate Hazard
- Flammability: 0 - Minimal Hazard
- Physical: 1 - Moderate Hazard

We believe that the information contained herein is believed to be true and accurate as of the date of this SOS. All statements or suggestions are made without any warranty, expressed or implied, regarding the accuracy of the information, the hazard connected with the use of this material or the results to be obtained for use thereof. As the condition or methods of use are beyond our control, we do not assume any responsibility and expressly disclaim any liability for any use of this material. It is the user's obligation to determine the conditions of safe use of these products.

All chemical products can in fact present unknown risks to health, safety and / or the environment, even in relation to the different operating conditions, and they must therefore be used with care. For this reason we cannot guarantee that the risk described in this form are the only foreseeable risks. The user must therefore satisfy himself as to the particular conditions under which it is intended to be use in. Moreover, it must be noted that the user is obliged to comply with all the legislative, administrative and regulatory provisions regarding the product and its use in terms of occupational hygiene and safety, and environmental protection, apart from the information given in the form, given purely as guidance.

Technical Department



Revision Number: 004.0

Issue date: 04/12/2018

1. PRODUCT AND COMPANY IDENTIFICATION

Product name: OSI® H2U® High Performance Acrylic Urethane Sealant Window, Door & Siding White 001 **IDH number:** 1256934

Product type: Sealant **Region:** United States

Restriction of Use: None identified **Contact information:**

Company address: Henkel Corporation Telephone: +1 (860) 571-5100
 One Henkel Way MEDICAL EMERGENCY Phone: Poison Control Center
 Rocky Hill, Connecticut 06067 1-877-671-4608 (toll free) or 1-303-592-1711
 TRANSPORT EMERGENCY Phone: CHEMTREC
 1-800-424-9300 (toll free) or 1-703-527-3887
 Internet: www.henkelna.com

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

WARNING: CAUSES SERIOUS EYE IRRITATION.
 MAY CAUSE DAMAGE TO ORGANS THROUGH PROLONGED OR REPEATED EXPOSURE.

| HAZARD CLASS | HAZARD CATEGORY |
|--|-----------------|
| EYE IRRITATION | 2A |
| SPECIFIC TARGET ORGAN TOXICITY - REPEATED EXPOSURE | 2 |

PICTOGRAM(S)



Precautionary Statements

Prevention: Do not breathe vapors, mist, or spray. Wash affected area thoroughly after handling. Wear eye and face protection.

Response: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if you feel unwell. If eye irritation persists: Get medical attention.

Storage: Not prescribed

Disposal: Dispose of contents and/or container according to Federal, State/Provincial and local governmental regulations.

Classification complies with OSHA Hazard Communication Standard (29 CFR 1910.1200) and is consistent with the provisions of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

| Hazardous Component(s) | CAS Number | Percentage* |
|------------------------|------------|-------------|
|------------------------|------------|-------------|

IDH number: 1256934

Product name: OSI® H2U® High Performance Acrylic Urethane Sealant Window, Door & Siding White 001

| | | |
|---|-------------|---------|
| Limestone | 1317-65-3 | 20 - 30 |
| Titanium dioxide | 13463-67-7 | 1 - 5 |
| Ethylene glycol | 107-21-1 | 1 - 5 |
| White mineral oil (petroleum), highly refined | 8042-47-5 | 1 - 5 |
| Silica, amorphous, fumed, crystal-free | 112945-52-5 | 1 - 5 |
| Quartz (SiO ₂), <1% respirable | 14808-60-7 | 0.1 - 1 |

* Exact percentages may vary or are trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

| | |
|----------------------|--|
| Inhalation: | Move to fresh air in case of accidental inhalation of vapours. |
| Skin contact: | Wash affected area immediately with soap and water. |
| Eye contact: | Immediately flush eyes with plenty of water for at least 15 minutes. If symptoms develop and persist, get medical attention. |
| Ingestion: | Consult a physician if necessary. Do not induce vomiting. |
| Symptoms: | See Section 11. |

5. FIRE FIGHTING MEASURES

| | |
|---|--|
| Extinguishing media: | Carbon dioxide, foam, powder Water fog. |
| Special firefighting procedures: | Use water spray to keep fire exposed containers cool and disperse vapors. |
| Unusual fire or explosion hazards: | May liberate large quantities of dense, foul-smelling smoke which may contain unidentified toxic gasses. |
| Hazardous combustion products: | Upon decomposition, this product emits carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons. Oxides of nitrogen. |

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

| | |
|-----------------------------------|---|
| Environmental precautions: | Prevent further leakage or spillage if safe to do so. Do not allow product to enter sewer or waterways. |
| Clean-up methods: | Absorb spill with inert material. Shovel material into appropriate container for disposal. Dispose of according to Federal, State and local governmental regulations. |

7. HANDLING AND STORAGE

| | |
|------------------|---|
| Handling: | Avoid prolonged or repeated skin contact with this material. Keep out of the reach of children. |
| Storage: | For safe storage, store at or above 0 °C (32°F) Keep from freezing. Store in a cool, dry area. |

For information on product shelf life, please review labels on container or check the Technical Data Sheet.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

| Hazardous Component(s) | ACGIH TLV | OSHA PEL | AIHA WEEL | OTHER |
|---|--|--|-----------|-------|
| Limestone | 10 mg/m ³ TWA Total dust. | 5 mg/m ³ PEL Respirable fraction. 15 mg/m ³ PEL Total dust. | None | None |
| Titanium dioxide | 10 mg/m ³ TWA | 15 mg/m ³ PEL Total dust. 15 MPPCF TWA Respirable fraction. 15 mg/m ³ TWA Total dust. 50 MPPCF TWA Total dust. 5 mg/m ³ TWA Respirable fraction. | None | None |
| Ethylene glycol | 25 ppm TWA Vapor fraction 50 ppm STEL Vapor fraction 10 mg/m ³ STEL Aerosol, inhalable. | None | None | None |
| White mineral oil (petroleum), highly refined | 5 mg/m ³ TWA Inhalable fraction. | 5 mg/m ³ TWA mist 5 mg/m ³ PEL Mist. | None | None |
| Silica, amorphous, fumed, crystal-free | 10 mg/m ³ TWA Inhalable dust. 3 mg/m ³ TWA Respirable fraction. | 20 MPPCF TWA 0.8 mg/m ³ TWA | None | None |
| Quartz (SiO ₂), <1% respirable | 0.025 mg/m ³ TWA Respirable fraction. | 2.4 MPPCF TWA Respirable. 0.1 mg/m ³ TWA Respirable. 0.05 mg/m ³ TWA (Respirable dust.) (Respirable dust.) 0.025 mg/m ³ OSHA_ACT (Respirable dust.) 0.05 mg/m ³ PEL Respirable dust. | None | None |

Engineering controls:

Use local ventilation if general ventilation is insufficient to maintain vapor concentration below established exposure limits.

Respiratory protection:

If ventilation is not sufficient to effectively prevent buildup of aerosols, mists or vapors, appropriate NIOSH/MSHA respiratory protection must be provided.

Eye/face protection:

Safety goggles or safety glasses with side shields.

Skin protection:

Use impermeable gloves and protective clothing as necessary to prevent skin contact.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical state:

Liquid

Color:

White

Odor:

mild, Acrylic

Odor threshold:

Not available.

pH:

7.3 - 8.5

Vapor pressure:

15 mm hg (20.0 °C (68°F))

| | |
|---|--|
| Boiling point/range: | 100 °C (212°F) |
| Melting point/ range: | Not available. |
| Specific gravity: | 1.267 |
| Vapor density: | Heavier than air |
| Flash point: | Not applicable |
| Flammable/Explosive limits - lower: | Not available. |
| Flammable/Explosive limits - upper: | Not available. |
| Autoignition temperature: | Not available. |
| Flammability: | Not applicable |
| Evaporation rate: | < 0.5 (Butyl acetate = 1) |
| Solubility in water: | Soluble |
| Partition coefficient (n-octanol/water): | Not available. |
| VOC content: | 0.3 %; 42 g/l (by weight, calculated using CARB method; g/L less water, less exempts calculated using SCAQMD method) |
| Viscosity: | 200,000 - 300,000 cp |
| Decomposition temperature: | Not available. |

10. STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable under normal conditions of storage and use. |
| Hazardous reactions: | Will not occur. |
| Hazardous decomposition products: | Upon decomposition, this product emits carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons. Oxides of nitrogen. |
| Incompatible materials: | This product may react with oxidizing agents. |
| Reactivity: | Not available. |
| Conditions to avoid: | Do not freeze. |

11. TOXICOLOGICAL INFORMATION

| | |
|-------------------------------------|-----------------------------------|
| Relevant routes of exposure: | Skin, Inhalation, Eyes, Ingestion |
|-------------------------------------|-----------------------------------|

Potential Health Effects/Symptoms

Inhalation: May cause irritation to nose and throat. Abrasion of cured material such as by sanding or grinding could release respirable particles of silica quartz, a cancer hazard by inhalation. Normal use of this product causes no such release.

Skin contact: May cause slight irritation to skin.

Eye contact: May cause slight irritation to eyes on contact.

Ingestion: Ingestion of large amounts may produce gastrointestinal disturbances including irritation, nausea, and diarrhea.

| Hazardous Component(s) | LD50s and LC50s | Immediate and Delayed Health Effects |
|---|--|---|
| Limestone | None | Nuisance dust |
| Titanium dioxide | None | Irritant, Respiratory, Some evidence of carcinogenicity |
| Ethylene glycol | Oral LD50 (Rat) = 5.89 g/kg Oral LD50 (Mouse) = 14.6 g/kg Dermal LD50 (Rabbit) = 9,530 mg/kg | Blood, Bone Marrow, Central nervous system, Developmental, Eyes, Irritant, Kidney, Liver, Metabolic |
| White mineral oil (petroleum), highly refined | None | Irritant |
| Silica, amorphous, fumed, crystal-free | None | Nuisance dust |
| Quartz (SiO ₂), <1% respirable | None | Immune system, Lung, Some evidence of carcinogenicity |

| Hazardous Component(s) | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen (Specifically Regulated) |
|---|-------------------------------|-----------------|--|
| Limestone | No | No | No |
| Titanium dioxide | No | Group 2B | No |
| Ethylene glycol | No | No | No |
| White mineral oil (petroleum), highly refined | No | No | No |
| Silica, amorphous, fumed, crystal-free | No | No | No |
| Quartz (SiO ₂), <1% respirable | Known To Be Human Carcinogen. | Group 1 | Yes |

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Dispose of according to Federal, State and local governmental regulations.

Hazardous waste number: It is the responsibility of the user to determine if an item is hazardous as defined in the Resource Conservation and Recovery Act (RCRA) at the time of disposal. Product uses, transformations, mixtures, processes, etc., may render the resulting material hazardous, under the criteria of ignitability, corrosivity, reactivity and toxicity characteristics of the Toxicity Characteristics Leaching Procedure (TCLP) 40 CFR 261.20-24.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any package/configuration.

U.S. Department of Transportation Ground (49 CFR)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

International Air Transportation (ICAO/IATA)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

Water Transportation (IMO/IMDG)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

15. REGULATORY INFORMATION

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory.
TSCA 12 (b) Export Notification: None above reporting de minimis
CERCLA/SARA Section 302 EHS: None above reporting de minimis.
CERCLA/SARA Section 311/312: Immediate Health, Delayed Health
CERCLA/SARA Section 313: This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act of 1986 (40 CFR 372). Ethylene glycol (CAS# 107-21-1).
California Proposition 65: This product contains a chemical known in the State of California to cause cancer. This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Canada Regulatory Information

CEPA DSL/NDSL Status: All components are listed on or are exempt from listing on the Canadian Domestic Substances List.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: This Safety Data Sheet contains changes from the previous version in Section(s): 2, 3, 8, 11, 15, 16

Prepared by: Product Safety and Regulatory Affairs

Issue date: 04/12/2018

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.

SAFETY DATA SHEET

ABC DRY CHEMICAL

SECTION I. Chemical Product and Company Identification

Product Name: ABC Dry Chemical Fire Extinguishant
(Fire Extinguishing Agent, Non-pressurized and Pressurized)
Synonym: Multi-Purpose Dry Chemical
Manufacturer: Buckeye Fire Equipment Company
PO Box 428
Kings Mountain, NC 28086
Telephone: 704.739.7415
Web Address: www.buckeyefire.com
Email Address: bfec@buckeyef.com
Recommended Use: Fire suppression, not for human or animal drug use.
Emergency: CHEMTREC 1.800.424.9300
Revision Date: 08/05//2019

SECTION II. Hazard Identification

Note: This SDS covers both pressurized and non-pressurized containers of the product.

GHS – Classification (Pressurized):

Hazard Classification: Gas Under Pressure-Compressed Gas

GHS Label Elements:



Hazard Symbols:

Signal Word: WARNING

Hazard Statements: Contents Under Pressure: may explode if heated

Precautionary Statements: P251 Pressurized container; do not pierce or burn, even after use.

GHS – Classification (Non-pressurized):

Eye Irritation: Category 2B

Skin Irritation: Category 5

Acute Toxicity-Inhalation: Category 5

GHS Label Elements:



Hazard Symbols:

Signal Word: WARNING

Hazard Statements:

H313 May be harmful in contact with skin.

H320 Causes eye irritation

H333 May be harmful if inhaled.

Precautionary Statements:

P101 If medical advice is needed, have product container or label at hand.

P102 Keep out of reach of children.

P234 Keep in original container.

P251 Pressurized container; do not pierce or burn, even after use

P261 Avoid breathing dust

P264 Wash hands and face thoroughly after handling

P270 Do not eat, drink, or smoke when using this product

P281 Use personal protective equipment as required

SAFETY DATA SHEET ABC DRY CHEMICAL

| | |
|--------------|---|
| P285 | In case of inadequate ventilation, wear respiratory protection |
| P301+322+331 | If swallowed, drink 2-3 glasses of water and do not induce vomiting |
| 302+352 | If on skin, wash with soap and water |
| 304+313+341 | If inhaled, and if distress occurs, remove victim to fresh air and keep at rest in a position comfortable for breathing. Seek medical advice/attention. |
| 305+351+338 | If in eyes, rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do and continue to rinse. |
| 337+313 | If eye irritation persists, get medical advice/attention. |
| P401+402+403 | Store in original container or extinguisher in a dry, well ventilated place. |

SECTION III. Composition/Information on Ingredients

This product is a mixture.

| Chemical Name | Weight %* | CAS # |
|------------------------------------|-----------|-------------------------|
| Monoammonium phosphate | 85 | 7722-76-1 |
| Barium Sulfate | 8 | 7727-43-7 |
| Mica | < 3 | 12001-26-2 |
| Amorphous Silica (non-crystalline) | < 3 | 112926-00-8 (7631-86-9) |
| Stannous octoate | < .3 | 301-10-0 |
| Silicone | < .1 | 63148-57-2 |
| Pigment | < .1 | 6358-31-2 |

Note: Pressurized product uses nitrogen as the expellant 7727-37-9

* % is rounded to the nearest appropriate number. Values are not to be considered product specifications

SECTION IV. First Aid Measures

Eye Exposure- Flush eyes with water until pain-free. If irritation develops or persists, seek medical attention.

Skin Exposure- Wash with plenty of soap and water. If irritation develops or persists, seek medical attention.

Inhalation- Move victim to fresh air. If irritation develops or persists, seek medical attention.

Ingestion- If victim is conscious and alert, give 2-3 glasses of water to drink. Do not induce vomiting. If vomiting occurs and the victim is conscious, give additional water to further dilute the chemical. Prevent aspiration of swallowed product by laying victim on side with head lower than their waist. Seek medical attention. Do not leave victim unattended.

Medical Conditions Possibly Aggravated by Exposure- Inhalation of the product may aggravate existing chronic respiratory conditions such as asthma, emphysema, or bronchitis. Contact with the skin may aggravate an existing skin disease. Chronic overexposure may cause pneumoconiosis ("Dusty Lung" disease).

SECTION V. Firefighting Measures

Extinguishing Media: N/A. This product is an extinguishing agent. It is nonflammable and noncombustible.

Special Firefighting Procedures: N/A

Unusual Fire and Explosion Hazards: This product may decompose in fire and release oxides of carbon, potassium, and nitrogen (Refer to Section X).

Sensitivity to Mechanical Impact or Static Discharge: None

SECTION VI. Accidental Release Measures

In case of accidental release, use the appropriate respiratory protection. Clean up the product using a vacuum or wet sweep and shovel to minimize the generation of dust. Bag or drum the product for disposal. If the product is used and/or contaminated, use personal protective equipment and containment means that are appropriate for the composition of the mixture. Product should be prevented from entering waterways.

SAFETY DATA SHEET

ABC DRY CHEMICAL

SECTION VII. Handling and Storage

Avoid eye, respiratory, and skin exposure. Use the appropriate personal protective equipment when handling. Wash thoroughly after handling (Refer to Section VIII). Product should be stored in its original container or extinguisher. When the product is contained under pressure (e.g., an extinguisher), inspect the container for rust or damage that may compromise the container integrity. Do not store the product in high humidity and do not mix with other extinguishing agents, particularly potassium bicarbonate-based agents.

SECTION VIII. Exposure Controls and Personal Protection

Exposure Guidelines:

| | <u>OSHA PEL</u> | <u>ACGIH TLV</u> |
|------------------------|---|---|
| Monoammonium phosphate | Particulates Not Otherwise Classified Total Dust- 15 mg/m ³ Respirable Fraction- 5 mg/m ³ | Particulates Not Otherwise Classified Total Dust- 10 mg/m ³ Respirable Fraction- 3 mg/m ³ |
| Barium sulfate | Particulates Not Otherwise Classified Total Dust- 15 mg/m ³ Respirable Fraction- 5 mg/m ³ | Particulates Not Otherwise Classified Total Dust- 10 mg/m ³ Respirable Fraction- 3 mg/m ³ |
| Mica | 6 mg/m ³ | 3 mg/m ³ |
| Amorphous Silica | 6 mg/m ³ | 10 mg/m ³ |
| Stannous octoate | .1 mg/m ³ | .1 mg/m ³ |
| Silicone | Not Regulated | Not Regulated |
| Pigment | Not Regulated | Not Regulated |

During the use of this product on fires, exhaust gases and products of incomplete combustion are the main respiratory hazards. In the manufacture of this product, employers and employees must use their collective judgment in determining the on-the-job settings where the use of a dust mask or respirator is prudent. The need for respiratory protection is not likely for short-term use in well-ventilated areas.

Respiratory Protection: Use an N-95 dust mask for limited exposures and use air-purifying respirators with high efficiency particulate air filters (HEPA filters) for prolonged exposures.

Eye Protection: Wear chemical goggles or full-face air-purifying respirator.

Skin Protection: Use nitrile, latex, or similar gloves and coveralls. Good personal hygiene practices are essential. After handling the product, avoid food, tobacco products, or other means of transferring the product from hand to mouth until after thoroughly washing.

SECTION IX. Physical and Chemical Properties

Chemical Agent

Appearance and Odor: Light yellow fine powder that is odorless.

Apparent Density: 0.82

Solubility: The product is coated with water repellent silicone. Not immediately soluble in water.

pH: Approximately 4 -5

Flash Point: N/A

Flammability: N/A

Vapor Pressure: N/A

Boiling Point: N/A

Explosive or Oxidizing Properties: None

Expellant- Nitrogen

Appearance and Odor: Colorless and odorless.

Specific Gravity: 0.075 lb./ft³@ 70°F as vapor

Solubility: N/A

pH: N/A

Flash Point: Nonflammable

Flammability: Nonflammable

Vapor Pressure: N/A

Boiling Point: -321°F

Explosive or Oxidizing Properties: None

SAFETY DATA SHEET

ABC DRY CHEMICAL

SECTION X. Stability and Reactivity

Reactivity: Pressurized containers may rupture or explode if exposed to high heat

Stability: Stable

Incompatibles: Magnesium, strong oxidizers such as calcium hypochlorite (pool chlorine), strong alkalis, and isocyanic acids.

Decomposition Products: This product may decompose in fire and release carbon monoxide, carbon dioxide, and sulfur dioxide. Oxides of phosphorous and ammonia have been reported.

Hazardous Polymerization: Will not occur

Hazardous Reactions: None

SECTION XI. Toxicological Information

Acute Toxicity: Monoammonium phosphate LD50 (rat): > 1000mg/kg body weight.

Target organs in humans: respiratory system, eyes, and skin. This product is an irritant to epithelial tissue and may aggravate dermatitis. No indication that the product causes sensitization.

Chronic Toxicity: Pneumoconiosis, or “Dusty Lung” disease, may result from chronic exposure to any dust.

Reproductive Toxicity: This product is not known to have any reproductive effects.

Nitrogen: Simple asphyxiant. Exposure at high concentrations can cause suffocation by reducing the available oxygen.

SECTION XII. Ecological Information

Ecotoxicity: Negative effects are unknown. Provides nutrient nitrogen and phosphorous to plant life.

Degradability: Degrades rapidly in wet or humid environment.

Bioaccumulation: Unknown extent.

Mobility in Soil: Water-soluble. May leech into groundwater.

SECTION XIII. Disposal Consideration

This product is not a RCRA characteristically hazardous or listed hazardous waste. Dispose of according to state or local laws, which may be more restrictive than federal regulations. Be aware that product used on a fire may be altered or contaminated and thereby require different disposal considerations.

SECTION XIV. Transportation Information

This product is not defined as a hazardous material under U.S. Department of Transportation 49 CFR 172, or by Transport Canada “Transportation of Dangerous Goods” regulations.

Please Note: Although this material is not considered hazardous, when contained in a stored pressure fire extinguisher pressurized with a nonflammable gas, the extinguisher itself is considered a hazardous material by the U.S. Department of Transportation (USDOT) and Transport Canada (TC). The proper shipping name shall be Fire Extinguisher and the UN Identification Number is UN 1044. The USDOT hazard class is Limited Quantity when pressurized to less than 241 psig and when shipped via highway or rail. For shipment by Air or Water consult the current IATA or IMDG Regulations respectively.

SAFETY DATA SHEET

ABC DRY CHEMICAL

SECTION XV. Regulatory Information

International Inventory Status: All ingredients are on the following inventories

| <u>Country</u> | <u>Agency</u> | <u>Country</u> | <u>Agency</u> |
|----------------|---------------|----------------|---------------|
| U.S.A. | TSCA | Australia | AICS |
| Canada | DSL | Japan | MITI |
| Europe | EINECS/ELINCS | South Korea | KECL |

European Risk and Safety Phrases:

| | | |
|--------------------|----------------|---|
| EU Classification- | | Harmful |
| R Phrases- | 22 36/37/38 | Harmful if swallowed Irritating to eyes, respiratory system, and skin. |
| S Phrases- | 26 36 | In case of contact with eyes, rinse immediately with plenty of water and seek medical advice Wear suitable protective clothing |

U.S. Federal Regulatory Information:

Non-pressurized; None of the chemicals in this product are under SARA reporting requirements or have SARA Threshold Planning Quantities or CERCLA Reportable Quantities or are regulated under TSCA 8(d).
Pressurized: SARA Title III Section 311/312 Categorization is Pressure Hazard

State Regulatory Information:

Chemicals in this product are covered under the specific State regulations noted:

| | | | |
|---------------|---|---------------|--------------------------------------|
| Alaska | Designated Toxic and Hazardous Substances- None | | |
| California | Permissible Exposure Limits for Chemical Contaminants- None | | |
| Florida | Substance list- Mica dust | Pennsylvania | Hazardous Substance List- None |
| Illinois | Toxic Substance List- No | Rhode Island | Hazardous Substance List- Mica dust |
| Kansas | Section 302/303 List- None | Texas | Hazardous Substance List- No |
| Massachusetts | Substance list- Mica dust | West Virginia | Hazardous Substance List- None |
| Minnesota | List of Hazardous Substances- None | Wisconsin | Toxic and Hazardous Substances- None |
| Missouri | Employer Information/Toxic Substance List- None | | |
| New Jersey | Right to Know Hazardous Substance List- None | | |
| North Dakota | List of Hazardous Chemicals, Reportable Quantities- None | | |

California Proposition 65- No component is listed on the California Proposition 65 List

SECTION XVI. Other Information

This Safety Data Sheet prepared in accordance with OSHA's Hazard Communication Standard (29 CFR 1910.1200) and the Globally Harmonized System of Classification and Labelling of Chemicals (GHS)

HMIS RATINGS:

Health 1
Flammability 0
Reactivity 0

Personal Protective Equipment: use N-95 dust mask (See Section 8)

WHMIS (Canadian Workplace Hazardous Materials Identification)

D2B- May irritate eyes, mucous membranes, and/or skin

Revised on 7/24/19: Page 1, Section II GHS-classification (Non-pressurized) changed (Class) to (Category) Skin Irritation: Class 3 to Category 5, and Inhalations from Class 5 to Category 5. Revised 8/5/19 (Section II) to add "Acute Toxicity" to Inhalation: Category 5

The information contained herein is given in good faith as typical values and not as product specifications. No warranty, either expressed or implied, is hereby made.

SECTION 1: IDENTIFICATION

1.1. PRODUCT IDENTIFIER

Product name : SKD-S2 Aerosol
Product code : Not available

1.2. RELEVANT IDENTIFIED USES OF THE SUBSTANCE OR MIXTURE AND USES ADVISED AGAINST

Use of the substance/mixture : Non-Destructive Testing

1.3. DETAILS OF THE SUPPLIER OF THE SAFETY DATA SHEET

| Manufacturer | Distributor |
|---|-------------|
| Magnaflux 155 Harlem Ave. Glenview, IL 60025 - USA T: 847-657-5300 | |

1.4. EMERGENCY TELEPHONE NUMBER

Emergency number : CHEMTREC 800-424-9300

SECTION 2: HAZARDS IDENTIFICATION

2.1. CLASSIFICATION OF THE SUBSTANCE OR MIXTURE

GHS classification

Flam. Aerosol 1
Liquefied gas
Eye Irrit. 2A
STOT SE 3
Simple Asphy

2.2. LABEL ELEMENTS

GHS labeling

Hazard pictograms (GHS) :



Signal word (GHS) :

Danger

Hazard statements (GHS) :

Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes serious eye irritation. May cause drowsiness or dizziness. May displace oxygen and cause rapid suffocation.

Precautionary statements (GHS) :

Keep away from heat/sparks/open flames/hot surfaces. -No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Wash hands thoroughly after handling. Wear eye protection/face protection. Avoid breathing dust/fume/gas/mist/vapors/spray. Use only outdoors or in a well-ventilated area. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Store locked up. Dispose of contents/container in accordance with local/regional/national/international Regulations.

2.3. OTHER HAZARDS

No additional information available.

2.4. UNKNOWN ACUTE TOXICITY (GHS)

Not applicable.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

3.1. SUBSTANCE

Not applicable.

3.2. MIXTURE

| Name | Product identifier | % |
|---------------------------------------|---------------------|-------|
| Isopropyl alcohol | (CAS No) 67-63-0 | 45.17 |
| Petroleum gases, liquefied, sweetened | (CAS No) 68476-86-8 | 29.73 |
| Acetone | (CAS No) 67-64-1 | 14.43 |

SECTION 4: FIRST AID MEASURES

4.1. DESCRIPTION OF FIRST AID MEASURES

- First-aid measures after inhalation : If inhaled, remove to fresh air and keep at rest in a position comfortable for breathing. Get medical advice/attention if you feel unwell.
- First-aid measures after skin contact : If irritation occurs, flush skin with plenty of water. Get medical attention if irritation persists.
- First-aid measures after eye contact : In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. If easy to do, remove contact lenses, if worn. If irritation persists, get medical attention.
- First-aid measures after ingestion : If swallowed, do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical advice/attention if you feel unwell.

4.2. MOST IMPORTANT SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED

- Symptoms/injuries after inhalation : May cause drowsiness or dizziness. May cause respiratory tract irritation. May displace oxygen and cause rapid suffocation. May cause cardiac arrhythmia.
- Symptoms/injuries after skin contact : May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.
- Symptoms/injuries after eye contact : Causes serious eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva.
- Symptoms/injuries after ingestion : May be harmful if swallowed. May cause stomach distress, nausea or vomiting.

4.3. INDICATION OF ANY IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT NEEDED

Symptoms may not appear immediately. In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

SECTION 5: FIREFIGHTING MEASURES

5.1. EXTINGUISHING MEDIA

- Suitable extinguishing media : Water fog, foam, dry chemical, carbon dioxide.
- Unsuitable extinguishing media : Do not use water jet.

5.2. SPECIAL HAZARDS ARISING FROM THE SUBSTANCE OR MIXTURE

- Fire hazard : Extremely flammable aerosol. Products of combustion may include, and are not limited to: oxides of carbon, oxides of nitrogen, oxides of sulfur.
- Explosion hazard : Heat may build pressure, rupturing closed containers, spreading fire and increasing risk of burns and injuries.

5.3. ADVICE FOR FIREFIGHTERS

- Firefighting instructions : Move containers away from the fire area if this can be done without risk. DO NOT fight fire when fire reaches explosives. Evacuate area.
- Protection during firefighting : Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Use water spray to keep fire-exposed containers cool.

SECTION 6: ACCIDENTAL RELEASE MEASURES

6.1. PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES

- General measures : Remove ignition sources. Use special care to avoid static electric charges. Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel.

6.2. METHODS AND MATERIAL FOR CONTAINMENT AND CLEANING UP

- For containment : Stop leak, if possible without risk. Move containers from spill area. Use only non-sparking tools. Use explosion-proof equipment. Contain and/or absorb spill with inert material (e.g. sand, vermiculite), then place in a suitable container. Do not flush to sewer or allow to enter waterways. Use appropriate Personal Protective Equipment (PPE).
- Methods for cleaning up : Scoop up material and place in a disposal container. Provide ventilation.

6.3. REFERENCE TO OTHER SECTIONS

See section 8 for further information on protective clothing and equipment and section 13 for advice on waste disposal.

SECTION 7: HANDLING AND STORAGE

7.1. PRECAUTIONS FOR SAFE HANDLING

- Additional hazards when processed : Hazardous waste due to potential risk of explosion. Pressurized container: Do not pierce or burn, even after use. Keep away from sources of ignition - No smoking.
- Precautions for safe handling : Do not spray on an open flame or other ignition source. Use non-sparking tools. Use explosion-proof equipment. Take precautionary measures against static discharge. Avoid breathing dust/fume/gas/ mist/vapors/spray. Avoid contact with skin and eyes. Do not swallow. Handle and open container with care. When using do not eat, drink or smoke. Use only outdoors or in a well-ventilated area.
- Hygiene measures : Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2. CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES

- Technical measures : Proper grounding procedures to avoid static electricity should be followed.
- Storage conditions : Keep locked up and out of reach of children. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatibles. Do not expose to temperatures exceeding 50 °C/ 122 °F. Keep in fireproof place.

7.3. SPECIFIC END USE(S)

Not available.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1. CONTROL PARAMETERS

| Isopropyl alcohol (67-63-0) | | |
|--|---------------------------------------|-------------------------------|
| ACGIH | ACGIH TWA (ppm) | 200 ppm |
| ACGIH | ACGIH STEL (ppm) | 400 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 980 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 400 ppm |
| USA - IDLH | US IDLH (ppm) | 2000 ppm (10% LEL) |
| USA - NIOSH | NIOSH REL (TWA) (mg/m ³) | 980 mg/m ³ |
| USA - NIOSH | NIOSH REL (TWA) (ppm) | 400 ppm |
| USA - NIOSH | NIOSH REL (STEL) (mg/m ³) | 1225 mg/m ³ |
| USA - NIOSH | NIOSH REL (STEL) (ppm) | 500 ppm |
| Petroleum gases, liquefied, sweetened (68476-86-8) | | |
| ACGIH | ACGIH STEL (ppm) | 1000 ppm |
| OSHA | OSHA PEL (TWA) (ppm) | 1000 ppm |
| Acetone (67-64-1) | | |
| ACGIH | ACGIH TWA (mg/m ³) | 1188 mg/m ³ /8h |
| ACGIH | ACGIH TWA (ppm) | 500 ppm/8h |
| ACGIH | ACGIH STEL (mg/m ³) | 1782 mg/m ³ /15min |
| ACGIH | ACGIH STEL (ppm) | 750 ppm/15min |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 2400 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 1000 ppm |
| USA - IDLH | US IDLH (ppm) | 2500 ppm (10% LEL) |
| USA - NIOSH | NIOSH REL (TWA) (mg/m ³) | 590 mg/m ³ /10h |
| USA - NIOSH | NIOSH REL (TWA) (ppm) | 250 ppm/10h |

8.2. EXPOSURE CONTROLS

- Appropriate engineering controls : Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits.
- Hand protection : Wear chemically resistant protective gloves.
- Eye protection : Safety glasses with side-shields.
- Skin and body protection : Wear suitable protective clothing.
- Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
- Environmental exposure controls : Maintain levels below Community environmental protection thresholds.
- Other information : Do not eat, smoke or drink where material is handled, processed or stored. Wash hands carefully before eating or smoking. Handle according to established industrial hygiene and safety practices.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES**9.1. INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES**

| | |
|---|---|
| Physical state | : Gas/Pressurized Liquid |
| Appearance | : No data available. |
| Color | : White |
| Odor | : Alcohol |
| Odor threshold | : No data available |
| pH | : Neutral |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : No data available |
| Flash point | : Not applicable |
| Relative evaporation rate (butyl acetate=1) | : No data available |
| Flammability (solid, gas) | : Flammable |
| Explosion limits | : No data available |
| Explosive properties | : Pressurised container: May burst if heated. |
| Oxidizing properties | : No data available |
| Vapor pressure | : No data available |
| Relative density | : No data available |
| Relative vapor density at 20 °C | : No data available |
| Solubility | : No data available |
| Partition coefficient: n-octanol/water | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Viscosity | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |

9.2. OTHER INFORMATION

| | |
|---------------------------|-----------------|
| VOC content | : 765.06 g/l |
| VOC minus exempt solvents | : 655.18 g/l |
| Heat of combustion | : 13 285 Btu/lb |

SECTION 10: STABILITY AND REACTIVITY**10.1. REACTIVITY**

No dangerous reaction known under conditions of normal use.

10.2. CHEMICAL STABILITY

Extremely flammable aerosol. Contents under pressure. Container may explode if heated. Do not puncture. Do not burn. Extreme risk of explosion by shock, friction, fire or other sources of ignition.

10.3. POSSIBILITY OF HAZARDOUS REACTIONS

No dangerous reaction known under conditions of normal use.

10.4. CONDITIONS TO AVOID

Sources of ignition. Heat. Incompatible materials.

10.5. INCOMPATIBLE MATERIALS

Strong oxidizing agents, aldehydes, halogenated hydrocarbons, halogens, strong acids.

10.6. HAZARDOUS DECOMPOSITION PRODUCTS

May include, and are not limited to: oxides of carbon, oxides of nitrogen, oxides of sulfur.

SECTION 11: TOXICOLOGICAL INFORMATION

11.1. INFORMATION ON TOXICOLOGICAL EFFECTS

Acute toxicity : Not classified

| SKD-S2 Aerosol | |
|---------------------|--------------|
| LD50 oral rat | > 2000 mg/kg |
| LD50 dermal rabbit | > 2000 mg/kg |
| LC50 inhalation rat | > 5 mg/l/4h |

| Isopropyl alcohol (67-63-0) | |
|-----------------------------|----------------|
| LD50 oral rat | 5840 mg/kg |
| LD50 dermal rabbit | > 12800 mg/kg |
| LC50 inhalation rat | > 10000 ppm/6h |

| Acetone (67-64-1) | |
|---------------------|---------------------|
| LD50 oral rat | 5800 mg/kg |
| LC50 inhalation rat | 76 mg/l/4h (female) |
| LC50 inhalation rat | 132 mg/l/3h (male) |

Skin corrosion/irritation : Based on available data, the classification criteria are not met.
 Serious eye damage/irritation : Causes serious eye irritation.
 Respiratory or skin sensitization : Based on available data, the classification criteria are not met.
 Germ cell mutagenicity : Based on available data, the classification criteria are not met.
 Carcinogenicity : Based on available data, the classification criteria are not met.

| Isopropyl alcohol (67-63-0) | |
|-----------------------------|----------------------|
| IARC group | 3 - Not classifiable |

Reproductive toxicity : Based on available data, the classification criteria are not met.
 Specific target organ toxicity (single exposure) : May cause drowsiness or dizziness.
 Specific target organ toxicity (repeated exposure) : Based on available data, the classification criteria are not met.
 Aspiration hazard : Based on available data, the classification criteria are not met.
 Symptoms/injuries after inhalation : May cause drowsiness or dizziness. May cause respiratory tract irritation. May displace oxygen and cause rapid suffocation. May cause cardiac arrhythmia.
 Symptoms/injuries after skin contact : May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.
 Symptoms/injuries after eye contact : Causes serious eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva.
 Symptoms/injuries after ingestion : May be harmful if swallowed. May cause stomach distress, nausea or vomiting.

SECTION 12: ECOLOGICAL INFORMATION

12.1. TOXICITY

Ecology - general : May cause long-term adverse effects in the aquatic environment.

12.2. PERSISTENCE AND DEGRADABILITY

| SKD-S2 Aerosol | |
|-------------------------------|------------------|
| Persistence and degradability | Not established. |

12.3. BIOACCUMULATIVE POTENTIAL

| SKD-S2 Aerosol | |
|---------------------------|------------------|
| Bioaccumulative potential | Not established. |

12.4. MOBILITY IN SOIL

No additional information available.

12.5. OTHER ADVERSE EFFECTS

Effect on the global warming : No known ecological damage caused by this product.

SECTION 13: DISPOSAL CONSIDERATIONS

13.1. WASTE TREATMENT METHODS

- Waste disposal recommendations : This material must be disposed of in accordance with all local, state, provincial, and federal regulations. The generation of waste should be avoided or minimized wherever possible.
- Additional information : Flammable vapors may accumulate in the container. Pressurized container: Do not pierce or burn, even after use.

SECTION 14: TRANSPORT INFORMATION

In accordance with DOT/TDG/IATA/IMDG

- DOT Ground : Consumables, Limited Quantity
- TDG : Consumables, Limited Quantity
- IATA : UN 1950, Aerosols, Flammable, 2.1
- IMDG : UN 1950, Aerosols, 2.1 (Limited Quantity)

ADDITIONAL INFORMATION

- Other information : No supplementary information available.
- Special transport precautions : Do not handle until all safety precautions have been read and understood.

SECTION 15: REGULATORY INFORMATION

15.1. FEDERAL REGULATIONS

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory.

All components of this product are listed, or excluded from listing, on the Canadian DSL (Domestic Substances List) and NDSL (Non-Domestic Substances List) inventories except:

| | |
|-------------------------|------------------|
| Chlorite-group minerals | CAS No 1318-59-8 |
|-------------------------|------------------|

Isopropyl alcohol (67-63-0)


Subject to reporting requirements of United States SARA Section 313

| | |
|---------------------------------------|---|
| EPA TSCA Regulatory Flag | T - T - indicates a substance that is the subject of a Section 4 test rule under TSCA |
| SARA Section 313 - Emission Reporting | 1.0 % |

Acetone (67-64-1)

| | |
|--------------------------|---|
| EPA TSCA Regulatory Flag | T - T - indicates a substance that is the subject of a Section 4 test rule under TSCA |
|--------------------------|---|

- NFPA health hazard : 2
- NFPA fire hazard : 4
- NFPA reactivity : 0



15.3. US STATE REGULATIONS

SKD-S2 Aerosol

| | |
|----------------------------|--|
| State or local regulations | This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm |
|----------------------------|--|

SECTION 16: OTHER INFORMATION

- Date of issue : 03/18/2016
- Revision date : 03/18/2016
- Other information : None.

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.



SECTION 1 - IDENTIFICATION

| | |
|--|---|
| Manufacturer: Black Swan Mfg. Co. 4540 W. Thomas St. Chicago, IL 60651-3318 Tel.: 800-252-5796 Fax: 773-227-3705 Web Site : www.blackswanmfg.com E-mail : info@blackswanmfg.com | For any Transportation or Medical Chemical Emergencies call: <p style="text-align: center;">INFOTRAC</p> <p style="text-align: center;">(800) 535-5053 OR (352) 323-3500</p> <p style="text-align: center;">24 hours per day - 7 days a week</p> |
| Product Name: Adhesive-Lube | Recommended Use: Formulated to improve installation & sealing of compression type gaskets for cast iron soil pipe joints. |

SECTION 2 – HAZARD(S) IDENTIFICATION

| | | | | | | | | | | | | | | | | | | |
|---|---|---|--------------|---|------------|---|---|--|--|---|--|--|---|--|---|--|---|--|
| <p>Labels</p> <p>Health Hazard Flammable</p> <p>Signal Word Danger</p> <p>HMIS</p> <table border="1"> <tr> <td>HEALTH</td> <td>2</td> </tr> <tr> <td>FLAMMABILITY</td> <td>3</td> </tr> <tr> <td>REACTIVITY</td> <td>0</td> </tr> </table> | HEALTH | 2 | FLAMMABILITY | 3 | REACTIVITY | 0 | <p>NFPA</p> <table border="1"> <tr> <td> HEALTH HAZARD 4 – Deadly 3 – Extreme Danger 2 – Hazardous 1 – Slight Hazardous 0 – Normal Material </td> <td style="text-align: center;"> </td> <td> FIRE HAZARD Flash Points 4 – Below 73°F 3 – Below 100°F 2 – Above 100°F, Not exceeding 200°F 1 – Above 200°F 0 – Will not burn </td> </tr> <tr> <td> SPECIFIC HAZARD Oxidizer OX Acid ACID Alkali ALK Corrosive COR Use NO WATER W Radioactive ☣ </td> <td></td> <td> REACTIVITY 4 – May detonate 3 – Shock and heat may detonate 2 – Violent chemical change 1 – Unstable if heated 0 – Stable </td> </tr> </table> | HEALTH HAZARD 4 – Deadly 3 – Extreme Danger 2 – Hazardous 1 – Slight Hazardous 0 – Normal Material | | FIRE HAZARD Flash Points 4 – Below 73°F 3 – Below 100°F 2 – Above 100°F, Not exceeding 200°F 1 – Above 200°F 0 – Will not burn | SPECIFIC HAZARD Oxidizer OX Acid ACID Alkali ALK Corrosive COR Use NO WATER W Radioactive ☣ | | REACTIVITY 4 – May detonate 3 – Shock and heat may detonate 2 – Violent chemical change 1 – Unstable if heated 0 – Stable | <p>GHS Classification</p> <table border="1"> <tr> <td> Health Acute Toxicity: Not Established Skin Irritation: Not Established Eye Irritation: Not Established Skin Sensitization: NO </td> <td> Environmental Acute Aquatic Toxicity: Not Established Chronic Aquatic Toxicity: Not Established </td> </tr> <tr> <td colspan="2" style="text-align: center;"> Physical Flammability: Cat. 2 </td> </tr> </table> | Health Acute Toxicity: Not Established Skin Irritation: Not Established Eye Irritation: Not Established Skin Sensitization: NO | Environmental Acute Aquatic Toxicity: Not Established Chronic Aquatic Toxicity: Not Established | Physical Flammability: Cat. 2 | |
| HEALTH | 2 | | | | | | | | | | | | | | | | | |
| FLAMMABILITY | 3 | | | | | | | | | | | | | | | | | |
| REACTIVITY | 0 | | | | | | | | | | | | | | | | | |
| HEALTH HAZARD 4 – Deadly 3 – Extreme Danger 2 – Hazardous 1 – Slight Hazardous 0 – Normal Material | | FIRE HAZARD Flash Points 4 – Below 73°F 3 – Below 100°F 2 – Above 100°F, Not exceeding 200°F 1 – Above 200°F 0 – Will not burn | | | | | | | | | | | | | | | | |
| SPECIFIC HAZARD Oxidizer OX Acid ACID Alkali ALK Corrosive COR Use NO WATER W Radioactive ☣ | | REACTIVITY 4 – May detonate 3 – Shock and heat may detonate 2 – Violent chemical change 1 – Unstable if heated 0 – Stable | | | | | | | | | | | | | | | | |
| Health Acute Toxicity: Not Established Skin Irritation: Not Established Eye Irritation: Not Established Skin Sensitization: NO | Environmental Acute Aquatic Toxicity: Not Established Chronic Aquatic Toxicity: Not Established | | | | | | | | | | | | | | | | | |
| Physical Flammability: Cat. 2 | | | | | | | | | | | | | | | | | | |
| <p>Hazardous Statements</p> <p>H225: Highly flammable liquid and vapor H304: May be fatal if swallowed and enters airways H312: Harmful in contact with skin H319: Causes serious eye irritation H332: Harmful if inhaled H335: May cause respiratory irritation H336: May cause drowsiness or dizziness</p> | <p>Precautionary Statements</p> <p>P102: Keep out of reach of children P103: Read label before use P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P233/P235: Keep container tightly closed and cooled P243: Take precautionary measures against static discharge P261: Avoid breathing dust/fume/gas/mist/vapors/spray P262: Do not get in eyes, on skin, or on clothing P264: Wash thoroughly after handling P270: Do not eat, drink or smoke when using this product P271: Use only outdoors or in a well-ventilated area P280/P284: Wear protective gloves/protective clothing/eye protection/face protection. Wear a NIOSH approved respirator for organic solvents.</p> | | | | | | | | | | | | | | | | | |

SECTION 3 – COMPOSITION / INFORMATION ON INGREDIENTS

| <u>Chemicals</u> | <u>CAS#</u> | <u>EINECS#</u> | <u>REACH</u> <u>Pre-registration Number</u> | <u>Approx %</u> |
|------------------|-------------|----------------|--|-----------------|
| TOLUENE | 108-88-3 | 203-625-9 | N/A | 50% |
| TRADE SECRET | N/A | N/A | N/A | N/A |
| STODDARD SOLVENT | 8052-413 | 232-489-3 | N/A | 25% |

*Unlisted ingredients are not classified as hazardous according to OSHA 1910.1200.

SECTION 4 – FIRST-AID MEASURES

| |
|--|
| <p>Inhalation: Move into fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen and call physician. Skin: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. Eyes: Flush with water for 15 minutes. If irritation persists, get medical attention. Ingestion: Give 1 or 2 glasses of water. DO NOT INDUCE VOMITING. Contact physician immediately.</p> |
|--|

GHS SAFETY DATA SHEET

SECTION 5 – FIRE-FIGHTING MEASURES

Fire Hazard: Vapors may travel a considerable distance to a source of ignition and flash back.
Combustion Products: None.
Extinguishing Media: Carbon Dioxide, Dry Chemical, Foam.
Unsuitable Extinguishing Media: None Known.
Protective Equipment: Self-contained breathing apparatus {(SCBA), MSHA/NIOSH}. Full protective gear.
Special Fire Fighting Procedures: Stop spill/release and move undamaged containers from the fire area, if it can be done without risk. Water spray may be useful in minimizing or dispersing vapors and cooling equipment exposed to heat and flame. Avoid spreading burning liquid with water used for cooling purposes.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Personal Precautions: Prevent contact with skin or eyes. Personnel cleaning up the spill should wear appropriate personal protective equipment, including respirators if vapor concentrations are high.
Protective Equipment: Wear protective gloves and eye goggles. Wear synthetic apron or standard long sleeved work apparel and a vapor respirator.
Emergency Procedures: Evacuate area and keep unnecessary and unprotected personnel from entering the spill area.
Environmental Precautions: Avoid runoff into storm sewers, ditches and waterways.
Methods for Cleaning Up: This product contains a combustible material. Stay upwind and away from spill. Keep all sources of ignition from spill. If spill is indoors, ventilate area of spill. Foam, especially high expansion foam may be used to suppress vapors. Use sand or other inert material to damp and contain spill. Do not flush area with water. For small spills, do not flush with water, use absorbent pads.

SECTION 7 – HANDLING AND STORAGE

| <u>Handling</u> | <u>Storage</u> |
|--|--|
| Use good personal hygiene practices. Avoid inhalation of vapors and personal contact with the product. Repeated and prolonged overexposure to solvents may cause brain and nervous system damage. Concentrating and inhaling the contents may be harmful or fatal. | Store in a cool, dry, well-ventilated area away from incompatible materials. Keep container closed when not in use. Keep away from heat, sparks, open flame and other sources of ignition. Ground during transfer. Incompatible Materials: Strong oxidizing agents and strong acids or bases. |

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

| <u>Hazardous Chemicals</u> | <u>Exposure Limits</u> | | |
|----------------------------|------------------------|-------------------|-----------------|
| | <u>ACGIH-TLV</u> | <u>ACGIH-STEL</u> | <u>OSHA-PEL</u> |
| TOLUENE | 100 ppm | N/A | 200 ppm |
| TRADE SECRET | N/A | N/A | N/A |
| STODDARD SOLVENT | N/A | N/A | 500 ppm |

Engineering Controls: A source of running water to flush or wash the eyes and skin in case of contact. Use local exhaust as needed.
Ventilation: Mechanical ventilation is adequate.
Personal Protective Equipment – Respiratory: If use conditions generate vapors or mists, wear a NIOSH-approved respirator appropriate for those emission levels. Appropriate respirators may be a full face piece or a half mask air purifying cartridge respirator equipped for organic vapors/mists, a self-contained breathing apparatus in the pressure demand mode, or a supplied-air respirator.
Personal Protective Equipment – Skin: Chemical resistant gloves. Long-sleeve shirt, coveralls, and safety shoes.
Personal Protective Equipment – Eyes: Chemical goggles.

SECTION 9 – PHYSICAL & CHEMICAL PROPERTIES

| | | |
|--|------------------------------------|--|
| Appearance: Black Viscous Liquid | Flash Point: 40°F (T.C.C.) | Vapor Pressure: 23 |
| Odor: Characteristic solvent odor | Specific Gravity: 0.926 | Flammability: Not Established |
| pH: Not Established | Solubility (H2O): Insoluble | Flammability Limits: LEL – 0.9% UEL – 7.0% |
| Melting Point: Not Established | Evaporation Rate: <1 | |
| Freezing Point: Not Established | Vapor Density: 3.3 | |
| Boiling Point: 215°F | VOC: 658 g/l | |

SECTION 10 – STABILITY AND REACTIVITY

Stability: Stable.
Hazardous polymerization: Will not occur.
Conditions to avoid: Heat, sparks, open flames and all possible sources of ignition.
Incompatible materials: Strong oxidizing agents and strong acids or bases.
Hazardous decomposition products: Carbon Monoxide and Carbon Dioxide.

GHS SAFETY DATA SHEET

SECTION 11 – TOXICOLOGICAL INFORMATION

| <u>Hazardous Chemicals</u> | <u>LD₅₀</u> | <u>LC₅₀</u> |
|----------------------------|------------------------|------------------------|
| TOLUENE | N/A | N/A |
| TRADE SECRET | N/A | N/A |
| STODDARD SOLVENT | N/A | N/A |

Likely Routes of Exposure: Inhalation, Skin Contact, Eye Contact and Ingestion.

Symptoms and Effect - Inhalation: It is a respiratory tract irritant and anesthetic. Causes central nervous system depression (e.g. headache, drowsiness, dizziness, loss of coordination & fatigue). **Skin Contact:** May cause mild skin irritation. Prolonged or repeated contact may cause redness, burning, drying and cracking of the skin. **Eye Contact:** May cause mild eye irritation. Direct contact with the liquid or exposure to vapors or mists may cause stinging, tearing or redness. **Ingestion:** Ingestion of excessive quantities may cause irritation of the digestive tract and signs of nervous system depression. **ASPIRATION HAZARD** – This material can enter lungs during swallowing or vomiting and cause lung inflammation and damage.

Long-Term Effect: Chronic effects of overexposure – Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage (sometimes referred to as solvent or painters’ syndrome). Intentional misuse by deliberately concentrating and inhaling this product may be harmful or fatal. This product contains a chemical known to the State of California to cause cancer.

Pre-Existing Conditions: Skin contact may aggravate an existing dermatitis.

SECTION 12 – ECOLOGICAL INFORMATION

Ecotoxicity: None.

Persistence & Degradability: None.

Bioaccumulative Potential: None.

Mobility in soil: In normal use, emission of Volatile Organic Compounds (VOC’s) to the air takes place, typically at a rate of ≤ 658 g/l.

SECTION 13 – DISPOSAL CONSIDERATION

Dispose of product or container in accordance with federal, state or local regulations.

SECTION 14 – TRANSPORTATION INFORMATION

| Shipping Information | | Exception to the rule: If the package that contains the hazardous material is in a small consumer size (Less than 1L), then the rules that apply to shipping hazardous materials do not apply. This is called an “Exception”. This is classified as Limited Quantity. |
|----------------------|--|--|
| Shipping Name: | Adhesives, Containing a Flammable Liquid | |
| Hazardous Class: | 3 | |
| I.D. Number: | UN1133 | |
| Packing Group: | II | |
| Label Required: | Flammable Liquid | |
| Marine Pollutant: | No | |

SECTION 15 – REGULATORY INFORMATION

Precautionary Label Information: Health Hazard, Flammable.

Risk Phrases: **R10**-Flammable. **R36/37**-Irritant to eyes and respiratory system. **R67**-Vapors may cause drowsiness and dizziness.

Safety Phrases: **S2**-Keep out of reach of children. **S9**-Keep container in a well-ventilated place. **S16**-Keep away from sources of ignition-No smoking. **S25**-Avoid contact with eyes. **S26**-In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. **S33**-Take precautionary measures against static discharges. Calif. PRO. 65 – Chemical Warning (California Health and Safety Code #25249.5 ET SEQ). – Warning: This product contains chemicals known to the state of California to cause cancer, birth defects or reproductive harm. Read and follow label directions and information given on GHS Safety Data Sheets and use care when handling or using all petroleum products.

SECTION 16 – OTHER INFORMATION

Information on this form is furnished solely for the purpose of compliance with the Occupational Safety and Health Act and shall not be used for any other purpose. Black Swan Mfg. Co. urges the customers receiving this Material Safety Data Sheet to study it carefully to become aware of the hazards, if any, of the product involved. In the interest of safety, you should notify your employees, agents and contractors of the information on the sheets. **DATE: 01/01/2021**

Permatex, Inc.
 10 Columbus Blvd.
 Hartford, CT 06106 USA
 Telephone: 1-87-Permatex
 (877) 376-2839
 Emergency: 800-255-3924
 International Emergency: 813-248-0585

Material Safety Data Sheet

1. PRODUCT IDENTIFICATION

Product Name: 78E HYDRAULIC JACK OIL 1QT CN
Item No: 80054
Product Type: Lubricant

2. COMPOSITION/INFORMATION ON INGREDIENTS

| Ingredient | Weight Percent | ACGIH TLV: TWA | OSHA PEL: |
|--|----------------|-------------------------|-------------------------|
| DISTILLATES (PETROLEUM), HYDROTREATED LIGHT NAPHTHENIC 64742-53-6 | >90 | 5 mg/m ³ TWA | 5 mg/m ³ TWA |
| POLYMETHACRYLATE DISPERSION MIXTURE | <10 | Not Listed | Not Listed |

3. HAZARDS IDENTIFICATION

Toxicity: May cause eye, skin and respiratory irritation. Prolonged skin contact may result in dermatitis in sensitive individuals. Aspiration hazard if swallowed.

Primary Routes of Entry: Eye and skin contact, ingestion, inhalation

Signs and Symptoms of Exposure: Overexposure may cause eye and skin redness. Inhaling may cause mild irritation to the nose, throat and respiratory tract and may result in central nervous system (CNS) depression.

Medical Conditions Recognized as Being Aggravated by Exposure: Preexisting pulmonary and dermatological disorders.

4. FIRST AID MEASURES

Ingestion: Do not induce vomiting. Slowly dilute with 1-2 glasses of water or milk and seek medical attention. Never give anything by mouth to an unconscious person.

Inhalation: Move to fresh air in case of accidental inhalation of vapours. Obtain medical attention.

Skin Contact: Wash off with soap and water. If skin irritation persists, call a physician.

Eye Contact: In case of contact, immediately flush eyes with plenty of water for at least 15 minutes and get medical attention if irritation persists.

5. FIRE FIGHTING MEASURES

Flash Point (°F/C): Greater than 200 degrees F.

Recommended Extinguishing Media: Carbon Dioxide, Dry Chemicals, Foam.

Special Fire-Fighting Procedures: Firefighters should wear self-contained breathing apparatus.

Hazardous Products of Combustion: Carbon monoxide, Carbon dioxide

Unusual Fire/Explosion Hazards: Closed containers may rupture or explode when exposed to extreme heat.

Lower Explosive Limit: Not determined.

Upper Explosive Limit: Not determined.

6. ACCIDENTAL RELEASE MEASURES

Spill Procedures: Maintain good ventilation. Take up with an inert absorbent. Store in a closed waste container until disposal. Residues may be cleaned up with soap and water.

7. HANDLING AND STORAGE

Storage: Store away from heat, sparks or open flame. Do not store at temperatures above 120 degrees F.

Handling: Avoid prolonged skin contact. Keep away from eyes. Do not inhale vapors.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Eyes: Safety glasses

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Skin: Rubber or plastic gloves.
Ventilation: General; local exhaust ventilation as necessary to control any air contaminants to within their exposure limits (or to the lowest feasible levels when limits have not been established) during the use of this product.
Respiratory Protection: Not required under normal use. An approved respirator (i.e. NIOSH, etc.) should be worn when exposures are expected to exceed the applicable limits.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance: Amber liquid
Odor: MILD
Boiling Point: >500°F
pH: Does not apply
Solubility in Water: Nil
Specific Gravity: 0.9 @ 15°C
VOC Content(Wt.%): 0
Vapor Pressure: <5 mm Hg
Vapor Density (Air=1): Greater than 1
Evaporation Rate: <1 (butyl acetate = 1)

10. STABILITY AND REACTIVITY

Chemical Stability: Stable at normal conditions
Hazardous Polymerization: Will not occur.
Incompatibilities: Strong oxidizers
Conditions to Avoid: Heat
Hazardous Products of Combustion: Carbon monoxide, Carbon dioxide

11. TOXICOLOGICAL INFORMATION

See Section 3

12. ECOLOGICAL INFORMATION

No data available

13. DISPOSAL CONSIDERATIONS

Recommended Method of Disposal: Disposal should be made in accordance with federal, state and local regulations.
US EPA Waste Number: NH - Not a RCRA Hazardous Waste Material

14. TRANSPORTATION INFORMATION

DOT (49CFR 172)

Domestic Ground Transport

DOT Shipping Name: Unrestricted
Hazard Class: None
UN/ID Number: None
Marine Pollutant: None

IATA

Proper Shipping Name: Not regulated
Class or Division: None
UN/NA Number: None

IMDG

Proper Shipping: Unrestricted
Hazard Class: None
UN Number: None

15. REGULATORY INFORMATION

SARA 313 Chemicals: The following component(s) is listed as a SARA Section 313 Toxic Chemical.

NONE

CALIFORNIA PROP 65:

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Product Name: 78E HYDRAULIC JACK OIL 1QT CN

Item No: 80054

TSCA Inventory Status:

Listed on Inventory: YES All components of this product are listed (or exempt) on the EPA TSCA inventory.

16. OTHER INFORMATION

Estimated NFPA Rating: HEALTH 1, FLAMMABILITY 1, REACTIVITY 0

Estimated HMIS Classification: HEALTH 1, FLAMMABILITY 1, PHYSICAL HAZARD 0

NFPA is a registered trademark of the National Fire Protection Assn.

HMIS is a registered trademark of the National Paint and Coatings Assn.

Prepared By: Denise Boyd, Health and Safety Manager

Company: Permatex, Inc. 10 Columbus Blvd. Hartford, CT USA 06106

Revision Date: February/20/2007

Revision 3

Number:



Revision Number: 005.0

Issue date: 03/23/2018

1. PRODUCT AND COMPANY IDENTIFICATION

| | | | |
|------------------------------|--|---------------------|--------|
| Product name: | LOCTITE LB 8008 C5-A known as C5-A® Copper Based Anti-Seize | IDH number: | 234204 |
| Product type: | Lubricant | Item number: | 51008 |
| Restriction of Use: | None identified | Region: | Canada |
| Company address: | Contact information: | | |
| Henkel Canada Corporation | Telephone: +1 (905) 814-6511 | | |
| Meadowpine Boulevard 2515 | MEDICAL EMERGENCY Phone: Poison Control Center | | |
| Mississauga, Ontario L5N 6C3 | 1-877-671-4608 (toll free) or 1-303-592-1711 | | |
| | TRANSPORT EMERGENCY Phone: CHEMTREC | | |
| | 1-800-424-9300 (toll free) or 1-703-527-3887 | | |
| | Internet: www.henkelna.com | | |

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

DANGER: CAUSES SKIN IRRITATION.
CAUSES SERIOUS EYE DAMAGE.

| HAZARD CLASS | HAZARD CATEGORY |
|--------------------|-----------------|
| SKIN IRRITATION | 2 |
| SERIOUS EYE DAMAGE | 1 |

PICTOGRAM(S)



Precautionary Statements

Prevention: Wash affected area thoroughly after handling. Wear protective gloves, eye protection, and face protection.

Response: IF ON SKIN: Wash with plenty of water. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation occurs: Get medical attention. Take off contaminated clothing.

Storage: Not prescribed

Disposal: Not prescribed

Classification complies with Canadian Hazardous Products Regulations (WHMIS 2015) and is consistent with the provision of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

| Hazardous Component(s) | CAS Number | Weight %* |
|--|------------|-----------|
| Calcium dihydroxide | 1305-62-0 | 10 - 20 |
| Distillates (petroleum), hydrotreated heavy naphthenic | 64742-52-5 | 10 - 20 |

IDH number: 234204

Product name: LOCTITE LB 8008 C5-A known as C5-A® Copper Based Anti-Seize

| | | |
|---|------------|---------|
| Petroleum distillates, hydrotreated, light naphthenic | 64742-53-6 | 10 - 20 |
| Copper | 7440-50-8 | 10 - 20 |
| Graphite | 7782-42-5 | 5 - 10 |
| Quartz (SiO ₂) | 14808-60-7 | 0.1 - 1 |

* Exact percentages may vary or are trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

| | |
|----------------------|---|
| Inhalation: | Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. If symptoms develop and persist, get medical attention. |
| Skin contact: | Wash with soap and water. If symptoms develop and persist, get medical attention. |
| Eye contact: | Immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention. |
| Ingestion: | Do not induce vomiting. Get medical attention. |
| Symptoms: | See Section 11. |

5. FIRE FIGHTING MEASURES

| | |
|---|--|
| Extinguishing media: | Water spray (fog), foam, dry chemical or carbon dioxide. |
| Special firefighting procedures: | None |
| Unusual fire or explosion hazards: | None |
| Hazardous combustion products: | Oxides of carbon. |

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

| | |
|-----------------------------------|--|
| Environmental precautions: | Do not allow material to contaminate ground water system. |
| Clean-up methods: | Scrape up as much material as possible. Clean residue with soap and water. |

7. HANDLING AND STORAGE

| | |
|------------------|--|
| Handling: | Use only with adequate ventilation. Avoid contact with eyes, skin and clothing. Keep container closed. Wash thoroughly after handling. |
| Storage: | Keep in a cool, well ventilated area. |

Shelf Life Statement: Not available.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

| Hazardous Component(s) | ACGIH TLV | OSHA PEL | AIHA WEEL | OTHER |
|--|---|---|-----------|-------|
| Calcium dihydroxide | 5 mg/m3 TWA | 5 mg/m3 PEL Respirable fraction. 15 mg/m3 PEL Total dust. | None | None |
| Distillates (petroleum), hydrotreated heavy naphthenic | 5 mg/m3 TWA Inhalable fraction. | 5 mg/m3 TWA mist 500 ppm (2,000 mg/m3) PEL 5 mg/m3 PEL Mist. | None | None |
| Petroleum distillates, hydrotreated, light naphthenic | 5 mg/m3 TWA Inhalable fraction. | 500 ppm (2,000 mg/m3) PEL 5 mg/m3 PEL Mist. | None | None |
| Copper | 0.2 mg/m3 TWA (as Cu) Fume. 1 mg/m3 TWA (as Cu) Dust and mist. | 1 mg/m3 PEL (as Cu) Dust and mist. 0.1 mg/m3 PEL (as Cu) Fume. | None | None |
| Graphite | 2 mg/m3 TWA Respirable fraction. | 5 mg/m3 PEL Respirable fraction. 15 mg/m3 PEL Total dust. 15 MPPCF TWA | None | None |
| Quartz (SiO2) | 0.025 mg/m3 TWA Respirable fraction. | 2.4 MPPCF TWA Respirable. 0.1 mg/m3 TWA Respirable. 0.05 mg/m3 TWA (Respirable dust.) (Respirable dust.) 0.025 mg/m3 OSHA_ACT (Respirable dust.) 0.05 mg/m3 PEL Respirable dust. | None | None |

Engineering controls:

Use local ventilation if general ventilation is insufficient to maintain vapor concentration below established exposure limits.

Respiratory protection:

Use NIOSH approved respirator if there is potential to exceed exposure limit(s). Observe OSHA regulations for respirator use (29 CFR 1910.134).

Eye/face protection:

Safety goggles or safety glasses with side shields. Full face protection should be used if the potential for splashing or spraying of product exists.

Skin protection:

Use impermeable gloves and protective clothing as necessary to prevent skin contact.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|--|----------------------|
| Physical state: | Paste |
| Color: | Copper |
| Odor: | Mild |
| Odor threshold: | Not available. |
| pH: | Not applicable |
| Vapor pressure: | < 5.0 mm hg |
| Boiling point/range: | > 260 °C (> 500°F) |
| Melting point/ range: | Not available. |
| Specific gravity: | 1.30 |
| Vapor density: | Heavier than air. |
| Flash point: | > 93 °C (> 199.4 °F) |
| Flammable/Explosive limits - lower: | Not determined |
| Flammable/Explosive limits - upper: | Not determined |
| Autoignition temperature: | Not determined |
| Flammability: | Not applicable |
| Evaporation rate: | Slower than ether. |
| Solubility in water: | Insoluble |

| | |
|---|-----------------|
| Partition coefficient (n-octanol/water): | Not determined |
| VOC content: | < 3 % Estimated |
| Viscosity: | Not available. |
| Decomposition temperature: | Not available. |

10. STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable at normal conditions. |
| Hazardous reactions: | Will not occur. |
| Hazardous decomposition products: | Hydrocarbons. Oxides of carbon. |
| Incompatible materials: | Strong acids and strong bases. Oxidizing agents. |
| Reactivity: | Not available. |
| Conditions to avoid: | Prolonged exposure to heat. |

11. TOXICOLOGICAL INFORMATION

| | |
|-------------------------------------|-----------------------------------|
| Relevant routes of exposure: | Skin, Inhalation, Eyes, Ingestion |
|-------------------------------------|-----------------------------------|

Potential Health Effects/Symptoms

Inhalation: Inhalation of copper fumes may result in metal fume fever. Symptoms include metallic taste, discoloration of skin or hair. May cause respiratory tract irritation. Contains crystalline silica (quartz), which is classified as a possible carcinogen. However, the crystalline silica present in this product is encapsulated in the liquid and will only be liberated if the product is sanded or abraded, and even then what is liberated will not be pure crystalline silica. Appropriate precautions, however, should be taken if the product is sanded or abraded to prevent personnel from breathing the dust.

Skin contact: Causes skin irritation.

Eye contact: Causes serious eye damage.

Ingestion: May cause gastrointestinal tract irritation if swallowed.

| Hazardous Component(s) | LD50s and LC50s | Immediate and Delayed Health Effects |
|--|-------------------------------|--|
| Calcium dihydroxide | Oral LD50 (Rat) = 7,340 mg/kg | Irritant, Corrosive |
| Distillates (petroleum), hydrotreated heavy naphthenic | None | Irritant |
| Petroleum distillates, hydrotreated, light naphthenic | None | Irritant |
| Copper | None | Allergen, Blood, Central nervous system, Developmental, Gastrointestinal, Immune system, Irritant, Kidney, Liver, Mutagen, Sensory, Skin |
| Graphite | None | Lung |
| Quartz (SiO2) | None | Immune system, Lung, Some evidence of carcinogenicity |

| Hazardous Component(s) | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen (Specifically Regulated) |
|--|-------------------------------|-----------------|--|
| Calcium dihydroxide | No | No | No |
| Distillates (petroleum), hydrotreated heavy naphthenic | No | No | No |
| Petroleum distillates, hydrotreated, light naphthenic | No | No | No |
| Copper | No | No | No |
| Graphite | No | No | No |
| Quartz (SiO2) | Known To Be Human Carcinogen. | Group 1 | Yes |

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Follow all local, state, federal and provincial regulations for disposal.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any package/configuration.

Canada Transportation of Dangerous Goods - Ground

Proper shipping name: Not regulated

Hazard class or division: None

Identification number: None

Packing group: None

International Air Transportation (ICAO/IATA)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

Water Transportation (IMO/IMDG)

Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (Copper)
Hazard class or division: 9
Identification number: UN 3082
Packing group: III
Marine pollutant: Copper
Additional information: No dangerous good according to ADR/RID/ADN. Carriage in accordance with 1.1.4.2.1 ADR/RID/ADN.

15. REGULATORY INFORMATION**Canada Regulatory Information**

CEPA DSL/NDL Status: All components are listed on or are exempt from listing on the Canadian Domestic Substances List.

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: 2, 8, 11

Prepared by: Product Safety and Regulatory Affairs

Issue date: 03/23/2018

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.

Safety Data Sheet

SDS ID: Stock Code PPL

Revision date: April 27, 2017

Section 1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product name: Low VOC Purple Primer
Synonyms: None
Chemical family: Hydrocarbon Mixture
Producer: J.C. Whitlam Manufacturing Company
200 West Walnut Street
P.O. Box 380
Wadsworth, Ohio 44282-0380
www.jcwhitlam.com

Telephone: 330-334-2524 Available during normal business hours

Emergency: CHEMTEL 800-255-3924 Available 24 hours

Section 2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

Flammable liquid and vapor – vapor may cause a flash fire. This product can be easily ignited by heat, spark, or flames. Causes eye irritation. Harmful if swallowed. Prolonged or repeated skin contact may cause drying, cracking, or irritation. High vapor concentrations may cause drowsiness and irritation of the eyes and respiratory tract.

GHS Label elements, including precautionary statements

DANGER — Highly Flammable Liquid and Vapor (*category 2*)

WARNING — Causes Serious Eye Irritation (*category 2A*)

May cause drowsiness or dizziness



Precautionary Statements

Keep away from heat/sparks/open flames/hot surfaces – No smoking. Keep container tightly closed. Wear protective gloves and safety glasses, see SDS.

Avoid breathing vapors. Wash skin thoroughly after handling. Wear protective gloves and eye protection. IF ON SKIN, immediately remove all contaminated clothing. Rinse skin with water/shower. IF IN EYES, Remove contact lenses if present and easy to do so, rinse with water for several minutes. If eye or skin irritation persists – get medical advice/attention. Store in a well-ventilated place.

Inhalation: May cause irritation to mucous membranes and upper respiratory tract. In high concentrations, vapors and aerosol mists have a narcotic effect and may cause headache, central nervous system depression, fatigue, dizziness, and nausea.

Chronic: Repeated or prolonged exposure may result in liver damage or may cause dermatitis by defatting the skin. See Section 11 (Toxicological Information) for additional information.

Ingestion: May cause irritation of the digestive tract, stomach pain, nausea, and vomiting.

Skin contact: Prolonged or repeated contact with skin may cause redness, irritation, swelling, and dermatitis.

Eye contact: Exposure to vapors or liquid may cause eye irritation.

Carcinogenic evaluation: No component of this product present at levels greater than 0.1 % is identified as a known, suspected or potential carcinogen by the NTP, the IARC or OSHA. The ACGIH designates Tetrahydrofuran as category A3 – confirmed animal carcinogen with unknown relevance to humans.

Section 3. COMPOSITION / INFORMATION ON INGREDIENTS

Material information:

| Name | CAS No. | Weight % |
|----------------------|----------|----------|
| Acetone* | 67-64-1 | 39-44 |
| Methyl ethyl ketone* | 78-93-3 | 22-27 |
| Cyclohexanone* | 108-94-1 | 18-23 |
| Tetrahydrofuran* | 109-99-9 | 12-17 |

**Note: The above weight percentages are represented in ranges as estimates. Due to variation among production batches, component percentages may vary.*

Section 4. FIRST AID MEASURES

Inhalation: Move exposed persons to fresh air. If the person is not breathing or breathing is irregular, provide artificial respiration or oxygen by trained personnel. Seek medical attention.

Skin contact: Quickly remove contaminated clothing and shoes. Wash affected skin with soap and water. Get medical attention if symptoms occur. Wash contaminated clothing before reuse.

Ingestion: Do not induce vomiting. Never give anything by mouth to an unconscious person. If conscious and alert, rinse the mouth with water. Call a physician or poison control center immediately.

Eye contact: Check for and remove any contact lenses. Immediately consult physician after flushing eyes with tepid water for 15 minutes.


Section 5. FIREFIGHTING MEASURES

Suitable extinguishing media: Small fires — Class B fire-extinguishing media including water spray, foam, CO₂ or dry powder. Do not use a water stream, as this will spread the fire.

Specific hazards: Fire or intense heat may cause violent rupture of product containers. Vapors may form explosive mixtures with air. Application of extinguishing media to hot surfaces requires special precautions. During emergency conditions, overexposure to decomposition products including carbon oxides may cause a health hazard. Symptoms may not be immediately apparent.

Special protective equipment for firefighters: Full protective equipment including self-contained breathing apparatus should be used. Explosive in the presence of oxidizers or nitric acid. Do not allow run-off from fire fighting to enter drains or water courses.

| | NFPA rating: | HMIS rating: |
|-------------------------|--------------|--------------|
| Health: | 2 | 2 |
| Flammability: | 3 | 3 |
| Instability/reactivity: | 0 | 0 |
| Other: | N/A | H (PPE) |

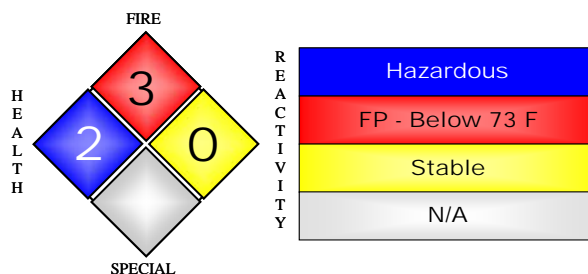

Section 6. ACCIDENTAL RELEASE MEASURES

| | |
|---|--|
| Personal Precautions: | Immediately contact emergency personnel. Evacuate any potentially affected area and isolate personnel from entry. Ventilate closed spaces before entering them. Vapor can collect in lower areas. |
| Large Spill: | Personnel must have appropriate training, per OSHA 29 CFR 1910.120. Do not touch damaged containers or spilled material unless wearing appropriate protective equipment (Section 8). |
| Methods for Containment and Clean up | Shut off source if possible and if safe. Eliminate all ignition sources. Use non-sparking tools during all cleanup procedures. Prevent entry into waterways, sewers, basements or confined areas. Advise applicable authorities if material has entered sewers or water courses. |

Section 7. HANDLING AND STORAGE

| | |
|------------------|--|
| Handling: | Use with adequate ventilation. Keep containers closed when not in use. Always open containers slowly to allow any excess pressure to vent. Avoid breathing vapors. Avoid contact with eyes, skin, or clothing. Wash thoroughly with soap and water after handling. Launder soiled clothing thoroughly before re-use. |
| Storage: | Keep all containers tightly closed when not in use. Store out of direct sunlight and on an impermeable floor. Do not store with incompatible materials. See Section 10, Stability and Reactivity. |

Section 8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Occupational Exposure Limits:

| Name | CAS No. | ACGIH® TLV® Exposure Limits: | Federal OSHA PELs | OSHA PELs 1989 ^C |
|----------------------------|----------|--|-----------------------|---|
| Acetone | 67-64-1 | 500 ppm ^A 750 ppm ^B | 1000 ppm ^A | 750 ppm ^A 1000 ppm ^B |
| Methyl-ethyl ketone | 78-93-3 | 200 ppm ^A 300 ppm ^B | 200 ppm ^A | None |
| Cyclohexanone | 108-94-1 | 20 ppm ^A | 50 ppm ^A | 25 ppm ^A |
| Tetrahydrofuran | 109-99-9 | 50 ppm ^A 100 ppm ^B | 200 ppm ^A | 200 ppm ^A 250 ppm ^B |

All exposure limits listed are 8-hour time weighted average (TWA) — except where noted otherwise.

^A Time Weighted Average (TWA) is an average exposure over the course of an 8-hour work shift.

^B A Short Term Exposure Limit TWA over the course of 15 minutes.

PEL — Permissible Exposure Limit is the maximum 8-hour TWA concentration of a chemical that a worker may be exposed to under Occupational Safety and Health Administration (OSHA) regulations.

^C Federal OSHA 1989 PELs were vacated but are in use and enforced by many state OSHA plans.

Engineering measures: Local exhaust ventilation is preferable. Mechanical ventilation must be explosion proof. General ventilation is acceptable if exposure to

materials in this section is maintained below applicable exposure limits.

PERSONAL PROTECTIVE EQUIPMENT

- Respiratory protection:** When engineering controls are not sufficient to reduce exposure to levels below applicable exposure limits, seek professional advice prior to respirator selection and use. For concentrations less than 10 times the exposure limits, wear a properly fitted NIOSH/ MSHA-approved respirator with organic vapor cartridges.
- Skin and body protection:** Wear impervious clothing and gloves to prevent contact. Butyl-rubber is recommended for full contact or splash contact. Other protective material may be used, depending on the situation, if adequate degradation and permeation data is available.
- Eye protection:** Wear safety spectacles with unperforated side shields, or goggles.
- Hygiene measures:** Avoid repeated or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Promptly remove contaminated clothing and laundry before reuse.
- Other precautions:** Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

Section 9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|---------------------------------|
| Appearance: | Purple liquid |
| Physical state (solid/liquid/gas): | Liquid |
| Substance type (pure/mixture): | Mixture |
| Color: | Purple |
| Odor: | Ether-like odor |
| Molecular weight: | 72.1grams/mol |
| pH: | N/A |
| Boiling point/range (5-95%): | 153°F; 67°C |
| Melting point/range: | N/A |
| Decomposition temperature: | Not Available |
| Specific gravity: | 0.84 |
| Vapor density: | (AIR = 1) 3.5 |
| Vapor pressure: | 20 mm Hg at 68°F |
| Evaporation rate (Butyl acetate= 1): | 6.1 |
| Flash point: | 1°F; -17.2°C |
| Water solubility: | Completely miscible |
| VOC Content (SCAQMD Rule 1168 Test Method 316A): | 490 g/l |
| Auto-ignition temperature: | 610°F; 321°C (lowest component) |
| Flammable limits in air — lower (%): | 1.1 |
| Flammable limits in air — upper (%): | 11.5 |

Section 10. STABILITY AND REACTIVITY

| | |
|--|--|
| Reactivity: | No data available |
| Stability: | Stable under recommended storage conditions |
| Possibly hazardous reactions: | Vapors may form an explosive mixture with air |
| Conditions to avoid: | Heat, flames, sparks, temperature extremes and direct sunlight |
| Incompatible Materials: | Strong oxidizing agents, Acids, Alkalis, Peroxides. |
| Hazardous decomposition products: | By fire, Carbon dioxide, Carbon monoxide |
| Polymerization: | Will not occur. |

Section 11. TOXICOLOGICAL INFORMATION

Acute toxicity: Excessive exposure leads to depression of the central nervous system. Causes eye irritation, moderate skin irritation.

Product information:

| Name | CAS No. | Inhalation: | Dermal: | Oral: |
|---------------------|----------|---|--|---|
| Acetone | 67-64-1 | LC ₅₀ (Rat): 76 mg/l, 4 hours | LD ₅₀ (Rabbit) 20,000 mg/kg | Acute LD ₅₀ (Rat):5,800 mg/kg |
| Methyl-ethyl ketone | 78-93-3 | LC ₅₀ (Rat): >5,000 ppm, 6 hours | LD ₅₀ (Rabbit) 5 to 13 g/kg | LD ₅₀ (Rat) 2,700 to 5,600 mg/kg |
| Cyclohexanone | 108-94-1 | LC ₅₀ (Rat): 8,000 ppm, 4 hours | LD ₅₀ (Rabbit) 794 to 3,160 mg/kg | LD ₅₀ (Rat) 1,534 mg/kg |
| Tetrahydrofuran | 109-99-9 | LC ₅₀ (Rat): 18,000 ppm, 4 hours | Not available | LD ₅₀ (Rat) 3,240 mg/kg |

LC₅₀ — The concentration of the chemical in air that kills 50% of the test animals in a given time (usually four hours)

Chronic toxicity: Ingredients are not listed by the IARC, NTP, OSHA, or EPA as carcinogenic. Repeated or prolonged exposure may cause skin dryness or cracking. Repeated or prolonged exposure in excess of exposure limits in Section 8 may cause damage to the respiratory tract, lungs, liver, and kidney.

Sensitization: Not known to cause sensitization in humans.

Section 12. ECOLOGICAL INFORMATION

Ecotoxicity effects: EC₅₀ Fathead minnow 96-hour 527 to 8,890 mg/l (TLm — Median Threshold Limit). The product components are not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful effect on the environment.

Persistence and Degradability: Expected to be readily biodegradable.
Products of degradation: carbon oxides (CO, CO₂ and water)

Section 13. DISPOSAL CONSIDERATIONS

Cleanup considerations: Waste from this product may be hazardous as defined under RCRA 40 CFR 261. Waste must be tested for ignitability to determine the applicable EPA hazardous waste numbers. Incinerate in an approved facility. Do not incinerate a closed container. Disposal of this material must be done in accordance with federal, state and/or local regulations. The material destined for disposal must be characterized properly and may differ from the product described in this SDS if mixed with other wastes.

Section 14. TRANSPORT INFORMATION

Please refer to 49 CFR 172.101:

DOT:

Transport information: This material is regulated under DOT when transported via U.S. commerce routes.

Proper shipping name:

UN/identification no.: UN1133

Hazardous Materials Description: Flammable Liquids, n.o.s. (Acetone, Methyl ethyl ketone)

Hazard class: 3

Packing group: II

DOT reportable quantity (lbs): 1,000 (Tetrahydrofuran)

Section 15. REGULATORY INFORMATION

U.S. federal regulatory information:

State and community right-to-know regulations:

The following component(s) of this material are identified on the regulatory lists below:

U.S. TSCA Chemical inventory Section 8(b)

OSHA — This product is determined to be hazardous as defined in the OSHA Hazard Communications Standard.

CERCLA Sections 102a/103 (40 FR 302.4):

Acetone, methyl-ethyl ketone, and cyclohexanone: Reportable Quantity (RQ): 5000 pounds

Tetrahydrofuran: Reportable Quantity (RQ): 1,000 pounds

Some Components of this product are listed in the following sections of **SARA**:

SARA Title III Section 302 — N/A

SARA Title III Section 304 — N/A

SARA Title III Section 313 — Methyl ethyl ketone

SARA Title III Sections 311/312 Hazardous Categories (40 CFR 370.21)

Acute health hazard: Yes

Chronic health hazard: Yes

Fire hazard: Yes

Reactive Hazard: No

Pressure Hazard: No

California Proposition 65 Components

This product does not contain any chemicals known to the State of California to cause cancer, birth defects, or any other reproductive harm.

WHMIS (Canada)

Class B-2: Flammable liquid with a flash point lower than 100°F (37.8°C)

Class D-2A: Material causing other toxic effects

NOTE: User must consult with applicable state and local agencies for special specifics, determinations or compliance obligations regarding this product.

Section 16. OTHER INFORMATION

Standards and Certification Listings:

This product meets the performance requirements of ASTM F656. It also meets SCAQMD Rule 1168/316A. It is compliant with LEED® (Leadership in Energy and Environmental Design). When using this product, credit can be claimed for LEED® Green Building Rating System – Indoor Environmental Quality.

The information and recommendations contained herein are based upon tests, data, and information resources believed to be reliable. However, the J.C. Whitlam Manufacturing Company, Inc., and its related operations or divisions (Whitlam) do not guarantee the accuracy or completeness, nor shall any of this information constitute a warranty, whether expressed or implied, as to the safety of goods, the merchantability of the goods or the fitness of the goods for a particular purpose. Adjustment to conform to actual conditions of usage may be required. Whitlam assumes no responsibility for results obtained or for incidental or consequential damages, including lost profits, arising from the use of this data. No warranty against infringement of any patent, copyright or trademark is made or implied.



1. MATERIAL AND COMPANY IDENTIFICATION

Material Name : Gasoline
Uses : Motor Gasoline.
Product Code : X2871
Company : Shell Chemical LP
 PO Box 2463
 HOUSTON TX 77252-2463
 USA
SDS Request : 1-800-240-6737
Customer Service : 1-855-697-4355

Emergency Telephone Number
Chemtrec Domestic (24 hr) : 1-800-424-9300
Chemtrec International (24 hr) : 1-703-527-3887

2. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No. | Concentration |
|---|------------|-----------------|
| Straight Run Gasoline | 68606-11-1 | 0.00 - 100.00 % |
| Petroleum Products, Hydrofiner-Powerformer Reformates | 68514-79-4 | 0.00 - 100.00 % |

Contains Alkanes, Cycloalkanes, Alkenes and Aromatic Hydrocarbons, Mixture.
 Contains Xylene (Mixed Isomers), CAS # 1330-20-7.
 Contains Toluene, CAS # 108-88-3.
 Contains 1,2,4 Tri-methyl-benzene, CAS# 95-63-6
 Contains Benzene, CAS # 71-43-2.
 Contains n-Hexane, CAS # 110-54-3.
 Contains Cyclo-hexane, CAS# 110-82-7
 Contains Ethylbenzene, CAS # 100-41-4.
 Contains Naphthalene, CAS # 91-20-3.
 Contains Styrene, CAS # 100-42-5.

3. HAZARDS IDENTIFICATION

| Emergency Overview | |
|-----------------------------|---|
| Appearance and Odour | : Bronze. Clear, bright liquid. Hydrocarbon. |
| Health Hazards | : Harmful: may cause lung damage if swallowed. Vapours may cause drowsiness and dizziness. Irritating to skin. May cause cancer. May cause leukaemia (AML - acute myelogenous leukaemia). May cause MDS (Myelodysplastic Syndrome). |
| Safety Hazards | : Extremely flammable. The vapour is heavier than air, spreads along the ground and distant ignition is possible. Will float and can be reignited on surface water. This material is a static |



Environmental Hazards : accumulator. Even with proper grounding and bonding, this material can still accumulate an electrostatic charge. If sufficient charge is allowed to accumulate, electrostatic discharge and ignition of flammable air-vapour mixtures can occur.

: Toxic to aquatic organisms; may cause long-term adverse effects in the aquatic environment. Ether oxygenates are significantly more water soluble and less biodegradable than benzene, toluene, ethyl benzene and xylenes (BTEX). Consequently ether oxygenates have the potential to migrate relatively longer distances than BTEX in groundwater.

Health Hazards

Inhalation : Slightly irritating to respiratory system. Vapours may cause drowsiness and dizziness.

Skin Contact : Irritating to skin.

Ingestion : Harmful: may cause lung damage if swallowed.

Signs and Symptoms : Skin irritation signs and symptoms may include a burning sensation, redness, swelling, and/or blisters. If material enters lungs, signs and symptoms may include coughing, choking, wheezing, difficulty in breathing, chest congestion, shortness of breath, and/or fever. Breathing of high vapour concentrations may cause central nervous system (CNS) depression resulting in dizziness, light-headedness, headache, nausea and loss of coordination. Continued inhalation may result in unconsciousness and death.

Aggravated Medical Condition : Pre-existing medical conditions of the following organ(s) or organ system(s) may be aggravated by exposure to this material: Skin.

4. FIRST AID MEASURES

Inhalation : Remove to fresh air. Do not attempt to rescue the victim unless proper respiratory protection is worn. If the victim has difficulty breathing or tightness of the chest, is dizzy, vomiting, or unresponsive, give 100% oxygen with rescue breathing or CPR as required and transport to the nearest medical facility.

Skin Contact : Remove contaminated clothing. Immediately flush skin with large amounts of water for at least 15 minutes, and follow by washing with soap and water if available. If redness, swelling, pain and/or blisters occur, transport to the nearest medical facility for additional treatment.

Eye Contact : Immediately flush eyes with large amounts of water for at least 15 minutes while holding eyelids open. Transport to the nearest medical facility for additional treatment.

Ingestion : If swallowed, do not induce vomiting; transport to nearest medical facility for additional treatment. If vomiting occurs spontaneously, keep head below hips to prevent aspiration. If any of the following delayed signs and symptoms appear within the next 6 hours, transport to the nearest medical facility: fever greater than 101° F (38.3° C), shortness of breath, chest congestion or continued coughing or wheezing. Give nothing by mouth.



Advice to Physician : Potential for chemical pneumonitis. Call a doctor or poison control center for guidance.

5. FIRE FIGHTING MEASURES

Clear fire area of all non-emergency personnel.

- Flash point** : -40 °C / -40 °F (Tagliabue Closed Cup)
- Explosion / Flammability limits in air** : 1.3 - 7.6 %(V)
- Specific Hazards** : Carbon monoxide may be evolved if incomplete combustion occurs. Will float and can be reignited on surface water. The vapour is heavier than air, spreads along the ground and distant ignition is possible.
- Extinguishing Media** : Foam, water spray or fog. Dry chemical powder, carbon dioxide, sand or earth may be used for small fires only.
- Unsuitable Extinguishing Media** : Do not use water in a jet.
- Protective Equipment for Firefighters** : Wear full protective clothing and self-contained breathing apparatus.
- Additional Advice** : Keep adjacent containers cool by spraying with water.

6. ACCIDENTAL RELEASE MEASURES

Observe all relevant local and international regulations.

- Protective measures** : Avoid contact with spilled or released material. Immediately remove all contaminated clothing. For guidance on selection of personal protective equipment see Chapter 8 of this Material Safety Data Sheet. For guidance on disposal of spilled material see Chapter 13 of this Material Safety Data Sheet. Be ready for fire or possible exposure. Stay upwind and keep out of low areas. Shut off leaks, if possible without personal risks. Remove all possible sources of ignition in the surrounding area. Use appropriate containment (of product and fire fighting water) to avoid environmental contamination. Prevent from spreading or entering drains, ditches or rivers by using sand, earth, or other appropriate barriers. Attempt to disperse the vapour or to direct its flow to a safe location for example by using fog sprays. Take precautionary measures against static discharge. Ensure electrical continuity by bonding and grounding (earthing) all equipment.
- Clean Up Methods** : For small liquid spills (< 1 drum), transfer by mechanical means to a labelled, sealable container for product recovery or safe disposal. Allow residues to evaporate or soak up with an appropriate absorbent material and dispose of safely. Remove contaminated soil and dispose of safely. For large liquid spills (> 1 drum), transfer by mechanical means such as vacuum truck to a salvage tank for recovery or safe disposal. Do not flush away residues with water. Retain as contaminated waste. Allow residues to evaporate or soak up



Additional Advice : with an appropriate absorbent material and dispose of safely. Remove contaminated soil and dispose of safely.

: Risk of explosion. Inform the emergency services if liquid enters surface water drains. Vapour may form an explosive mixture with air. Notify authorities if any exposure to the general public or the environment occurs or is likely to occur. Under Section 311 of the Clean Water Act (CWA) this material is considered an oil. As such, spills into surface waters must be reported to the National Response Center at (800) 424-8802. This material is covered by EPA's Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) Petroleum Exclusion. Therefore, releases to the environment may not be reportable under CERCLA.

7. HANDLING AND STORAGE

General Precautions : Avoid breathing vapours or contact with material. Only use in well ventilated areas. Wash thoroughly after handling. On guidance on selection of personal protective equipment see Chapter 8 of this Material Safety Data Sheet.

Handling : Avoid inhaling vapour and/or mists. Avoid contact with skin, eyes and clothing. Even with proper grounding and bonding, this material can still accumulate an electrostatic charge. If sufficient charge is allowed to accumulate, electrostatic discharge and ignition of flammable air-vapour mixtures can occur. Be aware of handling operations that may give rise to additional hazards that result from the accumulation of static charges. These include but are not limited to pumping (especially turbulent flow), mixing, filtering, splash filling, cleaning and filling of tanks and containers, sampling, switch loading, gauging, vacuum truck operations, and mechanical movements. These activities may lead to static discharge e.g. spark formation. Restrict line velocity during pumping in order to avoid generation of electrostatic discharge (≤ 1 m/s until fill pipe submerged to twice its diameter, then ≤ 7 m/s). Avoid splash filling. Do NOT use compressed air for filling, discharging, or handling operations. The vapour is heavier than air. Beware of accumulation in pits and confined spaces. Extinguish any naked flames. Do not smoke. Remove ignition sources. Avoid sparks. Handling Temperature: Ambient.

Storage : Keep away from aerosols, flammables, oxidizing agents, corrosives and from other flammable products which are not harmful or toxic to man or to the environment. Keep container tightly closed. Must be stored in a diked (bunded) well-ventilated area, away from sunlight, ignition sources and other sources of heat. Vapours from tanks should not be released to atmosphere. Breathing losses during storage should be controlled by a suitable vapour treatment system. Electrostatic charges will be generated during pumping. Electrostatic discharge may cause fire. Ensure electrical continuity by bonding and grounding (earthing) all equipment to reduce the risk. The vapours in the



head space of the storage vessel may lie in the flammable/explosive range and hence may be flammable. Storage Temperature: Ambient.

- Product Transfer** : Refer to guidance under Handling section.
- Container Advice** : Containers, even those that have been emptied, can contain explosive vapours. Do not cut, drill, grind, weld or perform similar operations on or near containers.
- Additional Information** : Ensure that all local regulations regarding handling and storage facilities are followed.
See additional references that provide safe handling practices for liquids that are determined to be static accumulators: American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practices on Static Electricity). CENELEC CLC/TR 50404 (Electrostatics – Code of practice for the avoidance of hazards due to static electricity).

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Occupational Exposure Limits

| Material | Source | Type | ppm | mg/m3 | Notation |
|-------------------------|----------|-----------|---------|-----------|-----------------------------------|
| Xylene, Mixed Isomers | ACGIH | TWA | 100 ppm | | |
| | ACGIH | STEL | 150 ppm | | |
| | OSHA Z1 | PEL | 100 ppm | 435 mg/m3 | |
| | OSHA Z1 | | | | Listed. |
| Toluene | SHELL IS | TWA | 50 ppm | | |
| | ACGIH | TWA | 20 ppm | | |
| | OSHA Z2 | TWA | 200 ppm | | |
| | OSHA Z2 | Ceiling | 300 ppm | | |
| | OSHA Z2 | MAX. CONC | 500 ppm | | |
| 1,2,4-Trimethyl benzene | ACGIH | TWA | 25 ppm | | |
| Benzene | SHELL IS | TWA (8 h) | 0.5 ppm | 1.6 mg/m3 | |
| | SHELL IS | STEL | 2.5 ppm | 8 mg/m3 | |
| | ACGIH | SKIN_DES | | | Can be absorbed through the skin. |
| | ACGIH | STEL | 2.5 ppm | | |
| | ACGIH | TWA | 0.5 ppm | | |
| | OSHA | ACTION | 0.5 ppm | | |
| | OSHA | TWA | 1 ppm | | |
| | OSHA | STEL | 5 ppm | | |
| | OSHA Z2 | MAX. CONC | 50 ppm | | |
| | OSHA Z2 | TWA | 10 ppm | | |
| OSHA Z2 | Ceiling | 25 ppm | | | |
| | OSHA | REF | | | 29 CFR 1910.1028 |
| n-Hexane | ACGIH | SKIN_DES | | | Can be absorbed through the skin. |



| | | | | | |
|--------------|---------|-----------|---------|-------------|-----------------------------------|
| | ACGIH | TWA | 50 ppm | | |
| | OSHA Z1 | PEL | 500 ppm | 1,800 mg/m3 | |
| | OSHA Z1 | | | | Listed. |
| Cyclohexane | ACGIH | TWA | 100 ppm | | |
| | OSHA Z1 | PEL | 300 ppm | 1,050 mg/m3 | |
| | OSHA Z1 | | | | Listed. |
| Ethylbenzene | ACGIH | TWA | 20 ppm | | |
| | OSHA Z1 | PEL | 100 ppm | 435 mg/m3 | |
| | OSHA Z1 | | | | Listed. |
| Naphthalene | ACGIH | STEL | 15 ppm | | |
| | ACGIH | SKIN_DES | | | Can be absorbed through the skin. |
| | ACGIH | TWA | 10 ppm | | |
| | OSHA Z1 | PEL | 10 ppm | 50 mg/m3 | |
| Styrene | ACGIH | STEL | 40 ppm | | |
| | ACGIH | TWA | 20 ppm | | |
| | OSHA Z2 | TWA | 100 ppm | | |
| | OSHA Z2 | Ceiling | 200 ppm | | |
| | OSHA Z2 | MAX. CONC | 600 ppm | | |

Biological Exposure Index (BEI)

Biological Limit Values (BLV) have not been established for this material.

Additional Information : The ACGIH-values are adopted by the local authorities and have to be adhered to.
 SHELL IS is the Shell Internal Standard. Shell has adopted as Interim Standards the OSHA Z1A values that were established in 1989 and later rescinded. Skin notation means that significant exposure can also occur by absorption of liquid through the skin and of vapour through the eyes or mucous membranes.

Exposure Controls : The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Select controls based on a risk assessment of local circumstances. Appropriate measures include: Adequate explosion-proof ventilation to control airborne concentrations below the exposure guidelines/limits.

Personal Protective Equipment : Personal protective equipment (PPE) should meet recommended national standards. Check with PPE suppliers.
Respiratory Protection : If engineering controls do not maintain airborne concentrations to a level which is adequate to protect worker health, select respiratory protection equipment suitable for the specific conditions of use and meeting relevant legislation. Check with respiratory protective equipment suppliers. Where air-filtering



respirators are unsuitable (e.g., airborne concentrations are high, risk of oxygen deficiency, confined space) use appropriate positive pressure breathing apparatus. If air-filtering respirators are suitable for conditions of use:

Select a filter suitable for combined particulate/organic gases and vapours [boiling point <65 °C (149 °F)]

Hand Protection

: Where hand contact with the product may occur the use of gloves approved to relevant standards (e.g. Europe: EN374, US: F739, AS/NZS:2161) made from the following materials may provide suitable chemical protection: Suitability and durability of a glove is dependent on usage, e.g. frequency and duration of contact, chemical resistance of glove material, glove thickness, dexterity. Always seek advice from glove suppliers. Contaminated gloves should be replaced. Longer term protection - Viton. Incidental contact/Splash protection - Nitrile rubber.

Personal hygiene is a key element of effective hand care.

Gloves must only be worn on clean hands. After using gloves, hands should be washed and dried thoroughly. Application of a non-perfumed moisturizer is recommended.

Eye Protection

: Chemical splash goggles (chemical monogoggles).

Protective Clothing

: Chemical resistant gloves/gauntlets, boots, and apron (where risk of splashing). Wear antistatic and flame retardant clothing.

Monitoring Methods

: Monitoring of the concentration of substances in the breathing zone of workers or in the general workplace may be required to confirm compliance with an OEL and adequacy of exposure controls. For some substances biological monitoring may also be appropriate. Examples of sources of recommended exposure measurement methods are given below or contact the supplier. Further national methods may be available. National Institute of Occupational Safety and Health (NIOSH), USA: Manual of Analytical Methods <http://www.cdc.gov/niosh/> Occupational Safety and Health Administration (OSHA), USA: Sampling and Analytical Methods <http://www.osha.gov/>

9. PHYSICAL AND CHEMICAL PROPERTIES

The physical and chemical property data are typical values and do not constitute a specification.

| | |
|--|---|
| Appearance | : Bronze. Clear, bright liquid. |
| Odour | : Hydrocarbon. |
| Flash point | : -40 °C / -40 °F (Tagliabue Closed Cup) |
| Explosion / Flammability limits in air | : 1.3 - 7.6 %(V) |
| Vapour pressure | : 7.0 - 14.5 psi (Reid vapour pressure) |
| Specific gravity | : 0.72 - 0.76 |
| Water solubility | : 0.05 g/l Negligible. |
| Vapour density (air=1) | : 3.5 |
| Electrical conductivity | : Low conductivity: < 100 pS/m, The conductivity of this material makes it a static accumulator., A liquid is typically considered nonconductive if its conductivity is below 100 pS/m and is |



considered semi-conductive if its conductivity is below 10 000 pS/m., Whether a liquid is nonconductive or semi-conductive, the precautions are the same., A number of factors, for example liquid temperature, presence of contaminants, and anti-static additives can greatly influence the conductivity of a liquid.

Volatility : 100.0 % vol at 212.8 °C / 415.0 °F
Stability : Stable.

10. STABILITY AND REACTIVITY

Stability : Stable under normal conditions of use.
Conditions to Avoid : Heat, flames, and sparks.
Materials to Avoid : Strong oxidising agents.
Hazardous Decomposition Products : Thermal decomposition is highly dependent on conditions. A complex mixture of airborne solids, liquids and gases, including carbon monoxide, carbon dioxide and other organic compounds will be evolved when this material undergoes combustion or thermal or oxidative degradation.

11. TOXICOLOGICAL INFORMATION

Basis for Assessment : Information given is based on product testing, and/or similar products, and/or components.
Acute Oral Toxicity : Low toxicity: LD50 >2000 mg/kg , Rat
Aspiration into the lungs when swallowed or vomited may cause chemical pneumonitis which can be fatal.
Acute Dermal Toxicity : Low toxicity: LD50 >2000 mg/kg , Rabbit
Acute Inhalation Toxicity : Low toxicity: LC50 >20 mg/l / 1 hours, Rat
High concentrations may cause central nervous system depression resulting in headaches, dizziness and nausea; continued inhalation may result in unconsciousness and/or death.
Skin corrosion/irritation : Irritating to skin.
Serious eye damage/irritation : Essentially non-irritating to eyes.
Respiratory Irritation : Inhalation of vapours or mists may cause irritation to the respiratory system.
Repeated Dose Toxicity : Kidney: caused kidney effects in male rats which are not considered relevant to humans
Germ cell mutagenicity : Not mutagenic.
Carcinogenicity : Known human carcinogen. (Benzene)
May cause leukaemia (AML - acute myelogenous leukaemia). (Benzene)

Table with 2 columns: Material and Carcinogenicity Classification. Rows include Alkanes, Cycloalkanes, Alkenes and Aromatic Hydrocarbons; Xylene, Mixed Isomers (ACGIH Group A4); Xylene, Mixed Isomers (IARC 3); Xylene, Mixed Isomers (GHS / CLP).



| | | |
|-------------------------|---|---|
| Toluene | : | ACGIH Group A4: Not classifiable as a human carcinogen. |
| Toluene | : | IARC 3: Not classifiable as to carcinogenicity to humans. |
| Toluene | : | GHS / CLP: No carcinogenicity classification |
| 1,2,4-Trimethyl benzene | : | GHS / CLP: No carcinogenicity classification |
| Benzene | : | ACGIH Group A1: Confirmed human carcinogen. |
| Benzene | : | NTP: Known To Be Human Carcinogen. |
| Benzene | : | IARC 1: Carcinogenic to humans. |
| Benzene | : | OSHA: Cancer hazard. |
| Benzene | : | GHS / CLP: Carcinogenicity Category 1A |
| n-Hexane | : | GHS / CLP: No carcinogenicity classification |
| Cyclohexane | : | GHS / CLP: No carcinogenicity classification |
| Ethylbenzene | : | ACGIH Group A3: Confirmed animal carcinogen with unknown relevance to humans. |
| Ethylbenzene | : | IARC 2B: Possibly carcinogenic to humans. |
| Ethylbenzene | : | GHS / CLP: No carcinogenicity classification |
| Naphthalene | : | ACGIH Group A4: Not classifiable as a human carcinogen. |
| Naphthalene | : | NTP: Reasonably Anticipated to be a Human Carcinogen. |
| Naphthalene | : | IARC 2B: Possibly carcinogenic to humans. |
| Naphthalene | : | GHS / CLP: Carcinogenicity Category 2 |
| Styrene | : | ACGIH Group A4: Not classifiable as a human carcinogen. |
| Styrene | : | NTP: Reasonably Anticipated to be a Human Carcinogen. |
| Styrene | : | IARC 2B: Possibly carcinogenic to humans. |
| Styrene | : | GHS / CLP: No carcinogenicity classification |

Reproductive and Developmental Toxicity : Does not impair fertility. The relevance of these data to humans is unknown.
Additional Information : May cause MDS (Myelodysplastic Syndrome). (Benzene)

12. ECOLOGICAL INFORMATION

Acute Toxicity
Fish : Expected to be toxic: LL/EL/IL50 1-10 mg/l
Aquatic crustacea : Expected to be toxic: LL/EL/IL50 1-10 mg/l
Algae/aquatic plants : Expected to be toxic: LL/EL/IL50 1-10 mg/l

Mobility : If product enters soil, one or more constituents will be mobile and may contaminate groundwater. Toxic to aquatic organisms; may cause long-term adverse effects in the aquatic environment. Ether oxygenates are significantly more water soluble and less biodegradable than benzene, toluene, ethyl benzene and xylenes (BTEX). Consequently ether oxygenates have the potential to migrate relatively longer distances than BTEX in groundwater. Floats on water.

Persistence/degradability : Oxidises rapidly by photo-chemical reactions in air. Expected to be inherently biodegradable.

Bioaccumulation : Contains components with the potential to bioaccumulate.

13. DISPOSAL CONSIDERATIONS

Material Disposal : Recover or recycle if possible. It is the responsibility of the waste



generator to determine the toxicity and physical properties of the material generated to determine the proper waste classification and disposal methods in compliance with applicable regulations.

Do not dispose into the environment, in drains or in water courses. Waste product should not be allowed to contaminate soil or water.

Local Legislation

: Disposal should be in accordance with applicable regional, national, and local laws and regulations. Local regulations may be more stringent than regional or national requirements and must be in compliance.

14. TRANSPORT INFORMATION

US Department of Transportation Classification (49CFR)

Identification number UN 1203
UN proper shipping name Gasoline
Class / Division 3
Packing group II
Contains OIL
Emergency Response Guide No. 128
Additional Information

This material is an 'OIL' under 49 CFR Part 130 when transported in a container of 3500 gallon capacity or greater.

IMDG

Identification number UN 1203
UN proper shipping name GASOLINE
Class / Division 3
Packing group II
Marine Pollutant: Yes

IATA (Country variations may apply)

Identification number UN 1203
UN proper shipping name Gasoline
Class / Division 3
Packing group II

15. REGULATORY INFORMATION

The regulatory information is not intended to be comprehensive. Other regulations may apply to this material.

Federal Regulatory Status

Notification Status

TSCA

All components are listed on the TSCA Inventory.



Comprehensive Environmental Release, Compensation & Liability Act (CERCLA)

- Gasoline () Reportable quantity: 100 lbs
- Xylene, Mixed Isomers (1330-20-7)
- Toluene (108-88-3)
- Benzene (71-43-2)
- n-Hexane (110-54-3)
- Cyclohexane (110-82-7)
- Naphthalene (91-20-3)
- Styrene (100-42-5)
- Gasoline (8006-61-9)

Shell classifies this material as an "oil" under the CERCLA Petroleum Exclusion, therefore releases to the environment are not reportable under CERCLA. The components with RQs are given for information.

Clean Water Act (CWA) Section 311

- Xylene, Mixed Isomers (1330-20-7) Reportable quantity: 100 lbs
- Toluene (108-88-3) Reportable quantity: 1,000 lbs
- Benzene (71-43-2) Reportable quantity: 10 lbs
- Cyclohexane (110-82-7) Reportable quantity: 1,000 lbs
- Naphthalene (91-20-3) Reportable quantity: 100 lbs
- Styrene (100-42-5) Reportable quantity: 1,000 lbs

Under Section 311 of the Clean Water Act (CWA) this material is considered an oil. As such, spills into surface waters must be reported to the National Response Center at (800) 424-8802. The components with RQs are given for information.

SARA Hazard Categories (311/312)

Immediate (Acute) Health Hazard. Delayed (Chronic) Health Hazard. Fire Hazard.

SARA Toxic Release Inventory (TRI) (313)

- Xylene, Mixed Isomers (1330-20-7)
- Toluene (108-88-3)
- 1,2,4-Trimethyl benzene (95-63-6)
- Benzene (71-43-2)
- n-Hexane (110-54-3)
- Cyclohexane (110-82-7)
- Naphthalene (91-20-3)
- Styrene (100-42-5)

State Regulatory Status**California Safe Drinking Water and Toxic Enforcement Act (Proposition 65)**

Known to the State of California to cause birth defects or other reproductive harm.
Known to the state of California to cause cancer.

| | |
|----------------------------------|---|
| Toluene (108-88-3) 25.00% | Developmental toxin. |
| Benzene (71-43-2) 4.00% | Female reproductive toxin. Carcinogenic. Developmental toxin. Male reproductive toxin. |
| Naphthalene (91-20-3) 1.00% | Carcinogenic. |
| Gasoline Engine Exhaust () 0.11% | Carcinogenic. |

New Jersey Right-To-Know Chemical List

| | |
|-----------------------------------|----------------------------|
| Xylene, Mixed Isomers (1330-20-7) | Listed. |
| Toluene (108-88-3) | Listed. Special hazard. |
| 1,2,4-Trimethyl benzene (95-63-6) | Listed. |
| Benzene (71-43-2) | Listed. Special hazard. |
| n-Hexane (110-54-3) | Special hazard. Listed. |
| Cyclohexane (110-82-7) | Listed. |
| Naphthalene (91-20-3) | Listed. |
| Styrene (100-42-5) | Special hazard. Listed. |
| Gasoline (8006-61-9) | Listed. |
| Isopropyl Ether (108-20-3) | Listed. |

Pennsylvania Right-To-Know Chemical List

| | |
|-----------------------------------|---|
| Xylene, Mixed Isomers (1330-20-7) | Listed. |
| Toluene (108-88-3) | Environmental hazard. Listed. |
| 1,2,4-Trimethyl benzene (95-63-6) | Environmental hazard. Environmental hazard. Listed. |
| Benzene (71-43-2) | Environmental hazard. Listed. Special hazard. |
| n-Hexane (110-54-3) | Listed. |
| Cyclohexane (110-82-7) | Environmental hazard. Listed. |
| Naphthalene (91-20-3) | Environmental hazard. Listed. |
| Styrene (100-42-5) | Environmental hazard. Listed. |



Isopropyl Ether (108-20-3)

Listed.

16. OTHER INFORMATION

HMIS Rating (Health, Fire, Reactivity) : 1, 3, 0

NFPA Rating (Health, Fire, Reactivity) : 1, 3, 0

SDS Version Number : 5.2

SDS Effective Date : 01/24/2013

SDS Revisions : A vertical bar (|) in the left margin indicates an amendment from the previous version.

SDS Regulation : The content and format of this MSDS is in accordance with the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

Uses and Restrictions : Fuel industry.

SDS Distribution : The information in this document should be made available to all who may handle the product

Disclaimer : The information contained herein is based on our current knowledge of the underlying data and is intended to describe the product for the purpose of health, safety and environmental requirements only. No warranty or guarantee is expressed or implied regarding the accuracy of these data or the results to be obtained from the use of the product.



SAFETY DATA SHEET

Section 1 – Product & Company Identification

Product Name:
RIDGID Extreme Performance Thread Cutting Oil (United States)

Product Catalog No.:
74012, 74047, 76767

Recommended Use:
Thread Cutting

Restrictions on Use:
Industrial use only

Company Information:

| | |
|--|--|
| <u>North America</u> Ridge Tool Company 400 Clark Street Elyria, Ohio 44035-6001 1-800-519-3456 (8:00 am – 5:00 pm EST, M-F) Emergency Telephone call 9-1-1 or local emergency number www.RIDGID.com | <u>Australia</u> Ridge Tool Australia 127 Metrolink Circuit Campbellfield, VIC 3061 1-800-743-443 (8:30 am – 5:00 pm AEST, M-F) Emergency Telephone call 000 or local emergency number www.RIDGID.com.au |
|--|--|

Issue Date: May 1, 2018

Revision: K

• Français – 11
• Castellano – pág. 21

Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 2 – Hazards Identification

Hazard Classification**Health Hazards**

Serious Eye Damage/Eye Irritation Category 2A

Label Elements**Hazard Symbol:**

Signal Word: Warning

Hazard Statement: Causes serious eye irritation.

Precautionary Statements

Prevention: Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

Response: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Other hazards which do not result in GHS classification: None.

Unknown toxicity - Health

| | |
|--|--------|
| Acute toxicity, oral | 31.6 % |
| Acute toxicity, dermal | 8 % |
| Acute toxicity, inhalation, vapor | 48.1 % |
| Acute toxicity, inhalation, dust or mist | 44.8 % |



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 3 – Composition / Information On Ingredients

General information: This product does not contain silicone or chlorinated additives.

Hazardous Component(s):

| Chemical name | CAS-No. | Concentration |
|---------------|--------------|---------------|
| Paraffin oils | Confidential | 20 - <50% |
| Mineral oil | Confidential | 20 - <50% |
| Zinc compound | Confidential | 5 - <10% |

Specific chemical identities and/or exact percentages have been withheld as trade secrets.

Section 4 – First Aid Measures

Ingestion: Rinse mouth thoroughly. Call a POISON CENTER/doctor if you feel unwell. Do NOT induce vomiting.

Inhalation: Move to fresh air. Call a POISON CENTER/doctor if you feel unwell.

Skin Contact: Remove contaminated clothing and shoes. Wash contact areas with soap and water. If skin irritation occurs: Get medical advice/attention.

Eye contact: Immediately flush with plenty of water for at least 15 minutes. If easy to do, remove contact lenses. Get medical attention.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: Get medical attention if symptoms occur.

Section 5 – Fire Fighting Measures

General Fire Hazards: No unusual fire or explosion hazards noted.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Water spray, fog, CO₂, dry chemical, or regular foam. Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Specific hazards arising from the chemical: Heat may cause the containers to explode. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

Section 6 – Accidental Release Measures

Personal precautions, protective equipment and emergency procedures: See Section 8 of the SDS for Personal Protective Equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep unauthorized personnel away. Ensure adequate ventilation.

Methods and material for containment and cleaning up: Absorb spill with vermiculite or other inert material, then place in a container for chemical waste. Dike far ahead of larger spill for later recovery and disposal.

Environmental Precautions: Do not contaminate water sources or sewer. Prevent further leakage or spillage if safe to do so.

Section 7 – Handling And Storage

Precautions for safe handling: Avoid contact with eyes. Wash hands thoroughly after handling. Observe good industrial hygiene practices. Wear appropriate personal protective equipment. Do not expose to intense heat as product may expand and pressurize container.

Conditions for safe storage, including any incompatibilities: Store in original tightly closed container. Avoid contact with oxidizing agents. Store away from incompatible materials. Shelf Life: 720 Days



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 8 – Exposure Controls / Personal Protection

Exposure Limits

| Chemical name | Type | Exposure Limit Values | Source |
|-------------------------------------|------|-----------------------|---|
| Paraffin oils - Inhalable fraction. | TWA | 5 mg/m ³ | US. ACGIH Threshold Limit Values (03 2014) |
| Paraffin oils - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| Paraffin oils - Mist. | TWA | 5 mg/m ³ | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Mineral oil - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (01 2017) |
| Mineral oil - Mist. | TWA | 5 mg/m ³ | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Mineral oil - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |

Protective Measures:

Provide easy access to water supply and eye wash facilities. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Respiratory Protection:

In case of inadequate ventilation use suitable respirator. Seek advice from supervisor on the company's respiratory protection standards.

Eye Protection:

Wear safety glasses with side shields (or goggles).

Skin and Body Protection:

Wear protective clothing appropriate for the risk of exposure. Be aware of other hazards such as rotating parts. Contact health and safety professional or manufacturer for specific information.

Hygiene measures:

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing to remove contaminants. Discard contaminated footwear that cannot be cleaned.

Section 9 – Physical And Chemical Properties

Appearance

Physical state:

Liquid

Form:

No data available.

Color:

Amber



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

| | |
|--|--|
| Odor: | Mild petroleum/solvent |
| Odor threshold: | No data available. |
| pH: | No data available. |
| Melting point/freezing point: | No data available. |
| Initial boiling point and boiling range: | No data available. |
| Flash Point: | 196.11 °C (385.00 °F) |
| Evaporation rate: | No data available. |
| Flammability (solid, gas): | No data available. |
| Upper/lower limit on flammability or explosive limits | |
| Flammability limit - upper (%): | No data available. |
| Flammability limit - lower (%): | No data available. |
| Explosive limit - upper (%): | No data available. |
| Explosive limit - lower (%): | No data available. |
| Vapor pressure: | No data available. |
| Vapor density: | No data available. |
| Relative density: | 0.88 |
| Solubility(ies) | |
| Solubility in water: | Insoluble |
| Solubility (other): | No data available. |
| Partition coefficient (n-octanol/water): | No data available. |
| Auto-ignition temperature: | No data available. |
| Decomposition temperature: | No data available. |
| Viscosity: | 38 mm ² /s (40 °C, Measured) |
| Other information | |
| VOC: | 1.99 % (Method 24) 6.1 g/l (ASTM E 1868-10) |

Section 10 – Stability And Reactivity

| | |
|--|--|
| Reactivity: | Not reactive during normal use. |
| Chemical Stability: | Material is stable under normal conditions. |
| Possibility of hazardous reactions: | None under normal conditions. |
| Conditions to avoid: | Avoid heat or contamination. |
| Incompatible Materials: | No data available. |
| Hazardous Decomposition Products: | Thermal decomposition or combustion may liberate carbon oxides and other toxic gases or vapors. Contains a component which may release flammable substances, including trimethylpentene, by distillation in systems with solvent recovery. This may lead to accumulation in the solvent circuit. |



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 11 – Toxicological Information

Information on likely routes of exposure

- Ingestion:** May be ingested by accident. Ingestion may cause irritation and malaise. May be harmful if swallowed.
- Inhalation:** Inhalation is the primary route of exposure. In high concentrations, vapors, fumes or mists may irritate nose, throat and mucus membranes.
- Skin Contact:** Prolonged or repeated skin contact may cause drying, cracking, or irritation.
- Eye contact:** Causes serious eye irritation.

Symptoms related to the physical, chemical and toxicological characteristics

- Ingestion:** No data available.
- Inhalation:** No data available.
- Skin Contact:** No data available.
- Eye contact:** No data available.

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

Oral
Product: Not classified for acute toxicity based on available data.

Dermal
Product: Not classified for acute toxicity based on available data.

Inhalation
Product: Not classified for acute toxicity based on available data.

Repeated dose toxicity
Product: No data available.

Skin Corrosion/Irritation
Product: No data available.

Serious Eye Damage/Eye Irritation
Product: No data available.

Respiratory or Skin Sensitization
Product: No data available.

Carcinogenicity
Product: No data available.



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):

No carcinogenic components identified

Germ Cell Mutagenicity

In vitro

Product: No data available.

In vivo

Product: No data available.

Reproductive toxicity

Product: No data available.

Specific Target Organ Toxicity - Single Exposure

Product: No data available.

Specific Target Organ Toxicity - Repeated Exposure

Product: No data available.

Aspiration Hazard

Product: No data available.

Other effects: No data available.

Section 12 – Ecological Information

General information: This product has not been evaluated for ecological toxicity or other environmental effects.

Section 13 – Disposal Consideration

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws. Dispose of waste at an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal. It is the responsibility of the product user or owner to determine at the time of disposal, which waste regulations must be applied.

Contaminated Packaging: Empty containers should be taken to an approved waste handling site for recycling or disposal.



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 14 – Transportation Information

DOT

Not regulated.

IMDG

Not regulated.

IATA

Not regulated.

Section 15 – Regulatory Information

US Federal Regulations

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

None present or none present in regulated quantities.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate (Acute) Health Hazards
Serious eye damage or eye irritation

SARA 313 (TRI Reporting)

| <u>Chemical Identity</u> | <u>Reporting threshold for other users</u> | <u>Reporting threshold for manufacturing and processing</u> |
|--------------------------|--|---|
| Zinc compound | 10000 lbs | 25000 lbs. |

US State Regulations

US. California Proposition 65

No ingredient regulated by CA Prop 65 present.



Product Name: RIDGID Extreme Performance Thread Cutting Oil (United States)

Section 16 – Other Information

Prepared by: Ridge Tool Company (Operating Standard 6-108)

Issue Date: May 1, 2018

Last Revision Date: March 30, 2017

RIDGE TOOL BELIEVES THE STATEMENTS, TECHNICAL INFORMATION AND RECOMMENDATIONS CONTAINED HEREIN ARE RELIABLE BUT THEY ARE GIVEN WITHOUT WARRANTY OR GUARANTEE OF ANY KIND, EXPRESSED OR IMPLIED, AND WE ASSUME NO RESPONSIBILITY FOR ANY LOSS, DAMAGE OR EXPENSE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THEIR USE.

FICHE SANTÉ/SÉCURITÉ

1 – Identification du produit et du fournisseur

Produit:

RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

Réf. catalogue:

74012, 74047, 76767

Emploi recommandé:

Filetage mécanique

Restrictions d'utilisation:

Usage industriel seulement

Fournisseur:

North America

Ridge Tool Company

400 Clark Street

Elyria, Ohio 44035-6001

1-800-519-3456

(Etats-Unis) (du lundi au vendredi de 8h
à 17h EST)

Téléphone d'urgence:

composer le 9-1-1 ou appeler les
services d'urgences appropriés

www.RIDGID.com

Date de publication: le 1 mai 2018

Révision K

Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)**2 – Identification des risques****Classe de Danger****Dangers pour la Santé**

Blessure ou Irritation Grave des Yeux Catégorie 2A

Éléments d'Étiquetage**Symbole de Danger:****Mention d'Avertissement:** Attention**Mention de Danger:** Provoque une sévère irritation des yeux.**Conseils de Prudence****Prévention:** Se laver soigneusement après manipulation. Porter des gants de protection/des vêtements de protection/un équipement de protection des yeux/du visage.**Intervention:** EN CAS DE CONTACT AVEC LES YEUX: Rincer avec précaution à l'eau pendant plusieurs minutes. Enlever les lentilles de contact si la victime en porte et si elles peuvent être facilement enlevées. Continuer à rincer. Si l'irritation oculaire persiste: consulter un médecin.**Autres dangers ne donnant pas lieu à classement selon le SGH:** Aucun(e).**Toxicité inconnue - Santé**

| | |
|--|--------|
| Toxicité aiguë, orale | 31.6 % |
| Toxicité aiguë, dérmale | 8 % |
| Toxicité aiguë, inhalation, vapeurs | 48.1 % |
| Toxicité aiguë, inhalation, poussières ou brouillard | 44.8 % |

Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

3 – Composition du produit et renseignements sur ses ingrédients

Informations générales: Ce produit ne contient pas de silicone ou d'additifs chlorés.

Composant(s) dangereux:

| Désignation chimique | N° CAS | Concentration |
|----------------------|--------------|---------------|
| Paraffin oils | Confidentiel | 20 - <50% |
| Mineral oil | Confidentiel | 20 - <50% |
| Zinc compound | Confidentiel | 5 - <10% |

Les identités chimiques spécifiques et/ou les pourcentages exacts ont été refusées comme les secrets commerciaux.

4 – Premiers soins

Ingestion: Rincer soigneusement la bouche. Appeler un CENTRE ANTIPOISON/un médecin en cas de malaise. NE PAS faire vomir.

Inhalation: Transporter à l'air frais. Appeler un CENTRE ANTIPOISON/un médecin en cas de malaise.

Contact avec la Peau: Enlever les vêtements et les chaussures contaminés. Laver les zones de contact à l'eau et au savon. En cas d'irritation cutanée: consulter un médecin.

Contact oculaire: Rincer immédiatement à grande eau pendant au moins 15 minutes. Enlever les lentilles de contact si cela est facile à faire. Consulter un médecin.

Symptômes/effets les plus importants, aigus et différés

Symptômes: Aucune information disponible.

Indication d'un besoin médical immédiat et traitement spécial requis

Traitement: Consulter un médecin en cas de symptômes.

5 – Lutte contre les incendies

Dangers d'Incendie Généraux: Aucun risque exceptionnel d'incendie et d'explosion.

Moyens d'extinction appropriés (et inappropriés)

Moyens d'extinction appropriés: Eau pulvérisée, brouillard, CO₂, agent chimique sec ou mousse standard. Choisir le moyen d'extinction de l'incendie en tenant compte d'autres produits chimiques éventuels.

Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

| | |
|---|--|
| Moyens d'extinction inappropriés: | Ne pas lutter contre l'incendie au jet d'eau pour ne pas propager les flammes. |
| Dangers spécifiques dus au produit chimique: | La chaleur peut provoquer l'explosion des récipients. En cas d'incendie, des gaz dangereux pour la santé peuvent se former. |
| Équipement de protection spécial et précautions pour les pompiers | |
| Procédures spéciales de lutte contre l'incendie: | Aucune information disponible. |
| Équipement de protection spécial pour le personnel préposé à la lutte contre le feu: | Les pompiers doivent porter un équipement de protection standard, notamment vêtement ignifuge, casque à masque facial, gants, bottes en caoutchouc et, dans les espaces clos, un appareil respiratoire autonome. |

6 – Lutte contre les déversements accidentels

| | |
|---|---|
| Précautions individuelles, équipement de protection et procédures d'urgence: | Voir l'équipement de protection individuelle à la Section 8. Ne pas toucher les récipients endommagés ou le produit déversé à moins de porter les vêtements de protection appropriés. Maintenir à distance le personnel non autorisé. Assurer une ventilation adéquate. |
| Méthodes et matériel de confinement et de nettoyage: | Absorber le déversement avec de la vermiculite ou toute autre matière inerte, puis placer dans un récipient à déchets chimiques. Établir une digue autour de grands déversements pour élimination ultérieure. |
| Précautions pour la Protection de l'Environnement: | Ne pas contaminer les sources d'eau ou les égouts. Endiguer la fuite ou le déversement si cela peut être fait sans danger. |

7 – Manipulation et stockage

| | |
|--|--|
| Précautions à prendre pour une manipulation sans danger: | Éviter le contact avec les yeux. Se laver les mains soigneusement après manipulation. Se conformer aux bonnes pratiques d'hygiène industrielle. Porter un équipement de protection personnelle approprié. N'exposez pas à la chaleur intense comme le produit peut développer et pressuriser le récipient. |
| Conditions d'un stockage sûr, y compris d'éventuelles incompatibilités: | Conserver dans le récipient d'origine hermétiquement fermé. Éviter tout contact avec des agents comburants. Conserver à l'écart des matières incompatibles. Durée de conservation: 720 jours |

Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

8 – Risques d'exposition et protection individuelle

Limites d'Exposition

| Désignation chimique | Type | Valeurs Limites d'Exposition | Source |
|-------------------------------------|------|------------------------------|---|
| Paraffin oils - Fraction inhalable. | TWA | 5 mg/m ³ | Les Etats-Unis. Valeurs de Limite de Seuil d'ACGIH (03 2014) |
| Paraffin oils - Brouillard | PEL | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (02 2006) |
| Paraffin oils - Brouillard | TWA | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (1989) |
| Mineral oil - Brouillard | PEL | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (01 2017) |
| Mineral oil - Brouillard | TWA | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (1989) |
| Mineral oil - Brouillard | PEL | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (02 2006) |

Mesures de protection:

L'accès facile à l'eau abondante et à un dispositif de rinçage oculaire devra être garanti. Assurer une bonne ventilation générale (généralement 10 renouvellements d'air à l'heure). Le taux de renouvellement d'air devrait être adapté aux conditions. Si c'est approprié, clôtures de processus d'utilisation, ventilation d'échappement locale, ou d'autres commandes de technologie pour maintenir les niveaux aéroportés au-dessous des limites recommandées d'exposition. Si des limites d'exposition n'ont pas été établies, maintenez les niveaux aéroportés à un niveau acceptable.

Protection respiratoire:

En cas de ventilation insuffisante, porter un appareil respiratoire approprié. Demander l'avis du superviseur sur les normes de protection respiratoire de la société.

Protection des Yeux:

Porter des lunettes de sécurité à écrans latéraux ou des lunettes étanches.

Protection de la peau et du corps:

Porter des vêtements de protection appropriés au risque d'exposition. Soyez conscient des autres dangers tels que les pièces en rotation. Contacter un professionnel de la santé et de la sécurité ou un fabricant pour obtenir des informations spécifiques.

Mesures d'hygiène:

Toujours adopter de bonnes pratiques d'hygiène personnelle, telles que lavage après manipulation de la substance et avant de manger, de boire ou de fumer. Laver régulièrement la tenue de travail pour éliminer les contaminants. Mettre au rebut les chaussures qui ne peuvent pas être lavées.

Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

9 – Caractéristiques physiques et chimiques

Aspect

| | |
|--|--|
| État: | Liquide |
| Forme: | Aucune information disponible. |
| Couleur: | Orange |
| Odeur: | Légère, Pétrole/solvant |
| Seuil de perception de l'odeur: | Aucune information disponible. |
| pH: | Aucune information disponible. |
| Point de fusion/point de congélation: | Aucune information disponible. |
| Température d'ébullition initiale et intervalle d'ébullition: | Aucune information disponible. |
| Point d'éclair: | 196.11 °C (385.00 °F) |
| Taux d'évaporation: | Aucune information disponible. |
| Inflammabilité (solide, gaz): | Aucune information disponible. |
| Limites supérieures/inférieures d'inflammabilité ou d'explosivité | |
| Limites d'inflammabilité - supérieure (%): | Aucune information disponible. |
| Limites d'inflammabilité - inférieure (%): | Aucune information disponible. |
| Limites d'explosivité - supérieure (%) : | Aucune information disponible. |
| Limites d'explosivité - inférieure (%): | Aucune information disponible. |
| Pression de vapeur: | Aucune information disponible. |
| Densité de vapeur: | Aucune information disponible. |
| Densité relative: | 0.88 |
| Solubilités | |
| Solubilité dans l'eau: | Insoluble |
| Solubilité (autre): | Aucune information disponible. |
| Coefficient de partition (n-octanol/eau): | Aucune information disponible. |
| Température d'auto-inflammation: | Aucune information disponible. |
| Température de décomposition: | Aucune information disponible. |
| Viscosité: | 38 mm ² /s (40 °C, Mesurée) |

AUTRES INFORMATIONS

| | |
|-------------|--|
| VOC: | 1.99 % (Method 24) 6.1 g/l (ASTM E 1868-10) |
|-------------|--|

10 – Stabilité et réactivité

| | |
|--|---|
| Réactivité: | Non réactif pendant l'utilisation normale. |
| Stabilité Chimique: | Ce produit est stable dans des conditions normales. |
| Possibilité de Réactions Dangereuses: | Aucun(e)(s) dans les conditions normales. |

Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

| | |
|---|--|
| Conditions à Éviter: | Éviter tout chauffage ou contamination. |
| Matières Incompatibles: | Aucune information disponible. |
| Produits de Décomposition Dangereux: | La décomposition thermique ou la combustion peut libérer des oxydes de carbone et d'autres gaz ou vapeurs toxiques. Contient un composant qui peut libérer substances inflammables, y compris triméthylpentène, par distillation dans les systèmes de récupération de solvant. Cela peut entraîner une accumulation dans le solvant du circuit |

11 – Données toxicologiques

Informations sur les voies d'exposition probables

| | |
|------------------------------|---|
| Ingestion: | Peut être ingéré par accident. L'ingestion peut provoquer irritation et malaises. Peut être nocif en cas d'ingestion. |
| Inhalation: | L'inhalation est la principale voie d'exposition. À concentration élevée, les vapeurs, émanations ou brouillards peuvent être irritants pour le nez, la gorge et les muqueuses. |
| Contact avec la Peau: | Le contact prolongé ou répété avec la peau peut provoquer un dessèchement, des gerçures ou une irritation. |
| Contact oculaire: | Provoque une sévère irritation des yeux. |

Symptômes liés aux caractéristiques physiques, chimiques et toxicologiques

| | |
|------------------------------|--------------------------------|
| Ingestion: | Aucune information disponible. |
| Inhalation: | Aucune information disponible. |
| Contact avec la Peau: | Aucune information disponible. |
| Contact oculaire: | Aucune information disponible. |

Informations sur les effets toxicologiques**Toxicité aiguë (répertoirer toutes les voies d'exposition possibles)**

| | |
|--|---|
| Ingestion Produit: | Non classé comme présentant une toxicité aiguë d'après les données disponibles. |
| Contact avec la peau Produit: | Non classé comme présentant une toxicité aiguë d'après les données disponibles. |
| Inhalation Produit: | Non classé comme présentant une toxicité aiguë d'après les données disponibles. |

Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

Toxicité à dose répétée

Produit: Aucune information disponible.

Corrosion ou Irritation de la Peau

Produit: Aucune information disponible.

Blessure ou Irritation Grave des Yeux

Produit: Aucune information disponible.

Sensibilisation Respiratoire ou Cutanée

Produit: Aucune information disponible.

Cancérogénicité

Produit: Aucune information disponible.

Monographies du CIRC sur l'évaluation des risques de cancérogénicité pour l'homme:

Aucun composant cancérigène identifié

États-Unis. Rapport du NTP (National Toxicology Program) sur les cancérogènes :

Aucun composant cancérigène identifié

ÉTATS-UNIS. Substances spécialement réglementées par l'OSHA (29 CFR 1910.1001-1050):

Aucun composant cancérigène identifié

Mutagénicité des Cellules Germinales

In vitro

Produit: Aucune information disponible.

In vivo

Produit: Aucune information disponible.

Toxicité pour la reproduction

Produit: Aucune information disponible.

Toxicité Spécifique au Niveau de l'Organe Cible- Exposition Unique

Produit: Aucune information disponible.

Toxicité Spécifique au Niveau de l'Organe Cible- Expositions répétées

Produit: Aucune information disponible.

Risque d'Aspiration

Produit: Aucune information disponible.

Autres effets:

Aucune information disponible.

Informations générales:

Informations générales:

Ce produit n'a pas été évalué pour la toxicité écologique ou d'autres effets de l'environnement.



Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

13 – Recyclage

Instructions pour l'élimination: Le rejet, le traitement et l'élimination peuvent être soumis à des lois nationales, régionales ou locales. Éliminer les déchets dans une installation de traitement et d'élimination des déchets appropriée conformément aux lois et aux réglementations en vigueur et en fonction des caractéristiques du produit au moment de l'élimination. C'est la responsabilité de l'utilisateur de produit ou du propriétaire pour déterminer au moment de la disposition, qui se perdent les règlements doivent être appliqués.

Emballages Contaminés: Les conteneurs vides doivent être acheminés vers un site agréé pour le traitement des déchets à des fins de recyclage ou d'élimination.

14 – Transport

Ministère des transports des États-Unis (Department of Transportation, DOT)
Non réglementé.

IMDG
Non réglementé.

IATA
Non réglementé.

15 – Réglementation

Réglementations Fédérales des Etats-Unis

ÉTATS-UNIS. Substances spécialement réglementées par l'OSHA (29 CFR 1910.1001-1050)
Aucun présent ou aucun présent dans des quantités réglementées.

Superfund Amendments and Reauthorization Act de 1986 (SARA)

Catégories de danger

Dangers immédiats (aigus) pour la santé
Lésions oculaires graves ou irritation oculaire

SARA 313 (Déclaration au TRI)

| <u>Identité Chimique</u> | <u>Seuil de déclaration pour les autres utilisateurs</u> | <u>Seuil de signalement pour la fabrication et la transformation</u> |
|--------------------------|--|--|
| Zinc compound | 10000 lbs | 25000 lbs. |

États-Unis - Réglementation des États

États-Unis - Proposition 65 de la Californie

Aucun composant réglementé par la Proposition 65 de la Californie n'est présent.

Produit: RIDGID Extreme Performance Thread Cutting Oil (Etats-Unis)

16 – Renseignements divers

Rédaction : Ridge Tool Company (OPSTD 6-108)

Date de publication : le 1 mai 2018

Dernière révision : le 30 mars 2017

Quoi que la société Ridge Tool estime que les affirmations, informations techniques et recommandations ci-présentes sont dignes de confiance, celles-ci ne sont données qu'à titre indicatif, sans aucune garantie expresse ou implicite, et ne sauraient engager la responsabilité civile de la société en cas de pertes, dommages et intérêts, voire frais directs ou indirects relevant de leur application.



HOJA DE DATOS DE SEGURIDAD

Sección 1 – Identificación del producto y la compañía

Nombre del producto:

RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

No. de catálogo:

30693

Uso recomendado:

Para cortar roscas

Restricciones de utilización:

Uso industria seulement

Nombre de la compañía:

North America

Ridge Tool Company

400 Clark Street

Elyria, Ohio 44035-6001, EE. UU.

Teléfono 1-800-519-3456 (EE. UU.) (8:00 a 17:00 hora estándar del este, lunes a viernes)

Teléfono de emergencia: Llame al 9-1-1 o al teléfono de emergencia local

www.RIDGID.com

Fecha de publicación: 1 de mayo de 2018

Révision: K

Sección 2 – Identificación de peligros

Clasificación de Peligro**Peligros para la Salud**

Lesiones Oculares Graves/Irritación Ocular Categoría 2A

Elementos de la Etiqueta**Símbolo de Peligro:**

Palabra de Advertencia: Atención

Indicación de Peligro: Provoca irritación ocular grave.

Consejos de Prudencia

Prevención: Lavarse concienzudamente tras la manipulación. Llevar guantes/prendas/gafas/máscara de protección.

Respuesta: EN CASO DE CONTACTO CON LOS OJOS: Enjuagar con agua cuidadosamente durante varios minutos. Quitar las lentes de contacto cuando estén presentes y pueda hacerse con facilidad. Proseguir con el lavado. Si persiste la irritación ocular: Consultar a un médico.

Otros peligros que no dan lugar a clasificación SGA: Ninguno.

Toxicidad desconocida - Salud

| | |
|---|--------|
| Toxicidad aguda, oral | 31.6 % |
| Toxicidad aguda, cutánea | 8 % |
| Toxicidad aguda, por inhalación de vapor | 48.1 % |
| Toxicidad aguda, por inhalación de polvo o niebla | 44.8 % |

Producto: RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

Sección 3 – Composición e información sobre ingredientes

Información general: Este producto no contiene silicona o aditivos clorados.

Componente(s) peligroso(s):

| Determinación química | No. CAS | Concentración |
|-----------------------|--------------|---------------|
| Paraffin oils | Confidencial | 20 - <50% |
| Mineral oil | Confidencial | 20 - <50% |
| Zinc compound | Confidencial | 5 - <10% |

Las identidades químicas específicas y/o los porcentajes exactos han sido retenidos como secretos de fabricación.

Sección 4 – Primeros auxilios

Ingestión: Enjuagar a fondo la boca. Llamar a un CENTRO DE TOXICOLOGÍA / médico si la persona se encuentra mal. NO provocar el vómito.

Inhalación: Trasladar al aire libre. Llamar a un CENTRO DE TOXICOLOGÍA / médico si la persona se encuentra mal.

Contacto con la Piel: Quitar ropa y zapatos contaminados. Lave las áreas de contacto con agua y jabón. En caso de irritación cutánea: Consultar a un médico.

Contacto con los ojos: Enjuagar inmediatamente los ojos con agua abundante durante por los menos 15 minutos. Si resulta fácil, quitar las lentes de contacto. Conseguir atención médica.

Los síntomas y efectos más importantes, tanto los agudos como los retardados

Síntomas: No hay datos disponibles.

Indicación de asistencia médica inmediata y tratamiento especial necesario

Tratamiento: Obtenga atención médica en caso de síntomas.

Sección 5 – Medidas contra incendios

Riesgos Generales de Incendio: Ningún riesgo excepcional de incendio o explosión señalado.

Medios de extinción adecuados (y no adecuados)

Medios de extinción apropiados: Agua pulverizada, neblina, CO₂, polvos químicos, o espuma normal. Seleccione el medio de extinción más apropiado, teniendo en cuenta la posible presencia de otros productos químicos.

Medios de extinción no apropiados: No utilice chorro de agua, pues extendería el fuego.



Producto: RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

Peligros específicos derivados de la sustancia química: El calor puede ocasionar explosión de los recipientes. En caso de incendio se pueden formar gases nocivos.

Equipo especial de protección y medias de precaución para los bomberos

Medidas especiales de lucha contra incendios: No hay datos disponibles.

Equipos de protección especial que debe llevar el personal de lucha contra incendios: Los bomberos deben utilizar un equipo de protección estándar incluyendo chaqueta ignífuga, casco con careta, guantes, botas de goma, y, en espacios cerrados, equipo de respiración autónomo (SCBA, según sus siglas en inglés).

Sección 6 – Medidas en caso de liberación accidental

Precauciones personales, equipo de protección y procedimientos de emergencia: Consulte la sección 8 de la FDS sobre equipo de protección personal. No toque los recipientes dañados o el material derramado a menos que esté usando ropa protectora adecuada. Mantener alejado al personal no autorizado. Asegúrese una ventilación apropiada.

Métodos y material de contención y de limpieza: Absorber los derrames con vermiculita u otro material inerte colocándolo luego en un contenedor para residuos químicos. Preparar diques delante de los derrames grandes para luego facilitar la eliminación.

Precauciones Relativas al Medio Ambiente: No contamine el drenaje o el alcantarillado. Impedir nuevos escapes o derrames de forma segura.

Sección 7 – Manipulación y almacenamiento

Precauciones para una manipulación segura: Evítese el contacto con los ojos. Lavarse las manos concienzudamente tras la manipulación. Respete las normas para una manipulación correcta de productos químicos. Use equipo protector personal adecuado. No exponga al calor intenso cuando el producto puede ampliar y presurizar el contenedor.

Condiciones de almacenamiento seguro, incluidas posibles incompatibilidades: Guárdese en el recipiente original bien cerrado. Evite el contacto con agentes reductores. Consérvese alejado de materiales incompatibles. Vida útil: 720 días

Producto: RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

Sección 8 – Controles contra la exposición: protección personal

Valores Límite

| Determinación química | Tipo | Valores Límite de Exposición | Fuente |
|------------------------------------|------|------------------------------|---|
| Paraffin oils - Fracción inhalable | TWA | 5 mg/m ³ | EE.UU. ACGIH Valores umbrales límite (03 2014) |
| Paraffin oils - Niebla | PEL | 5 mg/m ³ | NOS. OSHA la tabla Z-1 límites para contaminantes del aire (29 CFR 1910.1000) (02 2006) |
| Paraffin oils - Niebla | TWA | 5 mg/m ³ | NOS. OSHA la Tabla Z-1-A (29 CFR 1910.1000) (1989) |
| Mineral oil - Niebla | PEL | 5 mg/m ³ | NOS. OSHA la tabla Z-1 límites para contaminantes del aire (29 CFR 1910.1000) (01 2017) |
| Mineral oil - Niebla | TWA | 5 mg/m ³ | NOS. OSHA la Tabla Z-1-A (29 CFR 1910.1000) (1989) |
| Mineral oil - Niebla | PEL | 5 mg/m ³ | NOS. OSHA la tabla Z-1 límites para contaminantes del aire (29 CFR 1910.1000) (02 2006) |

- Medidas de protección:** Tiene que haber acceso fácil a abundante agua y a botella para enjuagar los ojos. Debe haber una ventilación general adecuada (típicamente 10 renovaciones del aire por hora). La frecuencia de la renovación del aire debe corresponder a las condiciones. De ser posible, use campanas extractoras, ventilación aspirada local u otras medidas técnicas para mantener los niveles de exposición por debajo de los límites de exposición recomendados. Si no se han establecido ningunos límites de exposición, el nivel de contaminantes suspendidos en el aire ha de mantenerse a un nivel aceptable.
- Protección respiratoria:** En caso de ventilación insuficiente, utilice un equipo respiratorio adecuado. Consulte al supervisor sobre la norma de la compañía de protección respiratoria.
- Protección de los Ojos:** Use gafas de seguridad con protectores laterales (o gafas estancas).
- Protección de la Piel y del Cuerpo:** Use ropa protectora apropiada para el riesgo de exposición. Tenga en cuenta otros peligros, como las piezas giratorias. Comuníquese con el profesional o fabricante de salud y seguridad para obtener información específica.
- Medidas de higiene:** Seguir siempre buenas medidas de higiene personal, como lavarse después de manipular el material y antes de comer, beber y/o fumar. Lave rutinariamente la ropa de trabajo para eliminar los contaminantes. Deseche el calzado contaminado que no se pueda limpiar.

Sección 9 – Propiedades físicas y químicas

Aspecto

| | |
|----------------------|---------------------------|
| Forma/estado: | Líquido |
| Forma/Figura: | No hay datos disponibles. |
| Color: | Ámbar |

Producto: RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

| | |
|--|--|
| Olor: | Ligero, petróleo/solvente |
| Umbral de olor: | No hay datos disponibles. |
| pH: | No hay datos disponibles. |
| Punto de fusión / Punto de congelación: | No hay datos disponibles. |
| Punto inicial de ebullición e intervalo de ebullición: | No hay datos disponibles. |
| Punto de inflamación: | 196.11 °C (385.00 °F) |
| Tasa de evaporación: | No hay datos disponibles. |
| Inflamabilidad (sólido, gas): | No hay datos disponibles. |
| Límites superior/inferior de inflamabilidad o de explosividad | |
| Límite superior de inflamabilidad (LSI) (%): | No hay datos disponibles. |
| Límite inferior de inflamabilidad (LII) (%): | No hay datos disponibles. |
| Límite superior de explosividad (%): | No hay datos disponibles. |
| Límite inferior de explosividad (%): | No hay datos disponibles. |
| Presión de vapor: | No hay datos disponibles. |
| Densidad del vapor: | No hay datos disponibles. |
| Densidad relativa: | 0.88 |
| Solubilidad(es) | |
| Solubilidad en agua: | Insoluble |
| Solubilidad (otra): | No hay datos disponibles. |
| Coefficiente de reparto (n-octanol/agua): | No hay datos disponibles. |
| Temperatura de autoignición: | No hay datos disponibles. |
| Temperatura de descomposición: | No hay datos disponibles. |
| Viscosidad: | 38 mm ² /s (40 °C, medido) |
| OTRA INFORMACIÓN | |
| VOC: | 1.99 % (Method 24) 6.1 g/l (ASTM E 1868-10) |

Sección 10 – Estabilidad y reactividad

| | |
|--|--|
| Reactividad: | No reactivo durante uso normal. |
| Estabilidad Química: | El material es estable bajo condiciones normales. |
| Posibilidad de Reacciones Peligrosas: | Ningunos en circunstancias normales. |
| Condiciones que Deben Evitarse: | Evite el calor o la contaminación. |
| Materiales Incompatibles: | No hay datos disponibles. |
| Productos de Descomposición Peligrosos: | La descomposición térmica o la combustión pueden liberar óxido de carbono u otros gases o vapores tóxicos. Contiene un componente que puede liberar sustancias inflamables, incluyendo trimetilpenteno, por destilación en sistemas con recuperación de disolvente. Esto puede conducir a la acumulación en el circuito de disolvente. |



Producto: RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

Sección 11 – Información toxicológica

Información sobre posibles vías de exposición

- Ingestión:** Puede ingerirse accidentalmente. La ingestión puede causar irritación y malestar. Puede ser nocivo en caso de ingestión.
- Inhalación:** La inhalación es la principal vía de exposición. En concentraciones altas, los vapores, humos o neblinas pueden irritar la nariz, la garganta y las membranas mucosas.
- Contacto con la Piel:** El contacto prolongado o repetido con la piel puede causar sequedad, formación de grietas o irritación.
- Contacto con los ojos:** Provoca irritación ocular grave.

Síntomas relacionados a las características físicas, químicas y toxicológicas

- Ingestión:** No hay datos disponibles.
- Inhalación:** No hay datos disponibles.
- Contacto con la Piel:** No hay datos disponibles.
- Contacto con los ojos:** No hay datos disponibles.

Información sobre los efectos toxicológicos

Toxicidad aguda (listar todas las vías de exposición posibles)

Ingestión

Producto: No clasificado en cuanto a toxicidad aguda con los datos disponibles.

Contacto dermal

Producto: No clasificado en cuanto a toxicidad aguda con los datos disponibles.

Inhalación

Producto: No clasificado en cuanto a toxicidad aguda con los datos disponibles.

Toxicidad por dosis repetidas

Producto: No hay datos disponibles.

Corrosión/Irritación Cutáneas

Producto: No hay datos disponibles.

Lesiones Oculares Graves/Irritación Ocular

Producto: No hay datos disponibles.

Sensibilización de la Piel o Respiratoria

Producto: No hay datos disponibles.

Carcinogenicidad

Producto: No hay datos disponibles.



Producto: RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

Monografías de IARC sobre la evaluación de los riesgos carcinogénicos para los humanos:
No se identificaron componentes carcinogénicos

Programa Nacional de Toxicología de EUA (NTP). Reporte sobre carcinógenos:
No se identificaron componentes carcinogénicos

EEUU. OSHA Sustancias específicamente reguladas (29 CFR 1910.1001-1050):
No se identificaron componentes carcinogénicos

Mutagenicidad en Células Germinales

En vitro
Producto: No hay datos disponibles.

En vivo
Producto: No hay datos disponibles.

Toxicidad para la reproducción
Producto: No hay datos disponibles.

Toxicidad Sistémica Específica de Órganos Diana- Exposición Única
Producto: No hay datos disponibles.

Toxicidad Sistémica Específica de Órganos Diana- Exposiciones Repetidas
Producto: No hay datos disponibles.

Peligro por Aspiración
Producto: No hay datos disponibles.

Otros síntomas: No hay datos disponibles.

Sección 12 –Información ecológica

Información general: Este producto no ha sido evaluado para la toxicidad ecológica u otros efectos ambientales.

**Sección 13 – Consideraciones
relativas a la eliminación**

Instrucciones para la eliminación: Las actividades de descarga, tratamiento o eliminación pueden estar sujetos a leyes nacionales, estatales o locales. Elimine el residuo en una instalación adecuada de tratamiento y eliminación de acuerdo con las leyes y reglamentos correspondientes y características del producto en el momento de la eliminación. Es responsabilidad del usuario del producto o propietario para determinar en el momento de la disposición, que las regulaciones de residuos debe ser aplicado.

Envases Contaminados: Los contenedores vacíos deben ser llevados a un sitio de manejo aprobado para desechos, para el reciclado o eliminación.



Producto: RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

Sección 14 – Información de transporte

DOT

No reglamentado.

IMDG

No reglamentado.

IATA

No reglamentado.

Sección 15 – Información sobre reglamentos

Reglamentos Federales de EE.UU.

EEUU. OSHA Sustancias específicamente reguladas (29 CFR 1910.1001-1050)

No están presentes, o no están presentes en las cantidades reguladas.

Ley de Enmiendas y Reautorización del Superfondo de 1986 (SARA)

Categorías de peligro

Peligros inmediatos (agudos) para la salud

Lesiones o irritaciones oculares graves

SARA 313 (Reporte TRI, Acerca del Inventario de Liberación de Sustancias Tóxicas)

| <u>Identidad Química</u> | <u>Umbral de declaración para otros usuarios</u> | <u>Umbral de declaración para fabricación y procesamiento</u> |
|--------------------------|--|---|
| Zinc compound | 10000 lbs | 25000 lbs. |

Regulaciones de un Estado de EUA

Proposición 65 del Estado de California, EUA

No hay presencia de ningún ingrediente regulado por CA Prop 65.



Producto: RIDGID Extreme Performance Thread Cutting Oil (Estados Unidos)

Sección 16 – Información adicional

Preparado por: Ridge Tool Company (OPSTD 6-108)

Fecha de emisión: 1 de mayo de 2018

Fecha de la última revisión: 30 de marzo de 2017

RIDGE TOOL CONSIDERA QUE TODAS LAS DECLARACIONES, INFORMACIÓN TÉCNICA Y RECOMENDACIONES EN EL PRESENTE DOCUMENTO SON CONFIABLES, PERO SE PRESENTAN SIN GARANTÍA ALGUNA, SEA EXPRESA O IMPLÍCITA, Y NO ASUMIMOS RESPONSABILIDAD ALGUNA POR PÉRDIDAS, DAÑOS O GASTOS, DIRECTOS O CONSECUENTES, QUE SURJAN DE SU USO.



SAFETY DATA SHEET

1. Identification

Product identifier **HERCULES Wet Set PVC Aqua Blue, Medium Body, Fast Set**

Other means of identification

Product code 94

Synonyms Part Numbers: 60253, 60255, 60260, 60265

Recommended use Joining PVC Pipes

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Company Name HCC Holdings, Inc. an Oatey Affiliate

Address 4700 West 160th Street
Cleveland, OH 44135

Telephone 216-267-7100

E-mail info@oatey.com

Transport Emergency Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887)

Emergency First Aid 1-877-740-5015

Contact person MSDS Coordinator

2. Hazard(s) identification

Physical hazards Flammable liquids Category 2

Health hazards Acute toxicity, oral Category 4

 Skin corrosion/irritation Category 2

 Serious eye damage/eye irritation Category 2A

 Specific target organ toxicity, single exposure Category 3 respiratory tract irritation

 Specific target organ toxicity, single exposure Category 3 narcotic effects

 Aspiration hazard Category 1

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness.

Precautionary statement

Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection.

Response If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish.

| | |
|--|--|
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|--------------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 40-70 |
| Polyvinyl chloride | 9002-86-2 | 10-20 |
| Acetone | 67-64-1 | 5-15 |
| Cyclohexanone | 108-94-1 | 5-15 |
| Methyl ethyl ketone | 78-93-3 | 5-15 |
| Silica, amorphous, fumed | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|------------------------|----------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m ³ | |
| | | 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m ³ | |
| | | 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m ³ | |
| | | 200 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m ³ | |
| | | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 5 mg/m ³ | Respirable fraction. |
| | | 15 mg/m ³ | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|---|------|-----------------------|
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 0.8 mg/m ³ |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------------------|----------------------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm | |
| | TWA | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m ³ | Respirable fraction. |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---|------|-----------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m ³ |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m ³ |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m ³ |
| | | 250 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 590 mg/m ³ |
| | | 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 885 mg/m ³ |
| | | 300 ppm |
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 590 mg/m ³ |
| | | 200 ppm |
| | | 6 mg/m ³ |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Face shield is recommended. Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state

Liquid.

Form

Translucent liquid.

Color

Clear.

Odor

Solvent.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

Not available.

Initial boiling point and boiling range

151 °F (66.11 °C)

Flash point

14.0 - 23.0 °F (-10.0 - -5.0 °C)

Evaporation rate

5.5 - 8

Flammability (solid, gas)

Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)

1.8

Flammability limit - upper (%)

11.8

Explosive limit - lower (%)

Not available.

Explosive limit - upper (%)

Not available.

Vapor pressure

145 mm Hg @ 20 C

Vapor density

2.5

Relative density

0.92 +/- 0.02

| | |
|--|-----------------------------|
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 1200 - 2500 cP |
| Viscosity temperature | 77 °F (25 °C) |
| Other information | |
| Bulk density | 7.7 lb/gal |
| VOC (Weight %) | < 510 g/l SQACMD 1168/M316A |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia. |

| | |
|---|--|
| Symptoms related to the physical, chemical and toxicological characteristics | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. |
|---|--|

Information on toxicological effects

| | |
|-----------------------|---|
| Acute toxicity | May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation. |
|-----------------------|---|

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |

| Components | Species | Test Results |
|--------------|---------|--------------|
| Oral LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

| | |
|--|---|
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| Polyvinyl chloride (CAS 9002-86-2) | 3 Not classifiable as to carcinogenicity to humans. |
| Silica, amorphous, fumed (CAS 112945-52-5) | 3 Not classifiable as to carcinogenicity to humans. |

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
|------------------------------------|--------|

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|---|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

| | |
|--|--|
| Disposal instructions | Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T11, TP1, TP8, TP27 |
| Packaging exceptions | 150 |
| Packaging non bulk | 201 |
| Packaging bulk | 243 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | ADHESIVES |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

| | |
|-------------------------------|---|
| US federal regulations | This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200. All components are on the U.S. EPA TSCA Inventory List. |
|-------------------------------|---|

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|------------------------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
| | Central nervous system |
| | Liver |
| | Blood |
| | Flammability |

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|------------------------|
| Hazard categories | Immediate Hazard - Yes |
| | Delayed Hazard - No |
| | Fire Hazard - Yes |
| | Pressure Hazard - No |
| | Reactivity Hazard - No |

SARA 302 Extremely hazardous substance

Not listed.

| | |
|--|----|
| SARA 311/312 Hazardous chemical | No |
|--|----|

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

| | |
|---------------------------------------|----------------|
| Safe Drinking Water Act (SDWA) | Not regulated. |
|---------------------------------------|----------------|

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations**US. Massachusetts RTK - Substance List**

Acetone (CAS 67-64-1)
 Cyclohexanone (CAS 108-94-1)
 Furan, Tetrahydro- (CAS 109-99-9)
 Methyl ethyl ketone (CAS 78-93-3)
 Silica, amorphous, fumed (CAS 112945-52-5)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)
 Cyclohexanone (CAS 108-94-1)
 Furan, Tetrahydro- (CAS 109-99-9)
 Methyl ethyl ketone (CAS 78-93-3)
 Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)
 Cyclohexanone (CAS 108-94-1)
 Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)
Silica, amorphous, fumed (CAS 112945-52-5)

US. Rhode Island RTK

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | No |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 27-May-2015
Revision date -
Version # 01
HMIS® ratings Health: 2
Flammability: 3
Physical hazard: 0

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. HCC Holdings Inc. an Oatey Affiliate cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.



COP-GRAF™

Copper and Graphite Based Anti-Seize Compound

Safety Data Sheet

SECTION 1-PRODUCT AND COMPANY IDENTIFICATION

Manufacturer: Anti-Seize Technology
2345 N. 17th Ave.
Franklin Park, IL 60131
Phone: 847-455-2300
Toll Free: 800 991-1106
Web: antiseize.com

Information Phone Number:

Emergency Phone Number: Infotrac 24/7 Phone: 1-800-535-5053 (US & Canada)
or 352-323-3500 (International)

Product Use: Anti-Seize Compound

Restriction on Use: None known

SDS Date of Preparation: August 16, 2017

SECTION 2: HAZARDS IDENTIFICATION

GHS Classification (Hazcom 2012):

Not Hazardous

Label Elements:

Not hazardous in accordance with the OSHA Hazard Communication Standard (29CFR 1910.1200).

Hazard Phrases:

None

Precautionary Phrases:

None

Other Hazards: None

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS# | % |
|---|------------|-------|
| Distillates (petroleum), hydrotreated heavy naphthenic | 64742-52-5 | 20-40 |
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | 64742-65-0 | 20-40 |
| Copper | 7440-50-8 | 20-35 |
| Graphite | 7782-42-5 | 10-20 |

The specific identity and/or exact percentage of composition has been withheld as a trade secret.

SECTION 4: FIRST AID MEASURES

Eye: Flush eyes with water, holding the eyelids apart. Get medical attention if irritation develops or persists.

Skin: Wash thoroughly with plenty of water. Get medical attention if irritation persists.

Inhalation: Remove to fresh air and keep comfortable for breathing. If irritation occurs, get medical attention.

Ingestion: If large amounts ingested, seek medical attention.

Most Important symptoms and effects, both acute and delayed: None known.

Indication of any immediate medical attention and special treatment needed: Immediate medical attention generally not required.

SECTION 5: FIRE-FIGHTING MEASURES

Suitable and Unsuitable Extinguishing Media: Use water spray or fog, foam, carbon dioxide or dry chemical.

Special Hazards Arising from the Chemical: This compound will not burn unless it is pre-heated. Water fog may be used to cool the containers but do not spray directly into large containers of burning liquids as frothing may occur. Dense smoke and noxious or toxic fumes may be generated in a fire. Thermal decomposition may yield oxides of carbon.

Special Equipment and Precautions for Fire-Fighters: Wear NIOSH approved positive pressure, self-contained breathing apparatus and full protective clothing. Cool fire exposed containers with water.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures: Wear appropriate personal protective equipment. Use caution: slip hazard.

Environmental Hazards: Report spills and releases as required to appropriate authorities.

Methods and Material for Containment and Cleaning Up: Collect spill with an inert absorbent material and place into a suitable container for disposal. Clean area thoroughly.

SECTION 7: HANDLING AND STORAGE

Precautions for Safe Handling: Avoid contact with eyes. Avoid prolonged skin contact Do not transfer to unlabeled containers.

Conditions for Safe Storage, Including any Incompatibilities: Store away from extreme heat and open flames. Store away from oxidizers.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

| Chemical Name | Exposure Limits |
|---|--|
| Distillates (petroleum), hydrotreated heavy naphthenic | 5 mg/m ³ TWA ACGIH TLV (inhalable) 5 mg/m ³ TWA OSHA PEL |
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | 5 mg/m ³ TWA ACGIH TLV (inhalable) 5 mg/m ³ TWA OSHA PEL |
| Copper | 1 mg/m ³ TWA ACGIH TLV 1 mg/m ³ TWA OSHA PEL |
| Graphite | 2 mg/m ³ TWA ACGIH TLV (respirable) 15 mg/m ³ TWA OSHA PEL (total dust) 5 mg/m ³ TWA OSHA PEL (respirable fraction) |

Appropriate Engineering Controls: Use with adequate general or local exhaust ventilation to maintain exposure levels below the exposure limits. If the product is used at high temperatures, local exhaust ventilation may be required.

Individual Protection Measures:

Respiratory Protection: In operations where the occupational exposure limits are exceeded or if use at elevated temperature where smoke is produced, a NIOSH approved respirator with organic vapor/particulate cartridges or supplied air respirator appropriate for the form and concentration of the contaminants should be used. Selection and use of respiratory equipment must be in accordance with OSHA 1910.134 and good industrial hygiene practice.

Skin Protection: Impervious gloves such as rubber or nitrile recommended where needed to avoid prolonged skin contact.

Eye Protection: Safety glasses or goggles recommended where needed to avoid eye contact.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

| | |
|--|---|
| Appearance: Copper colored paste | Vapor Density (air = 1): Not available |
| Odor: Mild petroleum odor | Specific Gravity: 1.2 |
| Odor Threshold: Not established | Water Solubility: Not soluble |
| pH: Not available | Octanol/Water Partition Coefficient: Not available |
| Melting Point/Freezing Point: Not available | Autoignition Temperature: Not available |
| Boiling Point: Not available | Decomposition Temperature: Not available |
| Flash Point: >350°F | Viscosity: Not available |
| Evaporation Rate: Not available | Explosion Properties: None |
| Flammable Limits: LEL: Not established UEL: Not established | Oxidizing Properties: Not oxidizing |
| Vapor Pressure: Not established | Aerosol Fire Protection Level: Not applicable |
| VOC Content: <0.2% | Flammability (solid, gas): Not available |

SECTION 10: STABILITY AND REACTIVITY

Reactivity: Not reactive under normal conditions of use.

Chemical Stability: Stable under normal storage and handling conditions.

Possibility of Hazardous Reactions: None known

Conditions to Avoid: Use with strong oxidizing chemicals such as concentrated acids.

Incompatible Materials: Avoid strong oxidizing agents and acids.

Hazardous Decomposition Products: Thermal decomposition products may yield oxides of carbon.

SECTION 11: TOXICOLOGICAL INFORMATION

Potential Health Effects:

Eye: May cause mild irritation.

Skin: Prolonged contact may cause irritation and drying of the skin.

Inhalation: No adverse effects expected at ambient temperatures. Inhalation of vapors and fumes from thermal decomposition may cause respiratory irritation and metal fume fever with symptoms of fever and chills.

Ingestion: Swallowing may cause gastrointestinal irritation, nausea, vomiting, diarrhea.

Chronic Hazards: Prolonged inhalation of thermal decomposition products may result in lung damage.

Carcinogen Status: None of the components of this product are listed as carcinogens by IARC, NTP or OSHA.

Acute Toxicity Values:

Distillates (petroleum), hydrotreated heavy naphthenic: Oral rat LD50 > 5000 mg/kg, inhalation rat LC50: 2.18 mg/L, dermal rabbit LD50 > 2000 mg/kg

Distillates (petroleum), solvent-dewaxed heavy paraffinic: Oral rat LD50 > 5000 mg/kg, inhalation rat LC50: 2.18 mg/L, dermal rabbit LD50 > 2000 mg/kg

Copper: Oral rat LD50 > 2500 mg/kg, inhalation rat LC50 > 5.11 mg/L, dermal rat LD50 > 2000 mg/kg

Graphite: Oral rat LD50 > 2000 mg/kg, inhalation rat LC50 > 2 mg/L

SECTION 12: ECOLOGICAL INFORMATION

Ecotoxicity:

Distillates (petroleum), hydrotreated heavy naphthenic: Pimephales promelas LL50 > 100 mg/L/96hr.

Distillates (petroleum), solvent-dewaxed heavy paraffinic: Pimephales promelas LL50 > 100 mg/L

Copper: Salmo gairdneri LC50: 190 ug/L/96hr. Copper is classified as toxic to aquatic organisms.

Graphite: Danio rerio LC50 > 100 mg/L/96hr

Persistence and Degradability: No data available

Bioaccumulative Potential: No data available

Mobility in Soil: No data available

Other Adverse Effects: None known

SECTION 13: DISPOSAL CONSIDERATIONS

Dispose in accordance with all local, regional and national regulations.

SECTION 14: TRANSPORT INFORMATION

DOT Proper Shipping Name: Not regulated

DOT Technical Name: None

DOT Hazard Class: None

UN Number: None

DOT Labels Required (49CFR172.101): None

IMDG Shipping Description: Not regulated

ID Number: None

Hazard Class: None

Packing Group: None

Labels Required: None

Marking Required: None

Placards Required: None

ICAO/IATA

ID Number: None

Hazard Class: None

Packing Group: None

Labels Required: None

SECTION 15: REGULATORY INFORMATION

Safety, health, and environmental regulations specific for the product in question.

CERCLA Hazardous Substances (Section 103)/RQ: This product has a Reportable Quantity (RQ) of 14,285 lbs. (based on the RQ for Copper of 5,000 lbs present at 20-35%). Releases above the RQ must be reported to the National Response Center. Many states have more stringent release reporting requirements. Report spills required under federal, state and local regulations.

SARA Hazard Category (311/312): Not Hazardous

SARA 313: This product contains the following chemicals regulated under SARA Title III, section 313: Copper, 20-30%

EPA TSCA Inventory: All of the components of this product are listed on the TSCA inventory.

CALIFORNIA PROPOSITION 65: This product is not known to contain listed chemicals.

| |
|--------------------------------------|
| SECTION 16: OTHER INFORMATION |
|--------------------------------------|

Revision Summary: New format to comply with OSHA Hazcom 2012

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.




SAFETY DATA SHEET

1. Identification

| | |
|---|--|
| Product identifier | HERCULES CLEAR, PURPLE, AND UNPURPLE PRIMER |
| Other means of identification | |
| SDS number | 7402E |
| Synonyms | Part Numbers: Clear - 60453, 60458, 60460, 60465, 60470, Purple - 60403, 60413, 60415, 60420, 60425 Un-Purple - 60445, 60447 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | HCC Holdings, Inc. an Oatey Affiliate |
| Address | 4700 West 160th Street Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |
| Label elements |  | |

| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC) Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen.

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------|------------|-------|
| Acetone | 67-64-1 | 30-60 |
| Cyclohexanone | 108-94-1 | 15-40 |
| Furan, Tetrahydro- | 109-99-9 | 10-30 |
| Methyl ethyl ketone | 78-93-3 | 10-30 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

Skin contact Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Ingestion Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis.

Most important symptoms/effects, acute and delayed Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain.

Indication of immediate medical attention and special treatment needed Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Unsuitable extinguishing media Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Specific methods Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 50 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 200 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 50 ppm |
| | STEL | 300 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------------------|------|-----------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | | 250 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 590 mg/m3 |
| | | 200 ppm |
| | STEL | 885 mg/m3 |
| | TWA | 300 ppm |
| | | 590 mg/m3 |
| | | 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Face shield is recommended. Wear safety glasses with side shields (or goggles).

| | |
|---------------------------------------|---|
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

| | |
|---|----------------------------------|
| Appearance | Translucent. |
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Clear. or Purple |
| Odor | Solvent. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 151 °F (66.11 °C) |
| Flash point | 14.0 - 23.0 °F (-10.0 - -5.0 °C) |
| Evaporation rate | 5.5 - 8 |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.82 - 0.86 |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | < 100 cP |
| Other information | |
| Bulk density | 7 lb/gal |
| VOC (Weight %) | < 550 g/l SQACMD Method 304 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |

Hazardous decomposition products No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

Cyclohexanone (CAS 108-94-1) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

| | |
|---|---|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|-----------------------------------|--|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquids, n.o.s. (Methyl ethyl ketone RQ = 25063 LBS, Acetone RQ = 12522 LBS) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions IB2, T7, TP1, TP8, TP28
Packaging exceptions 150
Packaging non bulk 202
Packaging bulk 242

IATA

UN number UN1993
UN proper shipping name Flammable liquid, n.o.s. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3H
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1993
UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards
Marine pollutant No.
EmS F-E, S-E
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

Methyl ethyl ketone (CAS 78-93-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|-------------------------------|
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 17-December-2014

Revision date -

Version # 01

HMIS® ratings Health: 2
Flammability: 3
Physical hazard: 0

Disclaimer The information in the sheet was written based on the best knowledge and experience currently available. HCC Holdings Inc. an Oatey Affiliate cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.

Safety Data Sheet

Printing date 01/06/2021

Revised On 01/06/2021

1 Identification of the substance and manufacturer

Trade name: ALERT ORANGE
Product code: 0000200670
Recommended use: Paint and coatings application.
Uses advised against: Any that differs from the recommended use.
Manufacturer/Supplier: Seymour of Sycamore
 917 Crosby Avenue
 Sycamore, IL 60178 USA
 phone: 815-895-9101
 www.seymourpaint.com

Emergency telephone number: 1-800-255-3924

Seymour of Sycamore
 3041 Dougall Avenue, Suite 503
 Windsor, ONT N9E 1S3 CANADA
 phone: 800-435-4482
 www.seymourpaint.com

2 Hazard(s) identification**Classification of the substance or mixture**

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 STOT SE 3 H335 May cause respiratory irritation.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

**Additional information:
GHS Hazard pictograms**

GHS02 GHS04 GHS07 GHS08

**Signal word
Hazard statements**

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 May cause respiratory irritation.

Precautionary statements

May cause damage to organs through prolonged or repeated exposure.
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not spray on an open flame or other ignition source.
 Pressurized container: Do not pierce or burn, even after use.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 Use only outdoors or in a well-ventilated area.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 Call a poison center/doctor if you feel unwell.
 Store in a well-ventilated place.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients**Chemical characterization: Mixtures**

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|-------------------|----------|
| 74-98-6 | propane | 15-25% |
| 64742-89-8 | VM&P Naphtha | 15-25% |
| 1317-65-3 | Calcium Carbonate | ≥15-<20% |
| 106-97-8 | n-butane | 10-15% |
| 64742-47-8 | Mineral Spirits | 1-5% |

4 First-aid measures

After inhalation: Supply fresh air; consult doctor in case of complaints.
After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water. Then consult a doctor.
After swallowing: Rinse mouth with water. Do not induce vomiting.
Most important symptoms and effects: Dizziness
Indication of any immediate medical attention needed: No further relevant information available.

5 Fire-fighting measures

Extinguishing agents: CO₂, extinguishing powder or water spray. Fight larger fires with water spray.
Special hazards: Can form explosive gas-air mixtures.
Protective equipment for firefighters: A respiratory protective device may be necessary.

(Contd. on page 2)

Safety Data Sheet

Printing date 01/06/2021

Revised On 01/06/2021

Trade name: ALERT ORANGE

(Contd. of page 1)

6 Accidental release measures**Personal precautions, protective equipment and emergency procedures:**

Use respiratory protective device against the effects of fumes/dust/aerosol.

Methods and material for containment and cleaning up:

Absorb liquid components with liquid-binding material.

7 Handling and storage**Precautions for safe handling**

Use only in well ventilated areas.

Storage requirements:

Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up.

8 Exposure controls/personal protection**Components with limit values that require monitoring at the workplace:****74-98-6 propane**PEL (USA) Long-term value: 1800 mg/m³, 1000 ppmREL (USA) Long-term value: 1800 mg/m³, 1000 ppm

TLV (USA) refer to Appendix F in TLVs&BEIs book; D, EX

106-97-8 n-butaneREL (USA) Long-term value: 1900 mg/m³, 800 ppmTLV (USA) Short-term value: 2370 mg/m³, 1000 ppm (EX)**Hygienic protection:**

Wash hands after use.

Do not eat or drink while working.

Breathing equipment:

A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene.

Hand protection:

Nitrile gloves.

The glove material must be impermeable and resistant to the substance.

Eye protection:

Tightly sealed goggles

9 Physical and chemical properties**Appearance:**

Aerosol.

Odor:

Aromatic

Odor threshold:

Not determined.

pH-value:

Not determined.

Melting point/Melting range

Undetermined.

Boiling point:

-44 °C (-47.2 °F)

Flash point:

-19 °C (-2.2 °F)

Flammability (solid, gas):

Extremely flammable.

Decomposition temperature:

Not determined.

Auto igniting:

Product is not self-igniting.

Danger of explosion:

In use, may form flammable/explosive vapour-air mixture.

Lower Explosion Limit:

1.7 Vol %

Upper Explosion Limit:

10.9 Vol %

Vapor pressure:

Not determined.

Relative Density:

Between 0.77 and 0.85 (Water equals 1.00)

Vapor density

Not determined.

Evaporation rate

Not applicable.

Partition coefficient: n-octanol/water:

Not determined.

Solubility:

Not determined.

Viscosity:

Not determined.

Water:

24.3 %

10 Stability and reactivity**Reactivity:**

Stable at normal temperatures.

Conditions to avoid:

Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures.

Chemical stability:

Not fully evaluated.

Possibility of hazardous reactions:

No dangerous reactions known.

Incompatible materials:

No further relevant information available.

Hazardous decomposition:

No dangerous decomposition products known.

(Contd. on page 3)

Safety Data Sheet

Printing date 01/06/2021

Revised On 01/06/2021

Trade name: ALERT ORANGE

(Contd. of page 2)

11 Toxicological information

Information on toxicological effects: No data available.
Skin effects: No irritant effect.
Eye effects: No irritating effect.
Sensitization: No sensitizing effects known.

12 Ecological information

Aquatic toxicity: Hazardous for water, do not empty into drains.
Persistence and degradability: The product is degradable after prolonged exposure to natural weathering processes.
Other information: This product does not contain any chlorofluorocarbons (CFC's), hydrochlorofluorocarbons (HCFC's), perfluorocarbons (PFC's), heavy metals (chromium, lead, cadmium), or chlorinated solvents.
Bioaccumulative potential: No further relevant information available.
Mobility in soil: No further relevant information available.
Other adverse effects: No further relevant information available.

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.
Recommendation: Completely empty cans should be recycled.
Recommended cleansing agent: Water, if necessary with cleansing agents.

14 Transport information

UN-Number: UN1950
DOT: UN1950
DOT: Aerosols, flammable
ADR: 1950 Aerosols
Transport hazard class(es):
Class: 2.1
Special precautions for user: Warning: Gases
EMS Number: F-D,S-U
Packaging Group: --
UN "Model Regulation": UN 1950 AEROSOLS, 2.1

15 Regulatory information**SARA Section 355 (extremely hazardous substances):**

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

None of the ingredients is listed.

Toxic Substances Control Act**(TSCA):** All hazardous ingredients are found on the inventory list of substances.**Canadian Domestic Substances List****(DSL):** All ingredients are listed or exempted.**Consumer Product Safety****Commission (CPSC):** This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.**California Proposition 65 chemicals known to cause cancer:**

13463-67-7 titanium dioxide

100-41-4 ethyl benzene

Prop 65 chemicals known to cause birth defects or reproductive harm:

None of the ingredients is listed.

EPA:

None of the ingredients is listed.

16 Other information**Contact:** Regulatory Affairs

Victaulic® Lubricant SDS (Safety Data Sheet)



SECTION 1: IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

1.1. Product Identifier

Product name : Victaulic Lubricant
Product type : Lubricant

1.2. Intended Use of The Product

Use of the substance/preparation : A Pipe Joint Lubricant. For professional use only.
Uses advised against : None

1.3. Name, Address, And Telephone of The Responsible Party Company

| Company | Manufacturer |
|--|--|
| Victaulic Company 4901 Kesslersville Road Easton, PA 18045 610-559-3300 web: www.victaulic.com | JTM Products, Inc. 31025 Carter Street Solon, OH 44139 440-287-2302 |

1.4. Emergency telephone numbers: 24-Hour Emergency Contact

Emergency number : Call CHEMTREC at 1-800-424-9300 (U.S.),
00-1-703-741-5970 (International. Collect calls accepted.)

SECTION 2: HAZARDS IDENTIFICATION

This SDS contains valuable information critical to the safe handling and proper use of the product. This SDS should be retained and available for employees and other users of this product.

2.1. Classification of the Substance or Mixture

Classification (GHS-US) : This material is not classified as hazardous in accordance with OSHA 29 CFR 1910.1200 and the hazard criteria of the Hazardous Products Regulation (HPR).

Signal Word : None

Hazard Statement(s) : Material is not classified as hazardous

Hazard Pictogram(s) : None

Precautionary Statement(s) : P264 Wash hands thoroughly after handling
P271 Use in well-ventilated area
P280 Wear protective gloves/protective clothing/eye protection/face protection.
P304+P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
P314 Get medical advice/attention if you feel unwell.
P301+P330+P331 IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.

2.2. Description of any hazards otherwise not classified

: None

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

3.1. Substances

Not applicable

3.2. Mixtures

| Name | CAS No. | Weight % (w/w) |
|--|------------|----------------|
| Fatty acids, tall-oil, potassium salts | 61790-44-1 | 70-80 |
| 1,2-Propylene glycol | 57-55-6 | 10-20 |
| Mica | 12001-26-2 | 5-10 |

SECTION 4: DESCRIPTION OF FIRST AID MEASURES

4.1. Description of first aid measures

| | |
|--------------------|---|
| General | : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible). |
| Eye contact | : Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| Skin contact | : Remove contaminated clothing. Gently wash with plenty of soap and water. Wash contaminated clothing before reuse. |
| Inhalation | : If symptoms occur, go into open air and ventilate suspected area. Keep at rest and in a position comfortable for breathing. |
| Ingestion | : Rinse mouth. Do NOT induce vomiting. |
| Note to physicians | : Treat symptomatically. |

4.2. Most important symptoms and effects, both acute and delayed

| | |
|--------------------------------------|---|
| Symptoms/injuries | : Not expected to present a significant health hazard under normal conditions of use. |
| Symptoms/injuries after eye contact | : May cause eye irritation. |
| Symptoms/injuries after skin contact | : May cause irritation from prolonged/repeated exposure. |
| Symptoms/injuries after inhalation | : Not expected to present a significant inhalation hazard. |
| Symptoms/injuries after ingestion | : May cause gastrointestinal irritation. |

4.3. Indication of any immediate medical attention and special treatment needed

If you feel unwell, get medical advice and attention.

SECTION 5: FIREFIGHTING MEASURES

5.1. Fire and explosion hazards

Product is not considered flammable or explosive but may burn at high temperatures.

5.2. Extinguishing media

| | |
|--------------------------------|--|
| Suitable extinguishing media | : Use extinguishing media appropriate for surrounding fire. |
| Unsuitable extinguishing media | : Do not use a heavy water stream as it may spread the fire. |

5.3. Special hazards arising from the substance or mixture

Hazardous Combustion Products : Carbon monoxide (CO), Carbon dioxide (CO₂), Silicon oxides.

5.4. Advice for firefighters

| | |
|--------------------------------|---|
| Precautionary measures | : Exercise caution when fighting any chemical fire. |
| Firefighting instructions | : Use water spray or fog for cooling exposed containers. |
| Protection during firefighting | : Do not enter fire area without proper protective equipment, including respiratory protection. |

SECTION 6: ACCIDENTAL RELEASE MEASURES

6.1. Personal precautions, protective equipment, and emergency procedures

General measures : Avoid all contact with eyes, skin, or clothing.

6.1.1. Emergency Procedures

Non-emergency Personnel : Use appropriate personal protective equipment (PPE).
Evacuate unnecessary personnel.

Emergency Responders : Equip clean-up crew with proper protection. Ensure adequate ventilation.

6.2. Methods and material for containment and cleaning up

Prevent entry to sewers and public waters. For containment, absorb and/or contain spill with inert material then place in suitable container. Clean up spills immediately and dispose of waste according to local/regional regulatory requirements.

6.3. Reference to other sections

See heading 8, exposure controls and personal protection.

SECTION 7: HANDLING AND STORAGE

7.1. Precautions for safe handling

Precautions for safe handling : Avoid all contact with eyes, skin, or clothing.

Hygiene measures : Handle in accordance with good industrial hygiene and safety procedures. Wash hands and other exposed areas with mild soap and water before eating, drinking, or smoking and again when leaving work.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Comply with applicable regulations.

Storage conditions : Keep containers tightly closed and store in a dry, cool, and well-ventilated place, away from incompatible materials.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1. Control parameters

| <i>Substance Name</i> | <i>CAS No.</i> | <i>OSHA PEL</i> | <i>ACGIH TLV</i> | <i>NIOSH REL</i> | <i>IDLH</i> |
|-------------------------------|----------------|-----------------|----------------------------|----------------------------|-------------------------|
| Mica (containing < 1% Quartz) | 12001-26-2 | 20 mppcf TWA | 3 mg/m ³ TWA | 3 mg/m ³ TWA | 1,500 mg/m ³ |

8.2. Exposure controls

Engineering controls : Ensure adequate ventilation, especially in confined areas. Emergency eye wash stations and safety showers should be available in the immediate vicinity of any potential exposure. Ensure all national/local regulations are observed.

Personal protective equipment : Not generally required but may be necessary as conditions warrant.

Eye / Face protection : Safety glasses.

Skin protection : Chemically resistant gloves, materials, and fabrics.

Respiratory protection : Use NIOSH-approved air purifying or supplied-air respirator where airborne concentrations of vapor or mist are expected to exceed exposure limits.

General hygiene considerations : Wash hands thoroughly after product use. Have eyewash facilities immediately available. Do not eat, drink or smoke when using this product.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

9.1. Information on basic physical and chemical properties

| | |
|---|-----------------------|
| Physical state | : Liquid |
| Appearance | : Amber viscous paste |
| Odor | : Mild |
| Odor threshold | : No data available |
| pH (25°C) | : 11 |
| Flash Point | : > 104°C (220°F) |
| Vapor Pressure (mm Hg) | : No data available |
| Vapor Density | : No data available |
| Solubility in water | : Soluble in water |
| Autoignition temperature | : No data available |
| Partition Coefficient: n-octanol/water | : No data available |
| Explosive Properties | : No data available |
| Viscosity | : No data available |
| Relative density (SG) | : 1.08 (water = 1) |
| Density (25°C) | : 9.01 lb/gal |
| Boiling Point | : > 104°C (220°F) |
| Boiling Range | : No data available |
| Freezing/melting point | : < 0°C (32°F) |
| Evaporation Rate | : No data available |
| Upper Flammability or Explosive Limit (UEL) | : No data available |
| Lower Flammability or Explosive Limit (LEL) | : No data available |
| Decomposition Temperature | : No data available |
| Flammability (solid, gas) | : No data available |
| Oxidizing Properties | : No data available |
| Minimum Ignition Temperature | : No data available |

9.2. Other information

| | |
|-------------|-----------|
| VOC content | : 146 g/L |
|-------------|-----------|

SECTION 10: STABILITY AND REACTIVITY

10.1. Reactivity

Hazardous reactions will not occur.

10.2. Chemical stability

Stable at standard temperature and pressure.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids. Strong bases. Strong oxidizers.

10.6. Hazardous decomposition products

Carbon monoxide (CO), Carbon dioxide (CO₂), Silicon oxides.

SECTION 11: TOXICOLOGICAL INFORMATION

11.1. Information on likely routes of exposure

Inhalation exposure to dust, droplets, spray and/or mist of the product may irritate the respiratory system.

11.2. Description of the delayed, immediate, or chronic effects from short- and long-term exposure:

Excessive inhalation exposures to dust, droplets, spray and/or mist of the product may cause acute and delayed respiratory effects in some individuals, including sneezing, coughing, shortness of breath, and reduced lung function.

11.3. Description of symptoms:

- Eyes : Particulates may cause eye irritation.
- Skin : Mechanical abrasion may cause irritation.
- Inhalation : May be harmful if inhaled.
- Ingestion : May cause discomfort if swallowed. However, ingestion is unlikely to be a primary route of occupational exposure.

11.4. Information on toxicological effects:

- Acute toxicity : Not classified. Not expected to present a significant hazard under normal conditions of use.

Component acute toxicity

| 1,2-Propylene glycol (57-55-6) | |
|---------------------------------------|--------------|
| Oral LD50: rat | 20,000 mg/kg |
| Dermal LD50: rabbit | 20,800 mg/kg |

- Skin irritation/corrosion : Not classified (pH: 11)
- Eye irritation/corrosion : Not classified (pH: 11)
- Respiratory or skin sensitization : Not classified
- Germ cell mutagenicity : Not classified
- Carcinogenicity : Not classified
- Reproductive and developmental toxicity : Not classified
- Specific target organ toxicity-Single exposure (STOT-SE) : Not classified
- Specific target organ toxicity-Repeated exposure (STOT-RE) : Not classified
- Aspiration hazard : Not classified
- Neurological effects : Not classified
- Interaction with other chemicals which enhance toxicity : Not classified

11.5. Listed carcinogens:

- NTP : None
- IARC : None
- OSHA : None

SECTION 12: ECOLOGICAL INFORMATION

Where mixture data is not available, individual component toxicity has been used.

12.1. Toxicity

No specific test data available for the mixture.

Component toxicity

| 1,2-Propylene glycol (57-55-6) | |
|---------------------------------------|--|
| LC50: fish 1 | 51,600 mg/L Exposure time: 96 h - Species: Oncorhynchus mykiss [static] |
| EC50: Daphnia 1 | 10,000 mg/L Exposure time: 24 h - Species: Daphnia magna |
| EC50: other aquatic organisms 1 | 19,000 mg/L Exposure time: 96 h - Species: Pseudokirchneriella subcapitata |
| LC50: fish 2 | 41 (41 - 47) mg/L Exposure time: 96 h - Species: Oncorhynchus mykiss [static] |
| EC50: Daphnia 2 | 1,000 mg/L Exposure time: 48 h - Species: Daphnia magna [Static] |

12.2. Persistence and degradability

No specific test data available for the mixture.

12.3. Bioaccumulative potential

No specific test data available for the mixture.

Component Data

| 1,2-Propylene glycol (57-55-6) | |
|---------------------------------------|-----|
| BCF: fish 1 | < 1 |

12.4. Mobility in soil

No specific test data available for the mixture.

12.5. Other adverse effects

Other information : Avoid release into the environment.

SECTION 13: DISPOSAL CONSIDERATIONS

13.1. Waste treatment methods

Responsibility for proper waste disposal is with the owner of the waste. Dispose of contents in accordance with local, regional, national, and international regulations.

SECTION 14: TRANSPORT INFORMATION

In accordance with ICAO/IATA/DOT/TDG.

- 14.1. UN number : Not regulated for transport.
- 14.2. UN proper shipping name : Not regulated for transport.
- 14.3. Transport hazard class(es) : Not regulated for transport.
- 14.4. Packing group : Not regulated for transport.
- 14.5. Environmental hazards : Not regulated for transport.
- 14.6. Special precautions for user : See Sections 6 to 8 of this SDS.
- 14.7. Additional Information
 - Overland transport (ground) : No additional information available.
 - Transport by sea : No additional information available.
 - Air transport : No additional information available.

SECTION 15: REGULATORY INFORMATION

Safety, health, and environmental regulations/legislation specific for the substance or mixture.

United States Regulatory Information

TSCA Status:

All components of this product are listed or exempt from the Toxic Substances Control Act (TSCA) Inventory requirements. Y2 - Y2 - indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule (1,2-Propylene glycol).

SARA (Section 311/312):

| | |
|--------------------------|------|
| Reactive hazard | : No |
| Pressure hazard | : No |
| Fire hazard | : No |
| Immediate/acute toxicity | : No |
| Delayed/chronic toxicity | : No |

SARA Section 313 Information:

This product does not contain any toxic chemicals listed under 313 of the Emergency Planning and Community Right-to-Know-Act of 1986 (EPCRA).

Clean Air Act (CAA):

Contains no toxic pollutants or priority pollutants at concentrations greater than 0.1%.

Volatile Organic Compounds (VOCs):

Contains no known toxic pollutants or priority pollutants at concentrations greater than 0.1%.

State Right-to-Know Status:

| | |
|---------------------------|---|
| California Proposition 65 | : Does not contain ingredients known to the State of California to be carcinogenic or reproductive/developmental toxicants greater than 0.1%. |
| Massachusetts | : Mica (CAS 112001-26-2) |
| Minnesota | : Mica (CAS 112001-26-2) : 1,2-Propylene glycol (CAS 57-55-6) |
| New Jersey | : Mica (CAS 112001-26-2) : 1,2-Propylene glycol (CAS 57-55-6) |
| Pennsylvania | : Mica (CAS 112001-26-2) : 1,2-Propylene glycol (CAS 57-55-6) |

Canada Regulatory Information

Canadian Environmental Protection Act, 1999 (CEPA) Status:

This product has been classified in accordance with the hazard criteria of the Hazardous Products Act (HPA) and the Hazardous Products Regulation (HPR).

Domestic/Non-domestic Substances List (DSL/NDSL) Status:

All components of this product are listed or exempt from listing on the Canadian Domestic Substances List.

SECTION 16: OTHER INFORMATION

Abbreviations:

| | |
|--------|--|
| ACGIH | : American Council of Governmental Industrial Hygienists |
| CAA | : Clean Air Act |
| Cal | : California |
| CAS No | : Chemical Abstracts Service Registry Number |
| CFR | : Code of Federal Regulations |
| CWA | : Clean Water Act |
| EPCRA | : Emergency Planning and Community Right-to-Know Act of 1986 |
| GHS | : Globally Harmonized System of Classification and Labeling |
| IARC | : International Agency for Research on Cancer |
| IBC | : Intermediate Bulk Container |
| LEL | : Lower explosive limit |
| mm Hg | : Millimeters of mercury |
| mppcf | : Millions of particles per cubic foot of air |
| N/A | : Not applicable |
| NIOSH | : National Institute for Occupational Safety and Health |
| NTP | : National Toxicology Program |
| OSHA | : Occupational Safety and Health Administration |
| PEL | : Permissible exposure limit |
| REL | : Recommended exposure limit |
| SARA | : Superfund Amendments and Reauthorization Act |
| SDS | : Safety data sheet |
| TLV | : Threshold limit value |
| TSCA | : Toxic Substances Control Act |
| TWA | : Time Weighted Average |
| UEL | : Upper explosive limit |
| UN | : United Nations |
| VOC | : Volatile organic compound |

05.02 Rev K 07/23/2020

Notice

This document has been prepared in accordance with the GHS SDS requirements of the OSHA Hazard Communication Standard, 29 CFR 1910.1200 and the Hazardous Products Regulation (HPR). This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

VICTAULIC PROVIDES THE INFORMATION HEREIN IN GOOD FAITH; HOWEVER, THIS INFORMATION IS PROVIDED AS IS AND NO REPRESENTATION OR WARRANTY OF ANY FORM, BE IT EXPRESS OR IMPLIED, IS GIVEN IN THE PROVISION OF THIS INFORMATION, AND VICTAULIC EXPRESSLY DISCLAIMS ANY SUCH WARRANTIES. REGULATORY REQUIREMENTS ARE SUBJECT TO CHANGE AND MAY DIFFER IN VARIOUS LOCATIONS. IT IS THE BUYER'S/USER'S RESPONSIBILITY TO ENSURE THAT THEIR ACTIVITIES COMPLY WITH ALL FEDERAL, STATE OR LOCAL LAWS. THE INFORMATION PRESENTED HEREIN PERTAINS ONLY TO THE NAMED PRODUCT AS SHIPPED. CONDITIONS RELEVANT TO THE USE OF THIS PRODUCT ARE NOT UNDER CONTROL OF THE MANUFACTURER. IT IS THE BUYER'S/USER'S RESPONSIBILITY TO DETERMINE THE CONDITIONS NECESSARY FOR THE SAFE USE OF THIS PRODUCT, AND VICTAULIC URGES BUYERS/USERS TO CAREFULLY STUDY THE INFORMATION CONTAINED IN THIS SDS AND CONSULT EXPERTS WHEN AND AS NECESSARY OR APPROPRIATE IN MAKING THE DECISION TO PURCHASE AND/OR USE THIS PRODUCT.

End of safety data sheet

Installation

Reference should always be made to the I-100 Victaulic Field Installation Handbook for the product you are installing. Handbooks are included with each shipment of Victaulic products for complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

Warranty

Refer to the Warranty section of the current Price List or contact Victaulic for details.

Note

This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

Trademarks

Victaulic and Zero-Flex are registered trademarks of Victaulic Company.

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® Plumbing Purple Low VOC Primer for PVC and CPVC Plastic Pipe
PRODUCT USE: Low VOC Primer for PVC and CPVC Plastic Pipe
RESTRICTIONS ON USE: No relevant information available
SUPPLIER:
MANUFACTURER: IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300 E-mail address: EHSinfo@ipscorp.com
EMERGENCY: Transportation: CHEMTEL Tel. 800-255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800-255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | | Environmental | | Physical | |
|---------------------|------------|-------------------|------------|------------------|------------|
| Acute Toxicity: | Category 2 | Acute Toxicity: | None Known | Flammable Liquid | Category 2 |
| Skin Irritation: | Category 3 | Chronic Toxicity: | None Known | | |
| Skin Sensitization: | NO | | | | |
| Carcinogenicity: | Category 2 | | | | |
| Eye Irritation: | Category 2 | | | | |

GHS LABEL:



Signal Word: Danger

| HAZARD STATEMENTS | PRECAUTIONARY STATEMENTS |
|---|--|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P337+P313: Get medical advice/attention P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |
| RESPONSE STATEMENTS | |
| P301+310: IF SWALLOWED: Call a POISON CENTER and get Medical Attention P331: Do NOT induce vomiting. P303+361+353: IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water [or shower]. | P304+340: IF INHALED: Remove person to fresh air and keep comfortable for breathing. P305+P351+P338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. P308+313: IF exposed or concerned: Get medical advice/attention. |

Physical Hazards Not Otherwise Classified May form explosive peroxides

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH | CONCENTRATION |
|---------------------------|----------|-----------|-----------------------|---------------|
| | | | Registration Number | % by Weight |
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 01-2119444314-46-0000 | 10 - 25 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 01-2119457290-43-0000 | 15 - 25 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 10 - 30 |
| Acetone | 67-64-1 | 200-662-2 | 01-2119471330-49-0000 | 30 - 50 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog.
Unsuitable Extinguishing Media: Water spray or stream.
Exposure Hazards: Inhalation and dermal contact
Combustion Products: Oxides of carbon, hydrogen chloride and smoke
Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks. *Safety Glasses and Gloves*

| | HMIS | NFPA | |
|--------------|------|------|------------|
| Health | 2 | 2 | 0-Minimal |
| Flammability | 3 | 3 | 1-Slight |
| Reactivity | 0 | 0 | 2-Moderate |
| PPE | B | | 3-Serious |
| | | | 4-Severe |

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH | ACGIH | OSHA | OSHA | OSHA | CAL/OSHA | CAL/OSHA | CAL/OSHA |
|------------------|---------------------------|------------|----------------|------------|----------------|-------------|------------|-------------------|----------------|
| | | 8-HOUR TLV | 15-MINUTE STEL | 8-HOUR PEL | 15-MINUTE STEL | PEL-Ceiling | 8-HOUR PEL | 15-MINUTE Ceiling | 15-MINUTE STEL |
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |
| | Acetone | 250 ppm | 500 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® Plumbing Purple Low VOC Primer for PVC and CPVC Plastic Pipe

Date Revised: MAR 2020
Supersedes: DEC 2018

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance: Purple, thin liquid
Odor: Ethereal
pH: Not Applicable
Melting/Freezing Point: -108.5°C (-163.3°F) Based on first melting component: THF
Boiling Point: 56°C (133°F) Based on first boiling component: Acetone
Flash Point: -20°C (-4°F) TCC based on Acetone
Specific Gravity: 0.846 @23°C (73°F)
Solubility: Solvent portion soluble in water. Resin portion separates out.
Partition Coefficient n-octanol/water: Not Available
Auto-ignition Temperature: 321°C (610°F) based on THF
Decomposition Temperature: Not Applicable
VOC Content: When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 542 g/l.

Odor Threshold: 0.88 ppm (Cyclohexanone)
Boiling Range: 56°C (133°F) to 156°C (313°F)
Evaporation Rate: > 1.0 (BUAC = 1)
Flammability: Category 2
Flammability Limits: LEL: 1.1% based on Cyclohexanone
 UEL: 12.8% based on Acetone
 190 mm Hg @ 20°C (68°F) Acetone
Vapor Pressure: >2.0 (Air = 1) Not Applicable
Vapor Density: Water-thin
Other Data: Viscosity: Water-thin

SECTION 10 - STABILITY AND REACTIVITY

Reactivity: Heating may cause a fire
Stability: Stable under normal conditions
Hazardous decomposition products: None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke.
Conditions to avoid: Keep away from heat, sparks, open flame and other ignition sources.
Incompatible Materials: Oxidizers, strong acids and bases, amines, ammonia

SECTION 11 - TOXICOLOGICAL INFORMATION

Likely Routes of Exposure: Inhalation, Eye and Skin Contact
Acute symptoms and effects:
Inhalation: Excessive exposure to vapors or spray mists can result in headache, dizziness, incoordination and loss of consciousness. Irritation of the eyes, nose, throat and lungs can also occur when exposed to high vapor concentrations. Some reports have associated repeated and prolonged occupational overexposure to solvents with permanent nervous system damage.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. May cause defatting and irritation of skin (Dermatitis) upon prolonged or repeated
Ingestion: Swallowing can cause nausea, vomiting, diarrhea and loss of consciousness.
Chronic (long-term) effects: (MEK): Low level chronic exposure has been shown to cause decreased memory and impairment of the central nervous system.
Health Hazards Not Otherwise Classified: This material may cause defatting and irritation of skin (Dermatitis) upon prolonged or repeated contact.
Respiratory or Skin Sensitization: Not Applicable

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

Carcinogenicity: Tetrahydrofuran (THF): Category 2: Suspected of causing cancer

| Toxicity: | LD50 (Oral) | LD50 (Dermal) | LC50 (Inhalation) |
|---------------------|------------------|----------------------|---------------------------|
| Methyl Ethyl Ketone | 2737 mg/kg (rat) | 6480 mg/kg (rabbit) | 8 hrs. 23,500 mg/m3 (rat) |
| Cyclohexanone | 1535 mg/kg (rat) | 948 mg/kg (rabbit) | 4 hrs. 8,000 PPM (rat) |
| Tetrahydrofuran | 2842 mg/kg (rat) | > 2,000 mg/kg (rat) | 3 hrs. 21,000 mg/m3 (rat) |
| Acetone | 5800 mg/kg (rat) | 20000 mg/kg (rabbit) | 50,100 mg/m3 (rat) |

Acute Toxicity

Calculated (ATEs)
 Acute (Oral) Toxicity: Category 2
 Acute (Dermal) Toxicity: Category 2
 Acute (Inhalation) Toxicity: Category 2

| Specific Target Exposure Toxicity (Single Exposure): | Category | Route of Exposure | Affected Organs |
|--|----------|-------------------|------------------------|
| Methyl Ethyl Ketone | 3 | Inhalation | Central Nervous System |
| Cyclohexanone | N/E | N/E | N/E |
| Tetrahydrofuran | 3 | Inhalation | Central Nervous System |
| Acetone | 3 | Inhalation | Central Nervous System |

Specific Target Exposure Toxicity (Repeated Exposure): No Data Available

Aspiration Hazard: Based on available data, the classification criteria are not met.

SECTION 12 - ECOLOGICAL INFORMATION

| Ecotoxicity: | LC50 | EC50 | EC50 |
|--------------------------------|---|-------------------------------------|--|
| Acute Aquatic Toxicity: | Pimephales promelas (fathead minnow); 96-hour | Daphnia magna (water flea); 48-hour | Pseudokirchneriella subcapitata (microalgae) Growth rate inhibitor |
| Methyl Ethyl Ketone | > 100 mg/L | > 100 mg/L | 2,029 mg/l - 96 hour |
| Cyclohexanone | 527 mg/L | > 100 mg/L | 0.925 mg/l - 72 hour |
| Tetrahydrofuran | 2160 mg/L | No Data Available | 3,700 mg/l - 192 hour |
| Acetone | No Data Available | 7630 | No Data Available |

Mobility in Soil: If released into the environment, this product can move rapidly through the soil.
Degradability: Not readily biodegradable
Bioaccumulation: Minimal to none.
Results of PBT and vPvB assessment: PBT: Not applicable. vPvB: Not applicable
Other adverse effects: No relevant information available.

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Dispose of waste and containers in compliance with applicable Federal, State, and Local Regulations. Consult disposal expert. Do not reuse empty containers.

SECTION 14 - TRANSPORT INFORMATION

Proper Shipping Name: Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran)
Hazard Class: 3
Secondary Risk: None
Identification Number: UN 1993
Packing Group: PG II
Label Required: Class 3 Flammable Liquid
Marine Pollutant: NO

| EXCEPTION for Ground Shipping | |
|-------------------------------|--|
| DOT Limited Quantity: | Up to 1L per inner packaging, 30 kg gross weight per package. |
| Consumer Commodity: | Depending on packaging, these quantities may qualify under DOT as "ORM-D". |

| TDG INFORMATION | |
|---------------------------------|---|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) |
| UN NUMBER/PACKING GROUP: | UN 1993, PG II |

SECTION 15 - REGULATORY INFORMATION

Precautionary Label Information: Highly Flammable, Irritant, Carc. Cat. 2
Symbols: F, Xi
Compliance Statement: This SDS was prepared to be in accordance with:
 US OSHA Hazard Communication Standard 29 CFR 1910.1200 (Rev 2012)
 Canadian Workplace Hazardous Materials Information System (WHMIS) 2015
 European Regulation (EC) No (EU) 2015/830 on classification, labelling and packaging of substances and mixtures

Ingredient Listings: USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS)

SECTION 16 - OTHER INFORMATION

Specification Information:
Department issuing data sheet: IPS, Safety Health & Environmental Affairs
E-mail address: <EHSinfo@ipscorp.com>
Training necessary: Yes, training in practices and procedures contained in product literature.
Reissue date / reason for reissue: 3/31/2020 / Updated GHS Standard Format
Intended Use of Product: Primer for PVC and CPVC Plastic Pipe

All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances).

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

SAFETY DATA SHEET

EN-16/B25116

Section 1. Identification

Product name : OMNI-FILL® Enamel Blend (EN-16)
Product code : EN-16/B25116
Other means of identification : Not available.
Product type : Aerosol.
Relevant identified uses of the substance or mixture and uses advised against
Not applicable.

Manufacturer : Mfg. by:
Sherwin-Williams
Diversified Brands Division
Specialty Aerosols
101 Prospect Ave.
Cleveland, OH 44115

Emergency telephone number of the company : (216) 566-2917

Product Information Telephone Number : (800) 638-4852

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation and Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 21.6%

GHS label elements

Hazard pictograms :



Signal word : Danger

Date of issue/Date of revision : 4/6/2015. **Date of previous issue** : No previous validation. **Version** : 1 1/13

Section 2. Hazards identification

| | |
|---|---|
| Hazard statements | : Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes serious eye irritation. Suspected of causing cancer. May be fatal if swallowed and enters airways. May cause respiratory irritation. May cause drowsiness and dizziness. May cause damage to organs through prolonged or repeated exposure. |
| Precautionary statements | |
| Prevention | : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Wear eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Pressurized container: Do not pierce or burn, even after use. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Wash hands thoroughly after handling. |
| Response | : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. |
| Storage | : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. |
| Disposal | Dispose of contents and container in accordance with all local, regional, national and international regulations. |
| Supplemental label elements | DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY. Please refer to the SDS for additional information. Keep upright in a cool, dry place. Do not discard empty can in trash compactor. |
| Hazards not otherwise classified | : None known. |

Section 3. Composition/information on ingredients

| | |
|--------------------------------------|------------------|
| Substance/mixture | : Mixture |
| Other means of identification | : Not available. |

CAS number/other identifiers

| Ingredient name | % by weight | CAS number |
|------------------------|--------------------|-------------------|
| Acetone | 47.5 | 67-64-1 |
| Propane | 21.6 | 74-98-6 |
| Butane | 20.8 | 106-97-8 |
| Xylene | 8.6 | 1330-20-7 |
| Ethylbenzene | 1.5 | 100-41-4 |

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness and dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways. Irritating to mouth, throat and stomach.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : No specific data.
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

Section 4. First aid measures

- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical

- : Extremely flammable aerosol. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed. Runoff to sewer may create fire or explosion hazard.

Hazardous thermal decomposition products

- : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

Special protective actions for fire-fighters

- : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters

- : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions

- : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Date of issue/*Date of revision* : 4/6/2015. *Date of previous issue* : No previous validation. *Version* : 1 4/13

Section 6. Accidental release measures

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|-----------------|---|
| Acetone | ACGIH TLV (United States, 4/2014). TWA: 500 ppm 8 hours. TWA: 1188 mg/m ³ 8 hours. STEL: 750 ppm 15 minutes. STEL: 1782 mg/m ³ 15 minutes. NIOSH REL (United States, 10/2013). TWA: 250 ppm 10 hours. TWA: 590 mg/m ³ 10 hours. OSHA PEL (United States, 2/2013). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m ³ 8 hours. |
| Propane | NIOSH REL (United States, 10/2013). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 2/2013). |

Date of issue/Date of revision : 4/6/2015. **Date of previous issue** : No previous validation. **Version** : 1 5/13

Section 8. Exposure controls/personal protection

| | |
|--------------|---|
| Butane | <p>TWA: 1000 ppm 8 hours. TWA: 1800 mg/m³ 8 hours. NIOSH REL (United States, 10/2013). TWA: 800 ppm 10 hours. TWA: 1900 mg/m³ 10 hours. ACGIH TLV (United States, 4/2014). STEL: 1000 ppm 15 minutes.</p> |
| Xylene | <p>ACGIH TLV (United States, 4/2014). TWA: 100 ppm 8 hours. TWA: 434 mg/m³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m³ 15 minutes. OSHA PEL (United States, 2/2013). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
| Ethylbenzene | <p>ACGIH TLV (United States, 4/2014). TWA: 20 ppm 8 hours. NIOSH REL (United States, 10/2013). TWA: 100 ppm 10 hours. TWA: 435 mg/m³ 10 hours. STEL: 125 ppm 15 minutes. STEL: 545 mg/m³ 15 minutes. OSHA PEL (United States, 2/2013). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |

Appropriate engineering controls

: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 7
- Melting point** : Not available.
- Boiling point** : Not available.
- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 5.6 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 1%
Upper: 12.8%
- Vapor pressure** : 13.5 kPa (101.325 mm Hg) [at 20°C]
- Vapor density** : 1.55 [Air = 1]
- Relative density** : 0.66
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (room temperature): <0.07 cm²/s (<7 cSt)
Kinematic (40°C (104°F)): <0.07 cm²/s (<7 cSt)

Aerosol product

- Type of aerosol** : Spray
- Heat of combustion** : 0.00003446 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : Avoid all possible sources of ignition (spark or flame).

Date of issue/Date of revision : 4/6/2015. *Date of previous issue* : No previous validation. *Version* : 1 7/13

Section 10. Stability and reactivity

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|--------------------------|----------|
| Acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| Butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| Xylene | LC50 Inhalation Gas. | Rat | 5000 ppm | 4 hours |
| | LD50 Oral | Rat | 4300 mg/kg | - |
| Ethylbenzene | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|--------------------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 parts per million | - |
| | Eyes - Mild irritant | Rabbit | - | 10 microliters | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 milligrams | - |
| | Eyes - Severe irritant | Rabbit | - | 20 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 milligrams | - |
| Xylene | Skin - Mild irritant | Rabbit | - | 395 milligrams | - |
| | Eyes - Mild irritant | Rabbit | - | 87 milligrams | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 5 milligrams | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 microliters | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 milligrams | - |
| Ethylbenzene | Skin - Moderate irritant | Rabbit | - | 100 Percent | - |
| | Eyes - Severe irritant | Rabbit | - | 500 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 15 milligrams | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Xylene | - | 3 | - |
| Ethylbenzene | - | 2B | - |

Reproductive toxicity

Date of issue/Date of revision : 4/6/2015. *Date of previous issue* : No previous validation. *Version* : 1 8/13

Section 11. Toxicological information

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|--------------|------------|-------------------|---|
| Acetone | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| Propane | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| Butane | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| Xylene | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| Ethylbenzene | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|--------------|------------|-------------------|----------------|
| Acetone | Category 2 | Not determined | Not determined |
| Propane | Category 2 | Not determined | Not determined |
| Butane | Category 2 | Not determined | Not determined |
| Xylene | Category 2 | Not determined | Not determined |
| Ethylbenzene | Category 2 | Not determined | Not determined |

Aspiration hazard

| Name | Result |
|--------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Xylene | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : Can cause central nervous system (CNS) depression. May cause drowsiness and dizziness. May cause respiratory irritation.

Skin contact : No known significant effects or critical hazards.

Ingestion : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways. Irritating to mouth, throat and stomach.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : Adverse symptoms may include the following:
pain or irritation
watering
redness

Date of issue/Date of revision : 4/6/2015. **Date of previous issue** : No previous validation. **Version** : 1 9/13

- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
- Skin contact** : No specific data.
- Ingestion** : Adverse symptoms may include the following:
 nausea or vomiting

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : May cause damage to organs through prolonged or repeated exposure.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|--------------------|-------------|
| Oral | 32306 mg/kg |
| Inhalation (gases) | 45722.9 ppm |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|-------------------------------------|--|----------|
| Acetone | Acute EC50 20.565 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Acute LC50 6000000 µg/l Fresh water | Crustaceans - Gammarus pulex | 48 hours |
| | Acute LC50 10000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| | Chronic NOEC 5 µg/l Marine water | Fish - Gasterosteus aculeatus - Larvae | 42 days |
| Xylene | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes | 48 hours |

Date of issue/Date of revision : 4/6/2015. **Date of previous issue** : No previous validation. **Version** : 1 10/13

Section 12. Ecological information

| | | | |
|----------------------------------|-----------------------------------|---|----------|
| Ethylbenzene | Acute LC50 13400 µg/l Fresh water | pugio | 96 hours |
| | Acute EC50 4600 µg/l Fresh water | Fish - Pimephales promelas | 72 hours |
| | Acute EC50 3600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 6530 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 48 hours |
| | Acute EC50 2930 µg/l Fresh water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| Acute LC50 4200 µg/l Fresh water | Daphnia - Daphnia magna - Neonate | 96 hours | |
| | | Fish - Oncorhynchus mykiss | |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| Xylene | - | - | Readily |
| Ethylbenzene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-------------|-----------|
| Xylene | - | 8.1 to 25.9 | low |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations






Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|--------------------------------|--------------------|--------------------|-----------------------|---------------------|----------|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| | | | | | |

Date of issue/Date of revision : 4/6/2015. **Date of previous issue** : No previous validation. **Version** : 1 11/13

Section 14. Transport information

| | | | | | |
|----------------------------|--|--|--|--|--|
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | Special provisions LIMITED QUANTITY | Special provisions LIMITED QUANTITY | Special provisions (ERG#126) | Special provisions LIMITED QUANTITY | Emergency schedules (EmS) LIMITED QUANTITY, F-D, S-U |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations :
State regulations
California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 2 |
| Flammability | | 4 |
| Physical hazards | | 0 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

Section 16. Other information

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

SAFETY DATA SHEET

1. Product and Company Identification

Product Name: Free All

Product Code: RE 12, RE01, RE06 Product Type: Aerosol

Product Use: Penetrant

Manufacturer: Federal Process Corp

Revision Date: 03/23/2018

Address: 4520 Richmond Road

Cleveland, Ohio 44128

Phone: 1-800-846-7325

Emergency Phone Number: Call Chemtrec at 1-800-424-9300

NOTE: The information contained herein is accurate to the best of our knowledge. We do not suggest or guarantee that any hazards listed herein are the only ones which exist. We provide this information as guidance for providing personal protection to your employees. The user has the sole responsibility to determine the suitability of the materials for any use and the manner of use contemplated. The user must meet all applicable safety and health standards. We provide this information as guidance for providing personal protection to your employees.

2. Hazards Identification

Classification of Substance or mixture

| | |
|---|-------------|
| Aerosols | Category 1 |
| Aspiration Hazard | Category 1 |
| Acute Toxicity (inhalation) | Category 4 |
| Skin irritation | Category 2 |
| Eye Damage/irritation | Category 2A |
| Specific target organ toxicity Single exposure | Category 3 |

GHS Label Elements

Pictograms



Signal Word: Danger:

Hazard Statements:

H222 Extremely flammable aerosol

H229 Pressurized container: may burst if heated
H304 May be fatal if swallowed and enters airways
H315 Causes skin irritation
H332 Harmful if inhaled
H319 Causes serious eye irritation
H335 May cause respiratory irritation

Precautionary Statements:

Prevention

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
P211 Do not spray on an open flame or other ignition source.
P251 Do not pierce or burn
P264 Wash hands thoroughly after handling
P280 Wear protective gloves/eye protection / face protection
P261 Avoid breathing dust/fume/gas/mist/vapors/spray
P271 Use only outdoors or in a well ventilated area
P262 Wash hands thoroughly after handling

Response:

P301+P310 If Swallowed: Immediately call a poison center or doctor
P302+P352 If on skin: Wash with plenty of soap and water
P304+P340 If inhaled: Remove person to fresh air and keep comfortable for breathing.
P312 Call poison center/doctor/ if you feel unwell.
P332+P313 If skin irritation occurs: Get medical advice/attention
P305+P351+
P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P331 Do not induce vomiting
P337 If eye irritation persists: Get medical advice/attention.
P362+P364 Take off contaminated clothing and wash it before reuse.
P405 Store locked up
P410+P412 Protect from sunlight. Don not expose to temperatures exceeding 50°C/122°F
P501 Dispose of contents/container in accordance with local/regional regulations

3. Composition / Information on Ingredients

| Ingredients | CAS # | Percent |
|--|------------|---------|
| Carbon Dioxide | 124-38-9 | .1-10 % |
| Distillates, petroleum, hydrotreated light | 64742-47-8 | 5-15% |
| Petroleum Oil | 64742-52-5 | 25-35% |
| Oleic Acid | 112-80-1 | 25-35% |
| Methyl Isobutyl Ketone | 108-10-1 | 25-35% |

4. First Aid Measures

Eye Contact:

Flush with warm water for 15 minutes. Seek medical attention.

Skin Contact:

Wash with soap and water. Remove any contaminated clothing and launder before reusing. If irritation persists, seek medical attention.

Inhalation:

Remove exposed individual to fresh air, protecting yourself. Restore breathing if necessary. Contact a physician.

Ingestion:

Seek medical attention. If individual is drowsy or unconscious, do not give anything by mouth; place individual on the left side with the head down. Contact a physician, medical facility, or poison control center for advice about whether to induce vomiting. If possible, do not leave individual unattended.

5. Fire Fighting Measures

Flash Point: Flash point of liquid portion 104°F

Flammable limits liquid portion @ 77 deg:

Upper: 5.6.

Lower: 0.7

Auto-ignition temperature of liquid portion 689F

Extinguishing Media:

Dry chemical, carbon dioxide, halon, or foam is recommended. Water spray may be used to cool containers or structures. Halon may decompose into toxic materials and carbon dioxide will displace oxygen, take proper precautions when using these materials.

Unusual Fire & Explosion Hazards:

This material may be ignited by extreme heat, sparks, flames or other ignition sources (static electricity). Vapors are heavier than air and will collect in low areas (sewers) or travel considerable distances. If containers are not cooled in a fire, they may rupture and ignite.

Special Fire Fighting Procedures:

At elevated temperatures (over 130F) aerosol container may burst, vent or rupture; use equipment or shielding to protect personnel. Cooling exposed containers with streams of water may be helpful. Emergency responders should wear self-contained breathing apparatus. Wear other protective gear as conditions warrant. Keep unauthorized people out and try to contain spills or leaks if it can be done safely. Material will float on water, avoid spreading the fire.

6. Accidental Release Measures

Spill or Leak Instructions

Contain spill with dikes of soil or nonflammable absorbent to minimize contaminated area. Avoid run-off into storm sewers and ditches leading to waterways. If required, notify state and local authorities. Place leaking containers in well-ventilated area. Clean up small spills by using a nonflammable absorbent or flushing sparingly with water. Contain larger spills with nonflammable diking or absorbent. Clean up by vacuuming or sweeping.

Keep unnecessary people away; isolate hazard area and deny entry. Stay upwind; keep out of low areas. Assess the spill situation, as the spill may not evolve large amounts of hazardous airborne contaminants in many outdoor spill situations. It may be advisable in some cases to simply monitor the situation until spilled product is removed.

7. Handling and Storage

Handling:

Store below 120°F in cool, dry area, out of direct sunlight and away from strong oxidizers. Do not puncture or burst. Use in accordance with good work place practices. Use with adequate ventilation. Keep containers closed when not in use. Always open containers slowly to allow any excess pressure to vent. Avoid breathing vapor. Avoid contact with eyes, skin or clothing. Wash thoroughly with soap and water after handling. Decontaminate soiled clothing thoroughly before re-use. Destroy contaminated leather clothing.

Empty containers may contain residues from the product. Treat empty containers with the same precautions as the material last contained. Do not cut, weld or apply heat to empty containers Do not incinerate

Storage:

Store in a cool, dry area, away form heat or direct sunlight. Keep containers closed when not in use. Do not store with incompatible materials

8. Exposure Controls / Personal Protection

Protective Equipment:

Use synthetic gloves if necessary to prevent excessive skin contact. Do not wear contacts and always use ANSI approved safety glasses or splash shield.

Engineering Controls:

General or dilution ventilation is frequently sufficient as the sole means of controlling employee exposure. Local ventilation is usually preferred. Use a NIOSH approved respirator if ventilation is not adequate to maintain exposures below TLV levels.

Respiratory Protection:

Use adequate ventilation to maintain exposure limits. If the exposure limits of the products or any of its components is exceeded, an approved organic vapor mask should be used (consult your safety equipment supplier). Above exposure levels an approved self-contained breathing apparatus or airline respirator with full face-piece is required

Other Suggested Equipment:

Eye wash station and emergency showers should be available. Spill containment equipment should be available.

Discretion Advised:

We. take no responsibility for determining what measures are required for personal protection in any specific application. The general information should be used with discretion.

Exposure guidelines:

| Ingredients | CAS # | Percent | Exposure Limits |
|--|------------|---------|---|
| Carbon Dioxide | 124-38-9 | .1-10 % | OSHA (PEL) 5000 ppm ACGIH TLV 5000 ppm |
| Distillates, petroleum, hydrotreated light | 64742-47-8 | 5-15% | Supplier (TWA) 100 ppm |
| Petroleum Oil | 64742-52-5 | 25-35% | TVL Oil Mist 5mg/m3 |

| | | | |
|------------------------|----------|---------|---|
| Oleic Acid | 112-80-1 | 25-35 % | None established |
| Methyl Isobutyl Ketone | 108-10-1 | 25-35 % | OSHA (TWA) 50 ppm ACGIH (TLV) 50 ppm |

9. Physical and Chemical Properties

Boiling Point: NA
Vapor Density: >1(Air=1)
Odor/Appearance: Clear mist as dispensed from aerosol can.
Evaporation Rate: Ether = 1 Slower

Specific Gravity: <1
Water Solubility: Negligible

10. Stability and Reactivity

Stability: Stable
Conditions to Avoid: Heat, spark, and open flame
Incompatibility: Strong-Oxidizing Agents
Hazardous Decomposition: Combustion will produce Carbon Monoxide, Carbon Dioxide and hydrocarbons..
Hazardous Polymerization: Will not occur

11. Toxicological Information

Component Toxicological Information:

Oleic acid

Oral Rat LD50: 74,000 mg/kg
IrritationRabbit 500 mg open mild

Methyl Isobutyl Ketone

Oral Rat LD50 2080 mg/kg
Inhalation Rat LC50 2000-4000 ppm 4h
Acute dermal toxicity Rabbit LD50 > 10ml/kg
Skin irritation rabbit Mild Skin Irritation
Eye Rabbit Moderate eye irritation

Distillates, petroleum, hydrotreated light

Acute Oral LD50 Rat >5,000 mg/kg
Acute Inhalation LC50 Rat (4 hour) >6.8 mg/l
Acute dermal LD50 rabbit: 2,000 – 4,000 mg/kg

12. Ecological Information

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.
Material -- Not expected to demonstrate chronic toxicity to aquatic organisms.

PERSISTENCE AND DEGRADABILITY

Biodegradation: Material -- Expected to be readily biodegradable.
Hydrolysis: Material -- Transformation due to hydrolysis not expected to be significant.
Photolysis: Material -- Transformation due to photolysis not expected to be significant.
Atmospheric Oxidation: Material -- Expected to degrade rapidly in air

13. Disposal Considerations

Do not puncture or burn containers. Give empty, leaking, or full containers to disposal service equipped to handle and dispose of aerosol (pressurized) containers. Dispose of spilled material in accordance with state and local regulations for waste that is non-hazardous by Federal definition. Note that this information applies to the material as manufactured; processing, use, or contamination may make this information inappropriate, inaccurate, or incomplete.

Note that this handling and disposal information may also apply to empty containers, liners and rinsate. State or local regulations or restrictions are complex and may differ from federal regulations. This information is intended as an aid to proper handling and disposal; the final responsibility for handling and disposal is with the owner of the waste. See Section 9 - Physical and Chemical Properties.

14. Transport Information

DOT
Consumer Commodity ORM-D

AIR (IATA)
ID8000 Consumer Commodity

Vessel
Aerosol (Limited Quantity), Class 2.1, UN1950, ERG 126

15. Regulatory Information

Environmental Regulations

Clean Water Act/Oil Pollutions Act:

SARA 302/304:

None

SARA 311/312:

Immediate (x) Delayed () Fire (x) Reactive () Sudden Release of Pressure (x)

Section 313

Toxic chemical list:

Methyl Isobutyl Ketone

All the chemicals used in this product are TSCA listed.
Check with your local regulators to be sure all local regulations are met.

16. Other Information

Hazard ratings This information is intended solely for the use of individuals trained in the NFPA and/or HMIS systems.

Level 3 Aerosol

HMIS: Health: 2 Flammability: 3 Reactivity: 0

RATING: 4-EXTREME 3-HIGH 2-MODERATE 1-SLIGHT 0-INSIGNIFICANT

Note:

For industrial use only. The information contained herein is accurate to the best of our knowledge. We do not suggest or guarantee that any hazards listed herein are the only ones which exist. We make no warranty of any kind, express or implied, concerning the safe use of this material in your process or in combination with other substances. Effects can be aggravated by other materials and/or this material may aggravate or add to the effects of other materials. This material may be released from gas, liquid, or solid materials made directly or indirectly from it. User has the sole responsibility to determine the suitability of the materials for any use and the manner of use contemplated. User must meet all applicable safety and health standards. Possession of an SDS does not indicate that the possessor of the SDS was a purchaser or user of the subject product.

SAFETY DATA SHEET

1. Identification

Product identifier Propane

Other means of identification
SDS number WC002

Recommended use Soldering and brazing.

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer/Supplier Worthington Cylinder Corporation

Address 300 E. Breed St.
 Chilton, WI 53014
 United States

E-mail SDSRequest@worthingtonindustries.com

Telephone 1-800-359-9678

Emergency telephone CHEMTREC 1-800-424-9300 (USA)
 1-703-527-3887 International
 (CCN 628056)

2. Hazard(s) identification

Physical hazards Flammable gases Category 1
 Gases under pressure Liquefied gas

Health hazards Not classified.

OSHA defined hazards Simple asphyxiant

Label elements



Signal word Danger

Hazard statement Extremely flammable gas. Contains gas under pressure; may explode if heated. May displace oxygen and cause rapid suffocation.

Precautionary statement

Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Use only with adequate ventilation.

Response Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so.

Storage Protect from sunlight. Store in a well-ventilated place.

Disposal Dispose of waste and residues in accordance with local authority requirements.

Hazard(s) not otherwise classified (HNOC) Contact with liquefied gas may cause frostbite.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------|------------|------------|
| Propane | 74-98-6 | 87.5 - 100 |
| Propylene | 115-07-1 | 0 - 10 |
| Ethane | 74-84-0 | 0 - 7 |

| Chemical name | CAS number | % |
|---------------|------------|---------|
| Butane | 106-97-8 | 0 - 2.5 |

Additives

| Chemical name | Common name and synonyms | CAS number | % |
|-----------------|--------------------------|------------|---------|
| Ethyl mercaptan | | 75-08-1 | < 0.005 |

Composition comments Gas concentrations are in percent by volume.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory tract irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation. |
| Skin contact | Not likely, due to the form of the product. If frostbite occurs, immerse affected area in warm water (not exceeding 105°F/41°C). Keep immersed for 20 to 40 minutes. Get medical attention immediately. |
| Eye contact | Not likely, due to the form of the product. If frostbite occurs, immediately flush eyes with plenty of warm water (not exceeding 105°F/41°C) for at least 15 minutes. If easy to do, remove contact lenses. Get medical attention promptly if symptoms persist or occur after washing. |
| Ingestion | This material is a gas under normal atmospheric conditions and ingestion is unlikely. |
| Most important symptoms/effects, acute and delayed | Exposure to rapidly expanding gas or vaporizing liquid may cause frostbite ("cold burn"). Very high exposure can cause suffocation from lack of oxygen. Symptoms may include loss of mobility/consciousness. Victim may not be aware of asphyxiation. Asphyxiation may bring about unconsciousness without warning and so rapidly that victim may be unable to protect themselves. |
| Indication of immediate medical attention and special treatment needed | Exposure may aggravate pre-existing respiratory disorders. Provide general supportive measures and treat symptomatically. |
| General information | First aid personnel must be aware of own risk during rescue. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Dry chemical powder. Carbon dioxide (CO ₂). Water fog. Foam. |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Extremely flammable gas. May form explosive mixtures with air. Gas may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Do not extinguish fires unless gas flow can be stopped safely; explosive re-ignition may occur. Promptly isolate the scene by removing all persons from the vicinity of the incident. No action shall be taken involving any personal risk or without suitable training. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus. Stop flow of material. Use water to keep fire exposed containers cool and to protect personnel effecting shutoff. If a leak or spill has not ignited, use water spray to disperse the vapors and to protect personnel attempting to stop leak. Prevent runoff from fire control or dilution from entering streams, sewers or drinking water supply. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. Cool containers exposed to flames with water until well after the fire is out. |
| General fire hazards | Extremely flammable gas. Contents under pressure. Pressurized container may explode when exposed to heat or flame. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Evacuate the area promptly. No action shall be taken involving any personal risk or without suitable training. In the event of a leak evacuate all personnel until ventilation can restore oxygen concentrations to safe levels. Keep unnecessary personnel away. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Wear appropriate personal protective equipment (See Section 8). |
|--|---|

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. If possible, turn leaking containers so that gas escapes rather than liquid. Isolate area until gas has dispersed. For waste disposal, see section 13 of the SDS.

Environmental precautions

Should not be released into the environment. Prevent further leakage or spillage if safe to do so.

7. Handling and storage

Precautions for safe handling

Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Do not smoke. All equipment used when handling the product must be grounded. Do not breathe gas. Avoid prolonged exposure. Do not enter storage areas or confined spaces unless adequately ventilated. Use only outdoors or in a well-ventilated area. Oxygen concentration should not fall below 19.5 % at sea level (pO2 = 135 mmHg). Mechanical ventilation or local exhaust ventilation may be required. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Do not store, incinerate, or heat this material above 120 degrees Fahrenheit. Keep away from heat, sparks and open flame. This material can accumulate static charge which may cause spark and become an ignition source. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Protect cylinders from damage. Stored containers should be periodically checked for general condition and leakage. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------|------|------------------------|
| Propane (CAS 74-98-6) | PEL | 1800 mg/m3 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|--------------------------|------|----------|
| Butane (CAS 106-97-8) | STEL | 1000 ppm |
| Propylene (CAS 115-07-1) | TWA | 500 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------|------|------------------------|
| Butane (CAS 106-97-8) | TWA | 1900 mg/m3 800 ppm |
| Propane (CAS 74-98-6) | TWA | 1800 mg/m3 1000 ppm |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Exposure guidelines

Follow standard monitoring procedures.

Appropriate engineering controls

Provide adequate ventilation and minimize the risk of inhalation of gas. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear approved safety glasses or goggles. Face shield is recommended.

Skin protection

Hand protection

Wear cold insulating gloves.

Skin protection

Other

Wear protective clothing appropriate for the risk of exposure.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. The type of respiratory protection selected must comply with the requirements set forth in OSHA's Respiratory Protection Standard (29 CFR 1910.134).
WARNING! Air-purifying respirators do not protect workers in oxygen deficient atmospheres.

| | |
|---------------------------------------|---|
| Thermal hazards | Contact with liquefied gas might cause frostbites, in some cases with tissue damage. Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Do not eat, drink or smoke when using the product. Wash thoroughly after handling. Provide eyewash station and safety shower. Handle in accordance with good industrial hygiene and safety practices. |

9. Physical and chemical properties

Appearance

| | |
|---|---|
| Physical state | Gas. |
| Form | Compressed liquefied gas. |
| Color | Colorless. |
| Odor | Rotten egg. |
| Odor threshold | Not determined. |
| pH | Not applicable. |
| Melting point/freezing point | -306.4 °F (-188 °C) |
| Initial boiling point and boiling range | -43.6 °F (-42 °C) 14.7 psia |
| Flash point | -155.2 °F (-104.0 °C) |
| Evaporation rate | Not determined. |
| Flammability (solid, gas) | Extremely flammable gas. |
| Upper/lower flammability or explosive limits | |
| Explosive limit - lower (%) | 2.15 % |
| Explosive limit - upper (%) | 9.6 % |
| Vapor pressure | 127 psig (21°C / 70°F) |
| Vapor density | Not determined. |
| Relative density | 0.504 (liquid) 1.5 (vapor) (Air=1) (59 °F (15 °C)) |
| Solubility(ies) | |
| Solubility (water) | Slightly soluble in water. |
| Partition coefficient (n-octanol/water) | 1.77 |
| Auto-ignition temperature | 809.6 °F (432 °C) |
| Decomposition temperature | Not determined. |
| Viscosity | Not applicable. |
| Other information | |
| Density | Not determined. |
| Explosive properties | Not explosive. |
| Kinematic viscosity | Not determined. |
| Molecular weight | 45 g/mol |
| Oxidizing properties | Not oxidizing. |
| Particle size | Not applicable. |
| Percent volatile | 100 % |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | Reacts violently with strong oxidants, nitrites, inorganic chlorides, chlorites and perchlorates causing fire and explosion hazard. |
| Chemical stability | Stable under normal temperature conditions and recommended use. |
| Possibility of hazardous reactions | Polymerization will not occur. May form explosive mixture with air. This product may react with oxidizing agents. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. Halogens. Nitrates. |

Hazardous decomposition products Thermal decomposition of this product can generate carbon monoxide and carbon dioxide. Hydrocarbons.

11. Toxicological information

Information on likely routes of exposure

Inhalation High concentrations: Suffocation (asphyxiant) hazard - if allowed to accumulate to concentrations that reduce oxygen below safe breathing levels. Breathing of high concentrations may cause dizziness, light-headedness, headache, nausea and loss of coordination. Continued inhalation may result in unconsciousness.

Skin contact Contact with liquefied gas may cause frostbite.

Eye contact Contact with liquefied gas may cause frostbite.

Ingestion This material is a gas under normal atmospheric conditions and ingestion is unlikely.

Symptoms related to the physical, chemical and toxicological characteristics Exposure to rapidly expanding gas or vaporizing liquid may cause frostbite ("cold burn"). Very high exposure can cause suffocation from lack of oxygen. Symptoms may include loss of mobility/consciousness. Victim may not be aware of asphyxiation. Asphyxiation may bring about unconsciousness without warning and so rapidly that victim may be unable to protect themselves.

Information on toxicological effects

Acute toxicity Not expected to be acutely toxic.

| Components | Species | Test Results |
|---|--|-------------------------|
| Propane (CAS 74-98-6) | | |
| Acute | | |
| Inhalation | | |
| Gas | | |
| LC50 | Rat | > 80000 ppm, 15 Minutes |
| Propylene (CAS 115-07-1) | | |
| Acute | | |
| Inhalation | | |
| Gas | | |
| LC50 | Rat | > 65000 ppm, 4 Hours |
| Skin corrosion/irritation | Not classified. | |
| Serious eye damage/eye irritation | Not classified. | |
| Respiratory or skin sensitization | | |
| Respiratory sensitization | Not a respiratory sensitizer. | |
| Skin sensitization | This product is not expected to cause skin sensitization. | |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. | |
| Carcinogenicity | Not classifiable as to carcinogenicity to humans. | |
| IARC Monographs. Overall Evaluation of Carcinogenicity | | |
| Propylene (CAS 115-07-1) | 3 Not classifiable as to carcinogenicity to humans. | |
| NTP Report on Carcinogens | | |
| Not listed. | | |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053) | | |
| Not listed. | | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. | |
| Specific target organ toxicity - single exposure | Not classified. | |
| Specific target organ toxicity - repeated exposure | Not classified. | |
| Aspiration hazard | Not relevant, due to the form of the product. | |
| Chronic effects | Exposure over a long period of time may cause central nervous system effects. | |

12. Ecological information

| | |
|--|--|
| Ecotoxicity | The product is not expected to be hazardous to the environment. |
| Persistence and degradability | Not relevant, due to the form of the product. |
| Bioaccumulative potential | Not relevant, due to the form of the product. |
| Partition coefficient n-octanol / water (log Kow) | |
| Propane (CAS 74-98-6) | 2.36 |
| Propylene (CAS 115-07-1) | 1.77 |
| Mobility in soil | Not relevant, due to the form of the product. |
| Other adverse effects | The product contains volatile organic compounds which have a photochemical ozone creation potential. |

13. Disposal considerations

| | |
|--|---|
| Disposal instructions | Use the container until empty. Do not dispose of any non-empty container. Empty containers have residual vapor that is flammable and explosive. Cylinders should be emptied and returned to a hazardous waste collection point. Do not puncture or incinerate even when empty. Dispose in accordance with all applicable regulations. |
| Local disposal regulations | Dispose of in accordance with local regulations. |
| Hazardous waste code | D001: Waste Flammable material with a flash point <140 °F The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose in accordance with all applicable regulations. |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. |

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1075 |
| UN proper shipping name | Petroleum gases, liquefied |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | - |
| Environmental hazards | |
| Marine pollutant | No |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T50 |
| Packaging exceptions | 306 |
| Packaging non bulk | 304 |
| Packaging bulk | 314, 315 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1075 |
| UN proper shipping name | Petroleum gases, liquefied |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Packing group | - |
| Environmental hazards | No |
| ERG Code | 10L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|-----------------------------------|----------------------------|
| UN number | UN1075 |
| UN proper shipping name | PETROLEUM GASES, LIQUEFIED |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Packing group | - |
| Environmental hazards | |
| Marine pollutant | No |

EmS

E-D, S-U

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-------------------------------|---------|
| Butane (CAS 106-97-8) | Listed. |
| Ethyl mercaptan (CAS 75-08-1) | Listed. |
| Propane (CAS 74-98-6) | Listed. |
| Propylene (CAS 115-07-1) | Listed. |

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not listed.

Toxic Substances Control Act (TSCA) All components of the mixture on the TSCA 8(b) inventory are designated "active".

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical Yes

Classified hazard categories Flammable (gases, aerosols, liquids, or solids)
Gas under pressure
Simple asphyxiant
Hazard not otherwise classified (HNOC)

SARA 313 (TRI reporting)

| Chemical name | CAS number | % by wt. |
|---------------|------------|----------|
| Propylene | 115-07-1 | 0 - 10 |

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)
Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. Massachusetts RTK - Substance List

Butane (CAS 106-97-8)
Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

US. New Jersey Worker and Community Right-to-Know Act

Butane (CAS 106-97-8)
Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

US. Pennsylvania Worker and Community Right-to-Know Law

Butane (CAS 106-97-8)

Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

US. Rhode Island RTK

Butane (CAS 106-97-8)
Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Butane (CAS 106-97-8)
Propylene (CAS 115-07-1)

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Industrial Chemicals (AICIS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| Taiwan | Taiwan Chemical Substance Inventory (TCSI) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 05-May-2014
Revision date 21-March-2021
Version # 03
HMIS® ratings Health: 2
Flammability: 4
Physical hazard: 3

NFPA ratings



Disclaimer

All information in this Safety Data Sheet is believed to be accurate and reliable. However, no guarantee or warranty of any kind is made with regard to the accuracy of information or the suitability of the recommendations contained herein. It is the user's responsibility to assess the safety and toxicity of this product under their own conditions of use and to comply with all applicable laws and regulations.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/7/2014 Version no.: 01 Supersedes: (-)

1. Identification of the Mixture and of the Company

Product identifier: **Aervoe Welding Anti-Spatter - Aerosol**

Product name:

887 Welding Anti-Spatter

Relevant identified uses of the substance: Use on various welding and torch cutting devices where weld spatter could be a problem, including MIG and TIG nozzles and tips, electrode holders, fixtures, resistant welding tips, and all types of maintenance/production welding.

Uses advised against: Aervoe #887 Welding Anti-Spatter is not a lubricant, grease, or oil, and warranty does not cover these misuses. Do not apply paint directly over Anti-Spatter film, as paint will not properly adhere.

| | |
|-----------------------------|--|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 001 (0) 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe industries Incorporated |
| For Product Information: | 001 (0) 1-800-227-0196 |
| Emergency telephone number: | 001 (0) 1-800-424-9300 (CHEMTREC – 24 hrs) English Language Service |

2. Hazards identification

Classifications

Physical Hazards: Aerosol - Category 1
Flam. Liq. 2

Health Hazards: Eye Irrit. 2
STOT SE 3

Environmental Hazards: N/AV

Labeling

Signal Word: Warning

Hazard Statements:
H223 – Flammable Aerosol
H225 – Highly flammable liquid and vapour.
H229 - Pressurized container: may burst if heated



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/7/2014 Version no.: 01 Supersedes: (-)

H319 – Causes serious eye irritation.
H336 – May cause drowsiness or dizziness.

Precautionary Statements:

P101 - If medical advice is needed, have product container or label at hand
P102 - Keep out of reach of children
P103 - Read label before use
P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking
P211 - Do not spray on an open flame or other ignition source
P251 - Pressurized container: Do not pierce or burn, even after use
P261 - Avoid breathing dust/fume/gas/mist/vapours/spray
P262 - Do not get in eyes, on skin, or on clothing
P264 - Wash ... thoroughly after handling
P280 - Wear protective gloves/eye protection/face protection

P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.
P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F
P501 - Dispose of contents/container in accordance with local/regional/national/international regulation
P251 - Pressurized container: Do not pierce or burn, even after use



Symbols/Pictograms:

3. Composition / Information on Ingredients

Composition

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|----------------|-----------|------------|---------------|----------------|---|------------------|
| Acetone | Propanone | 67-64-1 | 200-662-2 | 15-40% | Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 | H225, H319, H336 |
| Carbon Dioxide | CO2 | 124-38-9 | 204-696-9 | 1-5% | N/AV | N/AV |

Other Product Information

Chemical Identity: Mixture



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/7/2014 Version no.: 01 Supersedes: (-)

4.) First Aid Measures

| | |
|---|---|
| General Advice: | If symptoms persist, always call a doctor. |
| Inhalation First Aid: | Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately. |
| Skin Contact First Aid: | Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. |
| Eye Contact First Aid: | If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately. |
| Ingestion First Aid: | If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |
| Most Important Symptoms/Effects: | Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects. |

5. Fire Fighting Measures

| | |
|--|---|
| Flammable Properties: | Aerosol |
| Auto Ignition Temperature: | Not Available |
| Suitable extinguishing media: | Carbon dioxide, dry chemical, water spray. |
| Unsuitable extinguishing media: | None known |
| Special hazards arising from the substance or mixture: | None known |
| Hazardous combustion products: | Carbon dioxide, Carbon monoxide |
| Fire & Explosion Hazards: | Closed Containers may rupture due to the buildup of pressure from extreme temperatures. |
| Precautions for fire-fighters: | Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode. |

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.
- 2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/7/2014 Version no.: 01 Supersedes: (-)

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling:

Flammable Aerosol, use in a well ventilated area.
 Do not use near sources of ignition.
 Do not to eat, drink and smoke while working with this material.
 Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
 Storage Temperature: 32° to 120°F (0° to 49°C).
 No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
 Keep away from sources of ignition.
 Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|----------------------|------------|-----------------|------------------|----------------|-----------------|
| Acetone | 67-64-1 | 500ppm | 750ppm | 1000ppm | N/AV |
| Carbon Dioxide | 124-38-9 | 5000ppm | 30000ppm | 5000ppm | N/AV |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/7/2014 Version no.: 01 Supersedes: (-)

***Values are based on the 2014 Guide to Occupational Exposure Values by ACGIH**

9. Information on Basic Physical and Chemical Properties

| | |
|--|---|
| Appearance: Creamy Yellow | Odor: Vanilla odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: <0° F (-18° C) | Evaporation Rate: Slower than n-Butyl Acetate |
| Flammability Solid/Gas: Flammable gas | Upper LEL: 2.5% Lower LEL: 12% |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions

Chemical stability: Stable under normal conditions

Conditions to avoid: Heat and ignition sources

Incompatible materials: Strong Oxidizing Agents

Hazardous decomposition products: Will not occur

11. Toxicological Information

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: (Acetone) LD50: 5800 mg/kg (Rat-Oral)
(Acetone) LC50: 21000 ppm/8 hr (Rat-Inha)

Eye irritation data: N/AV

Skin irritation/sensitization/absorption data: N/AV

Reproductive toxicity data: N/AV

Mutagenicity data: N/AV



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/7/2014 Version no.: 01 Supersedes: (-)

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure:

Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV
IARC: N/AV
OSHA: TLV-A4

* Petroleum distillates may contain chemical carcinogens in limited quantities (< 0.01%). These quantities are determined by the supplier/fraction/purity of the distillate during the manufacturing process. Chemicals that may be present within distillates are listed on California's prop 65 list such as ETHYLBENZENE, BENZENE, and TOLUENE.

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.
Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|--------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference 49 CFR 172.101 |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/7/2014 Version no.: 01 Supersedes: (-)

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|----------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|---|
| UN1950 | Aerosols, Flammable | 2.1 | Not Applicable | Not Applicable | Reference IATA Dangerous Goods Regulation |

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

PROP 65 (CA): WARNING: This product may contain chemicals know to the state of California to cause cancer, birth defects or other reproductive harm.

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 10/7/2014

Supersedes: (-)

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/7/2014 Version no.: 01 Supersedes: (-)

present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.

SAFETY DATA SHEET

MAPP GAS (Petroleum Gas, MAPD)

Section 1. Identification

| | |
|--------------------------------------|---|
| GHS product identifier | : MAPP GAS (Petroleum Gas, MAPD) |
| Other means of identification | : MAP, MAPP, Methylacetylene-Propadiene, Mixture of Methylacetylene and Propadiene |
| Product type | : Liquefied gas |
| Product use | : Synthetic/Analytical chemistry. |
| Synonym | : MAP, MAPP, Methylacetylene-Propadiene, Mixture of Methylacetylene and Propadiene |
| SDS # | : 002015 |
| Supplier's details | : Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253 |
| 24-hour telephone | : 1-866-734-3438 |

Section 2. Hazards identification

| | |
|---|---|
| OSHA/HCS status | : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200). |
| Classification of the substance or mixture | : FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Liquefied gas |

GHS label elements

Hazard pictograms



Signal word : Danger

Hazard statements : Extremely flammable gas.
May form explosive mixtures with air.
Contains gas under pressure; may explode if heated.
May cause frostbite.
May displace oxygen and cause rapid suffocation.

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. Always keep container in upright position. Approach suspected leak area with caution.

Prevention

: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Response

: Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so.

Storage

: Protect from sunlight. Store in a well-ventilated place.

Disposal

: Not applicable.

Hazards not otherwise classified

: Liquid can cause burns similar to frostbite.

Section 3. Composition/information on ingredients

| | |
|--------------------------------------|--|
| Substance/mixture | : Mixture |
| Other means of identification | : MAP, MAPP, Methylacetylene-Propadiene, Mixture of Methylacetylene and Propadiene |
| Product code | : 002015 |

| Ingredient name | % | CAS number |
|------------------|---------|------------|
| propylene | 37 - 55 | 115-07-1 |
| methyl acetylene | 27 - 33 | 74-99-7 |
| 1,2-propadiene | 13 - 15 | 463-49-0 |
| isobutane | 2 - 5 | 75-28-5 |
| N-Butane | 2 - 5 | 106-97-8 |
| Propane | 1 - 5 | 74-98-6 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. To avoid the risk of static discharges and gas ignition, soak contaminated clothing thoroughly with water before removing it. Get medical attention if symptoms occur. In case of contact with liquid, warm frozen tissues slowly with lukewarm water and get medical attention. Do not rub affected area. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if adverse health effects persist or are severe. Ingestion of liquid can cause burns similar to frostbite. If frostbite occurs, get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. As this product rapidly becomes a gas when released, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Liquid can cause burns similar to frostbite.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Ingestion** : Ingestion of liquid can cause burns similar to frostbite.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following: , frostbite
- Inhalation** : No specific data.

Section 4. First aid measures

- Skin contact** : Adverse symptoms may include the following: frostbite
- Ingestion** : Adverse symptoms may include the following: frostbite

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Contains gas under pressure. Extremely flammable gas. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool. If involved in fire, shut off flow immediately if it can be done without risk. If this is impossible, withdraw from area and allow fire to burn. Fight fire from protected location or maximum possible distance. Eliminate all ignition sources if safe to do so.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode. For incidents involving large quantities, thermally insulated undergarments and thick textile or leather gloves should be worn.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : Accidental releases pose a serious fire or explosion hazard. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Section 6. Accidental release measures

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Do not get in eyes or on skin or clothing. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
Use only non-sparking tools. Empty containers retain product residue and can be hazardous. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Eliminate all ignition sources. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F). Keep container tightly closed and sealed until ready for use. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|------------------|--|
| propylene | ACGIH TLV (United States, 3/2017). TWA: 500 ppm 8 hours. |
| methyl acetylene | ACGIH TLV (United States, 1/2005). TWA: 500 ppm 8 hours. Form: All forms |
| | ACGIH TLV (United States, 3/2017). TWA: 1640 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. NIOSH REL (United States, 10/2016). TWA: 1650 mg/m ³ 10 hours. TWA: 1000 ppm 10 hours. OSHA PEL (United States, 6/2016). TWA: 1650 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. OSHA PEL 1989 (United States, 3/1989). TWA: 1650 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. |
| 1,2-propadiene | None. |
| isobutane | NIOSH REL (United States, 10/2016). TWA: 1900 mg/m ³ 10 hours. TWA: 800 ppm 10 hours. |

Section 8. Exposure controls/personal protection

| | |
|----------|--|
| N-Butane | <p>ACGIH TLV (United States, 3/2017). STEL: 1000 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 1900 mg/m³ 10 hours. TWA: 800 ppm 10 hours. OSHA PEL 1989 (United States, 3/1989). TWA: 1900 mg/m³ 8 hours. TWA: 800 ppm 8 hours.</p> |
| Propane | <p>ACGIH TLV (United States, 3/2017). STEL: 1000 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 1800 mg/m³ 10 hours. TWA: 1000 ppm 10 hours. OSHA PEL (United States, 6/2016). TWA: 1800 mg/m³ 8 hours. TWA: 1000 ppm 8 hours. OSHA PEL 1989 (United States, 3/1989). TWA: 1800 mg/m³ 8 hours. TWA: 1000 ppm 8 hours. ACGIH TLV (United States, 3/2017). Oxygen Depletion [Asphyxiant].</p> |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. If contact with the liquid is possible, insulated gloves suitable for low temperatures should be worn. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Section 8. Exposure controls/personal protection

- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.
- Thermal hazards** : If there is a risk of contact with the liquid, all protective equipment worn should be suitable for use with extremely low temperature materials.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Gas. [Liquefied gas]
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : -102.7°C (-152.9°F) This is based on data for the following ingredient: Methyl Acetylene. Weighted average: -152.81°C (-243.1°F)
- Boiling point** : Not available.
- Critical temperature** : Lowest known value: 91.85°C (197.3°F) (Propylene).
- Flash point** : Not available.
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 2%
Upper: 13%
- Vapor pressure** : Not available.
- Vapor density** : Highest known value: 2.1 (Air = 1) (butane). Weighted average: 1.52 (Air = 1)
- Gas Density (lb/ft³)** : Weighted average: 0.11
- Relative density** : Not applicable.
- Solubility** : Not available.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Not applicable.
- Flow time (ISO 2431)** : Not available.
- Molecular weight** : 42 g/mol

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Hazardous reactions or instability may occur under certain conditions of storage or use.
- Conditions to avoid** : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.
- Incompatible materials** : Oxidizers

Section 10. Stability and reactivity

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Hazardous polymerization : May Occur.

Conditions to Avoid: Elevated temperatures and pressures. Polymerization catalysts, such as metal alkyls, can cause uncontrolled polymerization. Contamination with oxygen can cause propadiene to form hazardous peroxides.

INHIBITORS/STABILIZERS

An inhibitor is added to the MAPD mixture to prevent potential unstable peroxide formation. Butanes (iso and/or normal) are also added to the MAPD mixture to prevent potential concentration of the methylacetylene and propadiene from reaching concentration levels that would render the mixture unstable in case of weathering off (evaporation of light components).

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|--------------------------|----------|
| isobutane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| N-Butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| propylene | - | 3 | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Section 11. Toxicological information

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Liquid can cause burns similar to frostbite.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
- Ingestion** : Ingestion of liquid can cause burns similar to frostbite.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following: , frostbite
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following: , frostbite
- Ingestion** : Adverse symptoms may include the following: , frostbite

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Long term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Potential chronic health effects

Not available.

- General** : No known significant effects or critical hazards.
- Carcinogenicity** : No known significant effects or critical hazards.
- Mutagenicity** : No known significant effects or critical hazards.
- Teratogenicity** : No known significant effects or critical hazards.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Section 12. Ecological information

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-----|-----------|
| propylene | 1.77 | - | low |
| methyl acetylene | 0.94 | - | low |
| 1,2-propadiene | 1.45 | - | low |
| isobutane | 2.8 | - | low |
| N-Butane | 2.89 | - | low |
| Propane | 1.09 | - | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT | TDG | Mexico | IMDG | IATA |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1060 | UN1060 | UN1060 | UN1060 | UN1060 |
| UN proper shipping name | Methyl Acetylene and Propadiene mixtures, stabilized | Methyl Acetylene and Propadiene mixtures, stabilized | Methyl Acetylene and Propadiene mixtures, stabilized | Methyl Acetylene and Propadiene mixtures, stabilized | Methyl Acetylene and Propadiene mixtures, stabilized |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Additional information

TDG Classification : Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2).
Explosive Limit and Limited Quantity Index 0.125
ERAP Index 3000
Passenger Carrying Road or Rail Index Forbidden

Section 14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
Clean Air Act (CAA) 112 regulated flammable substances: Propylene; Methyl Acetylene; Propadiene; Isobutane; butane; propane

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Refer to Section 2: Hazards Identification of this SDS for classification of substance.

SARA 313

| | Product name | CAS number | % |
|--|--------------|------------|---------|
| Form R - Reporting requirements | Propylene | 115-07-1 | 37 - 55 |
| Supplier notification | Propylene | 115-07-1 | 37 - 55 |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : The following components are listed: PROPYLENE; PROPENE; PROPYNE; METHYL ACETYLENE; ISOBUTANE; BUTANE; PROPANE

New York : None of the components are listed.

New Jersey : The following components are listed: PROPYLENE; 1-PROPENE; METHYL ACETYLENE; 1-PROPYNE; PROPADIENE; 1,2-PROPADIENE; Isobutane; PROPANE, 2-METHYL-; BUTANE; PROPANE

Pennsylvania : The following components are listed: 1-PROPENE; 1-PROPYNE; PROPANE, 2-METHYL-; BUTANE; PROPANE

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Section 15. Regulatory information

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

Inventory list

| | |
|--------------------------|--|
| Australia | : All components are listed or exempted. |
| Canada | : All components are listed or exempted. |
| China | : Not determined. |
| Europe | : All components are listed or exempted. |
| Japan | : Japan inventory (ENCS): Not determined. Japan inventory (ISHL): Not determined. |
| Malaysia | : Not determined. |
| New Zealand | : All components are listed or exempted. |
| Philippines | : All components are listed or exempted. |
| Republic of Korea | : All components are listed or exempted. |
| Taiwan | : All components are listed or exempted. |
| Thailand | : Not determined. |
| Turkey | : Not determined. |
| United States | : All components are listed or exempted. |
| Viet Nam | : Not determined. |

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | / | 1 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Section 16. Other information

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|--|------------------------------------|
| FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Liquefied gas | Expert judgment Expert judgment |

History

Date of printing : 10/22/2018

Date of issue/Date of revision : 10/22/2018

Date of previous issue : 2/6/2018

Version : 1.01

Key to abbreviations : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
UN = United Nations

References : Not available.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

MATERIAL SAFETY DATA SHEET

Product name: CF 812 Insulating Foam – W&D
Description: Polyurethane Foam
Supplier: Hilti, Inc. P.O. Box 21148, Tulsa, OK 74121
Emergency # (Chem-Trec.): 1 800 424 9300 (USA, PR, Virgin Islands, Canada); 001 703 527 3887 (other countries)

INGREDIENTS AND EXPOSURE LIMITS

| Ingredients: | CAS Number: | PEL: | TLV: | STEL: |
|--|-------------|----------|----------|-------|
| Polymeric diphenylmethane diisocyanate | 9016-87-9 | NE | NE | NE |
| Isobutane | 75-28-5 | NE | 1000 ppm | NE |
| Propane | 074-98-6 | 1000 ppm | 1000 ppm | NE |

Abbreviations: PEL = OSHA Permissible Exposure Limit. TLV = ACGIH Threshold Limit Value.
STEL = Short Term Exposure Limit. C = Ceiling. NE = None Established. NA = Not Applicable

PHYSICAL DATA

| | | | |
|---------------------------------|-----------------------|-----------------------------|-----------------|
| Appearance: | Yellow to tan liquid. | Odor: | Mild. |
| Vapor Density: (air = 1) | Not determined. | Vapor Pressure: | 8.3 bar @ 68° F |
| Boiling Point: | Not determined. | VOC Content: | 2.4 g/l |
| Evaporation Rate: | Not determined. | Solubility in Water: | Not soluble. |
| Specific Gravity: | 0.9-1.1 | pH: | Not determined. |

FIRE AND EXPLOSION HAZARD DATA

| | | | |
|--|---|--------------------------|-----------|
| Flash Point: | Flammable Gas | Flammable Limits: | 0.4 - 32% |
| Extinguishing Media: | CO ₂ , Dry Chemical, Foam, Water | | |
| Special Fire Fighting Proc. | None known for cured foam. Uncured isocyanates react with water to release CO ₂ . | | |
| Unusual Fire and Explosion Hazards: | Extremely flammable. Contains flammable propellants under pressure. Aerosol cans exposed to fire or direct heat can rupture from pressure build-up. | | |

REACTIVITY DATA

| | |
|----------------------------------|--|
| Stability: | Reacts with alcohols, amines, aqueous acids, and alkalis. Reacts with water (moisture) producing CO ₂ . |
| Hazardous Polymerization: | Will not occur. Reacts with water (nonviolently). |
| Decomposition Products: | Thermal decomposition can yield CO, CO ₂ , HCN, HCl, NO _x . |
| Conditions to Avoid: | Temperature extremes will shorten product shelf life; i.e. below 41° F / above 77° F. |

HEALTH HAZARD DATA

| | |
|---|--|
| Known Hazards: | Acute: Eye, skin, and respiratory irritation. Chronic: Respiratory and skin sensitization |
| Signs and Symptoms of Exposure: | Eyes: Can adhere to cornea. Skin: Can adhere to the skin. Can cause irritation and possibly sensitization; e.g. itching, swelling, rashes, etc. Inhalation: Vapor may cause irritation of the breathing tract and sensitization. Sensitization causes an allergic (asthmatic-like) response. Hypersensitive persons may react at very low isocyanate levels. Ingestion: Effects of ingestion have not been determined. Not a likely route of exposure. |
| Routes of Exposure: | Inhalation. Contact. |
| Carcinogenicity: | No ingredients are classified as a carcinogen by IARC, NTP or OSHA. |
| Medical Conditions Aggravated by Exposure: | Eye, skin, and respiratory conditions. |

EMERGENCY AND FIRST AID PROCEDURES

| | |
|--------------------|--|
| Eyes: | Immediately flush with large amounts of water. Contact a physician immediately. |
| Skin: | Wipe off skin immediately with soft cloth. Cured foam can only be removed mechanically. Contact a physician if symptoms occur. |
| Inhalation: | Should symptoms occur, immediately move to fresh air. Call a physician if symptoms persist. Those individuals who develop an allergic reaction should avoid future use of this product. |
| Ingestion: | Seek medical attention immediately. Do not induce vomiting unless directed by a physician. |
| Other: | Referral to a physician is recommended if there is any question about the seriousness of the injury/exposure. If sensitization occurs, future contact with the material should be avoided. |

CONTROL MEASURES AND PERSONAL PROTECTIVE EQUIPMENT

| | |
|--------------------------------|--|
| Ventilation: | Ensure adequate air movement (natural or mechanically induced fresh air movements). |
| Eye Protection: | Goggles recommended; safety glasses with side shields as a minimum. |
| Skin Protection: | Impermeable gloves are recommended. Wear other protective clothing as required to prevent contact with skin. |
| Respiratory Protection: | Not normally required. |

PRECAUTIONS FOR SAFE HANDLING AND USE

| | |
|--|--|
| Handling and Storing Precautions: | Avoid contact with skin, eyes, and respiratory system. Material will adhere to eyes and skin. Contents under pressure. Extremely flammable. Do not apply direct heat to the cans. Before using, remove ignition sources such as flames or equipment / tools that generate sparks. Store in a cool dry place. Do not store in direct sunlight. Keep from freezing. Store between 41° and 77° F. Always wash thoroughly after handling chemical products. For industrial use only. Keep out of reach of children. Follow label / use instructions. |
| Spill Procedures: | Wear appropriate personal protective equipment. CF 812 foam will polymerize (cure) upon contact with air/moisture. Allow product to cure, then remove for disposal. See disposal guidelines below. |

REGULATORY INFORMATION

| | |
|-------------------------------------|---|
| TSCA Inventory Status: | Chemical components listed on TSCA inventory. |
| SARA Title III, Section 313: | This product contains 5 - 25% Polymeric diphenylmethane diisocyanate (CAS # 9016-87-9) which is subject to reporting under Section 313 of SARA Title III (40 CFR Part 372). (Technical note: MDI is not available in cured foam due to reaction of parts A and B upon exposure to air; i.e. when released from the can) |
| DOT Shipping Name: | Limited Quantity - LQ |
| IATA / ICAO Shipping Name: | Aerosols, flammable, Class 2.1, UN 1950 |
| HMIS Codes: | Health 2, Flammability 3, Reactivity 1, PPE B (Goggles, Gloves) |
| EPA Waste Code(s): | D001,D003 (for aerosol cans) |
| Waste Disposal Methods: | Consult with regulatory agencies or your corporate personnel for disposal methods that comply with local, state, and federal safety, health and environmental regulations. |
| Hazard Communication | This MSDS has been prepared in accordance with the Federal OSHA Hazard Communication Standard, 29 CFR1910.1200. |

CONTACTS

| | | | |
|---------------------------------|--|---------------------------|----------------|
| Customer Service: | 1 800 879 8000 | Technical Service: | 1 800 879 8000 |
| Health / Safety: | 1 800 879 6000 | Jerry Metcalf | (x1003704) |
| Emergency # (Chem-Trec): | 1 800 424 9300 (USA, PR, Virgin Islands, Canada); 703 527 3887 (other countries) | | |

The information and recommendations contained herein are based upon data believed to be correct; however, no guarantee or warranty of any kind expressed or implied is made with respect to the information provided.

SECTION: 1 IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY / UNDERTAKING

- 1.1 Product Name: Weldcote Blue Coolant & Weldcote Red Coolant
Product Identification: Coolant
- Product Specification:
- 1.2 Relevant identified uses of the substance or mixture and uses advised against:
- 1.2.1 Relevant identified uses: For welding consumables and related products.
- 1.2.2 Uses advised: Reference the [7. Handling and storage]
- 1.3 Details of the supplier of the safety data sheet:
Supplier: Weldcote Metals Inc.
 842 Oak Grove Rd.
 Kings Mountain, NC 28086
Emergency telephone number: (800) 424-9300 or (704) 739-4115
Email: info@weldcotemetals.com

SECTION: 2 HAZARDS IDENTIFICATION

- 2.1 Classification of the mixture:
 The product is placed on the market in solid form

2.1.1 Classification in accordance with GHS-US

| | |
|----------------|------|
| Acute Toxicity | H302 |
| Eye irritation | H320 |

Label elements:

- 2.2 GHS-US labeling

Hazard Pictograms (GHS-US):



Signal word (GHS-US):

Danger

Hazard statements (GHS-US):

| | |
|-------------|---|
| <u>H302</u> | Harmful if swallowed |
| <u>H320</u> | Causes eye irritation |
| <u>H373</u> | May cause damage to organs (kidney) through prolonged or repeated exposure if swallowed |

Precautionary statements:

| | |
|------------------------|---|
| <u>P260</u> | Do not breathe dust/fume/gas/mist/vapours/spray |
| <u>P264</u> | Wash skin thoroughly after handling |
| <u>P270</u> | So not eat, drink or smoke when using this product. |
| <u>P301+ P312+P330</u> | IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell. Rinse mouth. |
| <u>P314</u> | Get medical advice/attention if you feel unwell. |
| <u>P501</u> | Dispose of contents and container in accordance with local regional/national international regulations. |

- 2.3 Other hazards: No additional information available
- 2.4 Unknown acute toxicity (GHS-US): No data available.

SECTION: 3 COMPOSITION/INFORMATION ON INGREDIENTS

- 3.1 Substances: No data available
 Full Text of H-phrases: see section 16
- 3.2 Mixtures: The mixture contains dangerous substances:

| Substance name | Product Identifier (CAS No) | % Percent | GHS-US classification | |
|-----------------|--|-----------|--------------------------|-------------------|
| Ethylene glycol | C ₂ H ₆ O ₂ | 107-21-1 | 10 - <25 | Acute Tox 4, H302 |

SECTION: 4 FIRST AID MEASURES

- 4.1 Description of first aid measures:
First-aid measures after inhalation: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen and get medical attention.
First-aid measures after skin contact: Flush with water for at least 15 minutes. Seek medical attention if irritation develops or persists.
First-aid measures after eye contact: Immediately flush eyes with water and continue washing for at least 15 minutes. Obtain medical attention if discomfort persists.
First-aid measures after ingestion: Do NOT induce vomiting. Get immediate medical attention.
- 4.2 Most important symptoms and effects, both acute and delayed:
Symptoms/injuries after inhalation: Short-term (acute) overexposure to the gases, fumes, and dusts may include irritation of the eyes, lungs, nose, and throat. Some toxic gases associated with welding may cause pulmonary edema, asphyxiation, and death. Acute overexposure may include signs and symptoms such as watery eyes, nose and throat irritation, headache, dizziness, difficulty in breathing, frequent coughing, or chest pain. The presence of chromium/chromate in fume can cause irritation of nasal membranes and skin. The presence of nickel compounds in fume can cause metallic taste, nausea, tightness of chest, fever, and allergic reaction. Excessive inhalation or ingestion of manganese can produce manganese poisoning. Overexposure to manganese compounds may affect the central nervous system, symptoms of which are languor, sleepiness, muscular weakness, emotional disturbances, and spastic gait resembling Parkinsonism. These symptoms can become progressive and permanent if not treated. Excessive inhalation of fumes may cause "Metal Fume Fever" with Flu-like symptoms such as chills, fever, body aches, vomiting, sweating, etc.
- Symptoms/injuries after skin contact: Dusts may cause irritation.
Symptoms/injuries after eye contact: Causes eye irritation.
Symptoms/injuries after ingestion: Not an anticipated route of exposure during normal product handling. May be harmful if ingested.
- 4.3 Indication of any immediate medical attention and special treatment needed: No data available.

SECTION: 5 FIREFIGHTING MEASURES

- 5.1 Extinguishing media:
Suitable extinguishing media: Use extinguishing media appropriate for surrounding fire.
Unsuitable extinguishing media: No data available.
- 5.2 Special hazards arising from the substance or mixture: Fire may produce irritating or poisonous gases.
Fire hazard: Not flammable
Explosion hazard: None known
- 5.3 Advice for firefighters: In the event of fire, wear self-contained breathing apparatus and full protective gear.

SECTION: 6 ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures:
 - For non-emergency personnel: Wear appropriate personal protective equipment as specified in Section 8. Ensure adequate ventilation.
 - For emergency responders: No data available.
- 6.2 Environmental precautions: Avoid release into the environment. Avoid dispersal of spilled material and contact with soil, ground and surface water drains and sewers.
- 6.3 Methods and material for containment and cleaning up: Take up mechanically. Collect the material in labeled containers and dispose of according to local and regional authority requirements.
- 6.4 Reference to other sections: See Section 7 for information of safe handling. See Section 8 for information on personal protection equipment. See Section 13 for disposal information.

SECTION: 7 HANDLING AND STORAGE

- 7.1 Precautions and safe handling: Welding may produce dust, fumes and gases hazardous to health. Avoid breathing dust, fumes and gases. Use adequate ventilation. Keep away from sources of ignition. Avoid contact with skin, eyes and clothing. Do not eat, drink and smoke in work areas.
- 7.2 Conditions for safe storage, including and incompatibilities: Store in cool, dry and well-ventilated place. Keep away from incompatible materials. Keep away from heat and open flame.
- 7.3 Specific end use(s): For welding consumables and related products.

SECTION: 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

- 8.1 Control parameters: Exposure limits were not established for this product

| Ethylene glycol | (CAS No) 107-21-1 | |
|-----------------|-------------------------------------|-----------|
| USA ACGIH | ACGIH (TWA) (mg/m ³) | 100 mg/m3 |
| USA OSHA | OSHA PEL (TWA) (mg/m ³) | 100 mg/m3 |

- 8.2 Exposure controls:
 - Appropriate engineering controls: local exhaust and general ventilation must be adequate to meet exposure standards.
 - Hand protection: Wear welding gloves.
 - Eye protection: Wear helmet or face shield with filter lens of appropriate shade number. See ANSI/ASC Z49.1 Section 4.2. Provide protective screens and flash goggles, if necessary, to shield others.
 - Skin and body protection: Wear head and body protection, which help to prevent injury from radiation, sparks, flame and electrical shock. See ANSI Z49.1. At a minimum this includes welder's gloves and a protective face shield, and may include arm protectors, aprons, hats, shoulder protection, as well as dark substantial clothing. Train the employee not to touch live electrical parts and to insulate him/herself from work and ground. Welders should not wear short sleeve shirts or short pants.
 - Respiratory protection: If exposure limits are exceeded or irritation is experienced, NIOSH approved respiratory protection should be worn.

SECTION: 9 PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties:

| | |
|--|--------------------------------|
| Physical state: | - liquid |
| Appearances: | - Clear Colorless liquid |
| Color: | - Clear |
| Odor: | - Odorless |
| Odor threshold: | - Not determined |
| pH: | - 6 |
| Relative evaporation rate (butyl acetate = 1): | - No data available |
| Melting point: | - (-7°C) |
| Freezing point: | - No data available |
| Initial boiling point and boiling range: | - (93°C) |
| Flash point: | - No data available |
| Self ignition temperature: | - Product is not self igniting |
| Decomposition temperature: | - No data available |
| Flammability (solid, gas): | - No data available |
| Vapour pressure: | - 24(MMHG) |
| Relative vapour density at 20· C: | - 1.025 (Air = 1) |
| Relative density: | - No data available |
| Solubility(ies) | - Fully miscible |
| Log Pow: | - No data available |
| Log Kow: | - No data available |
| Viscosity, kinematic: | - No data available |
| Viscosity, dynamic: | - No data available |
| Explosive properties: | - No data available |
| Oxidizing properties: | - No data available |
| Explosive limits: | - No data available |

9.2 Other information: No additional information available.

SECTION: 10 STABILITY AND REACTIVITY

10.1 Reactivity: No additional information available.

10.2 Chemical stability: The product is stable under normal conditions. When using it may produce dangerous fumes and gases.

10.3 Possibility of hazardous reactions: Will not occur.

10.4 Conditions to avoid: None

10.5 Incompatible materials: None

10.6 Hazardous decomposition products: Welding fumes and gases cannot be classified simply. The composition and quantity of both are dependent upon the metal being welded, the process, procedure and welding consumables used. Other conditions which also influence the composition and quantity of the fumes and gases to which workers may be exposed include: coating on the metal being welded (i.e. paint, painting, galvanizing), the number of welders, the volume of the work area, the quality and the amount of ventilation, the position of the welders head with respect to the fume plume, as well as the presence of contaminants in the atmosphere (such as chlorinated hydrocarbon vapors from the cleaning and degreasing activities).

When an electrode is consumed, the fume and gas decomposition products generated are different in percent and form from the ingredients listed in Section 3. Fume and gas decomposition, and not the ingredients in the electrode, are important. The concentration of a given fume or gas component may decrease or increase by many times the original concentration. Also, new compounds not in the electrodes may form. Decomposition products of normal operation include those originating from the volatilization, reaction or oxidation of the materials shown in Section 3, plus those from the base metal coating, etc., as noted above. Reasonable expected fume constituents of this product would include: Complex oxides of iron, manganese, silicon, chromium, nickel, columbium, molybdenum, copper, carbon dioxide, carbon monoxide, ozone and nitrogen Oxides. Some products will also contain antimony, barium, molybdenum, aluminum, columbium, magnesium, strontium, tungsten, and or zirconium. Fume limit for chromium, nickel and or manganese may be reached before limit of 5 mg/m3 of general welding fumes is reached.

Gaseous reaction products may include carbon monoxide and carbon dioxide. Ozone and nitrogen oxides may be formed by the radiation from the arc. Determine the composition and quantity of fumes and gases to which workers are exposed by taking an air sample from inside the welder's helmet if worn or in the worker's breathing zone. Improve ventilation if exposures are not below limits. See ANSI/AWS F1.1, F1.3 and F1.5, available from the American Welding Society, 550 N.W. Lejeune Road, Miami, FL 33126.

SECTION: 11 TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects:

Acute toxicity: Harmful if swallowed

| Substance name | CAS number | LD50 oral rat (mg/kg) | ATE (oral) (mg/kg) | Comments |
|---|------------|--|--------------------|----------|
| Ethylene glycol | 107-21-1 | 4700 mg/kg | 10,626 mg/kg | |
| Skin corrosion/irritation: | | May cause skin irritation | | |
| Serious eye damage/irritation: | | May cause eye irritation | | |
| Respiratory or skin sensitization: | | May cause an allergic skin reaction. | | |
| Germ cell mutagenicity: | | May cause damage to organs | | |
| Carcinogenicity: | | Not classified | | |
| Reproductive toxicity | | Not classified | | |
| Specific target organ toxicity (single exposure): | | Not classified | | |
| Specific target organ toxicity (repeated exposure): | | Causes damage to organs through prolonged or repeated exposure | | |

SECTION: 12 ECOLOGICAL INFORMATION

12.1 Toxicity:

Ecology - general: No data available.

| Ethylene glycol | (CAS No) 107-21-1 |
|--------------------------------|---|
| LC50 fishes 1 | 18,500 mg/l (Exposure time: 96 h - species: Oncorhynchus mykiss) |
| EC50 Daphnia 1 | 74,000 mg/l (Exposure time: 24 h - species: Daphnia magna [static]) |
| EC50 other aquatic organisms 1 | 10,000 mg/l (Exposure time: 96 h - species: Leuciscus idus [static]) |
| LC50 fish 2 | 32,000 mg/l (Exposure time: 96 h - species: Pimephales promelas ([semi-static]) |

12.2 Persistence and degradability: No additional information available.

12.3 Bioaccumulative potential: No additional information available.

12.4 Mobility in soil: No additional information available.

12.5 Other adverse effects: No additional information available.

SECTION: 13 DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods: Dispose of in accordance with local and national regulations.

Waste disposal recommendations: Dispose of contents/container in accordance with local/regional/national/international regulations.

SECTION: 14 TRANSPORT INFORMATION

In accordance with DOT / ADR / RID / ADNR / IMDG / ICAO / IATA

14.1 UN Number: Not a dangerous good in sense of transport regulations

14.2 UN proper shipping name: Not applicable

SECTION: 15 REGULATORY INFORMATION

15.1 US Federal Regulations:

| | |
|---|-------------------|
| Ethylene glycol | (CAS No) 107-21-1 |
| Listed on the United States TSCA (Toxic Substances Control Act) Inventory | |
| Listed on SARA Section 313 (Specific toxic chemical listings) | |
| SARA Section 313 - Emission Reporting 1.0% (dust or fume only) | |

15.2 US State Regulations:

| | | | | |
|---|---|---|---|-----------------------------------|
| Ethylene glycol | | (CAS No) 107-21-1 | | |
| U.S. - California - Proposition 65 - Carcinogens List | U.S. - California - Proposition 65 - Developmental Toxicity | U.S. California - Proposition 65 - Reproductive Toxicity - Female | U.S. California - Proposition 65 - Reproductive Toxicity - Male | No Significance risk level (NSRL) |
| Yes | Yes | Yes | Yes | |

| | |
|--|-------------------|
| Ethylene glycol | (CAS No) 107-21-1 |
| U.S. - Massachusetts - Right To Know List | |
| U.S. - Minnesota - Hazardous Substance List | |
| U.S. - New Jersey - Right to Know Hazardous Substance List | |
| U.S. - Pennsylvania - RTK (Right to Know) List | |

SECTION: 16 OTHER INFORMATION

Full text of H-phrases:

| | |
|---------------|--|
| Carc. 1A | Carcinogenicity, Category 1A |
| Eye Irrit. 2A | Serious eye damage/eye irritation Category 2A |
| H315 | Causes skin irritation |
| H319 | Causes serious eye irritation |
| H335 | May cause respiratory irritation |
| H336 | May cause drowsiness or dizziness |
| H351 | Suspected of causing cancer |
| H373 | May cause damage to organs through prolonged or repeated exposure. |



- NFPA health hazard: 2 – Exposure could cause irritation but only minor residual injury even if no treatment is given.
- NFPA fire hazard: 0 – Materials that will not burn.
- MFPA reactivity: 0– Normally stable, even under fire exposure conditions, and are not reactive with water


HMIS III Rating

- Health: 2 - Moderate Hazard
- Flammability: 0 - Minimal Hazard
- Physical: 1 - Moderate Hazard

We believe that the information contained herein is believed to be true and accurate as of the date of this SOS. All statements or suggestions are made without any warranty, expressed or implied, regarding the accuracy of the information, the hazard connected with the use of this material or the results to be obtained for use thereof. As the condition or methods of use are beyond our control, we do not assume any responsibility and expressly disclaim any liability for any use of this material. It is the user's obligation to determine the conditions of safe use of these products.

All chemical products can in fact present unknown risks to health, safety and / or the environment, even in relation to the different operating conditions, and they must therefore be used with care. For this reason we cannot guarantee that the risk described in this form are the only foreseeable risks. The user must therefore satisfy himself as to the particular conditions under which it is intended to be use in. Moreover, it must be noted that the user is obliged to comply with all the legislative, administrative and regulatory provisions regarding the product and its use in terms of occupational hygiene and safety, and environmental protection, apart from the information given in the form, given purely as guidance.

Technical Department



| | |
|---------------------|---|
| Health | 2 |
| Fire | 3 |
| Reactivity | 0 |
| Personal Protection | H |

Material Safety Data Sheet Acetone MSDS

Section 1: Chemical Product and Company Identification

Product Name: Acetone

Catalog Codes: SLA3502, SLA1645, SLA3151, SLA3808

CAS#: 67-64-1

RTECS: AL3150000

TSCA: TSCA 8(b) inventory: Acetone

CI#: Not applicable.

Synonym: 2-propanone; Dimethyl Ketone; Dimethylformaldehyde; Pyroacetic Acid

Chemical Name: Acetone

Chemical Formula: C₃H₆O

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

| Name | CAS # | % by Weight |
|---------|---------|-------------|
| Acetone | 67-64-1 | 100 |

Toxicological Data on Ingredients: Acetone: ORAL (LD50): Acute: 5800 mg/kg [Rat]. 3000 mg/kg [Mouse]. 5340 mg/kg [Rabbit]. VAPOR (LC50): Acute: 50100 mg/m 8 hours [Rat]. 44000 mg/m 4 hours [Mouse].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Classified Reproductive system/toxin/female, Reproductive system/toxin/male [SUSPECTED]. The substance is toxic to central nervous system (CNS). The substance may be toxic to kidneys, the reproductive system, liver, skin. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Get medical attention.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 465°C (869°F)

Flash Points: CLOSED CUP: -20°C (-4°F). OPEN CUP: -9°C (15.8°F) (Cleveland).

Flammable Limits: LOWER: 2.6% UPPER: 12.8%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Highly flammable in presence of open flames and sparks, of heat.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Slightly explosive in presence of open flames and sparks, of oxidizing materials, of acids.

Fire Fighting Media and Instructions:

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog.

Special Remarks on Fire Hazards: Vapor may travel considerable distance to source of ignition and flash back.

Special Remarks on Explosion Hazards:

Forms explosive mixtures with hydrogen peroxide, acetic acid, nitric acid, nitric acid + sulfuric acid, chromic anhydride, chromyl chloride, nitrosyl chloride, hexachloromelamine, nitrosyl perchlorate, nitryl perchlorate, permonosulfuric acid, thiodiglycol + hydrogen peroxide, potassium ter-butoxide, sulfur dichloride, 1-methyl-1,3-butadiene, bromoform, carbon, air, chloroform, thitriazylperchlorate.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

Large Spill:

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage**Precautions:**

Keep locked up.. Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, reducing agents, acids, alkalis.

Storage:

Store in a segregated and approved area (flammables area) . Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Keep away from direct sunlight and heat and avoid all possible sources of ignition (spark or flame).

Section 8: Exposure Controls/Personal Protection**Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 500 STEL: 750 (ppm) from ACGIH (TLV) [United States] TWA: 750 STEL: 1000 (ppm) from OSHA (PEL) [United States] TWA: 500 STEL: 1000 [Australia] TWA: 1185 STEL: 2375 (mg/m3) [Australia] TWA: 750 STEL: 1500 (ppm) [United Kingdom (UK)] TWA: 1810 STEL: 3620 (mg/m3) [United Kingdom (UK)] TWA: 1800 STEL: 2400 from OSHA (PEL) [United States] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Fruity. Mint-like. Fragrant. Ethereal

Taste: Pungent, Sweetish

Molecular Weight: 58.08 g/mole

Color: Colorless. Clear

pH (1% soln/water): Not available.

Boiling Point: 56.2°C (133.2°F)

Melting Point: -95.35 (-139.6°F)

Critical Temperature: 235°C (455°F)

Specific Gravity: 0.79 (Water = 1)

Vapor Pressure: 24 kPa (@ 20°C)

Vapor Density: 2 (Air = 1)

Volatility: Not available.

Odor Threshold: 62 ppm

Water/Oil Dist. Coeff.: The product is more soluble in water; $\log(\text{oil/water}) = -0.2$

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water.

Solubility: Easily soluble in cold water, hot water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Excess heat, ignition sources, exposure to moisture, air, or water, incompatible materials.

Incompatibility with various substances: Reactive with oxidizing agents, reducing agents, acids, alkalis.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Dermal contact. Eye contact. Inhalation.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 3000 mg/kg [Mouse]. Acute toxicity of the vapor (LC50): 44000 mg/m³ 4 hours [Mouse].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. DEVELOPMENTAL TOXICITY: Classified Reproductive system/toxin/female, Reproductive system/toxin/male [SUSPECTED]. Causes damage to the following organs: central nervous system (CNS). May cause damage to the following organs: kidneys, the reproductive system, liver, skin.

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans:

May affect genetic material (mutagenicity) based on studies with yeast (*S. cerevisiae*), bacteria, and hamster fibroblast cells. May cause reproductive effects (fertility) based upon animal studies. May contain trace amounts of benzene and formaldehyde which may cancer and birth defects. Human: passes the placental barrier.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: May cause skin irritation. May be harmful if absorbed through the skin. Eyes: Causes eye irritation, characterized by a burning sensation, redness, tearing, inflammation, and possible corneal injury. Inhalation: Inhalation at high concentrations affects the sense organs, brain and causes respiratory tract irritation. It also may affect the Central Nervous System (behavior) characterized by dizziness, drowsiness, confusion, headache, muscle weakness, and possibly motor incoordination, speech abnormalities, narcotic effects and coma. Inhalation may also affect the gastrointestinal tract (nausea, vomiting). Ingestion: May cause irritation of the digestive (gastrointestinal) tract (nausea, vomiting). It may also

affect the Central Nervous System (behavior), characterized by depression, fatigue, excitement, stupor, coma, headache, altered sleep time, ataxia, tremors as well as the blood, liver, and urinary system (kidney, bladder, ureter) and endocrine system. May also have musculoskeletal effects. Chronic Potential Health Effects: Skin: May cause dermatitis. Eyes: Eye irritation.

Section 12: Ecological Information

Ecotoxicity:

Ecotoxicity in water (LC50): 5540 mg/l 96 hours [Trout]. 8300 mg/l 96 hours [Bluegill]. 7500 mg/l 96 hours [Fathead Minnow]. 0.1 ppm any hours [Water flea].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The product itself and its products of degradation are not toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 3: Flammable liquid.

Identification: : Acetone UNNA: 1090 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause reproductive harm (male) which would require a warning under the statute: Benzene California prop. 65: This product contains the following ingredients for which the State of California has found to cause birth defects which would require a warning under the statute: Benzene California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Benzene, Formaldehyde Connecticut hazardous material survey.: Acetone Illinois toxic substances disclosure to employee act: Acetone Illinois chemical safety act: Acetone New York release reporting list: Acetone Rhode Island RTK hazardous substances: Acetone Pennsylvania RTK: Acetone Florida: Acetone Minnesota: Acetone Massachusetts RTK: Acetone Massachusetts spill list: Acetone New Jersey: Acetone New Jersey spill list: Acetone Louisiana spill reporting: Acetone California List of Hazardous Substances (8 CCR 339): Acetone TSCA 8(b) inventory: Acetone TSCA 4(a) final test rules: Acetone TSCA 8(a) IUR: Acetone

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F). CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R11- Highly flammable. R36- Irritating to eyes. S9- Keep container in a well-ventilated place. S16- Keep away from sources of ignition - No smoking. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 3

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 1

Flammability: 3

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information**References:**

-Material safety data sheet issued by: la Commission de la Sant  et de la S curit  du Travail du Qu bec. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II. -Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. LOLI, RTECS, HSDB databases. Other MSDSs

Other Special Considerations: Not available.

Created: 10/10/2005 08:13 PM

Last Updated: 11/06/2008 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

1.) Identification of the Mixture and of the Company

Product identifier: **Buttercutt Cutting/Tapping Compound - Bulk**

Product name:

5040 Buttercutt Cutting/Tapping Compound

5041 Buttercutt Cutting/Tapping Compound

Relevant identified uses of the substance: Use for boring, drilling, planning, milling, sawing, tapping, and any other close tolerance operations

Uses advised against: Poorly ventilated areas

| | |
|-----------------------------|---|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe industries Incorporated |
| For Product Information: | 1-800-227-0196 |
| Emergency telephone number: | 1-800-424-9300 (CHEMTREC – 24 hrs) |

2. Hazards identification

Classifications

This chemical does not meet the hazardous criteria set forth by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200). However, this Safety Data Sheet (SDS) contains valuable information critical to the safe handling and proper use of this product. This SDS should be retained and available for employees and other users of this product.

Physical Hazards: N/AV

Health Hazards: N/AV

Environmental Hazards: N/AV

Labeling

Signal Word: N/AV

Hazard Statements: N/AV

Precautionary Statements: P101 - If medical advice is needed, have product container or label at hand
P102 - Keep out of reach of children
P103 - Read label before use



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking

P211 - Do not spray on an open flame or other ignition source

P261 - Avoid breathing dust/fume/gas/mist/vapours/spray

P262 - Do not get in eyes, on skin, or on clothing

P264 - Wash ... thoroughly after handling

P280 - Wear protective gloves/eye protection/face protection

P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.

P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F

P501 - Dispose of contents/container in accordance with local/regional/national/international regulation

Symbols/Pictograms: N/AV

3. Composition / Information on Ingredients

Composition

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|------------------------|----------|------------|---------------|----------------|-----------------|--------|
| Non regulated material | N/AV | N/AV | N/AV | N/AV | N/AV | N/AV |

Other Product Information

Chemical Identity: Mixture

4.) First Aid Measures

General Advice:

If symptoms persist, always call a doctor.

Inhalation First Aid:

Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately.

Skin Contact First Aid:

Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

Eye Contact First Aid: If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately.

Ingestion First Aid: If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately.

Most Important Symptoms/Effects: Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects.

5. Fire Fighting Measures

Flammable Properties: Non-flammable
Auto Ignition Temperature: Not Available
Suitable extinguishing media: Carbon dioxide, dry chemical, water spray.
Unsuitable extinguishing media: None known
Special hazards arising from the substance or mixture: None known
Hazardous combustion products: Carbon dioxide, Carbon monoxide
Fire & Explosion Hazards: Closed Containers may rupture due to the buildup of pressure from extreme temperatures.

Precautions for fire-fighters: Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.
- 2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling: Non-flammable liquid, use in a well ventilated area.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

Do not use near sources of ignition.
Do not to eat, drink and smoke while working with this material.
Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
Storage Temperature: 32° to 120°F (0° to 49°C).
No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
Keep away from sources of ignition.
Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|------------------------|------------|-----------------|------------------|----------------|-----------------|
| Non regulated material | N/AV | N/AV | N/AV | N/AV | N/AV |

*Values are based on the 2014 Guide to Occupational Exposure Values by ACGIH

9. Information on Basic Physical and Chemical Properties

| | |
|--|-----------------------------------|
| Appearance: Amber oily liquid | Odor: Fatty odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: 600° F (316° C) | Evaporation Rate: Not Available0 |
| Flammability Solid/Gas: Non-flammable liquid | Upper LEL: N/AV Lower LEL: N/AV |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

| | |
|--|---------------------------------|
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions

Chemical stability: Stable under normal conditions

Conditions to avoid: Heat and ignition sources

Incompatible materials: Strong Oxidizing Agents

Hazardous decomposition products: Will not occur

11. Toxicological Information

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: N/AV

Eye irritation data: N/AV

Skin irritation/sensitization/absorption data: N/AV

Reproductive toxicity data: N/AV

Mutagenicity data: N/AV

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure:

Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV

IARC: N/AV

OSHA: N/AV



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

* Petroleum distillates may contain chemical carcinogens in limited quantities (< 0.01%). These quantities are determined by the supplier/fraction/purity of the distillate during the manufacturing process. Chemicals that may be present within distillates are listed on California's prop 65 list such as ETHYLBENZENE, BENZENE, and TOLUENE.

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.

Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------|
| Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Reference 49 CFR 172.101 |

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|------------------------|------------------------|------------------------|------------------------|------------------------|----------------------------|
| Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|------------------------|------------------------|------------------------|------------------------|------------------------|---|
| Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Non Regulated Material | Reference IATA Dangerous Goods Regulation |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/1/18 Version no.: 02 Supersedes: (9/8/2014)

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 10/1/18

Supersedes: (9/8/2014)

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.



GHS SAFETY DATA SHEET

Date Revised: JUN 2018
Supersedes: MAR 2017

WELD-ON® 725™ Wet 'R Dry™ Low VOC Cement for PVC Plastic Pipe

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 725™ Wet 'R Dry™ Low VOC Cement for PVC Plastic Pipe
PRODUCT USE: Low VOC Solvent Cement for PVC Plastic Pipe
SUPPLIER:
MANUFACTURER: IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300
EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | | Environmental | | Physical | |
|---------------------|------------|-------------------|------------|------------------|------------|
| Acute Toxicity: | Category 4 | Acute Toxicity: | None Known | Flammable Liquid | Category 2 |
| Skin Irritation: | Category 3 | Chronic Toxicity: | None Known | | |
| Skin Sensitization: | NO | | | | |
| Eye: | Category 2 | | | | |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 1B

| Hazard Statements | Precautionary Statements |
|--|--|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer EUH019: May form explosive peroxides | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P337+P313: Get medical advice/attention P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH | CONCENTRATION |
|---------------------------|----------|-----------|-------------------------|---------------|
| | | | Pre-registration Number | % by Weight |
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 45 - 60 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 4 - 15 |
| Acetone | 67-64-1 | 200-662-2 | 05-2116297713-35-0000 | 14 - 25 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.
Likely Routes of Exposure: Inhalation, Eye and Skin Contact
Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.
Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. **HMIS** **NFPA** **0-Minimal**
Unsuitable Extinguishing Media: Water spray or stream. **Health** **2** **2** **1-Slight**
Exposure Hazards: Inhalation and dermal contact **Flammability** **3** **3** **2-Moderate**
Combustion Products: Oxides of carbon, hydrogen chloride and smoke **Reactivity** **0** **0** **3-Serious**
PPE **B** **4-Severe**
Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL | OSHA PEL-Ceiling | CAL/OSHA PEL | CAL/OSHA Ceiling | CAL/OSHA STEL |
|------------------|---------------------------|-----------|------------|----------|-----------|------------------|--------------|------------------|---------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Acetone | 500 ppm | 750 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® 725™ Wet 'R Dry™ Low VOC Cement for PVC Plastic Pipe

Date Revised: JUN 2018
Supersedes: MAR 2017

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|---|-------------------------------|---|
| Appearance: | Aqua Blue or Clear, medium syrupy liquid | Odor Threshold: | 1 ppm (Acetone) |
| Odor: | Ketone | Boiling Range: | 56°C (133°F) to 80°C (176°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 56°C (133°F) Based on first boiling component: Acetone | Flammability Limits: | LEL: 1.4% based on MEK UEL: 12.8% based on Acetone |
| Flash Point: | -20°C (-4°F) TCC based on Acetone | Vapor Pressure: | 190 mm Hg @ 20°C (68°F) Acetone |
| Specific Gravity: | 0.924 @23°C (73°F) | Vapor Density: | >2.0 (Air = 1) |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Other Data: Viscosity: | Medium bodied |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 510g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Acetone | Oral: 5800 mg/kg (rat) | Inhalation 50,100 mg/m ³ (rat) | STOT SE3 |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|--|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 510g/l. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

| EXCEPTION for Ground Shipping |
|--|
| DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package. |
| Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" . |

| TDG INFORMATION | |
|--------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|-----------------------------|--|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R36/37: Irritating to eyes and respiratory system. | | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness |
| Safety Phrases: | S2: Keep out of the reach of children S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. | | S25: Avoid contact with eyes. S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 6/28/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for PVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

MATERIAL SAFETY DATA SHEET

MSDS 0011

Section 1 -- PRODUCT AND COMPANY IDENTIFICATION

| | | HMIS CODES |
|---------------------|--|--|
| PRODUCT NAME | RectorSeal No. 5 | Health 1 Flammability 2 Reactivity 0 |
| PRODUCT CODES | 25112, 25191, 25271, 25300, 25431, 25551, 25552, 25631, 25633, 25780, 25790, 25793 | PPI B |
| CHEMICAL FAMILY | Organic | |
| USE | Pipe Thread Sealant | |
| MANUFACTURER'S NAME | The RectorSeal Corporation 2601 Spenwick Drive Houston, Texas 77055 USA | EMERGENCY TELEPHONE NO. Chemtrec 24 Hours (800)424-9300 USA (703)527-3887 International |
| DATE OF VALIDATION | January 9, 2013 | TECHNICAL SERVICE TELEPHONE NO. (800)231-3345 or (713)263-8001 |
| DATE OF PREPARATION | January 9, 2013 | |

Section 2 -- HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

OSHA Hazards

Combustible

TARGET ORGANS

Not Classified

GHS CLASSIFICATION

PHYSICAL HAZARDS

Combustible liquid (Category 4)

HEALTH HAZARDS

Acute Toxicity:

Oral: Not Classified

Dermal: Not Classified

Inhalation: Not Classified

Skin Corrosion/Irritation: Not Classified

Serious Eye Damage/Eye Irritation: Not Classified

Skin Sensitization: Not Classified

Respiratory Sensitization: Not Classified

Germ Cell Mutagenicity: Not Classified

Carcinogenicity: See Section 11

Reproductive Toxicology: Not Classified

Target Organ Systemic Toxicity - Single Exposure: Not Classified

Target Organ Systemic Toxicity - Repeated Exposure: Not Classified

Aspiration Toxicity: Not Classified

GHS Label elements, including precautionary statements

Pictogram: Harmful / Irritant

Signal Word: Warning

Hazard Statements

H303 - May be harmful if swallowed.

H313 - May be harmful in contact with skin.

H335 + H336 - May cause respiratory irritation, and drowsiness or dizziness.

Precautionary Statements

P102 - Keep out of reach of children.

P210 - Keep away from heat/sparks/open flames/hot surfaces. - No smoking

P240 - Ground/Bond container and receiving equipment

P261 - Avoid breathing dust/fume/gas/mist/vapors/spray

P262 - Do not get in eyes, on skin, or on clothing.

P264 - Wash hands thoroughly after handling.

P280 - Wear protective gloves/protective clothing/eye protection/face protection.

P301 + P310 - IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

P305 + P351 + P338 - IF IN EYES: Rinse cautiously with water for several minutes.

Remove contact lenses, if present and easy to do. Continue rinsing.

P362 - Take off contaminated clothing and wash before reuse.

EUH066 - Repeated exposure may cause skin dryness or cracking

Precautionary Statements - EU No. 1272/2008

SUMMARY OF ACUTE HAZARDS

Irritation to eyes, nose and throat; drowsiness, narcosis, tremors and other CNS effects at high concentration.

ROUTE OF EXPOSURE, SIGNS AND SYMPTOMS

INHALATION

Nasal and respiratory irritation, dizziness, narcosis, headache, nausea, CNS depression and unconsciousness.

EYE CONTACT

Watering, blurred vision, inflammation and irritation which can result in corneal injury.

SKIN CONTACT

Irritation, dermatitis.

INGESTION

Nausea, vomiting; CNS depression; irritation of gastrointestinal tract, liver and peritoneal wall; lung congestion.

SUMMARY OF CHRONIC HAZARDS

Skin irritation and dermatitis. Possible liver and kidney damage.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Individuals with pre-existing or chronic diseases of the eyes, skin, respiratory system, cardiovascular system, gastrointestinal system, liver or kidneys may have increased susceptibility to excessive exposures.

Section 3 -- COMPOSITION/INFORMATION ON INGREDIENTS

INGREDIENT: Diacetone Alcohol
PERCENTAGE BY WEIGHT: 20-30
CAS NUMBER: 123-42-2
EC# : 204-626-7

Section 4 -- FIRST AID MEASURES

If INHALED: If overcome by exposure, remove victim to fresh air immediately. Give oxygen or artificial respiration as needed. Obtain emergency medical attention. Prompt action is essential.
If on SKIN: Wash with soap and water. If irritation occurs, seek medical attention.
If in EYES: Flush eyes with large amounts of water for 15 minutes. Get medical attention.
If SWALLOWED: If swallowed, call a physician immediately. Only induce vomiting at the instruction of a physician. Never give anything by mouth to an unconscious person.

Section 5 -- FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA
Foam, dry chemical, carbon dioxide or water fog.
SPECIAL FIRE FIGHTING PROCEDURES: Wear self-contained breathing apparatus (SCBA) and other protective clothing. Hazardous decomposition products possible (see Section 10).
UNUSUAL FIRE AND EXPLOSION HAZARDS: Combustible - moderate flash point. Vapors heavier than air and may travel along the ground or to low spots at considerable distances to a source of ignition resulting in potential flashback. Burning liquid may float on water. Heat may build up pressure and rupture containers.

Section 6 -- ACCIDENTAL RELEASE MEASURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: Remove all sources of ignition. Use absorbent materials to prevent footing hazard and to contain. Ventilate area with natural or explosion-proof, forced air ventilation. Avoid flushing into sewers, drains, waterways, and soil. Wear protective clothing and respiratory protection during cleanup.

Section 7 -- HANDLING AND STORAGE

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING: Keep container closed and upright when not in use. Do not store near heat, sparks, or open flames.
OTHER PRECAUTIONS: Avoid prolonged or repeated contact with skin or clothing. Empty containers may contain residues; treat as if full and observe all products precautions. Do not reuse empty containers.
KEEP OUT OF REACH OF CHILDREN.

Section 8 -- EXPOSURE CONTROLS/PERSONAL PROTECTION

Table with 2 columns: INGREDIENT, UNITS. Diacetone Alcohol, ACGIH TLV 50 ppm, OSHA PEL 50 ppm.

RESPIRATORY PROTECTION (SPECIFY TYPE): In confined poorly ventilated areas, use NIOSH/MSHA approved air purifying or supplied air purifying or supplied air respirators.
VENTILATION - LOCAL EXHAUST: Acceptable
SPECIAL: Explosion-proof equipment.
MECHANICAL (GENERAL): Preferable
OTHER: N/A
PROTECTIVE GLOVES: Wear rubber gloves.
EYE PROTECTION: Chemical splash goggles (ANSI Z-87.1 or equivalent)
OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Coveralls recommended.
WORK/HYGIENIC PRACTICES: Where use can result in skin contact, wash exposed areas thoroughly before eating, drinking, smoking, or leaving work area. Launder contaminated clothing before reuse.

Section 9 -- PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: 322 F (161 C) @ 760mm Hg
SPECIFIC GRAVITY (H20 = 1): 1.38
VAPOR PRESSURE (mm Hg): 0.3 @ 68 F (20 C)
MELTING POINT: N/A
VAPOR DENSITY (AIR = 1): 1.1
EVAPORATION RATE (ETHYL ACETATE = 1): 0.14
APPEARANCE/ODOR: Yellow Paste/Mild Odor
SOLUBILITY IN WATER: 23%
VOLATILE ORGANIC COMPOUNDS(VOC)Content (Theoretical Percentage By Weight): 23% or (317 g/L)
Flash POINT: 150 F (65 C) SETA CC
LOWER EXPLOSION LIMIT: N/D
UPPER EXPLOSION LIMIT: N/D

Section 10 -- STABILITY AND REACTIVITY

STABILITY: Stable
CONDITIONS TO AVOID: Heat, sparks, open flames, and strong oxidizing. Temperatures above 500 F (260 C).
INCOMPATIBILITY (MATERIALS TO AVOID): Gaseous oxygen, strong oxidizing materials, molten alkali metals.
HAZARDOUS DECOMPOSITION PRODUCTS: CO, CO2 and fragmented hydrocarbons.
HAZARDOUS POLYMERIZATION: Will not occur.

Section 11 -- TOXICOLOGY INFORMATION

CHRONIC HEALTH HAZARDS

No ingredients in this product is an IARC, NTP or OSHA Lister carcinogen.

TOXICOLOGY DATA

Ingredient Name

Diacetone Alcohol

Oral-Rat LD50:4000 mg/kg
Inhalation-Human TCLo: 100 ppm

Section 12 -- Ecological Information

ECOLOGICAL DATA

Ingredient Name

Diacetone Alcohol

Food Chain Concentration Potential N/A
WATERFOWL TOXICITY N/A
BOD N/A
AQUATIC TOXICITY N/A

Section 13 -- DISPOSAL CONSIDERATIONS

Waste Classification: Non-regulated solid waste

Disposal Method: Approved landfill

Waste from this product is not considered hazardous as defined under the Resource Conservation and Recovery Act (RCRA) 40 CFR 261. Dispose of in accordance with Federal, State, and Local regulation regarding pollution.

Section 14 -- TRANSPORTATION INFORMATION

DOT: Non-Regulated
OCEAN (IMDG): Non-Regulated
AIR (IATA): Non-Regulated
WHMIS (CANADA): Non-Regulated

Section 15 -- REGULATORY INFORMATION

REGULATORY DATA

Ingredient Name

Diacetone Alcohol

SARA 313 N/A
TSCA Inventory Yes
CERCLA RQ N/A
RCRA Code N/A

Section 16 -- OTHER INFORMATION

This document is prepared pursuant to the OSHA Hazard Communication Standard (29 CFR 1910.1200). The information herein is given in good faith, but no warranty, expressed or implied is made. Consult RectorSeal for further information: (713) 263-8001

SAFETY DATA SHEET

SDS 0673

Section 1 -- PRODUCT AND COMPANY IDENTIFICATION

| | | | |
|---------------------|--|---------------------------------|---|
| | | HMIS CODES | |
| PRODUCT NAME | Jim PR-1L or Clear PR-2L Low VOC | Health | 2 |
| | | Flammability | 3 |
| | | Reactivity | 1 |
| PRODUCT CODES | 55611, 55613, 55615, 55617, 55910, 55912, 55914, 55918, 55920, 55972, 55981, 55982 | PPI | B |
| CHEMICAL FAMILY | Organic | | |
| USE | PVC & CPVC Primer | | |
| MANUFACTURER'S NAME | The RectorSeal Corporation 2601 Spenwick Drive Houston, Texas 77055 USA | EMERGENCY TELEPHONE NO. | Chemtrec 24 Hours (800)424-9300 USA (703)527-3887 International |
| DATE OF VALIDATION | August 12, 2014 | TECHNICAL SERVICE TELEPHONE NO. | (800)231-3345 or (713)263-8001 |
| DATE OF PREPARATION | August 12, 2014 | | |

Section 2 -- HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW
 OSHA Hazards
 Flammable liquid, Target Organ Effect, Irritant
 TARGET ORGANS
 Liver, KidneyLiver, Kidney
 GHS CLASSIFICATION
 PHYSICAL HAZARDS: Flammable Liquid, Category 2
 HEALTH HAZARDS
 Acute Toxicity:
 Oral: Category 4
 Dermal: Category 5
 Inhalation: Category 4
 Skin Corrosion/Irritation: Category 3
 Serious Eye Damage/Eye Irritation: Category 2A
 Skin Sensitization: Not Classified
 Respiratory Sensitization: Not Classified
 Germ Cell Mutagenicity: Not Classified
 Carcinogenicity: See Section 11
 Reproductive Toxicology: Not Classified
 Target Organ Systemic Toxicity - Single Exposure: Category 3
 Target Organ Systemic Toxicity - Repeated Exposure: Not Classified
 Aspiration Toxicity: Not Classified

GHS Label elements, including precautionary statements
 Pictogram: Flammable, Harmful / Irritant
 Signal Word: Danger
 Hazard Statements:
 H225 - Highly flammable liquid and vapor
 H302 - Harmful if swallowed.
 H313 - May be harmful in contact with skin.
 H316 - Causes mild skin irritation.
 H318 - Causes serious eye damage.
 H319 - Causes serious eye irritation
 H335 + H336 - May cause respiratory irritation, and drowsiness or dizziness.
 Precautionary Statements:
 P102 - Keep out of reach of children.
 P210 - Keep away from heat/sparks/open flames/hot surfaces. - No smoking
 P240 - Ground/Bond container and receiving equipment
 P261 - Avoid breathing dust/fume/gas/mist/vapors/spray
 P262 - Do not get in eyes, on skin, or on clothing.

P264 - Wash hands thoroughly after handling.
 P280 - Wear protective gloves/protective clothing/eye protection/face protection.
 P301 + P310 - IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
 P305 + P351 + P338 - IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 P362 - Take off contaminated clothing and wash before reuse.
 EUH066 - Repeated exposure may cause skin dryness or cracking
 Precautionary Statements - EU No. 1272/2008

 Classification according to EU Directives 67/548/EEC or 1999/45/EC
 For the full text of the R phrases mentioned in this Section, see Section 16
 Symbol(s) Xi - Irritant
 F - Highly flammable
 R -phrase(s)
 R11 - Highly flammable
 R36 - Irritating to eyes
 R66 - Repeated exposure may cause skin dryness or cracking
 R67 - Vapors may cause drowsiness and dizziness
 R-code(s) F;R11 - Xi;R36 - R66 - R67

SUMMARY OF ACUTE HAZARDS

Overexposure may cause coughing, shortness of breath, dizziness, central nervous system depression, intoxication and collapse. It may cause irritation to the respiratory tract and to other mucous membranes.

ROUTE OF EXPOSURE, SIGNS AND SYMPTOMS

INHALATION

Overexposure may cause coughing, shortness of breath, dizziness, central nervous system depression, intoxication and collapse. It may cause irritation to the respiratory tract and to other mucous membranes.

EYE CONTACT

Severely irritating. If not removed promptly, will injure eye tissue, which can result in permanent damage.

SKIN CONTACT

Frequent or prolonged contact may irritate and cause dermatitis. Low order of toxicity.

INGESTION

Low order of toxicity. Small amounts of the liquid aspirated into the respiratory system during ingestion, or from vomiting, may cause bronchiopneumonia or pulmonary edema.

SUMMARY OF CHRONIC HAZARDS

Repeated or prolonged exposure may cause signs of central nervous system depression and respiratory irritation. This material has been shown to induce tumors in laboratory animals.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Individuals with pre-existing or chronic diseases of the eyes, skin, respiratory system, cardiovascular system, gastrointestinal system, liver, or kidneys may have increased susceptibility to excessive exposure.

=====
 Section 3 -- COMPOSITION/INFORMATION ON INGREDIENTS

INGREDIENT: Methyl Ethyl Ketone
 PERCENTAGE BY WEIGHT: 20-85
 CAS NUMBER: 78-93-3
 EC# : 606-002-00-3

INGREDIENT: Tetrahydrofuran
 PERCENTAGE BY WEIGHT: 5-12
 CAS NUMBER: 109-99-9
 EC# : 603-025-00-0

INGREDIENT: Cyclohexanone
 PERCENTAGE BY WEIGHT: 5-15
 CAS NUMBER: 108-94-1
 EC# : 606-010-00-7

INGREDIENT: Acetone
 PERCENTAGE BY WEIGHT: 20-40
 CAS NUMBER: 67-64-1

EC# : 200-662-2

Section 4 -- FIRST AID MEASURES

- If INHALED: If overcome by exposure, remove victim to fresh air immediately. Give oxygen or artificial respiration as needed. Obtain emergency medical attention. Prompt action is essential.
- If on SKIN: Immediately flush with large amounts of water; use soap if available. Remove contaminated clothing.
- If in EYES: Immediately flush with large amounts of water for at least 15 minutes. Get prompt medical attention.
- If SWALLOWED: If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

Section 5 -- FIRE FIGHTING MEASURES

CONDITIONS OF FLAMMABILITY

Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.

SUITABLE EXTINGUISHING MEDIA

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

SPECIAL PROTECTIVE EQUIPMENT FOR FIRE-FIGHTERS

Wear self contained breathing apparatus for fire fighting if necessary.

HAZARDOUS COMBUSTION PRODUCTS

Hazardous decomposition products formed under fire conditions. - Carbon oxides

FURTHER INFORMATION

Use water spray to cool unopened containers.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Extremely flammable - very low flash point. Vapors are heavier than air and may travel along ground or to low spots at considerable distance to a source of ignition resulting in potential flashback. Burning liquid may float on water. Heat may build up pressure and rupture closed containers.

Section 6 -- ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Ventilate area with natural or explosion-proof, forced air ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapors accumulating to form explosive concentrations. Vapors can accumulate in low areas.

ENVIRONMENTAL PRECAUTIONS

Prevent further leakage or spillage if safe to do so. Avoid flushing into sewers, drains, waterways, and soil.

METHODS AND MATERIALS FOR CONTAINMENT AND CLEANING UP

Use absorbent materials to prevent footing hazard and to contain, then collect and place in container for disposal according to local regulations (see section 13).

Section 7 -- HANDLING AND STORAGE

PRECAUTIONS FOR SAFE HANDLING

Avoid contact with skin and eyes. Avoid inhalation of vapor or mist. Avoid prolonged or repeated contact with skin or clothing. If transferring this material to other containers, ground all containers to avoid static electricity buildup and discharge which may ignite flammable vapors.

CONDITIONS FOR SAFE STORAGE

Do not store near heat, sparks, or open flames. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Empty containers may contain residues and vapors; treat as if full and observe all products precautions. Do not reuse empty containers. KEEP OUT OF REACH OF CHILDREN.

Section 8 -- EXPOSURE CONTROLS/PERSONAL PROTECTION

| INGREDIENT | UNITS |
|---------------------|---------|
| Methyl Ethyl Ketone | |
| ACGIH TLV | 200 ppm |

| | | |
|-----------------|------|------------|
| OSHA PEL | 200 | ppm |
| STEL | 300 | ppm |
| Tetrahydrofuran | | |
| ACGIH TLV | 50 | ppm |
| OSHA PEL | 200 | ppm |
| STEL | 250 | ppm |
| Cyclohexanone | | |
| ACGIH TLV | 20 | ppm (skin) |
| OSHA PEL | 50 | ppm |
| Acetone | | |
| ACGIH TLV | 500 | ppm |
| OSHA PEL | 1000 | ppm |
| STEL | 750 | ppm |

RESPIRATORY PROTECTION (SPECIFY TYPE): In confined poorly ventilated areas, use NIOSH/MSHA approved air purifying or supplied air purifying or supplied air respirators.

VENTILATION - LOCAL EXHAUST: Acceptable

SPECIAL: Explosion-proof equipment.

MECHANICAL (GENERAL): Preferable

OTHER: N/A

PROTECTIVE GLOVES: Wear rubber gloves.

EYE PROTECTION: Chemical splash goggles (ANSI Z-87.1 or equivalent)

OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Coveralls recommended.

WORK/HYGIENIC PRACTICES: Where use can result in skin contact, wash exposed areas thoroughly before eating, drinking, smoking, or leaving work area. Launder contaminated clothing before reuse.

Section 9 -- PHYSICAL AND CHEMICAL PROPERTIES

| | |
|--|-------------------------------------|
| BOILING POINT: | 151 F (66 C) @ 760mm Hg |
| SPECIFIC GRAVITY (H2O = 1): | <1.0 |
| VAPOR PRESSURE (mm Hg): | 140 @ 68 F (20 C) |
| MELTING POINT: | N/A |
| VAPOR DENSITY (AIR = 1): | 2.5 |
| EVAPORATION RATE (ETHYL ACETATE = 1): | 6 |
| APPEARANCE/ODOR: | Clear or Purple Liquid/Pungent Odor |
| SOLUBILITY IN WATER: | Soluble |
| VOC LEVEL: 510 g/L per SCAQMD Test Method 316A | |
| FLASH POINT | 4.1 F (-17 C) SETA CC |
| LOWER EXPLOSION LIMIT | 1.8% |
| UPPER EXPLOSION LIMIT | 11.8% |

Section 10 -- STABILITY AND REACTIVITY

CHEMICAL STABILITY: Stable under recommended storage conditions.

POSSIBILITY OF HAZARDOUS REACTIONS: Can form potentially explosive peroxides upon long standing in air. Vapors may form explosive mixture with air.

CONDITIONS TO AVOID: Heat, sparks, open flames, and strong oxidizing, acidic and basic conditions.

MATERIALS TO AVOID: Oxidizers, acids and bases.

HAZARDOUS DECOMPOSITION PRODUCTS: CO, CO2, HCl and fragmented hydrocarbons.

HAZARDOUS POLYMERIZATION: Will not occur.

Section 11 -- TOXICOLOGY INFORMATION

CHRONIC HEALTH HAZARDS

No ingredient in this product is an IARC, NTP or OSHA listed carcinogen.

Tetrahydrofuran - The National Toxicology Program has reported that exposures of mice and rats to THF vapor levels up to 1800 ppm 6hr/day, 5 days/week for their lifetime caused an incidence of kidney tumors in male rats and liver tumors in female mice. The significance of these findings for human health are unclear at this time, and may be related to "species specific" effects. Elevated incidences of tumors in humans have not been reported for THF.

TOXICOLOGY DATA
Ingredient Name

Methyl Ethyl Ketone
 Oral-Rat LD50:2737 mg/kg
 Inhalation-Rat LC50:23,500 mg/m3/8H

Tetrahydrofuran
 Oral-Rat LD50:1650 mg/kg
 Inhalation-Rat LC50:21,000 ppm/3H

Cyclohexanone
 Oral-Rat LD50:1535 mg/kg
 Inhalation-Rat LC50:8000 ppm/4H

Acetone
 Oral-Rat LD50: 5800 mg/kg
 Inhalation-Rat LC50: 50,100mg/m3

=====
 Section 12 -- Ecological Information

ECOLOGICAL DATA

Ingredient Name

Methyl Ethyl Ketone
 Food Chain Concentration Potential: None
 WATERFOWL TOXICITY: N/A
 BOD: 214%
 AQUATIC TOXICITY: 5640 mg/l/48 hr/bluegill/TLm/fresh water

Tetrahydrofuran
 Food Chain Concentration Potential: None
 WATERFOWL TOXICITY: N/A
 BOD: N/A
 AQUATIC TOXICITY: N/A

Cyclohexanone
 Food Chain Concentration Potential: None
 WATERFOWL TOXICITY: N/A
 BOD: N/A
 AQUATIC TOXICITY: N/A

Acetone
 Food Chain Concentration Potential: None
 WATERFOWL TOXICITY: N/A
 BOD: N/A
 AQUATIC TOXICITY: LC50/96-hour for fish > 100 mg/l

=====
 Section 13 -- DISPOSAL CONSIDERATIONS

Waste Classification: RCRA classified hazardous waste. Dispose of absorbed materials and liquid waste in approved, controlled incineration facility in accordance with all local, state and federal regulations.
 Disposal Method: Incineration
 =====

Section 14 -- TRANSPORTATION INFORMATION

DOT: UN1993, Flammable Liquid, N.O.S. (Methyl Ethyl Ketone & Tetrahydrofuran), Class 3, PG II, ERG#127. Quarts and less: Consumer Commodity, ORM-D

OCEAN (IMDG): UN1993, Flammable Liquid, N.O.S. (Methyl Ethyl Ketone & Tetrahydrofuran), Class 3, PG II, EMS-No: F-E, S-D
 Quarts and less: UN1993, Flammable Liquid, N.O.S. (Methyl Ethyl Ketone & Tetrahydrofuran), Class 3, PG II, Limited Quantities or Ltd Qty

AIR (IATA): UN1993, Flammable Liquid, N.O.S. (Methyl Ethyl Ketone & Tetrahydrofuran), Class 3, PG II, ERG#127.

WHMIS (CANADA): Class B-2
 =====

Section 15 -- REGULATORY INFORMATION

REGULATORY DATA

Ingredient Name

Methyl Ethyl Ketone
 SARA 313 Yes
 TSCA Inventory Yes
 CERCLA RQ 5,000 lb.
 RCRA Code U159

Tetrahydrofuran

| | |
|----------------|-----------|
| SARA 313 | No |
| TSCA Inventory | Yes |
| CERCLA RQ | 1,000 lb. |
| RCRA Code | U213 |

Cyclohexanone

| | |
|----------------|-----------|
| SARA 313 | No |
| TSCA Inventory | Yes |
| CERCLA RQ | 5,000 lb. |
| RCRA Code | U057 |

Acetone

| | |
|----------------|-----------|
| SARA 313 | No |
| TSCA Inventory | Yes |
| CERCLA RQ | 5,000 lb. |
| RCRA Code | U002 |

=====
Section 16 -- OTHER INFORMATION
=====

Text of R phrases mentioned in Section 2

R11 - Highly flammable

R36 - Irritating to eyes

R66 - Repeated exposure may cause skin dryness or cracking

R67 - Vapors may cause drowsiness and dizziness

This document is prepared pursuant to the OSHA Hazard Communication Standard (29 CFR 1910.1200). The information herein is given in good faith, but no warranty, expressed or implied is made. Consult RectorSeal for further information: (713) 263-8001



1. Product and company identification

| | |
|--------------------------------------|---|
| Product name | BP Unleaded Gasolines |
| MSDS # | 12631 |
| Code | 12631 |
| Product use | USE AS MOTOR FUEL ONLY. |
| Supplier | BP Products North America Inc. 150 West Warrenville Road Naperville, Illinois 60563-8460 USA |
| EMERGENCY HEALTH INFORMATION: | 1 (800) 447-8735 Outside the US: +1 703-527-3887 (CHEMTREC) |
| EMERGENCY SPILL INFORMATION: | 1 (800) 424-9300 CHEMTREC (USA) |
| OTHER PRODUCT INFORMATION | 1 (866) 4 BP - MSDS (866-427-6737 Toll Free - North America) email: bpcares@bp.com |

2. Hazards identification

| | |
|---------------------------------|--|
| Physical state | Liquid. |
| Color | Clear |
| Emergency overview | DANGER ! EXTREMELY FLAMMABLE. VAPOR MAY CAUSE FLASH FIRE. INHALATION OF VAPOR/AEROSOL CONCENTRATIONS ABOVE THE RECOMMENDED EXPOSURE LIMITS CAUSES HEADACHES, DIZZINESS, DROWSINESS, AND NAUSEA, AND MAY LEAD TO UNCONSCIOUSNESS OR DEATH. HARMFUL IF SWALLOWED. HARMFUL OR FATAL IF LIQUID IS ASPIRATED INTO LUNGS. CAUSES EYE AND SKIN IRRITATION. PROLONGED OR REPEATED CONTACT MAY DRY SKIN AND CAUSE IRRITATION. LONG-TERM EXPOSURE TO VAPORS HAS CAUSED CANCER IN LABORATORY ANIMALS. Extremely flammable liquid. Do not ingest. If ingested, do not induce vomiting. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Keep away from heat, sparks and flame. Keep container tightly closed and sealed until ready for use. Use only with adequate ventilation. Wash thoroughly after handling. Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure. |
| Routes of entry | Dermal contact. Eye contact. Inhalation. Ingestion. |
| Potential health effects | |
| Eyes | Causes eye irritation. |
| Skin | Causes skin irritation. Prolonged or repeated contact can defat the skin and lead to irritation and/or dermatitis. See toxicological information (Section 11) |
| Inhalation | Inhalation of vapor/aerosol concentrations above the recommended exposure limits causes headaches, drowsiness and nausea and may lead to unconsciousness or death. See toxicological information (Section 11) |
| Ingestion | Aspiration hazard if swallowed. Can enter lungs and cause damage. See toxicological information (Section 11) |

See toxicological information (Section 11)

| | | |
|---|------------------------------------|--------------------------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 1/10 |
| Version 1 | Date of issue 05/23/2011. | |
| | Format US-COMP (US-COMP) | Language ENGLISH (ENGLISH) |

3. Composition/information on ingredients

| Ingredient name | CAS # | % |
|------------------------|-----------|----------|
| Gasoline | Mixture | 90 - 100 |
| Ethanol | 64-17-5 | 0 - 10 |
| Contains: | | |
| Benzene | 71-43-2 | 0 - 3 |
| Cyclohexane | 110-82-7 | 0 - 1 |
| Ethylbenzene | 100-41-4 | 0 - 2 |
| Toluene | 108-88-3 | 4 - 11 |
| 1,2,4-Trimethylbenzene | 95-63-6 | 0 - 3 |
| xylene | 1330-20-7 | 4 - 11 |

4. First aid measures

| | |
|---------------------|---|
| Eye contact | In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention. |
| Skin contact | Immediately wash exposed skin with soap and water. Remove contaminated clothing and shoes. Clean shoes thoroughly before reuse. Wash contaminated clothing before reuse. Get medical attention. |
| Inhalation | If inhaled, remove to fresh air. If not breathing, give artificial respiration. Get medical attention immediately. |
| Ingestion | Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |

5. Fire-fighting measures

| | |
|--|--|
| Flammability of the product | Extremely flammable liquid. |
| Flash point | Closed cup: -42.778°C (-45°F) |
| Explosion limits | Lower: 1.3% Upper: 7.6% (Estimated.) |
| Fire/explosion hazards | Extremely flammable liquid and vapor. Vapor may cause flash fire. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. |
| Unusual fire/explosion hazards | Extremely explosive in the presence of the following materials or conditions: open flames, sparks and static discharge and heat. |
| Extinguishing media | |
| Suitable | Use dry chemical, CO ₂ , water spray (fog) or foam. |
| Not suitable | Do not use water jet. |
| Fire-fighting procedures | Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool. |
| Hazardous combustion products | Combustion products may include the following: carbon oxides (CO, CO ₂) (carbon monoxide, carbon dioxide) |
| Protective clothing (fire) | Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode. |
| Special remarks on fire hazards | Do not use water jet. |

6. Accidental release measures

Environmental precautions

Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Personal protection in case of a large spill

Chemical splash goggles. Chemical-resistant protective suit. Boots. Chemical-resistant gloves. Self-contained breathing apparatus (SCBA) should be used to avoid inhalation of the product. Suggested protective clothing might not be adequate. Consult a specialist before handling this product.

Methods for cleaning up

Large spill

Stop leak if without risk. Eliminate all ignition sources. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

Small spill

Stop leak if without risk. Eliminate all ignition sources. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.

7. Handling and storage

Handling

Put on appropriate personal protective equipment (see Section 8). Workers should wash hands and face before eating, drinking and smoking. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by grounding and bonding containers and equipment before transferring material.

Never siphon by mouth.

For use as a motor fuel only. Do not use as a cleaning solvent, thinner or for other non-motor fuel uses. Do not use as a portable heater or appliance fuel.

Warning! Customers should not re-enter vehicle during the re-fueling process as this can generate static electricity and cause a spark and flash fire hazard if sufficient vapors are present. The flow of gasoline through a pump nozzle can produce static electricity, which may cause a fire if gasoline is pumped into an ungrounded container. To avoid static spark hazard when filling portable containers:

- Fill only containers approved to hold gasoline
- Place container on the ground while dispensing fuel.
- Do not fill container in or on a vehicle or on a truck or trailer bed.
- Keep nozzle in contact with container while filling.

Storage

Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10). Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Other information

Do not enter storage tanks without breathing apparatus unless the tank has been well ventilated and the tank atmosphere has been shown to contain hydrocarbon vapor concentrations of less than 1% of the lower flammability limit and an oxygen concentration of at least 20% volume.

Light hydrocarbon vapors can build up in the headspace of tanks. These can cause flammability/explosion hazards even at temperatures below the normal flash point (note: flash point must not be regarded as a reliable indicator of the potential flammability of vapor in tank headspaces). Tank headspaces should always be regarded as potentially flammable and care should be taken to avoid static electrical discharge and all ignition sources during filling, ullaging and sampling from storage tanks. When the product is pumped (e.g. during filling, discharge or ullaging) and when sampling, there is a risk of static discharge. Ensure equipment used is properly earthed or bonded to the tank structure. Electrical equipment should not be used unless it is intrinsically safe (i.e. will not produce sparks).

8. Exposure controls/personal protection

Occupational exposure limits

Ingredient name

Occupational exposure limits

Gasoline

ACGIH TLV (United States).

TWA: 300 ppm 8 hour(s). Issued/Revised: 5/1996

TWA: 890 mg/m³ 8 hour(s). Issued/Revised: 5/1996

STEL: 500 ppm 15 minute(s). Issued/Revised: 5/1996

STEL: 1480 mg/m³ 15 minute(s). Issued/Revised: 5/1996

Ethanol

ACGIH TLV (United States).

STEL: 1000 ppm 15 minute(s). Issued/Revised: 11/2008

OSHA PEL (United States).

TWA: 1900 mg/m³ 8 hour(s). Issued/Revised: 6/1993

TWA: 1000 ppm 8 hour(s). Issued/Revised: 6/1993

Benzene

ACGIH TLV (United States). Absorbed through skin.

STEL: 8 mg/m³ 15 minute(s). Issued/Revised: 5/1997

STEL: 2.5 ppm 15 minute(s). Issued/Revised: 5/1997

TWA: 1.6 mg/m³ 8 hour(s). Issued/Revised: 5/1997

TWA: 0.5 ppm 8 hour(s). Issued/Revised: 5/1997

OSHA PEL (United States).

STEL: 5 ppm 15 minute(s). Issued/Revised: 6/1993

TWA: 1 ppm 8 hour(s). Issued/Revised: 6/1993

OSHA PEL Z2 (United States).

AMP: 50 ppm 10 minute(s). Issued/Revised: 6/1993

CEIL: 25 ppm Issued/Revised: 6/1993

TWA: 10 ppm 8 hour(s). Issued/Revised: 6/1993

Cyclohexane

ACGIH TLV (United States).

TWA: 100 ppm 8 hour(s). Issued/Revised: 1/2002

OSHA PEL (United States).

TWA: 1050 mg/m³ 8 hour(s). Issued/Revised: 6/1993

TWA: 300 ppm 8 hour(s). Issued/Revised: 6/1993

Ethylbenzene

ACGIH TLV (United States).

STEL: 125 ppm 15 minute(s). Issued/Revised: 1/2002

TWA: 100 ppm 8 hour(s). Issued/Revised: 1/2002

OSHA PEL (United States).

TWA: 435 mg/m³ 8 hour(s). Issued/Revised: 6/1993

TWA: 100 ppm 8 hour(s). Issued/Revised: 6/1993

Toluene

OSHA PEL Z2 (United States).

AMP: 500 ppm 10 minute(s). Issued/Revised: 6/1993

CEIL: 300 ppm Issued/Revised: 6/1993

TWA: 200 ppm 8 hour(s). Issued/Revised: 6/1993

ACGIH TLV (United States).

TWA: 20 ppm 8 hour(s). Issued/Revised: 11/2006

1,2,4-Trimethylbenzene

ACGIH TLV (United States).

TWA: 123 mg/m³ 8 hour(s). Issued/Revised: 9/1994

TWA: 25 ppm 8 hour(s). Issued/Revised: 9/1994

xylene

ACGIH TLV (United States).

STEL: 651 mg/m³ 15 minute(s). Issued/Revised: 5/1996

STEL: 150 ppm 15 minute(s). Issued/Revised: 5/1996

TWA: 434 mg/m³ 8 hour(s). Issued/Revised: 5/1996

TWA: 100 ppm 8 hour(s). Issued/Revised: 5/1996

OSHA PEL (United States).

TWA: 435 mg/m³ 8 hour(s). Issued/Revised: 6/1993

TWA: 100 ppm 8 hour(s). Issued/Revised: 6/1993

While specific OELs for certain components may be shown in this section, other components may be present in any mist, vapor or dust produced. Therefore, the specific OELs may not be applicable to the product as a whole and are provided for guidance only.

Some states may enforce more stringent exposure limits.

Control Measures

Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Hygiene measures

Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing.

Personal protection

| | | |
|---|----------------------------------|-----------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 4/10 |
| Version 1 | Date of issue 05/23/2011. | Format US-COMP |
| | Language ENGLISH | (US-COMP) |
| | | (ENGLISH) |

| | |
|----------------------|---|
| Eyes | Avoid contact with eyes. Safety glasses with side shields or chemical goggles. |
| Skin and body | Do not get on skin or clothing. Wear clothing and footwear that cannot be penetrated by chemicals or oil. |
| Respiratory | Use only with adequate ventilation. Avoid breathing vapor or mist. If ventilation is inadequate, use a NIOSH certified respirator with an organic vapor cartridge and P95 particulate filter. |
| Hands | Wear gloves that cannot be penetrated by chemicals or oil. |

The correct choice of protective gloves depends upon the chemicals being handled, the conditions of work and use, and the condition of the gloves (even the best chemically resistant glove will break down after repeated chemical exposures). Most gloves provide only a short time of protection before they must be discarded and replaced. Because specific work environments and material handling practices vary, safety procedures should be developed for each intended application. Gloves should therefore be chosen in consultation with the supplier/manufacturer and with a full assessment of the working conditions.

Consult your supervisor or Standard Operating Procedure (S.O.P) for special handling instructions.

9. Physical and chemical properties

| | |
|------------------------------|---|
| Physical state | Liquid. |
| Color | Clear |
| Odor | Hydrocarbon. |
| Flash point | Closed cup: -42.778°C (-45°F) |
| Explosion limits | Lower: 1.3% Upper: 7.6% (Estimated.) |
| Density | 750 kg/m ³ (0.75 g/cm ³) |
| Boiling point / Range | 26.67 to 221°C (80 to 430°F) |
| Vapor pressure | 48.134 to 103.146 kPa (361.97 to 775.66 mm Hg) |
| Volatility | 100% (v/v) |
| Solubility | Very slightly soluble in water |

10. Stability and reactivity

| | |
|--|--|
| Stability and reactivity | The product is stable. |
| Possibility of hazardous reactions | Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | Keep away from heat, sparks and flame. Avoid all possible sources of ignition (spark or flame). |
| Incompatibility with various substances | Reactive or incompatible with the following materials: oxidizing materials. Chlorine and Fluorine |
| Hazardous decomposition products | Under normal conditions of storage and use, hazardous decomposition products should not be produced. |
| Hazardous polymerization | Will not occur. |

11. Toxicological information

Classification

| Product/ingredient name | IARC | NTP | OSHA |
|-------------------------|------|----------|------|
| xylene | 3 | - | - |
| Toluene | 3 | - | - |
| Benzene | 1 | Proven. | + |
| Ethylbenzene | 2B | - | - |
| Naphthalene | 2B | Possible | - |

| | | |
|---|----------------------------------|-----------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 5/10 |
| Version 1 | Date of issue 05/23/2011. | Format US-COMP |
| | Language ENGLISH | (US-COMP) |
| | (ENGLISH) | |

IARC :
1 - Carcinogenic to human.
2B - Possible carcinogen to human.
3 - Not classifiable as a human carcinogen.

NTP :
Proven - Known to be human carcinogens.
Possible - Reasonably anticipated to be human carcinogens.

OSHA :
+ Potential occupational carcinogen

Other information

Aspiration of this product into the lungs can cause chemical pneumonia and can be fatal. Aspiration into the lungs can occur while vomiting after ingestion of this product. Do not siphon by mouth.

Excess exposure to vapors may produce headaches, dizziness, nausea, drowsiness, irritation of eyes, nose and throat and central nervous system depression. Aspiration of this material into the lungs can cause chemical pneumonia and can be fatal. Aspiration into the lungs can occur while vomiting after ingestion of this product. Inhalation of unleaded gasoline vapors did not produce birth defects in laboratory animals. Ingestion of this material can cause gastrointestinal irritation and diarrhea.

In a long-term inhalation study of whole unleaded gasoline vapors, exposure-related kidney damage and kidney tumors were observed in male rats. Similar kidney effects were not seen in female rats or in mice. At the highest exposure level (2056 ppm), female mice had an increased incidence of liver tumors. Results from subsequent scientific studies have shown that a broad variety of chemicals cause these kidney effects only in the male rat. Further studies have discovered the means by which the physiology of the male rat uniquely predispose it to these effects. Consequently, the Risk Assessment Forum of the Environmental Protection Agency has recognized that these responses are not predictive of a human health hazard. The liver tumors that were increased in the high-dose female mice are likewise of questionable significance because of their high spontaneous occurrence even without chemical exposure and because the rate of their occurrence is accelerated by a broad spectrum of chemicals not commonly considered to be carcinogens (e.g., phenobarbital). Thus, the significance of the mouse liver tumor response in terms of human health is questionable.

Gasoline is a complex mixture of hydrocarbons and contains benzene (typically no more than 2 volume%), toluene, and xylene. Chronic exposure to high levels of benzene has been shown to cause cancer (leukemia) in humans and other adverse blood effects (anemia). Benzene is considered a human carcinogen by IARC, NTP and OSHA. Over exposure to xylene and toluene can cause irritation to the upper respiratory tract, headache and narcosis. Some liver damage and lung inflammation were seen in chronic studies on xylene in guinea pigs but not in rats.

Solvent "sniffing" (abuse) or intentional overexposure to vapors can produce serious central nervous system effects, including unconsciousness, and possibly death.

Gasoline as a mixture is classified as a 2B (possible human) carcinogen by IARC.

Gasoline engine exhaust is classified as possibly carcinogenic to humans by IARC (2B). This classification is based primarily on animal and in vitro studies of gasoline engine exhaust condensates/extracts. Studies of the gaseous exhaust stream in animals did not provide sufficient evidence for classification as a carcinogen.

Gasoline: Additional toxicity information on components.

Ethanol:
Irritancy - Skin: A single 4h semi-occlusive application to intact rabbit skin produced minimal signs of irritation (mean scores for erythema or oedema less than 2).

Irritancy - Eye. The eye irritancy has been investigated by OECD Test method 405. Single application to the rabbit eye produced conjunctival irritation and transient corneal damage. The effect was insufficient to warrant classification as an eye irritant.

Sensitization: The material is not sensitizing in standard animal tests. In rare cases non-irritant contact dermatitis has been identified in humans after skin exposure to this material. Such cases have been identified as delayed hypersensitivity or as urticarial reactions. In reactive individuals

| | | |
|---|----------------------------------|-------------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 6/10 |
| Version 1 | Date of issue 05/23/2011. | Format US-COMP |
| | (US-COMP) | Language ENGLISH |
| | | (ENGLISH) |

such reactions may also be elicited by drinking alcoholic drinks or by cross reaction to certain other alcohols.

Sub-acute/Subchronic Toxicity: It has been shown in many animal experiments that the repeated oral consumption of large doses of ethanol can lead to damage in practically all organ systems. The main manifestations of the toxic effects are shown by the liver.

Chronic toxicity/carcinogenicity: No convincing evidence of carcinogenic effects in animal studies.

Genotoxicity : The product has been tested in a number of bacterial and mammalian systems. The product did not exhibit mutagenic activity in the following systems (with and without metabolic activation): Drosophila. Salmonella typhimurium. Human lymphocytes in vitro. Most in vitro tests and all in vivo tests for chromosome aberrations report negative results. The product did not induce micronuclei in standard bone marrow tests in vivo. There is some evidence that ethanol both induces SCE in vivo and can also act as an aneugen at high doses. Overall, there is no robust evidence that ethanol is a genotoxic hazard according to the criteria normally applied for the purpose of classification and labelling of industrial chemicals.

Reproductive/Developmental Toxicity: Adverse effects on the male reproductive system have been reported in laboratory animals following repeated exposure to high concentrations. Developmental effects have been observed in laboratory animals following large oral exposures.

Human data: In humans excessive consumption of alcoholic beverages during pregnancy is associated with the induction of Fetal Alcohol Syndrome in the offspring. Reduced birth weight and physical and mental defects occur. There is no evidence that such effects might be caused by exposures other than direct ingestion of alcoholic drinks. In humans high lifetime consumption of alcoholic beverages can be associated with certain cancers and effects on the liver. There is no evidence that these can be caused by exposure other than direct ingestion of alcoholic drinks (IARC 1988).

Potential chronic health effects

Carcinogenicity Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure.

12. Ecological information

Ecotoxicity

No testing has been performed by the manufacturer.

Persistence/degradability Inherently biodegradable

Mobility Spillages may penetrate the soil causing ground water contamination.

Bioaccumulative potential This product is not expected to bioaccumulate through food chains in the environment.

Other ecological information Spills may form a film on water surfaces causing physical damage to organisms. Oxygen transfer could also be impaired.

13. Disposal considerations

Waste information The generation of waste should be avoided or minimized wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

NOTE: The generator of waste has the responsibility for proper waste identification (based on characteristic(s) or listing), transportation and disposal

14. Transport information

International transport regulations

| Regulatory information | UN number | Proper shipping name | Class | Packing group | Additional information |
|--------------------------|-----------|--|-------|---------------|--|
| DOT Classification | UN1203 | Gasoline | 3 | II | - |
| TDG Classification | UN1203 | GASOLINE | 3 | II | - |
| IMDG Classification | UN1203 | GASOLINE. Marine pollutant | 3 | II | Emergency schedules (EmS) F-E, S-E |
| IATA/ICAO Classification | ---- | Proper classification to be determined at the time of shipment | ---- | ---- | - |

15. Regulatory information

U.S. Federal Regulations

United States inventory (TSCA 8b)

All components are listed or exempted.

SARA 302/304/311/312 extremely hazardous substances: No products were found.

SARA 302/304 emergency planning and notification: No products were found.

SARA 302/304/311/312 hazardous chemicals: Ethanol; Benzene; Cyclohexane; Ethylbenzene; Toluene; 1,2,4-Trimethylbenzene; xylene

SARA 311/312 MSDS distribution - chemical inventory - hazard identification: BP Unleaded Gasolines: Fire hazard, Immediate (acute) health hazard, Delayed (chronic) health hazard

SARA 313

| | Product name | CAS number | Concentration |
|--|------------------------|------------|---------------|
| Form R - Reporting requirements | Toluene | 108-88-3 | 4 - 11 |
| | xylene | 1330-20-7 | 4 - 11 |
| | Benzene | 71-43-2 | 0 - 3 |
| | 1,2,4-Trimethylbenzene | 95-63-6 | 0 - 3 |
| | Ethylbenzene | 100-41-4 | 0 - 2 |
| | Cyclohexane | 110-82-7 | 0 - 1 |
| Supplier notification | Toluene | 108-88-3 | 4 - 11 |
| | xylene | 1330-20-7 | 4 - 11 |
| | Benzene | 71-43-2 | 0 - 3 |
| | 1,2,4-Trimethylbenzene | 95-63-6 | 0 - 3 |
| | Ethylbenzene | 100-41-4 | 0 - 2 |
| | Cyclohexane | 110-82-7 | 0 - 1 |

CERCLA Sections 102a/103 Hazardous Substances (40 CFR Part 302.4):

CERCLA: Hazardous substances.: Benzene: 10 lbs. (4.54 kg); Cyclohexane: 1000 lbs. (454 kg); Ethylbenzene: 1000 lbs. (454 kg); Toluene: 1000 lbs. (454 kg); xylene: 100 lbs. (45.4 kg);

State regulations

Massachusetts Substances

The following components are listed: XYLENE; TOLUENE; ETHYL ALCOHOL; BENZENE; PSEUDOCUMENE; ETHYL BENZENE; CYCLOHEXANE

New Jersey Hazardous Substances

The following components are listed: XYLENES; BENZENE, DIMETHYL-; TOLUENE; BENZENE, METHYL-; ETHYL ALCOHOL; ALCOHOL; BENZENE; PSEUDOCUMENE; 1,2,4-TRIMETHYL BENZENE; ETHYL BENZENE; BENZENE, ETHYL-; CYCLOHEXANE

Pennsylvania RTK Hazardous Substances

The following components are listed: GASOLINE; BENZENE, DIMETHYL-; BENZENE, METHYL-; DENATURED ALCOHOL; BENZENE; PSEUDOCUMENE; BENZENE, ETHYL-; CYCLOHEXANE

| | | | | | |
|---------------------|-----------------------|----------------------|-------------|-----------------|-----------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 8/10 |
| Version | 1 | Date of issue | 05/23/2011. | Format | US-COMP |
| | | | | Language | ENGLISH |
| | | | | | (ENGLISH) |

California Prop. 65

WARNING: This product contains a chemical known to the State of California to cause cancer.
Ethylbenzene

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.
Toluene

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.
Benzene

Other Prop 65 chemicals will result under certain conditions from the use of this material. For example, burning fuels produces combustion products including carbon monoxide, a Prop 65 reproductive toxin.

Other regulations

| | |
|--------------------------------------|---|
| Canada inventory | All components are listed or exempted. |
| REACH Status | For the REACH status of this product please consult your company contact, as identified in Section 1. |
| Australia inventory (AICS) | At least one component is not listed. |
| China inventory (IECSC) | At least one component is not listed. |
| Japan inventory (ENCS) | All components are listed or exempted. |
| Korea inventory (KECI) | All components are listed or exempted. |
| Philippines inventory (PICCS) | All components are listed or exempted. |

16. Other information**Label requirements**

DANGER !
 EXTREMELY FLAMMABLE.
 VAPOR MAY CAUSE FLASH FIRE.
 INHALATION OF VAPOR/AEROSOL CONCENTRATIONS ABOVE THE RECOMMENDED EXPOSURE LIMITS CAUSES HEADACHES, DIZZINESS, DROWSINESS, AND NAUSEA, AND MAY LEAD TO UNCONSCIOUSNESS OR DEATH.
 HARMFUL IF SWALLOWED.
 HARMFUL OR FATAL IF LIQUID IS ASPIRATED INTO LUNGS.
 CAUSES EYE AND SKIN IRRITATION.
 PROLONGED OR REPEATED CONTACT MAY DRY SKIN AND CAUSE IRRITATION.
 LONG-TERM EXPOSURE TO VAPORS HAS CAUSED CANCER IN LABORATORY ANIMALS.

HMIS® Rating :

Health * 2
Flammability 3
Physical Hazard 0
Personal protection X

National Fire Protection Association (U.S.A.)

**History**

Date of issue 05/23/2011.
Date of previous issue No previous validation.
Prepared by Product Stewardship

Notice to reader

All reasonably practicable steps have been taken to ensure this data sheet and the health, safety and environmental information contained in it is accurate as of the date specified below. No warranty or representation, express or implied is made as to the accuracy or completeness of the data and information in this data sheet.

The data and advice given apply when the product is sold for the stated application or applications. You should not use the product other than for the stated application or applications without seeking advice from BP Group.

It is the user's obligation to evaluate and use this product safely and to comply with all applicable laws and regulations. The BP Group shall not be responsible for any damage or injury resulting from use, other than the stated product use of the material, from any failure to adhere to recommendations, or from any hazards inherent in the nature of the material. Purchasers of the product for supply to a third party for use at work, have a duty to take all necessary steps to ensure that any person handling or using the

| | | |
|---|----------------------------------|-------------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 9/10 |
| Version 1 | Date of issue 05/23/2011. | Format US-COMP |
| | (US-COMP) | Language ENGLISH |
| | | (ENGLISH) |

product is provided with the information in this sheet. Employers have a duty to tell employees and others who may be affected of any hazards described in this sheet and of any precautions that should be taken. You can contact the BP Group to ensure that this document is the most current available. Alteration of this document is strictly prohibited.

1. Product and Company Identification

| | |
|--------------------------------------|--|
| Product identifier | Nickel-Safe Ice Machine Cleaner (4287-08, 4287-34, 4841-AB, 4841-08) |
| Other means of identification | Not available |
| Recommended use | Cleaning scale from ice machines |
| Recommended restrictions | None known. |
| Manufacturer information | Nu-Calgon 2611 Schuetz Road St. Louis, MO 63043 US Phone: 314-469-7000 / 800-554-5499 Emergency Phone: 1-800-424-9300 (CHEMTREC) |
| Supplier | See above. |

2. Hazards Identification

| | | |
|-----------------------------------|-----------------------------------|------------|
| Physical hazards | Corrosive to metals | Category 1 |
| Health hazards | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 1 |
| Environmental hazards | Not classified. | |
| WHMIS 2015 defined hazards | Not classified | |
| Label elements | | |



| | |
|--|--|
| Signal word | Danger |
| Hazard statement | May be corrosive to metals. Causes skin irritation. Causes serious eye damage. |
| Precautionary statement | |
| Prevention | Wear eye/face protection. Wear protective gloves. Wash thoroughly after handling. Keep only in original packaging. |
| Response | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor. IF ON SKIN: Wash with plenty of water. Specific treatment (see information on this label). If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash it before reuse. Absorb spillage to prevent material-damage. |
| Storage | Store in a corrosion resistant container with a resistant inner liner. |
| Disposal | Dispose of waste and residues in accordance with local authority requirements. |
| WHMIS 2015: Health Hazard(s) not otherwise classified (HHNOC) | None known |
| WHMIS 2015: Physical Hazard(s) not otherwise classified (PHNOC) | None known |
| Hazard(s) not otherwise classified (HNOC) | None known. |
| Supplemental information | Not applicable. |

3. Composition/Information on Ingredients

Mixture

| Chemical name | Common name and synonyms | CAS number | % |
|-----------------|--------------------------|------------|-------|
| Phosphoric acid | | 7664-38-2 | 15-40 |
| Citric Acid | | 77-92-9 | 1-5 |

All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First Aid Measures

| | |
|---|---|
| Inhalation | If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Call a physician if symptoms develop or persist. |
| Skin contact | IF ON SKIN: Wash with plenty of water. If skin irritation occurs: Get medical advice/attention. Specific treatment (see information on this label). Take off contaminated clothing and wash it before reuse. |
| Eye contact | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor. |
| Ingestion | If swallowed, DO NOT induce vomiting. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Never give anything by mouth if victim is unconscious, or is convulsing. Obtain medical attention. |
| Most important symptoms/effects, acute and delayed | Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire Fighting Measures

| | |
|--|---|
| Suitable extinguishing media | Dry chemical powder. Foam. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire-fighting equipment/instructions | Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| Hazardous combustion products | Not available |

6. Accidental Release Measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep out of low areas. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Stop the flow of material, if this is without risk. Should not be released into the environment. Large Spills: Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Absorb spillage to prevent material damage. Absorb in vermiculite, dry sand or earth and place into containers. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. |
| Environmental precautions | Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground. |

7. Handling and Storage

| | |
|---|---|
| Precautions for safe handling | Do not get this material in contact with eyes. Avoid contact with skin. Avoid prolonged exposure. Avoid contact with clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. Use care in handling/storage. |
| Conditions for safe storage, including any incompatibilities | Store in corrosive resistant container with a resistant inner liner. Keep only in the original container. Keep container tightly closed. Store in a cool, dry place out of direct sunlight. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure Controls/Personal Protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|---------------------------------|------|---------------------|
| Phosphoric acid (CAS 7664-38-2) | PEL | 1 mg/m ³ |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|---------------------------------|------|---------------------|
| Phosphoric acid (CAS 7664-38-2) | STEL | 3 mg/m ³ |
| | TWA | 1 mg/m ³ |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---------------------------------|------|---------------------|
| Phosphoric acid (CAS 7664-38-2) | STEL | 3 mg/m ³ |
| | TWA | 1 mg/m ³ |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Chemical goggles are recommended.

Skin protection

Hand protection Rubber gloves. Confirm with a reputable supplier first.

Other Wear appropriate chemical resistant clothing.

Respiratory protection Not normally required if good ventilation is maintained.

Thermal hazards Not available.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and Chemical Properties

| | |
|---|----------------------|
| Appearance | Liquid |
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Green |
| Odor | Mild chemical |
| Odor threshold | Not available. |
| pH | < 1 |
| Melting point/freezing point | -0.4 °F (-18 °C) |
| Initial boiling point and boiling range | > 199.4 °F (> 93 °C) |
| Pour point | Not available. |
| Specific gravity | 1.19 |
| Partition coefficient (n-octanol/water) | Not available |
| Flash point | None |
| Evaporation rate | Not available |
| Flammability (solid, gas) | Not applicable. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available |
| Flammability limit - upper (%) | Not available |
| Explosive limit - lower (%) | Not available. |

| | |
|------------------------------------|----------------|
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available |
| Relative density | Not available. |
| Solubility(ies) | Complete |
| Auto-ignition temperature | Not available |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |

10. Stability and Reactivity

| | |
|---|---|
| Reactivity | Corrosive to metals. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Chemical stability | Material is stable under normal conditions. |
| Conditions to avoid | Reacts violently with strong alkaline substances. This product may react with reducing agents. Do not mix with other chemicals. |
| Incompatible materials | This product may react with reducing agents. Incompatible with bases. |
| Hazardous decomposition products | May include and are not limited to: Oxides of carbon. Oxides of phosphorus. |

11. Toxicological Information

| | | |
|---|---|---------------------|
| Routes of exposure | Inhalation. Ingestion. Skin contact. Eye contact. | |
| Information on likely routes of exposure | | |
| Ingestion | May cause stomach distress, nausea or vomiting. | |
| Inhalation | Prolonged inhalation may be harmful. | |
| Skin contact | Causes skin irritation. | |
| Eye contact | Causes serious eye damage. | |
| Symptoms related to the physical, chemical and toxicological characteristics | Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. Skin irritation. | |
| Information on toxicological effects | | |
| Acute toxicity | | |
| Components | Species | Test Results |
| Citric Acid (CAS 77-92-9) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Not available | |
| <i>Inhalation</i> | | |
| LC50 | Not available | |
| <i>Oral</i> | | |
| LD50 | Mouse | 5040 mg/kg |
| | Rat | 3000 mg/kg |
| Phosphoric acid (CAS 7664-38-2) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 2740 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Not available | |
| <i>Oral</i> | | |
| LD50 | Rat | 1530 mg/kg |
| Skin corrosion/irritation | Causes skin irritation. | |
| Exposure minutes | Not available. | |
| Erythema value | Not available. | |
| Oedema value | Not available. | |

| | |
|---|--|
| Serious eye damage/eye irritation | Causes serious eye damage. |
| Corneal opacity value | Not available. |
| Iris lesion value | Not available. |
| Conjunctival reddening value | Not available. |
| Conjunctival oedema value | Not available. |
| Recover days | Not available. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | Not listed. |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Teratogenicity | Not available. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not available. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological Information

Ecotoxicity Because of the low pH of this product, it would be expected to produce significant ecotoxicity upon exposure to aquatic organisms and aquatic systems.

Ecotoxicological data

| Components | | Species | Test Results |
|---------------------------------|------|--|---------------------|
| Citric Acid (CAS 77-92-9) | | | |
| <i>Acute</i> | | | |
| Crustacea | EC50 | Daphnia magna | 120 mg/L, 72 hr |
| Aquatic | | | |
| <i>Acute</i> | | | |
| Fish | LC50 | Bluegill (<i>Lepomis macrochirus</i>) | 1516 mg/L, 96 hr |
| Phosphoric acid (CAS 7664-38-2) | | | |
| Aquatic | | | |
| <i>Acute</i> | | | |
| Crustacea | LC50 | Water flea (<i>Daphnia magna</i>) | 4.6 mg/L, 12 hr |
| Fish | LC50 | Mosquitofish (<i>Gambusia affinis affinis</i>) | 3 - 3.5 mg/L, 96 hr |

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential Not available.

Mobility in soil Not available.

Mobility in general Not available.

Other adverse effects Not available.

13. Disposal Considerations

Disposal instructions Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations.

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport Information

Transport of Dangerous Goods (TDG) Proof of Classification In accordance with Part 2.2.1 (SOR/2014-152) of the Transportation of Dangerous Goods Regulations, we certify that the classification of this product is correct as of the SDS date of issue.

U.S. Department of Transportation (DOT)**Basic shipping requirements:**

| | |
|-----------------------------|---|
| UN number | UN3264 |
| Proper shipping name | Corrosive liquid, acidic, inorganic, n.o.s. |
| Technical name | Phosphoric acid |
| Hazard class | Limited Quantity - US |
| Packing group | III |
| Special provisions | IB3, T7, TP1, TP28 |
| Packaging exceptions | 154 |

Transportation of Dangerous Goods (TDG - Canada)**Basic shipping requirements:**

| | |
|-----------------------------|---|
| UN number | UN3264 |
| Proper shipping name | CORROSIVE LIQUID, ACIDIC, INORGANIC, N.O.S. |
| Technical name | Phosphoric acid |
| Hazard class | Limited Quantity - Canada |
| Packing group | III |
| Special provisions | 16 |

IATA/ICAO (Air)**Basic shipping requirements:**

| | |
|-----------------------------|---|
| UN number | UN3264 |
| Proper shipping name | Corrosive liquid, acidic, inorganic, n.o.s. |
| Technical name | Phosphoric acid |
| Hazard class | Limited Quantity - IATA |
| Packing group | III |

IMDG (Marine Transport)**Basic shipping requirements:**

| | |
|-----------------------------|---|
| UN number | UN3264 |
| Proper shipping name | CORROSIVE LIQUID, ACIDIC, INORGANIC, N.O.S. |
| Technical name | Phosphoric acid |
| Hazard class | Limited Quantity - IMDG |
| Packing group | III |

DOT; IMDG; TDG**IATA**

15. Regulatory Information

Canadian federal regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Not regulated.

WHMIS 2015 Exemptions

Not applicable

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Phosphoric acid (CAS 7664-38-2) Listed.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - No
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

No

SARA 311/312 Hazardous chemical

No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA)

Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Not listed.

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Not regulated.

DEA Exempt Chemical Mixtures Code Number

Not regulated.

FEMA Priority Substances Respiratory Health and Safety in the Flavor Manufacturing Workplace

Phosphoric acid (CAS 7664-38-2) High priority

Food and Drug Administration (FDA)

Not regulated.

US state regulations

See below

US - California Hazardous Substances (Director's): Listed substance

Phosphoric acid (CAS 7664-38-2) Listed.

US - Illinois Chemical Safety Act: Listed substance

Phosphoric acid (CAS 7664-38-2)

US - Louisiana Spill Reporting: Listed substance

Phosphoric acid (CAS 7664-38-2) Listed.

US - Minnesota Haz Subs: Listed substance

Phosphoric acid (CAS 7664-38-2) Listed.

US - New Jersey RTK - Substances: Listed substance

Phosphoric acid (CAS 7664-38-2)

US - Texas Effects Screening Levels: Listed substance

Citric Acid (CAS 77-92-9) Listed.

Phosphoric acid (CAS 7664-38-2) Listed.

US. Massachusetts RTK - Substance List

Phosphoric acid (CAS 7664-38-2)

US. New Jersey Worker and Community Right-to-Know Act

Not regulated.

US. Pennsylvania RTK - Hazardous Substances

Phosphoric acid (CAS 7664-38-2)

US. Rhode Island RTK

Phosphoric acid (CAS 7664-38-2)

US. California Proposition 65

This product is not subject to warning labeling under the California Proposition 65 regulation.

Inventory status


| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

16. Other Information

| LEGEND | |
|----------|---|
| Severe | 4 |
| Serious | 3 |
| Moderate | 2 |
| Slight | 1 |
| Minimal | 0 |

| | |
|----------------------------|-----|
| HEALTH | / 2 |
| FLAMMABILITY | 0 |
| PHYSICAL HAZARD | 0 |
| PERSONAL PROTECTION | X |

**Disclaimer**

Information contained herein was obtained from sources considered technically accurate and reliable. While every effort has been made to ensure full disclosure of product hazards, in some cases data is not available and is so stated. Since conditions of actual product use are beyond control of the supplier, it is assumed that users of this material have been fully trained according to the requirements of all applicable legislation and regulatory instruments. No warranty, expressed or implied, is made and supplier will not be liable for any losses, injuries or consequential damages which may result from the use of or reliance on any information contained in this document. The above SDS reflects the latest information on file with respect to hazards, properties and handling of this product. No warranty however, expressed or implied, is made with regard to the use of this information.

Issue date

29-April-2016

Version #

01

Effective date

29-April-2016

Prepared by

Nu-Calgon Technical Service Phone: (314) 469-7000



SAFETY DATA SHEET

1. Identification

Product identifier Hercules MegaBubble

Other means of identification

Product code 7322E

Synonyms Part Numbers: 45801, 45802, 45803, 45804

Recommended use Leak Detector

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Company Name HCC Holdings, Inc. an Oatey Affiliate

Address 4700 West 160th Street
Cleveland, OH 44135

Telephone 216-267-7100

E-mail info@oatey.com

Transport Emergency Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887)

Emergency First Aid 1-877-740-5015

Contact person MSDS Coordinator

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Not classified.

Environmental hazards Hazardous to the aquatic environment, acute Not applicable hazard

OSHA defined hazards Not classified.

Label elements

Hazard symbol None.

Signal word None.

Hazard statement The mixture does not meet the criteria for classification.

Precautionary statement

Prevention Observe good industrial hygiene practices.

Response Wash hands after handling.

Storage Store away from incompatible materials.

Disposal Dispose of waste and residues in accordance with local authority requirements.

Hazard(s) not otherwise classified (HNOC) None known.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|------------------|------------|-------|
| Propylene glycol | 57-55-6 | 30-60 |
| Water | 7732-18-5 | 30-60 |
| Glycerol | 56-81-5 | 10-30 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Call a physician if symptoms develop or persist.

Skin contact Rinse skin with water/shower. Get medical attention if irritation develops and persists.

| | |
|---|--|
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. If ingestion of a large amount does occur, call a poison control center immediately. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Avoid prolonged exposure. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------|------|---|-------------------------------------|
| Glycerol (CAS 56-81-5) | PEL | 5 mg/m ³ 15 mg/m ³ | Respirable fraction. Total dust. |

US. Workplace Environmental Exposure Level (WEEL) Guides

| Components | Type | Value | Form |
|--------------------------------|------|----------------------|----------|
| Propylene glycol (CAS 57-55-6) | TWA | 10 mg/m ³ | Aerosol. |

Biological limit values No biological exposure limits noted for the ingredient(s).

| | |
|--|---|
| Appropriate engineering controls | Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. |
| Individual protection measures, such as personal protective equipment | |
| Eye/face protection | Wear safety glasses with side shields (or goggles). |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear suitable protective clothing. |
| Respiratory protection | In case of insufficient ventilation, wear suitable respiratory equipment. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|---|-------------------------|
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Blue. |
| Odor | Odorless. |
| Odor threshold | Not available. |
| pH | 7.2 |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 212 °F (100 °C) |
| Flash point | > 212.0 °F (> 100.0 °C) |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Relative density | 1.05 |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 100 cP |
| Other information | |
| VOC (Weight %) | 435 g/l |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |

| | |
|---|--|
| Conditions to avoid | Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | Prolonged inhalation may be harmful. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|--------------------------------|---------|--------------|
| Glycerol (CAS 56-81-5) | | |
| Acute | | |
| <i>Oral</i> | | |
| LD50 | Rat | 12600 mg/kg |
| Propylene glycol (CAS 57-55-6) | | |
| Acute | | |
| <i>Oral</i> | | |
| LD50 | Rat | 30 g/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.
Serious eye damage/eye irritation Direct contact with eyes may cause temporary irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.
Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

Further information This product has no known adverse effect on human health.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | | Test Results |
|--------------------------------|---------|---------------------|----------------------|
| Propylene glycol (CAS 57-55-6) | | | |
| Aquatic | | | |
| Crustacea | LC50 | Ceriodaphnia dubia | 18340 mg/l, 48 hours |
| Fish | LC50 | Pimephales promelas | 46500 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

| | |
|--------------------------------|-------|
| Glycerol (CAS 56-81-5) | -1.76 |
| Propylene glycol (CAS 57-55-6) | -0.92 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is not known to be a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - No
Delayed Hazard - No
Fire Hazard - No
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. Massachusetts RTK - Substance List

Glycerol (CAS 56-81-5)

US. New Jersey Worker and Community Right-to-Know Act

Glycerol (CAS 56-81-5)

Propylene glycol (CAS 57-55-6)

US. Pennsylvania Worker and Community Right-to-Know Law

Glycerol (CAS 56-81-5)

Propylene glycol (CAS 57-55-6)

US. Rhode Island RTK

Not regulated.

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|-------------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 05-February-2015

Revision date -

Version # 01

HMIS® ratings
Health: 0
Flammability: 0
Physical hazard: 0

Disclaimer
HCC Holdings Inc. an Oatey Affiliate cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.



GHS SAFETY DATA SHEET

WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: **NOV 2018**
Supersedes: **OCT 2018**

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe
PRODUCT USE: Low VOC Solvent Cement for CPVC Plastic Pipe
SUPPLIER: **MANUFACTURER:** IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | | Environmental | | Physical | |
|---------------------|------------|-------------------|------------|------------------|------------|
| Acute Toxicity: | Category 4 | Acute Toxicity: | None Known | Flammable Liquid | Category 2 |
| Skin Irritation: | Category 3 | Chronic Toxicity: | None Known | | |
| Skin Sensitization: | NO | | | | |
| Eye: | Category 2 | | | | |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 2B

| Hazard Statements | Precautionary Statements |
|--|--|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H332: Harmful if inhaled H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer EUH019: May form explosive peroxides EUH066: Repeated exposure may cause skin dryness or cracking | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P337+P313: Get medical advice/attention P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------------------|----------|-----------|------------------------------|------------------------------|
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 01-2119444314-46-0000 | 30 - 60 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 01-2119457290-43-0000 | 5 - 25 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 5 - 20 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

Likely Routes of Exposure: Inhalation, Eye and Skin Contact

Acute symptoms and effects:

Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.

Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog.

Unsuitable Extinguishing Media: Water spray or stream.

Exposure Hazards: Inhalation and dermal contact

Combustion Products: Oxides of carbon, hydrogen chloride and smoke

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

| | HMIS | NFPA | |
|--------------|------|------|------------|
| Health | 2 | 2 | 1-Slight |
| Flammability | 3 | 3 | 2-Moderate |
| Reactivity | 0 | 0 | 3-Serious |
| PPE | B | | 4-Severe |

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).

Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.

Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.

Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 33°C (90°F) and away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH 8-hr TLV | ACGIH 15-min STEL | OSHA 8-hr PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8-hr PEL | CAL/OSHA Ceiling | CAL/OSHA 15-min STEL |
|------------------|---------------------------|-------------------|----------------------|------------------|---------------------|---------------------|----------------------|---------------------|-------------------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: NOV 2018
Supersedes: OCT 2018

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|--------------------------------|---|
| Appearance: | Orange or gray, heavy syrupy liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 66°C (151°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 66°C (151°F) Based on first boiling component: THF | Flammability Limits: | LEL: 1.1% based on Cyclohexanone |
| Flash Point: | -20°C (-4°F) TCC based on THF | UEL: 11.8% based on THF | |
| Specific Gravity: | 0.995 @23°C (73°F) | Vapor Pressure: | 129 mm Hg @ 20°C (68°F) based on THF |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Vapor Density: | >2 (Air = 1) |
| Partition Coefficient n-octanol/water: | Not Available | Other Data: Viscosity: | Heavy bodied |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 490 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | Not Established |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 490 g/l. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

| EXCEPTION for Ground Shipping |
|--|
| DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package. |
| Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" . |

| TDG INFORMATION | |
|---------------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|-----------------------------|---|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | R66: | Repeated exposure may cause skin dryness or cracking |
| Risk Phrases: | R11: Highly flammable. R36/37: Irritating to eyes and respiratory system. | R67: | Vapors may cause drowsiness and dizziness |
| Safety Phrases: | S2: Keep out of the reach of children S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. | S25: | Avoid contact with eyes. |
| | | S26: | In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. |
| | | S33: | Take precautionary measures against static discharges. |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 11/27/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for CPVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

Section 1. Identification

Product name Castrol GTX 10W-30
SDS # 459835
Code 459835-US81

Relevant identified uses of the substance or mixture and uses advised against

Product use Engine Oils.
 For specific application advice see appropriate Technical Data Sheet or consult our company representative.

Supplier BP Lubricants USA Inc.
 1500 Valley Road
 Wayne, NJ 07470
 Telephone: (973) 633-2200

EMERGENCY HEALTH INFORMATION: 1 (800) 447-8735
 Outside the US: +1 703-527-3887 (CHEMTREC)

EMERGENCY SPILL INFORMATION: 1 (800) 424-9300 CHEMTREC (USA)

Section 2. Hazards identification

OSHA/HCS status This material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture Not classified.

GHS label elements

Signal word No signal word.
Hazard statements No known significant effects or critical hazards.

Precautionary statements

Prevention Not applicable.
Response Not applicable.
Storage Not applicable.
Disposal Not applicable.

Hazards not otherwise classified None known.

Section 3. Composition/information on ingredients

Substance/mixture Mixture
 Highly refined base oil (IP 346 DMSO extract < 3%). Proprietary performance additives.

| Ingredient name | CAS number | % |
|--|------------|-----------|
| <input checked="" type="checkbox"/> Distillates (petroleum), hydrotreated heavy paraffinic | 64742-54-7 | ≥75 - ≤90 |
| Distillates (petroleum), hydrotreated heavy paraffinic | 64742-54-7 | ≤10 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

Section 3. Composition/information on ingredients

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

| | |
|-----------------------------------|--|
| Eye contact | In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Eyelids should be held away from the eyeball to ensure thorough rinsing. Check for and remove any contact lenses. Get medical attention. |
| Skin contact | Wash skin thoroughly with soap and water or use recognized skin cleanser. Remove contaminated clothing and shoes. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention if symptoms occur. |
| Inhalation | <input checked="" type="checkbox"/> Inhaled, remove to fresh air. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours. Get medical attention if symptoms occur. |
| Ingestion | Do not induce vomiting unless directed to do so by medical personnel. Get medical attention if symptoms occur. |
| Protection of first-aiders | No action shall be taken involving any personal risk or without suitable training. |

Most important symptoms/effects, acute and delayed

See Section 11 for more detailed information on health effects and symptoms.

Indication of immediate medical attention and special treatment needed, if necessary

| | |
|----------------------------|---|
| Notes to physician | <input checked="" type="checkbox"/> Treatment should in general be symptomatic and directed to relieving any effects. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours. |
| Specific treatments | No specific treatment. |

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media In case of fire, use foam, dry chemical or carbon dioxide extinguisher or spray.

Unsuitable extinguishing media Do not use water jet.

Specific hazards arising from the chemical

In a fire or if heated, a pressure increase will occur and the container may burst.

Hazardous combustion products

Combustion products may include the following:
carbon oxides (CO, CO₂) (carbon monoxide, carbon dioxide)
nitrogen oxides (NO, NO₂ etc.)

Special protective actions for fire-fighters

No action shall be taken involving any personal risk or without suitable training. Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire.

Special protective equipment for fire-fighters

Fire-fighters should wear positive pressure self-contained breathing apparatus (SCBA) and full turnout gear.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

| | |
|------------------------------------|--|
| For non-emergency personnel | No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Put on appropriate personal protective equipment. Floors may be slippery; use care to avoid falling. |
|------------------------------------|--|

Section 6. Accidental release measures

For emergency responders If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill Stop leak if without risk. Move containers from spill area. Absorb with an inert material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill Stop leak if without risk. Move containers from spill area. Prevent entry into sewers, water courses, basements or confined areas. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations. Dispose of via a licensed waste disposal contractor.

Section 7. Handling and storage

Precautions for safe handling

Protective measures Put on appropriate personal protective equipment (see Section 8).

Advice on general occupational hygiene Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Wash thoroughly after handling. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Store and use only in equipment/containers designed for use with this product. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Not suitable Prolonged exposure to elevated temperature

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|--|---|
| Distillates (petroleum), hydrotreated heavy paraffinic | ACGIH TLV (United States). TWA: 5 mg/m ³ 8 hours. Issued/Revised: 11/2009 Form: Inhalable fraction OSHA PEL (United States). TWA: 5 mg/m ³ 8 hours. Issued/Revised: 6/1993 |
| Distillates (petroleum), hydrotreated heavy paraffinic | ACGIH TLV (United States). TWA: 5 mg/m ³ 8 hours. Issued/Revised: 11/2009 Form: Inhalable fraction OSHA PEL (United States). TWA: 5 mg/m ³ 8 hours. Issued/Revised: 6/1993 |

While specific OELs for certain components may be shown in this section, other components may be present in any mist, vapor or dust produced. Therefore, the specific OELs may not be applicable to the product as a whole and are provided for guidance only.

Section 8. Exposure controls/personal protection

Appropriate engineering controls

All activities involving chemicals should be assessed for their risks to health, to ensure exposures are adequately controlled. Personal protective equipment should only be considered after other forms of control measures (e.g. engineering controls) have been suitably evaluated. Personal protective equipment should conform to appropriate standards, be suitable for use, be kept in good condition and properly maintained. Your supplier of personal protective equipment should be consulted for advice on selection and appropriate standards. For further information contact your national organisation for standards.

Provide exhaust ventilation or other engineering controls to keep the relevant airborne concentrations below their respective occupational exposure limits.

The final choice of protective equipment will depend upon a risk assessment. It is important to ensure that all items of personal protective equipment are compatible.

Environmental exposure controls

Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

Safety glasses with side shields.

Skin protection

Hand protection

Wear protective gloves if prolonged or repeated contact is likely. Wear chemical resistant gloves. Recommended: Nitrile gloves. The correct choice of protective gloves depends upon the chemicals being handled, the conditions of work and use, and the condition of the gloves (even the best chemically resistant glove will break down after repeated chemical exposures). Most gloves provide only a short time of protection before they must be discarded and replaced. Because specific work environments and material handling practices vary, safety procedures should be developed for each intended application. Gloves should therefore be chosen in consultation with the supplier/manufacturer and with a full assessment of the working conditions.

Body protection

Use of protective clothing is good industrial practice. Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. Cotton or polyester/cotton overalls will only provide protection against light superficial contamination that will not soak through to the skin. Overalls should be laundered on a regular basis. When the risk of skin exposure is high (e.g. when cleaning up spillages or if there is a risk of splashing) then chemical resistant aprons and/or impervious chemical suits and boots will be required.

Other skin protection

Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection

In case of insufficient ventilation, wear suitable respiratory equipment. The correct choice of respiratory protection depends upon the chemicals being handled, the conditions of work and use, and the condition of the respiratory equipment. Safety procedures should be developed for each intended application. Respiratory protection equipment should therefore be chosen in consultation with the supplier/manufacturer and with a full assessment of the working conditions.

Section 9. Physical and chemical properties

Appearance

Physical state

Liquid.

Color

Brown.

Odor

Not available.

Odor threshold

Not available.

pH

Not applicable.

Section 9. Physical and chemical properties

| | |
|---|---|
| Melting point | Not available. |
| Boiling point | Not available. |
| Flash point | Open cup: >200°C (>392°F) [Cleveland.] |
| Pour point | -36 °C |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not applicable. Based on - Physical state |
| Lower and upper explosive (flammable) limits | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Density | <1000 kg/m ³ (<1 g/cm ³) at 15°C |
| Solubility | insoluble in water. |
| Partition coefficient: n-octanol/water | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Kinematic: 68 mm ² /s (68 cSt) at 40°C Kinematic: 9.8 to 10.8 mm ² /s (9.8 to 10.8 cSt) at 100°C |

Section 10. Stability and reactivity

| | |
|---|---|
| Reactivity | No specific test data available for this product. Refer to Conditions to avoid and Incompatible materials for additional information. |
| Chemical stability | The product is stable. |
| Possibility of hazardous reactions | Under normal conditions of storage and use, hazardous reactions will not occur. Under normal conditions of storage and use, hazardous polymerization will not occur. |
| Conditions to avoid | Avoid all possible sources of ignition (spark or flame). |
| Incompatible materials | Reactive or incompatible with the following materials: oxidizing materials. |
| Hazardous decomposition products | Under normal conditions of storage and use, hazardous decomposition products should not be produced. |

Section 11. Toxicological information

Information on toxicological effects

Aspiration hazard

| Name | Result |
|--|--------------------------------|
| Distillates (petroleum), hydrotreated heavy paraffinic | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure Routes of entry anticipated: Dermal, Inhalation.

Potential acute health effects

| | |
|---------------------|--|
| Eye contact | No known significant effects or critical hazards. |
| Skin contact | No known significant effects or critical hazards. |
| Inhalation | ☑ Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure. |
| Ingestion | No known significant effects or critical hazards. |

Symptoms related to the physical, chemical and toxicological characteristics

| | | | |
|--|----------------------------------|------------------|-------------------------|
| Product name Castrol GTX 10W-30 | Product code 459835-US81 | Page: 5/9 | |
| Version 6 | Date of issue 01/08/2021. | Format US | Language ENGLISH |

Section 11. Toxicological information

| | |
|---------------------|--|
| Eye contact | No specific data. |
| Skin contact | Adverse symptoms may include the following: irritation dryness cracking |
| Inhalation | No specific data. |
| Ingestion | No specific data. |

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects Not available.

Potential delayed effects Not available.

Long term exposure

Potential immediate effects Not available.

Potential delayed effects Not available.

Potential chronic health effects

General USED ENGINE OILS
Combustion products resulting from the operation of internal combustion engines contaminate engine oils during use. Used engine oil may contain hazardous components which have the potential to cause skin cancer. Frequent or prolonged contact with all types and makes of used engine oil must therefore be avoided and a high standard of personal hygiene maintained.

Carcinogenicity No known significant effects or critical hazards.

Mutagenicity No known significant effects or critical hazards.

Teratogenicity No known significant effects or critical hazards.

Developmental effects No known significant effects or critical hazards.

Fertility effects No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

No testing has been performed by the manufacturer.

Persistence and degradability

Expected to be biodegradable.

Bioaccumulative potential

This product is not expected to bioaccumulate through food chains in the environment.

Mobility in soil

Soil/water partition coefficient (K_{oc}) Not available.

Mobility Spillages may penetrate the soil causing ground water contamination.

Other adverse effects No known significant effects or critical hazards.

Section 12. Ecological information

Other ecological information Spills may form a film on water surfaces causing physical damage to organisms. Oxygen transfer could also be impaired.

Section 13. Disposal considerations

Disposal methods The generation of waste should be avoided or minimized wherever possible. Significant quantities of waste product residues should not be disposed of via the foul sewer but processed in a suitable effluent treatment plant. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | TDG Classification | IMDG | IATA |
|-----------------------------------|---------------------------|---------------------------|----------------|----------------|
| UN number | Not regulated. | Not regulated. | Not regulated. | Not regulated. |
| UN proper shipping name | - | - | - | - |
| Transport hazard class(es) | - | - | - | - |
| Packing group | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. |
| Additional information | - | - | - | - |

Special precautions for user Not available.

Transport in bulk according to IMO instruments Not available.

Section 15. Regulatory information

U.S. Federal regulations

United States inventory (TSCA 8b) All components are active or exempted.

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 311/312

Classification Not applicable.

SARA 313

Form R - Reporting requirements This product does not contain any hazardous ingredients at or above regulated thresholds.

Supplier notification This product does not contain any hazardous ingredients at or above regulated thresholds.

State regulations

Product name Castrol GTX 10W-30 **Product code** 459835-US81 **Page:** 7/9
Version 6 **Date of issue** 01/08/2021. **Format** US **Language** ENGLISH

Section 15. Regulatory information

| | |
|--|--|
| Massachusetts | The following components are listed: OIL MIST, MINERAL; OIL MIST, MINERAL |
| New Jersey | The following components are listed: Amines, polyethylenepoly-, reaction products with succinic anhydride polyisobutenyl derivs., borated |
| Pennsylvania | The following components are listed: Amines, polyethylenepoly-, reaction products with succinic anhydride polyisobutenyl derivs., borated |
| California Prop. 65 | ⚠ WARNING: This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. This product can expose you to chemicals including Naphthalene and Ethylbenzene, which are known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov . |
| Other regulations | |
| Australia inventory (AICS) | All components are listed or exempted. |
| Canada inventory | All components are listed or exempted. |
| China inventory (IECSC) | All components are listed or exempted. |
| Japan inventory (ENCS) | At least one component is not listed. |
| Korea inventory (KECI) | All components are listed or exempted. |
| Philippines inventory (PICCS) | At least one component is not listed. |
| Taiwan Chemical Substances Inventory (TCSI) | All components are listed or exempted. |
| REACH Status | For the REACH status of this product please consult your company contact, as identified in Section 1. |

Section 16. Other information

National Fire Protection Association (U.S.A.)



History

| | |
|---------------------------------------|---------------------|
| Date of issue/Date of revision | 01/08/2021. |
| Date of previous issue | 10/12/2020. |
| Prepared by | Product Stewardship |

Key to abbreviations

ACGIH = American Conference of Industrial Hygienists
ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
CAS Number = Chemical Abstracts Service Registry Number
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
OEL = Occupational Exposure Limit
SDS = Safety Data Sheet
STEL = Short term exposure limit
TWA = Time weighted average
UN = United Nations
UN Number = United Nations Number, a four digit number assigned by the United Nations Committee of Experts on the Transport of Dangerous Goods.
Varies = may contain one or more of the following 64741-88-4, 64741-89-5, 64741-95-3, 64741-96-4, 64742-01-4, 64742-44-5, 64742-45-6, 64742-52-5, 64742-53-6, 64742-54-7, 64742-55-8, 64742-56-9, 64742-57-0, 64742-58-1, 64742-62-7, 64742-63-8, 64742-65-0, 64742-70-7, 72623-85-9, 72623-86-0, 72623-87-1

| | | | | |
|---------------------|----------------------------------|---------------------|-------------------------|------------------|
| Product name | Castrol GTX 10W-30 | Product code | 459835-US81 | Page: 8/9 |
| Version 6 | Date of issue 01/08/2021. | Format US | Language ENGLISH | |

Section 16. Other information

✔ Indicates information that has changed from previously issued version.

Notice to reader

All reasonably practicable steps have been taken to ensure this data sheet and the health, safety and environmental information contained in it is accurate as of the date specified below. No warranty or representation, express or implied is made as to the accuracy or completeness of the data and information in this data sheet.

The data and advice given apply when the product is sold for the stated application or applications. You should not use the product other than for the stated application or applications without seeking advice from BP Group.

It is the user's obligation to evaluate and use this product safely and to comply with all applicable laws and regulations. The BP Group shall not be responsible for any damage or injury resulting from use, other than the stated product use of the material, from any failure to adhere to recommendations, or from any hazards inherent in the nature of the material. Purchasers of the product for supply to a third party for use at work, have a duty to take all necessary steps to ensure that any person handling or using the product is provided with the information in this sheet. Employers have a duty to tell employees and others who may be affected of any hazards described in this sheet and of any precautions that should be taken. You can contact the BP Group to ensure that this document is the most current available. Alteration of this document is strictly prohibited.



GHS SAFETY DATA SHEET

WELD-ON® P-68™ Low VOC Primer for PVC and CPVC Plastic Pipe

Date Revised: DEC 2018
Supersedes: APR 2015

SECTION I - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® P-68™ Low VOC Primer for PVC and CPVC Plastic Pipe
PRODUCT USE: Low VOC Primer for PVC and CPVC Plastic Pipe
SUPPLIER:

MANUFACTURER: IPS Corporation
17109 South Main Street, Gardena, CA 90248-3127
P.O. Box 379, Gardena, CA 90247-0379
Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| | | |
|-----------------------------------|--|---------------------------------------|
| Acute Toxicity: Health Category 4 | Acute Toxicity: Environmental None Known | Flammable Liquid: Physical Category 2 |
| Skin Irritation: Category 3 | Chronic Toxicity: None Known | |
| Skin Sensitization: NO | | |
| Eye: Category 2 | | |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 2B

| Hazard Statements | Precautionary Statements |
|---|--|
| H225: Highly flammable liquid and vapor | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking |
| H319: Causes serious eye irritation | P261: Avoid breathing dust/fume/gas/mist/vapors/spray |
| H332: Harmful if inhaled | P280: Wear protective gloves/protective clothing/eye protection/face protection |
| H335: May cause respiratory irritation | P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing |
| H336: May cause drowsiness or dizziness | P403+P233: Store in a well ventilated place. Keep container tightly closed |
| H351: Suspected of causing cancer | P501: Dispose of contents/container in accordance with local regulation |
| EUH019: May form explosive peroxides | |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------------------|----------|-----------|------------------------------|------------------------------|
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 01-2119444314-46-0000 | 20 - 35 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 01-2119457290-43-0000 | 15 - 25 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 10 - 30 |
| Acetone | 67-64-1 | 200-662-2 | 01-2119471330-49-0000 | 25 - 40 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
* Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.

Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.

Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.

Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

Likely Routes of Exposure: Inhalation, Eye and Skin Contact

Acute symptoms and effects:

Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.

Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.

Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.

Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.

Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog.

Unsuitable Extinguishing Media: Water spray or stream.

Exposure Hazards: Inhalation and dermal contact

Combustion Products: Oxides of carbon and smoke

| | HMIS | NFPA | |
|--------------|------|------|------------|
| Health | 2 | 2 | 0-Minimal |
| Flammability | 3 | 3 | 1-Slight |
| Reactivity | 0 | 0 | 2-Moderate |
| PPE | B | | 3-Serious |
| | | | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).

Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.

Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.

Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH 8 hour TLV | ACGIH 15 min STEL | OSHA 8 hour PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8 hour PEL | CAL/OSHA Ceiling | CAL/OSHA 15 min STEL |
|------------------|---------------------------|---------------------|----------------------|--------------------|---------------------|---------------------|------------------------|---------------------|-------------------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |
| | Acetone | 250 ppm | 500 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.

Personal Protective Equipment (PPE):

Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.

Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.

Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® P-68™ Low VOC Primer for PVC and CPVC Plastic Pipe

Date Revised: DEC 2018
Supersedes: APR 2015

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Clear or purple, thin liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ethereal | Boiling Range: | 56°C (133°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 56°C (133°F) Based on first boiling component: Acetone | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 12.8% based on Acetone |
| Flash Point: | -20°C (-4°F) TCC based on Acetone | Vapor Pressure: | 190 mm Hg @ 20°C (68°F) Acetone |
| Specific Gravity: | 0.842 @ 23°C (73°F) | Vapor Density: | >2.0 (Air = 1) |
| Solubility: | Solvent portion soluble in water. | Other Data: Viscosity: | Water-thin |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 550 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|---|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | |
| Acetone | Oral: 5800 mg/kg (rat) | Inhalation 50,100 mg/m ³ (rat) | STOT SE3 |

| | | | | | |
|--|--|--|--|--|--|
| Reproductive Effects Not Established | Teratogenicity Not Established | Mutagenicity Not Established | Embryotoxicity Not Established | Sensitization to Product Not Established | Synergistic Products Not Established |
|--|--|--|--|--|--|

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 550 g/l. |
| Degradability: | Not available |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|---|
| Proper Shipping Name: | Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1993 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

EXCEPTION for Ground Shipping

DOT Limited Quantity: Up to 1L per inner packaging, 30 kg gross weight per package.
Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" .

| TDG INFORMATION | |
|--------------------------|---|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) |
| UN NUMBER/PACKING GROUP: | UN 1993, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|---|--|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R20: Harmful by inhalation. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness | |
| Safety Phrases: | S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. S25: Avoid contact with eyes. | S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. S46: If swallowed, seek medical advise immediately and show this container or label. | |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 12/4/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Primer for PVC and CPVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

SAFETY DATA SHEET

Date Issued: 2/6/15

Page 1 of 5

SECTION 1 – COMPANY and PRODUCT IDENTIFICATION

MANUFACTURER

GARDNER-GIBSON CORPORATION

4161 East 7th Avenue

Tampa, FL 33605

EMERGENCY TELEPHONE NUMBER

1-800-424-9300 CHEMTREC

Product Information

813-248-2101

gardner-gibson.com

Product Class

Acrylic latex sealant used in building construction.

Product Code Number

0338-GA (1 quart)

Trade Name

Leak Stopper Clear Patch

SECTION 2 – HAZARDS IDENTIFICATION

Product Classification: No need for classification according to GHS criteria.

Effects of acute toxicity:

EYES: Direct contact may cause irritation.

SKIN: May cause irritation to sensitive skin or open wounds.

INHALATION: May cause irritation to respiratory passages.

INGESTION: May cause nausea.

Precautions:

Wear suitable protective clothing, gloves and eye protection.

If the product adheres to exposed skin, irritation may occur when the product dries.

Use with local exhaust ventilation.

Do not take internally. Wash hands before eating or drinking.

SECTION 3 – COMPOSITION / INFORMATION on INGREDIENTS

| INGREDIENT | Content (By Weight) | TLV PPM | PEL - TWA PPM |
|--|------------------------|------------|------------------|
| 2,2,4-Trimethyl-1,3-pentanediol Monoisobutyrate CAS # 25265-77-4 | 1.0 - 2.0% | N.E. | N.E. |
| 2-Amino-2-methyl-1-propanol CAS # 124-68-5 | 1.0 - 2.0% | N.E. | N.E. |
| All nonhazardous ingredients in this waterborne product are trade secret. | 96.0 - 98.0% | N.A. | N.A. |

There are no ingredients in this product of unknown acute toxicity.

N.E. = Not Established

N.A. = Not Applicable

SAFETY DATA SHEET

Leak Stopper Clear Patch

Page 2 of 5

SECTION 4 – FIRST-AID MEASURES

Inhalation: If inhaled, remove victim to fresh air and keep at rest in a position comfortable for breathing. If signs/symptoms of difficulty in breathing continue, get immediate medical attention.

Skin: Rinse skin immediately with plenty of clean water for 5 to 10 minutes. Remove contaminated clothing. If skin irritation occurs get medical advice/attention.

Eye(s): Rinse cautiously with water for several minutes. Remove contact lenses if present and if it is easy to do so. Continue rinsing. If eye irritation persists get medical advice/attention.

Ingestion: If swallowed, do not induce vomiting. If conscious, give 2 to 3 glasses of water and seek medical advice/attention immediately.

SECTION 5 – FIRE-FIGHTING MEASURES

Extinguishing Media: Carbon dioxide, dry chemical, foam, or water spray

Unusual Fire and Explosion Hazards: None known

Special Fire Fighting Procedures: Water can be used to cool fire-exposed containers. Self-contained breathing apparatus and protective clothing should be worn in fighting large fires involving chemicals.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Steps to be taken in case material is released or spilled: Observe all personal protective equipment recommendations described in Section 8. Wipe up or scrape up spilled material and contain for disposal. Final cleaning may require use of hot water and/or detergents. Dispose of saturated absorbent or cleaning materials appropriately.

SECTION 7 – HANDLING and STORAGE

Precautions for safe handling: Keep away from extreme heat. Do not get in eyes, on skin, on clothing. Do not swallow product. Wash thoroughly after handling. Use with adequate ventilation.

Conditions for safe storage: Store in a cool, dry place in the original container. Keep container closed when not in use. Store the product away from strong oxidizing chemicals. Avoid extreme heat. Store above 7 °C (45 °F). Product will freeze below 0 °C (32 °F).

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

Respiratory Protection: Use with adequate ventilation.

Skin Protection: Chemical resistant gloves are recommended for prolonged exposure.

Eye Protection: Wear safety glasses with side shields.

OTHER PROTECTIVE EQUIPMENT: None required.

SAFETY DATA SHEET

SECTION 9 – PHYSICAL and CHEMICAL PROPERTIES

| | |
|--|--|
| Appearance (Physical state, color): | Thick fluid paste, milky-white when wet, dries clear |
| Odor: | Mild, acrylic-like |
| Odor Threshold: | No information is available. |
| pH: | 7.5 – 8.5 |
| Melting point: | No data is available. |
| Initial Boiling Point & Boiling Range: | 100 °C to 244 °C (212 °F to 471 °F) |
| Flash Point: | >94 °C (>201 °F) |
| Evaporation Rate: | Slower than Ether |
| Flammability: | Nonflammable |
| Upper/Lower Flammability Limits: | No data is available. |
| Vapor Pressure: | 17.5 mm Hg @ 20 °C (68 °F) |
| Vapor Density: | Heavier than air |
| Density: | 1.06 g/cm ³ (8.8 Lbs/gal) 21 °C (70 °F) |
| Solubility (in water): | Dispersible in water |
| Partition coefficient (n-octanol/water): | No data is available. |
| Auto-ignition temperature: | No data is available. |
| Decomposition temperature: | >250 °C (482 °F) |
| Viscosity (Brookfield RV, 5 rpm): | 300,000 cP ±60,000 @ 21 °C (70 °F) |

SECTION 10 – STABILITY and REACTIVITY

Reactivity: No hazardous reactions if stored and handled as prescribed.

Chemical Stability: The product is stable if stored and handled as prescribed.

Hazardous decomposition products: Carbon dioxide, carbon monoxide, and hydrocarbons.

Hazardous polymerization: Will not occur. The product is chemically stable.

SECTION 11 – TOXICOLOGICAL INFORMATION

Primary routes of exposure: Routes of entry for the product into the human body are accidental ingestion, accidental eye contact, and prolonged skin contact. Inhalation of the vapor released from the product as it dries is dependent upon the absence of proper ventilation during use of the product.

Acute Toxicity/Effects:

EYES: Direct contact may cause irritation.

SKIN: May cause irritation to sensitive skin or open wounds.

INHALATION: May cause irritation to respiratory passages.

INGESTION: May cause nausea/gastrointestinal distress.

No ingredient in this product is an IARC, NTP or OSHA listed carcinogen.

SAFETY DATA SHEET

Leak Stopper Clear Patch

Page 4 of 5

SECTION 11 – TOXICOLOGICAL INFORMATION (continued from page 3)

No human toxicological studies (Oral, Inhalation or Dermal) have been conducted on this compounded product.

No animal toxicological studies (Oral, Inhalation or Dermal) have been conducted on this compounded product.

Chronic Toxicity/Effects:

EYES: No data available.

SKIN: No data available.

INHALATION: No data available.

INGESTION: No data available.

SECTION 12 – ECOLOGICAL INFORMATION

Ecological Fate: * No data available.

Persistence/Degradability: * No data available.

Bioaccumulation Potential: * No data available.

Mobility in Soil: * No data available.

SECTION 13 – DISPOSAL CONSIDERATIONS

Dispose of unused product and/or empty containers in accordance with local, regional, national, and/or international regulations.

Do not discharge into drains/surface waters/groundwater or open ground/soil.

SECTION 14 – TRANSPORT INFORMATION

DOT Proper Shipping Name: Not Regulated by D.O.T.

DOT Hazard Class: None

DOT UN/NA Number: None

Packing Group: None

IMO/IMDG – International Maritime Transport Shipping Name: Not Regulated.

IATA – International Air Transportation Association: Not Regulated.

Do not transport this product on passenger seats or inside the passenger compartment of any vehicle. Transport product in the cargo area of the vehicle and secure it on and under protective cloths or plastic wrap to prevent damage due to accidental spills.

SECTION 15 – REGULATORY INFORMATION

SARA Title III – No substances are contained in this product subject to the reporting requirements of EPCRA Section 313 of the Super Fund Amendments and Reauthorization Act, 40 CFR Part 372.

TSCA Status: All chemical substances in this material are included on or exempted from listing on the TSCA Inventory of Chemical Substances.

No ingredient in this product is an IARC, NTP or OSHA listed carcinogen.

California Proposition 65 Chemical Warning (California Health and Safety Code #25249.5 et seq): This product contains chemicals known to the state of California to cause cancer, birth defects or reproductive harm.

SAFETY DATA SHEET

Leak Stopper Clear Patch

Page 5 of 5

SECTION 16 – OTHER INFORMATION

Hazardous Materials Identification System (HMIS)

| | | | |
|---------------|---------------------|------------------------|--|
| Health | Flammability | Physical Hazard | Personal Protection Equipment (PPE) |
| 1 | 0 | 0 | B – Safety glasses and gloves |

Legend: 0 = Insignificant 1 = Slight 2 = Moderate 3 = High

Other Precautions: Keep out of the reach of children.
Protect from freezing.

Disclaimer/Statement of Liability:

This information relates to the specific material designated and may not be valid for such material used in combination with any other materials or in any process. Such information is to the best of our knowledge and belief, accurate and reliable as of the date compiled. However, no representation, warranty or guarantee is made as to its accuracy, reliability or completeness. It is the user's responsibility to verify the suitability and completeness of such information for a particular use. Gardner-Gibson does not accept liability for any loss or damage that may occur from the use of this information.

Prepared by: Morton Jones
2-6-15
Product # 0338-GA



Air Tool Lubricant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012.
Date of issue: 01/05/2020 Revision date: 01/05/2016 Version: 1.0

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product name : Air Tool Lubricant
Product code : 16-ATL, 128-ATL, 5-ATL & 55-ATL

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Multi-Purpose Lubricant

1.3. Details of the supplier of the safety data sheet

The Blaster Corporation
8500 Sweet Valley Drive
Valley View, Ohio 44125 - USA
T (216) 901-5800 - F (216) 901-5801
www.blasterproducts.com

1.4. Emergency telephone number

Emergency number : Chemtrec (800) 424-9300

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

Skin irritation 2
Specific target organ toxicity - Repeated exposure 2
Aspiration toxicity 1

2.2. Label elements

GHS-US labelling

This product is a consumer product and is labeled in accordance with the US Consumer Product Safety Commission regulations which take precedence over OSHA Hazard Communication labeling. The actual container label will not include the label elements below. The labeling below applies to industrial/professional products.

Hazard pictograms (GHS-US) :



Signal word (GHS-US) : Danger
Hazard statements (GHS-US) : Causes skin irritation. May cause damage to organs through prolonged or repeated exposure
May be fatal if swallowed and enters airways.

Precautionary statements (GHS-US) : Wash hands thoroughly after handling. Wear protective gloves. Do not breathe dust/fume/gas/mist/vapors/spray. Get medical advice/attention if you feel unwell. If on skin: Wash with plenty of water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical advice/attention. If swallowed: Immediately call a poison center/doctor. Do NOT induce vomiting. Store locked up. Dispose of contents/container in accordance with local/regional/national/international regulations.

2.3. Other hazards

No additional information available

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable

3.2. Mixture

| Name | Product identifier | % | GHS-US classification |
|---|---------------------|----------|--|
| White mineral oil, petroleum | (CAS No) 8042-47-5 | 60 - 100 | Not classified |
| Distillates, petroleum, hydrotreated middle | (CAS No) 64742-46-7 | 7 - 13 | Flam. Liq. 4 Acute Tox. 4 (Inhalation:dust,mist) Skin Irrit. 2 STOT RE 2 Asp. Tox. 1 |
| Distillates, petroleum, hydrotreated light naphthenic | (CAS No) 64742-53-6 | 3 - 7 | Asp. Tox. 1 Acute Tox. 4 (dust/mist) Carc. 1B |

* The exact percentage (concentration) of composition has been withheld as a trade secret in accordance with paragraph (i) of §1910.1200.

Air Tool Lubricant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012.

SECTION 4: First aid measures

4.1. Description of first aid measures

- First-aid measures after inhalation : If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical advice/attention if you feel unwell.
- First-aid measures after skincontact : In case of contact, immediately flush skin with plenty of water. Remove contaminated clothing and shoes. Wash clothing before reuse. Call a physician if irritation develops and persists.
- First-aid measures after eyecontact : In case of contact, immediately flush eyes with plenty of water. Remove contact lenses, if worn. If irritation persists, get medical attention.
- First-aid measures after ingestion : Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Immediately call a POISON CENTER or doctor/physician.

4.2. Most important symptoms and effects, both acute and delayed

- Symptoms/injuries after inhalation : May cause respiratory tract irritation.
- Symptoms/injuries after skincontact : Causes skin irritation. Symptoms may include redness, edema, drying, defatting and cracking of the skin.
- Symptoms/injuries after eye contact : May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with possible redness and swelling.
- Symptoms/injuries after ingestion : May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting.

4.3. Indication of any immediate medical attention and special treatment needed

Symptoms may not appear immediately. In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

SECTION 5: Firefighting measures

5.1. Extinguishing media

- Suitable extinguishing media : Water fog, carbon dioxide, dry chemical or alcohol foam.
- Unsuitable extinguishing media : None known.

5.2. Special hazards arising from the substance or mixture

- Fire hazard : Products of combustion may include, and are not limited to: oxides of carbon, hydrocarbons.

5.3. Advice for firefighters

- Protection during firefighting : Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA).

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

- General measures : Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel.

6.2. Methods and material for containment and cleaning up

- For containment : Contain and/or absorb spill with inert material (e.g. sand, vermiculite), then place in a suitable container. Do not flush to sewer or allow to enter waterways. Use appropriate Personal Protective Equipment (PPE).
- Methods for cleaning up : Scoop up material and place in a disposal container. Provide ventilation.

6.3. Reference to other sections

See section 8 for further information on protective clothing and equipment and section 13 for advice on waste disposal.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

- Precautions for safe handling : Avoid contact with skin and eyes. Do not breathe dust/fume/gas/mist/vapors/ spray. Do not swallow. Handle and open container with care. When using do not eat, drink or smoke.
- Hygiene measures : Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2. Conditions for safe storage, including any incompatibilities

- Storage conditions : Keep out of the reach of children. Keep container tightly closed and in a well-ventilated place. Keep cool.

7.3. Specific end use(s)

Not available.

Air Tool Lubricant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| White mineral oil, petroleum(8042-47-5) | | |
|--|-------------------------------------|----------------------------|
| USA ACGIH | ACGIH TWA | Not applicable |
| USA OSHA | OSHA PEL (TWA) | Not applicable |
| Distillates, petroleum, hydrotreated middle (64742-46-7) | | |
| USA ACGIH | ACGIH TWA | Not applicable |
| USA OSHA | OSHA PEL (TWA) | Not applicable |
| Distillates, petroleum, hydrotreated light naphthenic (64742-53-6) | | |
| USA ACGIH | ACGIH TWA (mg/m ³) | 5 mg/m ³ (mist) |
| USA OSHA | OSHA PEL (TWA) (mg/m ³) | 5 mg/m ³ (mist) |

8.2. Exposure controls

| | |
|----------------------------------|--|
| Appropriate engineering controls | : Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits. |
| Hand protection | : Wear chemically resistant protective gloves. |
| Eye protection | : Safety glasses or goggles are recommended when using product. |
| Skin and body protection | : Wear suitable protective clothing. |
| Respiratory protection | : In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. |
| Environmental exposure controls | : Maintain levels below Community environmental protection thresholds. |
| Other information | : Do not eat, smoke or drink where material is handled, processed or stored. Wash hands carefully before eating or smoking. Handle according to established industrial hygiene and safety practices. |

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|--------------------------------|
| Physical state | : Liquid |
| Appearance | : Oily |
| Colour | : No data available |
| Odour | : Petroleum |
| Odour threshold | : No data available |
| pH | : No data available |
| Relative evaporation rate (butylacetate=1) | : < 1 |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : 371.1 - 460 °C (700 - 860°F) |
| Flash point | : > 182.2 °C (>360°F) |
| Auto-ignition temperature | : > 315.6 °C (>600°F) |
| Decomposition temperature | : No data available |
| Flammability (solid, gas) | : Not flammable |
| Vapour pressure | : No data available |
| Relative vapour density at 20 °C | : > 1 (Air = 1) |
| Relative density | : 0.86 |
| Solubility | : Insoluble |
| Log Pow | : No data available |
| Log Kow | : No data available |
| Viscosity, kinematic | : 19 cSt @ 40°C (104°F) |
| Viscosity, dynamic | : No data available |
| Explosive properties | : No data available |
| Oxidising properties | : No data available |
| Explosive limits | : No data available |

Air Tool Lubricant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012.

9.2. Other information

No additional information available

SECTION 10: Stability and reactivity

10.1. Reactivity

No dangerous reaction known under conditions of normal use.

10.2. Chemical stability

Stable under normal storage conditions.

10.3. Possibility of hazardous reactions

No dangerous reaction known under conditions of normal use.

10.4. Conditions to avoid

Heat. Excessive water.

10.5. Incompatible materials

Strong oxidizing agents. Strong reducing agents.

10.6. Hazardous decomposition products

May include, and are not limited to: oxides of carbon, hydrocarbons.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Not classified

| Air Tool Lubricant | |
|---------------------|-------------------|
| LD50 oral rat | > 2000 mg/kg |
| LD50 dermal rabbit | > 2000 mg/kg |
| LC50 inhalation rat | No data available |

| White mineral oil, petroleum(8042-47-5) | |
|---|-------------|
| LD50 oral rat | >5000 mg/kg |
| LD50 dermal rabbit | >2000 mg/kg |
| LC50 inhalation rat | > 5 mg/l/4h |

| Distillates, petroleum, hydrotreated middle (64742-46-7) | |
|--|-------------|
| LD50 oral rat | 7400 mg/kg |
| LD50 dermal rabbit | >2000 mg/kg |
| LC50 inhalation rat | 4.6 mg/l/4h |

| Distillates, petroleum, hydrotreated light naphthenic (64742-53-6) | |
|--|--------------|
| LD50 oral rat | >5000 mg/kg |
| LD50 dermal rabbit | > 2000 mg/kg |
| LC50 inhalation rat | 2.18 mg/l/4h |

| | |
|--|---|
| Skin corrosion/irritation | : Causes skin irritation. |
| Serious eye damage/irritation | : Based on available data, the classification criteria are not met. |
| Respiratory or skin sensitisation | : Based on available data, the classification criteria are not met. |
| Germ cell mutagenicity | : Based on available data, the classification criteria are not met. |
| Carcinogenicity | : Based on available data, the classification criteria are not met. |
| Reproductive toxicity | : Based on available data, the classification criteria are not met. |
| Specific target organ toxicity (single exposure) | : Based on available data, the classification criteria are not met. |
| Specific target organ toxicity (repeated exposure) | : May cause damage to organs through prolonged or repeated exposure. |
| Aspiration hazard | : May be fatal if swallowed and enters airways. |
| Symptoms/injuries after inhalation | : May cause respiratory tract irritation. |
| Symptoms/injuries after skin contact | : Causes skin irritation. Symptoms may include redness, edema, drying, defatting and cracking of the skin. |
| Symptoms/injuries after eye contact | : May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with possible redness and swelling. |

Air Tool Lubricant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012.

Symptoms/injuries after ingestion : May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting.

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general : May cause long-term adverse effects in the aquatic environment.

12.2. Persistence and degradability

Air Tool Lubricant

| | |
|-------------------------------|------------------|
| Persistence and degradability | Not established. |
|-------------------------------|------------------|

12.3. Bioaccumulative potential

Air Tool Lubricant

| | |
|---------------------------|------------------|
| Bioaccumulative potential | Not established. |
|---------------------------|------------------|

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

Effect on ozone layer : No additional information available

Effect on the global warming : No known ecological damage caused by this product.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste disposal recommendations : This material must be disposed of in accordance with all local, state, provincial, and federal regulations. The generation of waste should be avoided or minimized wherever possible.

SECTION 14: Transport information

In accordance with DOT

14.1. UN number

Not regulated for transport

14.2. UN proper shipping name

Not applicable

14.3. Additional information

Other information : No supplementary information available.

Special transport precautions : Do not handle until all safety precautions have been read and understood.

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory.

15.2. US State regulations

Air Tool Lubricant

| | |
|----------------------------|--|
| State or local regulations | This product does not contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm. |
|----------------------------|--|

SECTION 16: Other information

Indication of changes : None.

Date of issue : 01/05/2020

Other information : None.

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.

S A F E T Y D A T A S H E E T

===== SECTION I – PRODUCT AND COMPANY IDENTIFICATION =====

PRODUCT NAME: United Duct Sealer (Water-Based)


MANUFACTURERS' OR:
SUPPLIER'S NAME: McGill AirSeal LLC

ADDRESS: 2400 Fairwood Ave.
Columbus, OH 43207-2700

MAIN PHONE: (614)829-1200
TOLL FREE: (800)624-5535
EMERGENCY PHONE: Chem-Tel: (800) 255-3924 (24 Hrs)

| HMIS | |
|---------------------|---|
| Health Hazard | 1 |
| Fire Hazard | 0 |
| Reactivity | 0 |
| Personal Protection | B |

DOT HAZARD CLASS: Not Hazardous UN Number N/A
SHIPPING NAME: N/A Packing Group N/A



===== SECTION II - HAZARDOUS INGREDIENTS / SARA III INFORMATION =====

| REPORTABLE COMPONENTS | CAS NUMBER | VAPOR PRESSURE mm Hg @ TEMP | WEIGHT PERCENT |
|-----------------------|------------|--------------------------------|----------------|
| None | | | |

===== SECTION III – COMPOSITION/INFORMATION ON INGREDIENTS =====

| CAS # | Trade secret Y/N | Chemical Name | Comment |
|-------------------|---------------------|---------------|---------|
| Proprietary Blend | YES | | |

===== SECTION IV – FIRST AID MEASURES =====

INHALATION: Remove to fresh air. If breathing is difficult, administer oxygen. If breathing has stopped, administer artificial respiration. Contact physician or emergency medical facility immediately.

SKIN: Remove contaminated clothing and shoes. Wash exposed area thoroughly with soap and water for at least 15 minutes. Do not rub affected area. If irritation persists, get medical attention. Skin reaction may take 24 to 48 hours to develop. Wash contaminated clothing before reuse.

EYES: Immediately flush eyes with large amounts of water for at least 15 minutes while frequently lifting the upper and lower eyelids. If irritation persists, call a physician.

INGESTION: Do not induce vomiting. Contact physician or emergency medical facility immediately. Never give anything by mouth to an unconscious person.

===== SECTION V - FIRE-FIGHTING MEASURES =====

FLASH POINT: Not Applicable METHOD USED: Not Applicable
FLAMMABLE LIMITS IN AIR BY VOLUME – LOWER: N/A UPPER: N/A

EXTINGUISHING MEDIA: The product will only burn after the water it contains is driven off. For dried film use water, foam, carbon dioxide or dry chemical.

SPECIAL FIRE FIGHTING PROCEDURES: When dried film burns, carbon dioxide (CO₂), carbon monoxide (CO), hydrogen chloride gas (HCl), and smoke are produced. Firefighters should wear self-contained breathing apparatus, especially in enclosed areas. Cool containers and minimize vapors with water spray.

S A F E T Y D A T A S H E E T

UNUSUAL FIRE AND EXPLOSION HAZARDS: Closed containers exposed to high temperatures may explode or burst due to build-up of steam pressure.

===== **SECTION VI – ACCIDENTAL RELEASE MEASURES** =====

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: Dike, contain, or absorb with inert absorbent material. Collect spilled material in a salvage container. Prevent spill from entering sewers, drains, streams, waterways, or other bodies of water.

WASTE DISPOSAL METHOD: Dispose of in accordance with all local, state and federal regulations.

===== **SECTION VII – HANDLING AND STORAGE** =====

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING: **DO NOT ALLOW TO FREEZE.** Store in a cool dry location away from heat. Keep containers tightly closed and store with adequate ventilation.

OTHER PRECAUTIONS: **DO NOT TAKE INTERNALLY.** Avoid inhalation of excess vapors, ingestion, and unnecessary, prolonged, or repeated contact with this and any other chemical. Change soiled work clothes frequently. Clean hands after handling. **KEEP OUT OF REACH OF CHILDREN.**

===== **SECTION VIII – EXPOSURE CONTROLS/PERSONAL PROTECTION** =====

RESPIRATORY PROTECTION: Not required under normal conditions. Provide sufficient ventilation to maintain constant fresh air in workspace. If TLV is exceeded, use NIOSH/MSHA approved organic vapor and mist, supplied air, or self-contained breathing apparatus. Avoid breathing sanding dust.

VENTILATION: Use adequate mechanical (general and/or local) ventilation to maintain exposure below TLV.

SKIN PROTECTION (PROTECTIVE GLOVES): Wear resistant gloves such as polyethylene.

EYE PROTECTION: Use chemical splash goggles or OSHA permitted safety glasses.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Wear impervious clothing. Eye wash station.

WORK / HYGENIC PRACTICES: Source of clean water should be available for flushing eyes and washing skin. Wash thoroughly after handling any chemicals, especially before eating, drinking, or smoking. Remove and launder contaminated clothing before reuse.

===== **SECTION IX - PHYSICAL / CHEMICAL PROPERTIES** =====

| | |
|-------------------------------|--|
| PHYSICAL FORM: Viscous liquid | COLOR: Gray |
| ODOR: Mild, sweet | pH: 7.5-9.0 |
| SOLUBILITY IN WATER: Miscible | SPECIFIC GRAVITY (H ₂ O=1): 1.3-1.5 |
| BOILING POINT: 212°F | % VOLATILES BY WEIGHT: 30-40 |
| FREEZING POINT: 32° F (0° C) | VISCOSITY (cps): approx. 300,000-400,000 |
| COATING V.O.C.: 0 g/l | |

===== **SECTION X – STABILITY AND REACTIVITY DATA** =====

STABILITY: Stable at ambient temperatures.

CONDITIONS TO AVOID: Coagulation may occur after freezing, thawing, or boiling.

INCOMPATIBILITY (MATERIALS TO AVOID): Metal salts, mineral acids (i.e. sulfuric, phosphoric, etc.) Strong oxidizing agents. Strong reducing agents.

HAZARDOUS POLYMERIZATION: Will not occur.

HAZARDOUS DECOMPOSITION PRODUCTS: May form toxic materials on thermal decomposition including Carbon monoxide (CO), Carbon dioxide (CO₂), and various hydrocarbons. Under fire conditions, this product will release hydrogen chloride gas.

===== **SECTION XI – TOXICOLOGICAL INFORMATION** =====

S A F E T Y D A T A S H E E T

INHALATION HEALTH RISKS AND SYMPTOMS OF EXPOSURE: Adverse health effects from vapors or spray mists in poorly ventilated areas may include irritation of the mucous membranes of the nose, throat, and respiratory tract and symptoms of headache and nausea.

SKIN AND EYE CONTACT HEALTH RISKS AND SYMPTOMS OF EXPOSURE: EYES: In direct contact, may cause irritation. SKIN: Prolonged and repeated contact with product may cause skin irritation.

SKIN ABSORPTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE: Redness, drying of the skin, or other signs of irritation or contact dermatitis.

INGESTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE: Can cause gastrointestinal irritation, nausea, vomiting, and diarrhea.

HEALTH HAZARDS (ACUTE AND CHRONIC): ACUTE: May cause irritation to skin and eyes, gastrointestinal irritation, nausea, and vomiting. CHRONIC: Prolonged or repeated exposure above TLV may result in permanent brain and nervous system damage.

CARCINOGENICITY: NTP CARCINOGEN: No IARC MONOGRAPHS: No OSHA REGULATED: No

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE: May be aggravating to some skin and respiratory conditions, and to pre-existing liver and/or kidney disorders.

===== SECTION XII – ECOLOGICAL INFORMATION =====

Ecotoxicity: No ecotoxicity data was found for the product
Environmental Fate: No environmental information found for this product

===== SECTION XIII – DISPOSAL CONSIDERATIONS =====

Waste Disposal: Consult with the US EPA Guidelines listed in 40 CFR Part 261.3 for the classifications of hazardous waste prior to disposal. Furthermore, consult with your state and local waste requirements or guidelines, if applicable, to ensure compliance. Arrange disposal in accordance to the EPA and/or state and local guidelines

===== SECTION XIV – TRANSPORT INFORMATION =====

| | | | |
|------------------|---------------|---------------|-----|
| DOT Hazard Class | Not Hazardous | UN Number | N/A |
| Shipping Name | N/A | Packing Group | N/A |

===== SECTION XV –REGULATORY INFORMATION =====

EMERGENCY PLANNING AND COMMUNITY RIGHT-TO-KNOW (SARA TITLE III):

Section 311/312 Categorizations (40 CFR 370): Immediate (Acute) Health Hazard.

Section 313 Information (40 CFR 372) – Toxic Chemicals List: This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR 372:

| Component | CAS# | % by Weight |
|-----------|------|-------------|
| None | | |

Toxic Substances Control Act (TSCA): All components of this product are on the TSCA Inventory or are exempt from TSCA Inventory requirements.

CALIFORNIA PROPOSITION 65 (Safe Drinking Water and Toxic Enforcement Act of 1986): None listed.

===== SECTION XVI –OTHER INFORMATION =====

SDS Creation Date: January 5, 2018

Disclaimer: The information and recommendations set forth herein are believed to be accurate. Because some of the information is derived from information provided to McGill AirSeal LLC from its suppliers, and because McGill AirSeal LLC has no control over the conditions of handling and use, McGill AirSeal LLC makes no warranty, express or implied, regarding the accuracy of the data or the results to be obtained from the use thereof. The information is supplied solely for your information and consideration, and McGill AirSeal LLC assumes no responsibility from use or reliance thereon. It is the responsibility of the user of McGill AirSeal LLC products to comply with all applicable Federal, State and Local Laws and Regulations.



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

29 CFR 1910.1200 (OSHA HazCom 2012)

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : Premium Conventional SAE 10W-30 Motor Oil
Product code : VV129


| | |
|---|---|
| Details of the supplier of the safety data sheet Valvoline LLC 100 Valvoline Way Lexington, KY 40509 United States of America (USA) 1-800-TEAMVAL (1-800-832-6825) SDS@valvoline.com | Emergency telephone number 1-800-VALVOLINE (1-800-825-8654) Regulatory Information Number 1-800-TEAMVAL (1-800-832-6825) Product Information 1-800-TEAMVAL (1-800-832-6825) |
|---|---|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Eye irritation : Category 2A

GHS label elements

Hazard pictograms : 

Signal Word : Warning

Hazard Statements : Causes serious eye irritation.

Precautionary Statements : **Prevention:**
Wear eye protection/ face protection.
Wash skin thoroughly after handling.
Response:
If eye irritation persists: Get medical advice/ attention.
IF IN EYES: Rinse cautiously with water for several minutes.
Remove contact lenses, if present and easy to do. Continue rinsing.



SAFETY DATA SHEET

Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Chemical nature : Defatter

Hazardous components

| Chemical name | CAS-No. | Classification | Concentration (%) |
|--|------------|---|--------------------------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | Not a hazardous substance or mixture. | ≥ 80.00 - < 90.00 |
| HYDROTREATED LIGHT PARAFFINIC DISTILLATE | 64742-55-8 | Asp. Tox. 1; H304 | ≥ 1.50 - < 5.00 |
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | | Not a hazardous substance or mixture. | ≥ 1.50 - < 5.00 |
| Zinc O,O',O',O'-tetrakis(1,3- dimethylbutyl) bis(phosphorodithioate) | 2215-35-2 | Skin Irrit. 2; H315 Eye Dam. 1; H318 | ≥ 1.00 - < 1.50 |

Actual concentration is withheld as a trade secret

SECTION 4. FIRST AID MEASURES

- General advice : No hazards which require special first aid measures.
- If inhaled : If breathed in, move person into fresh air.
If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : First aid is not normally required. However, it is recommended that exposed areas be cleaned by washing with soap and water.
- In case of eye contact : Remove contact lenses.
Protect unharmed eye.
- If swallowed : Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

Most important symptoms and effects, both acute and delayed : No symptoms known or expected.
Causes serious eye irritation.

Notes to physician : No hazards which require special first aid measures.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Water spray
Foam
Carbon dioxide (CO₂)
Dry chemical

Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous combustion products : carbon dioxide and carbon monoxide
Hydrocarbons

Specific extinguishing methods :

Product is compatible with standard fire-fighting agents.

Further information : Standard procedure for chemical fires.

Special protective equipment for firefighters : In the event of fire, wear self-contained breathing apparatus.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed.

Environmental precautions : Prevent further leakage or spillage if safe to do so.

Methods and materials for containment and cleaning up : Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust).
Keep in suitable, closed containers for disposal.

Other information : Comply with all applicable federal, state, and local regulations.



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

SECTION 7. HANDLING AND STORAGE

Advice on safe handling : Smoking, eating and drinking should be prohibited in the application area.
For personal protection see section 8.

Materials to avoid : No materials to be especially mentioned.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|--|------------|-------------------------------|--|-----------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | TWA | 5 mg/m3 Mist | OSHA Z-1 |
| | | TWA | 5 mg/m3 Inhalable particulate matter | ACGIH |
| | | TWA | 5 mg/m3 Mist | OSHA P0 |
| | | TWA | 5 mg/m3 Mist | NIOSH REL |
| | | ST | 10 mg/m3 Mist | NIOSH REL |
| | | PEL | 5 mg/m3 particulate | CAL PEL |
| HYDROTREATED LIGHT PARAFFINIC DISTILLATE | 64742-55-8 | TWA | 5 mg/m3 Mist | OSHA Z-1 |
| | | TWA | 5 mg/m3 Inhalable particulate matter | ACGIH |
| | | TWA | 5 mg/m3 Mist | OSHA P0 |
| | | TWA | 5 mg/m3 Mist | NIOSH REL |
| | | ST | 10 mg/m3 Mist | NIOSH REL |
| | | PEL | 5 mg/m3 particulate | CAL PEL |
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | | TWA | 5 mg/m3 Mist | OSHA Z-1 |
| | | TWA | 5 mg/m3 Inhalable | ACGIH |



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

| | | | | |
|--|--|-----|------------------------|-----------|
| | | | particulate matter | |
| | | TWA | 5 mg/m3 Mist | OSHA P0 |
| | | TWA | 5 mg/m3 Mist | NIOSH REL |
| | | ST | 10 mg/m3 Mist | NIOSH REL |
| | | PEL | 5 mg/m3 particulate | CAL PEL |

Engineering measures : General room ventilation should be adequate for normal conditions of use. However, if unusual operating conditions exist, provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Personal protective equipment

Respiratory protection : No personal respiratory protective equipment normally required.

Eye protection : Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.

Skin and body protection : Wear as appropriate:
Safety shoes
Wear resistant gloves (consult your safety equipment supplier).

Hygiene measures : General industrial hygiene practice.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance : liquid

Odour : No data available

Odour Threshold : No data available

pH : No data available

Melting point/freezing point : No data available

Boiling point/boiling range : No data available

Flash point : 394 - 480 °F / 201 - 249 °C



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

Method: Cleveland open cup

| | | |
|--|---|--|
| Evaporation rate | : | No data available |
| Flammability (solid, gas) | : | No data available |
| Self-ignition | : | No data available |
| Upper explosion limit / Upper flammability limit | : | No data available |
| Lower explosion limit / Lower flammability limit | : | No data available |
| Vapour pressure | : | 0.0133333 hPa (70.00 °F / 21.11 °C) Calculated Vapor Pressure |
| Relative vapour density | : | No data available |
| Relative density | : | 0.868 (60.01 °F / 15.56 °C) |
| Density | : | 0.864 g/cm ³ |
| Solubility(ies) | | |
| Water solubility | : | No data available |
| Solubility in other solvents | : | No data available |
| Partition coefficient: n-octanol/water | : | No data available |
| Decomposition temperature | : | No data available |
| Viscosity | | |
| Viscosity, dynamic | : | No data available |
| Viscosity, kinematic | : | 70 mm ² /s (104 °F / 40 °C) |
| Oxidizing properties | : | No data available |

SECTION 10. STABILITY AND REACTIVITY

| | | |
|--------------------------|---|---|
| Reactivity | : | No decomposition if stored and applied as directed. |
| Chemical stability | : | Stable under recommended storage conditions. |
| Possibility of hazardous | : | Product will not undergo hazardous polymerization. |



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

reactions

Conditions to avoid : None known.

Incompatible materials : Strong oxidizing agents

Hazardous decomposition products : No hazardous decomposition products are known.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Not classified based on available information.

Product:

Acute oral toxicity : Acute toxicity estimate: > 5,000 mg/kg
Method: Calculation method

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Acute oral toxicity : LD50 (Rat): > 15 g/kg

Acute dermal toxicity : LD50 (Rabbit): > 5 g/kg

Zinc O,O,O',O'-tetrakis(1,3-dimethylbutyl) bis(phosphorodithioate:

Acute oral toxicity : LD50 (Rat): 2,230 mg/kg
GLP: no

Acute inhalation toxicity : LC50 (Rat): > 2.3 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist
Assessment: Not classified as acutely toxic by inhalation under GHS.
Remarks: Information given is based on data obtained from similar substances.

Acute dermal toxicity : LD50 (Rabbit): > 3,160 mg/kg
Method: OECD Test Guideline 402
Assessment: Not classified as acutely toxic by dermal absorption under GHS.

Skin corrosion/irritation

Not classified based on available information.



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Assessment : Slight, transient irritation
Result : Slight, transient irritation

HYDROTREATED LIGHT PARAFFINIC DISTILLATE:

Assessment : Slight, transient irritation
Result : Slight, transient irritation

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Assessment : Slight, transient irritation
Result : Slight, transient irritation

Zinc O,O,O',O'-tetrakis(1,3-dimethylbutyl) bis(phosphorodithioate):

Species : Rabbit
Method : OECD Test Guideline 404
Result : Irritating to skin.
GLP : yes

Serious eye damage/eye irritation

Causes serious eye irritation.

Product:

Remarks : Unlikely to cause eye irritation or injury.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Result : No eye irritation
Assessment : No eye irritation

HYDROTREATED LIGHT PARAFFINIC DISTILLATE:

Result : Slight, transient irritation
Assessment : Slight, transient irritation

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Result : Slight, transient irritation
Assessment : Slight, transient irritation

Zinc O,O,O',O'-tetrakis(1,3-dimethylbutyl) bis(phosphorodithioate):

Result : Corrosive

Respiratory or skin sensitisation

Skin sensitisation

Not classified based on available information.

Respiratory sensitisation

Not classified based on available information.

Components:

Zinc O,O,O',O'-tetrakis(1,3-dimethylbutyl) bis(phosphorodithioate):

Species : Guinea pig
Assessment : Did not cause sensitisation on laboratory animals.
Method : OECD Test Guideline 406



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

Result : Did not cause sensitisation on laboratory animals.
GLP : yes

Germ cell mutagenicity

Not classified based on available information.

Components:

Zinc O,O,O',O'-tetrakis(1,3-dimethylbutyl) bis(phosphorodithioate):

Genotoxicity in vitro : Test Type: Ames test
Test system: Salmonella typhimurium
Metabolic activation: with and without metabolic activation
Result: negative

Carcinogenicity

Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Carcinogenicity - : Classified based on DMSO extract content < 3% (Regulation
Assessment (EC) 1272/2008, Annex VI, Part 3, Note L)

HYDROTREATED LIGHT PARAFFINIC DISTILLATE:

Carcinogenicity - : Classified based on DMSO extract content < 3% (Regulation
Assessment (EC) 1272/2008, Annex VI, Part 3, Note L)

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Carcinogenicity - : Classified based on DMSO extract content < 3% (Regulation
Assessment (EC) 1272/2008, Annex VI, Part 3, Note L)

IARC No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

OSHA No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

NTP No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

Reproductive toxicity

Not classified based on available information.

STOT - single exposure

Not classified based on available information.

STOT - repeated exposure

Not classified based on available information.

Aspiration toxicity

Not classified based on available information.

Product:

No aspiration toxicity classification



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

No aspiration toxicity classification

HYDROTREATED LIGHT PARAFFINIC DISTILLATE:

May be fatal if swallowed and enters airways.

Further information

Product:

Remarks : No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Not classified based on available information.

Long-term (chronic) aquatic hazard : Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Toxicity to fish : LL50 (Fish): > 100 mg/l
Exposure time: 96 h

Toxicity to daphnia and other aquatic invertebrates : EL50 (Aquatic invertebrates): > 10,000 mg/l
Exposure time: 48 h

Toxicity to algae : EL50 (Algae, algal mat (Algae)): > 100 mg/l
Exposure time: 72 h

Toxicity to fish (Chronic toxicity) : NOEC (Fish): 10 mg/l

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Aquatic invertebrates): 10 mg/l

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Not classified based on available information.

Long-term (chronic) aquatic hazard : Not classified based on available information.

Zinc O,O',O',O'-tetrakis(1,3-dimethylbutyl) bis(phosphorodithioate):

Toxicity to fish : LL50 (Oncorhynchus mykiss (rainbow trout)): 4.5 mg/l



SAFETY DATA SHEET

Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

Exposure time: 96 h
Test Type: semi-static test
Method: OECD Test Guideline 203
Remarks: Information given is based on data obtained from similar substances.

Toxicity to daphnia and other aquatic invertebrates : EL50 (Daphnia magna (Water flea)): 23 mg/l
Exposure time: 48 h
Method: OECD Test Guideline 202
GLP: yes

Toxicity to algae : NOEL (Desmodesmus subspicatus (green algae)): 10 mg/l
End point: Growth inhibition
Exposure time: 72 h
Test Type: static test
Test substance: WAF
Method: OECD Test Guideline 201
Remarks: Information given is based on data obtained from similar substances.

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Daphnia magna (Water flea)): 0.4 mg/l
Exposure time: 21 d
Test substance: WAF
Method: OECD Test Guideline 211
Remarks: Information given is based on data obtained from similar substances.

Persistence and degradability

Components:

Zinc O,O,O',O'-tetrakis(1,3-dimethylbutyl) bis(phosphorodithioate):

Biodegradability : Result: Not readily biodegradable.
Biodegradation: 1.5 %
Exposure time: 28 d
Method: OECD Test Guideline 301B
Remarks: Information given is based on data obtained from similar substances.

No data available

Bioaccumulative potential

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Partition coefficient: n-octanol/water : log Pow: Expected > 7

No data available

Mobility in soil

Components:

No data available

Other adverse effects

No data available



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

Product:

Additional ecological information : No data available

Components:

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

General advice : Dispose of in accordance with all applicable local, state and federal regulations.

Contaminated packaging : Empty remaining contents.

SECTION 14. TRANSPORT INFORMATION

International Regulations

UNRTDG

Not regulated as a dangerous good

IATA-DGR

Not regulated as a dangerous good

IMDG-Code

Not regulated as a dangerous good

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

National Regulations

49 CFR

Not regulated as a dangerous good

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

SARA 311/312 Hazards : Serious eye damage or eye irritation

California Prop. 65

 **WARNING:** Cancer - www.P65Warnings.ca.gov.

The components of this product are reported in the following inventories:

- DSL : All components of this product are on the Canadian DSL
- AICS : On the inventory, or in compliance with the inventory
- ENCS : On the inventory, or in compliance with the inventory
- KECI : On the inventory, or in compliance with the inventory
- PICCS : On the inventory, or in compliance with the inventory
- IECSC : On the inventory, or in compliance with the inventory
- TCSI : On the inventory, or in compliance with the inventory
- TSCA : On TSCA Inventory

TSCA list

No substances are subject to TSCA 12(b) export notification requirements.

Inventories

AICS (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIoC (New Zealand), PICCS (Philippines), TCSI (Taiwan), TSCA (USA)

SECTION 16. OTHER INFORMATION

Further information

Internal information : R0170829

NFPA:

HMIS III:



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

| | | | | | | | |
|--|--|---------------|----------|---------------------|----------|------------------------|----------|
| <p>Flammability</p> <p>Health</p> <p>Instability</p> <p>Special hazard</p> | <table border="1"> <tr> <td style="background-color: blue; color: white;">HEALTH</td> <td style="text-align: center;">2</td> </tr> <tr> <td style="background-color: red; color: white;">FLAMMABILITY</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="background-color: yellow;">PHYSICAL HAZARD</td> <td style="text-align: center;">0</td> </tr> </table> <p>0 = not significant, 1 =Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 2 | FLAMMABILITY | 1 | PHYSICAL HAZARD | 0 |
| HEALTH | 2 | | | | | | |
| FLAMMABILITY | 1 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Combustible Liquid Class IIIB

Full text of H-Statements

- H304 May be fatal if swallowed and enters airways.
- H315 Causes skin irritation.
- H318 Causes serious eye damage.

Sources of key data used to compile the Safety Data Sheet

Valvoline internal data including own and sponsored test reports

The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Valvoline's Environmental Health and Safety Department (1-800-VALVOLINE).

List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

- ACGIH : American Conference of Industrial Hygienists
- BEI : Biological Exposure Index
- CAS : Chemical Abstracts Service (Division of the American Chemical Society).
- CMR : Carcinogenic, Mutagenic or Toxic for Reproduction
- FG : Food grade
- GHS : Globally Harmonized System of Classification and Labeling of Chemicals.
- H-statement : Hazard Statement
- IATA : International Air Transport Association.



SAFETY DATA SHEET

Premium Conventional SAE 10W-30 Motor Oil

Version: 1.11

Revision Date: 12/02/2019

Print Date:
12/20/2019

IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization

ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"

IMDG : International Maritime Code for Dangerous Goods

ISO : International Organization for Standardization

logPow : octanol-water partition coefficient

LCxx : Lethal Concentration, for xx percent of test population

LDxx : Lethal Dose, for xx percent of test population.

ICxx : Inhibitory Concentration for xx of a substance

Ecxx : Effective Concentration of xx

N.O.S.: Not Otherwise Specified

OECD : Organization for Economic Co-operation and Development

OEL : Occupational Exposure Limit

P-Statement : Precautionary Statement

PBT : Persistent , Bioaccumulative and Toxic

PPE : Personal Protective Equipment

STEL : Short-term exposure limit

STOT : Specific Target Organ Toxicity

TLV : Threshold Limit Value

TWA : Time-weighted average

vPvB : Very Persistent and Very Bioaccumulative

WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act

DOT : Department of Transportation

FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act

HMIRC : Hazardous Materials Information Review Commission

HMIS : Hazardous Materials Identification System

NFPA : National Fire Protection Association

NIOSH : National Institute for Occupational Safety and Health

OSHA : Occupational Safety and Health Administration

PMRA : Health Canada Pest Management Regulatory Agency

RTK : Right to Know

WHMIS : Workplace Hazardous Materials Information System



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 02 Supersedes: (2/22/2017)

1.) Identification of the Mixture and of the Company

Product identifier: **188 MRO Brite Galvanize Coating**

Product name:
MRO Brite Galvanize Coating

Relevant identified uses of the substance: Use on pipes, heavy equipment, highway guard rails, hand rails, welds, metal chain fences, bridges, storage tanks, corrugated metal buildings, transformers, television towers, signs and sign posts, railroad equipment, construction equipment and anywhere the bright look of hot-dipped surfaces is desired.

Uses advised against: Do not apply at temperatures below 40°F (4°C), or if rain is imminent within 6 hours of application

| | |
|-----------------------------|---|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe Industries Incorporated |
| For Product Information: | 1-800-227-0196 |
| Emergency telephone number: | 1-800-424-9300 (CHEMTREC – 24 hrs) |

2. Hazards identification

Classifications

Physical Hazards: Aerosol - Category 1
 Flam. Liq. 2
 Flam. Liq. 3

Health Hazards: Asp. Tox. 1
 STOT SE 3
 Eye Irrit. 2
 Carc. 1B
 Muta. 1B

Environmental Hazards: Aquatic Acute 1
 Aquatic Chronic 1

Labeling

Signal Word: Danger

Hazard Statements: H220 – Extremely flammable gas.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 02 Supersedes: (2/22/2017)

- H222 – Extremely Flammable Aerosol
- H225 – Highly flammable liquid and vapour
- H226 – Flammable liquid and vapour.
- H229 – Pressurized container: may burst if heated
- H304 – May be fatal if swallowed and enters airways
- H319 – Causes serious eye irritation
- H336 – May cause drowsiness or dizziness.
- H340 – May cause genetic defects
- H350 – May cause cancer
- H400 – Very toxic to aquatic life.
- H410 – Very toxic to aquatic life with long lasting effects.

- Precautionary Statements:
- P101 - If medical advice is needed, have product container or label at hand
 - P102 - Keep out of reach of children
 - P103 - Read label before use
 - P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking
 - P211 - Do not spray on an open flame or other ignition source
 - P251 - Pressurized container: Do not pierce or burn, even after use
 - P261 - Avoid breathing dust/fume/gas/mist/vapours/spray
 - P262 - Do not get in eyes, on skin, or on clothing
 - P264 - Wash ... thoroughly after handling
 - P280 - Wear protective gloves/eye protection/face protection

 - P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.
 - P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F
 - P501 - Dispose of contents/container in accordance with local/regional/national/international regulation



Symbols/Pictograms:

3. Composition / Information on Ingredients

Composition

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|------------------------|-----------|------------|---------------|----------------|---|---------------------|
| Acetone | Propanone | 67-64-1 | 200-662-2 | 10-30% | Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 | H225, H319, H336 |
| Hydrocarbon Propellant | LPG | 68476-86-8 | 270-705-8 | 10-30% | Press. Gas Flam. Gas 1 | H220 H229 |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 02 Supersedes: (2/22/2017)

| | | | | | | |
|---------------------------------|-----------------|------------|-----------|--------|--------------------------------------|----------------------|
| n-Butyl Acetate | n-Butyl Ester | 123-86-4 | 204-658-1 | 10-30% | Flam. Liq. 3 STOT SE 3 | H226 H336 |
| Zinc Powder | Zinc Dust | 7440-66-6 | 231-175-3 | 10-30% | Aquatic Acute 1 Aquatic Chronic 1 | H400 H410 |
| Aliphatic Petroleum Distillates | Solvent Naphtha | 64742-89-8 | 265-192-2 | 1-5% | Carc. 1B Muta. 1B Asp. Tox. 1 | H350 H340 H304 |

Other Product Information

Chemical Identity: Mixture

4.) First Aid Measures

| | |
|---|---|
| General Advice: | If symptoms persist, always call a doctor. |
| Inhalation First Aid: | Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately. |
| Skin Contact First Aid: | Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. |
| Eye Contact First Aid: | If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately. |
| Ingestion First Aid: | If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |
| Most Important Symptoms/Effects: | Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects. |

5. Fire Fighting Measures

| | |
|--|--|
| Flammable Properties: | Aerosol |
| Auto Ignition Temperature: | Not Available |
| Suitable extinguishing media: | Carbon dioxide, dry chemical, water spray. |
| Unsuitable extinguishing media: | None known |
| Special hazards arising from the substance or mixture: | None known |
| Hazardous combustion products: | Carbon dioxide, Carbon monoxide |
| Fire & Explosion Hazards: | Closed Containers may rupture due to the buildup of pressure from extreme temperatures. |
| Precautions for fire-fighters: | Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 02 Supersedes: (2/22/2017)

NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.
- 2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling:

Flammable Aerosol, use in a well ventilated area.
Do not use near sources of ignition.
Do not to eat, drink and smoke while working with this material.
Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
Storage Temperature: 32° to 120°F (0° to 49°C).
No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
Keep away from sources of ignition.
Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 02 Supersedes: (2/22/2017)

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|---------------------------------|------------|-----------------|------------------|----------------|-----------------|
| Acetone | 67-64-1 | 500ppm | 750ppm | 1000ppm | N/AV |
| Hydrocarbon Propellant | 68476-86-8 | N/AV | N/AV | N/AV | N/AV |
| n-Butyl Acetate | 123-86-4 | 150ppm | 200ppm | 150ppm | N/AV |
| Zinc Powder | 7440-66-6 | N/AV | N/AV | N/AV | N/AV |
| Aliphatic Petroleum Distillates | 64742-89-8 | N/AV | N/AV | N/AV | N/AV |

*Values are based on the 2014 Guide to Occupational Exposure Values by ACGIH

9. Information on Basic Physical and Chemical Properties

| | |
|--|---|
| Appearance: Metallic gray | Odor: Ketone Odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: <0° F (-18° C) | Evaporation Rate: Faster than n-Butyl Acetate |
| Flammability Solid/Gas: Flammable gas | LEL: 1.3% UEL: 10% |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions

Chemical stability: Stable under normal conditions

Conditions to avoid: Heat and ignition sources

Incompatible materials: Strong Oxidizing Agents

Hazardous decomposition products: Will not occur

11. Toxicological Information

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data:



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 02 Supersedes: (2/22/2017)

(Acetone) LD50 :5800 mg/kg (Rat-Oral)
(Acetone) LC50: 21000 ppm/8 hr (Rat-Inha)

Eye irritation data: N/AV

Skin irritation/sensitization/absorption data: N/AV
Reproductive toxicity data: N/AV

Mutagenicity data: Muta. 1B

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure: Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV
IARC: N/AV
OSHA: TLV-A4

* Petroleum distillates may contain chemical carcinogens in limited quantities (< 0.01%). These quantities are determined by the supplier/fraction/purity of the distillate during the manufacturing process. Chemicals that may be present within distillates are listed on California's prop 65 list such as ETHYLBENZENE, BENZENE, and TOLUENE.

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.

Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 02 Supersedes: (2/22/2017)

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|--------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference 49 CFR 172.101 |

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|----------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|---|
| UN1950 | Aerosols, Flammable | 2.1 | Not Applicable | Not Applicable | Reference IATA Dangerous Goods Regulation |

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

PROP 65 (CA): WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 12/4/18



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 02 Supersedes: (2/22/2017)




Supersedes: 2/22/17

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.

1 Identification

- **Product identifier**
- **Trade name:** **Hilti HIT-RE 500**
- **Container size:** 330 ml, 500 ml
- **Relevant identified uses of the substance or mixture and uses advised against**
- **Sector of Use** Building and construction work
- **Application of the substance / the mixture** Adhesive mortar for rebar and anchor fastenings in solid concrete
- **Details of the supplier of the safety data sheet**
- **Manufacturer/Supplier:**
Hilti, Inc.
5400 South 122nd East Ave.
US-Tulsa, OK 74146
Phone: (800) 879-8000
Fax: (800) 879-7000
Español: (800) 879-5000
- **Information department:**
anchor.hse@hilti.com
see section 16
- **Emergency telephone number:**
Chem-Trec
Tel.: 1 800 424 9300 (USA, PR, Virgin Islands, Canada)
Tel.: 703 527 3887 (Other countries)
Hilti, Inc.
Phone: (800) 879-8000
Fax: (800) 879-7000
Español: (800) 879-5000

2 Hazard(s) identification

- **Classification of the substance or mixture**
Skin Corr. 1A H314 Causes severe skin burns and eye damage.
Eye Dam. 1 H318 Causes serious eye damage.
Aquatic Chronic 2 H411 Toxic to aquatic life with long lasting effects.
Skin Sens. 1 H317 May cause an allergic skin reaction.
- **Label elements**
- **GHS label elements** The product is classified and labeled according to the Globally Harmonized System (GHS).
- **Hazard pictograms**

GHS05 
GHS07 
GHS09
- **Signal word** Danger
- **Hazard-determining components of labeling:**
m-Xylylenediamine
reaction product: bisphenol-A-(epichlorhydrin) epoxy resin
(number average molecular weight = 700)
Reaction product: bisphenol-F epichlorhydrin resin, MW ≤ 700
- **Hazard statements**
H314 Causes severe skin burns and eye damage.
H317 May cause an allergic skin reaction.
H411 Toxic to aquatic life with long lasting effects.
- **Precautionary statements**
P260 Do not breathe vapours.
P280 Wear protective gloves/protective clothing/eye protection/face protection.
P303+P361+P353 IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
P305+P351+P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P333+P313 If skin irritation or rash occurs: Get medical advice/attention.
P337+P313 If eye irritation persists: Get medical advice/attention.

(Contd. on page 2)

US EN

Trade name: Hilti HIT-RE 500


(Contd. of page 1)

- **Classification system**
- **NFPA ratings (scale 0-4)**


 Health = 3
 Fire = 1
 Reactivity = 0

- **Other hazards**
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.

- **Additional information:**



Hilti HIT

- **Information pertaining to particular dangers for man and environment: A**
 H315 Causes skin irritation.
 H319 Causes serious eye irritation.
 H317 May cause an allergic skin reaction.
 H411 Toxic to aquatic life with long lasting effects.
- **Information pertaining to particular dangers for man and environment: B**
 H314 Causes severe skin burns and eye damage.
 H317 May cause an allergic skin reaction.
 H412 Harmful to aquatic life with long lasting effects.

3 Composition/information on ingredients

- **Chemical characterization: Mixtures**
- **Description:**
 2-component-foilpack, contains:
 Component A: Epoxy resin, Reactive diluent, inorganic filler
 Component B: Amine hardener, inorganic filler

Mixture of the substances listed below with nonhazardous additions.

- **Dangerous components:**

· Dangerous components A:

| | | |
|------------|---|---------|
| 25068-38-6 | reaction product: bisphenol-A-(epichlorhydrin) epoxy resin (number average molecular weight = 700) | 25-50% |
| 28064-14-4 | Reaction product: bisphenol-F epichlorhydrin resin, MW ≤ 700 | 10-25% |
| 16096-31-4 | 1,6-bis(2,3-epoxypropoxy)hexane | 10-25% |
| 30499-70-8 | Trimethylolpropane, (chloromethyl)oxirane polymer | 2.5-10% |
| 14808-60-7 | Quartz (SiO ₂) | 25-50% |

· Dangerous components B:

| | | |
|------------|----------------------------|--------|
| 1477-55-0 | m-Xylylenediamine | 30-40% |
| 14808-60-7 | Quartz (SiO ₂) | 15-30% |
| 1344-28-1 | aluminium oxide | 5-10% |

- **Additional information** For the wording of the listed risk phrases refer to section 16.

4 First-aid measures

- **Description of first aid measures**
- **General information** Immediately remove any clothing soiled by the product.
- **After inhalation**
 Take affected persons into fresh air and keep quiet.
 Seek medical treatment in case of complaints.
- **After skin contact** Immediately wash with water and soap and rinse thoroughly.

(Contd. on page 3)

Trade name: Hilti HIT-RE 500

(Contd. of page 2)

- **After eye contact**
Seek immediate medical advice.
Rinse opened eye for several minutes under running water. Then consult a doctor.
Protect unharmed eye.
Seek medical treatment.
- **After swallowing**
Do not induce vomiting; immediately call for medical help.
Rinse out mouth and then drink plenty of water.
- **Information for doctor**
- **Most important symptoms and effects, both acute and delayed** Allergic reactions
- **Indication of any immediate medical attention and special treatment needed**
No further relevant information available.

5 Fire-fighting measures

- **Extinguishing media**
- **Suitable extinguishing agents**
CO₂, extinguishing powder or water spray. Fight larger fires with water spray or alcohol resistant foam.
- **For safety reasons unsuitable extinguishing agents** Water with full jet.
- **Special hazards arising from the substance or mixture**
In case of fire, the following can be released:
Nitrogen oxides (NO_x)
Carbon monoxide (CO)
In certain fire conditions, traces of other toxic gases cannot be excluded.
- **Advice for firefighters**
- **Protective equipment:** Wear self-contained respiratory protective device.

6 Accidental release measures

- **Personal precautions, protective equipment and emergency procedures**
Wear protective equipment. Keep unprotected persons away.
Wear protective clothing.
Ensure adequate ventilation
- **Environmental precautions:**
Do not allow product to reach sewage system or any water course.
Do not allow to penetrate the ground/soil.
- **Methods and material for containment and cleaning up:**
Pick up mechanically.
Clean the affected area carefully; suitable cleaners are:
organic solvent
Dispose contaminated material as waste according to item 13.
- **Reference to other sections**
See Section 7 for information on safe handling
See Section 8 for information on personal protection equipment.
See Section 13 for disposal information.

7 Handling and storage

- **Handling**
- **Precautions for safe handling**
The usual precautionary measures for handling chemicals should be followed.
Take note of emission threshold.
Use only in well ventilated areas.
Check the expiry date: see imprint on manifold (month/year). Do not use expired mortar!
- **Information about protection against explosions and fires:** Keep ignition sources away - Do not smoke.
- **Conditions for safe storage, including any incompatibilities**
- **Storage**
- **Requirements to be met by storerooms and receptacles:**
Keep in a cool, dry and dark place; 41 °F / 5 °C to 77 °F / 25 °C.
- **Information about storage in one common storage facility:** Store away from foodstuffs.
- **Further information about storage conditions:** Protect from heat and direct sunlight.
- **Storage class** As per VCI (1991) storage classification concept.

(Contd. on page 4)

US EN

Trade name: Hilti HIT-RE 500

(Contd. of page 3)

 · **Specific end use(s)** Adhesive mortar for rebar and anchor fastenings in solid concrete

8 Exposure controls/personal protection

 · **Control parameters**

 · **Components with limit values that require monitoring at the workplace:**

The product has a pasty consistency. Exposure limit values for respirable dusts are not relevant for this product.

1477-55-0 m-Xylylenediamine

| | |
|-----|---|
| REL | Short-term value: C 0.1 mg/m ³ Skin |
| TLV | Short-term value: C 0.1 mg/m ³ Skin |

 · **Additional information:** The lists that were valid during the creation were used as basis.

 · **Exposure controls**

 · **Personal protective equipment**

 · **General protective and hygienic measures**

The usual precautionary measures for handling chemicals should be followed.

Immediately remove all soiled and contaminated clothing

Wash hands before breaks and at the end of work.

Store protective clothing separately.

Avoid contact with the eyes and skin.

Do not eat, drink, smoke or sniff while working.

Clean skin thoroughly immediately after handling the product.

Ensure that washing facilities are available at the work place.

Keep away from foodstuffs, beverages and feed.

Use skin protection cream for skin protection.

Do not carry product impregnated cleaning cloths in trouser pockets.

 · **Breathing equipment:**

Not necessary if room is well-ventilated.

In case of brief exposure or low pollution use respiratory filter device. In case of intensive or longer exposure use respiratory protective device that is independent of circulating air.

 · **Recommended filter device for short term use:** Filter AX

 · **Protection of hands:**


Protective gloves.

Only use chemical-protective gloves with CE-labeling of category III.

EN 374

Avoid direct contact with the chemical/ the product/ the preparation by organizational measures.

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.

 · **Material of gloves**

Nitrile rubber, NBR

 Recommended thickness of the material: ≥ 0.4 mm

The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.

 · **Penetration time of glove material**

The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed.

 · **As protection from splashes gloves made of the following materials are suitable:** Nitrile rubber, NBR

 · **Not suitable are gloves made of the following materials:**

Natural rubber, NR

Leather gloves

Strong gloves

 · **Eye protection:**


Tightly sealed goggles.

Gauze goggles

Face protection

(Contd. on page 5)

US EN

Trade name: Hilti HIT-RE 500

(Contd. of page 4)

EN 166 / EN 170

 · **Body protection:**


Protective work clothing.

9 Physical and chemical properties

 · **Information on basic physical and chemical properties**

 · **General Information**

 · **Appearance:**

| | |
|-------------------------|---|
| Form: | Pasty |
| Color: | Component A: grey Component B: red Mixture: red |
| Odor: | Amine-like |
| Odour threshold: | Not determined |

| | |
|------------------|--|
| pH-value: | Component A: 7 Component B: 11,5 Mixture: 11,5 |
|------------------|--|

 · **Change in condition**

| | |
|-------------------------------------|---------------------|
| Melting point/Melting range: | Not determined. |
| Boiling point/Boiling range: | > 200 °C (> 392 °F) |

| | |
|---------------------|---------------------------------------|
| Flash point: | > 100 °C (> 212 °F) (DIN EN ISO 1523) |
|---------------------|---------------------------------------|

| | |
|--------------------------------------|----------------|
| Flammability (solid, gaseous) | Not determined |
|--------------------------------------|----------------|

| | |
|------------------------------|----------------|
| Ignition temperature: | Not determined |
|------------------------------|----------------|

| | |
|-----------------------------------|----------------|
| Decomposition temperature: | Not determined |
|-----------------------------------|----------------|

| | |
|-----------------------|------------------------------|
| Auto igniting: | Product is not selfigniting. |
|-----------------------|------------------------------|

| | |
|-----------------------------|---|
| Danger of explosion: | Product does not present an explosion hazard. |
|-----------------------------|---|

 · **Explosion limits:**

| | |
|---------------|----------------|
| Lower: | Not determined |
| Upper: | Not determined |

| | |
|---|----------|
| Vapor pressure at 20 °C (68 °F): | 0.04 hPa |
|---|----------|

| | |
|-------------------------|--|
| Density: | Component A: 1.5 g/cm ³ (DIN 51757) Component B: 1.4 g/cm ³ (DIN 51757) Not determined |
| Relative density | Not determined |
| Vapour density | Not determined |
| Evaporation rate | Not determined |

 · **Solubility in / Miscibility with**

| | |
|---------------|-----------|
| Water: | Insoluble |
|---------------|-----------|

| | |
|---|----------------|
| Partition coefficient (n-octanol/water): | Not determined |
|---|----------------|

 · **Viscosity:**

| | |
|------------------------------------|--------------------|
| dynamic at 20 °C (68 °F): | 50 Pas (DIN 53019) |
| kinematic at 20 °C (68 °F): | >20 s (ISO 2431) |

 · **Solvent content:**

| | |
|--------------------------|-----|
| Organic solvents: | 0 % |
| Water: | 0 % |

| | |
|--------------------------|--|
| Other information | No further relevant information available. |
|--------------------------|--|

US EN

(Contd. on page 6)

Trade name: Hilti HIT-RE 500

(Contd. of page 5)

10 Stability and reactivity

- **Reactivity**
- **Chemical stability**
- **Thermal decomposition / conditions to be avoided:** No decomposition if used according to specifications.
- **Possibility of hazardous reactions** No dangerous reactions known
- **Conditions to avoid** No further relevant information available.
- **Incompatible materials:** No further relevant information available.
- **Hazardous decomposition products:** No dangerous decomposition products known

11 Toxicological information

- **Information on toxicological effects**
- **Acute toxicity:**

 · **LD/LC50 values that are relevant for classification:**
1477-55-0 m-Xylylenediamine

| | | |
|------------|---------|---------------------|
| Oral | LD50 | 1040 mg/kg (rat) |
| Dermal | LD50 | 2000 mg/kg (rabbit) |
| Inhalative | LC50/4h | 2.4 mg/l (rat) |

- **Primary irritant effect:**

 · **on the skin:** Strong caustic effect on skin and mucous membranes.

- **on the eye:**

Strong caustic effect.

Strong irritant with the danger of severe eye injury.

- **Sensitization:** Sensitization possible through skin contact.

- **Additional toxicological information:**

The product shows the following dangers according to the calculation method of the General EU Classification Guidelines for Preparations as issued in the latest version:

Harmful

Corrosive

Irritant

Swallowing will lead to a strong caustic effect on mouth and throat and to the danger of perforation of esophagus and stomach.

- **Carcinogenic categories**

 · **NTP (National Toxicology Program)**

| | | |
|------------|----------------------------|---|
| 14808-60-7 | Quartz (SiO ₂) | K |
|------------|----------------------------|---|

12 Ecological information

- **Toxicity**

 · **Aquatic toxicity:**
**25068-38-6 reaction product: bisphenol-A-(epichlorhydrin) epoxy resin
(number average molecular weight = 700)**

| | |
|----------|--------------------------|
| EC50/48h | 9.4 mg/l (Algae) |
| | 1.7 mg/l (magna daphnia) |
| EC50/96h | 1.2 mg/l (fish) |

28064-14-4 Reaction product: bisphenol-F epichlorhydrin resin, MW ≤ 700

| | |
|----------|--------------------------|
| EC50/48h | 9.4 mg/l (Algae) |
| | 1.7 mg/l (magna daphnia) |
| EC50/96h | 1.5 mg/l (fish) |

16096-31-4 1,6-bis(2,3-epoxypropoxy)hexane

| | |
|----------|-------------------------|
| EC50/48h | 23.1 mg/l (Algae) |
| | 39 mg/l (magna daphnia) |
| EC50/96h | 17.1 mg/l (fish) |

1477-55-0 m-Xylylenediamine

| | |
|----------|-----------------|
| EC50/48h | 12 mg/l (Algae) |
|----------|-----------------|

(Contd. on page 7)

Trade name: Hilti HIT-RE 500

(Contd. of page 6)

| | |
|----------|---|
| EC50/96h | 15.2 mg/l (magna daphnia) 75 mg/l (fish) |
|----------|---|

- **Persistence and degradability** No further relevant information available.
- **Behavior in environmental systems:**
- **Bioaccumulative potential** No further relevant information available.
- **Mobility in soil** No further relevant information available.
- **Ecotoxicological effects:**
- **Remark:** Toxic for fish
- **Additional ecological information:**
- **According to the formulation contains the following heavy metals and compounds from the EU guideline NO. 2006/11/EC:**
None
- **General notes:**
Avoid transfer into the environment.
The product contains materials that are harmful to the environment.
Also poisonous for fish and plankton in water bodies.
Toxic for aquatic organisms
Water hazard class 2 (German Regulation) (Self-assessment): hazardous for water.
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.
- **Other adverse effects** No further relevant information available.

13 Disposal considerations

- **Waste treatment methods**
- **Recommendation**
Must not be disposed of together with household garbage. Do not allow product to reach sewage system.
Hand over to hazardous waste disposers.
Full or only partially emptied cartridges must be disposed of as special waste in accordance with official regulations.

| | |
|------------------------------------|--|
| · European waste catalogue: | |
| 08 04 09* | waste adhesives and sealants containing organic solvents or other dangerous substances |
| 20 01 27* | paint, inks, adhesives and resins containing dangerous substances |

- **Uncleaned packagings:**
- **Recommendation:**
Disposal must be made according to official regulations.
Dispose of packaging according to regulations on the disposal of packagings.

14 Transport information

| | |
|-------------------------------------|---|
| · UN-Number | |
| · ADR, IMDG, IATA | 3259 / PG II 3077 / PG III |
| · UN proper shipping name | |
| · ADR | AMINES, SOLID, CORROSIVE, N.O.S. (m-Xylylenediamine) ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Bisphenol A/F Epoxy Resin) |
| · IMDG, IATA | AMINES, SOLID, CORROSIVE, N.O.S (m-Xylylenediamine) ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S (Bisphenol A/F Epoxy Resin) |
| · Transport hazard class(es) | |
| · ADR | |
| · Class | 8 Corrosive substances 9 Miscellaneous dangerous substances and articles. |
| · IMDG, IATA | |
| · Class | 8 9 |

(Contd. on page 8)

US EN

Trade name: Hilti HIT-RE 500

(Contd. of page 7)

| | |
|--|--|
| · Label | 8 9 |
| · Packing group · ADR, IMDG, IATA | 3259 / PG II 3077 / PG III |
| · Environmental hazards: | Not applicable. |
| · Special precautions for user · EMS Number: | Not applicable. F-A, S-B |
| · Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code | Not applicable. |
| · Transport/Additional information: | |
| · IMDG · Remarks: | Limited Quantity (LQ) 1 kg 5 kg |
| · IATA · Remarks: | Packing Instruction No. UN 3259: 859 UN 3077: 956 All packed in one |
| · UN "Model Regulation": · HS-Code: | II 3214 10 10: Glaziers' putty, grafting putty, resin cements, caulking compounds and other mastics |

15 Regulatory information

 · **Safety, health and environmental regulations/legislation specific for the substance or mixture**

 · **Section 355 (Extremely hazardous substances):**

None of the ingredients is listed.

 · **Section 313 (Specific toxic chemical listings):**

1344-28-1 | aluminium oxide

 · **TSCA (Toxic Substances Control Act):**

 14808-60-7 | Quartz (SiO₂)

 25068-38-6 | reaction product: bisphenol-A-(epichlorhydrin) epoxy resin
(number average molecular weight = 700)

28064-14-4 | Reaction product: bisphenol-F epichlorhydrin resin, MW ≤ 700

1477-55-0 | m-Xylylenediamine

16096-31-4 | 1,6-bis(2,3-epoxypropoxy)hexane

30499-70-8 | Trimethylolpropane, (chloromethyl)oxirane polymer

67762-90-7 | FUMED SILICA (SILOXANES AND SILICONES, DI-ME, REACTION PRODUCTS WITH SILICA)

65997-16-2 | Cement, alumina, chemicals

1344-28-1 | aluminium oxide

 · **Proposition 65:**

 · **Chemicals known to cause cancer:**

 14808-60-7 | Quartz (SiO₂)

 · **Carcinogenicity categories**

 · **EPA (Environmental Protection Agency)**

None of the ingredients is listed.

 · **TLV (Threshold Limit Value established by ACGIH)**

 14808-60-7 | Quartz (SiO₂)

A2

1344-28-1 | aluminium oxide

A4

108-46-3 | resorcinol

A4

(Contd. on page 9)

Trade name: Hilti HIT-RE 500

(Contd. of page 8)

· **MAK (German Maximum Workplace Concentration)**

| | | |
|------------|----------------------------|---|
| 14808-60-7 | Quartz (SiO ₂) | 1 |
| 1344-28-1 | aluminium oxide | 2 |

· **NIOSH-Ca (National Institute for Occupational Safety and Health)**

| | |
|------------|----------------------------|
| 14808-60-7 | Quartz (SiO ₂) |
|------------|----------------------------|

· **National regulations**

The product is subject to be labeled according with the prevailing version of the regulations on hazardous substances.

· **Information about limitation of use:** Employment restrictions concerning young persons must be observed.

· **Chemical safety assessment:** not required.

16 Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

· **Relevant phrases** H318 Causes serious eye damage.

· **Department issuing SDS:**

Hilti Entwicklungsgesellschaft mbH

Hiltistrasse 6

D-86916 Kaufering

Tel.: +49 8191 906310

Fax: +49 8191 90176310

e-mail: anchor.hse@hilti.com

· **Contact:** Mechthild Krauter

· **Date of preparation / last revision** 05/18/2015 / 7

· **Abbreviations and acronyms:**

ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road)

IMDG: International Maritime Code for Dangerous Goods

IATA: International Air Transport Association

ACGIH: American Conference of Governmental Industrial Hygienists

EINECS: European Inventory of Existing Commercial Chemical Substances

ELINCS: European List of Notified Chemical Substances

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA)

LC50: Lethal concentration, 50 percent

LD50: Lethal dose, 50 percent

Skin Corr. 1A: Skin corrosion/irritation, Hazard Category 1A

Eye Dam. 1: Serious eye damage/eye irritation, Hazard Category 1

Skin Sens. 1: Sensitisation - Skin, Hazard Category 1

Aquatic Chronic 2: Hazardous to the aquatic environment - Chronic Hazard, Category 2

· *** Data compared to the previous version altered.**

MATERIAL SAFETY DATA SHEET

SECTION 1

PRODUCT AND COMPANY IDENTIFICATION

Trade Name: OATEY #5 PASTE FLUX
Product No.: 30011, 30012, 30013, 30014, 30041, 53017, 53200
Product Use: Flux for soldering.
Formula: See Section 2
Synonyms: Flux for Soldering Copper Pipe
Firm Name & Mailing Address: OATEY CO. 4700 West 160th Street P.O. Box 35906 Cleveland, Ohio 44135, U.S.A. <http://www.oatey.com>
Oatey Phone Number: (216) 267-7100 or (800) 321-9532
Emergency Phone Numbers: For Emergency First Aid call 1-877-740-5015. For chemical transportation emergencies ONLY, call Chemtrec at 1-800-424-9300. Outside the U.S. 1-703-527-3887.
Prepared By: Technical Department
Preparation Date: May 1, 2009

SECTION 2

COMPOSITION/INFORMATION ON INGREDIENTS

| <u>INGREDIENTS:</u> | <u>% wt/wt:</u> | <u>CAS NUMBER:</u> | <u>ACGIH TLV TWA:</u> | <u>OSHA PEL TWA:</u> |
|---------------------|-----------------|--------------------|----------------------------------|-----------------------|
| Petrolatum | 60 - 100% | 8009-03-8 | 5 mg/m3 (oil mist) | 5 mg/m3 (oil mist) |
| Zinc Chloride | 10 - 30% | 7646-85-7 | 1 mg/m3(fume) 2 mg/m3 STEL | 1 mg/m3(fume) |
| Ammonium Chloride | 1 - 5% | 12125-02-9 | 10 mg/m3 (fume) 20 mg/m3 STEL | None Established |

SECTION 3

HAZARDS IDENTIFICATION

Emergency Overview:
Yellow paste with a slight odor. May cause burns to the eye and skin. Inhalation of fumes may cause respiratory irritation, metal fume fever, chills, nausea and vomiting. Swallowing may cause burns to the mouth or throat, vomiting, diarrhea and kidney or liver disorders. May be harmful if swallowed. Symptoms may be delayed.

OSHA Hazard Classification: Corrosive, target organ effects

SECTION 4

FIRST AID MEASURES

CALL 1-877-740-5015 or 1-303-623-5716 COLLECT

Skin: Remove contaminated clothing. Wash thoroughly with soap and water. Call a physician or poison control center if irritation persists.
Eyes: If material gets into eyes or if fumes cause irritation, immediately flush eyes with plenty of water until chemical is removed. If irritation persists, get medical attention immediately.
Inhalation: Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Keep victim quiet and warm. Call a poison control center or physician immediately.
Ingestion: **DO NOT INDUCE VOMITING.** Rinse mouth with water. Never give anything by mouth to a person who is unconscious or drowsy. Get immediate medical attention by calling a Poison Control Center, or hospital emergency room. If medical advice cannot be obtained, then take the person and product to the nearest medical emergency treatment center or hospital.

SECTION 5 FIRE FIGHTING MEASURES

Flashpoint / Method: 540 Degrees F (282 Degrees C)
Flammability: LEL = Not determined, UEL = Not determined
Extinguishing Small Fires: Use dry chemical, CO2, water, or foam extinguisher
Media: Large Fires: Evacuate area and call Fire Department immediately
Special Fire Firefighters should wear positive pressure self-contained
Fighting breathing apparatus and full protective clothing for fires in
Procedure: areas where chemicals are used or stored
Unusual Fire and None known.
Explosion
Hazards:
Hazardous Hydrocarbons, hydrogen chloride, zinc fumes, ammonia, smoke,
Decomposition carbon monoxide, carbon dioxide and nitrogen oxides.
Products:

SECTION 6 ACCIDENTAL RELEASE MEASURES

Spill or Leak Ventilate area. Stop leak if it can be done without risk. Personnel
Procedures: cleaning up the spill should wear appropriate personal protective
equipment. Take up spill with sand, earth or other absorbent material
and place into a clean, dry leak-proof container.

SECTION 7 HANDLING AND STORAGE

Handling: Do not get in eyes. Do not get on skin or clothing. Do not take
internally. Avoid breathing vapors or fumes. Use only with adequate
ventilation. Wash thoroughly after handling. Keep container closed when
not in use. Handle with care. Keep out of reach of children.
Storage: Store in original, labeled container.
Other: Containers, even empty will retain residue and may be harmful.

SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

Ventilation: Good general ventilation (equivalent to outdoors) should be adequate
for normal use. For operations where the TLV may be exceeded,
mechanical ventilation such as local exhaust may be needed to maintain
exposure levels below applicable limits.
Respiratory For operations where the TLV may be exceeded, a NIOSH approved
Protection: particulate respirator or supplied air respirator is recommended.
Equipment selection depends on contaminant type and concentration,
select in accordance with 29 CFR 1910.134 and good industrial hygiene
practice. For firefighting, use self-contained breathing apparatus.
Skin Wear rubber gloves.
Protection:
Eye Safety glasses with sideshields or safety goggles.
Protection:
Other: Eye wash and safety shower should be available.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Boiling Point: 638 Degrees F (337 Degrees C)
Melting Point: Not determined
Vapor Pressure: Not determined
Vapor Density: (Air = 1) Greater than 1
Volatile Components: 7-10%
Solubility In Water: Negligible
pH: Not applicable
Specific Gravity: 1.1
Evaporation Rate: Not applicable
Appearance: Yellow Paste
Odor: Very little odor
Will Dissolve In: Methylene Chloride
Material Is: Paste

SECTION 10 STABILITY AND REACTIVITY

Stability: Stable.
Conditions To Avoid: None.
Hazardous: Hydrocarbons, hydrogen chloride, zinc fumes, ammonia, smoke,
Decomposition: smoke, carbon monoxide, carbon dioxide and nitrogen oxides.
Products:
Incompatibility/ Strong oxidizing agents, potassium, cyanides and sulfides.
Materials To Avoid:
Hazardous: Will not occur.
Polymerization:

SECTION 11 TOXICOLOGICAL INFORMATION

Inhalation: Fumes from heated product may be corrosive to mucous membranes and the respiratory system. Fumes may cause burning sensation, coughing, wheezing, shortness of breath, cyanosis, fever, chills, muscular pain, anemia, metallic taste in the mouth, headache, nausea, vomiting, sweating, diarrhea and pulmonary edema. Fumes may cause stannosis, a mild benign pneumoconiosis. Repeated inhalation of fumes may cause occupational asthma. Symptoms may be delayed.

Skin: Contact may cause irritation, ulcerations, burns or dermatitis. Symptoms may be delayed.

Eye: Vapors or fumes may cause redness, pain, blurred vision and corneal damage. Direct contact may cause burns and eye damage with possible blindness. Symptoms may be delayed.

Ingestion: May cause irritation or burns to the mouth and throat, nausea, vomiting or diarrhea. Death may occur from strictures of the esophagus and pylorus. Symptoms may be delayed.

Toxicity Data: Petrolatum: No data available
Zinc Chloride: Oral rat LD50: 350 mg/kg
Ammonium Chloride: Oral rat LD50: 1,650 mg/kg

Sensitization: None of the components are known to cause sensitization.
Carcinogenicity: None of the components are listed as a carcinogen or suspect carcinogen by NTP, IARC or OSHA.

Mutagenicity: None of the components have been found to be mutagenic.
Reproductive Toxicity: None of the components are known to cause adverse reproductive effects.
Medical Conditions Aggravated By Exposure: Persons with pre-existing skin, lung, kidney or liver disorders may be at increased risk from exposure to this product.

SECTION 12 ECOLOGICAL INFORMATION

No data available.

SECTION 13 DISPOSAL CONSIDERATIONS

Waste Disposal: Dispose of in accordance with federal, state, and local regulations. It is the responsibility of the end-user to determine at the time of disposal of the product.

RCRA Hazardous Waste Number: None
EPA Hazardous Waste ID Number: None
EPA Hazard Waste Class: None

SECTION 14 TRANSPORT INFORMATION

DOT

Proper Shipping Name: Not regulated
Hazard Class/Packing Group: None
UN/NA Number: None
Hazard Labels: None

IMDG

Proper Shipping Name: Not regulated
Hazard Class/Packing Group: None
UN Number: None
Label: None

2004 North American Emergency Response Guidebook Number: None

SECTION 15 REGULATORY INFORMATION

Hazard Category for Section 311/312: Acute Health, Chronic Health

Section 302 Extremely Hazardous Substances (TPQ): This product does not contain chemicals regulated under SARA Section 302.

Section 313 Toxic Chemicals: This product contains the following chemicals subject to SARA Title III Section 313 Reporting requirements:

| <u>Chemical</u> | <u>CAS #</u> | <u>% wt</u> |
|-----------------|--------------|-------------|
| Zinc Chloride | 7646-85-7 | 10-30% |

CERCLA 103 Reportable Quantity:

Spills of this product over the RQ (reportable quantity) must be reported to the National Response Center. The RQ for the product, based on the RQ for Zinc Chloride (30% max) of 1,000 lbs, is 3,300 lbs.

| <u>Chemical</u> | <u>CAS #</u> | <u>RQ, lbs.</u> |
|-------------------|--------------|-----------------|
| Zinc Chloride | 7646-85-7 | 1,000 |
| Ammonium Chloride | 12125-02-6 | 5,000 |

Many states have more stringent release reporting requirements. Report spills required under federal, state and local regulations.

California Proposition 65: This product does not contain chemicals regulated under California Proposition 65.

TSCA Inventory: All of the components of this product are listed on the TSCA inventory.

Canadian WHMIS Classification: Class E; Class D, Division 2, Subdivision B
This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

SECTION 16 OTHER INFORMATION

NFPA and HMIS:

NFPA Hazard Signal: Health: 3 Flammability: 1 Reactivity: 0 Special: None

HMIS Hazard Signal: Health: 3* Flammability: 1 Reactivity: 0 PPE: B

Disclaimer:

The information herein has been compiled from sources believed to be reliable, up-to-date, and is accurate to the best of our knowledge. However, Oatey cannot give any guarantees regarding information from other sources, and expressly does not make warranties, nor assumes any liability for its use.

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Section 1 - PRODUCT AND COMPANY IDENTIFICATION

Material Name

Sure-Grip 404

Synonyms

Solvent-based mastic

Chemical Family

Mastic

Product Use

Duct sealant

Restrictions on Use

For industrial use only

Manufacturer Information

Carlisle HVAC Products

900 Hensley Lane

Wylie, TX 75098

www.carlislehvac.com

Medical Emergency:

CHEMTREC (USA): (800) 424-9300

MSDS Assistance – 972-442-6545

Technical Assistance – 888-229-2199

Customer Service – 888-229-0199

Section 2 - HAZARDS IDENTIFICATION

Classification in accordance with paragraph (d) of 29 CFR 1910.1200.

Flammable Liquids - Category 2

Skin Corrosion/Irritation - Category 2

Serious Eye Damage/Eye Irritation - Category 2A

Reproductive Toxicity - Category 1A

Specific Target Organ Toxicity - Repeated Exposure - Category 2

GHS Label Elements

Symbol(s)





Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Signal Word

Danger

Hazard Statement(s)

Highly flammable liquid and vapor

Causes skin irritation

Causes serious eye irritation

May damage fertility or the unborn child

May cause damage to organs through prolonged or repeated exposure

Precautionary Statement(s)

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Keep container tightly closed

Keep away from heat/sparks/open flame/hot surfaces - No smoking

Ground/Bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting equipment

Take precautionary measures against static discharge

Use only non-sparking tools

Wear protective gloves/protective clothing/eye protection/face protection

Do not breathe dust/fume/gas/mist/vapours/spray

Wash thoroughly after handling

Response

In case of fire: Use appropriate media to extinguish

IF exposed or concerned: Get medical advice/attention

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing

If eye irritation persists: Get medical advice/attention

IF ON SKIN (or hair): Remove/take off immediately all contaminated clothing. Rinse skin with water/shower

If skin irritation occurs: Get medical advice/attention

Take off contaminated clothing and wash before reuse

Specific treatment (see label)

Storage

Store in a well-ventilated place. Keep container tightly closed

Keep cool

Store locked up

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations

Other Hazards

No additional information available.

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Section 3 - COMPOSITION / INFORMATION ON INGREDIENTS

| CAS | Component Name | Percent |
|--------------|---------------------------|---------|
| Trade Secret | Styrene butadiene polymer | 5-10 |
| Trade Secret | Polyphenol antioxidant | 0.1-1 |
| 1314-13-2 | Zinc oxide | 1-5 |
| 21645-51-2 | Aluminum hydroxide | 5-10 |
| 108-88-3 | Toluene | 7-13 |
| 64742-89-8 | Heptane | 10-30 |

Section 4 - FIRST AID MEASURES

Description of Necessary Measures

IF exposed or concerned: Get medical advice/attention.

Inhalation

Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor if you feel unwell.

Skin

Remove/Take off immediately all contaminated clothing and wash it before reuse. Rinse skin with water/shower. If skin irritation occurs, get medical advice/attention.

Eyes

Flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists, get medical advice/attention.

Ingestion

If swallowed, get medical attention. Do NOT induce vomiting.

Indication of any immediate medical attention and special treatment needed

Treat symptomatically and supportively.

Most Important Symptoms/Effects

Acute

Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause gastrointestinal irritation.

Delayed

May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure: kidney, liver.



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Note to Physicians

Contains organic solvents: heptane, toluene.

Section 5 - FIRE FIGHTING MEASURES

Extinguishing Media

Suitable Extinguishing Media

Dry chemical, foam or carbon dioxide. Water may be ineffective. Use water spray to keep containers cool.

Unsuitable Extinguishing Media

Do not use high-pressure water streams.

Special Hazards Arising from the Chemical

Can burn and explode easily when exposed to open flames or high heat.

Hazardous Combustion Products

oxides of carbon, oxides of nitrogen

Special Protective Equipment and Precautions for Firefighters

Highly flammable liquid and vapor. Vapors are heavier than air and may travel a considerable distance to a source of ignition and flashback.

Fire Fighting Measures

Wear full protective fire fighting gear including self contained breathing apparatus (SCBA) for protection against possible exposure.

Section 6 - ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures

Wear personal protective clothing and equipment, see Section 8.

Methods and Materials for Containment and Cleaning Up

Remove all sources of ignition. Avoid breathing vapors. Ventilate affected area. Absorb with earth, sand or other non-combustible material and transfer to container. Use non-sparking tools. Dike for later disposal.

Environmental Precautions

Avoid release to the environment.

Section 7 - HANDLING AND STORAGE

Precautions for Safe Handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flame/hot surfaces - No smoking. Take precautionary measures against static discharge. Ground/bond container and receiving equipment. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. Do



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

not breathe dust/fume/gas/mist/vapors/spray. Wash thoroughly after handling. Wash contaminated clothing before reuse. KEEP OUT OF REACH OF CHILDREN.

Conditions for Safe Storage, Including any Incompatibilities

Store in a well-ventilated place. Keep container tightly closed

Keep cool

Store locked up

Keep away from heat and ignition sources. Keep away from incompatible materials. Do not cut, puncture, or weld on or near this container.

Incompatible Materials

Strong oxidizing agents, acids, bases

Section 8 - EXPOSURE CONTROLS / PERSONAL PROTECTION

Component Exposure Limits

| | | |
|-------------------|---|---|
| Limestone | 1317-65-3 | |
| NIOSH: | 10 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable dust | |
| OSHA (US): | 15 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable fraction | |
| Mexico: | 10 mg/m ³ TWA LMPE-PPT | 20 mg/m ³ STEL [LMPE-CT] |
| Zinc oxide | 1314-13-2 | |
| ACGIH: | 2 mg/m ³ TWA respirable fraction | 10 mg/m ³ STEL respirable fraction |
| NIOSH: | 5 mg/m ³ TWA dust and fume | 10 mg/m ³ STEL fume |
| | 15 mg/m ³ Ceiling dust | 500 mg/m ³ IDLH |
| OSHA (US): | 5 mg/m ³ TWA fume; 15 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable fraction | |
| Mexico: | 5 mg/m ³ TWA LMPE-PPT fume; 10 mg/m ³ TWA LMPE-PPT dust | |
| | 10 mg/m ³ STEL [LMPE-CT] fume | |
| Clay | 1332-58-7 | |
| ACGIH: | 2 mg/m ³ TWA particulate matter containing no asbestos and <1% crystalline silica, respirable fraction | |
| NIOSH: | 10 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable dust | |
| OSHA (US): | 15 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable fraction | |
| Mexico: | 10 mg/m ³ TWA LMPE-PPT | 20 mg/m ³ STEL [LMPE-CT] |

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

| | | |
|-------------------|---|--|
| Silica gel | 112926-00-8 | |
| ACGIH: | 10 mg/m ³ TLV-TWA | |
| NIOSH: | 6 mg/m ³ TWA | 3000 mg/m ³ IDLH |
| OSHA (US): | 20 mppcf TWA; ((80)/(% SiO ₂)) mg/m ³ TWA) | |
| Mexico: | 10 mg/m ³ TWA LMPE-PPT | |
| | | |
| Toluene | 108-88-3 | |
| ACGIH: | 20 ppm TWA | 150 ppm STEL |
| | | |
| NIOSH: | 100 ppm TWA; 375 mg/m ³ TWA | 150 ppm STEL; 560 mg/m ³ STEL |
| | 500 ppm IDLH | |
| Europe: | 50 ppm TWA; 192 mg/m ³ TWA | 100 ppm STEL; 384 mg/m ³ STEL |
| | Possibility of significant uptake through the skin | |
| OSHA (US): | 200 ppm TWA | 150 ppm STEL |
| | 300 ppm Ceiling | |
| Mexico: | 50 ppm TWA LMPE-PPT; 188 mg/m ³ TWA LMPE-PPT | |
| | Skin - potential for cutaneous absorption | |
| | | |
| Heptane | 64742-89-8 | |
| NIOSH: | 85 ppm TWA | 440 ppm STEL |
| | 500 ppm IDLH | |
| OSHA (US): | 400 ppm TWA | 500 ppm STEL |

Biological limit value

There are no biological limit values for any of this product's components.

Engineering Controls

Provide local exhaust ventilation system. Ensure compliance with applicable exposure limits.

Individual Protection Measures, such as Personal Protective Equipment

Eye/face protection

Safety glasses or goggles are recommended when there is a potential for eye contact. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.

Skin Protection

Wear appropriate work clothing. Wear protective shoes. Recommended material: protective skin cream.

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Respiratory Protection

In case of inadequate ventilation wear respiratory protection. Appropriate respirator selection should be made by a qualified professional as part of a comprehensive respiratory protection program as described in 29 CFR 1910.134.

Glove Recommendations

Wear protective gloves. Recommended material: nitrile.

Section 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|------------------------------|-----------------------|---|--------------------------|
| Appearance | gray mastic | Physical State | solid |
| Odor | mild,hydrocarbon odor | Color | gray |
| Odor Threshold | Not available | pH | Not available |
| Melting Point | -95 °C (-139 °F) | Boiling Point | 90 - 111 °C (194-231 °F) |
| Freezing point | Not available | Evaporation Rate | 3 |
| Boiling Point Range | Not available | Flammability (solid, gas) | Not available |
| Autoignition | 230 °C (475 °F) | Flash Point | -7.2 °C (19 °F) |
| Lower Explosive Limit | 1 % | Decomposition | Not available |
| Upper Explosive Limit | 7 % | Vapor Pressure | 45 mmHg |
| Vapor Density (air=1) | 3.4 | Specific Gravity (water=1) | Not available |
| Water Solubility | Negligible | Partition coefficient: n-octanol/water | Not available |
| Viscosity | 450000 cps | Solubility (Other) | Hydrocarbons |
| Density | 1 - 1.2 (relative) | VOC | 395 g/L |
| Volatility by Weight | 30 - 40 % | | |

Other Information

No additional information available.

Section 10 - STABILITY AND REACTIVITY

Reactivity

No reactivity hazard is expected.



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Chemical Stability

Stable under normal conditions of use.

Possibility of Hazardous Reactions

Hazardous polymerization will not occur.

Conditions to Avoid

Avoid heat, flames, sparks and other sources of ignition. Avoid contact with incompatible materials.

Incompatible Materials

Strong oxidizing agents, acids, bases

Hazardous decomposition products

Oxides of carbon, oxides of nitrogen

Section 11 - TOXICOLOGICAL INFORMATION

Information on Likely Routes of Exposure

Inhalation

May cause respiratory irritation.

Skin Contact

Causes skin irritation.

Eye Contact

Causes serious eye irritation.

Ingestion

May cause gastrointestinal irritation.

Acute and Chronic Toxicity

Component Analysis - LD50/LC50

The components of this material have been reviewed in various sources and the following selected endpoints are published:

Polyphenol antioxidant (Trade Secret)

Oral LD50 Rat >200 mg/kg

Dermal LD50 Rabbit >5010 mg/kg

Inhalation LC50 Rat >165 mg/L 1 h

Zinc oxide (1314-13-2)

Oral LD50 Rat >5000 mg/kg

Aluminum hydroxide (21645-51-2)

Oral LD50 Rat >5000 mg/kg

Toluene (108-88-3)

Oral LD50 Rat 2600 mg/kg

Dermal LD50 Rabbit 12000 mg/kg

Inhalation LC50 Rat 12.5 mg/L 4 h

Heptane (64742-89-8)



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Oral LD50 Mouse 5000 mg/kg
Dermal LD50 Rabbit 3000 mg/kg

Immediate Effects

Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause gastrointestinal irritation.

Delayed Effects

May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure: kidney, liver.

Irritation/Corrosivity Data

May cause skin irritation. Causes serious eye irritation. May cause respiratory irritation.

Respiratory Sensitization

No data available.

Dermal Sensitization

It may cause sensitization in some individuals.

Component Carcinogenicity

| | |
|-------------------|---|
| Clay | 1332-58-7 |
| ACGIH: | A4 - Not Classifiable as a Human Carcinogen |
| DFG: | Category 3B (could be carcinogenic for man) |
| | |
| Silica gel | 112926-00-8 |
| IARC: | Monograph 68 [1997] (Group 3 (not classifiable)) |
| | |
| Toluene | 108-88-3 |
| ACGIH: | A4 - Not Classifiable as a Human Carcinogen |
| IARC: | Monograph 71 [1999]; Monograph 47 [1989] (Group 3 (not classifiable)) |

Germ Cell Mutagenicity

No data available.

Reproductive Toxicity

May damage fertility or the unborn child.

Specific Target Organ Toxicity - Single Exposure

No data available.

Specific Target Organ Toxicity - Repeated Exposure

May cause damage to organs through prolonged or repeated exposure: kidney, liver.

Aspiration hazard

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

No data available.

Medical Conditions Aggravated by Exposure

No data available.

Additional Data

No additional information available.

Section 12 - ECOLOGICAL INFORMATION

Ecotoxicity

Avoid release to the environment.

Component Analysis - Aquatic Toxicity

| | |
|-------------------------------|---|
| Polyphenol antioxidant | Trade Secret |
| Fish: | LC50 96 h Oncorhynchus mykiss >0.2 mg/L [semi-static] |
| Algae: | EC50 72 h Pseudokirchneriella subcapitata >0.2 mg/L IUCLID |
| Invertebrate: | EC50 48 h Daphnia magna >0.2 mg/L IUCLID |
| | |
| Toluene | 108-88-3 |
| Fish: | LC50 96 h Pimephales promelas 15.22 - 19.05 mg/L [flow-through] (1 day old); LC50 96 h Pimephales promelas 12.6 mg/L [static]; LC50 96 h Oncorhynchus mykiss 5.89 - 7.81 mg/L [flow-through]; LC50 96 h Oncorhynchus mykiss 14.1 - 17.16 mg/L [static]; LC50 96 h Oncorhynchus mykiss 5.8 mg/L [semi-static]; LC50 96 h Lepomis macrochirus 11 - 15 mg/L [static]; LC50 96 h Oryzias latipes 54 mg/L [static]; LC50 96 h Poecilia reticulata 28.2 mg/L [semi-static]; LC50 96 h Poecilia reticulata 50.87 - 70.34 mg/L [static] |
| Algae: | EC50 96 h Pseudokirchneriella subcapitata >433 mg/L IUCLID; EC50 72 h Pseudokirchneriella subcapitata 12.5 mg/L [static] EPA |
| Invertebrate: | EC50 48 h Daphnia magna 5.46 - 9.83 mg/L [static] EPA; EC50 48 h Daphnia magna 11.5 mg/L IUCLID |
| | |
| Heptane | 64742-89-8 |
| Algae: | EC50 72 h Pseudokirchneriella subcapitata 4700 mg/L IUCLID |

Persistence and Degradability

No information available for the product.



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Bioaccumulative Potential

No information available for the product.

Mobility

No information available for the product.

Other Toxicity

No additional information available.

Section 13 - DISPOSAL CONSIDERATIONS

Disposal Methods

Dispose of contents/container in accordance with local/regional/national/international regulations.

Section 14 - TRANSPORT INFORMATION

US DOT Information:

Shipping Name:Adhesives

Hazard Class: 2

UN/NA #: UN1133

Packing Group: II

Required Label(s): Red caution label required (limited quantity if < 0.3 gal)

IATA Information:

Shipping Name:ADHESIVES

Hazard Class: 3

UN#: UN1133

Packing Group: II

Required Label(s): 3

TDG Information:

Shipping Name:ADHESIVES

Hazard Class: 3

UN#: UN1133

Packing Group: II

Required Label(s):

Section 15 - REGULATORY INFORMATION

U.S. Federal Regulations



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65), CERCLA (40 CFR 302.4), TSCA 12(b), and/or require an OSHA process safety plan.

| | |
|-----------|-----------------------------------|
| Toluene | 108-88-3 |
| SARA 313: | 1 % de minimis concentration |
| CERCLA: | 1000 lb final RQ; 454 kg final RQ |

SARA Section 311/312 (40 CFR 370 Subparts B and C)

Acute Health: Yes **Chronic Health:** Yes **Fire:** Yes **Pressure:** No **Reactivity:** No

U.S. State Regulations

The following components appear on one or more of the following state hazardous substances lists:

| Component | CAS | CA | MA | MN | NJ | PA |
|------------|-------------|-----|-----|-----|-----|-----|
| Limestone | 1317-65-3 | No | Yes | Yes | Yes | Yes |
| Zinc oxide | 1314-13-2 | Yes | Yes | Yes | Yes | Yes |
| Clay | 1332-58-7 | No | Yes | Yes | Yes | Yes |
| Silica gel | 112926-00-8 | No | Yes | Yes | Yes | Yes |
| Toluene | 108-88-3 | Yes | Yes | Yes | Yes | Yes |

The following statement(s) are provided under the California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65):

WARNING! This product contains a chemical known to the state of California to cause reproductive/developmental effects

| | |
|----------------|--|
| Toluene | 108-88-3 |
| Repro/Dev. Tox | developmental toxicity , initial date 1/1/91 |
| | female reproductive toxicity , initial date 8/7/09 |

Canadian WHMIS Ingredient Disclosure List (IDL)

Components of this material have been checked against the Canadian WHMIS Ingredients Disclosure List. The List is composed of chemicals which must be identified on MSDSs if they are included in products which meet WHMIS criteria specified in the Controlled Products Regulations and are present above the threshold limits listed on the IDL

| | |
|------------|-----------|
| Zinc oxide | 1314-13-2 |
| | 1 % |
| Toluene | 108-88-3 |
| | 1 % |

Component Analysis - Inventory

Polyphenol antioxidant (Trade Secret)

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | No |

Limestone (1317-65-3)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | NSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Zinc oxide (1314-13-2)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Clay (1332-58-7)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Aluminum hydroxide (21645-51-2)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Silica gel (112926-00-8)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|----|-----|----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| No | DSL | No | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Toluene (108-88-3)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Heptane (64742-89-8)



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

| | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
| Yes | DSL | EIN | Yes | Yes | No | No | Yes | No | Yes | Yes | Yes |

Section 16 - OTHER INFORMATION

NFPA Ratings

Health: 2 Fire: 3 Reactivity: 0

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe

Summary of Changes

Revision Date: June 1, 2018

Revision Note: General Update

Key / Legend

ACGIH - American Conference of Governmental Industrial Hygienists; ADR - European Road Transport; AU - Australia; BOD - Biochemical Oxygen Demand; C - Celsius; CA - Canada; CAS - Chemical Abstracts Service; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CLP - Classification, Labelling, and Packaging; CN - China; CPR - Controlled Products Regulations; DFG - Deutsche Forschungsgemeinschaft; DOT - Department of Transportation; DSD - Dangerous Substance Directive; DSL - Domestic Substances List; EEC - European Economic Community; EINECS - European Inventory of Existing Commercial Chemical Substances; EPA - Environmental Protection Agency; EU - European Union; F - Fahrenheit; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; ICAO - International Civil Aviation Organization; IDL - Ingredient Disclosure List; IDLH - Immediately Dangerous to Life and Health; IMDG - International Maritime Dangerous Goods; JP - Japan; Kow - Octanol/water partition coefficient; KR - Korea; LEL - Lower Explosive Limit; LLV - Level Limit Value; LOLI - List Of Lists™ - ChemADVISOR's Regulatory Database; MAK - Maximum Concentration Value in the Workplace; MEL - Maximum Exposure Limits; NFPA - National Fire Protection Agency; NIOSH - National Institute for Occupational Safety and Health; NJTSR - New Jersey Trade Secret Registry; NTP - National Toxicology Program; NZ - New Zealand; OSHA - Occupational Safety and Health Administration; PH - Philippines; RCRA - Resource Conservation and Recovery Act; REACH- Registration, Evaluation, Authorisation, and restriction of Chemicals; RID - European Rail Transport; SARA - Superfund Amendments and Reauthorization Act; STEL - Short-term Exposure Limit; TDG - Transportation of Dangerous Goods; TSCA - Toxic Substances Control Act; TWA - Time Weighted Average; UEL - Upper Explosive Limit; US - United States.



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Other Information

Disclaimer:

The information contained herein is based upon data and information available to us, and reflects our best professional judgment. This product may be formulated in part with components purchased from other companies. No warranty of merchantability, fitness for any use, or any other warranty is expressed or implied regarding the accuracy of such data or information. The results to be obtained from the use thereof, or that any such use does not infringe any patent, since the information contained herein may be applied under conditions of use beyond our control and with which we may be unfamiliar, we do not assume responsibility for the results of such application. This information is furnished upon the condition that the person receiving it shall make his own determination of the suitability of the material for his particular use.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

1.) Identification of the Mixture and of the Company

Product identifier: **Crown Brite Galvanize Coating 65% Zinc Rich - Aerosol**

Product name:
7008 Crown Brite Galvanize Coating 65% Zinc Rich

Relevant identified uses of the substance: Use on damaged galvanized surfaces, structural steel, automobiles, chain link fences, guard rails, hand rails, bridges, TV and radio towers, heat ducts, welded joints, storage tanks, signs and sign posts, equipment (farming, mining and construction, power plant, railroad, offshore, etc.), gutters, pipelines, transformers, corrugated metal buildings and anywhere the bright look of hot-dipped surfaces is desired. Ideal for industrial type application, (e.g., aviation, marine, manufacturing, petroleum).

Uses advised against: Do not apply at temperatures below 40°F (4°C), or if rain is imminent within 6 hours of application

| | |
|-----------------------------|---|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe Industries Incorporated |
| For Product Information: | 1-800-227-0196 |
| Emergency telephone number: | 1-800-424-9300 (CHEMTREC – 24 hrs) |

2. Hazards identification

Classifications

| | |
|-------------------|----------------------|
| Physical Hazards: | Aerosol - Category 1 |
| | Flam. Liq. 2 |
| | Flam. Liq. 3 |
| | Liquified Gas |
| | Flam. Gas 1 |

| | |
|-----------------|--------------|
| Health Hazards: | Asp. Tox. 1 |
| | Skin Irr. 2 |
| | Eye Irrit. 2 |
| | STOT SE 3 |

| | |
|------------------------|-------------------|
| Environmental Hazards: | Aquatic Acute 1 |
| | Aquatic Chronic 1 |
| | Aquatic Tox. 2 |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Labeling

Signal Word: Danger

Hazard Statements: H220 – Extremely flammable gas.
H222 – Extremely Flammable Aerosol
H224 – Extremely flammable liquid and vapor.
H225 – Highly flammable liquid and vapour.
H226 – Flammable liquid and vapour.
H229 – Pressurized container: may burst if heated
H315 – Causes skin irritation.
H304 – May be fatal if swallowed and enters airways
H319 – Causes serious eye irritation.
H336 – May cause drowsiness or dizziness.
H400 – Very toxic to aquatic life.
H410 – Very toxic to aquatic life with long lasting effects.
H411 – Toxic to aquatic life with long lasting effects.

Precautionary Statements: P101 - If medical advice is needed, have product container or label at hand
P102 - Keep out of reach of children
P103 - Read label before use
P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking
P211 - Do not spray on an open flame or other ignition source
P251 - Pressurized container: Do not pierce or burn, even after use
P261 - Avoid breathing dust/fume/gas/mist/vapours/spray
P262 - Do not get in eyes, on skin, or on clothing
P264 - Wash ... thoroughly after handling
P280 - Wear protective gloves/eye protection/face protection

P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.
P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F
P501 - Dispose of contents/container in accordance with local/regional/national/international regulation

Symbols/Pictograms:



3. Composition / Information on Ingredients

Composition



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|---------------------------------|-----------------|------------|---------------|----------------|---|---|
| Acetone | Propanone | 67-64-1 | 200-662-2 | 30-60% | Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 | H225 H319 H336 |
| Hydrocarbon Propellant | LPG | 68476-86-8 | 270-705-8 | 10-30% | Liquified Gas Flam. Gas 1 | H220 H229 |
| Zinc Powder | Zinc Dust | 7440-66-6 | 231-175-3 | 10-30% | Aquatic Acute 1 Aquatic Chronic 1 | H400 H410 |
| n-Butyl Acetate | n-Butyl Ester | 123-86-4 | 204-658-1 | 10-30% | Flam. Liq. 3 STOT SE 3 | H226 H336 |
| Aliphatic Petroleum Distillates | Solvent Naphtha | 64742-89-8 | 265-192-2 | 1-5% | H224 H304 H315 H336 H411 | GHS02 GHS07 GHS08 Dgr GHS09 |

Other Product Information

Chemical Identity: Mixture

4.) First Aid Measures

| | |
|---|---|
| General Advice: | If symptoms persist, always call a doctor. |
| Inhalation First Aid: | Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately. |
| Skin Contact First Aid: | Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. |
| Eye Contact First Aid: | If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately. |
| Ingestion First Aid: | If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |
| Most Important Symptoms/Effects: | Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects. |

5. Fire Fighting Measures

| | |
|---------------------------------|--|
| Flammable Properties: | Aerosol |
| Auto Ignition Temperature: | Not Available |
| Suitable extinguishing media: | Carbon dioxide, dry chemical, water spray. |
| Unsuitable extinguishing media: | None known |



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Special hazards arising from the substance or mixture:

None known

Hazardous combustion products:

Carbon dioxide, Carbon monoxide

Fire & Explosion Hazards:

Closed Containers may rupture due to the buildup of pressure from extreme temperatures.

Precautions for fire-fighters: Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.
- 2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling:

Flammable Aerosol, use in a well ventilated area.
Do not use near sources of ignition.
Do not to eat, drink and smoke while working with this material.
Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
Storage Temperature: 32° to 120°F (0° to 49°C).
No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
Keep away from sources of ignition.
Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|---------------------------------|------------|-----------------|------------------|----------------|-----------------|
| Acetone | 67-64-1 | 250PPM | 500PPM | 1000PPM | N/A |
| Hydrocarbon Propellant | 68476-86-8 | N/A | N/A | N/A | N/A |
| Zinc Powder | 7440-66-6 | N/A | N/A | N/A | N/A |
| n-Butyl Acetate | 123-86-4 | 50PPM | 150PPM | N/A | N/A |
| Aliphatic Petroleum Distillates | 64742-89-8 | N/A | N/A | N/A | N/A |

*Values are based on the 2019 Guide to Occupational Exposure Values by ACGIH

9. Information on Basic Physical and Chemical Properties

| | |
|--|---|
| Appearance: Metallic gray | Odor: Ketone Odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: <0° F (-18° C) | Evaporation Rate: Faster than n-Butyl Acetate |
| Flammability Solid/Gas: Flammable gas | LEL: 0.9% UEL: 12.8% |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions

Chemical stability: Stable under normal conditions

Conditions to avoid: Heat and ignition sources

Incompatible materials: Strong Oxidizing Agents

Hazardous decomposition products: Will not occur

11. Toxicological Information



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: (Acetone) 5800 mg/kg (Rat-Oral)
(Acetone) 21000 ppm/8 hr (Rat-Inha)

Eye irritation data: Eye Irrit 2

Skin irritation/sensitization/absorption data: Skin Irrit 2
Reproductive toxicity data: N/AV

Mutagenicity data: N/AV

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure: Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV
IARC: N/AV
OSHA: TLV-A4

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|--------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference 49 CFR 172.101 |

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|----------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|---|
| UN1950 | Aerosols, Flammable | 2.1 | Not Applicable | Not Applicable | Reference IATA Dangerous Goods Regulation |

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 10/2/19



Safety Data Sheet (SDS)

Date Prepared/Revised: 10/2/19 Version no.: 04 Supersedes: (6/6/2018)

Supersedes: 6/6/2018

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.

SAFETY DATA SHEET

1. Identification

Product identifier Propane

Other means of identification
SDS number WC002

Recommended use Soldering and brazing.

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information
Manufacturer/Supplier Worthington Cylinder Corporation
Address 300 E. Breed St.
 Chilton, WI 53014
 United States
E-mail SDSRequest@worthingtonindustries.com
Telephone 1-800-359-9678
Emergency telephone CHEMTREC 1-800-424-9300 (USA)
 1-703-527-3887 International
 (CCN 628056)

2. Hazard(s) identification

Physical hazards Flammable gases Category 1
 Gases under pressure Liquefied gas

Health hazards Not classified.

OSHA defined hazards Simple asphyxiant

Label elements



Signal word Danger

Hazard statement Extremely flammable gas. Contains gas under pressure; may explode if heated. May displace oxygen and cause rapid suffocation.

Precautionary statement
Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Use only with adequate ventilation.
Response Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so.
Storage Protect from sunlight. Store in a well-ventilated place.
Disposal Dispose of waste and residues in accordance with local authority requirements.

Hazard(s) not otherwise classified (HNOC) Contact with liquefied gas may cause frostbite.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------|------------|------------|
| Propane | 74-98-6 | 87.5 - 100 |
| Propylene | 115-07-1 | 0 - 10 |
| Ethane | 74-84-0 | 0 - 7 |

| Chemical name | CAS number | % |
|---------------|------------|---------|
| Butane | 106-97-8 | 0 - 2.5 |

| Additives | | | |
|-----------------|--------------------------|------------|---------|
| Chemical name | Common name and synonyms | CAS number | % |
| Ethyl mercaptan | | 75-08-1 | < 0.005 |

Composition comments Gas concentrations are in percent by volume.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory tract irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation. |
| Skin contact | Not likely, due to the form of the product. If frostbite occurs, immerse affected area in warm water (not exceeding 105°F/41°C). Keep immersed for 20 to 40 minutes. Get medical attention immediately. |
| Eye contact | Not likely, due to the form of the product. If frostbite occurs, immediately flush eyes with plenty of warm water (not exceeding 105°F/41°C) for at least 15 minutes. If easy to do, remove contact lenses. Get medical attention promptly if symptoms persist or occur after washing. |
| Ingestion | This material is a gas under normal atmospheric conditions and ingestion is unlikely. |
| Most important symptoms/effects, acute and delayed | Exposure to rapidly expanding gas or vaporizing liquid may cause frostbite ("cold burn"). Very high exposure can cause suffocation from lack of oxygen. Symptoms may include loss of mobility/consciousness. Victim may not be aware of asphyxiation. Asphyxiation may bring about unconsciousness without warning and so rapidly that victim may be unable to protect themselves. |
| Indication of immediate medical attention and special treatment needed | Exposure may aggravate pre-existing respiratory disorders. Provide general supportive measures and treat symptomatically. |
| General information | First aid personnel must be aware of own risk during rescue. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Dry chemical powder. Carbon dioxide (CO ₂). Water fog. Foam. |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Extremely flammable gas. May form explosive mixtures with air. Gas may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Do not extinguish fires unless gas flow can be stopped safely; explosive re-ignition may occur. Promptly isolate the scene by removing all persons from the vicinity of the incident. No action shall be taken involving any personal risk or without suitable training. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus. Stop flow of material. Use water to keep fire exposed containers cool and to protect personnel effecting shutoff. If a leak or spill has not ignited, use water spray to disperse the vapors and to protect personnel attempting to stop leak. Prevent runoff from fire control or dilution from entering streams, sewers or drinking water supply. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. Cool containers exposed to flames with water until well after the fire is out. |
| General fire hazards | Extremely flammable gas. Contents under pressure. Pressurized container may explode when exposed to heat or flame. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Evacuate the area promptly. No action shall be taken involving any personal risk or without suitable training. In the event of a leak evacuate all personnel until ventilation can restore oxygen concentrations to safe levels. Keep unnecessary personnel away. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Wear appropriate personal protective equipment (See Section 8). |
|--|---|

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. If possible, turn leaking containers so that gas escapes rather than liquid. Isolate area until gas has dispersed. For waste disposal, see section 13 of the SDS.

Environmental precautions

Should not be released into the environment. Prevent further leakage or spillage if safe to do so.

7. Handling and storage

Precautions for safe handling

Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Do not smoke. All equipment used when handling the product must be grounded. Do not breathe gas. Avoid prolonged exposure. Do not enter storage areas or confined spaces unless adequately ventilated. Use only outdoors or in a well-ventilated area. Oxygen concentration should not fall below 19.5 % at sea level (pO2 = 135 mmHg). Mechanical ventilation or local exhaust ventilation may be required. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Do not store, incinerate, or heat this material above 120 degrees Fahrenheit. Keep away from heat, sparks and open flame. This material can accumulate static charge which may cause spark and become an ignition source. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Protect cylinders from damage. Stored containers should be periodically checked for general condition and leakage. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------|------|------------------------|
| Propane (CAS 74-98-6) | PEL | 1800 mg/m3 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|--------------------------|------|----------|
| Butane (CAS 106-97-8) | STEL | 1000 ppm |
| Propylene (CAS 115-07-1) | TWA | 500 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------|------|------------------------|
| Butane (CAS 106-97-8) | TWA | 1900 mg/m3 800 ppm |
| Propane (CAS 74-98-6) | TWA | 1800 mg/m3 1000 ppm |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Exposure guidelines

Follow standard monitoring procedures.

Appropriate engineering controls

Provide adequate ventilation and minimize the risk of inhalation of gas. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear approved safety glasses or goggles. Face shield is recommended.

Skin protection

Hand protection

Wear cold insulating gloves.

Skin protection

Other

Wear protective clothing appropriate for the risk of exposure.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. The type of respiratory protection selected must comply with the requirements set forth in OSHA's Respiratory Protection Standard (29 CFR 1910.134).
WARNING! Air-purifying respirators do not protect workers in oxygen deficient atmospheres.

| | |
|---------------------------------------|---|
| Thermal hazards | Contact with liquefied gas might cause frostbites, in some cases with tissue damage. Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Do not eat, drink or smoke when using the product. Wash thoroughly after handling. Provide eyewash station and safety shower. Handle in accordance with good industrial hygiene and safety practices. |

9. Physical and chemical properties

Appearance

| | |
|---|---|
| Physical state | Gas. |
| Form | Compressed liquefied gas. |
| Color | Colorless. |
| Odor | Rotten egg. |
| Odor threshold | Not determined. |
| pH | Not applicable. |
| Melting point/freezing point | -306.4 °F (-188 °C) |
| Initial boiling point and boiling range | -43.6 °F (-42 °C) 14.7 psia |
| Flash point | -155.2 °F (-104.0 °C) |
| Evaporation rate | Not determined. |
| Flammability (solid, gas) | Extremely flammable gas. |
| Upper/lower flammability or explosive limits | |
| Explosive limit - lower (%) | 2.15 % |
| Explosive limit - upper (%) | 9.6 % |
| Vapor pressure | 127 psig (21°C / 70°F) |
| Vapor density | Not determined. |
| Relative density | 0.504 (liquid) 1.5 (vapor) (Air=1) (59 °F (15 °C)) |
| Solubility(ies) | |
| Solubility (water) | Slightly soluble in water. |
| Partition coefficient (n-octanol/water) | 1.77 |
| Auto-ignition temperature | 809.6 °F (432 °C) |
| Decomposition temperature | Not determined. |
| Viscosity | Not applicable. |
| Other information | |
| Density | Not determined. |
| Explosive properties | Not explosive. |
| Kinematic viscosity | Not determined. |
| Molecular weight | 45 g/mol |
| Oxidizing properties | Not oxidizing. |
| Particle size | Not applicable. |
| Percent volatile | 100 % |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | Reacts violently with strong oxidants, nitrites, inorganic chlorides, chlorites and perchlorates causing fire and explosion hazard. |
| Chemical stability | Stable under normal temperature conditions and recommended use. |
| Possibility of hazardous reactions | Polymerization will not occur. May form explosive mixture with air. This product may react with oxidizing agents. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. Halogens. Nitrates. |

Hazardous decomposition products Thermal decomposition of this product can generate carbon monoxide and carbon dioxide. Hydrocarbons.

11. Toxicological information

Information on likely routes of exposure

Inhalation High concentrations: Suffocation (asphyxiant) hazard - if allowed to accumulate to concentrations that reduce oxygen below safe breathing levels. Breathing of high concentrations may cause dizziness, light-headedness, headache, nausea and loss of coordination. Continued inhalation may result in unconsciousness.

Skin contact Contact with liquefied gas may cause frostbite.

Eye contact Contact with liquefied gas may cause frostbite.

Ingestion This material is a gas under normal atmospheric conditions and ingestion is unlikely.

Symptoms related to the physical, chemical and toxicological characteristics Exposure to rapidly expanding gas or vaporizing liquid may cause frostbite ("cold burn"). Very high exposure can cause suffocation from lack of oxygen. Symptoms may include loss of mobility/consciousness. Victim may not be aware of asphyxiation. Asphyxiation may bring about unconsciousness without warning and so rapidly that victim may be unable to protect themselves.

Information on toxicological effects

Acute toxicity Not expected to be acutely toxic.

| Components | Species | Test Results |
|---|--|-------------------------|
| Propane (CAS 74-98-6) | | |
| Acute | | |
| Inhalation | | |
| Gas | | |
| LC50 | Rat | > 80000 ppm, 15 Minutes |
| Propylene (CAS 115-07-1) | | |
| Acute | | |
| Inhalation | | |
| Gas | | |
| LC50 | Rat | > 65000 ppm, 4 Hours |
| Skin corrosion/irritation | Not classified. | |
| Serious eye damage/eye irritation | Not classified. | |
| Respiratory or skin sensitization | | |
| Respiratory sensitization | Not a respiratory sensitizer. | |
| Skin sensitization | This product is not expected to cause skin sensitization. | |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. | |
| Carcinogenicity | Not classifiable as to carcinogenicity to humans. | |
| IARC Monographs. Overall Evaluation of Carcinogenicity | | |
| Propylene (CAS 115-07-1) | 3 Not classifiable as to carcinogenicity to humans. | |
| NTP Report on Carcinogens | | |
| Not listed. | | |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053) | | |
| Not listed. | | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. | |
| Specific target organ toxicity - single exposure | Not classified. | |
| Specific target organ toxicity - repeated exposure | Not classified. | |
| Aspiration hazard | Not relevant, due to the form of the product. | |
| Chronic effects | Exposure over a long period of time may cause central nervous system effects. | |

12. Ecological information

| | |
|--|--|
| Ecotoxicity | The product is not expected to be hazardous to the environment. |
| Persistence and degradability | Not relevant, due to the form of the product. |
| Bioaccumulative potential | Not relevant, due to the form of the product. |
| Partition coefficient n-octanol / water (log Kow) | |
| Propane (CAS 74-98-6) | 2.36 |
| Propylene (CAS 115-07-1) | 1.77 |
| Mobility in soil | Not relevant, due to the form of the product. |
| Other adverse effects | The product contains volatile organic compounds which have a photochemical ozone creation potential. |

13. Disposal considerations

| | |
|--|---|
| Disposal instructions | Use the container until empty. Do not dispose of any non-empty container. Empty containers have residual vapor that is flammable and explosive. Cylinders should be emptied and returned to a hazardous waste collection point. Do not puncture or incinerate even when empty. Dispose in accordance with all applicable regulations. |
| Local disposal regulations | Dispose of in accordance with local regulations. |
| Hazardous waste code | D001: Waste Flammable material with a flash point <140 °F The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose in accordance with all applicable regulations. |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. |

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1075 |
| UN proper shipping name | Petroleum gases, liquefied |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | - |
| Environmental hazards | |
| Marine pollutant | No |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T50 |
| Packaging exceptions | 306 |
| Packaging non bulk | 304 |
| Packaging bulk | 314, 315 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1075 |
| UN proper shipping name | Petroleum gases, liquefied |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Packing group | - |
| Environmental hazards | No |
| ERG Code | 10L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|-----------------------------------|----------------------------|
| UN number | UN1075 |
| UN proper shipping name | PETROLEUM GASES, LIQUEFIED |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Packing group | - |
| Environmental hazards | |
| Marine pollutant | No |

EmS

E-D, S-U

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-------------------------------|---------|
| Butane (CAS 106-97-8) | Listed. |
| Ethyl mercaptan (CAS 75-08-1) | Listed. |
| Propane (CAS 74-98-6) | Listed. |
| Propylene (CAS 115-07-1) | Listed. |

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not listed.

Toxic Substances Control Act (TSCA) All components of the mixture on the TSCA 8(b) inventory are designated "active".

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical Yes

Classified hazard categories Flammable (gases, aerosols, liquids, or solids)
Gas under pressure
Simple asphyxiant
Hazard not otherwise classified (HNOC)

SARA 313 (TRI reporting)

| Chemical name | CAS number | % by wt. |
|---------------|------------|----------|
| Propylene | 115-07-1 | 0 - 10 |

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)
Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. Massachusetts RTK - Substance List

Butane (CAS 106-97-8)
Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

US. New Jersey Worker and Community Right-to-Know Act

Butane (CAS 106-97-8)
Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

US. Pennsylvania Worker and Community Right-to-Know Law

Butane (CAS 106-97-8)

Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

US. Rhode Island RTK

Butane (CAS 106-97-8)
Ethyl mercaptan (CAS 75-08-1)
Propane (CAS 74-98-6)
Propylene (CAS 115-07-1)

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Butane (CAS 106-97-8)
Propylene (CAS 115-07-1)

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Industrial Chemicals (AICIS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| Taiwan | Taiwan Chemical Substance Inventory (TCSI) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 05-May-2014
Revision date 21-March-2021
Version # 03
HMIS® ratings Health: 2
Flammability: 4
Physical hazard: 3

NFPA ratings



Disclaimer

All information in this Safety Data Sheet is believed to be accurate and reliable. However, no guarantee or warranty of any kind is made with regard to the accuracy of information or the suitability of the recommendations contained herein. It is the user's responsibility to assess the safety and toxicity of this product under their own conditions of use and to comply with all applicable laws and regulations.

SAFETY DATA SHEET

SC0739000

Section 1. Identification

Product name : WL™739 Silver Galvanizing Compound Aerosol
Product code : SC0739000
Other means of identification : Not available.
Product type : Aerosol.
Relevant identified uses of the substance or mixture and uses advised against
Paint or paint related material.

Manufacturer : Sprayon Products Group
101 W. Prospect Avenue,
Cleveland, Ohio 44115

Emergency telephone number of the company : US / Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Product Information Telephone Number : US / Canada: (800) 247-3266
Mexico: Not Available

Regulatory Information Telephone Number : US / Canada: (216) 566-2902
Mexico: Not Available

Transportation Emergency Telephone Number : US / Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 2
TOXIC TO REPRODUCTION (Fertility) - Category 2
TOXIC TO REPRODUCTION (Unborn child) - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 1
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown acute oral toxicity: 45.3%
Percentage of the mixture consisting of ingredient(s) of unknown acute dermal toxicity: 45.3%
Percentage of the mixture consisting of ingredient(s) of unknown acute inhalation toxicity: 45.3%

GHS label elements

Date of issue/Date of revision : 11/27/2019 **Date of previous issue** : 10/28/2019 **Version** : 23 1/22 977
SC0739000 WL™739 Silver Galvanizing Compound Aerosol **SHW-85-NA-GHS-US**

Section 2. Hazards identification

Hazard pictograms



Signal word

: Danger

Hazard statements

: Extremely flammable aerosol.
Contains gas under pressure; may explode if heated.
Causes serious eye irritation.
Suspected of damaging fertility or the unborn child.
Suspected of causing cancer.
May be fatal if swallowed and enters airways.
May cause respiratory irritation.
May cause drowsiness or dizziness.
Causes damage to organs through prolonged or repeated exposure.

Precautionary statements

Prevention

: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.

Response

: Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage

: Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.

Disposal

: Dispose of contents and container in accordance with all local, regional, national and international regulations.

Supplemental label elements

DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY.

Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.

Hazards not otherwise classified

: None known.

Section 3. Composition/information on ingredients

Substance/mixture

: Mixture

Other means of identification

: Not available.

CAS number/other identifiers

Section 3. Composition/information on ingredients

| Ingredient name | % by weight | CAS number |
|-------------------------------------|-------------|------------|
| Acetone | ≥10 - ≤25 | 67-64-1 |
| Propane | ≥10 - ≤25 | 74-98-6 |
| Butane | ≥10 - ≤25 | 106-97-8 |
| Lt. Aliphatic Hydrocarbon Solvent | ≤10 | 64742-89-8 |
| Xylene, mixed isomers | ≤7.2 | 1330-20-7 |
| Aluminum | ≤3 | 7429-90-5 |
| 1,2,4-Trimethylbenzene | ≤2.7 | 95-63-6 |
| Med. Aliphatic Hydrocarbon Solvent | ≤3 | 64742-88-7 |
| Light Aromatic Hydrocarbons | ≤3 | 64742-95-6 |
| Light Aliphatic Hydrocarbon Solvent | <1 | 64742-49-0 |
| Light Aliphatic Hydrocarbon Solvent | <1 | 68410-97-9 |
| Ethylbenzene | <1 | 100-41-4 |
| 1,3,5-Trimethylbenzene | <1 | 108-67-8 |
| Cumene | ≤0.3 | 98-82-8 |
| Heavy Aromatic Naphtha | ≤0.3 | 64742-94-5 |
| Heptane | ≤0.3 | 142-82-5 |
| 1,2,3-Trimethylbenzene | ≤0.3 | 526-73-8 |
| Toluene | ≤0.3 | 108-88-3 |
| Light Aliphatic Hydrocarbon | ≤0.3 | 64742-47-8 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

| | | | | | | |
|--------------------------------|--|------------------------|--------------|------------------|------|------|
| Date of issue/Date of revision | : 11/27/2019 | Date of previous issue | : 10/28/2019 | Version | : 23 | 3/22 |
| SC0739000 | WL™739 Silver Galvanizing Compound Aerosol | | | SHW-85-NA-GHS-US | | 979 |

Section 4. First aid measures

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
 - pain or irritation
 - watering
 - redness
- Inhalation** : Adverse symptoms may include the following:
 - respiratory tract irritation
 - coughing
 - nausea or vomiting
 - headache
 - drowsiness/fatigue
 - dizziness/vertigo
 - unconsciousness
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
 - nausea or vomiting
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Section 5. Fire-fighting measures

- Specific hazards arising from the chemical** : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.
- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
metal oxide/oxides
- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|--|-------------------------|---|
| Acetone | 67-64-1 | ACGIH TLV (United States, 3/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 250 ppm 10 hours. TWA: 590 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m ³ 8 hours. |
| Propane | 74-98-6 | NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2019). Oxygen Depletion [Asphyxiant]. Explosive potential. |
| Butane | 106-97-8 | NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m ³ 10 hours. ACGIH TLV (United States, 3/2019). Explosive potential. STEL: 1000 ppm 15 minutes. |
| Lt. Aliphatic Hydrocarbon Solvent Xylene, mixed isomers | 64742-89-8 1330-20-7 | None. ACGIH TLV (United States, 3/2019). TWA: 100 ppm 8 hours. |

Section 8. Exposure controls/personal protection

| | | |
|---|--|---|
| Aluminum | 7429-90-5 | <p>TWA: 434 mg/m³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours. NIOSH REL (United States, 10/2016). TWA: 5 mg/m³ 10 hours. Form: Respirable fraction TWA: 10 mg/m³ 10 hours. Form: Total OSHA PEL (United States, 5/2018). TWA: 5 mg/m³, (as Al) 8 hours. Form: Respirable fraction TWA: 15 mg/m³, (as Al) 8 hours. Form: Total dust ACGIH TLV (United States, 3/2019). TWA: 1 mg/m³ 8 hours. Form: Respirable fraction</p> |
| 1,2,4-Trimethylbenzene | 95-63-6 | <p>ACGIH TLV (United States, 3/2019). TWA: 25 ppm 8 hours. TWA: 123 mg/m³ 8 hours. NIOSH REL (United States, 10/2016). TWA: 25 ppm 10 hours. TWA: 125 mg/m³ 10 hours.</p> |
| Med. Aliphatic Hydrocarbon Solvent | 64742-88-7 | <p>OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 400 mg/m³ 8 hours.</p> |
| Light Aromatic Hydrocarbons Light Aliphatic Hydrocarbon Solvent Light Aliphatic Hydrocarbon Solvent Ethylbenzene | 64742-95-6 64742-49-0 68410-97-9 100-41-4 | <p>None. None. None. ACGIH TLV (United States, 3/2019). TWA: 20 ppm 8 hours. NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 435 mg/m³ 10 hours. STEL: 125 ppm 15 minutes. STEL: 545 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
| 1,3,5-Trimethylbenzene | 108-67-8 | <p>ACGIH TLV (United States, 3/2019). TWA: 25 ppm 8 hours. TWA: 123 mg/m³ 8 hours. NIOSH REL (United States, 10/2016). TWA: 25 ppm 10 hours. TWA: 125 mg/m³ 10 hours.</p> |
| Cumene | 98-82-8 | <p>ACGIH TLV (United States, 3/2019). TWA: 50 ppm 8 hours. NIOSH REL (United States, 10/2016). Absorbed through skin. TWA: 50 ppm 10 hours. TWA: 245 mg/m³ 10 hours. OSHA PEL (United States, 5/2018). Absorbed through skin. TWA: 50 ppm 8 hours. TWA: 245 mg/m³ 8 hours.</p> |
| Heavy Aromatic Naphtha | 64742-94-5 | <p>None.</p> |

Section 8. Exposure controls/personal protection

| | | |
|-----------------------------|------------|--|
| Heptane | 142-82-5 | <p>ACGIH TLV (United States, 3/2019). TWA: 400 ppm 8 hours. TWA: 1640 mg/m³ 8 hours. STEL: 500 ppm 15 minutes. STEL: 2050 mg/m³ 15 minutes.</p> <p>NIOSH REL (United States, 10/2016). TWA: 85 ppm 10 hours. TWA: 350 mg/m³ 10 hours. CEIL: 440 ppm 15 minutes. CEIL: 1800 mg/m³ 15 minutes.</p> <p>OSHA PEL (United States, 5/2018). TWA: 500 ppm 8 hours. TWA: 2000 mg/m³ 8 hours.</p> |
| 1,2,3-Trimethylbenzene | 526-73-8 | <p>ACGIH TLV (United States, 3/2019). TWA: 25 ppm 8 hours. TWA: 123 mg/m³ 8 hours.</p> <p>NIOSH REL (United States, 10/2016). TWA: 25 ppm 10 hours. TWA: 125 mg/m³ 10 hours.</p> |
| Toluene | 108-88-3 | <p>OSHA PEL Z2 (United States, 2/2013). TWA: 200 ppm 8 hours. CEIL: 300 ppm AMP: 500 ppm 10 minutes.</p> <p>NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 375 mg/m³ 10 hours. STEL: 150 ppm 15 minutes. STEL: 560 mg/m³ 15 minutes.</p> <p>ACGIH TLV (United States, 3/2019). TWA: 20 ppm 8 hours.</p> |
| Light Aliphatic Hydrocarbon | 64742-47-8 | <p>ACGIH TLV (United States, 3/2019). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapor) 8 hours.</p> |

Occupational exposure limits (Canada)

| Ingredient name | CAS # | Exposure limits |
|-----------------|---------|---|
| Acetone | 67-64-1 | <p>CA Alberta Provincial (Canada, 6/2018). ▶ 8 hrs OEL: 1200 mg/m³ 8 hours. 15 min OEL: 1800 mg/m³ 15 minutes. 8 hrs OEL: 500 ppm 8 hours. 15 min OEL: 750 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWA_{EV}: 500 ppm 8 hours. TWA_{EV}: 1190 mg/m³ 8 hours. STEV: 1000 ppm 15 minutes. STEV: 2380 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013).</p> |

Section 8. Exposure controls/personal protection

| | | |
|------------------------|-----------|--|
| Normal propane | 74-98-6 | <p>STEL: 750 ppm 15 minutes. TWA: 500 ppm 8 hours.</p> <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 1000 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> |
| Butane | 106-97-8 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 800 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). Explosive potential.</p> |
| Xylene | 1330-20-7 | <p>STEL: 1000 ppm 15 minutes.</p> <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 651 mg/m³ 15 minutes. 15 min OEL: 150 ppm 15 minutes. 8 hrs OEL: 434 mg/m³ 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 651 mg/m³ 15 minutes.</p> <p>CA Ontario Provincial (Canada, 1/2018). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| 1,2,4-Trimethylbenzene | 95-63-6 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 123 mg/m³ 8 hours. 8 hrs OEL: 25 ppm 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 25 ppm 8 hours.</p> |

Section 8. Exposure controls/personal protection

| | | |
|---|------------|---|
| Medium aliphatic solvent naphtha (petroleum) C9-C12 | 64742-88-7 | <p>CA Quebec Provincial (Canada, 1/2014). TWA: 25 ppm 8 hours. TWA: 123 mg/m³ 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 25 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 30 ppm 15 minutes. TWA: 25 ppm 8 hours.</p> |
| Ethylbenzene | 100-41-4 | <p>CA Ontario Provincial (Canada, 1/2018). TWA: 525 mg/m³ 8 hours.</p> <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 8 hrs OEL: 434 mg/m³ 8 hours. 15 min OEL: 543 mg/m³ 15 minutes. 15 min OEL: 125 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 20 ppm 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 20 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWA: 100 ppm 8 hours. TWA: 434 mg/m³ 8 hours. STEL: 125 ppm 15 minutes. STEL: 543 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 125 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| Cumene | 98-82-8 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 50 ppm 8 hours. 8 hrs OEL: 246 mg/m³ 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 25 ppm 8 hours. STEL: 75 ppm 15 minutes.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 50 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWA: 50 ppm 8 hours. TWA: 246 mg/m³ 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 74 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> |
| Toluene | 108-88-3 | <p>CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 50 ppm 8 hours. 8 hrs OEL: 188 mg/m³ 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 20 ppm 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 20 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). Absorbed through skin.</p> |

Section 8. Exposure controls/personal protection

| | | |
|--|--|---|
| | | TWAEV: 50 ppm 8 hours. TWAEV: 188 mg/m ³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). Absorbed through skin. STEL: 60 ppm 15 minutes. TWA: 50 ppm 8 hours. |
|--|--|---|

Occupational exposure limits (Mexico)

| | CAS # | Exposure limits |
|------------------------|--------------|--|
| Acetone | 67-64-1 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. |
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Xylene, mixed isomers | 1330-20-7 | NOM-010-STPS-2014 (Mexico, 4/2016). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. |
| 1,2,4-Trimethylbenzene | 95-63-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 25 ppm 8 hours. |
| Ethylbenzene | 100-41-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |
| Toluene | 108-88-3 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 7
- Melting point/freezing point** : Not available.
- Boiling point/boiling range** : Not available.
- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 5.6 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 0.9%
Upper: 12.8%
- Vapor pressure** : 101.3 kPa (760 mm Hg) [at 20°C]
- Vapor density** : 1.55 [Air = 1]
- Relative density** : 0.88
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
- Molecular weight** : Not applicable.
- Aerosol product**
- Type of aerosol** : Spray
- Heat of combustion** : 25.984 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.

Section 10. Stability and reactivity

Conditions to avoid : Avoid all possible sources of ignition (spark or flame).

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------------------|-----------------------|---------|--------------------------|----------|
| Acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| Butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| Xylene, mixed isomers | LC50 Inhalation Gas. | Rat | 5000 ppm | 4 hours |
| 1,2,4-Trimethylbenzene | LD50 Oral | Rat | 4300 mg/kg | - |
| | LC50 Inhalation Vapor | Rat | 18000 mg/m ³ | 4 hours |
| Light Aromatic Hydrocarbons | LD50 Oral | Rat | 5 g/kg | - |
| | LD50 Oral | Rat | 8400 mg/kg | - |
| Light Aliphatic Hydrocarbon Solvent | LD50 Oral | Rat | 5.17 g/kg | - |
| Ethylbenzene | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |
| 1,3,5-Trimethylbenzene | LC50 Inhalation Vapor | Rat | 24000 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | 5000 mg/kg | - |
| Cumene | LC50 Inhalation Vapor | Rat | 39000 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | 1400 mg/kg | - |
| Heptane | LC50 Inhalation Gas. | Rat | 48000 ppm | 4 hours |
| | LC50 Inhalation Vapor | Rat | 103 g/m ³ | 4 hours |
| Toluene | LC50 Inhalation Vapor | Rat | 49 g/m ³ | 4 hours |
| | LD50 Oral | Rat | 636 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-----------------------------|--------------------------|---------|-------|-----------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 ppm | - |
| | Eyes - Mild irritant | Rabbit | - | 10 UI | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 20 mg | - |
| Xylene, mixed isomers | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 395 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 87 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 5 mg | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 UI | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| Light Aromatic Hydrocarbons | Skin - Moderate irritant | Rabbit | - | 100 % | - |
| | Eyes - Mild irritant | Rabbit | - | 24 hours 100 UI | - |
| Ethylbenzene | Eyes - Severe irritant | Rabbit | - | 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 15 mg | - |
| 1,3,5-Trimethylbenzene | Eyes - Mild irritant | Rabbit | - | 24 hours 500 mg | - |

Section 11. Toxicological information

| | | | | | |
|------------------------|--------------------------|--------|---|--------------------|---|
| Cumene | Skin - Moderate irritant | Rabbit | - | mg 24 hours 20 | - |
| | Eyes - Mild irritant | Rabbit | - | mg 24 hours 500 | - |
| Heavy Aromatic Naphtha | Eyes - Mild irritant | Rabbit | - | mg 86 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 10 | - |
| Toluene | Skin - Moderate irritant | Rabbit | - | mg 24 hours 100 | - |
| | Skin - Mild irritant | Rabbit | - | mg 24 hours 500 | - |
| Toluene | Eyes - Mild irritant | Rabbit | - | UI 0.5 minutes | - |
| | Eyes - Mild irritant | Rabbit | - | 100 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 870 ug | - |
| | Skin - Mild irritant | Pig | - | 24 hours 2 | - |
| | Skin - Mild irritant | Rabbit | - | mg 24 hours 250 | - |
| | Skin - Moderate irritant | Rabbit | - | UI 435 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 20 | - |
| | Skin - Moderate irritant | Rabbit | - | mg 500 mg | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|--|
| Xylene, mixed isomers | - | 3 | - |
| Ethylbenzene | - | 2B | - |
| Cumene | - | 2B | Reasonably anticipated to be a human carcinogen. |
| Toluene | - | 3 | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|---------|--------------------------|------------------------------------|--|
| Acetone | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Propane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Butane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |

Section 11. Toxicological information

| | | | |
|-------------------------------------|--|---|--|
| Lt. Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Xylene, mixed isomers | Category 3 | Not applicable. | Respiratory tract irritation |
| 1,2,4-Trimethylbenzene | Category 3 | Not applicable. | Respiratory tract irritation |
| Med. Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Light Aromatic Hydrocarbons | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Light Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Light Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Ethylbenzene | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| 1,3,5-Trimethylbenzene | Category 3 | Not applicable. | Respiratory tract irritation |
| Cumene | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Heavy Aromatic Naphtha Heptane | Category 3 Category 3 Category 3 | Not applicable. Not applicable. Not applicable. | Narcotic effects Narcotic effects Respiratory tract irritation |
| 1,2,3-Trimethylbenzene | Category 3 | Not applicable. | Respiratory tract irritation |
| Toluene | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|-------------------------------------|------------|-------------------|----------------|
| Acetone | Category 2 | Not determined | Not determined |
| Propane | Category 2 | Not determined | Not determined |
| Butane | Category 2 | Not determined | Not determined |
| Lt. Aliphatic Hydrocarbon Solvent | Category 2 | Not determined | Not determined |
| Xylene, mixed isomers | Category 2 | Not determined | Not determined |
| Med. Aliphatic Hydrocarbon Solvent | Category 1 | Not determined | Not determined |
| Light Aromatic Hydrocarbons | Category 2 | Not determined | Not determined |
| Light Aliphatic Hydrocarbon Solvent | Category 2 | Not determined | Not determined |
| Light Aliphatic Hydrocarbon Solvent | Category 2 | Not determined | Not determined |
| Ethylbenzene | Category 2 | Not determined | Not determined |
| Cumene | Category 2 | Not determined | Not determined |
| Heptane | Category 2 | Not determined | Not determined |
| Toluene | Category 2 | Not determined | Not determined |

Aspiration hazard

Section 11. Toxicological information

| Name | Result |
|-------------------------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Lt. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Xylene, mixed isomers | ASPIRATION HAZARD - Category 1 |
| 1,2,4-Trimethylbenzene | ASPIRATION HAZARD - Category 1 |
| Med. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Light Aromatic Hydrocarbons | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |
| 1,3,5-Trimethylbenzene | ASPIRATION HAZARD - Category 1 |
| Cumene | ASPIRATION HAZARD - Category 1 |
| Heavy Aromatic Naphtha | ASPIRATION HAZARD - Category 1 |
| Heptane | ASPIRATION HAZARD - Category 1 |
| 1,2,3-Trimethylbenzene | ASPIRATION HAZARD - Category 1 |
| Toluene | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.

Skin contact : No known significant effects or critical hazards.

Ingestion : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness

Inhalation : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Skin contact : Adverse symptoms may include the following:
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Ingestion : Adverse symptoms may include the following:
 nausea or vomiting
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Section 11. Toxicological information

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

- General** : Causes damage to organs through prolonged or repeated exposure.
- Carcinogenicity** : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.
- Mutagenicity** : No known significant effects or critical hazards.
- Teratogenicity** : Suspected of damaging the unborn child.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : Suspected of damaging fertility.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|---------------------|----------------|
| Oral | 45508.86 mg/kg |
| Dermal | 11641.8 mg/kg |
| Inhalation (gases) | 52917.28 ppm |
| Inhalation (vapors) | 500.48 mg/l |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-----------------------------------|-------------------------------------|-------------------------------------|----------|
| Acetone | Acute EC50 7200000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 6000000 µg/l Fresh water | Crustaceans - Gammarus pulex | 48 hours |
| | Acute LC50 6900 mg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| Lt. Aliphatic Hydrocarbon Solvent | Chronic NOEC 0.1 mg/l Fresh water | Fish - Fundulus heteroclitus | 4 weeks |
| | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| Xylene, mixed isomers | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| Aluminum | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute LC50 38000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 120 µg/l Fresh water | Fish - Oncorhynchus mykiss - Embryo | 96 hours |

Section 12. Ecological information

| | | | |
|-----------------------------|------------------------------------|---|----------|
| 1,2,4-Trimethylbenzene | Chronic NOEC 9 mg/l Fresh water | Aquatic plants - Ceratophyllum demersum | 3 days |
| | Acute LC50 4910 µg/l Marine water | Crustaceans - Elasmopus pecteniscrus - Adult | 48 hours |
| Ethylbenzene | Acute LC50 7720 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute EC50 4600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 3600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 6.53 mg/l Marine water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| | Acute EC50 2.93 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| 1,3,5-Trimethylbenzene | Acute LC50 4200 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| | Acute LC50 13000 µg/l Marine water | Crustaceans - Cancer magister - Zoea | 48 hours |
| Cumene | Acute LC50 12520 µg/l Fresh water | Fish - Carassius auratus | 96 hours |
| | Chronic NOEC 400 µg/l Fresh water | Daphnia - Daphnia magna | 21 days |
| | Acute EC50 2600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 7.4 mg/l Marine water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| | Acute EC50 10.6 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| Heptane | Acute LC50 2700 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| Toluene | Acute LC50 375000 µg/l Fresh water | Fish - Oreochromis mossambicus | 96 hours |
| | Acute EC50 12500 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 11600 µg/l Fresh water | Crustaceans - Gammarus pseudolimnaeus - Adult | 48 hours |
| | Acute EC50 6000 µg/l Fresh water | Daphnia - Daphnia magna - Juvenile (Fledgling, Hatchling, Weanling) | 48 hours |
| Light Aliphatic Hydrocarbon | Acute LC50 5500 µg/l Fresh water | Fish - Oncorhynchus kisutch - Fry | 96 hours |
| | Chronic NOEC 1000 µg/l Fresh water | Daphnia - Daphnia magna | 21 days |
| | Acute LC50 2200 µg/l Fresh water | Fish - Lepomis macrochirus | 4 days |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-----------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| Xylene, mixed isomers | - | - | Readily |
| Light Aromatic Hydrocarbons | - | - | Readily |
| Ethylbenzene | - | - | Readily |
| Toluene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------------------|--------------------|-------------|-----------|
| Lt. Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Xylene, mixed isomers | - | 8.1 to 25.9 | low |
| 1,2,4-Trimethylbenzene | - | 243 | low |
| Light Aromatic Hydrocarbons | - | 10 to 2500 | high |
| Light Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Light Aliphatic Hydrocarbon | - | 10 to 2500 | high |

Section 12. Ecological information

| | | | |
|------------------------|---|------------|------|
| Solvent | - | 161 | low |
| 1,3,5-Trimethylbenzene | - | 35.48 | low |
| Cumene | - | 99 to 5780 | high |
| Heavy Aromatic Naphtha | - | 552 | high |
| Heptane | - | 194.98 | low |
| 1,2,3-Trimethylbenzene | - | 90 | low |
| Toluene | - | | |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|--|---|--|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. | - ERG No. | - | Emergency schedules F-D, S-U |

Section 14. Transport information

| | | | |
|-----|-----|-----|--|
| 126 | 126 | 126 | |
|-----|-----|-----|--|

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Proper shipping name : Not available.
Ship type : Not available.
Pollution category : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

International lists

- Australia inventory (AICS)**: Not determined.
- China inventory (IECSC)**: Not determined.
- Japan inventory (ENCS)**: Not determined.
- Japan inventory (ISHL)**: Not determined.
- Korea inventory (KECI)**: Not determined.
- New Zealand Inventory of Chemicals (NZIoC)**: Not determined.
- Philippines inventory (PICCS)**: Not determined.
- Taiwan Chemical Substances Inventory (TCSI)**: Not determined.
- Thailand inventory**: Not determined.
- Turkey inventory**: Not determined.
- Vietnam inventory**: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

Section 16. Other information

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A | Calculation method |
| CARCINOGENICITY - Category 2 | Calculation method |
| TOXIC TO REPRODUCTION (Fertility) - Category 2 | Calculation method |
| TOXIC TO REPRODUCTION (Unborn child) - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 1 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Date of printing : 11/27/2019

Date of issue/Date of revision : 11/27/2019

Date of previous issue : 10/28/2019

Version : 23

Key to abbreviations : ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 N/A = Not available
 SGG = Segregation Group
 UN = United Nations

▀ Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product name : MINNCARE® Cold Sterilant
MINNCARE® Liquid Disinfectant

Product code : 176-01-001,176-01-002,176-01-003,78399-646,78399-647,78399-648,78398-229,78397-983,78397-825,78325-150,78325-300,78325-400,78401-505

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Sanitizing of RO water systems

1.3. Details of the supplier of the safety data sheet

Medivators Inc.
14605 28th Avenue North
Minneapolis, MN 55447 - USA
T 1-800-328-3340

1.4. Emergency telephone number

Emergency number : 1-800-424-9300

SECTION 2: Hazards identification – This label is regulated by the EPA under FIFRA. Refer to Section 15.

2.1. Classification of the substance or mixture


GHS-US classification

Oxidizing liquid 2
Organic peroxide G
Corrosive to metals 1
Acute toxicity 4 (Inhalation)
Skin corrosion 1A
Serious eye damage 1
Specific target organ toxicity - Single exposure 3

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US) :

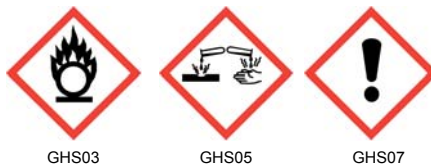

Signal word (GHS-US) :

Danger

Hazard statements (GHS-US) :

May intensify fire; oxidiser. and eye damage. Harmful if inhaled. May cause respiratory irritation. May cause drowsiness or dizziness

Precautionary statements (GHS-US) :

Keep away from heat. Keep/Store away from clothing and other combustible materials. Take any precaution to avoid mixing with combustibles (metals, oxidizing materials, alkalis, caustics, chlorine, formaldehyde, salts, flammable organics). Keep only in original container. Use only outdoors or in a well-ventilated area. Do not breathe dusts or mists. Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. Absorb spillage to prevent material damage. If on skin (or hair): Rinse skin with water/shower. If on clothing: Rinse immediately contaminated clothing and skin with plenty of water before removing clothes. Wash contaminated clothing before reuse. Immediately call a poison center/doctor. If swallowed: Rinse mouth. Do NOT induce vomiting. Immediately call a poison center/doctor. If inhaled: Remove person to fresh air and keep comfortable for breathing. Immediately call a poison center/doctor. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison center/doctor. Store in corrosive resistant container with a resistant inner liner. Store in a well-ventilated place. Keep container tightly closed. Store locked up. Dispose of contents/container in accordance with local/regional/national/international regulations.

2.3. Other hazards

No additional information available.

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

3.2. Mixture

| Name | Product identifier | % | GHS-US classification |
|-------------------|--------------------|-----------|--|
| Hydrogen peroxide | (CAS No) 7722-84-1 | 10 - 30 | Ox. Liq. 2 Acute Tox. 4 (Oral) Acute Tox. 4 (Inhalation) Skin Corr. 1A |
| Acetic acid | (CAS No) 64-19-7 | 9 | Flam. Liq. 3 Acute Tox. 4 (Dermal) Skin Corr. 1A |
| Peroxyacetic acid | (CAS No) 79-21-0 | 3 - 7 | Flam. Liq. 3 Org. Perox. D Acute Tox. 2 (Inhalation) Acute Tox. 4 (Oral) Acute Tox. 4 (Dermal) Skin Corr. 1A STOT SE 3 |
| Stabilizer | Proprietary | 0.5 – 1.5 | Eye Dam. 1 Met. Corr. 1 |

* The specific chemical identity and exact percentage (concentration) of composition has been withheld as a trade secret in accordance with paragraph (i) of §1910.1200.

SECTION 4: First aid measures

4.1. Description of first aid measures

- First-aid measures after inhalation : If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical advice/attention.
- First-aid measures after skin contact : In case of contact, immediately flush skin with plenty of water. Remove contaminated clothing and shoes. Wash clothing before reuse. Get immediate medical advice/attention.
- First-aid measures after eye contact : In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. If easy to do, remove contact lenses, if worn. Get immediate medical advice/attention.
- First-aid measures after ingestion : Do NOT induce vomiting. Rinse mouth. Never give anything by mouth to an unconscious person. Get immediate medical advice/attention.

4.2. Most important symptoms and effects, both acute and delayed

- Symptoms/injuries after inhalation : Harmful if inhaled. May cause respiratory irritation.
- Symptoms/injuries after skin contact : Causes severe skin burns. Symptoms may include redness, pain, blisters.
- Symptoms/injuries after eye contact : Causes serious eye damage. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva. May cause burns.
- Symptoms/injuries after ingestion : May be harmful if swallowed. May cause stomach distress, nausea or vomiting. May cause burns to the linings of the mouth, throat, and gastrointestinal tract.

4.3. Indication of any immediate medical attention and special treatment needed

Symptoms may not appear immediately. In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

SECTION 5: Firefighting measures

5.1. Extinguishing media

- Suitable extinguishing media : Water spray, dry chemical, foam, carbon dioxide.
- Unsuitable extinguishing media : Do not use water jet.

5.2. Special hazards arising from the substance or mixture

- Fire hazard : Products of combustion may include, and are not limited to: oxides of carbon, oxygen. Danger of developing toxic pyrolyse products.
- Explosion hazard : Heat may build pressure, rupturing closed containers, spreading fire and increasing risk of burns and injuries. This material increases the risk of fire and may aid combustion.

5.3. Advice for firefighters

- Protection during firefighting : Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Use water spray to cool exposed surfaces.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

- General measures : Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove ignition sources.

6.2. Methods and material for containment and cleaning up

- For containment : In case of accidental spillage, contain the spill and neutralize it with sodium bicarbonate or sodium carbonate. Use appropriate personal protection equipment (PPE).

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Methods for cleaning up : Scoop up material and place in a disposal container. Absorb spillage to prevent material damage. Provide ventilation. Do not reuse the liquid material.

6.3. Reference to other sections

See section 8 for further information on protective clothing and equipment and section 13 for advice on waste disposal.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Additional hazards when processed : May be corrosive to metals.
 Precautions for safe handling : Keep away from sources of ignition. Do not get in eyes, on skin, or on clothing. Do not breathe dust/fume/gas/mist/vapors/spray. Do not swallow. Handle and open container with care. Use only outdoors or in a well-ventilated area. When using do not eat, drink or smoke. Never return unused material to original container.
 Hygiene measures : Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Proper grounding procedures to avoid static electricity should be followed.
 Storage conditions : Keep out of the reach of children. Keep container tightly closed. Keep only in the original container in a cool, well-ventilated place. Store away from other materials. Floor needs a protective coating against acid. Store at temperatures not exceeding 23.9 °C (75 °F). Protect from sunlight. Store locked up.

7.3. Specific end use(s)

Not available.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Hydrogen peroxide (7722-84-1) | | |
|-------------------------------|-------------------------------------|--|
| ACGIH | ACGIH TWA (ppm) | 1 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 1.4 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 1 ppm |
| Acetic acid (64-19-7) | | |
| ACGIH | ACGIH TWA (ppm) | 10 ppm |
| ACGIH | ACGIH STEL (ppm) | 15 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 25 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 10 ppm |
| Peroxyacetic acid (79-21-0) | | |
| ACGIH | ACGIH STEL (ppm) | 0.4 ppm (inhalable fraction and vapor) |
| OSHA | Not applicable | |
| Stabilizer (Proprietary) | | |
| ACGIH | Not applicable | |
| OSHA | Not applicable | |

8.2. Exposure controls

Appropriate engineering controls : Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits. Ensure that eyewash stations and safety showers are close to the workstation location.
 Hand protection : Wear chemically resistant protective gloves.
 Eye protection : Wear approved eye protection (properly fitted dust- or splash-proof chemical safety goggles) and face protection (face shield).
 Skin and body protection : Wear suitable protective clothing. Wear solvent resistant apron and boots for spills.
 Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
 Environmental exposure controls : Maintain levels below Community environmental protection thresholds.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Other information : Do not eat, smoke or drink where material is handled, processed or stored. Wash hands carefully before eating or smoking. Handle according to established industrial hygiene and safety practices.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Liquid
Appearance : Clear
Color : Colorless
Odor : Acid
Odor threshold : No data available
pH : 0.8 +/- 3
Relative evaporation rate (butylacetate=1) : No data available
Melting point : No data available
Freezing point : No data available
Boiling point : No data available
Flash point : No data available
Auto-ignition temperature : No data available
Decomposition temperature : No data available
Flammability (solid, gas) : Not flammable
Vapor pressure : No data available
Relative vapor density at 20 °C : No data available
Relative density : 1.09 - 1.14
Solubility : No data available
Partition coefficient: n-octanol/water : No data available
Log Pow : No data available
Log Kow : No data available
Viscosity, kinematic : No data available
Viscosity, dynamic : No data available
Explosive properties : No data available
Oxidising properties : May intensify fire; oxidiser
Explosive limits : No data available
SADT : >60° C

9.2. Other information

No additional information available.

SECTION 10: Stability and reactivity

10.1. Reactivity

May cause or contribute to the combustion of other material generally by yielding oxygen. May be corrosive to metals.

10.2. Chemical stability

Stable under normal storage conditions. Decomposes slowly to release oxygen.

10.3. Possibility of hazardous reactions

No dangerous reaction known under conditions of normal use.

10.4. Conditions to avoid

Heat. Sources of ignition. Incompatible materials.

10.5. Incompatible materials

Metals. Oxidizing materials. Alkalis. Caustics. Chlorine. Formaldehyde. Salts. Flammable organics.

10.6. Hazardous decomposition products

May include, and are not limited to: oxides of carbon, oxygen. Do not mix with chlorinated products as this could liberate toxic corrosive chlorine gas.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Harmful if inhaled.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

| MINNCARE Cold Sterilant | |
|-------------------------------|---|
| LD50 oral rat | > 2000 mg/kg |
| LD50 dermal rabbit | > 2000 mg/kg |
| LC50 inhalation rat | >2.0 but ≤10.0 mg/l (Calculated using ATE values) |
| Hydrogen peroxide (7722-84-1) | |
| LD50 oral rat | 801 mg/kg |
| LD50 dermal rat | 4060 mg/kg |
| LD50 dermal rabbit | 2000 mg/kg |
| LC50 inhalation rat | 2 g/m ³ /4 h |
| Acetic acid (64-19-7) | |
| LD50 oral rat | 3310 mg/kg |
| LD50 dermal rabbit | 1060 mg/kg |
| Peroxyacetic acid (79-21-0) | |
| LD50 oral rat | 1540 mg/kg |
| LD50 dermal rabbit | 1410 µl/kg |
| LC50 inhalation mouse | 0.524 mg/l/4h |
| Stabilizer (Proprietary) | |
| LD50 oral rat | 2400 mg/kg |
| LD50 dermal rabbit | > 7940 mg/kg |

| | |
|-----------------------------------|---|
| Skin corrosion/irritation | : Causes severe skin burns. |
| Serious eye damage/irritation | : Causes serious eye damage. |
| Respiratory or skin sensitization | : Based on available data, the classification criteria are not met. |
| Germ cell mutagenicity | : Based on available data, the classification criteria are not met. |
| Carcinogenicity | : Based on available data, the classification criteria are not met. |

| Hydrogen peroxide (7722-84-1) | |
|-------------------------------|----------------------|
| IARC group | 3 - Not classifiable |

| | |
|--|--|
| Reproductive toxicity | : Based on available data, the classification criteria are not met. |
| Specific target organ toxicity (single exposure) | : May cause respiratory irritation. |
| Specific target organ toxicity (repeated exposure) | : Based on available data, the classification criteria are not met. |
| Aspiration hazard | : Based on available data, the classification criteria are not met. |
| Symptoms/injuries after inhalation | : Harmful if inhaled. May cause respiratory irritation. May cause drowsiness and dizziness. |
| Symptoms/injuries after skin contact | : Causes severe skin burns. Symptoms may include redness, pain, blisters. |
| Symptoms/injuries after eye contact | : Causes serious eye damage. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva. May cause burns. |
| Symptoms/injuries after ingestion | : May be harmful if swallowed. May cause stomach distress, nausea or vomiting. May cause burns to the linings of the mouth, throat, and gastrointestinal tract. |

SECTION 12: Ecological information

12.1. Toxicity

| | |
|-------------------|---|
| Ecology - general | : Not considered to be harmful to aquatic life. |
|-------------------|---|

12.2. Persistence and degradability

No additional information available.

12.3. Bioaccumulative potential

| MINNCARE Cold Sterilant | |
|---------------------------|------------------|
| Bioaccumulative potential | Not established. |

12.4. Mobility in soil

No additional information available.

12.5. Other adverse effects

| | |
|------------------------------|--|
| Effect on the global warming | : No known ecological damage caused by this product. |
|------------------------------|--|

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste disposal recommendations : This material must be disposed of in accordance with all local, state, provincial, and federal regulations. The generation of waste should be avoided or minimized wherever possible.

SECTION 14: Transport information

In accordance with DOT.

UN-No.(DOT) : UN3149
 Proper Shipping Name (DOT) : Hydrogen peroxide and peroxyacetic acid mixtures, stabilized
 Department of Transportation (DOT) Hazard Classes : 5.1 (8)
 Hazard labels (DOT) :



Packing group (DOT) : II

Additional information

Other information : No supplementary information available.
 Special transport precautions : Do not handle until all safety precautions have been read and understood.

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory.

| | |
|------------------------------------|--|
| EPA FIFRA Pesticide Product Notice | This chemical is a pesticide registered by the United States Environmental Protection Agency and is subject to certain labeling requirements under federal pesticide law. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS), and for workplace labels of non-pesticide chemicals. The hazard information required on the pesticide label is reproduced below. The pesticide label also includes other important information, including directions for use. |
| EPA FIFRA Signal Word | Danger |
| EPA FIFRA Hazard Statement | Keep Out of Reach of Children |
| EPA FIFRA Precautionary Statements | Hazard to Humans and Domestic Animals |

Hydrogen peroxide (7722-84-1)

Listed on the United States SARA Section 302

| | |
|--|---------------------------|
| SARA Section 302 Threshold Planning Quantity (TPQ) | 1000 (concentration >52%) |
|--|---------------------------|

Peroxyacetic acid (79-21-0)

Listed on the United States SARA Section 302

Listed on United States SARA Section 313

| | |
|--|-------|
| SARA Section 302 Threshold Planning Quantity (TPQ) | 500 |
| SARA Section 313 - Emission Reporting | 1.0 % |

15.2. US State regulations

MINNCARE Cold Sterilant

| | |
|----------------------------|--|
| State or local regulations | This product does not contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm. |
|----------------------------|--|

SECTION 16: Other information

Date of issue : 02/19/2015
 Other information : None.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

MINNCARE® is a registered trademark of Medivators Inc.

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.



SAFETY DATA SHEET

1. Identification

| | |
|---|---|
| Product identifier | Honing & Cutting Oil |
| Other means of identification | |
| Product code | SL2523 |
| Recommended use | Honing and cutting oil |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Manufactured or sold by: | |
| Company name | CRC Industries, Inc. |
| Address | 885 Louis Dr. Warminster, PA 18974 US |
| Telephone | |
| General Information | 215-674-4300 |
| Technical Assistance | 800-521-3168 |
| Customer Service | 800-272-4620 |
| 24-Hour Emergency (CHEMTREC) | 800-424-9300 (US) 703-527-3887 (International) |
| Website | www.crcindustries.com |

2. Hazard(s) identification

| | | |
|------------------------------|---------------------|------------|
| Physical hazards | Not classified. | |
| Health hazards | Sensitization, skin | Category 1 |
| Environmental hazards | Not classified. | |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--|---|
| Signal word | Warning |
| Hazard statement | May cause an allergic skin reaction. |
| Precautionary statement | |
| Prevention | Avoid breathing vapors. Contaminated work clothing must not be allowed out of the workplace. Wear protective gloves. |
| Response | If on skin: Wash with plenty of water. If skin irritation or rash occurs: Get medical attention. Wash contaminated clothing before reuse. |
| Storage | Store away from incompatible materials. |
| Disposal | Dispose of contents/container in accordance with local/regional/national regulations. |
| Hazard(s) not otherwise classified (HNOC) | None known. |

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|---------------------------------|-------------------|----------|
| Distillates (petroleum), hydrotreated heavy paraffinic | | 64742-54-7 | 80 - 90 |

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|-------|
| Sulfonic acids, petroleum, calcium salts | | 61789-86-4 | 1 - 5 |

Specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. If breathing is difficult, trained personnel should give oxygen. Do not use mouth-to-mouth method if victim inhaled the substance. Call a physician if symptoms develop or persist. |
| Skin contact | Remove contaminated clothing immediately and wash skin with soap and water. In case of eczema or other skin disorders: Seek medical attention and take along these instructions. Wash contaminated clothing before reuse. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Continue rinsing. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. Drink 1 or 2 glasses of water. Never give anything by mouth to a victim who is unconscious or is having convulsions. Do not induce vomiting without advice from poison control center. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. If ingestion of a large amount does occur, call a poison control center immediately. |
| Most important symptoms/effects, acute and delayed | Irritation of eyes and mucous membranes. May cause an allergic skin reaction. Rash. Skin irritation. Dermatitis. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Use fire-extinguishing media appropriate for surrounding materials. |
| Unsuitable extinguishing media | None known. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | The product is immiscible with water and will spread on the water surface. Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Prevent entry into waterways, sewer, basements or confined areas. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Avoid contact with eyes, skin, and clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Avoid release to the environment. Observe good industrial hygiene practices. Use care in handling/storage. For product usage instructions, please see the product label. |
| Conditions for safe storage, including any incompatibilities | Keep container tightly closed. Store away from incompatible materials (see Section 10 of the SDS). Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. |

8. Exposure controls/personal protection

Occupational exposure limits

U.S. - OSHA

| Components | Type | Value |
|---|------|---------------------|
| Distillates (petroleum), hydrotreated heavy paraffinic (CAS 64742-54-7) | TWA | 5 mg/m ³ |

ACGIH

| Components | Type | Value | Form |
|---|------|---------------------|--------------------|
| Distillates (petroleum), hydrotreated heavy paraffinic (CAS 64742-54-7) | TWA | 5 mg/m ³ | Inhalable fraction |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|---|------|---------------------|---------------------|
| Distillates (petroleum), hydrotreated heavy paraffinic (CAS 64742-54-7) | TWA | 5 mg/m ³ | Inhalable fraction. |

U.S. - NIOSH

| Components | Type | Value | Form |
|---|------|----------------------|------|
| Distillates (petroleum), hydrotreated heavy paraffinic (CAS 64742-54-7) | STEL | 10 mg/m ³ | Mist |
| | TWA | 5 mg/m ³ | Mist |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear protective gloves such as: Nitrile. Rubber.

Other Wear appropriate chemical resistant clothing.

Respiratory protection If engineering controls are not feasible or if exposure exceeds the applicable exposure limits, use a NIOSH-approved cartridge respirator with an organic vapor cartridge. Use a self-contained breathing apparatus in confined spaces and for emergencies. Air monitoring is needed to determine actual employee exposure levels.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Contaminated work clothing should not be allowed out of the workplace.

9. Physical and chemical properties

Appearance

| | |
|-----------------------|---------|
| Physical state | Liquid. |
| Form | Grease. |
| Color | Red. |

Odor Sulphurous. Mild petroleum.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

Initial boiling point and boiling range 599 °F (315 °C)

Flash point 378 °F (192.2 °C) Pensky-Martens Closed Cup

| | |
|---|-------------------------|
| Evaporation rate | Slow. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Relative density | 0.89 |
| Solubility (water) | Insoluble. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity (kinematic) | 26.7 mm ² /s |
| Viscosity temperature | 104 °F (40 °C) |
| Percent volatile | 85 % estimated |

10. Stability and reactivity

| | |
|------------------------------------|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | Carbon oxides. Metal oxides. |

11. Toxicological information

Information on likely routes of exposure

| | |
|--------------|---|
| Inhalation | Health injuries are not known or expected under normal use. |
| Skin contact | May cause an allergic skin reaction. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Rash. Irritation of eyes and mucous membranes. Skin irritation. May cause an allergic skin reaction. Dermatitis.

Information on toxicological effects

Acute toxicity May cause an allergic skin reaction.

| Product | Species | Test Results |
|----------------------|---------|-----------------------|
| Honing & Cutting Oil | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | 5882 mg/kg estimated |
| Oral | | |
| LD50 | Rat | 17647 mg/kg estimated |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--|
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. |
| Serious eye damage/eye irritation | Direct contact with eyes may cause temporary irritation. |
| Respiratory sensitization | Not a respiratory sensitizer. |

| | |
|--|--|
| Skin sensitization | May cause an allergic skin reaction. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| Not available. | |
| US. National Toxicology Program (NTP) Report on Carcinogens | |
| Not available. | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not classified. |
| Chronic effects | Prolonged exposure may cause chronic effects. |

12. Ecological information

| | |
|--------------------------------------|---|
| Ecotoxicity | There is insufficient information to determine the scope of the environmental effects this material may cause. |
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | No data available. |
| Mobility in soil | No data available. |
| Other adverse effects | No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component. |

13. Disposal considerations

| | |
|--|---|
| Disposal of waste from residues / unused products | This product is not a RCRA hazardous waste (See 40 CFR Part 261.20 – 261.33). Empty containers may be recycled. Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose in accordance with all applicable regulations. |
| Hazardous waste code | Not regulated. |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

| | |
|-------------|-----------------------------------|
| DOT | Not regulated as dangerous goods. |
| IATA | Not regulated as dangerous goods. |
| IMDG | Not regulated as dangerous goods. |

15. Regulatory information

| | |
|---|---|
| US federal regulations | This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200. All components are on the U.S. EPA TSCA Inventory List. |
| TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D) | |
| Not regulated. | |
| US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| Not listed. | |
| SARA 304 Emergency release notification | |
| Not regulated. | |
| US EPCRA (SARA Title III) Section 313 - Toxic Chemical: Listed substance | |
| Not listed. | |

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

CERCLA Hazardous Substances: Reportable quantity

Not listed.

Spills or releases resulting in the loss of any ingredient at or above its RQ require immediate notification to the National Response Center (800-424-8802) and to your Local Emergency Planning Committee.

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.**Food and Drug Administration (FDA)** Not regulated.**Superfund Amendments and Reauthorization Act of 1986 (SARA)**

| | |
|--------------------------|------------------------|
| Section 311/312 | Immediate Hazard - Yes |
| Hazard categories | Delayed Hazard - No |
| | Fire Hazard - No |
| | Pressure Hazard - No |
| | Reactivity Hazard - No |

| | |
|---|----|
| SARA 302 Extremely hazardous substance | No |
|---|----|

US state regulations**US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))**

Distillates (petroleum), hydrotreated heavy paraffinic (CAS 64742-54-7)

US. Massachusetts RTK - Substance List

None.

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. Rhode Island RTK

None.

US. New Jersey Worker and Community Right-to-Know Act

Not listed.

US. Pennsylvania Worker and Community Right-to-Know Law

Not listed.

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

Volatile organic compounds (VOC) regulations**EPA**

| | |
|---------------------------------------|----------------|
| VOC content (40 CFR 51.100(s)) | Not determined |
|---------------------------------------|----------------|

| | |
|--|---------------|
| Consumer products (40 CFR 59, Subpt. C) | Not regulated |
|--|---------------|

State

| | |
|--------------------------|---|
| Consumer products | This product is regulated as a Cutting or Tapping Oil (non-aerosol). This product is compliant for use in all 50 states. Local restriction: This product cannot be used in the South Coast Air Quality Management District of California. |
|--------------------------|---|

| | |
|-------------------------|-------|
| VOC content (CA) | 2.9 % |
|-------------------------|-------|

| | |
|--------------------------|-------|
| VOC content (OTC) | 2.9 % |
|--------------------------|-------|

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------------|--|
| Issue date | 10-28-2015 |
| Revision date | 01-27-2016 |
| Prepared by | Allison Cho |
| Version # | 02 |
| Further information | Not available. |
| HMIS® ratings | Health: 1 Flammability: 1 Physical hazard: 0 Personal protection: B |
| NFPA ratings | Health: 1 Flammability: 1 Instability: 0 |

NFPA ratings



Disclaimer

The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. This information is accurate to the best of CRC Industries' knowledge or obtained from sources believed by CRC to be accurate. Before using any product, read all warnings and directions on the label. For further clarification of any information contained on this (M)SDS consult your supervisor, a health & safety professional, or CRC Industries.

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® C-65™ Low VOC Cleaner for Plastic Pipe
PRODUCT USE: Low VOC Cleaner for Plastic Pipe (PVC, CPVC, ABS and Styrene)
SUPPLIER: **MANUFACTURER:** IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300
EMERGENCY: Transportation: CHEMTEL Tel. 800-255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800-255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| | | |
|---|---|--|
| Health Acute Toxicity: Category 4 Skin Irritation: Category 3 Skin Sensitization: NO Eye: Category 2B | Environmental Acute Toxicity: None Known Chronic Toxicity: None Known | Physical Flammable Liquid Category 2 |
|---|---|--|

GHS LABEL: **Signal Word:** Danger **WHMIS CLASSIFICATION:** CLASS B, DIVISION 2

| | |
|---|---|
| <p style="text-align: center;"><u>Hazard Statements</u></p> H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H336: May cause drowsiness or dizziness EUH 066: Repeated exposure may cause skin dryness or cracking. | <p style="text-align: center;"><u>Precautionary Statements</u></p> P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P337+P313: Get medical advice/attention P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |
|---|---|

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------|----------|-----------|------------------------------|------------------------------|
| Acetone | 67-64-1 | 200-662-2 | 01-2119471330-49-0000 | 75 - 100 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 2 - 15 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.
Likely Routes of Exposure: Inhalation, Eye and Skin Contact
Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.
Chronic (long-term) effects: Defatting dermatitis with prolonged use. In humans, passes the placental barrier, detected in maternal milk. (Based on Acetone)

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. HMIS 2 NFA 0-Minimal
Unsuitable Extinguishing Media: Water spray or stream. Health 2 1-Slight
Exposure Hazards: Inhalation and dermal contact Flammability 3 3 2-Moderate
Combustion Products: Oxides of carbon and smoke Reactivity 0 0 3-Serious
PPE B 4-Severe
Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| | Component | ACGIH 8-hr TLV | ACGIH 15-min STEL | OSHA 8-hr PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8-hr PEL | CAL/OSHA Ceiling | CAL/OSHA 15-min STEL |
|-------------------------|---------------|-------------------|----------------------|------------------|---------------------|---------------------|----------------------|---------------------|-------------------------|
| EXPOSURE LIMITS: | Acetone | 250 ppm | 500 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® C-65™ Low VOC Cleaner for Plastic Pipe

Date Revised: NOV 2018
Supersedes: JAN 2017

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|---|-------------------------------|---|
| Appearance: | Clear, thin liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 56°C (133°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -95°C (-139°F) Based on first melting component: Acetone | Flammability: | Category 2 |
| Boiling Point: | 56°C (133°F) Based on first boiling component: Acetone | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 12.8% based on Acetone |
| Flash Point: | -20°C (-4°F) T.C.C. based on Acetone | Vapor Pressure: | 190 mm Hg @ 20°C (68°F): Acetone |
| Specific Gravity: | 0.794 @23°C (73°F) | Vapor Density: | >2.0 (Air = 1) |
| Solubility: | Solvent portion soluble in water. | Other Data: Viscosity: | Water-thin |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 465°C (869°F): Acetone | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1171, VOC content is: = 25 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|---|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|------------------|--|-----------------------------------|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Acetone | Oral: 5800 mg/kg (rat) | Inhalation 50,100 mg/m3 (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | Not Established |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|--|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of = 25 g/l. |
| Degradability: | Readily Biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|---|
| Proper Shipping Name: | Flammable Liquid, n.o.s. (Acetone, Cyclohexanone) |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1993 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

| EXCEPTION for Ground Shipping | |
|-------------------------------|---|
| DOT Limited Quantity: | Up to 1L per inner packaging, 30 kg gross weight per package. |
| Consumer Commodity: | Depending on packaging, these quantities may qualify under DOT as "ORM-D" . |

| TDG INFORMATION | |
|---------------------------------|---|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | Flammable Liquid, n.o.s. (Acetone, Cyclohexanone) |
| UN NUMBER/PACKING GROUP: | UN 1993, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|-----------------------------|---|
| Precautionary Label Information: | Highly Flammable, Irritant | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | Risk Phrases: | R11: Highly flammable. R36/37: Irritating to eyes and respiratory system. |
| Safety Phrases: | S2: Keep out of the reach of children S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. | Risk Phrases: | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness S25: Avoid contact with eyes. S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 11/29/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Cleaner for Plastic Pipe (PVC, CPVC, ABS and Styrene) | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

MATERIAL SAFETY DATA SHEET

DV6/DV12/DV16
03 00

DATE OF PREPARATION
Apr 3, 2010

SECTION 1 — PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NUMBER

DV6/DV12/DV16

PRODUCT NAME

OMNI-PAK® MasterBlend™ EZ TOUCH® (DV Cans)

MANUFACTURER'S NAME

THE SHERWIN-WILLIAMS COMPANY
KRYLON PRODUCTS GROUP
Cleveland, OH 44115

Telephone Numbers and Websites

| | |
|----------------------------------|--|
| Product Information | (800) 251-2486 www.kpg-industrial.com |
| Regulatory Information | (216) 566-2902 www.paintdocs.com |
| Medical Emergency | (216) 566-2917 |
| Transportation Emergency* | (800) 424-9300 |

*for Chemical Emergency ONLY (spill, leak, fire, exposure, or accident)

SECTION 2 — COMPOSITION/INFORMATION ON INGREDIENTS

| % by Weight | CAS Number | Ingredient | Units | Vapor Pressure |
|-------------|------------|---------------------------------|---------------|----------------|
| 25 | 74-98-6 | Propane | | |
| | | ACGIH TLV | 2500 PPM | 760 mm |
| | | OSHA PEL | 1000 PPM | |
| 65 | 67-64-1 | Acetone | | |
| | | ACGIH TLV | 500 PPM | 180 mm |
| | | ACGIH TLV | 750 PPM STEL | |
| | | OSHA PEL | 1000 PPM | |
| 9 | 78-93-3 | Methyl Ethyl Ketone | | |
| | | ACGIH TLV | 200 PPM | 70 mm |
| | | ACGIH TLV | 300 PPM STEL | |
| | | OSHA PEL | 200 PPM | |
| | | OSHA PEL | 300 PPM STEL | |
| 1 | 763-69-9 | Ethyl 3-Ethoxypropionate | | |
| | | ACGIH TLV | Not Available | 1.11 mm |
| | | OSHA PEL | Not Available | |

SECTION 3 — HAZARDS IDENTIFICATION

ROUTES OF EXPOSURE

INHALATION of vapor or spray mist.
EYE or SKIN contact with the product, vapor or spray mist.

EFFECTS OF OVEREXPOSURE

EYES: Irritation.
SKIN: Prolonged or repeated exposure may cause irritation.
INHALATION: Irritation of the upper respiratory system.

May cause nervous system depression. Extreme overexposure may result in unconsciousness and possibly death.
Prolonged overexposure to hazardous ingredients in Section 2 may cause adverse chronic effects to the following organs or systems:

- the reproductive system

SIGNS AND SYMPTOMS OF OVEREXPOSURE

Headache, dizziness, nausea, and loss of coordination are indications of excessive exposure to vapors or spray mists.
Redness and itching or burning sensation may indicate eye or excessive skin exposure.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

None generally recognized.

CANCER INFORMATION

For complete discussion of toxicology data refer to Section 11.

HMIS Codes

| | |
|---------------------|---|
| Health | 2 |
| Flammability | 4 |
| Reactivity | 0 |

SECTION 4 — FIRST AID MEASURES

- EYES:** Flush eyes with large amounts of water for 15 minutes. Get medical attention.
- SKIN:** Wash affected area thoroughly with soap and water.
Remove contaminated clothing and launder before re-use.
- INHALATION:** If affected, remove from exposure. Restore breathing. Keep warm and quiet.
- INGESTION:** Do not induce vomiting. Get medical attention immediately.

SECTION 5 — FIRE FIGHTING MEASURES

| | | | |
|--------------------|------------|------------|------------------------------------|
| FLASH POINT | LEL | UEL | EXTINGUISHING MEDIA |
| Propellant < 0 °F | 1.0 | 12.8 | Carbon Dioxide, Dry Chemical, Foam |

UNUSUAL FIRE AND EXPLOSION HAZARDS

- Containers may explode when exposed to extreme heat.
Application to hot surfaces requires special precautions.
During emergency conditions overexposure to decomposition products may cause a health hazard. Symptoms may not be immediately apparent. Obtain medical attention.

SPECIAL FIRE FIGHTING PROCEDURES

- Full protective equipment including self-contained breathing apparatus should be used.
Water spray may be ineffective. If water is used, fog nozzles are preferable. Water may be used to cool closed containers to prevent pressure build-up and possible autoignition or explosion when exposed to extreme heat.

SECTION 6 — ACCIDENTAL RELEASE MEASURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED

- Remove all sources of ignition. Ventilate the area.
- Remove with inert absorbent.

SECTION 7 — HANDLING AND STORAGE

STORAGE CATEGORY

Not Available

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE

- Keep away from heat, sparks, and open flame. Vapors will accumulate readily and may ignite explosively.
During use and until all vapors are gone: Keep area ventilated - Do not smoke - Extinguish all flames, pilot lights, and heaters - Turn off stoves, electric tools and appliances, and any other sources of ignition.
Consult NFPA Code. Use approved Bonding and Grounding procedures.
Contents under pressure. Do not puncture, incinerate, or expose to temperature above 120F. Heat from sunlight, radiators, stoves, hot water, and other heat sources could cause container to burst. Do not take internally. Keep out of the reach of children.

SECTION 8 — EXPOSURE CONTROLS/PERSONAL PROTECTION

PRECAUTIONS TO BE TAKEN IN USE

- Use only with adequate ventilation.
Avoid contact with skin and eyes. Avoid breathing vapor and spray mist.
Wash hands after using.

VENTILATION

- Local exhaust preferable. General exhaust acceptable if the exposure to materials in Section 2 is maintained below applicable exposure limits.
Refer to OSHA Standards 1910.94, 1910.107, 1910.108.

RESPIRATORY PROTECTION

- If personal exposure cannot be controlled below applicable limits by ventilation, wear a properly fitted organic vapor/particulate respirator approved by NIOSH/MSHA for protection against materials in Section 2.

PROTECTIVE GLOVES

- None required for normal application of aerosol products where minimal skin contact is expected. For long or repeated contact, wear chemical resistant gloves.

EYE PROTECTION

- Wear safety spectacles with unperforated sideshields.

OTHER PRECAUTIONS

- Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

SECTION 9 — PHYSICAL AND CHEMICAL PROPERTIES

| | | |
|----------------------------|-------------------|---------------|
| PRODUCT WEIGHT | 5.80 lb/gal | 694 g/l |
| SPECIFIC GRAVITY | 0.70 | |
| BOILING POINT | <0 - 342 °F | <-18 - 172 °C |
| MELTING POINT | Not Available | |
| VOLATILE VOLUME | 100% | |
| EVAPORATION RATE | Faster than ether | |
| VAPOR DENSITY | Heavier than air | |
| SOLUBILITY IN WATER | N.A. | |
| pH | 7.0 | |

VOLATILE ORGANIC COMPOUNDS (VOC Theoretical - As Packaged)

Volatile Weight 35.47% Less Water and Federally Exempt Solvents

SECTION 10 — STABILITY AND REACTIVITY**STABILITY — Stable****CONDITIONS TO AVOID**

None known.

INCOMPATIBILITY

None known.

HAZARDOUS DECOMPOSITION PRODUCTS

By fire: Carbon Dioxide, Carbon Monoxide

HAZARDOUS POLYMERIZATION

Will not occur

SECTION 11 — TOXICOLOGICAL INFORMATION**CHRONIC HEALTH HAZARDS**

No ingredient in this product is an IARC, NTP or OSHA listed carcinogen.

Methyl Ethyl Ketone may increase the nervous system effects of other solvents.

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage.

TOXICOLOGY DATA

| CAS No. | Ingredient Name | | | |
|----------|--------------------------|----------|-----|---------------|
| 74-98-6 | Propane | LC50 RAT | 4HR | Not Available |
| | | LD50 RAT | | Not Available |
| 67-64-1 | Acetone | LC50 RAT | 4HR | Not Available |
| | | LD50 RAT | | 5800 mg/kg |
| 78-93-3 | Methyl Ethyl Ketone | LC50 RAT | 4HR | Not Available |
| | | LD50 RAT | | 2740 mg/kg |
| 763-69-9 | Ethyl 3-Ethoxypropionate | LC50 RAT | 4HR | Not Available |
| | | LD50 RAT | | 5000 mg/kg |

SECTION 12 — ECOLOGICAL INFORMATION**ECOTOXICOLOGICAL INFORMATION**

No data available.

SECTION 13 — DISPOSAL CONSIDERATIONS**WASTE DISPOSAL METHOD**

Waste from this product may be hazardous as defined under the Resource Conservation and Recovery Act (RCRA) 40 CFR 261.

Waste must be tested for ignitability to determine the applicable EPA hazardous waste numbers.

Do not incinerate. Depressurize container. Dispose of in accordance with Federal, State/Provincial, and Local regulations regarding pollution.

SECTION 14 — TRANSPORT INFORMATION**US Ground (DOT)**

May be classed as Consumer Commodity, ORM-D

UN1950, AEROSOLS, 2.1, LIMITED QUANTITY, (ERG#126)

Canada (TDG)

May be classed as Consumer Commodity, ORM-D

UN1950, AEROSOLS, CLASS 2.1, LIMITED QUANTITY, (ERG#126)

IMO

May be shipped as Limited Quantity

UN1950, AEROSOLS, CLASS 2.1, LIMITED QUANTITY, EmS F-D, S-U, ADR (D)

SECTION 15 — REGULATORY INFORMATION

SARA 313 (40 CFR 372.65C) SUPPLIER NOTIFICATION

| CAS No. | CHEMICAL/COMPOUND | % by WT | % Element |
|---------|-------------------|---------|-----------|
|---------|-------------------|---------|-----------|

No ingredients in this product are subject to SARA 313 (40 CFR 372.65C) Supplier Notification.

CALIFORNIA PROPOSITION 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

TSCA CERTIFICATION

All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

SECTION 16 — OTHER INFORMATION

This product has been classified in accordance with the hazard criteria of the Canadian Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

The above information pertains to this product as currently formulated, and is based on the information available at this time. Addition of reducers or other additives to this product may substantially alter the composition and hazards of the product. Since conditions of use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information.

Weldfast ZC-275 Part B Safety Data Sheet

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifier

- Weldfast ZC-275 Part B

1.2 Relevant identified uses of the substance or mixture and uses advised against

- Epoxy adhesive curing agent
- This product is intended to be mixed only with its specific base adhesives; Weldfast ZC-275 Part A

1.3 Details of the supplier of the safety data sheet

- NOV Fiber Glass Systems
17115 San Pedro Avenue, Suite 200
San Antonio, Texas 78232 USA
Tel: 1-210-477-7500
Fax: 1-210-231-5915
E-mail: Mike.Thayer@nov.com

1.4 Emergency telephone number(s)

- 3E Company, 24-Hour Support (Access Code/Contract Number: 333386)
 - USA, Canada 1-888-298-2344
 - Asia, Pacific 1-760-476-3960
 - Europe, Middle East, Africa 1-760-476-3961
 - Americas 1-760-476-3962

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

Physical

- Corrosive

Health

- Acute toxicity, Category 2 (inhalation)
- Acute toxicity, Category 4 (oral)
- Acute toxicity, Category 4 (dermal)
- Acute toxicity, Category 1 (eyes)
- Skin corrosion, Category 1B
- Skin sensitizer, Category 1
- Specific target organ systemic toxicity – single exposure, Category 3 (respiratory tract irritation)

Environmental

- Not classified

2.2 Label elements

Signal Word(s)

- DANGER

Pictogram(s)



Hazard Statements

- Physical
 - Not classified
- Health
 - H302: Harmful if swallowed.
 - H312: Harmful in contact with skin.
 - H314: Causes severe skin burns and eye damage.
 - H317: May cause an allergic skin reaction.
 - H318: Causes serious eye damage.
 - H330: Fatal if inhaled.
 - H335: May cause respiratory irritation.
- Environmental
 - Not classified.

Precautionary Statements

- Prevention
 - P201: Obtain special instructions before use.
 - P202: Do not handle until all safety precautions have been read and understood.
 - P233: Keep container tightly closed.
 - P261: Avoid breathing dust/fume/gas/mist/vapor/spray.
 - P264: Wash skin thoroughly after handling.
 - P270: Do not eat, drink or smoke when using this product.
 - P271: Use only outdoors or in well-ventilated area.
 - P272: Contaminated work clothing should not be allowed out of the workplace.
 - P273: Avoid release to the environment.
 - P280: Wear protective gloves/protective clothing/eye protection/face protection.
- Response
 - P302+P352: IF ON SKIN: Wash with plenty of soap and water.
 - P333+P313: If skin irritation or rash occurs: Get medical advice/attention.
 - P301+P310: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

- P303+P361+P353: IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
 - P304+P340: IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 - P305+P351+P338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 - P308+P311: If exposed or concerned: Call a POISON CENTER or doctor/physician.
 - P308+P313: IF exposed or concerned: Get medical advice/attention.
 - P331: Do NOT induce vomiting.
 - P332+P313: If skin irritation occurs: Get medical advice/attention.
 - P337+P313: If eye irritation persists: Get medical advice/attention.
 - P362+P364: Take off all contaminated clothing and wash it before reuse.
 - P370+P378: In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
 - P391: Collect spillage.
- Storage
- P403+P233: Store in a well-ventilated place. Keep container tightly closed.
- Disposal
- P501: Dispose of contents/container in accordance with regulatory requirements.

2.3 Other Hazards

- PBT and vPvB assessment
 - None of the ingredients are considered to be either PBT or vPvB.

SECTION 3: Composition/information on Ingredients

3.1 Substances

- Not applicable

3.2 Mixtures

| Chemical Identity | CAS No. | EC No. | Concentration Range (weight %) |
|--|----------------|----------------|--------------------------------|
| Diethylenetriamine | 000111-40-0 | 203-865-4 | 45 – 55 |
| Ethyl-4-methyl-1h-imidazole, 2- | 000931-36-2 | 213-234-5 | 15 – 25 |
| Methyl imidazole, 4- | 000822-36-6 | 212-497-3 | 2 - 6 |
| Aminoethylpiperazine | 000140-31-8 | 205-411-0 | < 0.5 |
| Substances that do not meet the classification and labeling criteria established under the GHS | Not applicable | Not applicable | Balance |

SECTION 4. First-aid measures

4.1 Description of first-aid measures

Inhalation

- Move to fresh air.
- If difficulty in breathing or respiratory irritation; seek immediate medical attention.
- If breathing has stopped; seek immediate medical attention, perform artificial respiration.

Skin contact

- Wash affected area immediately and thoroughly with flowing water for at least 30 minutes.
- Immediately remove any contaminated clothing.
- If irritation develops or persists; seek medical attention.

Eye contact

- Wash affected area immediately and thoroughly with flowing water for at least 30 minutes.
- Remove contact lenses, if present, after the first 5 minutes of washing.
- Obtain prompt medical attention.

Ingestion

- Do not induce vomiting.
- Give one cup (8 ounces, 240 mL) of water or milk if available and transport to a medical facility.
- Never give anything by mouth to an unconscious person.

4.2 Most Important symptoms and effects, both acute and delayed

Acute

- No additional data available.

Delayed

- No additional data available.

4.3 Indication of any immediate medical attention and special treatment needed

- Maintain adequate ventilation and oxygenation of the patient. May cause asthma-like (reactive airways) symptoms. Bronchodilators, expectorants, antitussives and corticosteroids may be of help. Respiratory symptoms, including pulmonary edema, may be delayed. Persons receiving significant exposure should be observed 24-48 hours for signs of respiratory distress. Chemical eye burns may require extended irrigation. Obtain prompt consultation, preferably from an ophthalmologist. If burn is present, treat as any thermal burn, after decontamination. Due to irritant properties, swallowing may result in burns/ulceration of mouth, stomach and lower gastrointestinal tract with subsequent stricture. Aspiration of vomitus may cause lung injury. Suggest endotracheal/esophageal control if lavage is done. No specific antidote. Treatment of exposure should be directed at the control of symptoms and the clinical condition of the patient.
- Excessive exposure may aggravate preexisting asthma and other respiratory disorders (e.g. emphysema, bronchitis, reactive airways dysfunction syndrome).

SECTION 5: Firefighting measures

5.1 Extinguishing media

- Alcohol-resistant foam, carbon dioxide, dry chemical.
- Do not use direct water stream; may spread fire.

5.2 Specific hazards arising from the substance or mixture

- During a fire, smoke may contain the original material in addition to combustion products of varying composition which may be toxic and/or irritating. Combustion products may include and are not limited to: carbon dioxide, carbon monoxide, nitrogen oxides.
- Violent steam generation or eruption may occur upon application of direct water stream to hot liquids.

5.3 Advice for firefighters

- Avoid contact with skin.
 - Wear self-contained breathing apparatus and protective clothing, as necessary.
-

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

- Due to the high viscosity of this product and the relatively small end-use container size, significant spills are unlikely to occur.
- If a spilled in an enclosed area, ensure adequate ventilate.

6.2 Environmental precautions

- Do not allow spilled materials to enter storm sewers, sanitary sewers, or impact groundwater.
- Do not allow spilled materials to remain on the ground.

6.3 Methods and materials for containment and cleaning up

- Absorb with materials such as: clay, dirt, sand. Do NOT use absorbent materials such as: cellulose, sawdust, ground corn cobs. Remove with shovel. Collect in suitable and properly labeled containers.

6.4 Reference to other sections

- See also, *SECTION 8: Control parameters* and *SECTION 13: Disposal considerations*.
-

SECTION 7: Handling and storage

7.1 Precautions for safe handling

- Avoid contact with skin and eyes and inhalation of vapors.
- Do not eat, drink, or smoke when using this product.
- Thoroughly wash exposed skin after working with this product.
- Only use this product in a well-ventilated area.
- Empty containers may contain product residue and may be hazardous.

7.2 Conditions for safe storage, including any incompatibilities

- Do not store near acids.
- Keep containers tightly closed in a dry, cool, and well-ventilated location.
- Store in original containers or in containers of the same construction material as original containers.
- Minimize sources of ignition, such as static build-up, heat, spark, flame.

7.3 Specific end use(s)

- No additional data available.

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Diethylenetriamine
CAS No. 000111-40-0

| Country | Occupational Exposure Limit (OEL) Values | | Legal Basis |
|---------------------------|--|---------------------|--|
| | Eight Hour TWA | Fifteen Minute STEL | |
| Australia | 1 ppm | None established | Workplace Exposure Standards for Airborne Contaminants |
| Austria | 1 ppm | None established | Maximum Workplace Concentrations (MAK) Technical Guidance Concentrations (TRK) |
| Belgium | 1 ppm | None established | limites d'exposition professionnelle – VLEP/ Grenswaarden voor beroepsmatige blootstelling – GWBB |
| Canada – Alberta | 1 ppm | None established | Occupational Safety and Health Code |
| Canada – British Columbia | 1 ppm | None established | Occupational Health and Safety Regulation, Table of Exposure Limits for Chemical and Biological Substances |
| Canada - Ontario | 1 ppm | None established | Regulation 883, Control of Exposure to Biological or Chemical Agents |
| Canada - Quebec | 1 ppm | None established | Regulation respecting occupational safety and health |
| Canada - Saskatchewan | 1 ppm | 2 ppm | The Occupational Safety and Health Regulations |
| Denmark | 1 ppm | 2 ppm | Grænseværdier for stoffer og materialer |
| France | 1 ppm | None established | Institut National de Recherche et de Sécurité (INRS) |
| Ireland | 1 ppm | None established | Code of Practice for the Safety, Health and Welfare at Work (Chemical Agents) Regulations |
| New Zealand | 1 ppm | None established | Workplace Exposure Standards and Biological Exposure Indices |
| Poland | 1 ppm | None established | Principles and Methods of Assessing the Working Environment |
| Singapore | 1 ppm | None established | Workplace Safety and Health (General Provisions) Regulations |

| | | | |
|----------------|-------|------------------|--|
| South Korea | 1 ppm | None established | [Need reference] |
| Spain | 1 ppm | None established | Instituto Nacional de Seguridad e Higiene en el Trabajo (INSHT) |
| Sweden | 1 ppm | 2 ppm | |
| Switzerland | 1 ppm | None established | Verordnung über die Verhütung von Unfällen und Berufskrankheiten (VUV)", Art. 50 Abs.3 |
| USA (ACGIH) | 1 ppm | None established | None |
| USA (NIOSH) | 1 ppm | None established | NIOSH Pocket Guide to Chemical Hazards (Recommendations Only) |
| United Kingdom | 1 ppm | None established | EH40 Workplace exposure limits |

Ethyl-4-methyl-1h-imidazole, 2-
CAS No. 000931-36-2

| Country | Occupational Exposure Limit (OEL) Values | | Legal Basis |
|---|--|---------------------|-------------|
| | Eight Hour TWA | Fifteen Minute STEL | |
| No OELs were found for this ingredient. | | | |

Methyl imidazole, 4-
CAS No. 000822-86-4

| Country | Occupational Exposure Limit (OEL) Values | | Legal Basis |
|---|--|---------------------|-------------|
| | Eight Hour TWA | Fifteen Minute STEL | |
| No OELs were found for this ingredient. | | | |

Aminoethylpiperazine
CAS No. 000140-31-8

| Country | Occupational Exposure Limit (OEL) Values | | Legal Basis |
|---|--|---------------------|-------------|
| | Eight Hour TWA | Fifteen Minute STEL | |
| No OELs were found for this ingredient. | | | |

8.2 Exposure controls

Appropriate engineering controls

- Provide adequate general and local exhaust ventilation to control airborne concentrations to below the occupational exposure limit values.
- Provide readily accessible eye wash stations and safety showers.

Personal protective equipment

- Eye and face protection
 - Approved safety glasses with side shields (e.g., ANSI Z87, EN166)
- Skin protection
 - Hand protection: PVC, Nitrile rubber or Neoprene gloves are generally recommended. Different glove materials, thicknesses, and from different glove manufacturers may provide varying degrees of

protection. Temperature and specific use can impact glove effectiveness. Some gloves may be intended to be used only once and then discarded, while others may be used for longer periods of time. The glove supplier should provide the user with information regarding permeability and breakthrough time. Gloves should be discarded and replaced if there is any indication of degradation or chemical breakthrough.

- Other skin protection: Such clothing as to minimize or eliminate the chance of skin contact with the product.
- Respiratory protection
 - If ventilation is insufficient to keep airborne concentrations below the occupation exposure limit levels, full or half-mask respirator fitted with organic vapor cartridges and/or particulate filters (for sanding, grinding, cutting, etc. cured material). Filter masks may be of limited use in cases of high or unknown exposure.

Environmental exposure controls

- Do not flush into surface water or sanitary sewer system.
- Do not place directly onto ground.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

| | |
|--|-------------------------|
| - Appearance | Black paste |
| - Odor | Amine |
| - Odor threshold | No data available |
| - pH | Corrosive |
| - Melting point/freezing point | No data available |
| - Initial boiling point and boiling range | No data available |
| - Flash point | No data available |
| - Evaporation rate | No data available |
| - Flammability (solid, gas) | No data available |
| - Upper/lower flammability or explosive limits | No data available |
| - Vapor pressure | < 1 mm Hg @ 25°C / 77°F |
| - Vapor density (air = 1) | > 1 |
| - Relative density | 1.20 – 1.25 |
| - Solubility(ies) | No data available |
| - Partition coefficient: n-octanol/water | No data available |
| - Auto-ignition temperature | No data available |
| - Decomposition temperature | No data available |
| - Viscosity | No data available |
| - Explosive properties | No data available |
| - Oxidizing properties | No data available |

9.2 Other information

- No data available.

SECTION 10: Stability and reactivity

10.1 Reactivity

- No hazardous decomposition expected if product is stored and used as directed.
- Exothermic reactions are expected when mixed with epoxy adhesive.

10.2 Chemical stability

- Product is stable under normal conditions of storage and use.

10.3 Possibility of hazardous reactions

- Exothermic reactions are expected when mixed with epoxy adhesive.

10.4 Conditions to avoid

- Avoid unintended mixing with epoxy adhesive.

10.5 Incompatible materials

- Avoid contact with oxidizing materials.
- Avoid contact with metals such as: brass, bronze, copper, copper alloys.
- Avoid contact with: acids, acrylates, alcohols, aldehydes, halogenated hydrocarbons, ketones, nitrites.
- Avoid contact with absorbent materials such as: ground corn cobs, moist organic absorbents, peat moss, sawdust.

10.6 Hazardous decomposition products

- Decomposition products depend upon temperature, air supply and the presence of other materials and may include, but are not limited to: ammonia, ethylenediamine, volatile amines..

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

- Data for ingredients not listed were not found or not sufficient for classification.

Diethylenetriamine (CAS No. 000111-40-0)

- | | | | |
|--------------|--------|----------------|--------------------|
| - Oral | Rat: | LD50 | ca. 800-2600 mg/kg |
| - Inhalation | Rat | LC90 (4 hours) | 1.8 mg/L |
| - Dermal | Rabbit | LD50 | ca. 600-1240 mg/kg |

Methyl imidazole, 4- (CAS No. 000822-36-6)

- | | | | |
|--------------|--------|------|-------------------|
| - Oral | Rat: | LD50 | > 750 mg/kg |
| - Inhalation | | | No data available |
| - Dermal | Rabbit | LD50 | 440 mg/kg |

Aminoethylpiperazine (CAS No. 000140-31-8)

- Oral Rat: LD50 1470-2140 mg/kg
- Inhalation No data available
- Dermal Rabbit LD50 880 mg/kg

Skin corrosion/irritation

- Data for ingredients not listed were not found or not sufficient for classification.

Diethylenetriamine (CAS No. 000111-40-0)

- Rabbit Highly corrosive

Methyl imidazole, 4- (CAS No. 000822-36-6)

- Rabbit Corrosive / Irritating

Aminoethylpiperazine (CAS No. 000140-31-8)

- Rabbit Corrosive / Highly irritating

Serious eye damage/irritation

- Data for ingredients not listed were not found or not sufficient for classification.

Diethylenetriamine (CAS No. 000111-40-0)

- Rabbit Highly corrosive

Methyl imidazole, 4- (CAS No. 000822-36-6)

- Rabbit Irritating

Aminoethylpiperazine (CAS No. 000140-31-8)

- Rabbit Moderately irritating

Respiratory or skin sensitization

- Data for ingredients not listed were not found or not sufficient for classification.

Diethylenetriamine (CAS No. 000111-40-0)

- Inhalation — No data found
- Skin Guinea pig Sensitizing

Aminoethylpiperazine (CAS No. 000140-31-8)

- Skin Guinea pig Sensitizing

Germ cell mutagenicity

- Data for ingredients were not found or not sufficient for classification.

Carcinogenicity

- Data for ingredients were not found or not sufficient for classification.

Reproductive toxicity

- Data for ingredients were not found or not sufficient for classification.

STOT-single exposures

- One or more ingredients may present the following:

Respiratory system. Skin. Eyes. Asthma. Adverse respiratory effects (such as cough, tightness of chest or shortness of breath). Eye disease. Skin disorders. Allergies. Adverse skin effects (such as rash, irritation, corrosion). Adverse eye effects (such as conjunctivitis, corneal damage).

STOT-repeated exposures

- Data for ingredients not listed were not found or not sufficient for classification.

Aspiration hazard

- Data for ingredients were not found or not sufficient for classification.

SECTION 12: Ecological information

12.1 Toxicity

Acute toxicity

- Data for ingredients not listed were not found or not sufficient for classification.

Diethylenetriamine (CAS No. 000111-40-0)

| | | | |
|--------------------------|--------------------------------|----------------|-----------|
| - Fish: | <i>Poecilia reticulata</i> | LC50 (96-hour) | 1014 mg/L |
| - Crustacea | <i>Daphnia magna</i> | EC50 (48-hour) | 17 mg/L |
| - Algae / Aquatic plants | <i>Scenedesmus subspicatus</i> | EC50 (96-hour) | 592 mg/L |
| - Bacteria | <i>Pseudomonas putida</i> | EC50 (1-hour) | 2000 mg/L |

Methyl imidazole, 4- (CAS No. 000822-36-6)

| | | | |
|--------------------------|--------------------------------|----------------|-------------|
| - Fish: | <i>Leuciscus idus</i> | LC50 (96-hour) | ca. 34 mg/L |
| - Crustacea | <i>Daphnia magna</i> | EC50 (24-hour) | 280 mg/L |
| - Algae / Aquatic plants | <i>Scenedesmus subspicatus</i> | EC50 (72-hour) | 2 mg/L |
| - Bacteria | <i>Pseudomonas putida</i> | EC50 (17-hour) | 440 mg/L |

Aminoethylpiperazine (CAS No. 000140-31-8)

| | | | |
|--------------------------|----------------------------------|----------------|-------------|
| - Fish: | <i>Poecilia reticulata</i> | LC50 (96-hour) | > 1000 mg/L |
| - Crustacea | <i>Daphnia magna</i> | EC50 (24-hour) | 190 mg/L |
| - Algae / Aquatic plants | <i>Selenastrum capricornutum</i> | EC50 (72-hour) | 495 mg/L |
| - Bacteria | Activated sludge | EC20 (1-hour) | 1600 mg/L |

Chronic toxicity

- Data for ingredients not listed were not found or not sufficient for classification.

Diethylenetriamine (CAS No. 000111-40-0)

| | | | |
|-------------|-------------------------------|---------------|-----------|
| - Fish: | <i>Gasterosteus aculeatus</i> | NOEC (28-day) | 10 mg/L |
| - Crustacea | <i>Daphnia magna</i> | NOEC (21-day) | 5.6 mg/L |
| | | LOEC (21-day) | 11.3 mg/L |

12.2 Persistence and degradability

- Not expected to be readily biodegradable.

12.3 Bioaccumulative potential

- Data for ingredients were not found or not sufficient for classification.

12.4 Mobility in soil

- Data for ingredients were not found or insufficient for classification.

12.5 Results of PBT and vPvB assessment

- None of the ingredients are listed.

12.6 Other adverse effects

- No additional data is available.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

- Must be disposed of in accordance with local regulatory requirements.
- Land disposal of uncured product is discouraged and illegal in many jurisdictions.
- Sewer disposal is discouraged.
- Empty containers may contain hazardous residue and must be disposed accordingly.

SECTION 14: Transport information

US Department of Transportation (Road and Rail)
International Carriage of Dangerous Goods by Road (ADR)
International Carriage of Dangerous Goods by Rail (RID)
International Civil Aviation Organization (ICAO) Technical Instructions
International Maritime Dangerous Goods (IMDG) Code
International Carriage of Dangerous Goods by Inland Waterways

- UN3259 AMINES, SOLID, CORROSIVE, N.O.S., MIXTURE (Diethylenetriamine), 8, PG II

SECTION 15: Regulatory information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

The regulatory information provided below may not be comprehensive.

Canada

Controlled Products Regulation (CPR)

- This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all of the information required by the CPR.

Ingredient Disclosure List (IDL)

- All components of this mixture that are on the IDL above their specified concentration are disclosed in this SDS.

United States

| EPCRA | | | CERCLA | RCRA | CAA | OSHA |
|------------------------------------|------------------------|-------------|------------|-----------|-------------------|---------------------------|
| Section 302 (EHS) TPQ (LB/KG) | Section 304 RQ (LB/KG) | Section 313 | RQ (LB/KG) | P/U Codes | 112(r) TQ (LB/KG) | Highly Hazardous Chemical |
| None of the ingredients are listed | | | | | | |

15.2 Chemical safety assessment

- No chemical safety assessment has been carried out for this mixture by the supplier.

SECTION 16: Other information

Revision history

| Revision Number | Revision Date | Revision Description |
|-----------------|---------------|---|
| 1 | 4-SEP-2014 | Initial SDS creation in conformance with OSHA hazard communication standard (29 CFR 1910.1200), Regulation (EC) No. 1907/2006 (REACH), and UN Globally Harmonized System (GHS).standard (29 CFR 1910.1200) and UN Globally Harmonized System (GHS). |
| 2 | 27-MAY-2015 | Updated Section 14 – Transportation Information |
| 3 | 27-JAN-2017 | General review. No changes. |
| 4 | 18-FEB-2020 | General review. No changes. |

Legend to abbreviations and acronyms used

- ACGIH American Conference of Governmental Industrial Hygienists
- ANSI American National Standards Institute
- CAA Clean Air Act
- cP centipoise
- CFR Code of Federal Regulations (US)
- EN European Standard (French: *Européen Norme*)

- EPCRA Emergency Planning and Community Right-to-Know Act
- IARC International Agency for Research on Cancer
- IBC Code International Bulk Chemical Code
- LOEC Lowest Observed Effects Concentration
- MARPOL Marine Pollution
- NOEL No Observed Effects Concentration
- NIOSH National Institute for Occupational Safety and Health
- OSHA Occupational Safety and Health Administration (US)
- PBT Persistent Bioaccumulative and Toxic
- RCRA Resource Conservation and Recovery Act
- vPvB very Persistent and very Bioaccumulative

Key literature references and sources for data

- ESIS. European chemical Substances Information System. <http://esis.jrc.ec.europa.eu/>.
- USEPA. 2006. List of Lists, Consolidated List of Chemicals Subject to the Emergency Planning and Community Right-To-Know Act (EPCRA) and Section 112(r) of the Clean Air Act. EPA 550-B-01-003. October 2006.

1. Identification

| | |
|---|--|
| Product identifier | Harvey's Purple Primer |
| Other means of identification | |
| Product code | 3402E |
| Synonyms | Part Numbers: 018255, 018256, 018267, 019002, 018003, 019038, 019041, 019044, 019045, 019046, 019048, 019049, 019050, 019051, 019052, 019053, 019054, 019055, 019056, 019057, 019060, 019062, 019063, 019064, 019065, 019066, 019067, 019068, 019069, 019070, 019071, 019072, 019073, 019074, 019075, 019076, 019077, 019078, 019079, 019080, 019081, 019082, 019083, 019084, 019085, 019086, 019087, 019089, 019090, 019091, 019092, 019093, 019094, 019095, 019097, 019098, 019099, 019157, 019171, 019172, 019173, 019190, 019200, 019201, 019202, 019205, 019505, 019511, 019716, 019717, 405163, 458457, 458465, B15944, B15944A, B15944D, B15944F, MVP9912, MVP9913, MVP9914, PV019038, PV019041, PV019205 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | William H. Harvey Company |
| Address | 4334 South 67th Street Omaha, NE 68117 |
| Telephone | 402-331-1175 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |

| | |
|--|--|
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |
| Supplemental information | Not applicable. |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------|------------|-------|
| Acetone | 67-64-1 | 25-40 |
| Cyclohexanone | 108-94-1 | 25-40 |
| Furan, Tetrahydro- | 109-99-9 | 15-30 |
| Methyl ethyl ketone | 78-93-3 | 15-30 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |

General fire hazards

Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures**Personal precautions, protective equipment and emergency procedures**

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions**7. Handling and storage****Precautions for safe handling**

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

| Components | Type | Value |
|-----------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 50 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 200 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm |
| | TWA | 50 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------------------|------|---------------------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 250 ppm |
| | TWA | 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 885 mg/m3 |
| | TWA | 300 ppm 590 mg/m3 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

| | |
|---------------------------------------|---|
| Eye/face protection | Face shield is recommended. Wear safety glasses with side shields (or goggles). |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|---|----------------------------------|
| Physical state | Liquid. |
| Form | Translucent liquid. |
| Color | Purple |
| Odor | Solvent. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 151 °F (66.11 °C) |
| Flash point | 14.0 - 23.0 °F (-10.0 - -5.0 °C) |
| Evaporation rate | 5.5 - 8 |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1.8 |
| Flammability limit - upper (%) | 11.8 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.84 +/- 0.02 @20°C |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Bulk density | 7 lb/gal |
| VOC (Weight %) | < 550 g/l SQACMD Method 24 |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |

| | |
|---|--|
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia. |

| | |
|---|--|
| Symptoms related to the physical, chemical and toxicological characteristics | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. |
|---|--|

Information on toxicological effects

| | |
|-----------------------|---|
| Acute toxicity | May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation. |
|-----------------------|---|

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

Cyclohexanone (CAS 108-94-1)

3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

| | |
|---|---|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|-------------------------------------|--|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquids, n.o.s. (Methyl ethyl ketone RQ = 26274 LBS, Acetone RQ = 13130 LBS) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | IB2, T7, TP1, TP8, TP28 |
| Packaging exceptions | 150 |
| Packaging non bulk | 202 |
| Packaging bulk | 242 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquid, n.o.s. (Methyl ethyl ketone, Acetone) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3H |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|-------------------------------------|---|
| UN number | UN1993 |
| UN proper shipping name | FLAMMABLE LIQUID, N.O.S. (Methyl ethyl ketone, Acetone) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-E |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|--|
| Hazard categories | Immediate Hazard - Yes Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No |
|--------------------------|--|

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No**SARA 313 (TRI reporting)**
Not regulated.**Other federal regulations****Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.**Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number**Acetone (CAS 67-64-1) 6532
Methyl ethyl ketone (CAS 78-93-3) 6714**Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))**Acetone (CAS 67-64-1) 35 %WV
Methyl ethyl ketone (CAS 78-93-3) 35 %WV**DEA Exempt Chemical Mixtures Code Number**Acetone (CAS 67-64-1) 6532
Methyl ethyl ketone (CAS 78-93-3) 6714**US state regulations****US. Massachusetts RTK - Substance List**Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)**US. New Jersey Worker and Community Right-to-Know Act**Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)**US. Pennsylvania Worker and Community Right-to-Know Law**Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)**US. Rhode Island RTK**Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)**US. California Proposition 65**

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision**Issue date** 27-May-2015**Revision date** -

Version #
HMIS® ratings

01
Health: 2
Flammability: 3
Physical hazard: 0

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. William H. Harvey Company cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.



SAFETY DATA SHEET

1. Identification

| | |
|---|---|
| Product identifier | HERCULES PVC CEMENT HEAVY BODY, SLOW SET CLEAR AND GRAY |
| Other means of identification | |
| SDS number | 7102E |
| Synonyms | Part Numbers: CLEAR – 60155, 60160, 60165 GRAY – 60210, 60215, 60220, 60225 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | HCC Holdings, Inc. an Oatey Affiliate |
| Address | 4700 West 160th Street Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only outdoors or in a well-ventilated area. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 30-60 |
| 2-Propanone | 67-64-1 | 10-30 |
| Cyclohexanone | 108-94-1 | 10-30 |
| Polyvinyl chloride | 9002-86-2 | 10-30 |
| Methyl ethyl ketone | 78-93-3 | 5-10 |
| Colloidal silicon dioxide | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid inhalation of vapors or mists. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
|--|---|

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Use water spray to reduce vapors or divert vapor cloud drift. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions**7. Handling and storage****Precautions for safe handling**

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not taste or swallow. Avoid breathing mist or vapor. Avoid contact with skin. Avoid contact with eyes. Avoid prolonged exposure. Avoid contact with clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). Keep in an area equipped with sprinklers.

8. Exposure controls/personal protection**Occupational exposure limits****U.S. - OSHA**

| Components | Type | Value | Form |
|---|------|-----------|--------------|
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 0.8 mg/m3 | Unspecified. |
| | | 20 mppcf | Unspecified. |

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|------------|----------------------|
| 2-Propanone (CAS 67-64-1) | PEL | 2400 mg/m3 | |
| | | 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 | |
| | | 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 | |
| | | 200 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 | |
| | | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 5 mg/m3 | Respirable fraction. |
| | | 15 mg/m3 | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|---|------|-----------|
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 0.8 mg/m3 |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------|----------------------|
| 2-Propanone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm | |
| | TWA | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m3 | Respirable fraction. |

U.S. - NIOSH

| Components | Type | Value | Form |
|---|------|---------|--------------|
| Colloidal silicon dioxide (CAS 112945-52-5) | REL | 6 mg/m3 | Unspecified. |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---|------|---------------------------------|
| 2-Propanone (CAS 67-64-1) | TWA | 590 mg/m3 250 ppm |
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 6 mg/m3 |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | TWA | 250 ppm 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 885 mg/m3 |
| | TWA | 300 ppm 590 mg/m3 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| 2-Propanone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|--------|-------------|----------|---------------|
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9) Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing.

Respiratory protection If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Wash hands after handling and before eating.

9. Physical and chemical properties

Appearance Opaque.or Translucent.

Physical state Liquid.

Form Liquid.

Color Gray or Clear.

Odor Solvent.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

Initial boiling point and boiling range 151 °F (66.11 °C)

Flash point 14.0 - 23.0 °F (-10.0 - -5.0 °C)

Evaporation rate 5.5 - 8

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) Not available.

Flammability limit - upper (%) Not available.

| | |
|--|-----------------------------|
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.88 - 0.92 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 1200 - 2500 cP |
| Other information | |
| Bulk density | 7.5 lb/gal |
| VOC (Weight %) | < 510 g/l SQACMD Method 304 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. May cause irritation to the respiratory system. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. |

Symptoms related to the physical, chemical and toxicological characteristics Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--------------------------------|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer. In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure. This product contains polyvinyl chloride (PVC) that is not a fabricated product, and is therefore, defined and regulated as a toxic and hazardous substance under 29 C.F.R. § 1910.1017 due to the presumed presence of residual vinyl chloride monomer. The concentrations of residual vinyl chloride calculated to be contained in this product are well below the threshold for classification in accordance with 29 C.F.R. § 1910.1200.

IARC Monographs. Overall Evaluation of Carcinogenicity

Colloidal silicon dioxide (CAS 112945-52-5) 3 Not classifiable as to carcinogenicity to humans.

Cyclohexanone (CAS 108-94-1) 3 Not classifiable as to carcinogenicity to humans.

Polyvinyl chloride (CAS 9002-86-2) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Polyvinyl chloride (CAS 9002-86-2) Cancer

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Respiratory tract irritation. Narcotic effects.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

2-Propanone (CAS 67-64-1) -0.24

Cyclohexanone (CAS 108-94-1) 0.81

Furan, Tetrahydro- (CAS 109-99-9) 0.46

Methyl ethyl ketone (CAS 78-93-3) 0.29

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

| | |
|--|--|
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T11, TP1, TP8, TP27 |
| Packaging exceptions | 150 |
| Packaging non bulk | 201 |
| Packaging bulk | 243 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|---|---|
| UN number | UN1133 |
| UN proper shipping name | ADHESIVES |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code | Not available. |

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|------------------------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
| | Central nervous system |
| | Liver |
| | Blood |
| | Flammability |

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| 2-Propanone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|------------------------|
| Hazard categories | Immediate Hazard - Yes |
| | Delayed Hazard - No |
| | Fire Hazard - Yes |
| | Pressure Hazard - No |
| | Reactivity Hazard - No |

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| 2-Propanone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| 2-Propanone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| 2-Propanone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations**US. Massachusetts RTK - Substance List**

2-Propanone (CAS 67-64-1)
Colloidal silicon dioxide (CAS 112945-52-5)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

2-Propanone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

2-Propanone (CAS 67-64-1)
Colloidal silicon dioxide (CAS 112945-52-5)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

2-Propanone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. This product contains trace amounts of chemicals known to the state of California to cause cancer. Under normal use conditions, exposure to these chemicals at levels above the State of California "No significant Risk Level" (NSRL) are unlikely. The use of proper personal protective equipment (PPE) and ventilation guidelines noted in Section 8 will minimize exposure levels to these chemicals.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------|--|
| Issue date | 04-August-2014 |
| Revision date | 15-December-2014 |
| Version # | 02 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |
| Disclaimer | The information in the sheet was written based on the best knowledge and experience currently available. |



SECTION 1 - IDENTIFICATION

Table with 2 columns: Manufacturer information (Black Swan Mfg. Co., Chicago, IL) and Recommended Use (For connecting PVC pipe and fittings).

SECTION 2 – HAZARD(S) IDENTIFICATION

Complex hazard identification section including Labels (Health Hazard, Flammable), Signal Word (Danger), HMIS (Health 2, Flammability 3, Reactivity 0), NFPA (Health Hazard 3, Fire Hazard 0, Specific Hazard 2), GHS Classification (Acute Toxicity Cat. 4, Skin Irritation Cat. 3, Eye Irritation Cat. 2B, Skin Sensitization NO), and Physical (Flammability: Cat. 2).

SECTION 3 – COMPOSITION / INFORMATION ON INGREDIENTS

Table with 5 columns: Hazardous Chemicals, CAS#, EINECS#, REACH Pre-registration Number, and Approx %. Lists ingredients like Tetrahydrofuran, Methyl Ethyl Ketone, Cyclohexanone, and Acetone.

SECTION 4 – FIRST-AID MEASURES

First-aid measures for Inhalation, Skin, Eyes, and Ingestion. Includes instructions like 'Move into fresh air' and 'Give 1 or 2 glasses of water'.

GHS SAFETY DATA SHEET

SECTION 5 – FIRE-FIGHTING MEASURES

Fire Hazard: Highly flammable liquid and vapor. Keep away from heat and all sources of ignition including sparks, flames, lighted cigarettes and pilot lights. Containers may rupture or explode in the heat of a fire. Vapors are heavier than air and may travel to a remote ignition source and flash back.

Combustion Products: Combustion will produce toxic and irritating vapors including carbon monoxide, carbon dioxide and hydrogen chloride.

Extinguishing Media: Carbon Dioxide Gas, Dry Chemical Powder, Foam.

Unsuitable Extinguishing Media: Water Spray, Water Stream.

Protective Equipment: Self-contained breathing apparatus {(SCBA), MSHA/NIOSH}. Full protective gear.

Special Fire Fighting Procedures: Evacuate enclosed areas, stay upwind. Closed or confined quarters require self-contained breathing apparatus, positive pressure hose masks or airline masks. Use water spray to cool containers, to flush spills from sources of ignition and to disperse vapors.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Personal Precautions: Prevent contact with skin or eyes. Personnel cleaning up the spill should wear appropriate personal protective equipment, including respirators if vapor concentrations are high.

Protective Equipment: Wear suitable respiratory protective equipment.

Emergency Procedures: Remove all sources of ignition and ventilate area. For leaks, stop leak if it can be done safely. Evacuate area and keep unnecessary and unprotected personnel from entering the spill area.

Environmental Precautions: Avoid runoff into storm sewers, ditches and waterways.

Methods for Cleaning Up: Soak up spill with an inert absorbent such as sand, earth or other noncombusting material. Transfer absorbent material to a covered, labeled, metal container. Do not use plastic or aluminum containers.

SECTION 7 – HANDLING AND STORAGE

Handling

Avoid contact with eyes, skin and clothing. Avoid prolonged breathing of vapor and mist. Use with adequate ventilation. Wash thoroughly after handling. Do not eat, drink or smoke in the work area. Keep products away from heat, sparks, flames and all other sources of ignition. Keep containers closed when not in use.

Storage

Store in a cool, dry, well-ventilated area away from incompatible materials. Store in shade between 40°F – 110°F. Keep container closed when not in use. Keep away from heat, sparks, open flame and other sources of ignition. **Incompatible Materials:** caustics, ammonia, inorganic acids, chlorinated compounds, amines, strong oxidizers and isocyanates.

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure Limits

| <u>Hazardous Chemicals</u> | <u>ACGIH-TLV</u> | <u>ACGIH-STEL</u> | <u>OSHA-PEL</u> |
|----------------------------|------------------|-------------------|-----------------|
| TETRAHYDROFURAN | 50 ppm | 100 ppm | 200 ppm |
| METHYL ETHYL KETONE | 200 ppm | 300 ppm | 200 ppm |
| CYCLOHEXANONE | 20 ppm | 50 ppm | 50 ppm |
| ACETONE | 500 ppm | 750 ppm | 1000 ppm |

Engineering Controls: A source of running water to flush or wash the eyes and skin in case of contact. Use local exhaust as needed.

Ventilation: Local ventilation is adequate. Use only explosion proof ventilation equipment.

Personal Protective Equipment – Respiratory: Atmospheric levels should be maintained below established exposure limits. If airborne concentrations exceed those limits, use of a NIOSH approved organic vapor cartridge respirator with full face-piece is recommended. The effectiveness of an air purifying respirator is limited. Use it only for a single short-term exposure. For emergency and other conditions where short term exposure guidelines may be exceeded, use an approved positive pressure self-contained breathing apparatus.

Personal Protective Equipment – Skin: Prevent contact with skin. Butyl rubber gloves should be used.

Personal Protective Equipment – Eyes: Use glasses with side shield or splash proof goggles.

SECTION 9 – PHYSICAL & CHEMICAL PROPERTIES

| | | | | | |
|------------------------|-----------------|--------------------------|--------------------------------------|-----------------------------|----------------|
| Appearance: | Clear Liquid | Flash Point: | 6°F | Vapor Pressure: | 143mm Hg @20°C |
| Odor: | Ketone | Specific Gravity: | 0.95 ± 0.02 @ 20°C | Flammability: | Category 2 |
| pH: | Not Established | Solubility (H2O): | Solvent-Complete, Resin-Precipitates | Flammability Limits: | LEL - 1.8% |
| Melting Point: | Not Established | Evaporation Rate: | 8 (BUAC=1) | | UEL – 11.8% |
| Freezing Point: | Not Established | Vapor Density: | >2.00 (AIR=1) | | |
| Boiling Point: | 151°F (66°C) | VOC: | 510 g/l | | |

GHS SAFETY DATA SHEET

SECTION 10 – STABILITY AND REACTIVITY

Stability: Stable.

Hazardous polymerization: Will not occur.

Conditions to avoid: Keep away from heat, sparks, open flame and other sources of ignition.

Incompatible materials: Caustics, ammonia, inorganic acids, chlorinated compounds, amines, strong oxidizers and isocyanates.

Hazardous decomposition products: When forced to burn, this product gives out carbon monoxide, carbon dioxide, hydrogen chloride and smoke.

SECTION 11 – TOXICOLOGICAL INFORMATION

| <u>Hazardous Chemicals</u> | <u>Toxicity</u> | |
|----------------------------|---|---|
| | <u>LD₅₀</u> | <u>LC₅₀</u> |
| TETRAHYDROFURAN | Oral: 2842 mg/kg (rat) | Inhalation: 3 hrs., 21000 mg/m ³ (rat) |
| METHYL ETHYL KETONE | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation: 8 hrs., 23500 mg/m ³ (rat) |
| CYCLOHEXANONE | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation: 4 hrs., 8000 ppm (rat) |
| ACETONE | Oral: 5800 mg/kg (rat) | Inhalation: 50100 mg/m ³ (rat) |

Likely Routes of Exposure: Inhalation, Skin Contact and Eye Contact.

Symptoms and Effect - Inhalation: Severe overexposure may result in nausea, dizziness, and headaches. Can cause drowsiness, irritation of eyes and nasal passages. **Skin Contact:** Liquid contact may remove natural skin oils resulting in irritation. Dermatitis may occur with prolonged contact. **Eye Contact:** Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid. **Ingestion:** May cause nausea, vomiting, diarrhea and mental sluggishness.

Long-Term Effect: None known.

Pre-Existing Conditions: Individuals with pre-existing diseases of the eyes, skin or respiratory system may have increased susceptibility to the toxicity of excessive exposure.

SECTION 12 – ECOLOGICAL INFORMATION

Ecotoxicity: None known.

Persistence & Degradability: Biodegradable.

Bioaccumulative Potential: None known.

Mobility in soil: In normal use, emission of Volatile Organic Compounds (VOC's) to the air takes place, typically at a rate of ≤ 510 g/l.

SECTION 13 – DISPOSAL CONSIDERATION

Dispose of product or container in accordance with federal, state or local regulations.

SECTION 14 – TRANSPORTATION INFORMATION

Shipping Information

Shipping Name: Adhesives, Containing a Flammable Liquid

Hazardous Class: 3

I.D. Number: UN1133

Packing Group: II

Label Required: Flammable Liquid

Marine Pollutant: No

Exception to the rule: If the package that contains the hazardous material is in a small consumer size (Less than 1L), then the rules that apply to shipping hazardous materials do not apply. This is called an "Exception".

This is classified as Consumer Commodity ORM-D.

SECTION 15 – REGULATORY INFORMATION

Precautionary Label Information: Highly Flammable, Irritant and Health Hazard.

Risk Phrases: **R11**-Highly Flammable. **R36/37**-Irritant to eyes and respiratory system. **R66**-Repeated exposure may cause skin dryness or cracking. **R67**-Vapors may cause drowsiness and dizziness.

Safety Phrases: **S2**-Keep out of reach of children. **S9**-Keep container in a well-ventilated place. **S16**-Keep away from sources of ignition-No smoking. **S25**-Avoid contact with eyes. **S26**-In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. **S33**-Take precautionary measures against static discharges.

SECTION 16 – OTHER INFORMATION

Information on this form is furnished solely for the purpose of compliance with the Occupational Safety and Health Act and shall not be used for any other purpose. Black Swan Mfg. Co. urges the customers receiving this Material Safety Data Sheet to study it carefully to become aware of the hazards, if any, of the product involved. In the interest of safety, you should notify your employees, agents and contractors of the information on the sheets.

DATE: 01/01/2019



SAFETY DATA SHEET

1. Identification

Product identifier: Water-Based Stainless Steel Maintainer

Other means of identification

SDS number: RE1000028859

Recommended restrictions

Product Use: Cleaner

Restrictions on use: Not known.

Manufacturer/Importer/Distributor Information

Manufacturer

Company Name: CLAIRE MANUFACTURING COMPANY
Address: 1000 Integram Dr
Pacific, MO 63069
Telephone: 1-630-543-7600
Fax:

Emergency telephone number: 1-866-836-8855

2. Hazard(s) identification

Hazard Classification

Physical Hazards

Flammable aerosol Category 1

Health Hazards

Aspiration Hazard Category 1

Environmental Hazards

Acute hazards to the aquatic environment Category 3

Label Elements

Hazard Symbol:



Signal Word: Danger



Hazard Statement: Extremely flammable aerosol.
May be fatal if swallowed and enters airways.
Harmful to aquatic life.

Precautionary Statements

Prevention: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Avoid release to the environment.

Response: IF SWALLOWED: Immediately call a POISON CENTER/doctor/... Do NOT induce vomiting.

Storage: Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store locked up.

Disposal: Dispose of contents/container to an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.

Hazard(s) not otherwise classified (HNOC): None.

3. Composition/information on ingredients

Mixtures

| Chemical Identity | CAS number | Content in percent (%)* |
|---|------------|-------------------------|
| Butane | 106-97-8 | 10 - <20% |
| Distillates (petroleum), hydrotreated light | 64742-47-8 | 10 - <25% |
| White mineral oil (petroleum) | 8042-47-5 | 10 - <20% |
| Propane | 74-98-6 | 1 - <5% |
| Siloxanes and Silicones, di-Me | 63148-62-9 | 1 - <5% |

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First-aid measures

Ingestion: Call a physician or poison control center immediately. Rinse mouth. Never give liquid to an unconscious person. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Inhalation: Move to fresh air.

Skin Contact: Remove contaminated clothing and wash the skin thoroughly with soap and water after work.

Eye contact: Rinse immediately with plenty of water.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.



Hazards: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: No data available.

5. Fire-fighting measures

General Fire Hazards: Use water spray to keep fire-exposed containers cool. Fight fire from a protected location. Move containers from fire area if you can do so without risk.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical: Vapors may travel considerable distance to a source of ignition and flash back.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures: Ventilate closed spaces before entering them. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Keep upwind.

Methods and material for containment and cleaning up: Stop the flow of material, if this is without risk. Absorb with sand or other inert absorbent.

Notification Procedures: ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk.

Environmental Precautions: Avoid release to the environment. Prevent further leakage or spillage if safe to do so.



7. Handling and storage

Precautions for safe handling: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use.

Conditions for safe storage, including any incompatibilities: Store locked up. Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Aerosol Level 1

8. Exposure controls/personal protection

Control Parameters

Occupational Exposure Limits

| Chemical Identity | Type | Exposure Limit Values | Source |
|---|---------|-----------------------|--|
| Butane | REL | 800 ppm 1,900 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | TWA | 800 ppm 1,900 mg/m3 | US. Tennessee. OELs. Occupational Exposure Limits, Table Z1A (06 2008) |
| | STEL | 1,000 ppm | US. ACGIH Threshold Limit Values (03 2018) |
| | TWA | 800 ppm 1,900 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | AN ESL | 3,000 ppb | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | AN ESL | 7,100 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | TWA PEL | 800 ppm 1,900 mg/m3 | US. California Code of Regulations, Title 8, Section 5155. Airborne Contaminants (09 2006) |
| | ST ESL | 66,000 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | ST ESL | 28,000 ppb | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| Distillates (petroleum), hydrotreated light - Non-aerosol. - as total hydrocarbon vapor | TWA | 200 mg/m3 | US. ACGIH Threshold Limit Values (2008) |
| Distillates (petroleum), hydrotreated light | REL | 100 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| Distillates (petroleum), hydrotreated light - Non-aerosol. - as total hydrocarbon vapor | TWA | 200 mg/m3 | US. ACGIH Threshold Limit Values (2008) |
| Distillates (petroleum), hydrotreated light | ST ESL | 3,500 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | AN ESL | 350 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| White mineral oil (petroleum) - Mist. | REL | 5 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 5 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | STEL | 10 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | TWA | 5 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| White mineral oil (petroleum) - Inhalable fraction. | TWA | 5 mg/m3 | US. ACGIH Threshold Limit Values (01 2010) |
| White mineral oil (petroleum) | TWA PEL | 5 mg/m3 | US. California Code of Regulations, Title 8, |



| | | | |
|---|---------|-----------------------|--|
| - Mist. | | | Section 5155. Airborne Contaminants (09 2006) |
| | TWA | 5 mg/m3 | US. Tennessee. OELs. Occupational Exposure Limits, Table Z1A (06 2008) |
| White mineral oil (petroleum) - Vapor. | AN ESL | 100 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| | ST ESL | 1,000 µg/m3 | US. Texas. Effects Screening Levels (Texas Commission on Environmental Quality) (11 2016) |
| Propane | REL | 1,000 ppm 1,800 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | TWA PEL | 1,000 ppm 1,800 mg/m3 | US. California Code of Regulations, Title 8, Section 5155. Airborne Contaminants (09 2006) |
| | TWA | 1,000 ppm 1,800 mg/m3 | US. Tennessee. OELs. Occupational Exposure Limits, Table Z1A (06 2008) |
| | TWA | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |

Appropriate Engineering Controls No data available.

Individual protection measures, such as personal protective equipment

General information: Use personal protective equipment as required. Personal protection equipment should be chosen according to the CEN standards and in discussion with the supplier of the personal protective equipment.

Eye/face protection: Wear goggles/face shield.

Skin Protection
Hand Protection: No data available.

Other: No data available.

Respiratory Protection: In case of inadequate ventilation use suitable respirator. Seek advice from local supervisor.

Hygiene measures: When using do not smoke. Observe good industrial hygiene practices.

9. Physical and chemical properties

Appearance

- Physical state:** liquid
- Form:** Spray Aerosol
- Color:** No data available.
- Odor:** No data available.
- Odor threshold:** No data available.
- pH:** No data available.
- Melting point/freezing point:** No data available.
- Initial boiling point and boiling range:** No data available.
- Flash Point:** -104.44 °C
- Evaporation rate:** No data available.
- Flammability (solid, gas):** No data available.



Upper/lower limit on flammability or explosive limits

Flammability limit - upper (%): No data available.
Flammability limit - lower (%): No data available.
Explosive limit - upper (%): No data available.
Explosive limit - lower (%): No data available.

Vapor pressure: 3,240.5359 - 4,619.4874 hPa (20 °C)

Vapor density: No data available.

Density: No data available.

Relative density: No data available.

Solubility(ies)

Solubility in water: No data available.

Solubility (other): No data available.

Partition coefficient (n-octanol/water): No data available.

Auto-ignition temperature: No data available.

Decomposition temperature: No data available.

Viscosity: No data available.

10. Stability and reactivity

Reactivity: No data available.

Chemical Stability: Material is stable under normal conditions.

Possibility of hazardous reactions: No data available.

Conditions to avoid: Avoid heat or contamination.

Incompatible Materials: No data available.

Hazardous Decomposition Products: No data available.

11. Toxicological information

Information on likely routes of exposure

Inhalation: No data available.

Skin Contact: No data available.

Eye contact: No data available.

Ingestion: No data available.

Symptoms related to the physical, chemical and toxicological characteristics

Inhalation: No data available.

Skin Contact: No data available.



Eye contact: No data available.

Ingestion: No data available.

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

Oral

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Distillates (petroleum),
hydrotreated light LD 50 (Rat): > 5,000 mg/kg

White mineral oil
(petroleum) LD 50 (Rat): > 5,000 mg/kg

Dermal

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Distillates (petroleum),
hydrotreated light LD 50 (Rabbit): > 2,000 mg/kg

White mineral oil
(petroleum) LD 50 (Rabbit): > 2,000 mg/kg

Inhalation

Product: Not classified for acute toxicity based on available data.

Specified substance(s):

Butane LC 50 (Mouse): 1,237 mg/l

Distillates (petroleum),
hydrotreated light LC 50: > 5 mg/l
LC 50: > 20 mg/l

White mineral oil
(petroleum) LC 50 (Rat): > 5 mg/l
LC 50: > 20 mg/l

Propane LC 50 (Mouse): 1,237 mg/l

Repeated dose toxicity

Product: No data available.

Specified substance(s):

Butane NOAEL (Rat(Female, Male), Inhalation, >= 28 d): 4,000 ppm(m) Inhalation
Experimental result, Key study
LOAEL (Rat(Female, Male), Inhalation, >= 28 d): 12,000 ppm(m) Inhalation
Experimental result, Key study



| | |
|---|--|
| Distillates (petroleum), hydrotreated light | NOAEL (Rat(Female, Male), Inhalation): \geq 24 mg/m ³ Inhalation Experimental result, Key study NOAEL (Rat(Female), Oral, 70 - 147 d): 750 mg/kg Oral Experimental result, Key study |
| White mineral oil (petroleum) | NOAEL (Rat(Female, Male), Oral, 90 d): \geq 20,000 ppm(m) Oral Experimental result, Key study NOAEL (Rabbit(Female, Male), Dermal): 1,000 mg/kg Dermal Read-across from supporting substance (structural analogue or surrogate), Key study LOAEL (Rat(Female, Male), Inhalation): 210 mg/m ³ Inhalation Experimental result, Key study |
| Propane | NOAEL (Rat(Female, Male), Inhalation, \geq 28 d): 4,000 ppm(m) Inhalation Experimental result, Key study LOAEL (Rat(Female, Male), Inhalation, \geq 28 d): 12,000 ppm(m) Inhalation Experimental result, Key study |

Skin Corrosion/Irritation

Product: No data available.

Specified substance(s):

Distillates (petroleum), hydrotreated light in vivo (Rabbit): Not irritant Experimental result, Key study

White mineral oil (petroleum) in vivo (Rabbit): Not irritant Experimental result, Key study

Serious Eye Damage/Eye Irritation

Product: No data available.

Specified substance(s):

Distillates (petroleum), hydrotreated light Rabbit, 24 - 72 hrs: Not irritating

White mineral oil (petroleum) Rabbit, 24 - 72 hrs: Not irritating

Respiratory or Skin Sensitization

Product: No data available.

Specified substance(s):

Distillates (petroleum), hydrotreated light Skin sensitization:, in vivo (Guinea pig): Non sensitising

White mineral oil (petroleum) Skin sensitization:, in vivo (Guinea pig): Non sensitising

Carcinogenicity

Product: No data available.

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified



US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):
No carcinogenic components identified

Germ Cell Mutagenicity

In vitro
Product: No data available.

In vivo
Product: No data available.

Reproductive toxicity
Product: No data available.

Specific Target Organ Toxicity - Single Exposure
Product: No data available.

Specific Target Organ Toxicity - Repeated Exposure
Product: No data available.

Aspiration Hazard
Product: No data available.

Specified substance(s):
Distillates (petroleum),
hydrotreated light
White mineral oil
(petroleum)
May be fatal if swallowed and enters airways.
May be fatal if swallowed and enters airways.

Other effects: No data available.

12. Ecological information

Ecotoxicity:

Acute hazards to the aquatic environment:

Fish
Product: No data available.

Specified substance(s):
Butane LC 50 (Various, 96 h): 147.54 mg/l QSAR QSAR, Key study
Distillates (petroleum),
hydrotreated light LC 50 (Rainbow trout,donaldson trout (Oncorhynchus mykiss), 96 h): 2.9
mg/l Mortality
NOAEL (Oncorhynchus mykiss, 96 h): 2 mg/l Experimental result, Key study
White mineral oil NOAEL (Oncorhynchus mykiss, 96 h): >= 100 mg/l Experimental result, Key



| | |
|--------------------------------|---|
| (petroleum) | study LL 50 (Oncorhynchus mykiss, 96 h): > 100 mg/l Experimental result, Key study |
| Propane | LC 50 (Various, 96 h): 147.54 mg/l QSAR QSAR, Key study |
| Siloxanes and Silicones, di-Me | LC 50 (Redear sunfish (Lepomis microlophus), 96 h): 26.27 - 56.73 mg/l Mortality |

Aquatic Invertebrates

Product: No data available.

Specified substance(s):

| | |
|---|--|
| Butane | LC 50 (Daphnia sp., 48 h): 69.43 mg/l QSAR QSAR, Key study |
| Distillates (petroleum), hydrotreated light | EC 50 (Daphnia magna, 24 h): 4.6 mg/l Experimental result, Key study NOAEL (Daphnia magna, 48 h): 0.3 mg/l Experimental result, Key study EC 50 (Daphnia magna, 48 h): 1.4 mg/l Experimental result, Key study |
| White mineral oil (petroleum) | NOAEL (Daphnia magna, 48 h): >= 100 mg/l Experimental result, Key study |
| Siloxanes and Silicones, di-Me | LC 50 (Water flea (Daphnia magna), 48 h): 44.5 mg/l Mortality |

Chronic hazards to the aquatic environment:

Fish

Product: No data available.

Specified substance(s):

| | |
|---|--|
| Distillates (petroleum), hydrotreated light | NOAEL (Oncorhynchus mykiss): 0.098 mg/l QSAR QSAR, Key study |
| White mineral oil (petroleum) | NOAEL (Oncorhynchus mykiss): >= 1,000 mg/l QSAR QSAR, Supporting study |

Aquatic Invertebrates

Product: No data available.

Specified substance(s):

| | |
|---|---|
| Distillates (petroleum), hydrotreated light | NOAEL (Daphnia magna): 1.2 mg/l Experimental result, Key study EC 50 (Daphnia magna): 0.81 mg/l Experimental result, Key study |
| White mineral oil (petroleum) | NOAEL (Daphnia magna): >= 1,000 mg/l QSAR QSAR, Supporting study |

Toxicity to Aquatic Plants

Product: No data available.

Persistence and Degradability

Biodegradation

Product: No data available.

Specified substance(s):



| | |
|--|--|
| Butane | 100 % (385.5 h) Detected in water. Experimental result, Key study 50 % (3.19 d) Detected in water. QSAR, Weight of Evidence study |
| Distillates (petroleum), hydrotreated light | 61 % Detected in water. Experimental result, Supporting study |
| White mineral oil (petroleum) | 31 % (28 d) Detected in water. Read-across from supporting substance (structural analogue or surrogate), Supporting study |
| Propane | 100 % (385.5 h) Detected in water. Experimental result, Key study 50 % (3.19 d) Detected in water. QSAR, Weight of Evidence study |

BOD/COD Ratio

Product: No data available.

Bioaccumulative potential

Bioconcentration Factor (BCF)

Product: No data available.

Partition Coefficient n-octanol / water (log Kow)

Product: No data available.

Mobility in soil: No data available.

Known or predicted distribution to environmental compartments

| | |
|--|--------------------|
| Butane | No data available. |
| Distillates (petroleum), hydrotreated light | No data available. |
| White mineral oil (petroleum) | No data available. |
| Propane | No data available. |
| Siloxanes and Silicones, di- Me | No data available. |

Other adverse effects: Harmful to aquatic organisms.

13. Disposal considerations

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws.

Contaminated Packaging: No data available.



14. Transport information

DOT

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| UN Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es) | |
| Class: | 2.1 |
| Label(s): | – |
| Packing Group: | II |
| Marine Pollutant: | No |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

IMDG

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| UN Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es) | |
| Class: | 2 |
| Label(s): | – |
| EmS No.: | |
| Packing Group: | – |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

IATA

| | |
|-------------------------------|---------------------|
| UN Number: | UN 1950 |
| Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es): | |
| Class: | 2.1 |
| Label(s): | – |
| Packing Group: | – |
| Environmental Hazards: | No |
| Marine Pollutant | No |
| Special precautions for user: | Not regulated. |

15. Regulatory information

US Federal Regulations

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

None present or none present in regulated quantities.



CERCLA Hazardous Substance List (40 CFR 302.4):

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Butane | lbs. 100 |
| Propane | lbs. 100 |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Fire Hazard
Immediate (Acute) Health Hazards
Flammable aerosol
Aspiration Hazard

SARA 302 Extremely Hazardous Substance

None present or none present in regulated quantities.

SARA 304 Emergency Release Notification

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Butane | lbs. 100 |
| Propane | lbs. 100 |

SARA 311/312 Hazardous Chemical

| <u>Chemical Identity</u> | <u>Threshold Planning Quantity</u> |
|--|------------------------------------|
| Butane | 10000 lbs |
| Distillates (petroleum), hydrotreated light | 10000 lbs |
| White mineral oil (petroleum) | 10000 lbs |
| Propane | 10000 lbs |
| Siloxanes and Silicones, di-Me | 10000 lbs |

SARA 313 (TRI Reporting)

None present or none present in regulated quantities.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130):

Clean Water Act Section 311 Hazardous Substances (40 CFR 117.3)

US State Regulations

US. California Proposition 65

No ingredient requiring a warning under CA Prop 65.

US. New Jersey Worker and Community Right-to-Know Act

Chemical Identity

Butane
Distillates (petroleum), hydrotreated light
White mineral oil (petroleum)
Propane

US. Massachusetts RTK - Substance List

No ingredient regulated by MA Right-to-Know Law present.



US. Pennsylvania RTK - Hazardous Substances

Chemical Identity

Butane
Distillates (petroleum), hydrotreated light
White mineral oil (petroleum)
Propane

US. Rhode Island RTK

No ingredient regulated by RI Right-to-Know Law present.

International regulations

Montreal protocol

Not applicable

Stockholm convention

Not applicable

Rotterdam convention

Not applicable

Kyoto protocol

Not applicable



Inventory Status:

| | |
|--|--|
| Australia AICS: | On or in compliance with the inventory |
| Canada DSL Inventory List: | On or in compliance with the inventory |
| EINECS, ELINCS or NLP: | Not in compliance with the inventory. |
| Japan (ENCS) List: | Not in compliance with the inventory. |
| China Inv. Existing Chemical Substances: | On or in compliance with the inventory |
| Korea Existing Chemicals Inv. (KECI): | On or in compliance with the inventory |
| Canada NDSL Inventory: | Not in compliance with the inventory. |
| Philippines PICCS: | On or in compliance with the inventory |
| US TSCA Inventory: | On or in compliance with the inventory |
| New Zealand Inventory of Chemicals: | On or in compliance with the inventory |
| Japan ISHL Listing: | Not in compliance with the inventory. |
| Japan Pharmacopoeia Listing: | Not in compliance with the inventory. |
| Mexico INSQ: | Not in compliance with the inventory. |
| Ontario Inventory: | On or in compliance with the inventory |
| Taiwan Chemical Substance Inventory: | On or in compliance with the inventory |

16. Other information, including date of preparation or last revision

| | |
|------------------------------|---|
| Issue Date: | 06/10/2019 |
| Revision Information: | No data available. |
| Version #: | 1.0 |
| Further Information: | No data available. |
| Disclaimer: | This information is provided without warranty. The information is believed to be correct. This information should be used to make an independent determination of the methods to safeguard workers and the environment. |



SECTION 1 - IDENTIFICATION

Table with 2 columns: Manufacturer information (Black Swan Mfg. Co., Chicago, IL) and Contact information (INFOTRAC, 800-535-5053 OR 352-323-3500). Product Name: All Purpose Primer/Cleaner (Clear). Recommended Use: Used to soften and prepare all PVC and CPVC pipe and fittings.

SECTION 2 - HAZARD(S) IDENTIFICATION

Labels: Health Hazard, Flammable. Signal Word: Danger. HMIS: Health 2, Flammability 3, Reactivity 0. NFPA: Health Hazard 3, Fire Hazard 2, Specific Hazard 0. GHS Classification: Health (Acute Toxicity Cat. 4, Skin Irritation Cat. 3, Eye Irritation Cat. 2B, Skin Sensitization NO), Environmental (Acute Aquatic Toxicity Not Established, Chronic Aquatic Toxicity Not Established), Physical (Flammability Cat. 2). Hazardous Statements: H225, H304, H312, H319, H332, H335, H336. Precautionary Statements: P102, P210, P233/P235, P243, P261, P262, P264, P270, P271, P280/P284.

SECTION 3 - COMPOSITION / INFORMATION ON INGREDIENTS

Table with 5 columns: Hazardous Chemicals, CAS#, EINECS#, REACH Pre-registration Number, Approx %. Rows include TETRAHYDROFURAN, METHYL ETHYL KETONE, CYCLOHEXANONE, and ACETONE.

SECTION 4 - FIRST-AID MEASURES

Inhalation: Move into fresh air. If not breathing, give artificial respiration. Skin: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. Eyes: Flush with water for 15 minutes. Ingestion: Give 1 or 2 glasses of water. DO NOT INDUCE VOMITING.

GHS SAFETY DATA SHEET

SECTION 5 – FIRE-FIGHTING MEASURES

Fire Hazard: Highly flammable liquid and vapor. Keep away from heat and all sources of ignition including sparks, flames, lighted cigarettes and pilot lights. Containers may rupture or explode in the heat of a fire. Vapors are heavier than air and may travel to a remote ignition source and flash back.

Combustion Products: Combustion will produce toxic and irritating vapors including carbon monoxide, carbon dioxide and hydrogen chloride.

Extinguishing Media: Carbon Dioxide Gas, Dry Chemical Powder, Foam.

Unsuitable Extinguishing Media: Water Spray, Water Stream.

Protective Equipment: Self-contained breathing apparatus {(SCBA), MSHA/NIOSH}. Full protective gear.

Special Fire Fighting Procedures: Evacuate enclosed areas, stay upwind. Closed or confined quarters require self-contained breathing apparatus, positive pressure hose masks or airline masks. Use water spray to cool containers, to flush spills from sources of ignition and to disperse vapors.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Personal Precautions: Prevent contact with skin or eyes. Personnel cleaning up the spill should wear appropriate personal protective equipment, including respirators if vapor concentrations are high.

Protective Equipment: Wear suitable respiratory protective equipment.

Emergency Procedures: Remove all sources of ignition and ventilate area. For leaks, stop leak if it can be done safely. Evacuate area and keep unnecessary and unprotected personnel from entering the spill area.

Environmental Precautions: Avoid runoff into storm sewers, ditches and waterways.

Methods for Cleaning Up: Soak up spill with an inert absorbent such as sand, earth or other noncombusting material. Transfer absorbent material to a covered, labeled, metal container. Do not use plastic or aluminum containers.

SECTION 7 – HANDLING AND STORAGE

Handling

Avoid contact with eyes, skin and clothing. Avoid prolonged breathing of vapor and mist. Use with adequate ventilation. Wash thoroughly after handling. Do not eat, drink or smoke in the work area. Keep products away from heat, sparks, flames and all other sources of ignition. Keep containers closed when not in use.

Storage

Store in a cool, dry, well-ventilated area away from incompatible materials. Store in shade between 40°F – 110°F. Keep container closed when not in use. Keep away from heat, sparks, open flame and other sources of ignition. **Incompatible Materials:** caustics, ammonia, inorganic acids, chlorinated compounds, amines, strong oxidizers and isocyanates.

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure Limits

| <u>Hazardous Chemicals</u> | <u>ACGIH-TLV</u> | <u>ACGIH-STEL</u> | <u>OSHA-PEL</u> |
|----------------------------|------------------|-------------------|-----------------|
| TETRAHYDROFURAN | 50 ppm | 100 ppm | 200 ppm |
| METHYL ETHYL KETONE | 200 ppm | 300 ppm | 200 ppm |
| CYCLOHEXANONE | 20 ppm | 50 ppm | 50 ppm |
| ACETONE | 500 ppm | 750 ppm | 1000 ppm |

Engineering Controls: A source of running water to flush or wash the eyes and skin in case of contact. Use local exhaust as needed.

Ventilation: Local ventilation is adequate. Use only explosion proof ventilation equipment.

Personal Protective Equipment – Respiratory: Atmospheric levels should be maintained below established exposure limits. If airborne concentrations exceed those limits, use of a NIOSH approved organic vapor cartridge respirator with full face-piece is recommended. The effectiveness of an air purifying respirator is limited. Use it only for a single short-term exposure. For emergency and other conditions where short term exposure guidelines may be exceeded, use an approved positive pressure self-contained breathing apparatus.

Personal Protective Equipment – Skin: Prevent contact with skin. Butyl rubber gloves should be used.

Personal Protective Equipment – Eyes: Use glasses with side shield or splash proof goggles.

SECTION 9 – PHYSICAL & CHEMICAL PROPERTIES

| | | | | | |
|------------------------|-----------------|--------------------------|--------------------------------------|-----------------------------|----------------|
| Appearance: | Clear Liquid | Flash Point: | -4°F | Vapor Pressure: | 190mm Hg @20°C |
| Odor: | Ketone | Specific Gravity: | 0.81 ± 0.02 @ 20°C | Flammability: | Category 2 |
| pH: | Not Established | Solubility (H2O): | Solvent-Complete, Resin-Precipitates | Flammability Limits: | LEL - 1.8% |
| Melting Point: | Not Established | Evaporation Rate: | >1.0 (BUAC=1) | | UEL – 11.8% |
| Freezing Point: | Not Established | Vapor Density: | >2.00 (AIR=1) | | |
| Boiling Point: | 133°F (56°C) | VOC: | 550 g/l | | |

GHS SAFETY DATA SHEET

SECTION 10 – STABILITY AND REACTIVITY

Stability: Stable.

Hazardous polymerization: Will not occur.

Conditions to avoid: Keep away from heat, sparks, open flame and other sources of ignition.

Incompatible materials: Caustics, ammonia, inorganic acids, chlorinated compounds, amines, strong oxidizers and isocyanates.

Hazardous decomposition products: When forced to burn, this product gives out carbon monoxide, carbon dioxide, hydrogen chloride and smoke.

SECTION 11 – TOXICOLOGICAL INFORMATION

| <u>Hazardous Chemicals</u> | <u>Toxicity</u> | |
|----------------------------|---|---|
| | <u>LD₅₀</u> | <u>LC₅₀</u> |
| TETRAHYDROFURAN | Oral: 2842 mg/kg (rat) | Inhalation: 3 hrs., 21000 mg/m ³ (rat) |
| METHYL ETHYL KETONE | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation: 8 hrs., 23500 mg/m ³ (rat) |
| CYCLOHEXANONE | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation: 4 hrs., 8000 ppm (rat) |
| ACETONE | Oral: 5800 mg/kg (rat) | Inhalation: 50100 mg/m ³ (rat) |

Likely Routes of Exposure: Inhalation, Skin Contact and Eye Contact.

Symptoms and Effect - Inhalation: Severe overexposure may result in nausea, dizziness, and headaches. Can cause drowsiness, irritation of eyes and nasal passages. **Skin Contact:** Liquid contact may remove natural skin oils resulting in irritation. Dermatitis may occur with prolonged contact. **Eye Contact:** Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid. **Ingestion:** May cause nausea, vomiting, diarrhea and mental sluggishness.

Long-Term Effect: None known.

Pre-Existing Conditions: Individuals with pre-existing diseases of the eyes, skin or respiratory system may have increased susceptibility to the toxicity of excessive exposure.

SECTION 12 – ECOLOGICAL INFORMATION

Ecotoxicity: None known.

Persistence & Degradability: Biodegradable.

Bioaccumulative Potential: None known.

Mobility in soil: In normal use, emission of Volatile Organic Compounds (VOC's) to the air takes place, typically at a rate of ≤ 550 g/l.

SECTION 13 – DISPOSAL CONSIDERATION

Dispose of product or container in accordance with federal, state or local regulations.

SECTION 14 – TRANSPORTATION INFORMATION

Shipping Information

Shipping Name: Adhesives, Containing a Flammable Liquid

Hazardous Class: 3

I.D. Number: UN1133

Packing Group: II

Label Required: Flammable Liquid

Marine Pollutant: No

Exception to the rule: If the package that contains the hazardous material is in a small consumer size (Less than 1L), then the rules that apply to shipping hazardous materials do not apply. This is called an "Exception".

This is classified as Consumer Commodity ORM-D.

SECTION 15 – REGULATORY INFORMATION

Precautionary Label Information: Highly Flammable, Irritant and Health Hazard.

Risk Phrases: **R11**-Highly Flammable. **R36/37**-Irritant to eyes and respiratory system. **R66**-Repeated exposure may cause skin dryness or cracking. **R67**-Vapors may cause drowsiness and dizziness.

Safety Phrases: **S2**-Keep out of reach of children. **S9**-Keep container in a well-ventilated place. **S16**-Keep away from sources of ignition-No smoking. **S25**-Avoid contact with eyes. **S26**-In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. **S33**-Take precautionary measures against static discharges.

SECTION 16 – OTHER INFORMATION

Information on this form is furnished solely for the purpose of compliance with the Occupational Safety and Health Act and shall not be used for any other purpose. Black Swan Mfg. Co. urges the customers receiving this Material Safety Data Sheet to study it carefully to become aware of the hazards, if any, of the product involved. In the interest of safety, you should notify your employees, agents and contractors of the information on the sheets.

DATE: 01/01/2019



SAFETY DATA SHEET

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Trade name or designation of the mixture LPS® ZeroTri®
Registration number -
Synonyms None.
Part Number M03528, M03505, M03555
Issue date 16-September-2015
Version number 01

1.2. Relevant identified uses of the substance or mixture and uses advised against

Identified uses An industrial degreaser designed to remove oil, grease, wax, moisture, dirt or other contaminants from parts and equipments.
Uses advised against None known.

1.3. Details of the supplier of the safety data sheet

Supplier AlSCO Ltd
Company name Unit 13 Hillmead Industrial Estate
Address Marshall Road
Swindon, Wiltshire
United Kingdom SN5 5FZ
Telephone +44 1793 733 900
In Case of Emergency +001 703-527-3887
Manufacturer
Company name ITW Pro Brands
Address 4647 Hugh Howell Rd., Tucker, GA 30084 (U.S.A.)
Website <http://www.lpslabs.com>
e-mail lpssds@itwprobrands.com

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

The mixture has been assessed and/or tested for its physical, health and environmental hazards and the following classification applies.

Classification according to Directive 67/548/EEC or 1999/45/EC as amended

Classification F;R11, Xn;R65, Xi;R36/38, R67, N;R50/53

The full text for all R-phrases is displayed in section 16.

Classification according to Regulation (EC) No 1272/2008 as amended

Physical hazards

| | | |
|-------------------|------------|--|
| Flammable liquids | Category 2 | H225 - Highly flammable liquid and vapour. |
|-------------------|------------|--|

Health hazards

| | | |
|--|-----------------------------|--|
| Skin corrosion/irritation | Category 2 | H315 - Causes skin irritation. |
| Serious eye damage/eye irritation | Category 2 | H319 - Causes serious eye irritation. |
| Specific target organ toxicity - single exposure | Category 3 narcotic effects | H336 - May cause drowsiness or dizziness. |
| Aspiration hazard | Category 1 | H304 - May be fatal if swallowed and enters airways. |

Environmental hazards

| | | |
|--|------------|--|
| Hazardous to the aquatic environment, acute aquatic hazard | Category 1 | H400 - Very toxic to aquatic life. |
| Hazardous to the aquatic environment, long-term aquatic hazard | Category 1 | H410 - Very toxic to aquatic life with long lasting effects. |

Hazard summary

| | |
|------------------------------|--|
| Physical hazards | Highly flammable. |
| Health hazards | Irritating to eyes and skin. Harmful: may cause lung damage if swallowed. Vapours may cause drowsiness and dizziness. Occupational exposure to the substance or mixture may cause adverse health effects. |
| Environmental hazards | Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. |
| Specific hazards | Highly flammable. Irritating to eyes and skin. Harmful: may cause lung damage if swallowed. Do not breathe dust/fume/gas/mist/vapors/spray. |
| Main symptoms | Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Skin irritation. May cause redness and pain. Vapours have a narcotic effect and may cause headache, fatigue, dizziness and nausea. |

2.2. Label elements

Label according to Regulation (EC) No. 1272/2008 as amended

Contains: Acetone, Cyclohexylmethane, Heptane, Primary Amyl Acetate

Hazard pictograms



Signal word

Danger

Hazard statements

| | |
|------|---|
| H225 | Highly flammable liquid and vapour. |
| H304 | May be fatal if swallowed and enters airways. |
| H315 | Causes skin irritation. |
| H319 | Causes serious eye irritation. |
| H336 | May cause drowsiness or dizziness. |
| H400 | Very toxic to aquatic life. |
| H410 | Very toxic to aquatic life with long lasting effects. |

Precautionary statements

Prevention

| | |
|------|--|
| P210 | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. |
| P233 | Keep container tightly closed. |
| P240 | Ground/bond container and receiving equipment. |
| P241 | Use explosion-proof electrical/ventilating/lighting equipment. |
| P242 | Use only non-sparking tools. |
| P243 | Take precautionary measures against static discharge. |
| P261 | Avoid breathing mist or vapour. |
| P264 | Wash thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P273 | Avoid release to the environment. |
| P280 | Wear protective gloves/eye protection/face protection. |

Response

| | |
|--------------------|--|
| P370 + P378 | In case of fire: Use appropriate media for extinction. |
| P301 + P310 | IF SWALLOWED: Immediately call a POISON CENTRE or doctor/physician. |
| P303 + P361 + P353 | IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. |
| P304 + P340 | IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. |
| P305 + P351 + P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P312 | Call a POISON CENTRE or doctor/physician if you feel unwell. |
| P321 | Specific treatment (see this label). |
| P331 | Do NOT induce vomiting. |
| P332 + P313 | If skin irritation occurs: Get medical advice/attention. |
| P337 + P313 | If eye irritation persists: Get medical advice/attention. |
| P362 | Take off contaminated clothing and wash before reuse. |
| P391 | Collect spillage. |

Storage

| | |
|-------------|--|
| P235 | Keep cool. |
| P403 + P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |

Disposal

| | |
|------|---|
| P501 | Dispose of contents/container in accordance with local/regional/national/international regulations. |
|------|---|

Supplemental label information None.

2.3. Other hazards None known.

SECTION 3: Composition/information on ingredients

3.2. Mixtures

General information

| Chemical name | % | CAS-No. / EC No. | REACH Registration No. | INDEX No. | Notes |
|------------------------|---------|---|------------------------|--------------|-------|
| Acetone | 30 - 40 | 67-64-1 200-662-2 | - | 606-001-00-8 | # |
| Classification: | | DSD: F;R11, Xi;R36, R66-67 | | | |
| | | CLP: Flam. Liq. 2;H225, Eye Irrit. 2;H319, STOT SE 3;H336 | | | |
| Heptane | 30 - 40 | 142-82-5 205-563-8 | - | 601-008-00-2 | # |
| Classification: | | DSD: F;R11, Xn;R65, Xi;R38, R67, N;R50/53 | | | C |
| | | CLP: Flam. Liq. 2;H225, Asp. Tox. 1;H304, Skin Irrit. 2;H315, STOT SE 3;H336, Aquatic Acute 1;H400, Aquatic Chronic 1;H410 | | | C |
| Cyclohexylmethane | 20 - 30 | 108-87-2 203-624-3 | - | 601-018-00-7 | |
| Classification: | | DSD: F;R11, Xn;R65, Xi;R38, R67, N;R51/53 | | | |
| | | CLP: Flam. Liq. 2;H225, Asp. Tox. 1;H304, Skin Irrit. 2;H315, Acute Tox. 4;H332, STOT SE 3;H336, Aquatic Chronic 2;H411 | | | |
| Primary Amyl Acetate | 1 - 5 | 628-63-7 211-047-3 | - | 607-130-00-2 | # |
| Classification: | | DSD: R10, R66 | | | C |
| | | CLP: Flam. Liq. 3;H226, Aquatic Chronic 3;H412 | | | C |

List of abbreviations and symbols that may be used above

CLP: Regulation No. 1272/2008.

DSD: Directive 67/548/EEC.

M: M-factor

vPvB: very persistent and very bioaccumulative substance.

PBT: persistent, bioaccumulative and toxic substance.

#: This substance has been assigned Community workplace exposure limit(s).

Note C: Some organic substances may be marketed either in a specific isomeric form or as a mixture of several isomers. In this case the supplier must state on the label whether the substance is a specific isomer or a mixture of isomers.

Composition comments The full text for all R- and H-phrases is displayed in section 16.

SECTION 4: First aid measures

General information

Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

4.1. Description of first aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTRE or doctor/physician if you feel unwell.

Skin contact Take off immediately all contaminated clothing. Rinse skin with water/shower. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.

Ingestion Call a physician or poison control centre immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary oedema and pneumonitis.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

4.3. Indication of any immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

SECTION 5: Firefighting measures

| | |
|---|--|
| General fire hazards | Highly flammable liquid and vapour. |
| 5.1. Extinguishing media | |
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| 5.2. Special hazards arising from the substance or mixture | Vapours may form explosive mixtures with air. Vapours may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| 5.3. Advice for firefighters | |
| Special protective equipment for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Special fire fighting procedures | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |

SECTION 6: Accidental release measures

| | |
|---|---|
| 6.1. Personal precautions, protective equipment and emergency procedures | |
| For non-emergency personnel | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid inhalation of vapours or mists. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. Use personal protection recommended in Section 8 of the SDS. |
| For emergency responders | Keep unnecessary personnel away. Wear appropriate protective equipment and clothing during clean-up. Use personal protection recommended in Section 8 of the SDS. |
| 6.2. Environmental precautions | Avoid release to the environment. Contact local authorities in case of spillage to drain/aquatic environment. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground. |
| 6.3. Methods and material for containment and cleaning up | Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil etc) away from spilled material. Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water. Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. |
| 6.4. Reference to other sections | Use personal protection recommended in Section 8 of the SDS. For waste disposal, see section 13. |

SECTION 7: Handling and storage

| | |
|--|--|
| 7.1. Precautions for safe handling | Vapours may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. When using do not smoke. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapour. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Provide adequate ventilation. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices. Avoid release to the environment. Do not empty into drains. |
| 7.2. Conditions for safe storage, including any incompatibilities | Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. Refrigeration recommended. Store away from incompatible materials (see Section 10 of the SDS). Keep in an area equipped with sprinklers. |
| 7.3. Specific end use(s) | Not available. |

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Occupational exposure limits**Austria. MAK List, OEL Ordinance (GwV), BGBl. II, no. 184/2001**

| Components | Type | Value |
|-------------------------------------|-------------|------------------------------------|
| Acetone (CAS 67-64-1) | MAK | 1200 mg/m ³ 500 ppm |
| | STEL | 4800 mg/m ³ 2000 ppm |
| Cyclohexylmethane (CAS 108-87-2) | MAK | 1600 mg/m ³ 400 ppm |
| | STEL | 6400 mg/m ³ 1600 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | MAK | 270 mg/m ³ 50 ppm |
| | STEL | 540 mg/m ³ 100 ppm |

Belgium. Exposure Limit Values.

| Components | Type | Value |
|-------------------------------------|-------------|------------------------------------|
| Acetone (CAS 67-64-1) | STEL | 2420 mg/m ³ 1000 ppm |
| | TWA | 1210 mg/m ³ 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 1633 mg/m ³ 400 ppm |
| | STEL | 2085 mg/m ³ 500 ppm |
| Heptane (CAS 142-82-5) | TWA | 1664 mg/m ³ 400 ppm |
| | STEL | 540 mg/m ³ 100 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | TWA | 270 mg/m ³ 50 ppm |

Bulgaria. OELs. Regulation No 13 on protection of workers against risks of exposure to chemical agents at work

| Components | Type | Value |
|-------------------------------------|-------------|---|
| Acetone (CAS 67-64-1) | STEL | 1400 mg/m ³ 600 mg/m ³ |
| | TWA | 500 mg/m ³ |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 500 mg/m ³ |
| Heptane (CAS 142-82-5) | TWA | 1600 mg/m ³ |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m ³ 100 ppm |
| | TWA | 270 mg/m ³ 50 ppm |

Croatia. Dangerous Substance Exposure Limit Values in the Workplace (ELVs), Annexes 1 and 2, Narodne Novine, 13/09

| Components | Type | Value |
|-------------------------------------|-------------|------------------------------------|
| Acetone (CAS 67-64-1) | MAC | 1210 mg/m ³ 500 ppm |
| | STEL | 3620 mg/m ³ 1500 ppm |
| Heptane (CAS 142-82-5) | MAC | 2085 mg/m ³ 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | MAC | 270 mg/m ³ 50 ppm |
| | STEL | 540 mg/m ³ 100 ppm |

Czech Republic. OELs. Government Decree 361

| Components | Type | Value |
|-------------------------------------|---------|------------|
| Acetone (CAS 67-64-1) | Ceiling | 1500 mg/m3 |
| | TWA | 800 mg/m3 |
| Cyclohexylmethane (CAS 108-87-2) | Ceiling | 2000 mg/m3 |
| | TWA | 1500 mg/m3 |
| Heptane (CAS 142-82-5) | Ceiling | 2000 mg/m3 |
| | TWA | 1000 mg/m3 |
| Primary Amyl Acetate (CAS 628-63-7) | Ceiling | 540 mg/m3 |
| | TWA | 270 mg/m3 |

Denmark. Exposure Limit Values

| Components | Type | Value |
|-------------------------------------|------|-----------|
| Acetone (CAS 67-64-1) | TLV | 600 mg/m3 |
| | | 250 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TLV | 805 mg/m3 |
| | | 200 ppm |
| Heptane (CAS 142-82-5) | TLV | 820 mg/m3 |
| | | 200 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | TLV | 271 mg/m3 |
| | | 50 ppm |

Estonia. OELs. Occupational Exposure Limits of Hazardous Substances. (Annex of Regulation No. 293 of 18 September 2001)

| Components | Type | Value |
|----------------------------------|------|------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m3 |
| | | 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 1600 mg/m3 |
| | | 400 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m3 |
| | | 500 ppm |

Finland. Workplace Exposure Limits

| Components | Type | Value |
|-------------------------------------|------|------------|
| Acetone (CAS 67-64-1) | STEL | 1500 mg/m3 |
| | TWA | 630 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 1200 mg/m3 |
| | STEL | 500 ppm |
| Heptane (CAS 142-82-5) | TWA | 1600 mg/m3 |
| | STEL | 400 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 2100 mg/m3 |
| | TWA | 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 1200 mg/m3 |
| | TWA | 300 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m3 |
| | TWA | 100 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | TWA | 270 mg/m3 |
| | TWA | 50 ppm |

France. Threshold Limit Values (VLEP) for Occupational Exposure to Chemicals in France, INRS ED 984

| Components | Type | Value |
|----------------------------------|------|------------|
| Acetone (CAS 67-64-1) | VLE | 2420 mg/m3 |
| | VME | 1000 ppm |
| Cyclohexylmethane (CAS 108-87-2) | VME | 1210 mg/m3 |
| | VME | 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | VME | 1600 mg/m3 |
| | VME | 400 ppm |

France. Threshold Limit Values (VLEP) for Occupational Exposure to Chemicals in France, INRS ED 984

| Components | Type | Value |
|-------------------------------------|------|-----------------------|
| Heptane (CAS 142-82-5) | VLE | 2085 mg/m3 500 ppm |
| | VME | 1668 mg/m3 400 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | VLE | 540 mg/m3 100 ppm |
| | VME | 270 mg/m3 50 ppm |

Germany. DFG MAK List (advisory OELs). Commission for the Investigation of Health Hazards of Chemical Compounds in the Work Area (DFG)

| Components | Type | Value |
|-------------------------------------|------|-----------------------|
| Acetone (CAS 67-64-1) | TWA | 1200 mg/m3 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 810 mg/m3 200 ppm |
| Heptane (CAS 142-82-5) | TWA | 2100 mg/m3 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | TWA | 270 mg/m3 50 ppm |

Germany. TRGS 900, Limit Values in the Ambient Air at the Workplace

| Components | Type | Value |
|-------------------------------------|------|-----------------------|
| Acetone (CAS 67-64-1) | AGW | 1200 mg/m3 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | AGW | 810 mg/m3 200 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | AGW | 270 mg/m3 50 ppm |

Greece. OELs (Decree No. 90/1999, as amended)

| Components | Type | Value |
|-------------------------------------|------|---------------------------------|
| Acetone (CAS 67-64-1) | STEL | 3560 mg/m3 |
| | TWA | 1780 mg/m3 |
| Cyclohexylmethane (CAS 108-87-2) | STEL | 2000 mg/m3 |
| | TWA | 500 ppm 2000 mg/m3 |
| Heptane (CAS 142-82-5) | STEL | 500 ppm 2000 mg/m3 |
| | TWA | 2000 mg/m3 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 800 mg/m3 |
| | TWA | 150 ppm 530 mg/m3 100 ppm |

Hungary. OELs. Joint Decree on Chemical Safety of Workplaces

| Components | Type | Value |
|-------------------------------------|------|------------|
| Acetone (CAS 67-64-1) | STEL | 2420 mg/m3 |
| | TWA | 1210 mg/m3 |
| Heptane (CAS 142-82-5) | STEL | 8000 mg/m3 |
| | TWA | 2000 mg/m3 |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m3 |
| | TWA | 270 mg/m3 |

Iceland. OELs. Regulation 154/1999 on occupational exposure limits

| Components | Type | Value |
|-------------------------------------|------|--------------------------------|
| Acetone (CAS 67-64-1) | TWA | 600 mg/m3 |
| | | 250 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 805 mg/m3 |
| | | 200 ppm |
| Heptane (CAS 142-82-5) | TWA | 820 mg/m3 |
| | | 200 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m3 |
| | TWA | 100 ppm 266 mg/m3 50 ppm |

Ireland. Occupational Exposure Limits

| Components | Type | Value |
|-------------------------------------|------|--------------------------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m3 |
| | | 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 1600 mg/m3 |
| | | 400 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m3 |
| | | 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m3 |
| | TWA | 100 ppm 270 mg/m3 50 ppm |

Italy. Occupational Exposure Limits

| Components | Type | Value |
|-------------------------------------|------|--------------------------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m3 |
| | | 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 400 ppm |
| | | 2085 mg/m3 |
| Heptane (CAS 142-82-5) | TWA | 500 ppm |
| | | 540 mg/m3 |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m3 |
| | TWA | 100 ppm 270 mg/m3 50 ppm |

Latvia. OELs. Occupational exposure limit values of chemical substances in work environment

| Components | Type | Value |
|-------------------------------------|------|--------------------------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m3 |
| | | 500 ppm |
| Heptane (CAS 142-82-5) | STEL | 2085 mg/m3 |
| | TWA | 500 ppm 350 mg/m3 85 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m3 |
| | TWA | 100 ppm 270 mg/m3 50 ppm |

Lithuania. OELs. Limit Values for Chemical Substances, General Requirements

| Components | Type | Value |
|----------------------------------|------|------------|
| Acetone (CAS 67-64-1) | STEL | 2420 mg/m3 |
| | TWA | 1000 ppm |
| | | 1210 mg/m3 |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 500 ppm |
| | | 50 mg/m3 |
| Heptane (CAS 142-82-5) | STEL | 3128 mg/m3 |

Lithuania. OELs. Limit Values for Chemical Substances, General Requirements

| Components | Type | Value |
|-------------------------------------|------|------------------------|
| Primary Amyl Acetate (CAS 628-63-7) | TWA | 750 ppm |
| | | 2085 mg/m ³ |
| | STEL | 500 ppm |
| | | 540 mg/m ³ |
| | TWA | 100 ppm |
| | | 270 mg/m ³ |
| 50 ppm | | |

Luxembourg. Binding Occupational exposure limit values (Annex I), Memorial A

| Components | Type | Value |
|-------------------------------------|-----------------------|------------------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m ³ |
| Heptane (CAS 142-82-5) | TWA | 500 ppm |
| | | 2085 mg/m ³ |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 500 ppm |
| | | 540 mg/m ³ |
| TWA | 100 ppm | |
| | 270 mg/m ³ | |
| | 50 ppm | |

Malta. OELs. Occupational Exposure Limit Values (L.N. 227. of Occupational Health and Safety Authority Act (CAP. 424), Schedules I and V)

| Components | Type | Value |
|-------------------------------------|-----------------------|------------------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m ³ |
| Heptane (CAS 142-82-5) | TWA | 500 ppm |
| | | 2085 mg/m ³ |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 500 ppm |
| | | 540 mg/m ³ |
| TWA | 100 ppm | |
| | 270 mg/m ³ | |
| | 50 ppm | |

Netherlands. OELs (binding)

| Components | Type | Value |
|-------------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | STEL | 2420 mg/m ³ |
| | TWA | 1210 mg/m ³ |
| Heptane (CAS 142-82-5) | STEL | 1600 mg/m ³ |
| | TWA | 1200 mg/m ³ |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 530 mg/m ³ |

Norway. Administrative Norms for Contaminants in the Workplace

| Components | Type | Value |
|-------------------------------------|------|-----------------------|
| Acetone (CAS 67-64-1) | TLV | 295 mg/m ³ |
| Cyclohexylmethane (CAS 108-87-2) | TLV | 125 ppm |
| | | 800 mg/m ³ |
| Heptane (CAS 142-82-5) | TLV | 200 ppm |
| | | 800 mg/m ³ |
| Primary Amyl Acetate (CAS 628-63-7) | TLV | 200 ppm |
| | | 260 mg/m ³ |
| | | 50 ppm |

Poland. MACs. Regulation regarding maximum permissible concentrations and intensities of harmful factors in the work environment, Annex 1

| Components | Type | Value |
|----------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | STEL | 1800 mg/m ³ |
| | TWA | 600 mg/m ³ |
| Cyclohexylmethane (CAS 108-87-2) | STEL | 3000 mg/m ³ |
| | TWA | 1600 mg/m ³ |
| Heptane (CAS 142-82-5) | STEL | 2000 mg/m ³ |

Poland. MACs. Regulation regarding maximum permissible concentrations and intensities of harmful factors in the work environment, Annex 1

| Components | Type | Value |
|-------------------------------------|------|------------------------|
| Primary Amyl Acetate (CAS 628-63-7) | TWA | 1200 mg/m ³ |
| | STEL | 500 mg/m ³ |
| | TWA | 250 mg/m ³ |

Portugal. OELs. Decree-Law n. 290/2001 (Journal of the Republic - 1 Series A, n.266)

| Components | Type | Value |
|-------------------------------------|------|--|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m ³ 500 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m ³ 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m ³ |
| | TWA | 100 ppm 270 mg/m ³ 50 ppm |

Portugal. VLEs. Norm on occupational exposure to chemical agents (NP 1796)

| Components | Type | Value |
|-------------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 400 ppm |
| Heptane (CAS 142-82-5) | STEL | 500 ppm |
| | TWA | 400 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 100 ppm |
| | TWA | 50 ppm |

Romania. OELs. Protection of workers from exposure to chemical agents at the workplace

| Components | Type | Value |
|-------------------------------------|------|--|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m ³ 500 ppm |
| | STEL | 1500 mg/m ³ 375 ppm |
| TWA | | 1200 mg/m ³ 211 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m ³ 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 500 mg/m ³ |
| | TWA | 100 ppm 270 mg/m ³ 50 ppm |

Slovakia. OELs. Regulation No. 300/2007 concerning protection of health in work with chemical agents

| Components | Type | Value |
|-------------------------------------|------|--|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m ³ 500 ppm |
| | STEL | 1620 mg/m ³ 400 ppm |
| TWA | | 810 mg/m ³ 200 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m ³ 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m ³ |
| | TWA | 100 ppm 270 mg/m ³ 50 ppm |

Slovenia. OELs. Regulations concerning protection of workers against risks due to exposure to chemicals while working (Official Gazette of the Republic of Slovenia)

| Components | Type | Value |
|-------------------------------------|------|-----------------------------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m ³ 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 2000 mg/m ³ 500 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m ³ 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | TWA | 270 mg/m ³ 50 ppm |

Spain. Occupational Exposure Limits

| Components | Type | Value |
|-------------------------------------|------|-----------------------------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m ³ 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | TWA | 1630 mg/m ³ 400 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m ³ 500 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m ³ 100 ppm |
| | TWA | 270 mg/m ³ 50 ppm |

Sweden. Occupational Exposure Limit Values

| Components | Type | Value |
|-------------------------------------|------|-----------------------------------|
| Acetone (CAS 67-64-1) | STEL | 1200 mg/m ³ 500 ppm |
| | TWA | 600 mg/m ³ 250 ppm |
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 540 mg/m ³ 100 ppm |
| | TWA | 270 mg/m ³ 50 ppm |

Switzerland. SUVA Grenzwerte am Arbeitsplatz

| Components | Type | Value |
|----------------------------------|------|------------------------------------|
| Acetone (CAS 67-64-1) | STEL | 2400 mg/m ³ 1000 ppm |
| | TWA | 1200 mg/m ³ 500 ppm |
| Cyclohexylmethane (CAS 108-87-2) | STEL | 3200 mg/m ³ 800 ppm |
| | TWA | 1600 mg/m ³ 400 ppm |

UK. EH40 Workplace Exposure Limits (WELs)

| Components | Type | Value |
|------------------------|------|------------------------------------|
| Acetone (CAS 67-64-1) | STEL | 3620 mg/m ³ 1500 ppm |
| | TWA | 1210 mg/m ³ 500 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m ³ 500 ppm |

EU. Indicative Exposure Limit Values in Directives 91/322/EEC, 2000/39/EC, 2006/15/EC, 2009/161/EU

| Components | Type | Value |
|------------------------|------|-----------------------------------|
| Acetone (CAS 67-64-1) | TWA | 1210 mg/m ³ 500 ppm |
| Heptane (CAS 142-82-5) | TWA | 2085 mg/m ³ |

EU. Indicative Exposure Limit Values in Directives 91/322/EEC, 2000/39/EC, 2006/15/EC, 2009/161/EU

| Components | Type | Value |
|-------------------------------------|------|-----------|
| Primary Amyl Acetate (CAS 628-63-7) | STEL | 500 ppm |
| | | 540 mg/m3 |
| | TWA | 100 ppm |
| | | 270 mg/m3 |
| | | 50 ppm |

Biological limit values

France. Biological indicators of exposure (IBE) (National Institute for Research and Security (INRS, ND 2065)

| Components | Value | Determinant | Specimen | Sampling time |
|-----------------------|----------|-------------|----------|---------------|
| Acetone (CAS 67-64-1) | 100 mg/l | Acétone | Urine | * |

* - For sampling details, please see the source document.

Germany. TRGS 903, BAT List (Biological Limit Values)

| Components | Value | Determinant | Specimen | Sampling time |
|-----------------------|---------|-------------|----------|---------------|
| Acetone (CAS 67-64-1) | 80 mg/l | Aceton | Urine | * |

* - For sampling details, please see the source document.

Slovakia. BLVs (Biological Limit Value). Regulation no. 355/2006 concerning protection of workers exposed to chemical agents, Annex 2

| Components | Value | Determinant | Specimen | Sampling time |
|-----------------------|------------|-------------|---------------------|---------------|
| Acetone (CAS 67-64-1) | 53,36 mg/g | Acetone | Creatinine in urine | * |
| | 80 mg/l | Acetone | Urine | * |

* - For sampling details, please see the source document.

Spain. Biological Limit Values (VLBs), Occupational Exposure Limits for Chemical Agents, Table 4

| Components | Value | Determinant | Specimen | Sampling time |
|-----------------------|---------|-------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetona | Urine | * |

* - For sampling details, please see the source document.

Switzerland. BAT-Werte (Biological Limit Values in the Workplace as per SUVA)

| Components | Value | Determinant | Specimen | Sampling time |
|-----------------------|---------|-------------|----------|---------------|
| Acetone (CAS 67-64-1) | 80 mg/l | Aceton | Urine | * |

* - For sampling details, please see the source document.

Recommended monitoring procedures Follow standard monitoring procedures.

Derived no-effect level (DNEL) Not available.

Predicted no effect concentrations (PNECs) Not available.

8.2. Exposure controls

Appropriate engineering controls Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

General information Use personal protective equipment as required. Personal protection equipment should be chosen according to the CEN standards and in discussion with the supplier of the personal protective equipment. Eye wash fountain and emergency showers are recommended.

Eye/face protection Wear safety glasses with side shields (or goggles). Eye wash fountain and emergency showers are recommended.

Skin protection

- Hand protection Wear appropriate chemical resistant gloves.

- Other Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Respiratory protection Use a positive-pressure air-supplied respirator if there is any potential for an uncontrolled release, exposure levels are not known, or any other circumstances where air-purifying respirators may not provide adequate protection.

Thermal hazards None known.

| | |
|--|---|
| Hygiene measures | When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |
| Environmental exposure controls | Contain spills and prevent releases and observe national regulations on emissions. Environmental manager must be informed of all major releases. |

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|---|--|
| Appearance | Liquid. |
| Physical state | Liquid. |
| Form | Liquid. |
| Colour | Clear, Colorless. |
| Odour | Ether-like. Fruity. |
| Odour threshold | Not established |
| pH | Not applicable |
| Melting point/freezing point | Not established |
| Initial boiling point and boiling range | > 56 °C (> 132,8 °F) |
| Flash point | -17,0 °C (1,4 °F) Tag closed cup |
| Evaporation rate | > 1 (BuAc = 1) |
| Flammability (solid, gas) | Highly flammable liquid |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1,2 % |
| Flammability limit - upper (%) | 12,8 % |
| Vapour pressure | > 75 mm Hg @ 20°C |
| Vapour density | ~ 3 (air = 1) |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | 35 % w/w |
| Solubility (other) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not established |
| Decomposition temperature | Not established |
| Viscosity | Not established |
| Explosive properties | Not available. |
| Oxidising properties | Not available. |
| 9.2. Other information | |
| Heat of combustion | > 30 kJ/g |
| Percent volatile | 100 % |
| Specific gravity | 0,74 - 0,76 @ 20°C |
| VOC (Weight %) | 65 % per U.S State and Federal Consumer Product Regulations. |

SECTION 10: Stability and reactivity

| | |
|---|--|
| 10.1. Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| 10.2. Chemical stability | Material is stable under normal conditions. |
| 10.3. Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| 10.4. Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| 10.5. Incompatible materials | Acids. Strong oxidising agents. |
| 10.6. Hazardous decomposition products | Carbon oxides. |

SECTION 11: Toxicological information

| | |
|----------------------------|--|
| General information | Occupational exposure to the substance or mixture may cause adverse effects. |
|----------------------------|--|

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | Vapours have a narcotic effect and may cause headache, fatigue, dizziness and nausea. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. |

Symptoms Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. Exposure may cause temporary irritation, redness, or discomfort. Vapours have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Decrease in motor functions. Behavioural changes.

11.1. Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects.

| Components | Species | Test results |
|----------------------------------|----------------|------------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| Dermal | | |
| LD50 | Guinea pig | > 7426 mg/kg, 24 Hours |
| | Rabbit | > 9,4 ml/kg, 24 Hours |
| | | > 7426 mg/kg, 24 Hours |
| | | > 9,4 ml/kg, 24 Hours |
| Inhalation | | |
| <i>Vapour</i> | | |
| LC50 | Rat | 55700 ppm, 3 Hours |
| | | 132 mg/l, 3 Hours |
| LC50 | Rat | 76 mg/l, 4 Hours |
| <i>Vapour</i> | | |
| LC50 | Rat | 50,1 mg/l |
| LC50 | Rat | 50,1 mg/l, 8 Hours |
| Oral | | |
| LD50 | Mouse | 3000 mg/kg |
| | Rabbit | 5340 mg/kg |
| | Rat | 5800 mg/kg |
| | | 2,2 ml/kg |
| Cyclohexylmethane (CAS 108-87-2) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg, 24 Hours |
| Inhalation | | |
| <i>Vapour</i> | | |
| LC100 | Rabbit | 59,9 mg/l |
| LC25 | Rabbit | 7300 ppm |
| <i>Vapour</i> | | |
| LC50 | Dog | > 4071 ppm, 1 Hours |
| | | > 16,3 mg/l, 1 Hours |
| | Mouse | > 6564 ppm, 1 Hours |
| | | > 26,3 mg/l, 1 Hours |
| | Rat | > 6564 ppm, 1 Hours |
| | | > 26,3 mg/l, 1 Hours |
| Heptane (CAS 142-82-5) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg, 24 Hours |

| Components | Species | Test results |
|---|--|-----------------------|
| Inhalation | | |
| <i>Vapour</i> | | |
| LC50 | Rat | > 29,29 mg/l, 4 Hours |
| LD50 | Mouse | 75 mg/l, 2 Hours |
| Oral | | |
| LD50 | Rat | > 5000 mg/kg |
| Skin corrosion/irritation | Causes skin irritation. | |
| Serious eye damage/eye irritation | Causes serious eye irritation. | |
| Respiratory sensitisation | Not a respiratory sensitizer. | |
| Skin sensitisation | This product is not expected to cause skin sensitisation. | |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. | |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. | |
| ACGIH Carcinogens | | |
| Acetone (CAS 67-64-1) | Not classifiable as a human carcinogen. A4 | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. | |
| Specific target organ toxicity - single exposure | Narcotic effects. | |
| Specific target organ toxicity - repeated exposure | Based on available data, the classification criteria are not met. | |
| Aspiration hazard | May be fatal if swallowed and enters airways. | |
| Mixture versus substance information | No information available. | |
| Other information | Not available. | |

SECTION 12: Ecological information

12.1. Toxicity Very toxic to aquatic life with long lasting effects.

| Components | Species | Test results |
|-------------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Crustacea | EC50 | Water flea (<i>Daphnia magna</i>) 10294 - 17704 mg/l, 48 hours |
| Fish | LC50 | Rainbow trout, donaldson trout (<i>Oncorhynchus mykiss</i>) 4740 - 6330 mg/l, 96 hours |
| Cyclohexylmethane (CAS 108-87-2) | | |
| Aquatic | | |
| Fish | LC50 | Striped bass (<i>Morone saxatilis</i>) 5,8 mg/l, 96 hours |
| Heptane (CAS 142-82-5) | | |
| Aquatic | | |
| Fish | LC50 | Mozambique tilapia (<i>Tilapia mossambica</i>) 375 mg/l, 96 hours |
| Primary Amyl Acetate (CAS 628-63-7) | | |
| Aquatic | | |
| Fish | LC50 | Western mosquitofish (<i>Gambusia affinis</i>) 65 mg/l, 96 hours |

12.2. Persistence and degradability Expected to biodegrade.

12.3. Bioaccumulative potential No data available.

Partition coefficient n-octanol/water (log Kow)

| | |
|----------------------|-------|
| Acetone | -0,24 |
| Cyclohexylmethane | 3,61 |
| Heptane | 4,66 |
| Primary Amyl Acetate | 2,3 |

Bioconcentration factor (BCF) Not available.

12.4. Mobility in soil No data available.

12.5. Results of PBT and vPvB assessment Not available.

12.6. Other adverse effects None known.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Residual waste Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

EU waste code The Waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Disposal methods/information Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Special precautions Dispose in accordance with all applicable regulations.

SECTION 14: Transport information

ADR

14.1. UN number UN1993

14.2. UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Heptanes, Acetone)

14.3. Transport hazard class(es)

- Class 3
- Subsidiary risk -
- Label(s) 3
- Hazard No. (ADR) 33
- Tunnel restriction code D/E

14.4. Packing group II

14.5. Environmental hazards Yes

14.6. Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

RID

14.1. UN number UN1993

14.2. UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Heptanes, Acetone)

14.3. Transport hazard class(es)

- Class 3
- Subsidiary risk -
- Label(s) 3

14.4. Packing group II

14.5. Environmental hazards Yes

14.6. Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

ADN

14.1. UN number UN1993

14.2. UN proper shipping name Flammable liquid, n.o.s. (Heptanes, Acetone)

14.3. Transport hazard class(es)

- Class 3
- Subsidiary risk -
- Label(s) 3

14.4. Packing group II

14.5. Environmental hazards Yes

14.6. Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IATA

14.1. UN number UN1993

14.2. UN proper shipping name Flammable liquid, n.o.s. (Heptanes, Acetone)

14.3. Transport hazard class(es)

Class 3

Subsidiary risk -

14.4. Packing group II

14.5. Environmental hazards Yes

ERG Code 3H

14.6. Special precautions Not available.

for user

Other information

Passenger and cargo aircraft Allowed.

Cargo aircraft only Allowed.

IMDG

14.1. UN number UN1993

14.2. UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Heptanes, Acetone), MARINE POLLUTANT

14.3. Transport hazard class(es)

Class 3

Subsidiary risk -

14.4. Packing group II

14.5. Environmental hazards

Marine pollutant Yes

EmS F-E, S-E

14.6. Special precautions Not available.

for user

14.7. Transport in bulk Not available.

according to Annex II of MARPOL 73/78 and the IBC Code

ADN; ADR; IATA; IMDG; RID



Marine pollutant



General information

IMDG Regulated Marine Pollutant.

SECTION 15: Regulatory information

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

EU regulations

Regulation (EC) No. 1005/2009 on substances that deplete the ozone layer, Annex I and II, as amended

Not listed.

Regulation (EC) No. 850/2004 On persistent organic pollutants, Annex I as amended

Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 1 as amended

Not listed.

- Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 2 as amended**
Not listed.
- Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 3 as amended**
Not listed.
- Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex V as amended**
Not listed.
- Regulation (EC) No. 166/2006 Annex II Pollutant Release and Transfer Registry, as amended**
Not listed.
- Regulation (EC) No. 1907/2006, REACH Article 59(10) Candidate List as currently published by ECHA**
Not listed.

Authorisations

- Regulation (EC) No. 1907/2006, REACH Annex XIV Substances subject to authorization, as amended**
Not listed.

Restrictions on use

- Regulation (EC) No. 1907/2006, REACH Annex XVII Substances subject to restriction on marketing and use as amended**
Acetone (CAS 67-64-1)
- Directive 2004/37/EC: on the protection of workers from the risks related to exposure to carcinogens and mutagens at work, as amended**
Not listed.
- Directive 92/85/EEC: on the safety and health of pregnant workers and workers who have recently given birth or are breastfeeding, as amended**
Not listed.

Other EU regulations

- Directive 2012/18/EU on major accident hazards involving dangerous substances**
Acetone (CAS 67-64-1)
Cyclohexylmethane (CAS 108-87-2)
Heptane (CAS 142-82-5)
Primary Amyl Acetate (CAS 628-63-7)
- Directive 98/24/EC on the protection of the health and safety of workers from the risks related to chemical agents at work, as amended**
Acetone (CAS 67-64-1)
Cyclohexylmethane (CAS 108-87-2)
Heptane (CAS 142-82-5)
Primary Amyl Acetate (CAS 628-63-7)
- Directive 94/33/EC on the protection of young people at work, as amended**
Not listed.

Other regulations

The product is classified and labelled in accordance with EC directives or respective national laws. This Safety Data Sheet complies with the requirements of Regulation (EC) No 1907/2006.

National regulations

Follow national regulation for work with chemical agents.

15.2. Chemical safety assessment

No Chemical Safety Assessment has been carried out.

SECTION 16: Other information

List of abbreviations

Not available.

References

Not available.

Information on evaluation method leading to the classification of mixture

The classification for health and environmental hazards is derived by a combination of calculation methods and test data, if available.

Full text of any statements or R-phrases and H-statements under Sections 2 to 15

- R10 Flammable.
- R11 Highly flammable.
- R36 Irritating to eyes.
- R36/38 Irritating to eyes and skin.
- R38 Irritating to skin.
- R50/53 Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.
- R51/53 Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.
- R65 Harmful: may cause lung damage if swallowed.
- R66 Repeated exposure may cause skin dryness or cracking.
- R67 Vapours may cause drowsiness and dizziness.
- H225 Highly flammable liquid and vapour.

H226 Flammable liquid and vapour.
H304 May be fatal if swallowed and enters airways.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H332 Harmful if inhaled.
H336 May cause drowsiness or dizziness.
H400 Very toxic to aquatic life.
H410 Very toxic to aquatic life with long lasting effects.
H411 Toxic to aquatic life with long lasting effects.
H412 Harmful to aquatic life with long lasting effects.

Revision information

Training information

Disclaimer

None.

Follow training instructions when handling this material.

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.



SAFETY DATA SHEET

1. Identification

| | |
|---|---|
| Product identifier | HERCULES PVC Cement Clear Medium Body, Medium Set |
| Other means of identification | |
| Product code | MSDS #92 |
| Synonyms | Part Numbers: 60003, 60013, 60015, 60020, 60025 Export Part Numbers: 60003E, 60013E, 60015E, 60020E, 60025E |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | HCC Holdings, Inc. an Oatey Affiliate |
| Address | 4700 West 160th Street Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |

| | |
|--|--|
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |
| Supplemental information | Not applicable. |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|--------------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 40-60 |
| Methyl ethyl ketone | 78-93-3 | 10-25 |
| Polyvinyl chloride | 9002-86-2 | 10-20 |
| Acetone | 67-64-1 | 7-15 |
| Cyclohexanone | 108-94-1 | 5-15 |
| Silica, amorphous, fumed | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |

| | |
|---|---|
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water. |

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

| | |
|--------------------------------------|---|
| Precautions for safe handling | Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices. |
|--------------------------------------|---|

| | |
|---|---|
| Conditions for safe storage, including any incompatibilities | Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). |
|---|---|

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|-----------------------------------|------|------------|------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 | |
| | | 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 | |
| | | 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 | |
| | | 200 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 | |
| | | | |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|----------------------|
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 200 ppm | Respirable fraction. |
| | | 5 mg/m ³ | |
| | | 15 mg/m ³ | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|--|------|-----------------------|
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 0.8 mg/m ³ |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------------------|----------------------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm | |
| | TWA | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m ³ | Respirable fraction. |
| | TWA | 200 ppm | |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|--|------|-----------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m ³ |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m ³ |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m ³ |
| | TWA | 250 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 590 mg/m ³ |
| | | 200 ppm |
| | STEL | 885 mg/m ³ |
| | | 300 ppm |
| | TWA | 590 mg/m ³ |
| | | 200 ppm |
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 6 mg/m ³ |
| | | 6 mg/m ³ |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|--------|-----------------|----------|---------------|
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9) Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Face shield is recommended. Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid.

Form Transparent liquid.

Color Clear.

Odor Solvent.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

Initial boiling point and boiling range 151 °F (66.11 °C)

Flash point 6.0 °F (-14.4 °C) Based on THF

Evaporation rate 7 - 11

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) 1.8

| | |
|--|-----------------------------|
| Flammability limit - upper (%) | 11.8 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 143 mm Hg @ 20 C |
| Vapor density | 2 - 2.5 |
| Relative density | 0.91 +/- 0.02 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 80 - 500 cP |
| Other information | |
| Bulk density | 7.6 lb/gal |
| VOC (Weight %) | < 510 g/l SCAQMD 1168/M316A |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia. |

| | |
|---|--|
| Symptoms related to the physical, chemical and toxicological characteristics | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. |
|---|--|

Information on toxicological effects

| | |
|-----------------------|---|
| Acute toxicity | May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation. |
|-----------------------|---|

| Components | Species | Test Results |
|-----------------------|---------|------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

| | |
|--|---|
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| Polyvinyl chloride (CAS 9002-86-2) | 3 Not classifiable as to carcinogenicity to humans. |
| Silica, amorphous, fumed (CAS 112945-52-5) | 3 Not classifiable as to carcinogenicity to humans. |

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
|------------------------------------|--------|

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|---|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information**DOT**

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T11, TP1, TP8, TP27 |
| Packaging exceptions | 150 |
| Packaging non bulk | 201 |
| Packaging bulk | 243 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | ADHESIVES |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer Central nervous system Liver Blood Flammability |
|------------------------------------|--|

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|--|
| Hazard categories | Immediate Hazard - Yes Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No |
|--------------------------|--|

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Silica, amorphous, fumed (CAS 112945-52-5)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Silica, amorphous, fumed (CAS 112945-52-5)

US. Rhode Island RTK

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | No |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 27-May-2015 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. HCC Holdings Inc. an Oatey Affiliate cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.



SAFETY DATA SHEET

Section 1 – Product & Company Identification

Product Name:
RIDGID Dark Thread Cutting Oil (United States)

Product Catalog No.:
11471, 11491, 41590, 41600, 41610, 70830

Recommended Use:
Thread Cutting

Restrictions on Use:
Industrial use only

Company Information:

| <u>North America</u> | <u>Australia</u> |
|--|--|
| Ridge Tool Company 400 Clark Street Elyria, Ohio 44035-6001 1-800-519-3456 (8:00 am – 5:00 pm EST, M-F) Emergency Telephone call 9-1-1 or local emergency number www.RIDGID.com | Ridge Tool Australia 127 Metrolink Circuit Campbellfield, VIC 3061 1-800-743-443 (8:30 am – 5:00 pm AEST, M-F) Emergency Telephone call 000 or local emergency number www.RIDGID.com.au |

Issue Date: May 2, 2018

Revision: I

• Français – 11
• Castellano – pág. 21



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 2 – Hazards Identification

Hazard Classification

This product is classified as not hazardous per US OSHA 29CFR 1910.1200 (HazCom 2012)

Label Elements

Hazard Symbol: No symbol

Signal Word: No signal word.

Hazard Statement: Not applicable

Precautionary Statements: Not applicable

Other hazards which do not result in GHS classification: None.

Section 3 – Composition / Information On Ingredients

General information: This product does not contain silicone or chlorinated additives.

Hazardous Component(s):

| Chemical name | CAS-No. | Concentration |
|---------------|--------------|---------------|
| Mineral oil | Confidential | 20 - <50% |
| Paraffin oils | Confidential | 20 - <50% |

Specific chemical identities and/or exact percentages have been withheld as trade secrets.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 4 – First Aid Measures

Ingestion: Rinse mouth thoroughly. Call a POISON CENTER/doctor if you feel unwell. Do NOT induce vomiting.

Inhalation: Move to fresh air. Call a POISON CENTER/doctor if you feel unwell.

Skin Contact: Remove contaminated clothing and shoes. Wash contact areas with soap and water. If skin irritation occurs: Get medical advice/attention.

Eye contact: Flush thoroughly with water. If irritation occurs, get medical assistance. Continue to rinse for at least 15 minutes.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: Get medical attention if symptoms occur.

Section 5 – Fire Fighting Measures

General Fire Hazards: No unusual fire or explosion hazards noted.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Water spray, fog, CO₂, dry chemical, or regular foam. Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical: Heat may cause the containers to explode. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 6 – Accidental Release Measures

| | |
|---|--|
| Personal precautions, protective equipment and emergency procedures: | See Section 8 of the SDS for Personal Protective Equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep unauthorized personnel away. Ensure adequate ventilation. |
| Methods and material for containment and cleaning up: | Absorb with sand or other inert absorbent. Stop the flow of material, if this is without risk. |
| Environmental Precautions: | Avoid release to the environment. Do not contaminate water sources or sewer. Prevent further leakage or spillage if safe to do so. |

Section 7 – Handling And Storage

| | |
|--|--|
| Precautions for safe handling: | End-users should follow industry best practices for handling and using this product. Guidance may be found using the current version of ASTM Standard E1497-05: Standard Practice for Selection and Safe Use of Water-Miscible and Straight Oil Metal Removal Fluids Observe good industrial hygiene practices. Wear appropriate personal protective equipment. Do not expose to intense heat as product may expand and pressurize container. |
| Conditions for safe storage, including any incompatibilities: | Store in original tightly closed container. Avoid contact with oxidizing agents. Store away from incompatible materials. Shelf Life: 720 Days |



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 8 – Exposure Controls / Personal Protection

Exposure Limits

| Chemical name | Type | Exposure Limit Values | Source |
|-------------------------------------|------|-----------------------|---|
| Mineral oil - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (01 2017) |
| Mineral oil - Mist. | TWA | 5 mg/m ³ | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Paraffin oils - Inhalable fraction. | TWA | 5 mg/m ³ | US. ACGIH Threshold Limit Values (03 2014) |
| Paraffin oils - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| Paraffin oils - Mist. | TWA | 5 mg/m ³ | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |

- Protective Measures:** Use personal protective equipment as required.
- Respiratory Protection:** In case of inadequate ventilation use suitable respirator. Seek advice from supervisor on the company's respiratory protection standards.
- Eye Protection:** Wear safety glasses with side shields (or goggles).
- Skin and Body Protection:** Wear protective clothing appropriate for the risk of exposure. Be aware of other hazards such as rotating parts. Contact health and safety professional or manufacturer for specific information.
- Hygiene measures:** Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing to remove contaminants. Discard contaminated footwear that cannot be cleaned.

Section 9 – Physical And Chemical Properties

Appearance

- Physical state:** Liquid
- Form:** No data available.
- Color:** Black
- Odor:** Mild petroleum/solvent
- Odor threshold:** No data available.
- pH:** No data available.
- Melting point/freezing point:** No data available.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

| | |
|--|---|
| Initial boiling point and boiling range: | No data available. |
| Flash Point: | 196.11 °C (385.00 °F) |
| Evaporation rate: | No data available. |
| Flammability (solid, gas): | No data available. |
| Upper/lower limit on flammability or explosive limits | |
| Flammability limit - upper (%): | No data available. |
| Flammability limit - lower (%): | No data available. |
| Explosive limit - upper (%): | No data available. |
| Explosive limit - lower (%): | No data available. |
| Vapor pressure: | No data available. |
| Vapor density: | No data available. |
| Relative density: | 0.878 |
| Solubility(ies) | |
| Solubility in water: | Insoluble |
| Solubility (other): | No data available. |
| Partition coefficient (n-octanol/water): | No data available. |
| Auto-ignition temperature: | No data available. |
| Decomposition temperature: | No data available. |
| Viscosity: | 42.5 mm ² /s (40 °C, Measured) |
| Other information | |
| VOC: | 1.99 g/l (ASTM E 1868-10) |

Section 10 – Stability And Reactivity

| | |
|--|---|
| Reactivity: | Not reactive during normal use. |
| Chemical Stability: | Material is stable under normal conditions. |
| Possibility of hazardous reactions: | None under normal conditions. |
| Conditions to avoid: | Avoid heat or contamination. |
| Incompatible Materials: | No data available. |
| Hazardous Decomposition Products: | Thermal decomposition or combustion may liberate carbon oxides and other toxic gases or vapors. |

Section 11 – Toxicological Information

Information on likely routes of exposure

Ingestion: May be ingested by accident. Ingestion may cause irritation and malaise.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Inhalation: Inhalation is the primary route of exposure. In high concentrations, vapors, fumes or mists may irritate nose, throat and mucus membranes.

Skin Contact: Prolonged skin contact may cause redness and irritation.

Eye contact: Eye contact is possible and should be avoided.

Symptoms related to the physical, chemical and toxicological characteristics

Ingestion: No data available.

Inhalation: No data available.

Skin Contact: No data available.

Eye contact: No data available.

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

Oral

Product: Not classified for acute toxicity based on available data.

Dermal

Product: Not classified for acute toxicity based on available data.

Inhalation

Product: Not classified for acute toxicity based on available data.

Repeated dose toxicity

Product: No data available.

Skin Corrosion/Irritation

Product: No data available.

Serious Eye Damage/Eye Irritation

Product: No data available.

Respiratory or Skin Sensitization

Product: No data available.

Carcinogenicity

Product: No data available.

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified



Product Name: RIDGID Dark Thread Cutting Oil (United States)

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

No carcinogenic components identified

Germ Cell Mutagenicity

In vitro

Product: No data available.

In vivo

Product: No data available.

Reproductive toxicity

Product: No data available.

Specific Target Organ Toxicity - Single Exposure

Product: No data available.

Specific Target Organ Toxicity - Repeated Exposure

Product: No data available.

Aspiration Hazard

Product: No data available.

Other effects: No data available.

Section 12 – Ecological Information

General information: This product has not been evaluated for ecological toxicity or other environmental effects.

Section 13 – Disposal Consideration

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws. Dispose of waste at an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal. It is the responsibility of the product user or owner to determine at the time of disposal, which waste regulations must be applied.

Contaminated Packaging: Empty containers should be taken to an approved waste handling site for recycling or disposal.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 14 – Transportation Information

DOT

Not regulated.

IMDG

Not regulated.

IATA

Not regulated.

Section 15 – Regulatory Information

US Federal Regulations

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

None present or none present in regulated quantities.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

This product is classified as not hazardous per US OSHA 29CFR 1910.1200 (HazCom 2012)

SARA 313 (TRI Reporting)

None present or none present in regulated quantities.

US State Regulations

US. California Proposition 65

No ingredient regulated by CA Prop 65 present.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 16 – Other Information

Prepared by: Ridge Tool Company (Operating Standard 6-103)

Issue Date: May 2, 2018

Last Revision Date: March 27, 2017

RIDGE TOOL BELIEVES THE STATEMENTS, TECHNICAL INFORMATION AND RECOMMENDATIONS CONTAINED HEREIN ARE RELIABLE BUT THEY ARE GIVEN WITHOUT WARRANTY OR GUARANTEE OF ANY KIND, EXPRESSED OR IMPLIED, AND WE ASSUME NO RESPONSIBILITY FOR ANY LOSS, DAMAGE OR EXPENSE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THEIR USE.

1. IDENTIFICATION

GHS PRODUCT IDENTIFIER:

Product Name Gruvlok Lubricant

OTHER MEANS OF IDENTIFICATION:

SDS #
Chemical Formula 11-4 or 11-4R1
Other Information

RECOMMENDED USE OF THE CHEMICAL AND RESTRICTIONS ON USE:

Recommended Use Lubricant

DETAILS OF THE SUPPLIER OF THE SAFETY DATA SHEET:

Supplier Address

Anvil International LLC
2 Holland Way, Exeter, NH 03833
Tel. 603-418-2800

EMERGENCY TELEPHONE NUMBER:

Emergency Telephone
Chemtel 1-800-255-3924

2. HAZARDS IDENTIFICATION

CLASSIFICATION:

This chemical is considered non-hazardous according to the OSHA Hazard Communication Standard 2012 (29 CFR 1910.1200)

GHS CLASSIFICATION:

Hazard categories: Skin Irritant 3
Eye irritation: Eye Irritant 2B

LABEL ELEMENTS:

Signal Word: Warning

HAZARD STATEMENTS:

P264 Wash skin thoroughly after handling.
P332+P313 If skin irritation occurs: Get medical advice/attention.
P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes.
Remove contact lenses, if present and easy to do. Continue rinsing.
P337+P313 If eye irritation persists: Get medical advice/attention.

3. COMPOSITION/INFORMATION ON INGREDIENTS

The product contains no substances which at their given concentration, are considered to be hazardous to health.

COMPONENTS

| CAS No. | Chemical Name | Quantity |
|-----------------------------------|---|----------|
| 68606-06-4 EINECS 271-723-9 | Mixed sodium and potassium salts of tall oil (soap) | 15-25% |

Where range is displayed, the exact percentage (concentration) of composition has been withheld as a trade secret.

4. FIRST AID MEASURES

FIRST AID MEASURES:

Inhalation

Move to fresh air. If symptoms persist, call a physician.

Eye Contact

Rinse thoroughly with plenty of water for at least 15 minutes, lifting lower and upper eyelids. If symptoms persist, call a physician.

Ingestion

Do NOT induce vomiting. Drink plenty of water. Rinse mouth. Never give anything by mouth to an unconscious person. Call a physician or poison control center immediately.

Skin Contact

Wash off immediately with soap and water. If skin irritation persists, call a physician.

MOST IMPORTANT SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED:

Symptoms

Direct contact with eyes may cause temporary irritation. Prolonged or repeated skin contact may cause irritation.

INDICATION OF ANY IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT NEEDED:

Note to Physicians

Treat symptomatically.

5. FIRE-FIGHTING MEASURES

SUITABLE EXTINGUISHING MEDIA:

Water. Water spray (fog). Alcohol resistant foam. Carbon dioxide (CO₂). Dry chemical.

UNSUITABLE EXTINGUISHING MEDIA:

CAUTION: Use of water spray when fighting fire may be inefficient.

SPECIFIC HAZARDS ARISING FROM THE CHEMICAL:

No information available.

HAZARDOUS COMBUSTION PRODUCTS:

Sensitivity to Mechanical Impact

None

Sensitivity to Static Discharge

None

PROTECTIVE EQUIPMENT AND PRECAUTIONS FOR FIREFIGHTERS:

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply.

6. ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES:

Personal Precautions

Avoid contact with the skin and the eyes. Evacuate personnel to safe areas. Use personal protective equipment. Keep people away from and upwind of spill/leak.

Environmental Precautions

Prevent further leakage or spillage if safe to do so. Prevent product from entering drains. Do not flush into surface water or sanitary sewer system. Prevent entry into waterways, sewers, basements or confined areas. See Section 12 for additional Ecological information.

METHODS AND MATERIAL FOR CONTAINMENT AND CLEANING UP:

Methods for Containment

Dike to collect large liquid spills. Prevent leakage or spillage if safe to do so.

Methods for Cleaning Up

Dam up. Soak up with inert absorbent material. Place the bulk of any spilled material into properly labeled containers. Rinse any remaining material to sewage treatment facility.

Clean up in accordance with all applicable regulations.

7. HANDLING AND STORAGE

PRECAUTIONS FOR SAFE HANDLING:

Handling

Wear personal protective equipment. Avoid contact with skin, eyes and clothing. Do not breathe vapors or spray mist. Ensure adequate ventilation. Use only in area provided with appropriate exhaust ventilation. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Do not take internally.

CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES:

Storage

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep in properly labeled containers. Keep out of the reach of children.

Incompatible Materials

Strong oxidizing agents. Strong bases.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

CONTROL PARAMETERS

APPROPRIATE ENGINEERING CONTROLS:

Engineering Controls

Eyewash stations Showers Ventilation systems.

INDIVIDUAL PROTECTION MEASURES, SUCH AS PERSONAL PROTECTIVE EQUIPMENT:

Eye/Face Protection

Wear approved safety goggles.

Skin and Body Protection

Lightweight protective clothing. Chemical resistant gloves, if needed, to avoid prolonged or repeated skin contact.

Respiratory Protection

No special protective equipment required. If respirators are used, OSHA requires a written respiratory program that includes at least: medical certification training, fit testing, periodic environmental monitoring, maintenance, inspection, cleaning, and convenient, sanitary storage areas.

General Hygiene Considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Do not eat, drink or smoke when using this product. Regular cleaning of equipment, work area and clothing is recommended.

Control Parameters

N.A.

9. PHYSICAL AND CHEMICAL PROPERTIES

INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES:

Physical State

Paste

Appearance

Off-White Paste

Odor

Bland

Color

Off-white

Odor threshold

Not determined

PROPERTY:

pH
Melting point/freezing point
Boiling point/boiling range
Flash point
Evaporation rate
Flammability (solid, gas)

VALUES:

≈9
< 0° C / < 32° F
> 104° C / > 220° F
> 104° C / > 220° F
Not applicable
Not determined

REMARKS-METHOD

5% solution

Flammability Limits in Air

| | |
|-------------------------------------|--------------------|
| Upper Flammability Limits | Not applicable |
| Lower Flammability Limits | Not applicable |
| Vapor Pressure | Not applicable |
| Vapor Density | Not applicable |
| Specific Gravity | 1.2 |
| Water Solubility | Completely soluble |
| Solubility in other Solvents | Not determined |
| Partition Coefficient | Not determined |
| Autoignition Temperature | Not determined |
| Decomposition Temperature | Not determined |
| Kinematic Viscosity | Not determined |
| Dynamic Viscosity | Not determined |
| Explosive Properties | None |
| Oxidizing Properties | None |

OTHER INFORMATION:

VOC Content (%) <5%

10. STABILITY AND REACTIVITY

REACTIVITY:

Not reactive under normal conditions

CHEMICAL STABILITY:

Stable under recommended storage conditions

POSSIBILITY OF HAZARDOUS REACTIONS:

None under normal processing

CONDITIONS TO AVOID:

Contact with incompatible material

INCOMPATIBLE MATERIALS:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION PRODUCTS:

Carbon oxides

11. TOXICOLOGICAL INFORMATION

INFORMATION ON LIKELY ROUTE OF EXPOSURE:

Product Information

| | |
|---------------------|--|
| Inhalation | Not a likely route of exposure |
| Eye Contact | Causes eye irritation |
| Skin Contact | May cause mild skin irritation |
| Ingestion | Do not taste or swallow |
| Symptoms | Direct contact with eyes may cause temporary irritation. Prolonged or repeated contact may dry skin and cause irritation. |

DELAYED AND IMMEDIATE EFFECTS AS WELL AS CHRONIC EFFECTS FROM SHORT AND LONG-TERM EXPOSURE:

Carcinogenicity This product does not contain any carcinogens or potential carcinogens as listed by OSHA, IARC or NTP

NUMERICAL MEASURES OF TOXICITY – PRODUCT

The following values are calculated based on chapter 3.1 of the GHS document:

LD50 Oral 22665 mg/kg; Acute toxicity estimate mg/kg mg/L

12. ECOLOGICAL INFORMATION

EXOTOXICITY:

The environmental impact of this product has not been fully investigated.

PERSISTENCE AND DEGRADABILITY:

No information available.

MOBILITY:

Not determined.

OTHER ADVERSE EFFECTS:

Not determined.

13. DISPOSAL CONSIDERATIONS

WASTE TREATMENT METHODS:

Disposal of Wastes Disposal should be in accordance with applicable regional, national and local laws and regulations. Contact your supplier or a licensed contractor for detailed recommendations.

Contaminated Packaging Do not re-use empty containers. Disposal should be in accordance with applicable regional, national and local laws and regulations.

14. TRANSPORT INFORMATION

| | |
|-------------|---------------|
| DOT | Not regulated |
| IATA | Not regulated |
| IMDG | Not regulated |

15. REGULATORY INFORMATION

INTERNATIONAL INVENTORIES:

| | |
|------------------------|--|
| TSCA | All ingredients appear on inventory |
| DSL/NDSL | All components of this product are listed or are exempt |
| EINECS/ELINCS – | <i>European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances / not available (N.A.)</i> |
| ENCS – | <i>Japan Existing and New Chemical Substances/not available (N.A.)</i> |
| IECSC – | <i>China Inventory of Existing Chemical Substances/not available (N.A.)</i> |
| KECL – | <i>Korean Existing and Evaluated Chemical Substances/not available (N.A.)</i> |
| PICCS – | <i>Philippines Inventory of Chemicals and Chemical Substances/not available (N.A.)</i> |

LEGEND:

| | |
|------------------------|--|
| TSCA – | United States Toxic Substances Control Act Section 8(b) Inventory |
| DSL/NDSL – | Canadian Domestic Substances List/Non-Domestic Substances List |
| EINECS/ELINCS – | European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances |
| ENCS – | Japan Existing and New Chemical Substances |
| IECSC – | China Inventory of Existing Chemical Substances |
| KECL – | Korean Existing and Evaluated Chemical Substances |
| PICCS – | Philippines Inventory of Chemicals and Chemical Substances |

US FEDERAL REGULATIONS:

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

SARA 311/312 HAZARD CATEGORIES:

| | |
|--|-----|
| Acute Health Hazard | Yes |
| Chronic Health Hazard | No |
| Fire Hazard | No |
| Sudden Release of Pressure Hazard | No |
| Reactive Hazard | No |

CWA (CLEAN WATER ACT):

This product contains the following substances which are regulated pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42): None known

CERCLA:

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302): None Known

U.S. STATE REGULATIONS

CALIFORNIA PROPOSITION 65:

This product does not contain any Proposition 65 chemicals.

U.S. STATE RIGHT-TO-KNOW REGULATIONS:

Not applicable

U.S. EPA LABEL INFORMATION

EPA Pesticide Registration Number: Not Applicable

16. OTHER INFORMATION

| | | | | |
|-------------|-----------------------|---------------------|-------------------------|----------------------------|
| NFPA | Health Hazards | Flammability | Instability | Special Hazards |
| | 1 | 0 | 0 | Not determined |
| HMIS | Health Hazards | Flammability | Physical Hazards | Personal Protection |
| | 1 | 0 | 0 | Not determined |

Issuance Date: 18-Feb-2014 **Revision Date:** 27-July-2014 **Revision Note:** New format

DISCLAIMER

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Product Name: MOBIL 1 10W-30
Revision Date: 09 May 2019
Page 1 of 11

SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL 1 10W-30
Product Description: Synthetic Base Stocks and Additives
Product Code: 2015101010J2, 481176-00, 972273
Intended Use: Engine oil

COMPANY IDENTIFICATION

Supplier: EXXON MOBIL CORPORATION
22777 Springwoods Village Parkway
Spring, TX 77389 USA

24 Hour Health Emergency 609-737-4411
Transportation Emergency Phone 800-424-9300 or 703-527-3887 CHEMTREC
Product Technical Information 800-662-4525
MSDS Internet Address www.exxon.com, www.mobil.com

SECTION 2 HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

Other hazard information:

HAZARD NOT OTHERWISE CLASSIFIED (HNOC): None as defined under 29 CFR 1910.1200.

PHYSICAL / CHEMICAL HAZARDS

No significant hazards.

HEALTH HAZARDS

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

ENVIRONMENTAL HAZARDS

No significant hazards.

| | | | |
|------------------------|-----------|-----------------|---------------|
| NFPA Hazard ID: | Health: 0 | Flammability: 1 | Reactivity: 0 |
| HMIS Hazard ID: | Health: 0 | Flammability: 1 | Reactivity: 0 |

Product Name: MOBIL 1 10W-30

Revision Date: 09 May 2019

Page 2 of 11

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

| | |
|------------------|---|
| SECTION 3 | COMPOSITION / INFORMATION ON INGREDIENTS |
|------------------|---|

This material is defined as a mixture.

Hazardous Substance(s) or Complex Substance(s) required for disclosure

| Name | CAS# | Concentration* | GHS Hazard Codes |
|--|-------------|----------------|------------------|
| 1-DECENE, HOMOPOLYMER HYDROGENATED | 68037-01-4 | 1 - < 5% | H304 |
| DISTILLATES, HEAVY, C18-50 - BRANCHED, CYCLIC AND LINEAR | 848301-69-9 | 5 - < 10% | H304 |

* All concentrations are percent by weight unless material is a gas. Gas concentrations are in percent by volume.

As per paragraph (i) of 29 CFR 1910.1200, formulation is considered a trade secret and specific chemical identity and exact percentage (concentration) of composition may have been withheld. Specific chemical identity and exact percentage composition will be provided to health professionals, employees, or designated representatives in accordance with applicable provisions of paragraph (i).

| | |
|------------------|---------------------------|
| SECTION 4 | FIRST AID MEASURES |
|------------------|---------------------------|

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

| | |
|------------------|-------------------------------|
| SECTION 5 | FIRE FIGHTING MEASURES |
|------------------|-------------------------------|

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight Streams of Water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulfur oxides

FLAMMABILITY PROPERTIES

Flash Point [Method]: 232°C (450°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6

ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

SPILL MANAGEMENT

Land Spill: Stop leak if you can do it without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be

consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7 HANDLING AND STORAGE

HANDLING

Avoid contact with used product. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or ground procedures. However, bonding and grounds may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

Static Accumulator: This material is a static accumulator.

STORAGE

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

EXPOSURE LIMIT VALUES

Exposure limits/standards (Note: Exposure limits are not additive)

| Substance Name | Form | Limit / Standard | | | NOTE | Source |
|------------------------------------|------------------------------|------------------|---------------------|--|------|------------|
| 1-DECENE, HOMOPOLYMER HYDROGENATED | Aerosols (thoracic fraction) | TWA | 5 mg/m ³ | | N/A | ExxonMobil |

Exposure limits/standards for materials that can be formed when handling this product: When mists/aerosols can occur the following are recommended: 5 mg/m³ - ACGIH TLV (inhalable fraction), 5 mg/m³ - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

No biological limits allocated.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

| | |
|------------------|---|
| SECTION 9 | PHYSICAL AND CHEMICAL PROPERTIES |
|------------------|---|

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Liquid
Color: Amber
Odor: Characteristic
Odor Threshold: N/D

Product Name: MOBIL 1 10W-30
 Revision Date: 09 May 2019
 Page 6 of 11

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15.6 °C): 0.86
 Flammability (Solid, Gas): N/A
 Flash Point [Method]: 232°C (450°F) [ASTM D-92]
 Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0
 Autoignition Temperature: N/D
 Boiling Point / Range: > 316°C (601°F)
 Decomposition Temperature: N/D
 Vapor Density (Air = 1): > 2 at 101 kPa
 Vapor Pressure: < 0.013 kPa (0.1 mm Hg) at 20 °C
 Evaporation Rate (n-butyl acetate = 1): N/D
 pH: N/A
 Log Pow (n-Octanol/Water Partition Coefficient): > 3.5
 Solubility in Water: Negligible
 Viscosity: 66.1 cSt (66.1 mm²/sec) at 40 °C | 10.4 cSt (10.4 mm²/sec) at 100°C
 Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D
 Melting Point: N/A
 Pour Point: -42°C (-44°F) [ASTM D97]

| | |
|-------------------|---------------------------------|
| SECTION 10 | STABILITY AND REACTIVITY |
|-------------------|---------------------------------|

REACTIVITY: See sub-sections below.

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

POSSIBILITY OF HAZARDOUS REACTIONS: Hazardous polymerization will not occur.

| | |
|-------------------|----------------------------------|
| SECTION 11 | TOXICOLOGICAL INFORMATION |
|-------------------|----------------------------------|

INFORMATION ON TOXICOLOGICAL EFFECTS

| Hazard Class | Conclusion / Remarks |
|---|--|
| Inhalation | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Irritation: No end point data for material. | Negligible hazard at ambient/normal handling temperatures. |
| Ingestion | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |

Product Name: MOBIL 1 10W-30

Revision Date: 09 May 2019

Page 7 of 11

| | |
|--|--|
| Skin Corrosion/Irritation: No end point data for material. | Negligible irritation to skin at ambient temperatures. Based on assessment of the components. |
| Eye | |
| Serious Eye Damage/Irritation: No end point data for material. | May cause mild, short-lasting discomfort to eyes. Based on assessment of the components. |
| Sensitization | |
| Respiratory Sensitization: No end point data for material. | Not expected to be a respiratory sensitizer. |
| Skin Sensitization: No end point data for material. | Not expected to be a skin sensitizer. Based on assessment of the components. |
| Aspiration: Data available. | Not expected to be an aspiration hazard. Based on physico-chemical properties of the material. |
| Germ Cell Mutagenicity: No end point data for material. | Not expected to be a germ cell mutagen. Based on assessment of the components. |
| Carcinogenicity: No end point data for material. | Not expected to cause cancer. Based on assessment of the components. |
| Reproductive Toxicity: No end point data for material. | Not expected to be a reproductive toxicant. Based on assessment of the components. |
| Lactation: No end point data for material. | Not expected to cause harm to breast-fed children. |
| Specific Target Organ Toxicity (STOT) | |
| Single Exposure: No end point data for material. | Not expected to cause organ damage from a single exposure. |
| Repeated Exposure: No end point data for material. | Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components. |

OTHER INFORMATION

For the product itself:

Diesel engine oils: Not carcinogenic in animals tests. Used and unused diesel engine oils did not produce any carcinogenic effects in chronic mouse skin painting studies.

Oils that are used in gasoline engines may become hazardous and display the following properties: Carcinogenic in animal tests. Caused mutations in vitro. Possible allergen and photoallergen. Contains polycyclic aromatic compounds (PAC) from combustion products of gasoline and/or thermal degradation products.

Contains:

Synthetic base oils: Not expected to cause significant health effects under conditions of normal use, based on laboratory studies with the same or similar materials. Not mutagenic or genotoxic. Not sensitizing in test animals and humans.

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC

3 = IARC 1

5 = IARC 2B

2 = NTP SUS

4 = IARC 2A

6 = OSHA CARC

SECTION 12

ECOLOGICAL INFORMATION

Product Name: MOBIL 1 10W-30
Revision Date: 09 May 2019
Page 8 of 11

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.
Expected to partition to sediment and wastewater solids.

| | |
|-------------------|--------------------------------|
| SECTION 13 | DISPOSAL CONSIDERATIONS |
|-------------------|--------------------------------|

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. **DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.**

| | |
|-------------------|------------------------------|
| SECTION 14 | TRANSPORT INFORMATION |
|-------------------|------------------------------|

LAND (DOT): Not Regulated for Land Transport

LAND (TDG): Not Regulated for Land Transport

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

Product Name: MOBIL 1 10W-30
 Revision Date: 09 May 2019
 Page 9 of 11

Marine Pollutant: No

AIR (IATA): Not Regulated for Air Transport

SECTION 15 REGULATORY INFORMATION

OSHA HAZARD COMMUNICATION STANDARD: This material is not considered hazardous in accordance with OSHA HazCom 2012, 29 CFR 1910.1200.

Listed or exempt from listing/notification on the following chemical inventories: AICS, DSL, ENCS, KECI, PICCS, TCSI, TSCA

Special Cases:

| Inventory | Status |
|-----------|--------------------|
| IECSC | Restrictions Apply |

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302

SARA (311/312) REPORTABLE GHS HAZARD CLASSES: None.

SARA (313) TOXIC RELEASE INVENTORY: This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The following ingredients are cited on the lists below:

| Chemical Name | CAS Number | List Citations |
|--|------------|----------------|
| 2-PENTANOL, 4-METHYL-, HYDROGEN PHOSPHORODITHIOATE, ZINC SALT | 2215-35-2 | 15 |
| PHOSPHORODITHIOIC ACID, MIXED 0,0 BIS (1,3-DIMETHYLBUTYL AND ISO-PR)ESTERS, ZINC SALTS | 84605-29-8 | 15 |
| SEVERELY HYDROTREATED HEAVY PARAFFINIC DISTILLATE | 64742-54-7 | 17, 18, 19 |

--REGULATORY LISTS SEARCHED--

- | | | | |
|---------------|--------------|-------------------|-------------|
| 1 = ACGIH ALL | 6 = TSCA 5a2 | 11 = CA P65 REPRO | 16 = MN RTK |
| 2 = ACGIH A1 | 7 = TSCA 5e | 12 = CA RTK | 17 = NJ RTK |

Product Name: MOBIL 1 10W-30

Revision Date: 09 May 2019

Page 10 of 11

| | | | |
|--------------|------------------|-------------|-------------|
| 3 = ACGIH A2 | 8 = TSCA 6 | 13 = IL RTK | 18 = PA RTK |
| 4 = OSHA Z | 9 = TSCA 12b | 14 = LA RTK | 19 = RI RTK |
| 5 = TSCA 4 | 10 = CA P65 CARC | 15 = MI 293 | |

Code key: CARC=Carcinogen; REPRO=Reproductive

| | |
|-------------------|--------------------------|
| SECTION 16 | OTHER INFORMATION |
|-------------------|--------------------------|

N/D = Not determined, N/A = Not applicable

KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):

H304: May be fatal if swallowed and enters airways; Aspiration, Cat 1

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

- Composition: Component Table information was modified.
- Section 01: Company Contact Methods information was modified.
- Section 01: Company Mailing Address information was modified.
- Section 09: Boiling Point C(F) information was modified.
- Section 09: Flash Point C(F) information was modified.
- Section 09: n-Octanol/Water Partition Coefficient information was modified.
- Section 09: Pour Point C(F) information was modified.
- Section 09: Relative Density information was modified.
- Section 09: Viscosity information was modified.
- Section 12: information was modified.
- Section 13: Disposal Considerations - Disposal Recommendations information was modified.
- Section 15: List Citations Table information was modified.
- Section 15: National Chemical Inventory Listing information was modified.
- Section 15: SARA (311/312) REPORTABLE GHS HAZARD CLASSES information was added.
- Section 15: SARA (311/312) REPORTABLE HAZARD CATEGORIES information was deleted.
- Section 15: Special Cases Table information was modified.
- Section 16: HCode Key information was modified.
- Section 16: MSN, MAT ID information was modified.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0B, 0B, 0, 0, 0, 0

PPEC: A

Product Name: MOBIL 1 10W-30
Revision Date: 09 May 2019
Page 11 of 11

DGN: 7004362XUS (1027593)

Copyright 2002 Exxon Mobil Corporation, All rights reserved



Safety Data Sheet

Dynaflux SDS CNF A 07/18/2018

Product: Crack Check CNF Cleaner (Aerosol)

Part 1: Product and Company Identification

Identification CNF A

Trade Name: Crack Check CNF Cleaner (Aerosol)

Product Use: Cleans hard surfaces before and after penetrant application.

Manufacturers Name: Dynaflux, Inc.

241 Brown Farm Rd.

Cartersville, GA 30120 U.S.A.

Emergency Telephone Number: For U.S.: 800-255-3924 International: 813-248-0585

Part 2: Hazardous IngredientsSignal Word: **WARNING****H229:** Pressurized container: may burst if heated**H351:** Suspected of causing cancer

| Hazardous Ingredients | CAS No. | SARA III List | PEL PPM | TLV PPM | Carcinogen Refer. Source |
|-----------------------|---------|---------------|---------|---------|--------------------------|
| Dichloromethane | 75-09-2 | Yes | 25 | 12.5 | IARC NTP |

Warning:

Contains gas under pressure. May explode if heated.

May cause allergy or asthma symptoms or breathing difficulties if inhaled.

May cause damage to organs.

May be harmful if swallowed.

Part 3: Hazard Rating**H.M.I.S.**

| | |
|--------------|---|
| Health | 2 |
| Flammability | 0 |
| Reactivity | 0 |
| Special | - |

N.F.P.A.

| | |
|---------------------|---|
| Health | 3 |
| Flammability | 0 |
| Reactivity | 0 |
| Personal Protection | b |

Part 4: First Aid MeasuresEye Contact: Flush with water for 15 minutes. If irritation persists call a physician. **GHS: Category 2A**Skin Contact: Flush with water. Wash with soap and water. Apply a lotion. **GHS: Category 2**

Inhalation: Move to fresh air.

Ingestion: Do not induce vomiting. Give several large glasses of water. Seek medical attention. **GHS: Category 4****Reproductive Toxicity: GHS Category 2****Carcinogenicity: GHS Category 2**

Part 5: Fire Fighting Measures

Flashpoint: Nonflammable Flame Projection Test

U.E.L.: None Established

L.E.L. : None Established

Auto Ignition Temperature: 662°C.

Combustion Products: Carbon dioxide, carbon monoxide, hydrogen chloride and small amounts of phosgene.

Extinguishing Media: Foam, CO₂, Dry chemical

Unusual Fire and Explosion Hazard: use a self contained breathing apparatus. Use water fog to cool containers to prevent rupturing.

Part 6: Accidental Release Measures

Small Spill: Soak up with absorbent material, i.e. kitty litter, clay or dirt. Sweep up and place in a labeled closed container.

Large Spill: Keep unauthorized people from the area. Use self contained breathing apparatus. Dike area and pump contents to a labeled, closed container. Absorb residue and sweep up. Place in a closed, labeled container.

Part 7: Handling and Storage

Leave in the shipping containers. Store in a cool dry place. Do not expose aerosols to temperatures above 120° F or the container may rupture.

Part 8: Exposure Control / Personal Protection

If vapor exceeds TLV use a approved respirator. Use mechanical ventilation in confined spaces. Wear safety glasses and protective gloves.

Part 9: Physical and Chemical Properties

Appearance: thin liquid

Odor: Chlorinated solvent

Odor threshold: Unknown

pH: NA

Melting/Freezing Point: Unknown

Initial boiling point/boiling range: 39.8°C

Flash Point: NA

Evaporation Rate: NA

Flammability: NA

UEL/LEL: Unknown

Vapor Pressure: 47.33 KPA

Vapor Density: Unknown

Solubility: Unknown

n-octynol/water coefficient: 1.25

Auto Ignition Temperature: Unknown

Decomposition Temperature: Unknown

Part 10: Stability and Reactivity

Stability- Product is stable

Hazardous Polymerization- will not occur.

Conditions to Avoid- Ignition sources, open flames, amines and strong bases.

Part 11: Toxicological Information

Ingestion: Rat LD₅₀ 1500-2500mg/kg

Inhalation: Rat LC₅₀ 10,000 ppm

Carcinogenicity Classification: N.T.P. Anticipated Carcinogen. IARC: Possible carcinogen; 2B

Reproductive Toxicity: animal studies- None

Genetic Toxicity-negative results from animal studies.

Part 12: Ecological Information

Potential for mobility in soil is high.
Octanol/Water partition coefficient: 1.25
Organic carbon/water partition coefficient: 24
Atmospheric half life: 79-110 days
Biodegradation 5-26% 28 days
LC50 bluegill: 224 mg/l
Aquatic Toxicity EC50 water flea. Immobilization: 480 mg/l

Part 13: Disposal Consideration

Do not dump into any sewers, on the ground or into any body of water. Send to a permitted recycler.

Part 14: Transportation Information**D.O.T.**

Consumer Commodity O.R.M.-D., 48580 Sub 3

IMDG- (Vessel)

Proper Shipping Name: Aerosols, (Dichloromethane), Limited Quantity
Hazard Class: Class 2.2, 6.1
Packing Group: III
UN Number: UN1950
Marine Pollutant – No

Part 15: Regulatory Information

Section 311 and 312
Immediate Health Hazard – Yes
Delayed Health Hazard- Yes
Fire Hazard – No
Reactive Hazard – No
Section 313- Dichloromethane
SARA 313 - Listed
TSCA – Listed
CEPA-(DSL) Listed
European Inventory – Listed
Canadian DSL- Listed
Australian AICA – Listed
Japanese ENCS-Listed

California Proposition 65 Statement:

WARNING: This product can expose you to Dichloromethane, a chemical known to the State of California to cause cancer. For more information, go to www.p65Warnings.ca.gov/product.

Continued

Part 16: Other Information

Dynaflux, Inc.
241 Brown Farm Rd.
Cartersville, GA 30120 U.S.A.
Completed by: Eugene Schaffstall

Disclaimer of Expressed and implied Warranties:

The information presented in this Safety Data Sheet is based on data believed to be accurate as of the date of the Safety Data sheet was prepared. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices as specified on the label copy.

Safety Data Sheet

Printing date 01/10/2020

Revised On 01/10/2020

1 Identification of the substance and manufacturer

Trade name: FLUORESCENT GREEN
Product code: 0000161620
Recommended use: Paint and coatings application.
Uses advised against: Any that differs from the recommended use.
Manufacturer/Supplier: Seymour of Sycamore
 917 Crosby Avenue
 Sycamore, IL 60178 USA
 phone: 815-895-9101
 www.seymourpaint.com

Emergency telephone number: 1-800-255-3924

Seymour of Sycamore
 3041 Dougall Avenue, Suite 503
 Windsor, ONT N9E 1S3 CANADA
 phone: 800-435-4482
 www.seymourpaint.com

2 Hazard(s) identification

Classification of the substance or mixture

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 STOT SE 3 H335 May cause respiratory irritation.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

GHS Hazard pictograms



GHS02 GHS04 GHS07 GHS08

Signal word
Hazard statements

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 May cause respiratory irritation.
 May cause damage to organs through prolonged or repeated exposure.

Precautionary statements

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not spray on an open flame or other ignition source.
 Pressurized container: Do not pierce or burn, even after use.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 Use only outdoors or in a well-ventilated area.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 Call a poison center/doctor if you feel unwell.
 Store in a well-ventilated place.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients

Chemical characterization: Mixtures

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|-------------------------|--------|
| 74-98-6 | propane | 15-25% |
| 64742-47-8 | Mineral Spirits | 10-15% |
| 1317-65-3 | Calcium Carbonate | 10-15% |
| 106-97-8 | n-butane | 10-15% |
| 110-19-0 | Isobutyl Acetate | 5-10% |
| 64742-94-5 | Naphtha, heavy aromatic | 1-5% |
| 64742-89-8 | VM&P Naphtha | 1-5% |

4 First-aid measures

After inhalation: Supply fresh air; consult doctor in case of complaints.
After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water. Then consult a doctor.
After swallowing: Rinse out mouth and then drink plenty of water.
 Rinse mouth with water. Do not induce vomiting.

Most important symptoms and effects: Dizziness

Indication of any immediate medical attention needed: No further relevant information available.

5 Fire-fighting measures

Extinguishing agents: CO2, extinguishing powder or water spray. Fight larger fires with water spray.
Special hazards: Can form explosive gas-air mixtures.

(Contd. on page 2)

Safety Data Sheet

Printing date 01/10/2020

Revised On 01/10/2020

Trade name: FLUORESCENT GREEN

(Contd. of page 1)

Protective equipment for firefighters: A respiratory protective device may be necessary.

6 Accidental release measures

Personal precautions, protective equipment and emergency procedures: Wear protective equipment. Keep unprotected persons away.
Use respiratory protective device against the effects of fumes/dust/aerosol.

Methods and material for containment and cleaning up: Ensure adequate ventilation.

7 Handling and storage

Precautions for safe handling: Use only in well ventilated areas.
Storage requirements: Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up.

8 Exposure controls/personal protection

Components with limit values that require monitoring at the workplace:

74-98-6 propane

PEL (USA) Long-term value: 1800 mg/m³, 1000 ppm
REL (USA) Long-term value: 1800 mg/m³, 1000 ppm
TLV (USA) refer to Appendix F in TLVs&BEIs book; D, EX

106-97-8 n-butane

REL (USA) Long-term value: 1900 mg/m³, 800 ppm
TLV (USA) Short-term value: 2370 mg/m³, 1000 ppm (EX)

110-19-0 Isobutyl Acetate

PEL (USA) Long-term value: 700 mg/m³, 150 ppm
REL (USA) Long-term value: 700 mg/m³, 150 ppm
TLV (USA) Short-term value: 712 mg/m³, 150 ppm
Long-term value: 238 mg/m³, 50 ppm

Hygienic protection: Wash hands after use.
Do not eat or drink while working.

Breathing equipment: A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene.

Hand protection: Nitrile gloves.
The glove material must be impermeable and resistant to the substance.

Eye protection: Tightly sealed goggles

9 Physical and chemical properties

Appearance: Aerosol.
Odor: Aromatic
Odor threshold: Not determined.

pH-value: Not determined.
Melting point/Melting range: Undetermined.
Boiling point: -44 °C (-111.2 °F)

Flash point: -19 °C (-66.2 °F)
Flammability (solid, gas): Extremely flammable.

Decomposition temperature: Not determined.
Auto igniting: Product is not self-igniting.

Danger of explosion: In use, may form flammable/explosive vapour-air mixture.
Lower Explosion Limit: 0.5 Vol %
Upper Explosion Limit: 10.9 Vol %

Vapor pressure: Not determined.
Relative Density: Between 0.77 and 0.85 (Water equals 1.00)
Vapor density: Not determined.
Evaporation rate: Not applicable.
Partition coefficient: n-octanol/water: Not determined.

Solubility: Not determined.
Viscosity: Not determined.
VOC content (less exempt solvents): 60.7 %

(Contd. on page 3)

Safety Data Sheet

Printing date 01/10/2020

Revised On 01/10/2020

Trade name: FLUORESCENT GREEN

Water: 13.3 %

(Contd. of page 2)

10 Stability and reactivity

Reactivity: Stable at normal temperatures.
Conditions to avoid: Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures.
Chemical stability: Not fully evaluated.
Possibility of hazardous reactions: No dangerous reactions known.
Incompatible materials: No further relevant information available.
Hazardous decomposition: No dangerous decomposition products known.

11 Toxicological information**LD/LC50 values that are relevant for classification:****106-97-8 n-butane**

Inhalative LC50/4 h 658 mg/l (rat)

110-19-0 Isobutyl Acetate

Oral LD50 4,763 mg/kg (rbt)

Information on toxicological effects: No data available.
Skin effects: No irritant effect.
Eye effects: No irritating effect.
Sensitization: No sensitizing effects known.

12 Ecological information

Aquatic toxicity: Hazardous for water, do not empty into drains.
Persistence and degradability: The product is degradable after prolonged exposure to natural weathering processes.
Other information: This product does not contain any chlorofluorocarbons (CFC's), hydrochlorofluorocarbons (HCFC's), perfluorocarbons (PFC's), heavy metals (chromium, lead, cadmium), or chlorinated solvents.
Bioaccumulative potential: No further relevant information available.
Mobility in soil: No further relevant information available.
Other adverse effects: No further relevant information available.

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.
Recommendation: Completely empty cans should be recycled.

14 Transport information

UN-Number UN1950
DOT N/A
DOT UN1950
DOT Consumer Commodity ORM-D
ADR Aerosols, flammable
ADR 1950 Aerosols
Transport hazard class(es):
Class 2.1
Marine pollutant: No
Special precautions for user: Warning: Gases
EMS Number: F-D,S-U
Packaging Group: --
UN "Model Regulation": UN1950, Aerosols, 2.1

15 Regulatory information**SARA Section 355 (extremely hazardous substances):**

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

None of the ingredients is listed.

Toxic Substances Control Act (TSCA): All hazardous ingredients are found on the inventory list of substances.
Canadian Domestic Substances List (DSL): All ingredients are listed or exempted.
Consumer Product Safety Commission (CPSC): This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.

(Contd. on page 4)

Safety Data Sheet

Printing date 01/10/2020

Revised On 01/10/2020

Trade name: FLUORESCENT GREEN

(Contd. of page 3)

California Proposition 65 chemicals known to cause cancer:

100-41-4 ethyl benzene

Prop 65 chemicals known to cause birth defects or reproductive harm:

None of the ingredients is listed.

EPA:

110-19-0 Isobutyl Acetate

D

16 Other information**Contact:** Regulatory Affairs

Safety Data Sheet



1. Identification

| | | | |
|-----------------------------|--|-------------------------|--|
| Product Name: | PRO +LSPR 6PK GLOSS WHITE | Revision Date: | 4/11/2019 |
| Product Identifier: | 7592838 | Supercedes Date: | 5/12/2017 |
| Recommended Use: | Topcoat/Aerosols | | |
| Supplier: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA | Manufacturer: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA |
| Preparer: | Regulatory Department | | |
| Emergency Telephone: | 24 Hour Hotline: 847-367-7700 | | |

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

30% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|--|
| Carcinogenicity, category 2 | H351 | Suspected of causing cancer. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Eye Irritation, category 2A | H319 | Causes serious eye irritation. |
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| STOT, repeated exposure, category 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|-----------|--|
| P201 | Obtain special instructions before use. |
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P260 | Do not breathe dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |

| | |
|----------------|--|
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|----------------------------------|----------------|-------------------|--------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| n-Butyl Acetate | 123-86-4 | 10-25 | GHS02-GHS07 | H226-336 |
| Titanium Dioxide | 13463-67-7 | 10-25 | Not Available | Not Available |
| n-Butane | 106-97-8 | 2.5-10 | GHS04 | H280 |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 2.5-10 | GHS02-GHS07 | H226-315-319-332 |
| Ethylbenzene | 100-41-4 | 1.0-2.5 | GHS02-GHS07-GHS08 | H225-304-332-351-373 |
| Propylene Glycol Monobutyl Ether | 5131-66-8 | 1.0-2.5 | GHS07 | H302-315-319 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|----------------------------------|------------|-----------------------|-------------------|--------------------|--------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 20.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 15.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| Titanium Dioxide | 13463-67-7 | 15.0 | 10 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 10.0 | 100 ppm | 150 ppm | 100 ppm | N.E. |
| Ethylbenzene | 100-41-4 | 5.0 | 20 ppm | N.E. | 100 ppm | N.E. |
| Propylene Glycol Monobutyl Ether | 5131-66-8 | 5.0 | N.E. | N.E. | N.E. | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Relative Density: | 0.832 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 1.0 - 13.0 |
| Boiling Range, °C: | -37 - 537 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: May cause skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010)

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|----------------------------------|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 1330-20-7 | Xylenes (o-, m-, p- isomers) | 3500 mg/kg Rat | >4350 mg/kg Rabbit | 29.08 mg/L Rat |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |
| 5131-66-8 | Propylene Glycol Monobutyl Ether | 1900 mg/kg Rat | N.E. | N.E. |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|---|-----------------------------|---------------------|---------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint and Related Spray Products in Ltd Qty | Aerosols | Aerosols, flammable | Aerosols |
| Hazard Class: | N.A. | 2 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Carcinogenicity, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure)

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------------|----------------|
| Xylenes (o-, m-, p- isomers) | 1330-20-7 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65:

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

16. Other Information**HMIS RATINGS**

Health: 2* **Flammability:** 4 **Physical Hazard:** 0 **Personal Protection:** X

NFPA RATINGS

Health: 2 **Flammability:** 4 **Instability:** 0

Volatile Organic Compounds: 527 g/L

SDS REVISION DATE: 4/11/2019

REASON FOR REVISION: Revision Description Changed
Product Composition Changed
Substance and/or Product Properties Changed in Section(s):
02 - Hazard Identification
14 - Transport Information
15 - Regulatory Information
16 - Other Information
Revision Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.



SAFETY DATA SHEET

Section 1: IDENTIFICATION

1.1 PRODUCT IDENTIFIER

Product Name: PB Penetrating Catalyst (Aerosol)
Product Code: 16-PB, 8-PB, 8-PBS, PBTS, 20-PB, 16-PB-IND

1.2 RECOMMENDED USE OF CHEMICAL AND RESTRICTIONS ON USE

Use: Lubricant/Penetrant

1.3 DETAILS OF THE SUPPLIER OF THE SAFETY DATA SHEET

Name/Address: The Blaster Corporation
8500 Sweet Valley Drive
Valley View, Ohio 44125 – USA
Telephone Number: T (216) 901-5800
F (216) 901-5801

1.4 EMERGENCY TELEPHONE NUMBER

Emergency Telephone Number: CHEMTREC: (800) 424-9300
Date of Preparation: Feb. 3, 2016 **Version #:** 1.0

Section 2: HAZARD(S) IDENTIFICATION

2.1 CLASSIFICATION OF THE CHEMICAL ACCORDING TO OSHA HAZCOM 2012


Hazard class

Flammable Aerosol 2
Gases Under Pressure (Dissolved Gas)
Serious Eye Irritation 2A
Carcinogenicity 2
Aspiration Hazard 1

2.2 LABEL ELEMENTS ACCORDING TO OSHA HAZCOM 2012

This product is a consumer product and is labeled in accordance with the US Consumer Product Safety Commission regulations which take precedence over OSHA Hazard Communication labeling. The actual container label will not include the label elements below. The labeling below applies to industrial/professional products.

Hazard Pictogram:

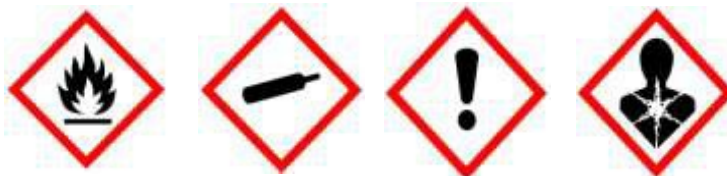

Signal Word: Danger
Hazard Statement: Flammable aerosol. Contains gas under pressure; may explode if heated. Causes serious eye irritation. Suspected of causing cancer. May be fatal if swallowed and enters airways.
Prevention: Keep away from heat/sparks/open flames/hot surfaces. -No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Wash hands thoroughly after handling. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves/protective clothing/eye protection/face protection.

**SAFETY DATA SHEET**

Response: If exposed or concerned: Get medical advice/attention. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. If swallowed: Immediately call a poison center or doctor. Do NOT induce vomiting.

Storage: Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Store locked up.

Disposal: Dispose of contents and container in accordance with all local, regional, national and international regulations.

2.3 ADDITIONAL INFORMATION

Hazards not otherwise classified: Not applicable.

8 % of the mixture consists of ingredient(s) of unknown acute toxicity.

This product is a hazardous chemical as defined by NOM-018-STPS-2000.

Mexico Classification:



Blue = Health Red = Flammability Yellow = Reactivity White = Special

Hazard Rating: 0 = minimal, 1 = slight, 2 = moderate, 3 = severe, 4 = extreme

Section 3: COMPOSITION/INFORMATION ON INGREDIENTS**3.1 MIXTURES**

| Ingredient | UN # | H / F / R / * | CAS No | Wt. % |
|--|-------------------|---------------|------------|-----------|
| Distillates (petroleum), hydrotreated light | Not available | Not available | 64742-47-8 | 50 - 60 |
| Solvent naphtha (petroleum), heavy aromatic | UN1270 | Not available | 64742-94-5 | 20 - 30 |
| Distillates (petroleum), hydrotreated heavy naphthenic | Not available | Not available | 64742-52-5 | 20 - 30 |
| Carbon dioxide | UN1013 | 1/0/0 | 124-38-9 | 1 - 5 |
| Naphthalene | UN1334/ UN2304 | 2/2/0 | 91-20-3 | 2 - 3 |
| Dinonylphenol, ethoxylated, phosphated | Not available | Not available | 39464-64-7 | 0.5 - 1.5 |

The exact percentage (concentration) of composition has been withheld as a trade secret in accordance with paragraph (i) of §1910.1200.

* Per NOM-018-STPS-2000



SAFETY DATA SHEET

Section 4: FIRST- AID MEASURES

4.1 DESCRIPTION OF THE FIRST AID MEASURE

- Eye:** In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. If easy to do, remove contact lenses, if worn. If irritation persists, get medical attention.
- Skin:** In case of contact, immediately flush skin with plenty of water. Remove contaminated clothing and shoes. Wash clothing before reuse. Call a physician if irritation develops and persists.
- Inhalation:** If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Get medical advice/attention if you feel unwell.
- Ingestion:** If swallowed, do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get immediate medical advice/attention.

4.2 MOST IMPORTANT SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED

- Eye:** Causes serious eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva.
- Skin:** May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.
- Inhalation:** May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting.
- Ingestion:** May cause respiratory tract irritation.

4.3 INDICATION OF ANY IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENTS NEEDED

- Note to Physicians:** Symptoms may not appear immediately.
- Specific Treatments:** In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

Section 5: FIRE-FIGHTING MEASURES

5.1 EXTINGUISHING MEDIA

- Suitable Extinguishing Media:** Dry chemical, carbon dioxide or foam.
- Unsuitable Extinguishing Media:** Water may be ineffective for extinguishing fire.

5.2 SPECIAL HAZARDS ARISING FROM THE CHEMICAL

- Products of Combustion:** May include, and are not limited to: oxides of carbon, hydrocarbons.

5.3 SPECIAL PROTECTIVE EQUIPMENT AND PRECAUTIONS FOR FIRE FIGHTERS

Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Cool closed containers exposed to fire with water. Do not use a solid water stream as it may scatter and spread fire. Containers may explode when heated.



SAFETY DATA SHEET

Section 6: ACCIDENTAL RELEASE MEASURES

6.1 PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Eliminate sources of ignition.

6.2 METHODS AND MATERIALS FOR CONTAINMENT AND CLEANING - UP

Methods for Containment: Contain and/or absorb spill with inert material (e.g. sand, vermiculite), then place in a suitable container. Do not flush to sewer or allow to enter waterways. Use appropriate Personal Protective Equipment (PPE).

Methods for Cleaning-Up: Scoop up material and place in a disposal container. Vapors may be heavier than air and may travel along the ground to a distant ignition source and flash back. Provide ventilation.

Section 7: HANDLING AND STORAGE

7.1 PRECAUTIONS FOR SAFE HANDLING

Handling: Keep away from sources of ignition. - No smoking. Avoid contact with skin and eyes. Avoid breathing dust/fume/gas/mist/vapours/spray. Do not swallow. When using do not eat, drink or smoke. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Pressurized container: Do not pierce or burn, even after use. (See section 8)

General Hygiene Advice: Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2 CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES

Storage: Keep locked up and out of reach of children. Do not expose to temperatures exceeding 50 °C/ 122 °F. Store in dry, cool, well-ventilated area. (See section 10)

Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 CONTROL PARAMETERS

Exposure Guidelines

| Ingredient | Occupational Exposure Limits | |
|--|-------------------------------------|----------------------------|
| | OSHA-PEL | ACGIH-TLV |
| Distillates (petroleum), hydrotreated light | 100 ppm | 200 mg/m ³ |
| Solvent naphtha (petroleum), heavy aromatic | Not available. | Not available. |
| Distillates (petroleum), hydrotreated heavy naphthenic | 5 mg/m ³ (mist) | 5 mg/m ³ (mist) |
| Carbon dioxide | 5000 ppm; 9000 mg/m ³ | 5000 ppm |
| Naphthalene | 10 ppm; 50 mg/m ³ | 10 ppm |
| Dinonylphenol, ethoxylated, phosphated | Not available. | Not available. |



SAFETY DATA SHEET

8.2 EXPOSURE CONTROLS

Engineering Controls: Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits.

8.3 INDIVIDUAL PROTECTIVE MEASURES

Personal Protective Equipment:

Eye/Face Protection: Safety glasses with side-shields.

Skin Protection:

Hand Protection: Wear chemically resistant protective gloves.

Body Protection: Wear suitable protective clothing.

Respiratory Protection: A NIOSH approved respirator is recommended in poorly ventilated areas or when permissible exposure limits may be exceeded. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

General Health and Safety Measures: Do not eat, smoke or drink where material is handled, processed or stored. Wash hands carefully before eating or smoking. Handle according to established industrial hygiene and safety practices. Ensure that eyewash stations and safety showers are close to the workstation location.

Section 9: PHYSICAL AND CHEMICAL PROPERTIES

9.1 INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|--------------------------|
| Appearance: | Viscous / Oily. |
| Color: | Orange. |
| Odor: | Heavy aromatic. |
| Odor Threshold: | Not available. |
| Physical State: | Gas/pressurized liquid. |
| pH: | Not available. |
| Melting Point/Freezing Point: | Not available. |
| Initial Boiling Point and Boiling Range: | 177.8 °C (352 °F) |
| Flash Point: | 65.6 °C (150 °F) |
| Evaporation Rate: | <1 (n-butyl acetate = 1) |
| Flammability: | Flammable. |
| Lower Flammability/Explosive Limit: | Not available. |
| Upper Flammability/Explosive Limit: | Not available. |
| Vapor Pressure: | Not available. |
| Vapor Density: | >1 (Air = 1) |
| Relative Density/Specific Gravity: | 0.91 (Water = 1) |
| Solubility: | Negligible. |



SAFETY DATA SHEET

| | |
|--|----------------|
| Partition coefficient: n-octanol/water: | Not available. |
| Auto-ignition Temperature: | Not available. |
| Decomposition Temperature: | Not available. |
| Viscosity: | Not available. |
| Oxidizing Properties: | Not available. |
| Explosive Properties: | Not available. |
| VOC Content: | < 25% |
| Flame Projection: | 0 cm |
| Heat of Combustion: | 45.8 kJ/g |

Section 10: STABILITY AND REACTIVITY

10.1 REACTIVITY

No dangerous reaction known under conditions of normal use.

10.2 CHEMICAL STABILITY

Stable under normal storage conditions. Flammable aerosol. Contents under pressure. Container may explode if heated. Do not puncture. Do not burn.

10.3 POSSIBILITY OF HAZARDOUS REACTIONS

No dangerous reaction known under conditions of normal use.

10.4 CONDITIONS TO AVOID

Heat. Incompatible materials. Sources of ignition. Excessive water.

10.5 INCOMPATIBLE MATERIALS

Strong oxidizing agents. Strong reducing agents. Moisture.

10.6 HAZARDOUS DECOMPOSITION PRODUCTS

May include, and are not limited to: oxides of carbon, hydrocarbons.

Section 11: TOXICOLOGICAL INFORMATION

11.1 INFORMATION ON TOXICOLOGICAL EFFECTS

Likely Routes of Exposure: Skin contact, eye contact, inhalation, and ingestion.

Symptoms related to physical/chemical/toxicological characteristics:

Eye: Causes serious eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva.

Skin: May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.

Ingestion: May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting.

Inhalation: May cause respiratory tract irritation.



SAFETY DATA SHEET

Acute Toxicity:

| Ingredient | IDLH | LC50 | LD50 |
|--|----------------|----------------------------------|---|
| Distillates (petroleum), hydrotreated light | Not available. | Inhalation >5.2 mg/L 4h rat | Oral >5000 mg/kg, rat; Dermal >2000 mg/kg, rabbit |
| Solvent naphtha (petroleum), heavy aromatic | Not available. | Inhalation >5.28 mg/L 4h, rat | Oral >5000 mg/kg, rat; Dermal >2000 mg/kg, rabbit |
| Distillates (petroleum), hydrotreated heavy naphthenic | Not available. | Inhalation >5.0 mg/L 4h, rat | Oral >5000 mg/kg, rat; Dermal >5000 mg/kg, rabbit |
| Carbon dioxide | 40000 ppm | Not available. | Not available. |
| Naphthalene | 250 ppm | Not available. | Oral 490 mg/kg, rat; Dermal >2500 mg/kg, rat; Dermal >20 g/kg, rabbit |
| Dinonylphenol, ethoxylated, phosphated | Not available. | Not available. | Not available. |

Calculated overall Chemical Acute Toxicity Values

| LC50 (inhalation) | LD50 (oral) | LD50 (dermal) |
|-------------------|-------------------|----------------------|
| > 5 mg/L 4h, rat | > 2000 mg/kg, rat | > 2000 mg/kg, rabbit |

| Ingredient | Chemical Listed as Carcinogen or Potential Carcinogen (NTP, IARC, OSHA, ACGIH, CP65)* |
|--|---|
| Distillates (petroleum), hydrotreated light | Not listed. |
| Solvent naphtha (petroleum), heavy aromatic | Not listed. |
| Distillates (petroleum), hydrotreated heavy naphthenic | Not listed. |
| Carbon dioxide | Not listed. |
| Naphthalene | G-A4, I-2B, N-2, CP65 |
| Dinonylphenol, ethoxylated, phosphated | Not listed. |

* See Section 15 for more information.

11.2 DELAYED, IMMEDIATE, AND CHRONIC EFFECTS OF SHORT- AND LONG-TERM EXPOSURE

- Skin Corrosion/Irritation:** Based on available data, the classification criteria are not met.
- Serious Eye Damage/Irritation:** Causes serious eye irritation.
- Respiratory Sensitization:** Based on available data, the classification criteria are not met.
- Skin Sensitization:** Based on available data, the classification criteria are not met.
- STOT-Single Exposure:** Based on available data, the classification criteria are not met.
- Chronic Health Effects:**
 - Carcinogenicity:** Possible carcinogen.
 - Germ Cell Mutagenicity:** Based on available data, the classification criteria are not met.
- Reproductive Toxicity:**
 - Developmental:** Based on available data, the classification criteria are not met.
 - Fertility:** Based on available data, the classification criteria are not met.
- STOT-Repeated Exposure:** Based on available data, the classification criteria are not met.
- Aspiration Hazard:** May be fatal if swallowed and enters airways.





SAFETY DATA SHEET

Other Information: Not available.

Section 12: ECOLOGICAL INFORMATION

12.1 ECOTOXICITY

Acute/Chronic Toxicity: May cause long-term adverse effects in the aquatic environment.

12.2 PERSISTENCE AND DEGRADABILITY

Not available.

12.3 BIOACCUMULATIVE POTENTIAL

Bioaccumulation: Not available.

12.4 MOBILITY IN SOIL

Not available.

12.5 OTHER ADVERSE EFFECTS

Not available.

Section 13: DISPOSAL CONSIDERATIONS

13.1 WASTE TREATMENT METHODS

Disposal Method: This material must be disposed of in accordance with all local, state, provincial, and federal regulations. The generation of waste should be avoided or minimized wherever possible.

Other disposal recommendations: Flammable vapours may accumulate in the container. Do not incinerate empty containers.

Section 14: TRANSPORT INFORMATION

14.1 UN NUMBER

| | |
|------------|--------------------------|
| DOT | NOM-004-SCT2-1994 |
| UN1950 | UN1950 |

14.2 UN PROPER SHIPPING NAME

| | |
|---|---|
| DOT | NOM-004-SCT2-1994 |
| AEROSOLS, flammable, limited quantities | AEROSOLS, flammable, limited quantities |

14.3 TRANSPORT HAZARD CLASS (ES)

| | |
|------------|--------------------------|
| DOT | NOM-004-SCT2-1994 |
| 2.1 | 2.1 |

14.4 PACKING GROUP

| | |
|-----------------|--------------------------|
| DOT | NOM-004-SCT2-1994 |
| Not applicable. | Not applicable. |





SAFETY DATA SHEET

14.5 ENVIRONMENTAL HAZARDS

Not available.

14.6 TRANSPORT IN BULK ACCORDING TO ANNEX II OF MARPOL 73/78 AND THE IBC CODE

Not available.

14.7 SPECIAL PRECAUTIONS FOR USER

Do not handle until all safety precautions have been read and understood. The Blaster Corporation does not recommend shipping their aerosol products by air.

Section 15: REGULATORY INFORMATION

15.1 SAFETY, HEALTH AND ENVIRONMENTAL REGULATIONS/ LEGISLATIONS SPECIFIC FOR THE CHEMICAL

US: SDS prepared pursuant to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Mexico: SDS prepared pursuant to NOM-018-STPS-2000.

| SARA Title III | | | | |
|--|------------------------------|---------------------------|------------------|-------------|
| Ingredient | Section 302 (EHS) TPQ (lbs.) | Section 304 EHS RQ (lbs.) | CERCLA RQ (lbs.) | Section 313 |
| Distillates (petroleum), hydrotreated light | Not listed. | Not listed. | Not listed. | Not listed. |
| Solvent naphtha (petroleum), heavy aromatic | Not listed. | Not listed. | Not listed. | Not listed. |
| Distillates (petroleum), hydrotreated heavy naphthenic | Not listed. | Not listed. | Not listed. | Not listed. |
| Carbon dioxide | Not listed. | Not listed. | Not listed. | Not listed. |
| Naphthalene | Not listed. | Not listed. | 100 | 313 |
| Dinonylphenol, ethoxylated, phosphated | Not listed. | Not listed. | Not listed. | Not listed. |

State Regulations

California Proposition 65:

This product contains a chemical known to the State of California to cause cancer.

Global Inventories:

| Ingredient | USA TSCA |
|--|----------|
| Distillates (petroleum), hydrotreated light | Yes. |
| Solvent naphtha (petroleum), heavy aromatic | Yes. |
| Distillates (petroleum), hydrotreated heavy naphthenic | Yes. |
| Carbon dioxide | Yes. |
| Naphthalene | Yes. |
| Dinonylphenol, ethoxylated, phosphated | Yes. |





SAFETY DATA SHEET

| NFPA-National Fire Protection Association: | |
|--|---|
| Health: | 2 |
| Fire: | 4 |
| Reactivity: | 0 |

| HMIS-Hazardous Materials Identification System: | |
|---|----|
| Health: | 2* |
| Fire: | 4 |
| Physical Hazard: | 0 |

Hazard Rating: 0 = minimal, 1 = slight, 2 = moderate, 3 = severe, 4 = extreme

SOURCE AGENCY CARCINOGEN CLASSIFICATIONS:

CP65 California Proposition 65

OSHA (O) Occupational Safety and Health Administration.

ACGIH (G) American Conference of Governmental Industrial Hygienists.

- A1 - Confirmed human carcinogen.
- A2 - Suspected human carcinogen.
- A3 - Animal carcinogen.
- A4 - Not classifiable as a human carcinogen.
- A5 - Not suspected as a human carcinogen.

IARC (I) International Agency for Research on Cancer.

- 1 - The agent (mixture) is carcinogenic to humans.
- 2A - The agent (mixture) is probably carcinogenic to humans; there is limited evidence of carcinogenicity in humans and sufficient evidence of carcinogenicity in experimental animals.
- 2B - The agent (mixture) is possibly carcinogenic to humans; there is limited evidence of carcinogenicity in humans in the absence of sufficient evidence of carcinogenicity in experimental animals.
- 3 - The agent (mixture, exposure circumstance) is not classifiable as to its carcinogenicity to humans.
- 4 - The agent (mixture, exposure circumstance) is probably not carcinogenic to humans.

NTP (N) National Toxicology Program.

- 1 - Known to be carcinogens.
- 2 - Reasonably anticipated to be carcinogens.

Section 16: OTHER INFORMATION

Date of Preparation: Feb. 3, 2016

Version: 1.0

Revision Date: Feb. 3, 2016

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.

End of Safety Data Sheet





SAFETY DATA SHEET

1. Identification

Product number 1000000070
Product identifier 19 OZ SPRAYWAY GLASS CLEANER LT 12PK
Company information Sprayway, Inc.
1005 S. Westgate Drive
Addison, IL 60101 United States
Company phone General Assistance 1-630-628-3000
Emergency telephone US 1-866-836-8855
Emergency telephone outside US 1-952-852-4646
Version # 01
Recommended use cleaner
Recommended restrictions None known.

2. Hazard(s) identification

Physical hazards Gases under pressure Liquefied gas
Health hazards Not classified.
Environmental hazards Not classified.
OSHA defined hazards Not classified.

Label elements



Signal word Warning
Hazard statement Contains gas under pressure; may explode if heated.
Precautionary statement
Prevention Observe good industrial hygiene practices.
Response Wash hands after handling.
Storage Protect from sunlight. Store in a well-ventilated place.
Disposal Dispose of waste and residues in accordance with local authority requirements.
Hazard(s) not otherwise classified (HNOC) The Safety Information Sheet Chemicals of hazardous chemical can be obtained through phone, email or on the company website.
Supplemental information Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|----------|
| 2-Butoxyethanol | | 111-76-2 | 2.5 - 10 |
| Ethyl Alcohol | | 64-17-5 | 2.5 - 10 |
| Butane | | 106-97-8 | 1 - 2.5 |
| Propane | | 74-98-6 | 1 - 2.5 |
| Other components below reportable levels | | | 90 - 100 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Move to fresh air. Get medical attention if symptoms persist.

| | |
|---|--|
| Skin contact | Get medical attention if irritation develops and persists. |
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |
| 5. Fire-fighting measures | |
| Suitable extinguishing media | Water fog. Foam. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire-fighting equipment/instructions | In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Cool containers exposed to heat with water spray and remove container, if no risk is involved. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Move container from fire area if it can be done without risk. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate personal protective equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. See Section 8 of the SDS for Personal Protective Equipment. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. Ground and bond containers when transferring material. Do not re-use empty containers. Do not get this material in contact with skin. Avoid prolonged exposure. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. Store in a well-ventilated place. Refrigeration recommended. Store away from incompatible materials (see Section 10 of the SDS). Level 1 Aerosol (NFPA 30B) |

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|--------------------------------|------|--|
| 2-Butoxyethanol (CAS 111-76-2) | PEL | 240 mg/m ³ |
| Ethyl Alcohol (CAS 64-17-5) | PEL | 50 ppm 1900 mg/m ³ 1000 ppm |
| Propane (CAS 74-98-6) | PEL | 1800 mg/m ³ 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|--------------------------------|------|----------|
| 2-Butoxyethanol (CAS 111-76-2) | TWA | 20 ppm |
| Butane (CAS 106-97-8) | STEL | 1000 ppm |
| Ethyl Alcohol (CAS 64-17-5) | STEL | 1000 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|--------------------------------|------|--|
| 2-Butoxyethanol (CAS 111-76-2) | TWA | 24 mg/m ³ |
| Butane (CAS 106-97-8) | TWA | 5 ppm 1900 mg/m ³ 800 ppm |
| Ethyl Alcohol (CAS 64-17-5) | TWA | 1900 mg/m ³ 1000 ppm |
| Propane (CAS 74-98-6) | TWA | 1800 mg/m ³ 1000 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|--------------------------------|----------|--|---------------------|---------------|
| 2-Butoxyethanol (CAS 111-76-2) | 200 mg/g | Butoxyacetic acid (BAA), with hydrolysis | Creatinine in urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

2-Butoxyethanol (CAS 111-76-2) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

2-Butoxyethanol (CAS 111-76-2) Skin designation applies.

US - Tennessee OELs: Skin designation

2-Butoxyethanol (CAS 111-76-2) Can be absorbed through the skin.

US NIOSH Pocket Guide to Chemical Hazards: Skin designation

2-Butoxyethanol (CAS 111-76-2) Can be absorbed through the skin.

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

2-Butoxyethanol (CAS 111-76-2) Can be absorbed through the skin.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Hand protection Wear protective gloves.

Skin protection

Other Wear appropriate chemical resistant clothing.

| | |
|---------------------------------------|---|
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

| | |
|---|--|
| Appearance | Clear. |
| Physical state | Gas. |
| Form | Aerosol. |
| Color | Colorless. Pale yellow |
| Odor | Butyl |
| Odor threshold | Not available. |
| pH | 9.5 - 10.5 estimated |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 212 °F (100 °C) estimated |
| Flash point | -156.0 °F (-104.4 °C) Propellant estimated |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 80 - 100 psig @70F estimated |
| Vapor density | Not available. |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Aerosol spray enclosed space | |
| Deflagration density | > 2.52 g/cm ³ Tested |
| Aerosol spray ignition distance | < 15 cm Tested estimated |
| Specific gravity | 0.97 estimated |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. Hazardous polymerization does not occur. |
| Conditions to avoid | Avoid temperatures exceeding the flash point. Contact with incompatible materials. Fire or intense heat may cause violent rupture of packages. |

Incompatible materials Strong oxidizing agents.
Hazardous decomposition products No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Ingestion Expected to be a low ingestion hazard.
Inhalation Prolonged inhalation may be harmful.
Skin contact 2-Butoxy ethanol may be absorbed through the skin in toxic amounts if contact is repeated and prolonged. These effects have not been observed in humans.

No adverse effects due to skin contact are expected.

Eye contact Direct contact with eyes may cause temporary irritation.

Symptoms related to the physical, chemical and toxicological characteristics Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity Expected to be a low hazard for usual industrial or commercial handling by trained personnel.

| Product | Species | Test Results |
|--|------------|---|
| 19 OZ SPRAYWAY GLASS CLEANER LT 12PK (CAS Mixture) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Guinea pig | 8024.9819 ml/kg, 24 Hours estimated 254.7059 ml/kg, 4 Days estimated |
| | Rabbit | 15173.251 mg/kg, 24 Hours estimated 5238.5664 ml/kg, 24 Hours estimated |
| | Rat | 69782.4531 mg/kg, 24 Hours estimated |
| <i>Inhalation</i> | | |
| LC100 | Cat | 2571.4285 % estimated |
| LC50 | Cat | 2554.7151 mg/l, 4.5 Hours estimated 1306.521 mg/l, 6 Hours estimated |
| | Mouse | 35342.8555 mg/l, 120 Minutes estimated 2375.8462 mg/l, 134 Minutes estimated 1485.7142 %, 120 Minutes estimated 457.1429 mm/l, 2 Hours estimated |
| | Rabbit | 13956.4902 ppm, 7 Hours estimated |
| | Rat | 15065.334 ppm, 4 Hours estimated 8635.582 mg/l, 6 Hours estimated 3092.6099 mg/l/4h estimated 1092.8505 mg/l, 4 Hours estimated |
| <i>Oral</i> | | |
| LD100 | Rabbit | 24249.4023 mg/kg estimated |
| LD50 | Dog | 24249.4023 mg/kg estimated |
| | Guinea pig | 41869.4727 mg/kg estimated |
| | Rat | 16992.5254 mg/kg estimated |
| Components | Species | Test Results |

2-Butoxyethanol (CAS 111-76-2)

Acute

Dermal

LD50 Guinea pig 230 ml/kg, 24 Hours
7.3 ml/kg, 4 Days

| Components | Species | Test Results |
|-----------------------------|------------|--|
| | Rabbit | 450 ml/kg, 24 Hours 435 mg/kg, 24 Hours 0.63 ml/kg |
| | Rat | > 2000 mg/kg, 24 Hours |
| <i>Inhalation</i> | | |
| LC50 | Rabbit | 400 ppm, 7 Hours |
| | Rat | 450 ppm, 4 Hours |
| <i>Oral</i> | | |
| LD100 | Rabbit | 695 mg/kg |
| LD50 | Dog | > 695 mg/kg |
| | Guinea pig | 1200 mg/kg |
| | Rat | 530 - 2800 mg/kg |
| Butane (CAS 106-97-8) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l |
| Ethyl Alcohol (CAS 64-17-5) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Cat | 85.41 mg/l, 4.5 Hours 43.68 mg/l, 6 Hours |
| | Mouse | > 60000 ppm 79.43 mg/l, 134 Minutes |
| | Rat | > 115.9 mg/l, 4 Hours 51.3 mg/l, 6 Hours |
| <i>Oral</i> | | |
| LD50 | Monkey | 6000 mg/kg |
| | Mouse | 10500 ml/kg |
| | Rat | 7800 ml/kg 7060 mg/kg |
| <i>Other</i> | | |
| LD50 | Mouse | 6000 mg/kg |
| | Rat | 4070 mg/kg |
| Propane (CAS 74-98-6) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l 658 mg/l/4h |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.
Serious eye damage/eye irritation Direct contact with eyes may cause temporary irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

| | |
|---|---|
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| 2-Butoxyethanol (CAS 111-76-2) | 3 Not classifiable as to carcinogenicity to humans. |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| Not listed. | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not an aspiration hazard. Not likely, due to the form of the product. |
| Chronic effects | Prolonged inhalation may be harmful. May be harmful if absorbed through skin. 2-Butoxy ethanol may be absorbed through the skin in toxic amounts if contact is repeated and prolonged. These effects have not been observed in humans. |

12. Ecological information

Ecotoxicity Harmful to aquatic life with long lasting effects.

| Product | Species | Test Results |
|--|---------|---|
| 19 OZ SPRAYWAY GLASS CLEANER LT 12PK (CAS Mixture) | | |
| Aquatic | | |
| Fish | LC50 | 42462.0469 mg/l, 96 hours estimated |
| Components | Species | Test Results |
| 2-Butoxyethanol (CAS 111-76-2) | | |
| Aquatic | | |
| Fish | LC50 | Inland silverside (Menidia beryllina) 1250 mg/l, 96 hours |
| Ethyl Alcohol (CAS 64-17-5) | | |
| Aquatic | | |
| Crustacea | EC50 | Water flea (Daphnia magna) 7700 - 11200 mg/l, 48 hours |
| Fish | LC50 | Fathead minnow (Pimephales promelas) > 100.1 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------|-------|
| 2-Butoxyethanol | 0.83 |
| Butane | 2.89 |
| Ethyl Alcohol | -0.31 |
| Propane | 2.36 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Consult authorities before disposal. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

| | |
|--|--|
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. Do not re-use empty containers. |

14. Transport information

| | |
|---|---|
| DOT | |
| UN number | UN1950 |
| UN proper shipping name | Aerosols |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Label(s) | None |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Packaging exceptions | 306 |
| Packaging non bulk | None |
| Packaging bulk | None |
| This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking and both may be displayed concurrently. | |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, non-flammable |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Label(s) | 2.2 |
| Packing group | Not applicable. |
| Environmental hazards | No. |
| ERG Code | 2L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Other information | |
| Passenger and cargo aircraft | Allowed. |
| Cargo aircraft only | Allowed. |
| Packaging Exceptions | LTD QTY |

IMDG

| | |
|---|---|
| UN number | UN1950 |
| UN proper shipping name | AEROSOLS |
| Transport hazard class(es) | |
| Class | 2.2 |
| Subsidiary risk | - |
| Label(s) | None |
| Packing group | Not applicable. |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | Not available. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Packaging Exceptions | LTD QTY |
| Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code | Not applicable. |

DOT



IATA; IMDG



15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - No
Delayed Hazard - No
Fire Hazard - No
Pressure Hazard - Yes
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. Massachusetts RTK - Substance List

2-Butoxyethanol (CAS 111-76-2)

Butane (CAS 106-97-8)

Ethyl Alcohol (CAS 64-17-5)

Propane (CAS 74-98-6)

US. New Jersey Worker and Community Right-to-Know Act

2-Butoxyethanol (CAS 111-76-2)
 Butane (CAS 106-97-8)
 Ethyl Alcohol (CAS 64-17-5)
 Propane (CAS 74-98-6)

US. Pennsylvania Worker and Community Right-to-Know Law

2-Butoxyethanol (CAS 111-76-2)
 Butane (CAS 106-97-8)
 Ethyl Alcohol (CAS 64-17-5)
 Propane (CAS 74-98-6)

US. Rhode Island RTK

Butane (CAS 106-97-8)
 Propane (CAS 74-98-6)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | No |
| New Zealand | New Zealand Inventory | No |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 10-08-2014

Version # 01

References EPA: AQUIRE database
 NLM: Hazardous Substances Data Base
 US. IARC Monographs on Occupational Exposures to Chemical Agents

Disclaimer The information in the sheet was written based on the best knowledge and experience currently available. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Revision Information Product and Company Identification: Alternate Trade Names

MATERIAL SAFETY DATA SHEET

1. Product and Company Identification

Material name Epcon Acrylic 7
Version # 01
Revision date 07-05-2016
Product Code A7
Product use Concrete anchoring adhesive.
Manufacturer/Supplier ITW Red Head
2171 Executive Drive, Suite 100
Addison, IL 60101 US
Telephone Number: (630) 350-0370
Contact Person: Andrew Rourke
Emergency CHEMTREC: (800) 424-9300

2. Hazards Identification

Physical state Liquid.
Appearance Paste.
Emergency overview DANGER!
Highly flammable. Will be easily ignited by heat, spark or flames.

Contains an organic peroxide and strong oxidizer. Contact with other materials may cause fire. Heat may cause containers to explode.

Irritating to eyes, respiratory system and skin. May cause sensitization by skin contact. May cause central nervous system effects. Prolonged exposure may cause chronic effects.
OSHA regulatory status This product is considered hazardous under 29 CFR 1910.1200 (Hazard Communication).
Potential health effects
Routes of exposure Inhalation. Ingestion. Skin contact. Eye contact.
Eyes Irritating to eyes. Contact may cause irritation, redness, tearing, blurred vision and/or burns.
Skin Irritating to skin. May cause sensitization by skin contact. Contact may cause irritation, redness and/or drying.
Inhalation Vapors may irritate throat and respiratory system and cause coughing. May cause central nervous system effects.
Ingestion Irritating to mouth, throat, and stomach. Ingestion may cause vomiting, nausea, diarrhea or other systemic effects.
Target organs Eyes. Skin. Respiratory system. Central nervous system. Heart and cardiovascular system. Liver. Kidneys. Reproductive system.
Chronic effects Methyl methacrylate vapor has hypotensive properties which may cause cardiac arrest and other cardiovascular effects. Possible reproductive hazard that may cause adverse reproductive effects based on animal data. May cause damage to the liver and kidneys. Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis.
Potential environmental effects The product contains a substance which is harmful to aquatic organisms.

3. Composition / Information on Ingredients

| Components | CAS # | Percent |
|---------------------|---------|----------|
| Methyl methacrylate | 80-62-6 | 10 - 90 |
| Benzoyl peroxide | 94-36-0 | 0.1 - 10 |
| Dibutyl phthalate | 84-74-2 | 0.1 - 5 |

Composition comments All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First Aid Measures

First aid procedures

| | |
|---------------------|---|
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention. |
| Skin contact | Immediately flush with plenty of water for at least 15 minutes. If skin rash or an allergic skin reaction develops, get medical attention. Wash contaminated clothing before reuse. Destroy or thoroughly clean contaminated shoes. |
| Inhalation | Move to fresh air. If breathing is difficult, give oxygen. Get medical attention, if needed. |
| Ingestion | Rinse mouth thoroughly. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content does not get into the lungs. Get medical attention immediately. |

Notes to physician Keep victim under observation. In case of shortness of breath, give oxygen. Symptoms may be delayed.

General advice Take off contaminated clothing and shoes immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Wash contaminated clothing before re-use.

5. Fire Fighting Measures

Flammable properties Flammable by OSHA criteria. Can be ignited easily and burns vigorously. Strong oxidizer. Contact with combustible material may cause fire. Organic peroxide. Heat may cause the containers to explode.

Extinguishing media

Suitable extinguishing media Water. Water fog. Foam. Dry chemical powder. Carbon dioxide (CO₂).

Unsuitable extinguishing media Do not use a solid water stream as it may scatter and spread fire. Halogenated materials.

Protection of firefighters

Specific hazards arising from the chemical Vapors may form explosive mixtures with air. Vapors are heavier than air and may travel along the floor and in the bottom of containers. Vapors may be ignited by a spark, a hot surface or an ember. Greatly increases the burning rate of combustible materials.

Protective equipment and precautions for firefighters Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Move containers from fire area if you can do so without risk. Withdraw immediately in case of rising sound from venting safety device or any discoloration of tanks due to fire. Containers should be cooled with water to prevent vapor pressure build up. Cool containers exposed to flames with water until well after the fire is out. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. Some of these materials, if spilled, may evaporate leaving a flammable residue.

Special protective equipment for fire-fighters Wear full protective clothing, including helmet, self-contained positive pressure or pressure demand breathing apparatus, protective clothing and face mask.

Specific methods In the event of fire and/or explosion do not breathe fumes.

Hazardous combustion products Carbon monoxide. Carbon Dioxide.

6. Accidental Release Measures

Personal precautions Keep unnecessary personnel away. Local authorities should be advised if significant spillages cannot be contained. Keep upwind. Keep out of low areas. Ventilate closed spaces before entering them. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. See Section 8 of the MSDS for Personal Protective Equipment.

Environmental precautions Prevent further leakage or spillage if safe to do so. Do not contaminate water.

Methods for containment ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk. Dike the spilled material, where this is possible. Prevent entry into waterways, sewers, basements or confined areas.

Methods for cleaning up

Keep combustibles (wood, paper, oil, etc.) away from spilled material.

Small Spills: Absorb spill with vermiculite or other inert material, then place in a container for chemical waste. Clean surface thoroughly to remove residual contamination.

Large Spills: Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal.

This material and its container must be disposed of as hazardous waste. Should not be released into the environment. Prevent product from entering drains.

Other information

Clean up in accordance with all applicable regulations.

7. Handling and Storage

Handling

Wear personal protective equipment. Avoid breathing high vapor concentrations. Avoid contact with eyes, skin, and clothing. Do not taste or swallow. Use only with adequate ventilation. Wash thoroughly after handling. DO NOT handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Take precautionary measures against static discharges. When using, do not eat, drink or smoke.

Storage

Keep away from heat, sparks and open flame. Keep container tightly closed in a cool, well-ventilated place. For maximum shelf life, store between 4.4°C (40°F) to 26.7°C (80°F). Do not store above 43.3°C (110°F). Do not store near combustible materials. Keep away from food, drink and animal feeding stuffs. Keep out of the reach of children.

8. Exposure Controls / Personal Protection

Occupational exposure limits

ACGIH

Components

| Components | Type | Value |
|-------------------------------|------|---------|
| Benzoyl peroxide (94-36-0) | TWA | 5 mg/m3 |
| Dibutyl phthalate (84-74-2) | TWA | 5 mg/m3 |
| Methyl methacrylate (80-62-6) | STEL | 100 ppm |
| | TWA | 50 ppm |

U.S. - OSHA

Components

| Components | Type | Value |
|-------------------------------|------|-----------|
| Benzoyl peroxide (94-36-0) | PEL | 5 mg/m3 |
| Dibutyl phthalate (84-74-2) | PEL | 5 mg/m3 |
| Methyl methacrylate (80-62-6) | PEL | 100 ppm |
| | | 410 mg/m3 |

Canada - Alberta

Components

| Components | Type | Value |
|-------------------------------|------|-----------|
| Benzoyl peroxide (94-36-0) | TWA | 5 mg/m3 |
| Dibutyl phthalate (84-74-2) | TWA | 5 mg/m3 |
| Methyl methacrylate (80-62-6) | STEL | 100 ppm |
| | | 410 mg/m3 |
| | TWA | 205 mg/m3 |
| | | 50 ppm |

Canada - British Columbia

Components

| Components | Type | Value |
|-------------------------------|------|---------|
| Benzoyl peroxide (94-36-0) | TWA | 5 mg/m3 |
| Dibutyl phthalate (84-74-2) | TWA | 5 mg/m3 |
| Methyl methacrylate (80-62-6) | STEL | 100 ppm |
| | TWA | 50 ppm |

Canada - Ontario

Components

| Components | Type | Value |
|-------------------------------|------|---------|
| Benzoyl peroxide (94-36-0) | TWA | 5 mg/m3 |
| Dibutyl phthalate (84-74-2) | TWA | 5 mg/m3 |
| Methyl methacrylate (80-62-6) | STEL | 100 ppm |
| | TWA | 50 ppm |

Canada - Quebec

| Components | Type | Value |
|-------------------------------|------|---------------------|
| Benzoyl peroxide (94-36-0) | TWA | 5 mg/m3 |
| Dibutyl phthalate (84-74-2) | TWA | 5 mg/m3 |
| Methyl methacrylate (80-62-6) | TWA | 50 ppm 205 mg/m3 |

Mexico

| Components | Type | Value |
|-------------------------------|------|----------------------|
| Benzoyl peroxide (94-36-0) | TWA | 5 mg/m3 |
| Dibutyl phthalate (84-74-2) | STEL | 10 mg/m3 |
| | TWA | 5 mg/m3 |
| Methyl methacrylate (80-62-6) | STEL | 125 ppm 510 mg/m3 |
| | TWA | 410 mg/m3 100 ppm |

Engineering controls Use explosion-proof ventilation equipment. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits.

Personal protective equipment

Eye / face protection Wear approved safety goggles.

Skin protection Wear chemical-resistant gloves, footwear and protective clothing appropriate for risk of exposure. Contact glove manufacturer for specific information.

Respiratory protection In case of insufficient ventilation, wear suitable respiratory equipment. If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

General hygiene considerations Avoid contact with eyes. Avoid contact with skin. Provide eyewash station and safety shower. When using, do not eat, drink or smoke. Handle in accordance with good industrial hygiene and safety practice.

9. Physical & Chemical Properties

| | |
|---|-----------------------|
| Appearance | Paste. |
| Color | Beige/Gray. |
| Odor | Pungent. |
| Odor threshold | Not available. |
| Physical state | Liquid. |
| Form | Liquid. Paste. |
| pH | Not available. |
| Melting point | Not available. |
| Freezing point | Not available. |
| Boiling point | > 213 °F (> 100.6 °C) |
| Flash point | 64 °F (17.8 °C) |
| Evaporation rate | Not available. |
| Flammability | Not available. |
| Flammability limits in air, upper, % by volume | 12.5 % |
| Flammability limits in air, lower, % by volume | 2.1 % |
| Vapor pressure | Not available. |
| Vapor density | > 1 |
| Specific gravity | 1.6 (25°C) |
| Solubility (water) | Insoluble |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |

10. Chemical Stability & Reactivity Information

Chemical stability Material is stable under normal conditions.

| | |
|---|---|
| Conditions to avoid | Heat, flames and sparks. |
| Incompatible materials | Strong oxidizing agents. Reducing agents. Strong acids. Combustible material. Polymerization initiators. |
| Hazardous decomposition products | Thermal decomposition of this product can generate carbon monoxide and carbon dioxide. |
| Possibility of hazardous reactions | Will not occur at normal temperatures, however, exposure to elevated temperatures may cause hazardous polymerization. |

11. Toxicological Information

Toxicological data

Components

Methyl methacrylate (80-62-6)

Test Results

Acute Inhalation LC50 Mouse: 18.5 mg/l 2 Hours

Acute Inhalation LC50 Rat: 3750 mg/l 8 Hours

Acute Oral LD50 Rabbit: 6000 mg/kg

Acute Oral LD50 Rat: 7800 mg/kg Acute

Other LD50 Dog: 4500 mg/kg Acute

Other LD50 Mouse: 1000 mg/kg Acute

Other LD50 Rat: 1328 mg/kg Acute

Dibutyl phthalate (84-74-2)

Dermal LD50 Rabbit: 4200 mg/kg

Acute Inhalation LC50 Rat: 15.68 mg/l 4 Hours

Acute Oral LD50 Rat: 8000 mg/kg

Benzoyl peroxide (94-36-0)

Acute Oral LD50 Rat: 7710 mg/kg

Acute Other LD50 Mouse: 206 - 242 mg/kg

Local effects

Irritating to eyes, respiratory system and skin. May cause sensitization by skin contact.

Sensitization

May cause an allergic skin reaction.

ACGIH Sensitizer

Methyl methacrylate (CAS 80-62-6)

Sensitiser.

Chronic effects

Prolonged exposure may cause chronic effects. May cause damage to the liver and kidneys. Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis.

Carcinogenicity

This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

ACGIH Carcinogens

Benzoyl peroxide (CAS 94-36-0)

A4 Not classifiable as a human carcinogen.

Methyl methacrylate (CAS 80-62-6)

A4 Not classifiable as a human carcinogen.

IARC Monographs. Overall Evaluation of Carcinogenicity

Benzoyl peroxide (CAS 94-36-0)

3 Not classifiable as to carcinogenicity to humans.

Methyl methacrylate (CAS 80-62-6)

3 Not classifiable as to carcinogenicity to humans.

Epidemiology

This product is not reported to cause epidemiological effects in humans.

Mutagenicity

This product is not reported to cause mutagenic effects in humans.

Neurological effects

Methyl methacrylate vapor has hypotensive properties which may cause cardiac arrest and other cardiovascular effects.

Reproductive effects

Possible reproductive hazard that may cause adverse reproductive effects based on animal data.

Teratogenicity

Components in this product have been shown to cause teratogenic effects in laboratory animals.

12. Ecological Information

Ecotoxicological data

Components

Methyl methacrylate (80-62-6)

Test Results

LC50 Fathead minnow (*Pimephales promelas*): 125.5 - 190.7 mg/l 96 hours

Dibutyl phthalate (84-74-2)

EC50 Water flea (*Daphnia magna*): 2.99 mg/l 48 hours

LC50 Yellow perch (*Perca flavescens*): 0.28 - 0.44 mg/l 96 hours

Ecotoxicity

Contains a substance which causes risk of hazardous effects to the environment.

Environmental effects

Harmful to aquatic organisms. An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

| | |
|--|--------------------|
| Persistence and degradability | Not available. |
| Bioaccumulation / Accumulation | No data available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Mobility in environmental media | No data available. |

13. Disposal Considerations

| | |
|------------------------------|---|
| Waste codes | D001: Waste Flammable material with a flash point <140 °F |
| Disposal instructions | Dispose of contents/container in accordance with local/regional/national/international regulations. This material and its container must be disposed of as hazardous waste. Incinerate the material under controlled conditions in an approved incinerator. Do not incinerate sealed containers. If discarded, this product is considered a RCRA ignitable waste, D001. Do not contaminate ponds, waterways or ditches with chemical or used container. |

14. Transport Information

| | |
|-------------------------------|--|
| Product Specific Note: | This product meets the limited quantities exception requirements for the below listed transportation agencies. Under DOT and TDG regulations, this product may be reclassified as a Consumer Commodity (ORM-D). Please see the specific regulations for the shipping and packaging requirements. |
|-------------------------------|--|

DOT

Basic shipping requirements:

| | |
|--------------------------------|--------------------|
| Proper shipping name | Consumer commodity |
| Hazard class | ORM-D |
| Subsidiary hazard class | None |
| Labels required | None |

Additional information:

| | |
|-----------------------------|----------|
| Packaging exceptions | 156, 306 |
| Packaging non bulk | 156, 306 |
| Packaging bulk | None |

IATA

Basic shipping requirements:

| | |
|-----------------------------|--------------------------------|
| UN number | 3108 |
| Proper shipping name | Organic peroxide type E, solid |
| Hazard class | 5.2 |

IMDG

Basic shipping requirements:

| | |
|------------------------------|--------------------------------|
| UN number | 3108 |
| Proper shipping name | ORGANIC PEROXIDE TYPE E, SOLID |
| Hazard class | 5.2 |
| Environmental hazards | |
| Marine pollutant | No |
| EmS No. | F-J, S-R |

TDG

Basic shipping requirements:

| | |
|--------------------------------|--------------------|
| Proper shipping name | Consumer commodity |
| Hazard class | ORM-D |
| Subsidiary hazard class | None |
| Labels required | None |
| Additional information: | |
| Packaging exceptions | 156, 306 |
| Packaging non bulk | 156, 306 |
| Packaging bulk | None |



IATA



IMDG

15. Regulatory Information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

US EPCRA (SARA Title III) Section 313 - Toxic Chemical: De minimis concentration

| | |
|-----------------------------------|-------|
| Benzoyl peroxide (CAS 94-36-0) | 1.0 % |
| Dibutyl phthalate (CAS 84-74-2) | 1.0 % |
| Methyl methacrylate (CAS 80-62-6) | 1.0 % |

US EPCRA (SARA Title III) Section 313 - Toxic Chemical: Listed substance

| | |
|-----------------------------------|---------|
| Benzoyl peroxide (CAS 94-36-0) | Listed. |
| Dibutyl phthalate (CAS 84-74-2) | Listed. |
| Methyl methacrylate (CAS 80-62-6) | Listed. |

CERCLA (Superfund) reportable quantity (lbs)

Methyl methacrylate 1000

Dibutyl phthalate 10

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories
 Immediate Hazard - Yes
 Delayed Hazard - Yes
 Fire Hazard - Yes
 Pressure Hazard - No
 Reactivity Hazard - No

Section 302 extremely hazardous substance No

Section 311 hazardous chemical No

Drug Enforcement Agency (DEA) Not controlled

Canadian regulations

This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

WHMIS status

Controlled

WHMIS classification

B2 - Flammable/Combustible
 C - Oxidizing
 D2A - Other Toxic Effects-VERY TOXIC
 D2B - Other Toxic Effects-TOXIC
 F - Reactive

WHMIS labeling



Inventory status

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

State regulations WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

US - California Hazardous Substances (Director's): Listed substance

Benzoyl peroxide (CAS 94-36-0) Listed.
Dibutyl phthalate (CAS 84-74-2) Listed.
Methyl methacrylate (CAS 80-62-6) Listed.

US - California Proposition 65 - Carcinogens & Reproductive Toxicity (CRT): Listed substance

Dibutyl phthalate (CAS 84-74-2) Listed.

US - California Proposition 65 - CRT: Listed date/Developmental toxin

Dibutyl phthalate (CAS 84-74-2) Listed: December 2, 2005 Developmental toxin.

US - California Proposition 65 - CRT: Listed date/Female reproductive toxin

Dibutyl phthalate (CAS 84-74-2) Listed: December 2, 2005 Female reproductive toxin.

US - California Proposition 65 - CRT: Listed date/Male reproductive toxin

Dibutyl phthalate (CAS 84-74-2) Listed: December 2, 2005 Male reproductive toxin.

US - Massachusetts RTK - Substance: Listed substance

Benzoyl peroxide (CAS 94-36-0) Listed.
Dibutyl phthalate (CAS 84-74-2) Listed.
Methyl methacrylate (CAS 80-62-6) Listed.

US - New Jersey Community RTK (EHS Survey): Reportable threshold

Benzoyl peroxide (CAS 94-36-0) 500 LBS
Dibutyl phthalate (CAS 84-74-2) 500 LBS
Methyl methacrylate (CAS 80-62-6) 500 LBS

US - New Jersey RTK - Substances: Listed substance

Benzoyl peroxide (CAS 94-36-0) Listed.
Dibutyl phthalate (CAS 84-74-2) Listed.
Methyl methacrylate (CAS 80-62-6) Listed.

US - Pennsylvania RTK - Hazardous Substances: Listed substance

Benzoyl peroxide (CAS 94-36-0) Listed.
Dibutyl phthalate (CAS 84-74-2) Listed.
Methyl methacrylate (CAS 80-62-6) Listed.

16. Other Information

| | |
|----------------------------|--|
| Further information | HMIS® is a registered trade and service mark of the NPCA. |
| HMIS® ratings | Health: 2* Flammability: 3 Physical hazard: 1 |
| NFPA ratings | Health: 2 Flammability: 3 Instability: 1 |
| Disclaimer | The information in the sheet was written based on the best knowledge and experience currently available. |
| Issue date | 08-19-2013 |

SAFETY DATA SHEET

1. Identification

Product number 1000028751
Product identifier 13 OZ NAPA MAC'S BATTERY TERMINAL CLEANER 1072
Company information NAPA Balkamp
2601 Stout Heritage Parkway
Plainfield, IN 46168 United States
Company phone General Assistance 1-317-754-3900
Emergency telephone US 1-866-836-8855
Emergency telephone outside US 1-952-852-4646
Version # 01
Recommended use CLEANER
Recommended restrictions None known.

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
Health hazards Not classified.
OSHA defined hazards Not classified.

Label elements



Signal word Danger
Hazard statement Extremely flammable aerosol.
Precautionary statement
Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use.
Response Wash hands after handling.
Storage Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal Dispose of waste and residues in accordance with local authority requirements.
Hazard(s) not otherwise classified (HNOC) None known.
Supplemental information None.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|----------|
| Butane | | 106-97-8 | 2.5 - 10 |
| Isopropyl Alcohol | | 67-63-0 | 2.5 - 10 |
| Propane | | 74-98-6 | 2.5 - 10 |
| Sodium Carbonate Anhydrous | | 497-19-8 | 1 - 2.5 |
| Other components below reportable levels | | | 80 - 90 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation If symptoms develop move victim to fresh air. Get medical attention if symptoms persist.
Skin contact Wash off with soap and water. Get medical attention if irritation develops and persists.

| | |
|---|--|
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. Get medical attention if symptoms occur. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Not available. |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire fighting equipment/instructions | Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. Use water spray to cool unopened containers. In the event of fire and/or explosion do not breathe fumes. |
| General fire hazards | Extremely flammable aerosol. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Refer to attached safety data sheets and/or instructions for use. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|--|
| Precautions for safe handling | Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Level 1 Aerosol. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|---------------------------------|------|-----------|
| Isopropyl Alcohol (CAS 67-63-0) | PEL | 980 mg/m3 |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------|------|------------------------|
| Propane (CAS 74-98-6) | PEL | 400 ppm |
| | | 1800 mg/m ³ |
| | | 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|---------------------------------|------|----------|
| Butane (CAS 106-97-8) | STEL | 1000 ppm |
| Isopropyl Alcohol (CAS 67-63-0) | STEL | 400 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---------------------------------|------|------------------------|
| Butane (CAS 106-97-8) | TWA | 1900 mg/m ³ |
| | | 800 ppm |
| Isopropyl Alcohol (CAS 67-63-0) | STEL | 1225 mg/m ³ |
| | | 500 ppm |
| | | 980 mg/m ³ |
| Propane (CAS 74-98-6) | TWA | 400 ppm |
| | | 1800 mg/m ³ |
| | | 1000 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Components | Value | Determinant | Specimen | Sampling Time |
|---------------------------------|---------|-------------|----------|---------------|
| Isopropyl Alcohol (CAS 67-63-0) | 40 mg/l | Acetone | Urine | * |

* - For sampling details, please see the source document.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection**Hand protection**

Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.

Other

Wear suitable protective clothing.

Respiratory protection

If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance****Physical state**

Gas.

Form

Aerosol.

Color

Not available.

Odor

Not available.

Odor threshold

Not available.

| | |
|---|--|
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 212 °F (100 °C) estimated |
| Flash point | -156.0 °F (-104.4 °C) PROPELLANT estimated |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 2.5 % estimated |
| Flammability limit - upper (%) | 12 % estimated |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 60 psig @70F estimated |
| Vapor density | Not available. |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Oxidizing properties | Not oxidizing. |
| Specific gravity | 0.95 @70F estimated |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |
| Conditions to avoid | Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Nitrates. Isocyanates. Fluorine. Chlorine. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | No adverse effects due to inhalation are expected. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|---|------------|---|
| Butane (CAS 106-97-8) | | |
| Acute | | |
| Inhalation | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l |
| Isopropyl Alcohol (CAS 67-63-0) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | 16.4 ml/kg, 24 Hours |
| Inhalation | | |
| LC50 | Rat | > 10000 ppm, 6 Hours |
| Oral | | |
| LD50 | Rat | 5.84 g/kg |
| Propane (CAS 74-98-6) | | |
| Acute | | |
| Inhalation | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l 658 mg/l/4h |
| Sodium Carbonate Anhydrous (CAS 497-19-8) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg |
| Inhalation | | |
| LC50 | Guinea pig | 800 mg/m3, 2 Hours |
| <i>Aerosol</i> | | |
| LC50 | Mouse | 1200 mg/m3, 2 Hours |
| | Rat | 2300 mg/m3, 2 Hours |
| LC50 | Rat | 2.3 mg/l, 2 hours supplier |
| Oral | | |
| LD50 | Rat | 2800 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|---|--|
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. |
| Serious eye damage/eye irritation | Direct contact with eyes may cause temporary irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not a respiratory sensitizer. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| Not listed. | |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| Not regulated. | |
| US. National Toxicology Program (NTP) Report on Carcinogens | |
| Not listed. | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not likely, due to the form of the product.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|---|---------|--|
| Isopropyl Alcohol (CAS 67-63-0) | | |
| Aquatic | | |
| Algae | IC50 | Algae 1000.0001 mg/L, 72 Hours |
| Crustacea | EC50 | Daphnia 13299 mg/L, 48 Hours |
| Fish | LC50 | Bluegill (Lepomis macrochirus) > 1400 mg/l, 96 hours |
| Sodium Carbonate Anhydrous (CAS 497-19-8) | | |
| Aquatic | | |
| Crustacea | EC50 | Daphnia 265 mg/L, 48 Hours |
| | | Water flea (Ceriodaphnia dubia) 156.6 - 298.9 mg/l, 48 hours |
| Fish | LC50 | Bluegill (Lepomis macrochirus) 300 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

| | |
|-------------------|------|
| Butane | 2.89 |
| Isopropyl Alcohol | 0.05 |
| Propane | 2.36 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable, (each not exceeding 1 L capacity) |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | N82 |

Packaging exceptions 306
Packaging non bulk None
Packaging bulk None

IATA

UN number UN1950
UN proper shipping name Aerosols, flammable
Transport hazard class(es)
 Class 2.1
 Subsidiary risk -
 Label(s) 2.1
Packing group Not applicable.
Environmental hazards No.
ERG Code 10L
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Other information
 Passenger and cargo aircraft Allowed with restrictions.
 Cargo aircraft only Allowed with restrictions.
Packaging Exceptions LTD QTY

IMDG

UN number UN1950
UN proper shipping name AEROSOLS
Transport hazard class(es)
 Class 2.1
 Subsidiary risk -
 Label(s) None
Packing group Not applicable.
Environmental hazards
 Marine pollutant No.
EmS F-D, S-U
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Packaging Exceptions LTD QTY

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

DOT



IATA; IMDG



15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - No
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - Yes
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

US. Massachusetts RTK - Substance List

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)

US. New Jersey Worker and Community Right-to-Know Act

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)

US. Pennsylvania Worker and Community Right-to-Know Law

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)

US. Rhode Island RTK

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

Formaldehyde (CAS 50-00-0)

Listed: January 1, 1988

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|-------------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | No |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | No |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | No |
| New Zealand | New Zealand Inventory | No |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 06-27-2016

Version # 01

Disclaimer The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Revision information Product and Company Identification: Product and Company Identification

Safety Data Sheet

SDS ID: Stock Code C

Revision date: April 27, 2017

Section 1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product name: Low VOC Clear Cleaner
Synonyms: None
Chemical family: Hydrocarbon Mixture
Producer: J.C. Whitlam Manufacturing Company
200 West Walnut Street
P.O. Box 380
Wadsworth, Ohio 44282-0380
www.jcwhitlam.com

Telephone: 330-334-2524 Available during normal business hours

Emergency: CHEMTEL 800-255-3924 Available 24 hours

Section 2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

Flammable liquid and vapor – vapor may cause a flash fire. This product can be easily ignited by heat, spark, or flames. Causes eye irritation. Harmful if swallowed. Prolonged or repeated skin contact may cause drying, cracking, or irritation. High vapor concentrations may cause drowsiness and irritation of the eyes and respiratory tract.

GHS Label elements, including precautionary statements

DANGER — Highly Flammable Liquid and Vapor (*category 2*)

WARNING — Causes Serious Eye Irritation (*category 2A*)

May cause drowsiness or dizziness



Precautionary Statements

Keep away from heat/sparks/open flames/hot surfaces – No smoking. Keep container tightly closed. Wear protective gloves and safety glasses, see SDS.

Avoid breathing vapors. Wash skin thoroughly after handling. Wear protective gloves and eye protection. IF ON SKIN, immediately remove all contaminated clothing. Rinse skin with water/shower. IF IN EYES, Remove contact lenses if present and easy to do so, rinse with water for several minutes. If eye or skin irritation persists – get medical advice/attention. Store in a well-ventilated place.

Inhalation: May cause irritation to mucous membranes and upper respiratory tract. In high concentrations, vapors and aerosol mists have a narcotic effect and may cause headache, central nervous system depression, fatigue, dizziness, and nausea.

Chronic: Repeated or prolonged exposure may result in liver damage or may cause dermatitis by defatting the skin. See Section 11 (Toxicological Information) for additional information.

Ingestion: May cause irritation of the digestive tract, stomach pain, nausea, and vomiting.

Skin contact: Prolonged or repeated contact with skin may cause redness, irritation, swelling, and dermatitis.

Eye contact: Exposure to vapors or liquid may cause eye irritation.

Carcinogenic evaluation: No component of this product present at levels greater than 0.1 % is identified as a known, suspected or potential carcinogen by the NTP, the IARC or OSHA. The ACGIH designates Tetrahydrofuran as category A3 – confirmed animal carcinogen with unknown relevance to humans.

Section 3. COMPOSITION / INFORMATION ON INGREDIENTS

Material information:

| Name | CAS No. | Weight % |
|----------------------|---------|----------|
| Acetone* | 67-64-1 | 100 |
| Methyl ethyl ketone* | 78-93-3 | 100 |
| | | |
| | | |

**Note: The above weight percentages are represented in ranges as estimates. Due to variation among production batches, component percentages may vary.*

Section 4. FIRST AID MEASURES

Inhalation: Move exposed persons to fresh air. If the person is not breathing or breathing is irregular, provide artificial respiration or oxygen by trained personnel. Seek medical attention.

Skin contact: Quickly remove contaminated clothing and shoes. Wash affected skin with soap and water. Get medical attention if symptoms occur. Wash contaminated clothing before reuse.

Ingestion: Do not induce vomiting. Never give anything by mouth to an unconscious person. If conscious and alert, rinse the mouth with water. Call a physician or poison control center immediately.

Eye contact: Check for and remove any contact lenses. Immediately consult physician after flushing eyes with tepid water for 15 minutes.


Section 5. FIREFIGHTING MEASURES

Suitable extinguishing media: Small fires — Class B fire-extinguishing media including water spray, foam, CO₂ or dry powder. Do not use a water stream, as this will spread the fire.

Specific hazards: Fire or intense heat may cause violent rupture of product containers. Vapors may form explosive mixtures with air. Application of extinguishing media to hot surfaces requires special precautions. During emergency conditions, overexposure to decomposition products including carbon oxides may cause a health hazard. Symptoms may not be immediately apparent.

Special protective equipment for firefighters: Full protective equipment including self-contained breathing apparatus should be used. Explosive in the presence of oxidizers or nitric acid. Do not allow run-off from fire fighting to enter drains or water courses.

| NFPA rating: HMIS rating: | | |
|---------------------------|-----|---------|
| Health: | 2 | 2 |
| Flammability: | 3 | 3 |
| Instability/reactivity: | 0 | 0 |
| Other: | N/A | H (PPE) |



| |
|-----------------|
| Hazardous |
| FP - Below 73 F |
| Stable |
| N/A |

Section 6. ACCIDENTAL RELEASE MEASURES

| | |
|---|--|
| Personal Precautions: | Immediately contact emergency personnel. Evacuate any potentially affected area and isolate personnel from entry. Ventilate closed spaces before entering them. Vapor can collect in lower areas. |
| Large Spill: | Personnel must have appropriate training, per OSHA 29 CFR 1910.120. Do not touch damaged containers or spilled material unless wearing appropriate protective equipment (Section 8). |
| Methods for Containment and Clean up | Shut off source if possible and if safe. Eliminate all ignition sources. Use non-sparking tools during all cleanup procedures. Prevent entry into waterways, sewers, basements or confined areas. Advise applicable authorities if material has entered sewers or water courses. |

Section 7. HANDLING AND STORAGE

| | |
|------------------|--|
| Handling: | Use with adequate ventilation. Keep containers closed when not in use. Always open containers slowly to allow any excess pressure to vent. Avoid breathing vapors. Avoid contact with eyes, skin, or clothing. Wash thoroughly with soap and water after handling. Launder soiled clothing thoroughly before re-use. |
| Storage: | Keep all containers tightly closed when not in use. Store out of direct sunlight and on an impermeable floor. Do not store with incompatible materials. See Section 10, Stability and Reactivity. |

Section 8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Occupational Exposure Limits:

| Name | CAS No. | ACGIH® TLV® Exposure Limits: | Federal OSHA PELs | OSHA PELs 1989 ^c |
|----------------------------|---------|--|-----------------------|---|
| Acetone | 67-64-1 | 500 ppm ^A 750 ppm ^B | 1000 ppm ^A | 750 ppm ^A 1000 ppm ^B |
| Methyl-ethyl ketone | 78-93-3 | 200 ppm ^A 300 ppm ^B | 200 ppm ^A | None |
| | | | | |
| | | | | |

All exposure limits listed are 8-hour time weighted average (TWA) — except where noted otherwise.

^A Time Weighted Average (TWA) is an average exposure over the course of an 8-hour work shift.

^B A Short Term Exposure Limit TWA over the course of 15 minutes.

PEL — Permissible Exposure Limit is the maximum 8-hour TWA concentration of a chemical that a worker may be exposed to under Occupational Safety and Health Administration (OSHA) regulations.

^C Federal OSHA 1989 PELs were vacated but are in use and enforced by many state OSHA plans.

Engineering measures: Local exhaust ventilation is preferable. Mechanical ventilation must be explosion proof. General ventilation is acceptable if exposure to materials in this section is maintained below applicable exposure limits.

PERSONAL PROTECTIVE EQUIPMENT

| | |
|----------------------------------|--|
| Respiratory protection: | When engineering controls are not sufficient to reduce exposure to levels below applicable exposure limits, seek professional advice prior to respirator selection and use. For concentrations less than 10 times the exposure limits, wear a properly fitted NIOSH/ MSHA-approved respirator with organic vapor cartridges. |
| Skin and body protection: | Wear impervious clothing and gloves to prevent contact. Butyl-rubber is recommended for full contact or splash contact. Other protective material may be used, depending on the situation, if adequate degradation and permeation data is available. |
| Eye protection: | Wear safety spectacles with unperforated side shields, or goggles. |
| Hygiene measures: | Avoid repeated or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Promptly remove contaminated clothing and launder before reuse. |
| Other precautions: | Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. |

Section 9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|---------------------------------|
| Appearance: | Clear liquid |
| Physical state (solid/liquid/gas): | Liquid |
| Substance type (pure/mixture): | Mixture |
| Color: | Clear |
| Odor: | Ether-like odor |
| Molecular weight: | 72.1grams/mol |
| pH: | N/A |
| Boiling point/range (5-95%): | 147°F; 63.8°C |
| Melting point/range: | N/A |
| Decomposition temperature: | N/A |
| Specific gravity: | 0.80 |
| Vapor density: | (AIR = 1) 3.5 |
| Vapor pressure: | 20 mm Hg at 68°F |
| Evaporation rate (Butyl acetate= 1): | 5.6 |
| Flash point: | 1°F; -17.2°C |
| Water solubility: | 26.30 @68°F (20.0°C) |
| VOC Content (SCAQMD Rule 1168 Test Method 316A): | N/A |
| Auto-ignition temperature: | 610°F; 321°C (lowest component) |
| Flammable limits in air — lower (%): | 1.1 |
| Flammable limits in air — upper (%): | 11.5 |

Section 10. STABILITY AND REACTIVITY

| | |
|--|--|
| Reactivity: | No data available |
| Stability: | Stable under recommended storage conditions |
| Possibly hazardous reactions: | Vapors may form an explosive mixture with air |
| Conditions to avoid: | Heat, flames, sparks, temperature extremes and direct sunlight |
| Incompatible Materials: | Strong oxidizing agents, Acids, Alkalis, Peroxides. |
| Hazardous decomposition products: | By fire, Carbon dioxide, Carbon monoxide |
| Polymerization: | Will not occur. |

Section 11. TOXICOLOGICAL INFORMATION

Acute toxicity: Excessive exposure leads to depression of the central nervous system. Causes eye irritation, moderate skin irritation.

Product information:

| Name | CAS No. | Inhalation: | Dermal: | Oral: |
|---------------------|---------|---|--|---|
| Acetone | 67-64-1 | LC ₅₀ (Rat): 76 mg/l, 4 hours | LD ₅₀ (Rabbit) 20,000 mg/kg | Acute LD ₅₀ (Rat):5,800 mg/kg |
| Methyl-ethyl ketone | 78-93-3 | LC ₅₀ (Rat): >5,000 ppm, 6 hours | LD ₅₀ (Rabbit) 5 to 13 g/kg | LD ₅₀ (Rat) 2,700 to 5,600 mg/kg |
| | | | | |
| | | | | |

LC₅₀ — The concentration of the chemical in air that kills 50% of the test animals in a given time (usually four hours)

Chronic toxicity: Ingredients are not listed by the IARC, NTP, OSHA, or EPA as carcinogenic. Repeated or prolonged exposure may cause skin dryness or cracking. Repeated or prolonged exposure in excess of exposure limits in Section 8 may cause damage to the respiratory tract, lungs, liver, and kidney.

Sensitization: Not known to cause sensitization in humans.

Section 12. ECOLOGICAL INFORMATION

Ecotoxicity effects: EC₅₀ Fathead minnow 96-hour 527 to 8,890 mg/l (TLm — Median Threshold Limit). The product components are not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful effect on the environment.

Persistence and Degradability: Expected to be readily biodegradable.
Products of degradation: carbon oxides (CO, CO₂ and water)

Section 13. DISPOSAL CONSIDERATIONS

Cleanup considerations: Waste from this product may be hazardous as defined under RCRA 40 CFR 261. Waste must be tested for ignitability to determine the applicable EPA hazardous waste numbers. Incinerate in an approved facility. Do not incinerate a closed container. Disposal of this material must be done in accordance with federal, state and/or local regulations. The material destined for disposal must be characterized properly and may differ from the product described in this SDS if mixed with other wastes.

Section 14. TRANSPORT INFORMATION

Please refer to 49 CFR 172.101:

DOT:

Transport information: This material is regulated under DOT when transported via U.S. commerce routes.

Proper shipping name:

UN/identification no.: UN1133

Hazardous Materials Description: Flammable Liquids, n.o.s. (Acetone, Methyl ethyl ketone)

Hazard class: 3

Packing group: II

Section 15. REGULATORY INFORMATION

U.S. federal regulatory information:

State and community right-to-know regulations:

The following component(s) of this material are identified on the regulatory lists below:

U.S. TSCA Chemical inventory Section 8(b)

OSHA — This product is determined to be hazardous as defined in the OSHA Hazard Communications Standard.

CERCLA Sections 102a/103 (40 FR 302.4):

Acetone, methyl-ethyl ketone, and cyclohexanone: Reportable Quantity (RQ): 5000 pounds

Tetrahydrofuran: Reportable Quantity (RQ): 1,000 pounds

Some Components of this product are listed in the following sections of **SARA**:

SARA Title III Section 302 — N/A

SARA Title III Section 304 — N/A

SARA Title III Section 313 — Methyl ethyl ketone

SARA Title III Sections 311/312 Hazardous Categories (40 CFR 370.21)

Acute health hazard: Yes

Chronic health hazard: Yes

Fire hazard: Yes

Reactive Hazard: No

Pressure Hazard: No

California Proposition 65 Components

This product does not contain any chemicals known to the State of California to cause cancer, birth defects, or any other reproductive harm.

WHMIS (Canada)

Class B-2: Flammable liquid with a flash point lower than 100°F (37.8°C)

Class D-2A: Material causing other toxic effects

NOTE: User must consult with applicable state and local agencies for special specifics, determinations or compliance obligations regarding this product.

Section 16. OTHER INFORMATION

Standards and Certification Listings:

This product meets the performance requirements of ASTM F656. It also meets SCAQMD Rule 1168/316A. It is compliant with LEED® (Leadership in Energy and Environmental Design). When using this product, credit can be claimed for LEED® Green Building Rating System – Indoor Environmental Quality.

The information and recommendations contained herein are based upon tests, data, and information resources believed to be reliable. However, the J.C. Whitlam Manufacturing Company, Inc., and its related operations or divisions (Whitlam) do not guarantee the accuracy or completeness, nor shall any of this information constitute a warranty, whether expressed or implied, as to the safety of goods, the merchantability of the goods or the fitness of the goods for a particular purpose. Adjustment to conform to actual conditions of usage may be required. Whitlam assumes no responsibility for results obtained or for incidental or consequential damages, including lost profits, arising from the use of this data. No warranty against infringement of any patent, copyright or trademark is made or implied.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product name : MINNCARE® Cold Sterilant
MINNCARE® Liquid Disinfectant

Product code : 176-01-001,176-01-002,176-01-003,78399-646,78399-647,78399-648,78398-229,78397-983,78397-825,78325-150,78325-300,78325-400,78401-505

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Sanitizing of RO water systems

1.3. Details of the supplier of the safety data sheet

Medivators Inc.
14605 28th Avenue North
Minneapolis, MN 55447 - USA
T 1-800-328-3340

1.4. Emergency telephone number

Emergency number : 1-800-424-9300

SECTION 2: Hazards identification – This label is regulated by the EPA under FIFRA. Refer to Section 15.

2.1. Classification of the substance or mixture


GHS-US classification

Oxidizing liquid 2
Organic peroxide G
Corrosive to metals 1
Acute toxicity 4 (Inhalation)
Skin corrosion 1A
Serious eye damage 1
Specific target organ toxicity - Single exposure 3

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US) :

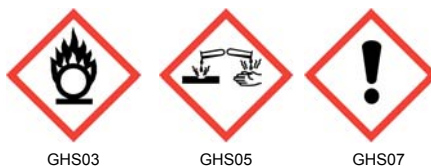

Signal word (GHS-US) :

Danger

Hazard statements (GHS-US) :

May intensify fire; oxidiser. and eye damage. Harmful if inhaled. May cause respiratory irritation. May cause drowsiness or dizziness

Precautionary statements (GHS-US) :

Keep away from heat. Keep/Store away from clothing and other combustible materials. Take any precaution to avoid mixing with combustibles (metals, oxidizing materials, alkalis, caustics, chlorine, formaldehyde, salts, flammable organics). Keep only in original container. Use only outdoors or in a well-ventilated area. Do not breathe dusts or mists. Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. Absorb spillage to prevent material damage. If on skin (or hair): Rinse skin with water/shower. If on clothing: Rinse immediately contaminated clothing and skin with plenty of water before removing clothes. Wash contaminated clothing before reuse. Immediately call a poison center/doctor. If swallowed: Rinse mouth. Do NOT induce vomiting. Immediately call a poison center/doctor. If inhaled: Remove person to fresh air and keep comfortable for breathing. Immediately call a poison center/doctor. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison center/doctor. Store in corrosive resistant container with a resistant inner liner. Store in a well-ventilated place. Keep container tightly closed. Store locked up. Dispose of contents/container in accordance with local/regional/national/international regulations.

2.3. Other hazards

No additional information available.

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

3.2. Mixture

| Name | Product identifier | % | GHS-US classification |
|-------------------|--------------------|-----------|--|
| Hydrogen peroxide | (CAS No) 7722-84-1 | 10 - 30 | Ox. Liq. 2 Acute Tox. 4 (Oral) Acute Tox. 4 (Inhalation) Skin Corr. 1A |
| Acetic acid | (CAS No) 64-19-7 | 9 | Flam. Liq. 3 Acute Tox. 4 (Dermal) Skin Corr. 1A |
| Peroxyacetic acid | (CAS No) 79-21-0 | 3 - 7 | Flam. Liq. 3 Org. Perox. D Acute Tox. 2 (Inhalation) Acute Tox. 4 (Oral) Acute Tox. 4 (Dermal) Skin Corr. 1A STOT SE 3 |
| Stabilizer | Proprietary | 0.5 – 1.5 | Eye Dam. 1 Met. Corr. 1 |

* The specific chemical identity and exact percentage (concentration) of composition has been withheld as a trade secret in accordance with paragraph (i) of §1910.1200.

SECTION 4: First aid measures

4.1. Description of first aid measures

- First-aid measures after inhalation : If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical advice/attention.
- First-aid measures after skin contact : In case of contact, immediately flush skin with plenty of water. Remove contaminated clothing and shoes. Wash clothing before reuse. Get immediate medical advice/attention.
- First-aid measures after eye contact : In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. If easy to do, remove contact lenses, if worn. Get immediate medical advice/attention.
- First-aid measures after ingestion : Do NOT induce vomiting. Rinse mouth. Never give anything by mouth to an unconscious person. Get immediate medical advice/attention.

4.2. Most important symptoms and effects, both acute and delayed

- Symptoms/injuries after inhalation : Harmful if inhaled. May cause respiratory irritation.
- Symptoms/injuries after skin contact : Causes severe skin burns. Symptoms may include redness, pain, blisters.
- Symptoms/injuries after eye contact : Causes serious eye damage. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva. May cause burns.
- Symptoms/injuries after ingestion : May be harmful if swallowed. May cause stomach distress, nausea or vomiting. May cause burns to the linings of the mouth, throat, and gastrointestinal tract.

4.3. Indication of any immediate medical attention and special treatment needed

Symptoms may not appear immediately. In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

SECTION 5: Firefighting measures

5.1. Extinguishing media

- Suitable extinguishing media : Water spray, dry chemical, foam, carbon dioxide.
- Unsuitable extinguishing media : Do not use water jet.

5.2. Special hazards arising from the substance or mixture

- Fire hazard : Products of combustion may include, and are not limited to: oxides of carbon, oxygen. Danger of developing toxic pyrolyse products.
- Explosion hazard : Heat may build pressure, rupturing closed containers, spreading fire and increasing risk of burns and injuries. This material increases the risk of fire and may aid combustion.

5.3. Advice for firefighters

- Protection during firefighting : Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Use water spray to cool exposed surfaces.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

- General measures : Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove ignition sources.

6.2. Methods and material for containment and cleaning up

- For containment : In case of accidental spillage, contain the spill and neutralize it with sodium bicarbonate or sodium carbonate. Use appropriate personal protection equipment (PPE).

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Methods for cleaning up : Scoop up material and place in a disposal container. Absorb spillage to prevent material damage. Provide ventilation. Do not reuse the liquid material.

6.3. Reference to other sections

See section 8 for further information on protective clothing and equipment and section 13 for advice on waste disposal.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Additional hazards when processed : May be corrosive to metals.
 Precautions for safe handling : Keep away from sources of ignition. Do not get in eyes, on skin, or on clothing. Do not breathe dust/fume/gas/mist/vapors/spray. Do not swallow. Handle and open container with care. Use only outdoors or in a well-ventilated area. When using do not eat, drink or smoke. Never return unused material to original container.
 Hygiene measures : Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Proper grounding procedures to avoid static electricity should be followed.
 Storage conditions : Keep out of the reach of children. Keep container tightly closed. Keep only in the original container in a cool, well-ventilated place. Store away from other materials. Floor needs a protective coating against acid. Store at temperatures not exceeding 23.9 °C (75 °F). Protect from sunlight. Store locked up.

7.3. Specific end use(s)

Not available.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Hydrogen peroxide (7722-84-1) | | |
|-------------------------------|-------------------------------------|--|
| ACGIH | ACGIH TWA (ppm) | 1 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 1.4 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 1 ppm |
| Acetic acid (64-19-7) | | |
| ACGIH | ACGIH TWA (ppm) | 10 ppm |
| ACGIH | ACGIH STEL (ppm) | 15 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 25 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 10 ppm |
| Peroxyacetic acid (79-21-0) | | |
| ACGIH | ACGIH STEL (ppm) | 0.4 ppm (inhalable fraction and vapor) |
| OSHA | Not applicable | |
| Stabilizer (Proprietary) | | |
| ACGIH | Not applicable | |
| OSHA | Not applicable | |

8.2. Exposure controls

Appropriate engineering controls : Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits. Ensure that eyewash stations and safety showers are close to the workstation location.
 Hand protection : Wear chemically resistant protective gloves.
 Eye protection : Wear approved eye protection (properly fitted dust- or splash-proof chemical safety goggles) and face protection (face shield).
 Skin and body protection : Wear suitable protective clothing. Wear solvent resistant apron and boots for spills.
 Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
 Environmental exposure controls : Maintain levels below Community environmental protection thresholds.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Other information : Do not eat, smoke or drink where material is handled, processed or stored. Wash hands carefully before eating or smoking. Handle according to established industrial hygiene and safety practices.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Liquid
Appearance : Clear
Color : Colorless
Odor : Acid
Odor threshold : No data available
pH : 0.8 +/- 3
Relative evaporation rate (butylacetate=1) : No data available
Melting point : No data available
Freezing point : No data available
Boiling point : No data available
Flash point : No data available
Auto-ignition temperature : No data available
Decomposition temperature : No data available
Flammability (solid, gas) : Not flammable
Vapor pressure : No data available
Relative vapor density at 20 °C : No data available
Relative density : 1.09 - 1.14
Solubility : No data available
Partition coefficient: n-octanol/water : No data available
Log Pow : No data available
Log Kow : No data available
Viscosity, kinematic : No data available
Viscosity, dynamic : No data available
Explosive properties : No data available
Oxidising properties : May intensify fire; oxidiser
Explosive limits : No data available
SADT : >60° C

9.2. Other information

No additional information available.

SECTION 10: Stability and reactivity

10.1. Reactivity

May cause or contribute to the combustion of other material generally by yielding oxygen. May be corrosive to metals.

10.2. Chemical stability

Stable under normal storage conditions. Decomposes slowly to release oxygen.

10.3. Possibility of hazardous reactions

No dangerous reaction known under conditions of normal use.

10.4. Conditions to avoid

Heat. Sources of ignition. Incompatible materials.

10.5. Incompatible materials

Metals. Oxidizing materials. Alkalis. Caustics. Chlorine. Formaldehyde. Salts. Flammable organics.

10.6. Hazardous decomposition products

May include, and are not limited to: oxides of carbon, oxygen. Do not mix with chlorinated products as this could liberate toxic corrosive chlorine gas.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Harmful if inhaled.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

| MINNCARE Cold Sterilant | |
|-------------------------------|---|
| LD50 oral rat | > 2000 mg/kg |
| LD50 dermal rabbit | > 2000 mg/kg |
| LC50 inhalation rat | >2.0 but ≤10.0 mg/l (Calculated using ATE values) |
| Hydrogen peroxide (7722-84-1) | |
| LD50 oral rat | 801 mg/kg |
| LD50 dermal rat | 4060 mg/kg |
| LD50 dermal rabbit | 2000 mg/kg |
| LC50 inhalation rat | 2 g/m ³ /4 h |
| Acetic acid (64-19-7) | |
| LD50 oral rat | 3310 mg/kg |
| LD50 dermal rabbit | 1060 mg/kg |
| Peroxyacetic acid (79-21-0) | |
| LD50 oral rat | 1540 mg/kg |
| LD50 dermal rabbit | 1410 µl/kg |
| LC50 inhalation mouse | 0.524 mg/l/4h |
| Stabilizer (Proprietary) | |
| LD50 oral rat | 2400 mg/kg |
| LD50 dermal rabbit | > 7940 mg/kg |

Skin corrosion/irritation : Causes severe skin burns.
 Serious eye damage/irritation : Causes serious eye damage.
 Respiratory or skin sensitization : Based on available data, the classification criteria are not met.
 Germ cell mutagenicity : Based on available data, the classification criteria are not met.
 Carcinogenicity : Based on available data, the classification criteria are not met.

| Hydrogen peroxide (7722-84-1) | |
|-------------------------------|----------------------|
| IARC group | 3 - Not classifiable |

Reproductive toxicity : Based on available data, the classification criteria are not met.
 Specific target organ toxicity (single exposure) : May cause respiratory irritation.
 Specific target organ toxicity (repeated exposure) : Based on available data, the classification criteria are not met.
 Aspiration hazard : Based on available data, the classification criteria are not met.
 Symptoms/injuries after inhalation : Harmful if inhaled. May cause respiratory irritation. May cause drowsiness and dizziness.
 Symptoms/injuries after skin contact : Causes severe skin burns. Symptoms may include redness, pain, blisters.
 Symptoms/injuries after eye contact : Causes serious eye damage. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva. May cause burns.
 Symptoms/injuries after ingestion : May be harmful if swallowed. May cause stomach distress, nausea or vomiting. May cause burns to the linings of the mouth, throat, and gastrointestinal tract.

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general : Not considered to be harmful to aquatic life.

12.2. Persistence and degradability

No additional information available.

12.3. Bioaccumulative potential

| MINNCARE Cold Sterilant | |
|---------------------------|------------------|
| Bioaccumulative potential | Not established. |

12.4. Mobility in soil

No additional information available.

12.5. Other adverse effects

Effect on the global warming : No known ecological damage caused by this product.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste disposal recommendations : This material must be disposed of in accordance with all local, state, provincial, and federal regulations. The generation of waste should be avoided or minimized wherever possible.

SECTION 14: Transport information

In accordance with DOT.

UN-No.(DOT) : UN3149
 Proper Shipping Name (DOT) : Hydrogen peroxide and peroxyacetic acid mixtures, stabilized
 Department of Transportation (DOT) Hazard Classes : 5.1 (8)
 Hazard labels (DOT) :



Packing group (DOT) : II

Additional information

Other information : No supplementary information available.
 Special transport precautions : Do not handle until all safety precautions have been read and understood.

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory.

| | |
|------------------------------------|--|
| EPA FIFRA Pesticide Product Notice | This chemical is a pesticide registered by the United States Environmental Protection Agency and is subject to certain labeling requirements under federal pesticide law. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS), and for workplace labels of non-pesticide chemicals. The hazard information required on the pesticide label is reproduced below. The pesticide label also includes other important information, including directions for use. |
| EPA FIFRA Signal Word | Danger |
| EPA FIFRA Hazard Statement | Keep Out of Reach of Children |
| EPA FIFRA Precautionary Statements | Hazard to Humans and Domestic Animals |

Hydrogen peroxide (7722-84-1)

Listed on the United States SARA Section 302

SARA Section 302 Threshold Planning Quantity (TPQ) : 1000 (concentration >52%)

Peroxyacetic acid (79-21-0)

Listed on the United States SARA Section 302

Listed on United States SARA Section 313

SARA Section 302 Threshold Planning Quantity (TPQ) : 500

SARA Section 313 - Emission Reporting : 1.0 %

15.2. US State regulations

MINNCARE Cold Sterilant

State or local regulations : This product does not contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

SECTION 16: Other information

Date of issue : 02/19/2015
 Other information : None.

MINNCARE® Cold Sterilant

Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

MINNCARE® is a registered trademark of Medivators Inc.


Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.

SAFETY DATA SHEET

Section 1: Product and Company Identification

Product Name: LUBRI-JOINT® Water Dispersible Gasket Lubricant
Product Code: 78713
Product Use: Lubricant for rubber gaskets. Suitable for all types of pipelines, including PVC and soil pipe.
Supplier: LA-CO Industries, Inc.
 1201 Pratt Boulevard
 Elk Grove Village, IL.
 60007-5746
 E-mail Contact: customer_service@laco.com
Phone: (847) 956-7600
Fax: (847) 956-9885
24-hour Emergency: CHEMTREC: (800) 424-9300

Section 2: Hazards Identification

| Protective Clothing | GHS Classification | WHMIS (Canada) | Transport |
|-----------------------------|--|--|---------------|
| Not Required for Normal Use | Not classified as a hazardous chemical |  Not controlled | Not Regulated |

Emergency Overview: Non-hazardous. Used in potable water supply systems, certified to NSF/ANSI Standard 61-G.
Appearance, Color and Odor: off-white paste, bland odor.
 USA: This product is not a hazardous material as defined by 29 CFR1910.1200, OSHA Hazard Communication Standard.
 Canada: This is not a controlled product under WHMIS.
 European Union (EU): This product is not classified as hazardous according to Regulation (EC) No 1272/2008.

Potential Health Effects **ACUTE (short term):**
Relevant Route(s) of Exposure: Skin contact.
Inhalation: Exposure to hazardous substances by inhalation is not expected with normal use.
Ingestion: Not an expected route of occupational exposure. Acute oral toxicity of the component substances is low. Swallowing large amounts of the product may cause nausea and diarrhea.
Skin: Prolonged skin contact may cause mild skin irritation.
Eye: Not an expected route of occupational exposure. Paste may cause mild irritation with direct eye contact.
CHRONIC (long term): see Section 11 for additional toxicological data
 Long-term health effects are not expected with normal use.
 Prolonged or repeated skin contact may cause mild skin irritation.

Medical Conditions Aggravated by Exposure: Not available
Interactions With Other Chemicals: Not available
Potential Environmental Effects: Not available

SAFETY DATA SHEET

Section 3: Composition / Information on Ingredients

| Chemical Name | CAS No. | Wt. % | EINECS / ELINCS | Symbol | Risk Phrases |
|---|---------|-------|-----------------|--------|--------------|
| No hazardous/dangerous ingredients by OSHA, WHMIS and EU criteria | | | | | |

Section 4: First Aid Measures

- Inhalation:** If symptoms are experienced remove source of contamination or move victim to fresh air and obtain medical advice.
- Eye Contact:** No effects expected. If irritation occurs, flush contaminated eye(s) with lukewarm, gently flowing water for 5 minutes. If irritation persists, obtain medical advice.
- Skin Contact:** No health effects expected. If irritation does occur, flush with lukewarm, gently flowing water for 5 minutes. If irritation persists, obtain medical advice.
- Ingestion:** If irritation or discomfort occurs, obtain medical advice immediately.

Section 5: Fire Fighting Measures

- Flammable Properties:** Product will burn if involved in a fire. Flashpoint: >104°C (>220°F)
- Suitable extinguishing Media:** For small fires, use water spray, dry chemical, carbon dioxide, or alcohol-resistant foam. For large fires, use carbon dioxide, dry chemical powder, alcohol-resistant foam or polymer foam. Use water spray to cool fire-exposed containers.
- Unsuitable extinguishing Media:** Do not use water jet on hot, molten product.
- Explosion Data:**
- Sensitivity to Mechanical Impact:** Not applicable
 - Sensitivity to Static Discharge:** Not applicable
- Specific Hazards arising from the Chemical:** If involved in a fire, combustion may produce toxic and irritating fumes and gases.
- Protective Equipment and precautions for firefighters:** Self-contained breathing apparatus and protective clothing should be worn. Remove all unprotected personnel.

Section 6: Accidental Release Measures

- Personal Precautions:** Wear protective gloves to prevent skin contact. Contaminated gloves and clothing should be washed before re-use.
- Environmental Precautions:** Prevent the product from entering sewers or waterways.
- Methods for Containment:** Not applicable
- Methods for Clean-up:** Pick up spilled product and collect for re-use or proper disposal. Dispose of any contaminated, unusable product as described in Section 13 of this SDS.

Section 7: Handling and Storage

- Handling:** Keep out of reach of children. Avoid breathing any fumes from thermal decomposition. Do not ingest.
- Storage:** Store out of direct sunlight and away from heat, flames and ignition sources. Keep container closed when not in use.

SAFETY DATA SHEET

Section 8: Exposure Controls/Personal Protection

Exposure Guidelines

Measurable airborne concentrations of the component substances are not expected when the product is used for its intended purpose.

Exposure Controls

Engineering Controls: Not required for normal use.

Personal Protection: Wear protective equipment appropriate for the workplace conditions where this product is used.

Eye/Face Protection: Not required for normal use. Wear safety glasses or goggles when needed to prevent eye contact.

Skin Protection: Not required for normal use. Wear gloves when needed to prevent repeated or prolonged contact.

Respiratory Protection: Not required for normal use

General Hygiene Measures: Avoid contact with the skin. Keep out of reach of children. Wash hands at the end of every work shift and before eating, drinking, smoking or using the toilet.

Section 9: Physical and Chemical Properties

| | | | |
|--------------------------------------|----------------------------------|------------------------------------|-----------------|
| Physical State: | Semi-solid | Flash Point & method: | >104°C (>220°F) |
| Appearance, Color and Odor: | Off-white paste, bland odor | Autoignition Temperature: | Not available |
| Odor Threshold: | Not available | Flammability Limits in Air: | Not available |
| pH: | 8.95 – 9.5 | Vapor Pressure: | Not applicable |
| Relative density (water = 1): | 1.26 Bulk density: 10.5 lbs/gal. | Vapor Density (Air = 1): | Not applicable |
| Partition coefficient: | Not available | Evaporation Rate: | Not applicable |
| Solubility: | Completely dispersible in water. | Boiling Point/Range: | >104°C (220°F) |
| Viscosity: | Viscous paste | Freezing Point: | <0°C (32°F) |
| Decomposition Temperature: | Not available | VOC Content: | 33% |

Section 10: Stability and Reactivity

Chemical Stability: Stable at normal room temperature.

Conditions to Avoid: Avoid contact with strong oxidizing agents.

Incompatible Materials: Not available

Hazardous Decomposition Products: Combustion or heating to decomposition may release irritating and toxic fumes.

Possibility of Hazardous Reactions: Not applicable

SAFETY DATA SHEET

Section 11: Toxicological Information

| | |
|-----------------------------------|---|
| <u>Acute Toxicity Data</u> | Acute toxicity data are not available for the product. Acute toxicity of the component substances is low. |
| | |
| <u>Other Toxicity Data</u> | |
| Carcinogenicity: | Normal use of this product will not result in exposure to any component that is considered a human carcinogen by IARC (International Agency for Research on Cancer), ACGIH (American Conference of Governmental Industrial Hygienists, OSHA or NTP (National Toxicology Program). |
| Irritation: | No data available. Contains a biodegradable soap component. Soaps can cause mild, reversible irritation to eyes and skin. |
| Corrosivity: | Not applicable |
| Sensitization: | Not applicable |
| Neurological Effects: | Not applicable |
| Genetic Effects: | Not applicable |
| Reproductive Effects: | Not applicable |
| Developmental Effects: | Not applicable |
| Target Organ Effects: | Not applicable |

Section 12: Ecological Information

| | |
|--------------------------------------|----------------------------------|
| Ecotoxicity: | Not available |
| Persistence/Degradability: | Biodegradable soap product. |
| Bioaccumulation/Accumulation: | Not available |
| Mobility: | Completely dispersible in water. |

Section 13: Disposal Considerations

| | |
|-------------------------------|---|
| Waste Disposal Method: | Do NOT dump into any sewers, on the ground or into any body of water. Store material for disposal as indicated in Section 7 Handling and Storage. The conditions of use, storage and disposal of this product are beyond our control and may be beyond our knowledge. For this and other reasons, LA-CO Industries, Inc. does not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of this product. Waste must be disposed of in accordance with relevant EU Directives and national, regional and local environmental control regulations. |
|-------------------------------|---|

Section 14: Transport Information:

| | |
|--|---------------|
| U.S. Hazardous Materials Regulation (DOT 49CFR): | Not regulated |
| Canadian Transportation of Dangerous Goods (TDG): | Not regulated |
| IMDG: | Not regulated |
| ICAO/IATA: | Not regulated |

SAFETY DATA SHEET

Section 15: Regulatory Information

USA

TSCA Status: All component substances are listed on the TSCA inventory.

SARA Title III

Sec. 302/304: None
 Sec. 311/312: Not applicable
 Sec. 313: Not applicable
 CERCLA RQ: Not applicable

California Prop 65: This product does not contain chemicals known to the State of California to cause cancer or reproductive toxicity.

Canada

This product has been classified in accordance with the hazard criteria of the *Controlled Products Regulations* and the MSDS contains all the information required by the *Controlled Products Regulations*.

WHMIS Classification: Not controlled.

NSNR: All component substances are listed on Canada's Domestic Substances List (DSL).

NPRI Substances: Not applicable

EU Classification

European Inventories: All component substances are listed in EINECS.

Symbol: This article is not classified as dangerous according to Directive 1999/45/EC and its amendments.

Section 16: Other Information

Preparation Information:

Revision Date: September 27, 2012

Revision Summary: Section 9: Revised physical and chemical properties information.

Supplier Note: The information contained herein is based on data available to us and is accurate and reliable to the best of our knowledge and belief. However, LA-CO Industries, Inc. makes no representations as to its completeness or accuracy. Information is supplied on condition that persons receiving such information will make their own determination as to its suitability for their purposes prior to use. In no event will LA-CO Industries, Inc. be responsible for damages of any nature whatsoever resulting from the use of or reliance upon the information contained herein.

Prepared by: LEHDER Environmental Services Limited (519) 336-4101
 www.lehder.com

While LEHDER Environmental Services Limited believes that the data set forth herein is accurate, as of the date hereof, LEHDER makes no warranty with respect thereto and expressly disclaims all liability for reliance thereon. Such data is offered solely for your consideration, investigation and verification.



SAFETY DATA SHEET

RECTORSEAL® NO.5® SPECIAL

Low-temperature, low-odor pipe thread sealant

SECTION 1 – PRODUCT AND COMPANY INFORMATION

Product Name

Rectorseal® No.5® Special

Product Codes

26551, 26431, 26390, 26271, 26191, 26112

Chemical Family

Organic

Use

Pipe thread sealant

Manufacturer's Name

The RectorSeal Corporation
2601 Spenwick Drive
Houston, Texas 77055 USA

Date of Validation

January 23, 2015

Date of Preparation

October 10, 2012

HMIS Codes

Health 1
Flammability 1
Reactivity 0
PPI B

Emergency Telephone No.

Chemtrec 24 Hours
(800)-424-9300 USA
(703)-527-3887 International

Technical Service Telephone No.

(800)-231-3345 or (713)-263-8001

SECTION 2 – HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

OSHA Hazards

Target Organ Effect, Teratogen, Reproductive hazard

Target Organs

Liver, Kidney, Testes.

GHS CLASSIFICATION

Eye irritation (Category 2B)
Reproductive toxicity (Category 2)

GHS Label elements, including precautionary statements



GHS08: Health Hazard/ Target Organ Toxicity

Signal word: **Warning**

Hazard statement(s)

H320 - Causes eye irritation.

H361 - Suspected of damaging fertility or the unborn child.

Precautionary statement(s)

P281 - Use personal protective equipment as required.

P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

Summary Of Acute Hazards

Irritation to eyes, nose and throat; drowsiness, narcosis, tremors and other CNS effects at high concentration.

Route Of Exposure, Signs And Symptoms

INHALATION

Nasal and respiratory irritation, dizziness, narcosis, headache, nausea, CNS depression and unconsciousness.

EYE CONTACT

Watering, blurred vision, inflammation and irritation which can result in corneal injury.

SKIN CONTACT

Irritation, dermatitis.

INGESTION

Nausea, vomiting; CNS depression; irritation of gastrointestinal tract, liver and peritoneal wall; lung congestion.

SUMMARY OF CHRONIC HAZARDS

Skin irritation and dermatitis. Possible liver and kidney damage.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Individuals with pre-existing or chronic diseases of the eyes, skin, respiratory system, cardiovascular system, gastrointestinal system, liver or kidneys may have increased susceptibility to excessive exposures.

SECTION 3 – COMPOSITION/INFORMATION ON INGREDIENTS

| | |
|-----------------------|--------------------------------|
| Ingredient: | Diethylene Glycol Methyl Ether |
| Percentage by weight: | 16 Max |
| CAS Number: | 111-77-3 |
| EC#: | 203-906-6 |

SECTION 4 – FIRST AID MEASURES

- If inhaled: If overcome by exposure, remove victim to fresh air immediately. Give oxygen or artificial respiration as needed. Obtain emergency medical attention. Prompt action is essential.
- If on skin: Immediately flush with large amounts of water for at least 15 minutes. Get prompt medical attention.
- If in eyes: Flush eyes with large amounts of water for 15 minutes. Get medical attention.
- If swallowed: If swallowed, call a physician immediately. Only induce vomiting at the instruction of a physician. Never give anything by mouth to an unconscious person.

SECTION 5 – FIRE FIGHTING MEASURES

Extinguishing Media

Foam, dry chemical, carbon dioxide or water fog.

Special Fire Fighting Procedures: Wear self-contained breathing apparatus (SCBA) and other protective clothing. Hazardous decomposition products possible (see Section 10).

Unusual Fire And Explosion Hazards: None known.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Steps To Be Taken In Case Material Is Released Or Spilled: Remove all sources of ignition. Use absorbent materials to prevent footing hazard and to contain. Ventilate area with natural or explosion-proof, forced air ventilation. Avoid flushing into sewers, drains, waterways, and soil. Wear protective clothing and respiratory protection during cleanup.

SECTION 7 – HANDLING AND STORAGE

Precautions To Be Taken In Handling And Storing: Keep container closed and upright when not in use. Do not store near heat, sparks, or open flames.

Other Precautions: Avoid prolonged or repeated contact with skin or clothing. Empty containers may contain residues; treat as if full and observe all products precautions. Do not reuse empty containers.

KEEP OUT OF REACH OF CHILDREN.

SECTION 8 – EXPOSURE CONTROLS/PERSONAL PROTECTION

Ingredient Units

Diethylene Glycol Methyl Ether

ACGIH TLV: N/D

OSHA PEL: N/D

Respiratory Protection (Specify Type): In confined poorly ventilated areas, use NIOSH/MSHA approved air purifying or supplied air purifying or supplied air respirators.

Ventilation – Local Exhaust: Acceptable

Special: Explosion-proof equipment.

Mechanical (General): Preferable

Other: N/A

Protective Gloves: Wear rubber gloves.

Eye Protection: Chemical splash goggles (ANSI Z-87.1 or equivalent)

Other Protective Clothing Or Equipment: Coveralls recommended.

Work/Hygienic Practices: Where use can result in skin contact, wash exposed areas thoroughly before eating, drinking, smoking, or leaving work area. Launder contaminated clothing before reuse.

SECTION 9 – PHYSICAL AND CHEMICAL PROPERTIES

Boiling point: 374°F (190°C) @ 760 mmHg

Specific gravity (H₂O = 1): 1.40

Vapor pressure (mmHg): 0.25 @ 77°F (20°C)

Melting point: N/A

Vapor Density (Air = 1): >1

Evaporation rate (Ethyl Acetate = 1): <1

Appearance/Odor: Gray paste/Mild odor

Solubility in water: 16%

Volatile Organic Compounds (VOC) Content
(theoretical percentage by weight): 16% or (160 g/L)

Flash point: 208°F (98°C) SETA CC

Lower explosion limit: N/D

Upper explosion limit: N/D

SECTION 10 – STABILITY AND REACTIVITY

Stability: Stable

Conditions To Avoid: Heat, sparks, open flames, and strong oxidizing. Temperatures above 500°F (260°C).

Incompatibility (Materials To Avoid): Gaseous oxygen, strong oxidizing materials, molten alkali metals.

Hazardous Decomposition Products: CO, CO₂ and fragmented hydrocarbons.

Hazardous Polymerization: Will not occur.

SECTION 11 – TOXICOLOGY INFORMATION

Chronic Health Hazards

No ingredient in this product is an IARC, NTP or OSHA Lister carcinogen.

Toxicology Data

Diethylene Glycol Methyl Ether

Oral-Rat LD50: 5500 mg/kg
Inhalation-Rat LC50: N/D

SECTION 12 – ECOLOGICAL INFORMATION

Ecological Data

| | |
|------------------------------------|---------------------------------------|
| Ingredient Name: | Diethylene Glycol Methyl Ether |
| Food Chain Concentration Potential | N/A |
| Waterfowl Toxicity | N/A |
| BOD | 34% |
| Aquatic Toxicity | N/A |

SECTION 13 – DISPOSAL CONSIDERATIONS

Waste Classification: Non-regulated solid waste

Disposal Method: Approved landfill

Waste from this product is not considered hazardous as defined under the Resource Conservation and Recovery Act (RCRA) 40 CFR 261. Dispose of in accordance with federal, state, and local regulation regarding pollution.

SECTION 14 – TRANSPORTATION INFORMATION

| | |
|-----------------|---------------|
| DOT: | Non-regulated |
| Ocean (IMDG): | Non-regulated |
| Air (IATA): | Non-regulated |
| WHMIS (Canada): | Non-regulated |

SECTION 15 – REGULATORY INFORMATION

Regulatory Data

| | |
|------------------|--------------------------------|
| Ingredient Name: | Diethylene Glycol Methyl Ether |
| SARA 313 | Yes |
| TSCA Inventory | Yes |
| CERCLA RQ | N/A |
| RCRA Code | N/A |

SECTION 16 – OTHER INFORMATION

This document is prepared pursuant to the OSHA Hazard Communication Standard (29 CFR 1910.1200). The information herein is given in good faith, but no warranty, expressed or implied is made.

Consult RectorSeal for further information: (713) 263-8001

SAFETY DATA SHEET



Version 16.1 replaces Version 15.1
Revision date: 01.04.2016
According to (EU) No. 2015/830

SECTION 1

IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY / UNDERTAKING

- 1.1 Product identifier:** SPOTCHECK® SKC-S - aerosol
- 1.2 Relevant identified uses of the mixture and uses advised against:**
Relevant identified uses: Solvent cleaner used in penetrant inspection.
Uses advised against: This product is not recommended for any use other than the identified uses above.
- 1.3 Details of the supplier of the safety data sheet**
Manufacturer: Magnaflux® (A Division of ITW Ltd)
Address: Faraday Road, South Dorcan Industrial Estate, Swindon, UK
Postcode: SN3 5HE
Telephone/fax number: Telephone: +44 (0)1793 524566
Fax: +44 (0)1793 490459
Web: www.eu.magnaflux.com
Email address of competent person responsible for SDS: datasheets@magnaflux.co.uk
National contact: None appointed.
- 1.4 Emergency telephone number:** T: +44 (0)1793 524566 (office hours)
Opening hours: Office hours (GMT) Monday - Thursday 8am - 5pm, Friday 8am - 4pm
Other comments: Emergency telephone service is provided in English only.

SECTION 2

HAZARDS IDENTIFICATION

- 2.1 Classification of the substance or mixture:**
Classification according to Regulation (EC) No 1272/2008 (CLP): **Physical and Chemical Hazard:** Aerosol 1 H222, H229
Health Hazard: Skin Irrit. 2 H315
STOT SE 3 H336
Environmental Hazard: Aquatic Chronic 2 H411
Additional information: No other information.

For full text of hazard statements and EU hazard statements see SECTION 16.

- 2.2 Label Elements:**
Labelling according to regulation (EC) No 1272/2008 [CLP]



Signal Word: DANGER

SAFETY DATA SHEET

Hazard Statement(s):

H222: Extremely flammable aerosol.
 H229: Pressurised container: may burst if heated.
 H315: Causes skin irritation
 H336: May cause drowsiness or dizziness
 H411: Toxic to aquatic life with long lasting effects

Precautionary Statement(s):

P210: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
 P211: Do not spray on an open flame or other ignition source.
 P251 Do not pierce or burn even after use.
 P410 + P412: Protect from sunlight. Do not expose to temperatures exceeding 50 °C.
 P261: Avoid breathing dust/fume/gas/mist/vapours/spray.
 P280: Wear protective gloves/protective clothing/eye protection/face protection.
 P501: Dispose of contents/container to hazardous waste or special collection point.
 P271: Use only outdoors or in a well ventilated area.
 P302+352: IF ON SKIN: Wash with soap and water
 P264: Wash thoroughly after handling.
 P362+P364: Take off contaminated clothing and wash it before reuse.

Supplementary Precautionary Statement(s):

None

Supplementary Hazard Information (EU)

Hazard Determining Component(s)

Hydrocarbons, C7 – C9, isoalkanes

2.3

Other hazards:

Pressurised container: protect from sunlight and do not expose to temperatures exceeding 50 °C. Vapours can form explosive mixtures with air.

SECTION 3

COMPOSITION / INFORMATION ON INGREDIENTS

3.2 Mixtures

| Ingredient Name | CAS No | EC No | REACH Registration Number | % Weight | Classification according to Regulation (EC) No 1272/2008 [CLP] | Additional information |
|---|------------|-----------|---------------------------|----------|--|------------------------|
| Hydrocarbons, C7- C9, isoalkanes | | 921-728-3 | 01-2119471305-42 | 60 -100 | Flam. Liq 2: H225 Skin Irrit. 2: H315 STOT SE3: H336 Asp. Tox. 1: H304 (note1) Aquatic Chronic 2: H411 | No other information |
| Hydrocarbons, C3-4-rich petroleum distillate petroleum gas (1,3 butadiene < 0.1%) | 68512-91-4 | 270-990-9 | (note2) | 10-30 | Press. Gas H280 Flam. Gas 1 H220 | (note3) |
| 1. Mixtures classified as Asp. Tox. 1 H304 need not be labelled when placed on the market in aerosol containers or in containers fitted with a sealed spray attachment. 2. Exempted from the obligation to register in accordance with art.2(7)(a) of REACH Regulation No 1907/2006 3. Not classified as carcinogen, less than 0.1% w/w 1,3 butadiene (EINECS no 203-450-8) | | | | | | |

Note: Hazard statement(s) in this section apply only to raw materials, not necessarily to finished products.

*See Section 16 for hazard statement(s) text in full.

SAFETY DATA SHEET

SECTION 4

FIRST AID MEASURES

- 4.1 Description of first aid measures:**
- General notes:** If symptoms persist, seek medical attention. Show this safety data sheet to the doctor in attendance.
- Following inhalation:** Remove to fresh air. Keep at rest. If not breathing give artificial respiration. Seek prompt medical attention if discomfort persists.
- Following skin contact:** Flush with water, use soap if available. Contaminated clothing should be washed before re-use. Seek medical attention if irritation persists.
- Following eye contact:** Flush eyes with large amounts of water for at least 15 minutes with eyelids held open. Seek medical attention if irritation persists.
- Following ingestion:** Unlikely route of exposure. Rinse mouth with water. Do NOT induce vomiting. If vomiting occurs, keep head low so that stomach contents don't enter the lungs. Never give anything by mouth to an unconscious person. Seek medical attention immediately.
- Self-protection of the first aider:** No action shall be taken involving any personal risk or without suitable training. If it is suspected that the mixture is still present, wear appropriate personal protective equipment.
- 4.2 Most important symptoms, both acute and delayed:**
Prolonged skin contact may cause redness and irritation.
In high concentrations, vapours are anaesthetic and may cause headache, fatigue, dizziness and central nervous system effects.
Fumes from the stomach contents may be inhaled resulting in the same symptoms as inhalation. Avoid vomiting and normal rinse of stomach because of risk of aspiration. May cause discomfort to the eyes. Symptoms: redness and pain.
- 4.3 Indication of any immediate medical attention and special treatment needed:**
None known.

SECTION 5

FIREFIGHTING MEASURES

- 5.1 Extinguishing media:**
Suitable extinguishing media: Carbon dioxide, foam, dry chemical, water fog or spray.
- 5.2 Unsuitable extinguishing media:** Do not use water jet.
Special hazards arising from the substance or mixture: Evacuate immediate area. Shut off 'fuel' to fire. If possible keep unaffected containers cool with water spray.
Aerosols may explode in a fire.
Aerosol contents are extremely flammable.
Hazardous combustion products: Smoke, soot and oxides of carbon. Burning vapour may give off toxic fumes.
- 5.3 Advice for fire-fighter:**
Warn firefighters that aerosols are involved. Self contained breathing apparatus and full protective clothing must be worn. Water spray should be used to cool containers. Contaminated extinguishing water must be disposed of in accordance with official regulations.

SAFETY DATA SHEET

SECTION 6

ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures:**
Suitable protective equipment (see Section 8) should be worn to prevent any contamination of skin, eyes and personal clothing.
- For non-emergency personnel:** Remove ignition sources. Avoid breathing vapours, mist or gas.
- For emergency responders:** Remove ignition sources. Avoid breathing vapours, mist or gas. Keep unnecessary people at a safe distance.
- 6.2 Environmental precautions:**
Prevent liquid from entering drains, sewers and watercourses. Notify the Environment Agency or water authorities if a major spillage occurs.
- 6.3 Methods and material for containment and cleaning up:**
Eliminate sources of ignition. Take measures to prevent the build-up of electrostatic charge.
Avoid breathing vapours. Ventilate surrounding area.
- For containment:** Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite). Place in a UN approved container for disposal.
Large spills should be pumped (using an earthed explosion proof pump) into UN approved containers pending disposal. Dispose of waste according to local/national regulations.
- For cleaning up:** Do not flush away residues with water.
- Other information:** No other information.
- 6.4 Reference to other sections:**
For Personal Protective Equipment see Section 8. For disposal information see Section 13.

SECTION 7

HANDLING & STORAGE

- 7.1 Precautions for safer handling:**
- Protective Measures:** Wear suitable protective clothing such as chemical resistant gloves, apron and goggles/face mask to protect from splashes. Ensure adequate exhaust ventilation when in use.
Avoid contact with skin and eyes. Do not breathe product spray or mist. Risk of vapour concentration in low areas.
- Measures to prevent fire:** Aerosol contents are highly flammable and volatile. Keep away from sources of ignition – no smoking.
Take measures to prevent the build-up of electrostatic charge.
Equipment should be earthed. Use explosion proof electrical/ventilating/lighting equipment. Use only non-sparking tools.
- Advice on general occupational hygiene:** Wash thoroughly after handling.

SAFETY DATA SHEET

| | | |
|-----|---|---|
| 7.2 | <p>Conditions for safe storage, including any incompatibilities:</p> <p>Technical measures and storage conditions:</p> <p>Packaging materials:</p> | <p>Store in a cool dry area away from heat and sources of ignition.</p> <p>Store in original container.</p> |
| | <p>Requirements for storage rooms and vessels:</p> | <p>Pressurised container: protect from sunlight and do not expose to temperatures exceeding 50 °C.</p> <p>Recommended storage temperature 10 °C to 30 °C.</p> |
| | <p>Further information on storage conditions:</p> | <p>Rotate stock and check regularly for damaged items.</p> |
| 7.3 | <p>Specific end use(s):</p> <p>Recommendations:</p> | <p>Use only for Non Destructive Testing (NDT) applications.</p> |
| | <p>Industrial sector specific solutions:</p> | <p>See product data sheet for further information.</p> |

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

- 8.1 Control parameters:**
- Occupational exposure limit values:**
- Occupational exposure figures have been set for some of the components of this preparation based on GESTIS International Limit Values or manufacturers' recommendation.

| Ingredient name | Country | Limit value - 8 hours | | Limit value - short term | |
|-----------------------------------|---------|-----------------------|--------------------|--------------------------|--------------------|
| | | ppm | mg /m ³ | ppm | mg /m ³ |
| Hydrocarbons, C7 – C9, isoalkanes | UK | 241 | 1200 | | |

Data obtained from GESTIS International Limit Values, EH40, supplier's SDS

Note: Where no specific short-term exposure limit is listed, a figure three times the long-term exposure limit should be used.

Derived No Effect Level (DNEL) - Hydrocarbons, C7 – C9, isoalkanes

| End User | Exposure Route | Exposure Time | Effects | DNEL |
|----------|----------------|---------------|----------|------------------------|
| Worker | Inhalation | Long term | Systemic | 2035 mg/m ³ |
| Worker | Dermal | Long term | Systemic | 773 mg/kg bw/day |

Note: The Derived No Effect Level (DNEL) is an estimated safe level of exposure that is derived from toxicity data in accordance with specific guidance within the European REACH regulation. The DNEL may differ from an Occupational Exposure Limit (OEL) for the same chemical. OELs may be recommended by an individual company, a government regulatory body or an expert organization, such as the Scientific Committee for Occupational Exposure Limits (SCOEL) or the American Conference of Governmental Industrial Hygienists (ACGIH). OELs are considered to be safe exposure levels for a typical worker in an occupational setting for an 8-hour work shift, 40 hour work week, as a time weighted average (TWA) or a 15 minute short-term exposure limit (STEL). While also considered to be protective of health, OELs are derived by a process different from that of REACH.

Predicted No Effect Concentration (PNEC) - Hydrocarbons, C7 – C9, isoalkanes

| | |
|------------------------------|---|
| Water - Fresh Water | No data available: testing technically not feasible |
| Water - Marine Water | No data available: testing technically not feasible |
| Water - Intermittent release | No data available: testing technically not feasible |
| Sediment - Fresh water | No data available: testing technically not feasible |
| Sediment - Marine water | No data available: testing technically not feasible |
| Soil | No data available: testing technically not feasible |
| Sewage Treatment plant | No data available: testing technically not feasible |

SAFETY DATA SHEET

8.2 Exposure controls:

Concentrations of product vapours and mists in the working atmosphere must be kept as low as is reasonably practicable. Exposure should be minimised by the use of appropriate containment, engineering control and ventilation measures. Where this is not possible, personal protective equipment should be worn as indicated below where appropriate.

Appropriate engineering controls:

Provide adequate ventilation, including appropriate local extraction, to ensure that the defined occupational exposure limits are not exceeded

Personal protection equipment:

Eye and face protection:

Safety glasses with side-shields conforming to EN166.

Skin protection - hand:

Protective gloves conforming to EN374-3. Use chemical resistant gloves recommended by glove manufacturer as being suitable for **isoparaffins**, if hand exposure is unavoidable. Protective gloves made of **nitrile rubber** are suitable, although other types may be more suitable in other circumstances. For prolonged exposure, recommended gloves with protective index 6, > 480 minutes permeation time according to EN374.

Skin protection – other:

Consult the glove manufacturer for exact breakthrough time. Glove manufacturer's directions for use should be observed. Wear impervious, flame retardant antistatic protective clothing. The type of protective equipment must be selected according to the concentration and amount of dangerous substance at the specific workplace.

Respiratory protection:

In case of insufficient ventilation, wear suitable respiratory equipment. Filter type A. (EN 136, 140, 405, 149, 143) For higher level protection use type ABEK-P3 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under CEN standards.

Thermal hazards:

Not applicable.

Environmental exposure controls:

Avoid any release to the environment.

SECTION 9

PHYSICAL & CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties:

Appearance:

Aerosol containing mobile clear liquid.

Odour:

Mild hydrocarbon.

Odour threshold:

No data available.

pH:

Neutral.

Melting point/freezing point:

No data available.

Initial boiling point and boiling range:

113 – 143 °C.

Flash point (PMCC):

-40 °C (aerosol propellant).

Evaporation rate (BuAc = 100):

155.

Flammability (solid, gas) (Limits in air):

No data available.

Upper/lower flammability or explosive limits:

0.7 – 6.0% (Vol%)

SAFETY DATA SHEET

| | |
|---|---|
| Vapour pressure: | 1.627 kPa @ 20 °C. |
| Vapour density (Air = 1): | > 1. |
| Relative density: | 0.72 g/cm ³ . |
| Solubility: | Insoluble. |
| Partition coefficient: n-octanol/water: | No data available. |
| Auto-ignition temperature: | > 200 °C. |
| Decomposition temperature: | No data available. |
| Viscosity (ASTM D445): | 0.86 mm ² /s @ 25 °C. |
| Explosive properties: | Under normal conditions no danger of explosion. |
| Oxidising properties: | No data available. |

Note: properties relate to the bulk product only unless otherwise stated.

9.2 Other information:
No other information.

SECTION 10 STABILITY & REACTIVITY

| | | |
|------|-------------------------------------|--|
| 10.1 | Reactivity: | No specific reactivity hazards associated with this product. |
| 10.2 | Chemical stability | Stable under normal conditions of use and applications. |
| 10.3 | Possibility of hazardous reactions: | No data available. |
| 10.4 | Conditions to avoid: | Keep away from sources of ignition, hot surfaces and direct sun light. |
| 10.5 | Incompatible materials: | Strong oxidising agents. |
| 10.6 | Hazardous decomposition materials: | None under normal conditions of use. Smoke, soot and oxides of carbon on combustion. |

SECTION 11 TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects: based on data for component materials.

| | |
|--------------------------------|---|
| Acute toxicity - oral: | Based on the available data, the classification criteria are not met. |
| Acute toxicity – dermal: | Based on the available data, the classification criteria are not met. |
| Acute toxicity – inhalation: | Based on the available data, the classification criteria are not met. |
| Skin corrosion/irritation: | Skin Irrit. 2 H315: Causes skin irritation. |
| Serious eye damage/irritation: | Based on the available data, the classification criteria are not met. |
| Respiratory sensitisation: | Data lacking. |
| Skin sensitisation: | Based on the available data, the classification criteria are not met. |
| Germ cell mutagenicity: | Based on the available data, the classification criteria are not met. |
| Carcinogenicity: | Data lacking. |
| Reproductive toxicity: | Based on the available data, the classification criteria are not met. |

SAFETY DATA SHEET

STOT single exposure: STOT Single Exp. 3 H336: May cause drowsiness or dizziness.
Affected organs: central nervous system
Route of exposure: inhalation

STOT repeated exposure: Based on the available data, the classification criteria are not met.

Aspiration hazard: Mixtures from Aerosol Dispensers - need not be classified as Asp. Tox. 1 - H304 as the aerosol spray is fine and a pool of product may not be formed in the mouth.

Information on likely Routes of Exposure and Potential Health Effects:

Inhalation: Vapour concentrations above the recommended exposure levels are irritating to the eyes and respiratory tract, may cause headaches and dizziness, are anaesthetic and may have other central nervous system effects.

Ingestion: Not a likely route of exposure. However, harmful: May cause lung damage if swallowed. Ingestion may cause irritation of the mouth, throat and digestive tract. Small amounts of product aspirated into the respiratory system during ingestion or from vomiting may cause bronchopneumonia or pulmonary edema.

Eye contact: May cause redness and pain.

Skin contact: Frequent or prolonged contact with the product may produce irritation and/or skin dryness and cracking. Product will have a de-fatting effect on the skin.

Toxicity Test Results: based on data for component materials, where available.

Hydrocarbons, C7 – C9, isoalkanes

| | | |
|-----------------------------|---------------|-----------------------|
| Acute Toxicity – oral | LD50 (rat) | > 5000 mg/kg |
| Acute Toxicity – dermal | LD50 (rabbit) | > 2000 mg/kg |
| Acute Toxicity – inhalation | LC50 (rat) | 21 mg/l (4 h; vapour) |

Other Information: No other information.

SECTION 12 ECOLOGICAL INFORMATION

Based on data for component materials

12.1 Toxicity:

Hydrocarbons, C7 – C9, isoalkanes

| | | | | |
|-----------------------|---------------------------------|------|-----|-----------|
| Fish | Oncorhynchus mykiss | LL50 | 96h | 18.4 mg/l |
| Aquatic Invertebrates | Daphnia magna | EL50 | 48h | 2.4 mg/l |
| Aquatic Plants | Pseudokirchneriella subcapitata | EL50 | 72h | 29 mg/l |

12.2 Persistence and degradability: Hydrocarbons, C7 – C9, isoalkanes - Biodegradable.

12.3 Bioaccumulative potential: No data available.

Partition coefficient: n-octanol/water (log Kow): No data available.

Bioconcentration factor (BCF): No data available.

SAFETY DATA SHEET

| | | |
|------|--|--|
| 12.4 | Mobility in soil: | The product is immiscible with water and will spread on the water surface. Product is highly volatile - will partition rapidly to air. |
| 12.5 | Results of PBT and vPvB assessment: | This mixture does not contain any substances that are assessed to be a PBT or vPvB. |
| 12.6 | Other adverse effects: | No data available. |

SECTION 13 DISPOSAL CONSIDERATIONS

| | | |
|------|---|--|
| 13.1 | Waste treatment methods: | Dispose of waste and residues in accordance with local authority requirements. Seek the advice of an approved waste disposal contractor for disposal at a licensed facility in accordance with national legislation. |
| | Product/packing disposal: | Empty containers may contain residual product and flammable vapours. Do not pierce or burn container, even after use. Do NOT remove labels. Keep away from sources of ignition. |
| | Waste codes/waste designations according to LoW: | 16 05 04* gases in pressure containers containing dangerous substances. |

NOTE: Waste codes are assigned based upon the most common uses for this material and may not reflect contaminants resulting from actual use. Waste producers need to assess the actual process used when generating the waste and its contaminants in order to assign the proper waste code(s).

| | |
|--|---|
| Waste treatment – relevant information: | Dispose of waste and residues in accordance with local authority requirements. Seek the advice of an approved waste disposal contractor for disposal at a licensed facility in accordance with national legislation |
| Sewage disposal – relevant information: | Do not empty down the drain. |
| Other disposal recommendations: | Use a licensed waste contractor |

SECTION 14 TRANSPORT INFORMATION

| | | |
|------|------------------------------------|--|
| 14.1 | UN number: | ADR/RID: UN1950 IMDG: UN1950 IATA: UN1950 |
| 14.2 | UN proper shipping name: | ADR/RID: AEROSOLS, flammable IMDG: AEROSOLS, flammable IATA: AEROSOLS, flammable |
| 14.3 | Transport hazard class(es): | ADR/RID: 2.1 IMDG: 2.1 IATA: 2.1 |
| 14.4 | Packing group: | ADR/RID: N/A IMDG: N/A IATA: N/A |
| 14.5 | Environmental hazards: | ADR/RID: Yes IMDG: Marine Pollutant: Yes IATA: Yes |

SAFETY DATA SHEET

- 14.6 Special precautions for user:**
ADR/RID – Tunnel code: (D)
IMDG – Ems: F-D, S-U
IATA/ICAO – PAX: 203
IATA/ICAO – CAO: 203
- 14.7 Transport in bulk according to Annex II of Marpol 73/78 and the IBC code:**
Not applicable

SECTION 15 REGULATORY INFORMATION

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture:**
EU Regulations:
This data sheet complies with the requirements of Regulation (EC) No 1272/2008 on the classification, labelling and packaging of substances and mixtures.
Safety data sheet as required by EC-Regulations 1907/2006 and REACH Annex II Amendment (EU) No. 2015/830.
Information according to 2013/10/EU and 2008/47/EC amendment of the aerosol directive 75/324/EEC.
This data sheet is complied according Dir 2013/10/EU, 2008/47/EEC amendment of the aerosol directive 75/324/EEC.
Extra label elements: Pressured container: protect from sunlight and do not expose to temperatures exceeding 50 °C. Do not pierce or burn, even after use. Do not spray on a naked flame or any incandescent material.
Mixtures classified as Asp. Tox. 1 H304 need not be labelled when placed on the market in aerosol containers or in containers fitted with a sealed spray attachment.
- National regulations (Germany):**
Wassergefährdungsklasse (water hazard class): WGK 2 - Hazard to waters.
TechnischeAnleitungLuft (TA-Luft): Class 5.2.5 Organic Substances, except dusts
- 15.2 Chemical safety assessment:**
No data available

SECTION 16 OTHER INFORMATION

- (i) Indication of changes:**
This safety data sheet has been updated to meet the requirements of Regulation EU No 2015/830 and Regulation (EC) No 1272/2008. Removal of the Classification according to 67/548/EEC as amended & Directive 1999/45/EC. Version 16.1 also updated in Section 8 due to updated safety information.
Vertical lines on the left hand side indicate an amendment from the previous version.
- (ii) Abbreviations and acronyms:**
- | | |
|-----------|---|
| ADR | European Agreement concerning the International Carriage of Dangerous Goods by Road (Accord européen relatif au transport international des marchandises Dangereuses par Route) |
| CAS No. | Chemical Abstracts Service number |
| CEN | European Committee for Standardisation |
| CLP | Classification, Labelling Packaging Regulation; Regulation (EC) No 1272/2008 |
| ECHA | European Chemicals Agency |
| EC50 | Half Maximal Effective Concentration |
| EC number | EINECS and ELINCS number |
| EINECS | European Inventory of Existing Commercial Substances |
| ELINCS | European List of notified Chemical Substances |
| GHS | Globally Harmonized System |
| IATA | International Air Transport Association |
| IMDG | International Maritime Dangerous Goods |

SAFETY DATA SHEET

| | |
|---------|---|
| LC50 | Lethal Concentration to 50% of a test population |
| LD50 | Lethal Dose to 50% of a test population |
| MPI | Magnetic Particle Inspection |
| NDT | Non-Destructive Testing |
| OEL | Occupational Exposure Limit |
| PBT | Persistent, Bioaccumulative and Toxic Substance |
| PMCC | Pensky-Martens closed cup method |
| PPE | Personal Protection Equipment |
| REACH | Registration, Evaluation, Authorisation and Restriction of Chemicals Regulation EC (No) 1907/2006 |
| RID | Regulations concerning the International Carriage of Dangerous Goods by Rail (Reglement International concernant le transport des marchandises Dangereuses par chemin de fer) |
| SDS | Safety Data Sheet |
| STOT RE | Specific Target Organ Toxicity, Repeat Exposure |
| STOT SE | Specific Target Organ Toxicity, Single Exposure |
| TA-Luft | Technical Instructions on Air Quality Control (Technische Anleitung zur Reinhaltung der Luft) |
| vPvB | Very Persistent and Very Bioaccumulative |
| WEL | Workplace Exposure Limit |
| WGK | German Water Hazard Class (Wassergefährdungsklasse) |

(iii) Key literature and sources of data:

- Supplier's safety data sheets for components listed in Section 3.
- European Chemicals Agency, <http://echa.europa.eu/>
- GESTIS International Limit Values Database, http://limitvalue.ifa.dguv.de/Webform_gw.aspx
- Occupational Exposure Limits EH40/2005.
- Commission regulation (EU) 2015/830.
- Control of Substances Hazardous to Health Regulations 2002.
- Hazardous waste regulations 2005.
- Health & Safety at Work Act 1974.
- REACH Directive (EC) 1907/2006.

(iv) Classification and procedure used to derive the classification for mixtures according to Regulation (EC) 1272/2008 (CLP):

| Classification according to Regulation (EC) No 1272/2008 | Classification procedure |
|--|--------------------------|
| Aerosol. 1: H222, H229 | Test Method |
| Skin Irr. 2: H315 | Calculation Method |
| STOT SE3: H336: | Calculation Method |
| Aquatic Chronic 2: H411 | Calculation Method |

(v) Hazard statements (number and full text):

- H220: Extremely flammable gas.
H225: Highly flammable liquid and vapour
H222: Extremely flammable aerosol.
H229: Pressurised container: may explode if heated.
H280: Contains gas under pressure; may burst if heated.
H304: May be fatal if swallowed and enters airways
H315: Causes skin irritation
H336: May cause drowsiness or dizziness
H411: Toxic to aquatic life with long lasting effects

Hazard Class and Category Code (full text):

- Aerosol 1: Aerosol
Aquatic Chronic 2: Hazardous to the aquatic environment
Asp. Tox. 1: Aspiration hazard
Flam. Gas 1: Flammable Gas
Flam. Liq. 2: Flammable liquid
Press. Gas: Gases under pressure
Skin Irrit. 2: Skin corrosion/irritation
STOT SE 3: Specific target organ toxicity - single exposure

SAFETY DATA SHEET

Relevant precautionary statements (number and full text):

P210: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

P211: Do not spray on an open flame or other ignition source.

P251 Do not pierce or burn even after use.

P261: Avoid breathing dust/fume/gas/mist/vapours/spray.

P271: Use only outdoors or in a well ventilated area.

P410 + P412: Protect from sunlight. Do not expose to temperatures exceeding 50 °C.

P280: Wear protective gloves/protective clothing/eye protection/face protection

P302+352: IF ON SKIN: Wash with soap and water

P362+P364: Take off contaminated clothing and wash it before reuse.

P264: Wash thoroughly after handling.

P501: Dispose of contents/container to hazardous waste or special collection point.

(vi)

Training advice:

Chemical hazard awareness training, incorporating labelling, Safety Data Sheets (SDS), Personal Protective Equipment (PPE) and hygiene. Chemical hazard risk assessment. Provide adequate information, instruction and training to operators.

DISCLAIMER

The information and recommendations contained herein are based upon data believed to be up-to-date and correct. However, no guarantee or warranty of any kind, express or implied, is made with respect to the information and recommendations contained herein. We accept no responsibility and disclaim all liability for any harmful effects that may be caused by (incorrect) use, handling, purchase, resale, or exposure to our product. Customers and users of our product must comply with all applicable health and safety laws, regulations, and orders. In particular, they are under an obligation to carry out a risk assessment for the particular work places and to take adequate risk management measures in accordance with the national implementation legislation of EU Directives 89/391/EEC and 98/24/EC amended by Directive 2014/27/EU.

| | | |
|--------------------------|--------------------------|--|
| Revision summary: | Revision Comments | This SDS is valid from the Revision Date. If you require a SDS for the product manufactured before the Revision Date please contact us at datasheets@magnaflux.co.uk . |
| | Revision Date | 01.04.2016 |
| | Version | 16.1 |


S A F E T Y D A T A S H E E T

===== SECTION I – PRODUCT AND COMPANY IDENTIFICATION =====

PRODUCT NAME: United Duct Sealer (Water-Based)
 MANUFACTURERS' OR: SUPPLIER'S NAME: McGill AirSeal LLC
 ADDRESS: 2400 Fairwood Ave.
 Columbus, OH 43207-2700
 MAIN PHONE: (614)829-1200
 TOLL FREE: (800)624-5535
 EMERGENCY PHONE: Chem-Tel: (800) 255-3924 (24 Hrs)

| HMIS | |
|---------------------|---|
| Health Hazard | 1 |
| Fire Hazard | 0 |
| Reactivity | 0 |
| Personal Protection | B |

DOT HAZARD CLASS: Not Hazardous UN Number N/A
 SHIPPING NAME: N/A Packing Group N/A



===== SECTION II - HAZARDOUS INGREDIENTS / SARA III INFORMATION =====

| REPORTABLE COMPONENTS | CAS NUMBER | VAPOR PRESSURE mm Hg @ TEMP | WEIGHT PERCENT |
|-----------------------|------------|--------------------------------|----------------|
| None | | | |

===== SECTION III – COMPOSITION/INFORMATION ON INGREDIENTS =====

| CAS # | Trade secret Y/N | Chemical Name | Comment |
|-------------------|---------------------|---------------|---------|
| Proprietary Blend | YES | | |

===== SECTION IV – FIRST AID MEASURES =====

INHALATION: Remove to fresh air. If breathing is difficult, administer oxygen. If breathing has stopped, administer artificial respiration. Contact physician or emergency medical facility immediately.

SKIN: Remove contaminated clothing and shoes. Wash exposed area thoroughly with soap and water for at least 15 minutes. Do not rub affected area. If irritation persists, get medical attention. Skin reaction may take 24 to 48 hours to develop. Wash contaminated clothing before reuse.

EYES: Immediately flush eyes with large amounts of water for at least 15 minutes while frequently lifting the upper and lower eyelids. If irritation persists, call a physician.

INGESTION: Do not induce vomiting. Contact physician or emergency medical facility immediately. Never give anything by mouth to an unconscious person.

===== SECTION V - FIRE-FIGHTING MEASURES =====

FLASH POINT: Not Applicable METHOD USED: Not Applicable
 FLAMMABLE LIMITS IN AIR BY VOLUME – LOWER: N/A UPPER: N/A

EXTINGUISHING MEDIA: The product will only burn after the water it contains is driven off. For dried film use water, foam, carbon dioxide or dry chemical.

SPECIAL FIRE FIGHTING PROCEDURES: When dried film burns, carbon dioxide (CO₂), carbon monoxide (CO), hydrogen chloride gas (HCl), and smoke are produced. Firefighters should wear self-contained breathing apparatus, especially in enclosed areas. Cool containers and minimize vapors with water spray.

S A F E T Y D A T A S H E E T

UNUSUAL FIRE AND EXPLOSION HAZARDS: Closed containers exposed to high temperatures may explode or burst due to build-up of steam pressure.

===== **SECTION VI – ACCIDENTAL RELEASE MEASURES** =====

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: Dike, contain, or absorb with inert absorbent material. Collect spilled material in a salvage container. Prevent spill from entering sewers, drains, streams, waterways, or other bodies of water.

WASTE DISPOSAL METHOD: Dispose of in accordance with all local, state and federal regulations.

===== **SECTION VII – HANDLING AND STORAGE** =====

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING: **DO NOT ALLOW TO FREEZE.** Store in a cool dry location away from heat. Keep containers tightly closed and store with adequate ventilation.

OTHER PRECAUTIONS: **DO NOT TAKE INTERNALLY.** Avoid inhalation of excess vapors, ingestion, and unnecessary, prolonged, or repeated contact with this and any other chemical. Change soiled work clothes frequently. Clean hands after handling. **KEEP OUT OF REACH OF CHILDREN.**

===== **SECTION VIII – EXPOSURE CONTROLS/PERSONAL PROTECTION** =====

RESPIRATORY PROTECTION: Not required under normal conditions. Provide sufficient ventilation to maintain constant fresh air in workspace. If TLV is exceeded, use NIOSH/MSHA approved organic vapor and mist, supplied air, or self-contained breathing apparatus. Avoid breathing sanding dust.

VENTILATION: Use adequate mechanical (general and/or local) ventilation to maintain exposure below TLV.

SKIN PROTECTION (PROTECTIVE GLOVES): Wear resistant gloves such as polyethylene.

EYE PROTECTION: Use chemical splash goggles or OSHA permitted safety glasses.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Wear impervious clothing. Eye wash station.

WORK / HYGENIC PRACTICES: Source of clean water should be available for flushing eyes and washing skin. Wash thoroughly after handling any chemicals, especially before eating, drinking, or smoking. Remove and launder contaminated clothing before reuse.

===== **SECTION IX - PHYSICAL / CHEMICAL PROPERTIES** =====

| | |
|-------------------------------|--|
| PHYSICAL FORM: Viscous liquid | COLOR: Gray |
| ODOR: Mild, sweet | pH: 7.5-9.0 |
| SOLUBILITY IN WATER: Miscible | SPECIFIC GRAVITY (H ₂ O=1): 1.3-1.5 |
| BOILING POINT: 212°F | % VOLATILES BY WEIGHT: 30-40 |
| FREEZING POINT: 32° F (0° C) | VISCOSITY (cps): approx. 300,000-400,000 |
| COATING V.O.C.: 0 g/l | |

===== **SECTION X – STABILITY AND REACTIVITY DATA** =====

STABILITY: Stable at ambient temperatures.

CONDITIONS TO AVOID: Coagulation may occur after freezing, thawing, or boiling.

INCOMPATIBILITY (MATERIALS TO AVOID): Metal salts, mineral acids (i.e. sulfuric, phosphoric, etc.) Strong oxidizing agents. Strong reducing agents.

HAZARDOUS POLYMERIZATION: Will not occur.

HAZARDOUS DECOMPOSITION PRODUCTS: May form toxic materials on thermal decomposition including Carbon monoxide (CO), Carbon dioxide (CO₂), and various hydrocarbons. Under fire conditions, this product will release hydrogen chloride gas.

===== **SECTION XI – TOXICOLOGICAL INFORMATION** =====

S A F E T Y D A T A S H E E T

INHALATION HEALTH RISKS AND SYMPTOMS OF EXPOSURE: Adverse health effects from vapors or spray mists in poorly ventilated areas may include irritation of the mucous membranes of the nose, throat, and respiratory tract and symptoms of headache and nausea.

SKIN AND EYE CONTACT HEALTH RISKS AND SYMPTOMS OF EXPOSURE: EYES: In direct contact, may cause irritation. SKIN: Prolonged and repeated contact with product may cause skin irritation.

SKIN ABSORPTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE: Redness, drying of the skin, or other signs of irritation or contact dermatitis.

INGESTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE: Can cause gastrointestinal irritation, nausea, vomiting, and diarrhea.

HEALTH HAZARDS (ACUTE AND CHRONIC): ACUTE: May cause irritation to skin and eyes, gastrointestinal irritation, nausea, and vomiting. CHRONIC: Prolonged or repeated exposure above TLV may result in permanent brain and nervous system damage.

CARCINOGENICITY: NTP CARCINOGEN: No IARC MONOGRAPHS: No OSHA REGULATED: No

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE: May be aggravating to some skin and respiratory conditions, and to pre-existing liver and/or kidney disorders.

===== **SECTION XII – ECOLOGICAL INFORMATION** =====

Ecotoxicity: No ecotoxicity data was found for the product
Environmental Fate: No environmental information found for this product

===== **SECTION XIII – DISPOSAL CONSIDERATIONS** =====

Waste Disposal: Consult with the US EPA Guidelines listed in 40 CFR Part 261.3 for the classifications of hazardous waste prior to disposal. Furthermore, consult with your state and local waste requirements or guidelines, if applicable, to ensure compliance. Arrange disposal in accordance to the EPA and/or state and local guidelines

===== **SECTION XIV – TRANSPORT INFORMATION** =====

| | | | |
|------------------|---------------|---------------|-----|
| DOT Hazard Class | Not Hazardous | UN Number | N/A |
| Shipping Name | N/A | Packing Group | N/A |

===== **SECTION XV –REGULATORY INFORMATION** =====

EMERGENCY PLANNING AND COMMUNITY RIGHT-TO-KNOW (SARA TITLE III):

Section 311/312 Categorizations (40 CFR 370): Immediate (Acute) Health Hazard.
Section 313 Information (40 CFR 372) – Toxic Chemicals List: This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR 372:

| Component | CAS# | % by Weight |
|-----------|------|-------------|
| None | | |

Toxic Substances Control Act (TSCA): All components of this product are on the TSCA Inventory or are exempt from TSCA Inventory requirements.

CALIFORNIA PROPOSITION 65 (Safe Drinking Water and Toxic Enforcement Act of 1986): None listed.

===== **SECTION XVI –OTHER INFORMATION** =====

SDS Creation Date: January 5, 2018

Disclaimer: The information and recommendations set forth herein are believed to be accurate. Because some of the information is derived from information provided to McGill AirSeal LLC from its suppliers, and because McGill AirSeal LLC has no control over the conditions of handling and use, McGill AirSeal LLC makes no warranty, express or implied, regarding the accuracy of the data or the results to be obtained from the use thereof. The information is supplied solely for your information and consideration, and McGill AirSeal LLC assumes no responsibility from use or reliance thereon. It is the responsibility of the user of McGill AirSeal LLC products to comply with all applicable Federal, State and Local Laws and Regulations.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

1.) Identification of the Mixture and of the Company

Product identifier: **Matte clear acrylic coating**

Product name: **120 Matte clear acrylic coating**

Relevant identified uses of the substance: Use on brass fixtures, tubing, machine parts, whenever a protective film can be used to prevent oxidation. It will adhere to metals, wood, and paper.

Uses advised against: Not an automobile finish. Do not apply to energized equipment. .

| | |
|-----------------------------|---|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe Industries Incorporated |
| For Product Information: | 1-800-227-0196 |
| Emergency telephone number: | 1-800-424-9300 (CHEMTREC – 24 hrs) |

2. Hazards identification

Classifications

Physical Hazards: Aerosol - Category 1
 Flam. Gas. 1
 Press. Gas
 Flam. Liq. 2
 Flam. Liq. 3

Health Hazards: Car 1B
 Muta 1B
 Asp Tox. 1
 Eye Irrit. - 2
 STOT SE3

Environmental Hazards: N/AV

Labeling

Signal Word: Danger

Hazard Statements: H220 – Extremely flammable gas



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

- H222 – Extremely flammable aerosol
- H225 – Highly flammable liquid and vapour.
- H226 – Flammable liquid and vapour.
- H229 - Pressurized container: may burst if heated
- H304 – May be fatal if swallowed and enters airways.
- H319 – Causes serious eye irritation.
- H336 – May cause drowsiness or dizziness.
- H340 – May cause genetic defects
- H350 – May cause cancer

- Precautionary Statements:
- P101 - If medical advice is needed, have product container or label at hand
 - P102 - Keep out of reach of children
 - P103 - Read label before use
 - P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking
 - P211 - Do not spray on an open flame or other ignition source
 - P251 - Pressurized container: Do not pierce or burn, even after use
 - P261 - Avoid breathing dust/fume/gas/mist/vapours/spray
 - P262 - Do not get in eyes, on skin, or on clothing
 - P264 - Wash ... thoroughly after handling
 - P280 - Wear protective gloves/eye protection/face protection

 - P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.
 - P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F
 - P501 - Dispose of contents/container in accordance with local/regional/national/international regulation



Symbols/Pictograms:

3. Composition / Information on Ingredients

Composition

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|---------------------------------|-----------------|------------|---------------|----------------|---|------------------------|
| Acetone | Propanone | 67-64-1 | 200-662-2 | 30-60% | Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 | H225, H319, H336 |
| Hydrocarbon Propellant | LPG | 68476-86-8 | 270-705-8 | 10-30% | Press. Gas Flam. Gas 1 | H220 H229 |
| n-Butyl Acetate | n-Butyl Ester | 123-86-4 | 204-658-1 | 7-13% | Flam. Liq. 3 STOT SE 3 | H226 H336 |
| Aliphatic Petroleum Distillates | Solvent Naphtha | 64742-89-8 | 265-192-2 | 7-13% | Carc. 1B Muta. 1B Asp. Tox. 1 | H350 H340 H304 |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

Other Product Information

Chemical Identity: Mixture

4.) First Aid Measures

| | |
|---|---|
| General Advice: | If symptoms persist, always call a doctor. |
| Inhalation First Aid: | Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately. |
| Skin Contact First Aid: | Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. |
| Eye Contact First Aid: | If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately. |
| Ingestion First Aid: | If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |
| Most Important Symptoms/Effects: | Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects. |

5. Fire Fighting Measures

| | |
|--|---|
| Flammable Properties: | Aerosol |
| Auto Ignition Temperature: | Not Available |
| Suitable extinguishing media: | Carbon dioxide, dry chemical, water spray. |
| Unsuitable extinguishing media: | None known |
| Special hazards arising from the substance or mixture: | None known |
| Hazardous combustion products: | Carbon dioxide, Carbon monoxide |
| Fire & Explosion Hazards: | Closed Containers may rupture due to the buildup of pressure from extreme temperatures. |
| Precautions for fire-fighters: | Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode. |

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling:

Flammable Aerosol, use in a well ventilated area.
 Do not use near sources of ignition.
 Do not to eat, drink and smoke while working with this material.
 Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
 Storage Temperature: 32° to 120°F (0° to 49°C).
 No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
 Keep away from sources of ignition.
 Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|------------------------|------------|-----------------|------------------|----------------|-----------------|
| Acetone | 67-64-1 | 500ppm | 750ppm | 1000ppm | N/AV |
| Hydrocarbon Propellant | 68476-86- | N/AV | N/AV | N/AV | N/AV |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

| | | | | | |
|---------------------------------|------------|--------|--------|--------|------|
| | 8 | | | | |
| Aliphatic Petroleum Distillates | 64742-89-8 | N/AV | N/AV | N/AV | N/AV |
| n-Butyl Acetate | 123-86-4 | 150ppm | 200ppm | 150ppm | N/AV |

***Values are based on the 2014 Guide to Occupational Exposure Values by ACGIH**

9. Information on Basic Physical and Chemical Properties

| | |
|--|---|
| Appearance: Clear | Odor: Ketone odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: <0° F (-18° C) | Evaporation Rate: Faster than n-Butyl Acetate |
| Flammability Solid/Gas: Flammable gas | LEL: 0.8% UEL: 13% |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions

Chemical stability: Stable under normal conditions

Conditions to avoid: Heat and ignition sources

Incompatible materials: Strong Oxidizing Agents

Hazardous decomposition products: Will not occur

11. Toxicological Information

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: (Acetone) Acute oral LD50: 5800mg/kg(rat)
(Acetone) LC50: 21000 ppm / 8 hr (rat)

Eye irritation data: N/AV

Skin irritation/sensitization/absorption data: N/AV



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

Reproductive toxicity data: N/AV

Mutagenicity data: Muta 1B

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure: Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV
IARC: IARC3:Classification not possible from current data
OSHA: TLV-A4

* Petroleum distillates may contain chemical carcinogens in limited quantities (< 0.01%). These quantities are determined by the supplier/fraction/purity of the distillate during the manufacturing process. Chemicals that may be present within distillates are listed on California's prop 65 list such as ETHYLBENZENE, BENZENE, and TOLUENE.

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.
Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|--------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference 49 CFR 172.101 |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|----------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|---|
| UN1950 | Aerosols, Flammable | 2.1 | Not Applicable | Not Applicable | Reference IATA Dangerous Goods Regulation |

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

PROP 65 (CA): WARNING: Cancer and Reproductive Harm– www.P65Warnings.ca.gov

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 12/4/18

Supersedes: 8/7/2015

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)



SAFETY DATA SHEET

1. Identification

Product identifier: CITRA JINX ORGANIC ALL PURPOSE CLEANER

Other means of identification

SDS number: RE1000007273

Recommended restrictions

Product Use: cleaner

Restrictions on use: Not known.

Manufacturer/Importer/Distributor Information

Manufacturer

Company Name: CLAIRES MANUFACTURING COMPANY
Address: 1000 Integram Dr
Pacific, MO 63069
Telephone: 1-630-543-7600
Fax:

Emergency telephone number: 1-866-836-8855

2. Hazard(s) identification

Hazard Classification

Physical Hazards

Flammable aerosol Category 1

Health Hazards

Serious Eye Damage/Eye Irritation Category 2A
Skin sensitizer Category 1

Environmental Hazards

Acute hazards to the aquatic environment Category 2
Chronic hazards to the aquatic environment Category 2

Label Elements

Hazard Symbol:



Signal Word: Danger



Hazard Statement: Extremely flammable aerosol.
Causes serious eye irritation.
May cause an allergic skin reaction.
Toxic to aquatic life with long lasting effects.

Precautionary Statements

Prevention: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. Avoid breathing dust/fume/gas/mist/vapors/spray. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment.

Response: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. IF ON SKIN: Wash with plenty of water. If skin irritation or rash occurs: Get medical advice/attention. Specific treatment (see on this label). Wash contaminated clothing before reuse. Collect spillage.

Storage: Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal: Dispose of contents/container to an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.

Hazard(s) not otherwise classified (HNOC): None.

3. Composition/information on ingredients

Mixtures

| Chemical Identity | CAS number | Content in percent (%)* |
|---|------------|-------------------------|
| Cyclohexene, 1-methyl-4-(1-methylethenyl)-, (4R)- | 5989-27-5 | 1 - <5% |
| Propane | 74-98-6 | 1 - <5% |
| Butane | 106-97-8 | 1 - <5% |
| Proprietary | | 1 - <3% |
| 1,2,3-Propanetriol | 56-81-5 | 0.1 - <1% |

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First-aid measures

Ingestion: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.

Inhalation: Move to fresh air.

Skin Contact: If skin irritation occurs: Get medical advice/attention. Destroy or thoroughly clean contaminated shoes. Immediately remove contaminated clothing and shoes and wash skin with soap and plenty of water. If skin irritation or an allergic skin reaction develops, get medical attention.



Eye contact: Immediately flush with plenty of water for at least 15 minutes. If easy to do, remove contact lenses. Get medical attention.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.

Hazards: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: No data available.

5. Fire-fighting measures

General Fire Hazards: Use water spray to keep fire-exposed containers cool. Fight fire from a protected location. Move containers from fire area if you can do so without risk.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical: Vapors may travel considerable distance to a source of ignition and flash back.

Special protective equipment and precautions for firefighters

Special firefighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures: Ventilate closed spaces before entering them. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Keep upwind. See Section 8 of the SDS for Personal Protective Equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep unauthorized personnel away.

Methods and material for containment and cleaning up: Absorb spill with vermiculite or other inert material, then place in a container for chemical waste.

Notification Procedures: Prevent entry into waterways, sewer, basements or confined areas. Stop the flow of material, if this is without risk. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk.



Environmental Precautions: Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Do not contaminate water sources or sewer.

7. Handling and storage

Precautions for safe handling: Avoid contact with eyes. Wash hands thoroughly after handling. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Avoid contact with eyes, skin, and clothing.

Conditions for safe storage, including any incompatibilities: Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Aerosol Level 1

8. Exposure controls/personal protection

Control Parameters

Occupational Exposure Limits

| Chemical Identity | Type | Exposure Limit Values | Source |
|---|------|-----------------------|---|
| Propane | REL | 1,000 ppm 1,800 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | TWA | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Butane | REL | 800 ppm 1,900 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | STEL | 1,000 ppm | US. ACGIH Threshold Limit Values (03 2018) |
| | TWA | 800 ppm 1,900 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| 1,2,3-Propanetriol - Total dust. | PEL | 15 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | TWA | 10 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| 1,2,3-Propanetriol - Respirable fraction. | TWA | 5 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | PEL | 5 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |

Appropriate Engineering Controls No data available.

Individual protection measures, such as personal protective equipment

General information: Provide easy access to water supply and eye wash facilities. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Eye/face protection: Wear safety glasses with side shields (or goggles).

Skin Protection

Hand Protection: No data available.

Other: Wear chemical-resistant gloves, footwear, and protective clothing appropriate for the risk of exposure. Contact health and safety professional or manufacturer for specific information.



Respiratory Protection: In case of inadequate ventilation use suitable respirator. Seek advice from local supervisor.

Hygiene measures: Avoid contact with eyes. Observe good industrial hygiene practices. When using do not smoke. Contaminated work clothing should not be allowed out of the workplace. Avoid contact with skin.

9. Physical and chemical properties

Appearance

| | |
|--|------------------------------------|
| Physical state: | liquid |
| Form: | Spray Aerosol |
| Color: | No data available. |
| Odor: | No data available. |
| Odor threshold: | No data available. |
| pH: | No data available. |
| Melting point/freezing point: | No data available. |
| Initial boiling point and boiling range: | No data available. |
| Flash Point: | -104.44 °C |
| Evaporation rate: | No data available. |
| Flammability (solid, gas): | No data available. |
| Upper/lower limit on flammability or explosive limits | |
| Flammability limit - upper (%): | No data available. |
| Flammability limit - lower (%): | No data available. |
| Explosive limit - upper (%): | No data available. |
| Explosive limit - lower (%): | No data available. |
| Vapor pressure: | 3,972.1165 - 5,171.068 hPa (20 °C) |
| Vapor density: | No data available. |
| Density: | No data available. |
| Relative density: | No data available. |
| Solubility(ies) | |
| Solubility in water: | No data available. |
| Solubility (other): | No data available. |
| Partition coefficient (n-octanol/water): | No data available. |
| Auto-ignition temperature: | No data available. |
| Decomposition temperature: | No data available. |
| Viscosity: | No data available. |

10. Stability and reactivity

Reactivity: No data available.

Chemical Stability: Material is stable under normal conditions.



| | |
|--|------------------------------|
| Possibility of hazardous reactions: | No data available. |
| Conditions to avoid: | Avoid heat or contamination. |
| Incompatible Materials: | No data available. |
| Hazardous Decomposition Products: | No data available. |

11. Toxicological information

Information on likely routes of exposure

| | |
|----------------------|--------------------|
| Inhalation: | No data available. |
| Skin Contact: | No data available. |
| Eye contact: | No data available. |
| Ingestion: | No data available. |

Symptoms related to the physical, chemical and toxicological characteristics

| | |
|----------------------|--------------------|
| Inhalation: | No data available. |
| Skin Contact: | No data available. |
| Eye contact: | No data available. |
| Ingestion: | No data available. |

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

| | |
|----------------------------|--|
| Oral Product: | ATEmix: 160,256.41 mg/kg |
| Dermal Product: | Not classified for acute toxicity based on available data. |
| Inhalation Product: | Not classified for acute toxicity based on available data. |

| | |
|--|--------------------|
| Repeated dose toxicity Product: | No data available. |
|--|--------------------|

| | |
|---|--------------------|
| Skin Corrosion/Irritation Product: | No data available. |
|---|--------------------|

| | |
|---|--------------------|
| Serious Eye Damage/Eye Irritation Product: | No data available. |
|---|--------------------|

| | |
|---|--------------------|
| Respiratory or Skin Sensitization Product: | No data available. |
|---|--------------------|

Carcinogenicity



Product: No data available.

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:
No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:
No carcinogenic components identified

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):
No carcinogenic components identified

Germ Cell Mutagenicity

In vitro
Product: No data available.

In vivo
Product: No data available.

Reproductive toxicity
Product: No data available.

Specific Target Organ Toxicity - Single Exposure
Product: No data available.

Specific Target Organ Toxicity - Repeated Exposure
Product: No data available.

Aspiration Hazard
Product: No data available.

Other effects: No data available.

12. Ecological information

Ecotoxicity:

Acute hazards to the aquatic environment:

Fish
Product: No data available.

Aquatic Invertebrates
Product: No data available.

Chronic hazards to the aquatic environment:

Fish
Product: NOEC : Estimated < 1 mg/l

Aquatic Invertebrates
Product: No data available.

Toxicity to Aquatic Plants
Product: No data available.



Persistence and Degradability

Biodegradation
Product: 60 % (28 d) Readily biodegradable

BOD/COD Ratio
Product: No data available.

Bioaccumulative potential
Bioconcentration Factor (BCF)
Product: No data available.

Partition Coefficient n-octanol / water (log Kow)
Product: No data available.

Mobility in soil: No data available.

Known or predicted distribution to environmental compartments

Cyclohexene, 1-methyl-4-(1-methylethenyl)-, (4R)-
Propane
Butane
Proprietary
1,2,3-Propanetriol

No data available.
No data available.
No data available.
No data available.
No data available.

Other adverse effects: Toxic to aquatic life with long lasting effects.

13. Disposal considerations

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws.

Contaminated Packaging: No data available.

14. Transport information

DOT

UN Number: UN 1950
UN Proper Shipping Name: Aerosols, flammable
Transport Hazard Class(es)
Class: 2.1
Label(s): -
Packing Group: II
Marine Pollutant: No

Environmental Hazards: No
Marine Pollutant: No

Special precautions for user: Not regulated.

IMDG

UN Number: UN 1950
UN Proper Shipping Name: Aerosols, flammable
Transport Hazard Class(es)
Class: 2
Label(s): -



EmS No.: F-D, S-U
 Packing Group: –
 Environmental Hazards: Yes
 Marine Pollutant: No
 Special precautions for user: Not regulated.

IATA

UN Number: UN 1950
 Proper Shipping Name: Aerosols, flammable
 Transport Hazard Class(es):
 Class: 2.1
 Label(s): –
 Packing Group: –
 Environmental Hazards: Yes
 Marine Pollutant: No
 Special precautions for user: Not regulated.
 Cargo aircraft only: Allowed.

15. Regulatory information

US Federal Regulations

Restrictions on use: Not known.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)
US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)
 None present or none present in regulated quantities.

CERCLA Hazardous Substance List (40 CFR 302.4):

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Propane | lbs. 100 |
| Butane | lbs. 100 |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

- Fire Hazard
- Immediate (Acute) Health Hazards
- Flammable aerosol
- Serious Eye Damage/Eye Irritation
- Skin sensitizer

SARA 302 Extremely Hazardous Substance
 None present or none present in regulated quantities.

SARA 304 Emergency Release Notification

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Propane | lbs. 100 |
| Butane | lbs. 100 |

SARA 311/312 Hazardous Chemical

| <u>Chemical Identity</u> | <u>Threshold Planning Quantity</u> |
|--------------------------|------------------------------------|
| Cyclohexene, 1-methyl-4- | 10000 lbs |



| | |
|---------------------------|-----------|
| (1-methylethenyl)-, (4R)- | |
| Propane | 10000 lbs |
| Butane | 10000 lbs |
| Proprietary | 10000 lbs |
| 1,2,3-Propanetriol | 10000 lbs |

SARA 313 (TRI Reporting)

None present or none present in regulated quantities.

**Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130):
Clean Water Act Section 311 Hazardous Substances (40 CFR 117.3)
US State Regulations**

US. California Proposition 65

No ingredient requiring a warning under CA Prop 65.

US. New Jersey Worker and Community Right-to-Know Act

Chemical Identity

Cyclohexene, 1-methyl-4-(1-methylethenyl)-, (4R)-
Propane
Butane

US. Massachusetts RTK - Substance List

No ingredient regulated by MA Right-to-Know Law present.

US. Pennsylvania RTK - Hazardous Substances

Chemical Identity

Propane
Butane

US. Rhode Island RTK

No ingredient regulated by RI Right-to-Know Law present.

International regulations

Montreal protocol

Not applicable

Stockholm convention

Not applicable

Rotterdam convention

Not applicable

Kyoto protocol

Not applicable

Inventory Status:

Australia AICS: Not in compliance with the inventory.

Canada DSL Inventory List: Not in compliance with the inventory.

EINECS, ELINCS or NLP: Not in compliance with the inventory.

Japan (ENCS) List: Not in compliance with the inventory.



| | |
|--|--|
| China Inv. Existing Chemical Substances: | Not in compliance with the inventory. |
| Korea Existing Chemicals Inv. (KECI): | Not in compliance with the inventory. |
| Canada NDSL Inventory: | Not in compliance with the inventory. |
| Philippines PICCS: | Not in compliance with the inventory. |
| US TSCA Inventory: | On or in compliance with the inventory |
| New Zealand Inventory of Chemicals: | Not in compliance with the inventory. |
| Japan ISHL Listing: | Not in compliance with the inventory. |
| Japan Pharmacopoeia Listing: | Not in compliance with the inventory. |
| Mexico INSQ: | Not in compliance with the inventory. |
| Ontario Inventory: | Not in compliance with the inventory. |
| Taiwan Chemical Substance Inventory: | Not in compliance with the inventory. |

16. Other information, including date of preparation or last revision

| | |
|------------------------------|---|
| Issue Date: | 09/22/2019 |
| Revision Information: | No data available. |
| Version #: | 1.0 |
| Further Information: | No data available. |
| Disclaimer: | This information is provided without warranty. The information is believed to be correct. This information should be used to make an independent determination of the methods to safeguard workers and the environment. |

Safety Data Sheet

SDS ID: Stock Code PPL

Revision date: February 7, 2020

Section 1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product name: Low VOC Purple Primer
Synonyms: None
Chemical family: Hydrocarbon Mixture
Producer: J.C. Whitlam Manufacturing Company
200 West Walnut Street
P.O. Box 380
Wadsworth, Ohio 44282-0380
www.jcwhitlam.com

Telephone: 330-334-2524 Available during normal business hours

Emergency: CHEMTEL 800-255-3924 Available 24 hours

Section 2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

Flammable liquid and vapor – vapor may cause a flash fire. This product can be easily ignited by heat, spark, or flames. Causes eye irritation. Harmful if swallowed. Prolonged or repeated skin contact may cause drying, cracking, or irritation. High vapor concentrations may cause drowsiness and irritation of the eyes and respiratory tract.

GHS Label elements, including precautionary statements

DANGER — Highly Flammable Liquid and Vapor (*category 2*)

WARNING — Causes Serious Eye Irritation (*category 2A*)

May cause drowsiness or dizziness



Precautionary Statements

Keep away from heat/sparks/open flames/hot surfaces – No smoking. Keep container tightly closed. Wear protective gloves and safety glasses, see SDS.

Avoid breathing vapors. Wash skin thoroughly after handling. Wear protective gloves and eye protection. IF ON SKIN, immediately remove all contaminated clothing. Rinse skin with water/shower. IF IN EYES, Remove contact lenses if present and easy to do so, rinse with water for several minutes. If eye or skin irritation persists – get medical advice/attention. Store in a well-ventilated place.

Inhalation: May cause irritation to mucous membranes and upper respiratory tract. In high concentrations, vapors and aerosol mists have a narcotic effect and may cause headache, central nervous system depression, fatigue, dizziness, and nausea.

Chronic: Repeated or prolonged exposure may result in liver damage or may cause dermatitis by defatting the skin. See Section 11 (Toxicological Information) for additional information.

Ingestion: May cause irritation of the digestive tract, stomach pain, nausea, and vomiting.

Skin contact: Prolonged or repeated contact with skin may cause redness, irritation, swelling, and dermatitis.

Eye contact: Exposure to vapors or liquid may cause eye irritation.

Carcinogenic evaluation: No component of this product present at levels greater than 0.1 % is identified as a known, suspected or potential carcinogen by the NTP, the IARC or OSHA. The ACGIH designates Tetrahydrofuran as category A3 – confirmed animal carcinogen with unknown relevance to humans.

Section 3. COMPOSITION / INFORMATION ON INGREDIENTS

Material information:

| Name | CAS No. | Weight % |
|----------------------|----------|----------|
| Acetone* | 67-64-1 | 39-44 |
| Methyl ethyl ketone* | 78-93-3 | 22-27 |
| Cyclohexanone* | 108-94-1 | 18-23 |
| Tetrahydrofuran* | 109-99-9 | 12-17 |

**Note: The above weight percentages are represented in ranges as estimates. Due to variation among production batches, component percentages may vary.*

Section 4. FIRST AID MEASURES

Inhalation: Move exposed persons to fresh air. If the person is not breathing or breathing is irregular, provide artificial respiration or oxygen by trained personnel. Seek medical attention.

Skin contact: Quickly remove contaminated clothing and shoes. Wash affected skin with soap and water. Get medical attention if symptoms occur. Wash contaminated clothing before reuse.

Ingestion: Do not induce vomiting. Never give anything by mouth to an unconscious person. If conscious and alert, rinse the mouth with water. Call a physician or poison control center immediately.

Eye contact: Check for and remove any contact lenses. Immediately consult physician after flushing eyes with tepid water for 15 minutes.


Section 5. FIREFIGHTING MEASURES

Suitable extinguishing media: Small fires — Class B fire-extinguishing media including water spray, foam, CO₂ or dry powder. Do not use a water stream, as this will spread the fire.

Specific hazards: Fire or intense heat may cause violent rupture of product containers. Vapors may form explosive mixtures with air. Application of extinguishing media to hot surfaces requires special precautions. During emergency conditions, overexposure to decomposition products including carbon oxides may cause a health hazard. Symptoms may not be immediately apparent.

Special protective equipment for firefighters: Full protective equipment including self-contained breathing apparatus should be used. Explosive in the presence of oxidizers or nitric acid. Do not allow run-off from fire fighting to enter drains or water courses.

| | NFPA rating: HMIS rating: | |
|-------------------------|---------------------------|---------|
| Health: | 2 | 2 |
| Flammability: | 3 | 3 |
| Instability/reactivity: | 0 | 0 |
| Other: | N/A | H (PPE) |

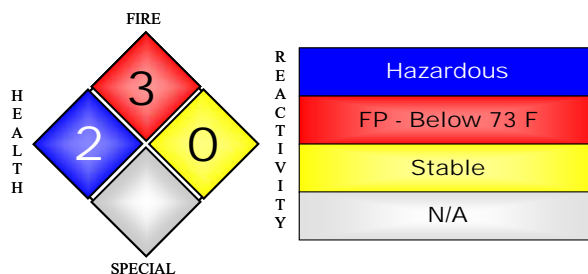

Section 6. ACCIDENTAL RELEASE MEASURES

| | |
|---|--|
| Personal Precautions: | Immediately contact emergency personnel. Evacuate any potentially affected area and isolate personnel from entry. Ventilate closed spaces before entering them. Vapor can collect in lower areas. |
| Large Spill: | Personnel must have appropriate training, per OSHA 29 CFR 1910.120. Do not touch damaged containers or spilled material unless wearing appropriate protective equipment (Section 8). |
| Methods for Containment and Clean up | Shut off source if possible and if safe. Eliminate all ignition sources. Use non-sparking tools during all cleanup procedures. Prevent entry into waterways, sewers, basements or confined areas. Advise applicable authorities if material has entered sewers or water courses. |

Section 7. HANDLING AND STORAGE

| | |
|------------------|--|
| Handling: | Use with adequate ventilation. Keep containers closed when not in use. Always open containers slowly to allow any excess pressure to vent. Avoid breathing vapors. Avoid contact with eyes, skin, or clothing. Wash thoroughly with soap and water after handling. Launder soiled clothing thoroughly before re-use. |
| Storage: | Keep all containers tightly closed when not in use. Store out of direct sunlight and on an impermeable floor. Do not store with incompatible materials. See Section 10, Stability and Reactivity. |

Section 8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Occupational Exposure Limits:

| Name | CAS No. | ACGIH® TLV® Exposure Limits: | Federal OSHA PELs | OSHA PELs 1989 ^C |
|----------------------------|----------|--|-----------------------|---|
| Acetone | 67-64-1 | 500 ppm ^A 750 ppm ^B | 1000 ppm ^A | 750 ppm ^A 1000 ppm ^B |
| Methyl-ethyl ketone | 78-93-3 | 200 ppm ^A 300 ppm ^B | 200 ppm ^A | None |
| Cyclohexanone | 108-94-1 | 20 ppm ^A | 50 ppm ^A | 25 ppm ^A |
| Tetrahydrofuran | 109-99-9 | 50 ppm ^A 100 ppm ^B | 200 ppm ^A | 200 ppm ^A 250 ppm ^B |

All exposure limits listed are 8-hour time weighted average (TWA) — except where noted otherwise.

^A Time Weighted Average (TWA) is an average exposure over the course of an 8-hour work shift.

^B A Short Term Exposure Limit TWA over the course of 15 minutes.

PEL — Permissible Exposure Limit is the maximum 8-hour TWA concentration of a chemical that a worker may be exposed to under Occupational Safety and Health Administration (OSHA) regulations.

^C Federal OSHA 1989 PELs were vacated but are in use and enforced by many state OSHA plans.

Engineering measures: Local exhaust ventilation is preferable. Mechanical ventilation must be explosion proof. General ventilation is acceptable if exposure to

materials in this section is maintained below applicable exposure limits.

PERSONAL PROTECTIVE EQUIPMENT

| | |
|----------------------------------|--|
| Respiratory protection: | When engineering controls are not sufficient to reduce exposure to levels below applicable exposure limits, seek professional advice prior to respirator selection and use. For concentrations less than 10 times the exposure limits, wear a properly fitted NIOSH/ MSHA-approved respirator with organic vapor cartridges. |
| Skin and body protection: | Wear impervious clothing and gloves to prevent contact. Butyl-rubber is recommended for full contact or splash contact. Other protective material may be used, depending on the situation, if adequate degradation and permeation data is available. |
| Eye protection: | Wear safety spectacles with unperforated side shields, or goggles. |
| Hygiene measures: | Avoid repeated or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Promptly remove contaminated clothing and laundry before reuse. |
| Other precautions: | Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. |

Section 9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|---------------------------------|
| Appearance: | Purple liquid |
| Physical state (solid/liquid/gas): | Liquid |
| Substance type (pure/mixture): | Mixture |
| Color: | Purple |
| Odor: | Ether-like odor |
| Molecular weight: | 72.1grams/mol |
| pH: | N/A |
| Boiling point/range (5-95%): | 153°F; 67°C |
| Melting point/range: | N/A |
| Decomposition temperature: | Not Available |
| Specific gravity: | 0.84 |
| Vapor density: | (AIR = 1) 3.5 |
| Vapor pressure: | 20 mm Hg at 68°F |
| Evaporation rate (Butyl acetate= 1): | 6.1 |
| Flash point: | 1°F; -17.2°C |
| Water solubility: | Completely miscible |
| VOC Content (SCAQMD Rule 1168 Test Method 316A): | 490 g/l |
| Auto-ignition temperature: | 610°F; 321°C (lowest component) |
| Flammable limits in air — lower (%): | 1.1 |
| Flammable limits in air — upper (%): | 11.5 |

Section 10. STABILITY AND REACTIVITY

| | |
|--|--|
| Reactivity: | No data available |
| Stability: | Stable under recommended storage conditions |
| Possibly hazardous reactions: | Vapors may form an explosive mixture with air |
| Conditions to avoid: | Heat, flames, sparks, temperature extremes and direct sunlight |
| Incompatible Materials: | Strong oxidizing agents, Acids, Alkalis, Peroxides. |
| Hazardous decomposition products: | By fire, Carbon dioxide, Carbon monoxide |
| Polymerization: | Will not occur. |

Section 11. TOXICOLOGICAL INFORMATION

Acute toxicity: Excessive exposure leads to depression of the central nervous system. Causes eye irritation, moderate skin irritation.

Product information:

| Name | CAS No. | Inhalation: | Dermal: | Oral: |
|---------------------|----------|---|--|---|
| Acetone | 67-64-1 | LC ₅₀ (Rat): 76 mg/l, 4 hours | LD ₅₀ (Rabbit) 20,000 mg/kg | Acute LD ₅₀ (Rat):5,800 mg/kg |
| Methyl-ethyl ketone | 78-93-3 | LC ₅₀ (Rat): >5,000 ppm, 6 hours | LD ₅₀ (Rabbit) 5 to 13 g/kg | LD ₅₀ (Rat) 2,700 to 5,600 mg/kg |
| Cyclohexanone | 108-94-1 | LC ₅₀ (Rat): 8,000 ppm, 4 hours | LD ₅₀ (Rabbit) 794 to 3,160 mg/kg | LD ₅₀ (Rat) 1,534 mg/kg |
| Tetrahydrofuran | 109-99-9 | LC ₅₀ (Rat): 18,000 ppm, 4 hours | Not available | LD ₅₀ (Rat) 3,240 mg/kg |

LC₅₀ — The concentration of the chemical in air that kills 50% of the test animals in a given time (usually four hours)

Chronic toxicity: Ingredients are not listed by the IARC, NTP, OSHA, or EPA as carcinogenic. Repeated or prolonged exposure may cause skin dryness or cracking. Repeated or prolonged exposure in excess of exposure limits in Section 8 may cause damage to the respiratory tract, lungs, liver, and kidney.

Sensitization: Not known to cause sensitization in humans.

Section 12. ECOLOGICAL INFORMATION

Ecotoxicity effects: EC₅₀ Fathead minnow 96-hour 527 to 8,890 mg/l (TLM — Median Threshold Limit). The product components are not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful effect on the environment.

Persistence and Degradability: Expected to be readily biodegradable.
Products of degradation: carbon oxides (CO, CO₂ and water)

Section 13. DISPOSAL CONSIDERATIONS

Cleanup considerations: Waste from this product may be hazardous as defined under RCRA 40 CFR 261. Waste must be tested for ignitability to determine the applicable EPA hazardous waste numbers. Incinerate in an approved facility. Do not incinerate a closed container. Disposal of this material must be done in accordance with federal, state and/or local regulations. The material destined for disposal must be characterized properly and may differ from the product described in this SDS if mixed with other wastes.

Section 14. TRANSPORT INFORMATION

Please refer to 49 CFR 172.101:

DOT:

Transport information: This material is regulated under DOT when transported via U.S. commerce routes.

Proper shipping name:

UN/identification no.: UN1133

Hazardous Materials Description: Flammable Liquids, n.o.s. (Acetone, Methyl ethyl ketone)

Hazard class: 3

Packing group: II

DOT reportable quantity (lbs): 1,000 (Tetrahydrofuran)

Section 15. REGULATORY INFORMATION

U.S. federal regulatory information:

State and community right-to-know regulations:

The following component(s) of this material are identified on the regulatory lists below:

U.S. TSCA Chemical inventory Section 8(b)

OSHA — This product is determined to be hazardous as defined in the OSHA Hazard Communications Standard.

CERCLA Sections 102a/103 (40 FR 302.4):

Acetone, methyl-ethyl ketone, and cyclohexanone: Reportable Quantity (RQ): 5000 pounds

Tetrahydrofuran: Reportable Quantity (RQ): 1,000 pounds

Some Components of this product are listed in the following sections of **SARA**:

SARA Title III Section 302 — N/A

SARA Title III Section 304 — N/A

SARA Title III Section 313 — Methyl ethyl ketone

SARA Title III Sections 311/312 Hazardous Categories (40 CFR 370.21)

Acute health hazard: Yes

Chronic health hazard: Yes

Fire hazard: Yes

Reactive Hazard: No

Pressure Hazard: No

California Proposition 65 Components

This product does not contain any chemicals known to the State of California to cause cancer, birth defects, or any other reproductive harm.

WHMIS (Canada)

Class B-2: Flammable liquid with a flash point lower than 100°F (37.8°C)

Class D-2A: Material causing other toxic effects

NOTE: User must consult with applicable state and local agencies for special specifics, determinations or compliance obligations regarding this product.

Section 16. OTHER INFORMATION

Standards and Certification Listings:

This product meets the performance requirements of ASTM F656. It also meets SCAQMD Rule 1168/316A. It is compliant with LEED® (Leadership in Energy and Environmental Design). When using this product, credit can be claimed for LEED® Green Building Rating System – Indoor Environmental Quality.

The information and recommendations contained herein are based upon tests, data, and information resources believed to be reliable. However, the J.C. Whitlam Manufacturing Company, Inc., and its related operations or divisions (Whitlam) do not guarantee the accuracy or completeness, nor shall any of this information constitute a warranty, whether expressed or implied, as to the safety of goods, the merchantability of the goods or the fitness of the goods for a particular purpose. Adjustment to conform to actual conditions of usage may be required. Whitlam assumes no responsibility for results obtained or for incidental or consequential damages, including lost profits, arising from the use of this data. No warranty against infringement of any patent, copyright or trademark is made or implied.

1. Identification

| | |
|---|--|
| Product identifier | Oatey Purple Primer- NSF Listed for PVC and CPVC |
| Other means of identification | |
| Product code | 1402E |
| Synonyms | Part Numbers: 30755(TV), 30756(TV), 30757(TV), 30758, 30759, 30927 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | Oatey Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |

| | |
|--|--|
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |
| Supplemental information | Not applicable. |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------|------------|-------|
| Acetone | 67-64-1 | 25-40 |
| Cyclohexanone | 108-94-1 | 25-40 |
| Furan, Tetrahydro- | 109-99-9 | 15-30 |
| Methyl ethyl ketone | 78-93-3 | 15-30 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 50 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 200 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 50 ppm |
| | STEL | 300 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------------------|------|-----------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | | 250 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 590 mg/m3 |
| | | 200 ppm |
| | STEL | 885 mg/m3 |
| | TWA | 300 ppm |
| | | 590 mg/m3 |
| | | 200 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines**US - California OELs: Skin designation**

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment**Eye/face protection**

Face shield is recommended. Wear safety glasses with side shields (or goggles).

| | |
|---------------------------------------|---|
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|--|----------------------------------|
| Physical state | Liquid. |
| Form | Translucent liquid. |
| Color | Purple |
| Odor | Solvent. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 151 °F (66.11 °C) |
| Flash point | 14.0 - 23.0 °F (-10.0 - -5.0 °C) |
| Evaporation rate | 5.5 - 8 |
| Flammability (solid, gas) | Not available. |

Upper/lower flammability or explosive limits

| | |
|--|----------------------------|
| Flammability limit - lower (%) | 1.8 |
| Flammability limit - upper (%) | 11.8 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.84 +/- 0.02 @20°C |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Bulk density | 7 lb/gal |
| VOC (Weight %) | < 550 g/l SQACMD Method 24 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |

Hazardous decomposition products No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics

Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

Cyclohexanone (CAS 108-94-1) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

| | |
|---|---|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|-----------------------------------|--|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquids, n.o.s. (Methyl ethyl ketone RQ = 26274 LBS, Acetone RQ = 13130 LBS) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions IB2, T7, TP1, TP8, TP28
Packaging exceptions 150
Packaging non bulk 202
Packaging bulk 242

IATA

UN number UN1993
UN proper shipping name Flammable liquid, n.o.s. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3H
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1993
UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards
Marine pollutant No.
EmS F-E, S-E
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA)

Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

Methyl ethyl ketone (CAS 78-93-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 27-May-2015 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.

SAFETY DATA SHEET

Nashua 357 Spray Adhesive



Section 1. Identification

- Product code / Name** : Nashua 357 Spray Adhesive
- Product description** : Premium Web Spray Adhesive
- Relevant identified uses of the substance or mixture and uses advised against**
- Identified uses** : Adhesive
- Uses advised against** : Not applicable
- Supplier/Manufacturer** : Berry Global, Inc.
2320 Bowling Green Road
Franklin, KY 42134
- Email** : regulatoryaffairs@berryglobal.com
- Emergency telephone number (with hours of operation)** : Chemtrec 24 Hour Emergency Response Number +1-800-424-9300 CCN22955
+1-800-248-7659 M-F 8AM-5PM

Section 2. Hazards identification

- OSHA/HCS status** : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
- Classification of the substance or mixture** : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SKIN IRRITATION - Category 2
EYE IRRITATION - Category 2A
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 12.6%

GHS label elements

Hazard pictograms



- Signal word** : Danger
- Hazard statements** : Extremely flammable aerosol.
Contains gas under pressure; may explode if heated.
Causes serious eye irritation.
Causes skin irritation.
May cause drowsiness or dizziness.

Precautionary statements

- Prevention** : Wear protective gloves. Wear eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Avoid breathing vapor. Wash hands thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.
- Response** : IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
- Storage** : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.

Section 2. Hazards identification

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Hazards not otherwise classified : None known.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture

| Hazardous ingredients Name | % | CAS number |
|---|-----------|------------|
| acetone | ≥10 - ≤25 | 67-64-1 |
| methyl acetate | ≤10 | 79-20-9 |
| heptane | ≤3 | 142-82-5 |
| Non-hazardous ingredients Name | % | CAS number |
| propane | 10 - 25 | 74-98-6 |
| butane | 10 - 25 | 106-97-8 |
| Dimethyl Ether | 3 - 5 | 115-10-6 |
| 4-chloro- α,α -trifluorotoluene | 3 - 5 | 98-56-6 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. If necessary, call a poison center or physician. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness.
- Skin contact** : Causes skin irritation.
- Ingestion** : Can cause central nervous system (CNS) depression.

Over-exposure signs/symptoms

Section 4. First aid measures

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Extremely flammable aerosol. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed. Runoff to sewer may create fire or explosion hazard.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
halogenated compounds
carbonyl halides

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials.
- Environmental precautions** : Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Avoid breathing vapor or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Section 8. Exposure controls/personal protection

| Ingredient name | Exposure limits |
|-----------------|---|
| acetone | <p>ACGIH TLV (United States, 3/2016). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 750 ppm 8 hours. TWA: 1800 mg/m³ 8 hours. STEL: 1000 ppm 15 minutes. STEL: 2400 mg/m³ 15 minutes.</p> <p>NIOSH REL (United States, 10/2013). TWA: 250 ppm 10 hours. TWA: 590 mg/m³ 10 hours.</p> <p>OSHA PEL (United States, 6/2016). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m³ 8 hours.</p> |
| methyl acetate | <p>ACGIH TLV (United States, 3/2016). TWA: 200 ppm 8 hours. TWA: 606 mg/m³ 8 hours. STEL: 250 ppm 15 minutes. STEL: 757 mg/m³ 15 minutes.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 200 ppm 8 hours. TWA: 610 mg/m³ 8 hours. STEL: 250 ppm 15 minutes. STEL: 760 mg/m³ 15 minutes.</p> <p>NIOSH REL (United States, 10/2013). TWA: 200 ppm 10 hours. TWA: 610 mg/m³ 10 hours. STEL: 250 ppm 15 minutes. STEL: 760 mg/m³ 15 minutes.</p> <p>OSHA PEL (United States, 6/2016). TWA: 200 ppm 8 hours. TWA: 610 mg/m³ 8 hours.</p> |
| heptane | <p>ACGIH TLV (United States, 3/2016). TWA: 400 ppm 8 hours. TWA: 1640 mg/m³ 8 hours. STEL: 500 ppm 15 minutes. STEL: 2050 mg/m³ 15 minutes.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 400 ppm 8 hours. TWA: 1600 mg/m³ 8 hours. STEL: 500 ppm 15 minutes. STEL: 2000 mg/m³ 15 minutes.</p> <p>NIOSH REL (United States, 10/2013). TWA: 85 ppm 10 hours. TWA: 350 mg/m³ 10 hours. CEIL: 440 ppm 15 minutes. CEIL: 1800 mg/m³ 15 minutes.</p> <p>OSHA PEL (United States, 6/2016). TWA: 500 ppm 8 hours. TWA: 2000 mg/m³ 8 hours.</p> |

Appropriate engineering controls

: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Section 8. Exposure controls/personal protection

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Physical state : Liquid. [Aerosol. Liquefied compressed gas.]

Color : Not available.

Odor : Not available.

Odor threshold : Not available.

pH : Not available.

Melting point : Not available.

Boiling point : 67.05°C (152.7°F)

Flash point : Open cup: -104.4°C (-155.9°F)

Evaporation rate : Not applicable.

Flammability (solid, gas) : Not applicable.

Lower and upper explosive (flammable) limits : Lower: 2.2%
Upper: 11.4%

Vapor pressure : Not available.

Vapor density : Not applicable.

Relative density : Not available.

Solubility : Not available.

Partition coefficient: n-octanol/water : Not applicable.

Section 9. Physical and chemical properties

Auto-ignition temperature : 385.69°C (726.2°F)

Decomposition temperature : Not available.

Viscosity : Not applicable.

Aerosol product

Type of aerosol : Spray

Heat of combustion : 22.82 kJ/g

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : Avoid all possible sources of ignition (spark or flame).

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|----------------------|----------|
| acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| methyl acetate | LD50 Dermal | Rabbit | >5 g/kg | - |
| | LD50 Oral | Rat | >5 g/kg | - |
| heptane | LC50 Inhalation Gas. | Rat | 48000 ppm | 4 hours |
| | LC50 Inhalation Vapor | Rat | 103 g/m ³ | 4 hours |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|--------------------------|-------------|
| acetone | Eyes - Mild irritant | Human | - | 186300 parts per million | - |
| | Eyes - Mild irritant | Rabbit | - | 10 microliters | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 milligrams | - |
| | Eyes - Severe irritant | Rabbit | - | 20 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 milligrams | - |
| methyl acetate | Skin - Mild irritant | Rabbit | - | 395 milligrams | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 100 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 milligrams | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 20 milligrams | - |
| | | | | | |

Sensitization

No known significant effects or critical hazards.

Mutagenicity

No known significant effects or critical hazards.

Section 11. Toxicological information

Carcinogenicity

No known significant effects or critical hazards.

Reproductive toxicity

No known significant effects or critical hazards.

Teratogenicity

No known significant effects or critical hazards.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|----------------|------------|-------------------|------------------|
| acetone | Category 3 | Not applicable. | Narcotic effects |
| methyl acetate | Category 3 | Not applicable. | Narcotic effects |
| heptane | Category 3 | Not applicable. | Narcotic effects |

Specific target organ toxicity (repeated exposure)

No known significant effects or critical hazards.

Aspiration hazard

| Name | Result |
|---------|--------------------------------|
| heptane | ASPIRATION HAZARD - Category 1 |

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
- Skin contact** : Adverse symptoms may include the following:
 irritation
 redness
- Ingestion** : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not applicable.
- Potential delayed effects** : Not applicable.

Long term exposure

- Potential immediate effects** : Not applicable.
- Potential delayed effects** : Not applicable.

Potential chronic health effects

No known significant effects or critical hazards.

- General** : No known significant effects or critical hazards.
- Carcinogenicity** : No known significant effects or critical hazards.
- Mutagenicity** : No known significant effects or critical hazards.

Section 11. Toxicological information

- Teratogenicity** : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not applicable.

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|-------------------------------------|--|----------|
| acetone | Acute EC50 20.565 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Acute LC50 6000000 µg/l Fresh water | Crustaceans - Gammarus pulex | 48 hours |
| | Acute LC50 10000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| methyl acetate | Chronic NOEC 5 µg/l Marine water | Fish - Gasterosteus aculeatus - Larvae | 42 days |
| | Acute LC50 320000 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute LC50 375000 µg/l Fresh water | Fish - Oreochromis mossambicus | 96 hours |
| heptane | | | |

Persistence and degradability

Not applicable.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-----|-----------|
| acetone | -0.23 | - | low |
| methyl acetate | 0.18 | - | low |
| heptane | 4.66 | 552 | high |

Mobility in soil

- Soil/water partition coefficient (K_{oc})** : Not applicable.

- Other adverse effects** : No known significant effects or critical hazards.










Section 13. Disposal considerations

- Disposal methods** : The generation of waste should be avoided or minimized wherever possible. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. Do not puncture or incinerate container. Dispose of according to all federal, state and local applicable regulations.

United States - RCRA Toxic hazardous waste "U" List

| Ingredient | CAS # | Status | Reference number |
|------------------------------|---------|--------|------------------|
| Acetone (I); 2-Propanone (I) | 67-64-1 | Listed | U002 |

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | ADR/RID | IMDG | IATA |
|-----------------------------------|---|---|--|---|---|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS | Aerosols, flammable |
| Transport hazard class(es) | 2.1  | 2.1   | 2.1  | 2   | 2.1   | 2.1  |
| Packing group | - | - | - | - | - | - |
| Environmental hazards | Yes. The environmentally hazardous substance mark is not required. | Yes. The environmentally hazardous substance mark is not required. | Yes. The environmentally hazardous substance mark is not required. | Yes. The environmentally hazardous substance mark is not required. | Yes. | Yes. The environmentally hazardous substance mark is not required. |
| Additional information | Reportable quantity 20394 lbs / 9258.9 kg [4632.5 gal / 17535.8 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements. | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2), 2.7 (Marine pollutant mark). The marine pollutant mark is not required when transported by road or rail. | - | The environmentally hazardous substance mark is not required when transported in sizes of ≤5 L or ≤5 kg. Tunnel code (D) | The marine pollutant mark is not required when transported in sizes of ≤5 L or ≤5 kg. | The environmentally hazardous substance mark may appear if required by other transportation regulations. |

Section 15. Regulatory information

U.S. Federal regulations

Clean Air Act (CAA) 112 regulated flammable substances: propane; butane; dimethyl ether

TSCA : All components are listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

SARA 302/304

Section 15. Regulatory information

Composition/information on ingredients

No ingredients were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Fire hazard
Sudden release of pressure
Immediate (acute) health hazard

Composition/information on ingredients

| Name | % | Fire hazard | Sudden release of pressure | Reactive | Immediate (acute) health hazard | Delayed (chronic) health hazard |
|----------------|--------|-------------|----------------------------|----------|---------------------------------|---------------------------------|
| acetone | 24.517 | Yes. | No. | No. | Yes. | No. |
| methyl acetate | 8.381 | Yes. | No. | No. | Yes. | No. |
| heptane | 2.354 | Yes. | No. | No. | Yes. | No. |

Canada

WHMIS (Canada) : Class B-2: Flammable liquid
Class B-5: Flammable aerosol.
Class D-2B: Material causing other toxic effects (Toxic).

Canadian lists

Canadian NPRI : The following components are listed: Volatile organic compounds; Propane; Butane (all isomers); Dimethylether; Volatile organic compounds; Heptane (all isomers)

CEPA Toxic substances : The following components are listed: Volatile organic compounds; Volatile organic compounds

Canada inventory : All components are listed or exempted.

International lists

National inventory

Australia : All components are listed or exempted.

China : All components are listed or exempted.

Europe : All components are listed or exempted.

Japan : **Japan inventory (ENCS)**: All components are listed or exempted.
Japan inventory (ISHL): All components are listed or exempted.

Malaysia : Not determined.

New Zealand : All components are listed or exempted.

Philippines : All components are listed or exempted.

Republic of Korea : All components are listed or exempted.

Taiwan : All components are listed or exempted.

Section 16. Other information

History

Date of issue/Date of revision : 4/10/2017

Date of previous issue : 3/28/2017

Version : 1.01

Key to abbreviations : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
UN = United Nations

Section 16. Other information

✔ Indicates information that has changed from previously issued version.

[Notice to reader](#)

All statements, technical information and recommendations set forth herein are based on information or tests which Berry Global believes to be reliable as of the date of this Safety Data Sheet. **NOTHING CONTAINED IN THIS SAFETY DATA SHEET IS A REPRESENTATION, GUARANTEE OR WARRANTY OF ANY KIND.** Berry Global does not assume any liability with respect to the accuracy and/or completeness of the information provided herein. Recipients of this information should be familiar with the regulatory requirements applicable to this product and their intended use of it and they should make their own determination as to the information's suitability and completeness for their particular application(s). The data in this Safety Data Sheet pertains only to the specific material referred to herein and does not relate to use in combination with any other material or in any process.



SECTION 1 - IDENTIFICATION

| | |
|--|---|
| <p>Manufacturer: Black Swan Mfg. Co. 4540 W. Thomas St. Chicago, IL 60651-3318 Tel.: 800-252-5796 Fax: 773-227-3705 Web Site : www.blackswanmfg.com E-mail : info@blackswanmfg.com</p> | <p>For any Transportation or Medical Chemical Emergencies call:</p> <p style="text-align: center;">INFOTRAC</p> <p style="text-align: center;">(800) 535-5053 OR (352) 323-3500</p> <p style="text-align: center;">24 hours per day - 7 days a week</p> |
| <p>Product Name: Tub & Tile Caulk - White</p> | <p>Recommended Use: Sealant for wood, metal, glass, masonry, etc.</p> |

SECTION 2 – HAZARD(S) IDENTIFICATION

| | | | | | | | | |
|---|---|---|--|--|---|---|--|---|
| <p>Labels None</p> | <p style="text-align: center;">NFPA</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>HEALTH HAZARD 4 – Deadly 3 – Extreme Danger 2 – Hazardous 1 – Slight Hazardous 0 – Normal Material</p> </div> <div style="width: 45%;"> <p>FIRE HAZARD Flash Points 4 – Below 73°F 3 – Below 100°F 2 – Above 100°F, Not exceeding 200°F 1 – Above 200°F 0 – Will not burn</p> </div> </div> <div style="text-align: center; margin: 10px 0;"> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>SPECIFIC HAZARD Oxidizer OX Acid ACID Alkali ALK Corrosive COR Use NO WATER W Radioactive R</p> </div> <div style="width: 45%;"> <p>REACTIVITY 4 – May detonate 3 – Shock and heat may detonate 2 – Violent chemical change 1 – Unstable if heated 0 – Stable</p> </div> </div> | <p style="text-align: center;">GHS Classification</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; vertical-align: top;"> <p style="text-align: center;">Health</p> <p>Acute Toxicity: Cat. 5 Skin Irritation: Cat. 3 Eye Irritation: Cat. 2B Skin Sensitization: NO</p> </td> <td style="width: 50%; vertical-align: top;"> <p style="text-align: center;">Environmental</p> <p>Acute Aquatic Toxicity: Cat. 4 Chronic Aquatic Toxicity: Not Established</p> </td> </tr> <tr> <td colspan="2" style="text-align: center; border-top: 1px solid black;"> <p>Physical</p> <p>Flammability: Product is combustible and may ignite if exposed to high temperature or direct flame.</p> </td> </tr> <tr> <td style="vertical-align: top;"> <p>Hazardous Statements</p> <p>H303: Harmful if swallowed H316: Causes mild skin irritation H320: Causes eye irritation H413: May cause long lasting harmful effects to aquatic life</p> </td> <td style="vertical-align: top;"> <p>Precautionary Statements</p> <p>P102 : Keep out of reach of children P264: Wash thoroughly after handling P273: Avoid release to the environment P280: Wear protective gloves/protective clothing/eye protection/face protection</p> </td> </tr> </table> | <p style="text-align: center;">Health</p> <p>Acute Toxicity: Cat. 5 Skin Irritation: Cat. 3 Eye Irritation: Cat. 2B Skin Sensitization: NO</p> | <p style="text-align: center;">Environmental</p> <p>Acute Aquatic Toxicity: Cat. 4 Chronic Aquatic Toxicity: Not Established</p> | <p>Physical</p> <p>Flammability: Product is combustible and may ignite if exposed to high temperature or direct flame.</p> | | <p>Hazardous Statements</p> <p>H303: Harmful if swallowed H316: Causes mild skin irritation H320: Causes eye irritation H413: May cause long lasting harmful effects to aquatic life</p> | <p>Precautionary Statements</p> <p>P102 : Keep out of reach of children P264: Wash thoroughly after handling P273: Avoid release to the environment P280: Wear protective gloves/protective clothing/eye protection/face protection</p> |
| <p style="text-align: center;">Health</p> <p>Acute Toxicity: Cat. 5 Skin Irritation: Cat. 3 Eye Irritation: Cat. 2B Skin Sensitization: NO</p> | <p style="text-align: center;">Environmental</p> <p>Acute Aquatic Toxicity: Cat. 4 Chronic Aquatic Toxicity: Not Established</p> | | | | | | | |
| <p>Physical</p> <p>Flammability: Product is combustible and may ignite if exposed to high temperature or direct flame.</p> | | | | | | | | |
| <p>Hazardous Statements</p> <p>H303: Harmful if swallowed H316: Causes mild skin irritation H320: Causes eye irritation H413: May cause long lasting harmful effects to aquatic life</p> | <p>Precautionary Statements</p> <p>P102 : Keep out of reach of children P264: Wash thoroughly after handling P273: Avoid release to the environment P280: Wear protective gloves/protective clothing/eye protection/face protection</p> | | | | | | | |
| <p>Signal Word Warning</p> | | | | | | | | |
| <p style="text-align: center;">HMIS</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="background-color: #000080; color: white; padding: 2px;">HEALTH</td> <td style="background-color: #000080; color: white; text-align: center; padding: 2px;">1</td> </tr> <tr> <td style="background-color: #FF0000; color: white; padding: 2px;">FLAMMABILITY</td> <td style="background-color: #FF0000; color: white; text-align: center; padding: 2px;">1</td> </tr> <tr> <td style="background-color: #FFD700; padding: 2px;">REACTIVITY</td> <td style="background-color: #FFD700; text-align: center; padding: 2px;">0</td> </tr> </table> | HEALTH | 1 | FLAMMABILITY | 1 | REACTIVITY | 0 | | |
| HEALTH | 1 | | | | | | | |
| FLAMMABILITY | 1 | | | | | | | |
| REACTIVITY | 0 | | | | | | | |

SECTION 3 – COMPOSITION / INFORMATION ON INGREDIENTS

| <u>Chemicals</u> | <u>CAS#</u> | <u>EINECS#</u> | <u>REACH</u> <u>Pre-registration Number</u> | <u>Approx %</u> |
|----------------------|-------------|----------------|--|-----------------|
| CALCIUM CARBONATE | 1317-65-3 | N/A | N/A | <40% |
| ACRYLIC EMULSION | (MIXTURE) | N/A | N/A | <45% |
| BENZOATE ESTER | PROPRIETARY | N/A | N/A | <10% |
| PETROLEUM DISTILLATE | 64742-48-9 | N/A | N/A | <0.75% |
| TITANIUM DIOXIDE | 13463-67-7 | N/A | N/A | <2% |
| AMMONIUM HYDROXIDE | 7664-41-7 | N/A | N/A | <0.25% |

*Unlisted ingredients are not classified as hazardous according to OSHA 1910.1200.

SECTION 4 – FIRST-AID MEASURES

| |
|---|
| <p>Inhalation: Move into fresh air. If breathing is difficult, give oxygen and call physician.</p> <p>Skin: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation persists, get medical attention.</p> <p>Eyes: Flush with water for 15 minutes. Remove contact lenses if present and easy to do, continue rinsing. If irritation persists, get medical attention.</p> <p>Ingestion: Give 1 or 2 glasses of water. DO NOT INDUCE VOMITING. Contact physician immediately.</p> |
|---|

GHS SAFETY DATA SHEET

SECTION 5 – FIRE-FIGHTING MEASURES

Fire Hazard: Any closed container may burst when exposed to extreme heat or fire.
Combustion Products: None.
Extinguishing Media: Carbon Dioxide Gas, Dry Chemical Powder, Foam, Water Fog.
Unsuitable Extinguishing Media: None known.
Protective Equipment: Self-contained breathing apparatus {(SCBA), MSHA/NIOSH}. Full protective gear.
Special Fire Fighting Procedures: Water spray may be used to cool exposed container. Caution may be taken because uncured material is water soluble.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Personal Precautions: Prevent contact with skin or eyes. Personnel cleaning up the spill should wear appropriate personal protective equipment, including.
Protective Equipment: Wear suitable respiratory protective equipment.
Emergency Procedures: Evacuate area and keep unnecessary and unprotected personnel from entering the spill area.
Environmental Precautions: Avoid runoff into storm sewers, ditches and waterways.
Methods for Cleaning Up: Add dry absorbent and shovel or sweep up. Place in an appropriate container and seal.

SECTION 7 – HANDLING AND STORAGE

| <u>Handling</u> | <u>Storage</u> |
|---|---|
| Keep out of reach of children and pets. Use with adequate ventilation. Avoid contact with eyes, skin and clothing. Avoid prolonged or repeated contact with skin. Do not eat or drink while handling this material. | Store containers in a cool, dry location, away from direct sunlight and high temperatures. Keep closed when not in use. |

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

| <u>Chemicals</u> | <u>Exposure Limits</u> | | |
|----------------------|---------------------------|---------------------------|--|
| | <u>ACGIH-TLV</u> | <u>ACGIH-STEL</u> | <u>OSHA-PEL</u> |
| CALCIUM CARBONATE | N/A | N/A | TWA: 15 mg/m ³ FORM: TOTAL DUST TWA: 5 mg/m ³ FORM: RESPIRABLE FRACTION |
| ACRYLIC EMULSION | N/A | N/A | N/A |
| BENZOATE ESTER | N/A | N/A | N/A |
| PETROLEUM DISTILLATE | TWA: 5mg/m ³ | TWA: 10 mg/m ³ | TWA: 5mg/m ³ |
| TITANIUM DIOXIDE | TWA: 10 mg/m ³ | N/A | N/A |

Engineering Controls: A source of running water to flush or wash the eyes and skin in case of contact. Use local exhaust as needed.
Ventilation: Local ventilation is adequate.
Personal Protective Equipment – Respiratory: NIOSH respirator if vapor and mist is generated. **Skin:** Gloves. **Eyes:** Splash Proof Goggles or Safety glasses.

SECTION 9 – PHYSICAL & CHEMICAL PROPERTIES

| | | |
|--|--|--|
| Appearance: White Caulk | Flash Point: Not Established | Vapor Pressure: 15 @ 68°F |
| Odor: Mild Acrylic Odor | Specific Gravity: 1.63 | Flammability: Not Established |
| pH: 8 | Solubility (H2O): Soluble | Flammability Limits: LEL – Not Established UEL – Not Established |
| Melting Point: 32°F | Evaporation Rate: Not Established | |
| Freezing Point: Not Established | Vapor Density: Heavier than air | |
| Boiling Point: 212°F (100°C) | VOC: 30 g/l | |

SECTION 10 – STABILITY AND REACTIVITY

Stability: Stable.
Hazardous polymerization: Will not occur.
Conditions to avoid: Avoid contact with incompatible chemicals and exposures to extreme temperatures.
Incompatible materials: Strong acids.
Hazardous decomposition products: May produce oxides of carbon and oxides of nitrogen when burned.

GHS SAFETY DATA SHEET

SECTION 11 – TOXICOLOGICAL INFORMATION

Toxicity

This product is not classified as hazardous according to OSHA 1910.1200.

Likely Routes of Exposure: Inhalation, Skin contact and Eye contact.

Symptoms and Effect - Inhalation: May cause nose or throat irritation. **Skin Contact:** May cause skin irritation. **Eye Contact:** May cause irritation. **Ingestion:** Swallowing large amounts may cause nausea and/or vomiting.

Long-Term Effect: None known.

Pre-Existing Conditions: None known.

SECTION 12 – ECOLOGICAL INFORMATION

Ecotoxicity: None known.

Persistence & Degradability: None known.

Bioaccumulative Potential: None known.

Mobility in soil: None known.

SECTION 13 – DISPOSAL CONSIDERATION

Dispose of product or container in accordance with federal, state or local regulations.

SECTION 14 – TRANSPORTATION INFORMATION

D.O.T. (U.S.): Not Regulated.

SECTION 15 – REGULATORY INFORMATION

Precautionary Label Information: None.

Risk Phrases: None.

Safety Phrases: S2-Keep out of reach of children.

SECTION 16 – OTHER INFORMATION

Information on this form is furnished solely for the purpose of compliance with the Occupational Safety and Health Act and shall not be used for any other purpose. Black Swan Mfg. Co. urges the customers receiving this Material Safety Data Sheet to study it carefully to become aware of the hazards, if any, of the product involved. In the interest of safety, you should notify your employees, agents and contractors of the information on the sheets.

DATE: 01/01/2019

SAFETY DATA SHEET

1. Identification

Product number 1000024822
Product identifier 12 OZ AMERISAFE CON GRD WEB ADH LB 12PK
Company information Amerisafe, Inc
3990 Enterprise Court
Aurora, IL
Company phone 630-862-2649
Version # 01
Recommended use Adhesive
Recommended restrictions None known.

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
Health hazards Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2A
Reproductive toxicity (fertility) Category 2
Specific target organ toxicity, single exposure Category 3 narcotic effects
Specific target organ toxicity, repeated exposure Category 2
Aspiration hazard Category 1
Environmental hazards Not classified.
OSHA defined hazards Not classified.

Label elements



Signal word

Danger

Hazard statement

Extremely flammable aerosol. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of damaging fertility. May cause damage to organs through prolonged or repeated exposure.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe gas. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection.

Response

If swallowed: Immediately call a poison center/doctor. If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. Collect spillage.

Storage

Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal

Not available.

Hazard(s) not otherwise classified (HNOC)

None known.

Supplemental information

None.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|----------|
| Acetone | | 67-64-1 | 20 - 40 |
| Propane | | 74-98-6 | 20 - 40 |
| Dimethyl Ether | | 115-10-6 | 10 - 20 |
| n-Hexane | | 110-54-3 | 10 - 20 |
| 2-Methylpentane | | 107-83-5 | 2.5 - 10 |
| 3-Methylpentane | | 96-14-0 | 1 - 2.5 |
| Other components below reportable levels | | | 10 - 20 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|---|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Wash off with soap and water. Get medical attention if irritation develops and persists. |
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. Get medical attention if symptoms occur. |
| Most important symptoms/effects, acute and delayed | May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed. |
| General information | IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Dry powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. Pressurized container may explode when exposed to heat or flame. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire-fighting equipment/instructions | Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes. |
| General fire hazards | Extremely flammable aerosol. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean-up. Do not breathe gas. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water. For waste disposal, see section 13 of the SDS. |

Environmental precautions

Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage**Precautions for safe handling**

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe gas. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Use only in well-ventilated areas. Should be handled in closed systems, if possible. Pregnant or breastfeeding women must not handle this product. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 2 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Refrigeration recommended. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)**

| Components | Type | Value |
|-------------------------------|------|----------|
| Dimethyl Ether (CAS 115-10-6) | STEL | 2 ppm |
| | TWA | 0.75 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| | PEL | 1800 mg/m3 500 ppm |
| n-Hexane (CAS 110-54-3) | PEL | 1800 mg/m3 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|--------------------------------|---------|----------|
| 2-Methylpentane (CAS 107-83-5) | STEL | 1000 ppm |
| | TWA | 500 ppm |
| 3-Methylpentane (CAS 96-14-0) | STEL | 1000 ppm |
| | TWA | 500 ppm |
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Dimethyl Ether (CAS 115-10-6) | Ceiling | 0.3 ppm |
| | TWA | 50 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-------------------------------|---------|----------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 250 ppm |
| | Ceiling | 0.1 ppm |
| Dimethyl Ether (CAS 115-10-6) | TWA | 0.016 ppm |
| | TWA | 180 mg/m3 50 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------|------|------------------------|
| Propane (CAS 74-98-6) | TWA | 1800 mg/m3 1000 ppm |

US. Workplace Environmental Exposure Level (WEEL) Guides

| Components | Type | Value |
|-------------------------------|------|------------------------|
| Dimethyl Ether (CAS 115-10-6) | TWA | 1880 mg/m3 1000 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Components | Value | Determinant | Specimen | Sampling Time |
|-------------------------|----------|---|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| n-Hexane (CAS 110-54-3) | 0.4 mg/l | 2,5-Hexanedio n, without hydrolysis | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines**US - California OELs: Skin designation**

n-Hexane (CAS 110-54-3) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

n-Hexane (CAS 110-54-3) Can be absorbed through the skin.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Hand protection Wear appropriate chemical resistant gloves.

Skin protection

Other Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Skin protection

Respiratory protection If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance**

Physical state Gas.

Form Aerosol.

Color Not available.

Odor Not available.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

Initial boiling point and boiling range 122.33 °F (50.18 °C) estimated

Flash point -156.0 °F (-104.4 °C) Propellant estimated

Evaporation rate Not available.

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) 2.2 % estimated

Flammability limit - upper (%) 8.6 % estimated

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure 62 psig @70F estimated

Vapor density Not available.

Relative density Not available.

Solubility(ies)

Solubility (water) Not available.

Partition coefficient (n-octanol/water) Not available.

Auto-ignition temperature 599.06 °F (315.03 °C) estimated

Decomposition temperature Not available.

Viscosity Not available.

Other information

Specific gravity 0.724 estimated

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous reactions Hazardous polymerization does not occur.

Conditions to avoid Avoid temperatures exceeding the flash point. Contact with incompatible materials.

Incompatible materials Strong oxidizing agents.

Hazardous decomposition products No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Ingestion Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.

Inhalation May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Narcotic effects. Prolonged inhalation may be harmful.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Symptoms related to the physical, chemical and toxicological characteristics May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects.

| Components | Species | Test Results |
|-----------------------|------------|---|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Guinea pig | > 7426 mg/kg, 24 Hours > 9.4 ml/kg, 24 Hours |
| | Rabbit | > 7426 mg/kg, 24 Hours > 9.4 ml/kg, 24 Hours |

| Components | Species | Test Results |
|-------------------------------|------------|--|
| <i>Inhalation</i> LC50 | Rat | 55700 ppm, 3 Hours 132 mg/l, 3 Hours 50.1 mg/l |
| <i>Oral</i> LD50 | Rat | 5800 mg/kg 2.2 ml/kg |
| Dimethyl Ether (CAS 115-10-6) | | |
| Acute | | |
| <i>Inhalation</i> NOEL | Rat | 2 ppm, 6 Hours |
| <i>Oral</i> LD50 | Rat | 460 mg/kg |
| n-Hexane (CAS 110-54-3) | | |
| Acute | | |
| <i>Dermal</i> LD50 | Rabbit | > 2000 mg/kg, 4 Hours > 5 ml/kg, 4 Hours |
| <i>Inhalation</i> LC50 | Rat | > 5000 ppm, 24 Hours > 31.86 mg/l 73860 ppm, 4 Hours |
| <i>Oral</i> LD50 | Rat | 24 ml/kg 24 g/kg |
| | Wistar rat | 49 g/kg |
| Propane (CAS 74-98-6) | | |
| Acute | | |
| <i>Inhalation</i> LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l 658 mg/l/4h |

* Estimates for product may be based on additional component data not shown.

| | |
|---|--|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| | Not listed. |
| Reproductive toxicity | Suspected of damaging fertility. |
| Specific target organ toxicity - single exposure | May cause drowsiness and dizziness. |

| | |
|---|---|
| Specific target organ toxicity - repeated exposure | Respiratory system. Skin. Eyes. Central nervous system. Peripheral nervous system. May cause damage to organs through prolonged or repeated exposure. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. May cause damage to organs through prolonged or repeated exposure. |

12. Ecological information

Ecotoxicity Toxic to aquatic life with long lasting effects.

| Product | Species | Test Results |
|---|--|----------------------------------|
| 12 OZ AMERISAFE CON GRD WEB ADH LB 12PK (CAS Mixture) | | |
| Aquatic | | |
| Crustacea | EC50 Daphnia | 105.183 mg/l, 48 hours estimated |
| Fish | LC50 Fish | 17.8322 mg/l, 96 hours estimated |
| Components | Species | Test Results |
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Crustacea | EC50 Water flea (Daphnia magna) | 21.6 - 23.9 mg/l, 48 hours |
| Fish | LC50 Rainbow trout,donaldson trout (Oncorhynchus mykiss) | 4740 - 6330 mg/l, 96 hours |
| Dimethyl Ether (CAS 115-10-6) | | |
| Aquatic | | |
| Crustacea | EC50 Water flea (Daphnia pulex) | 4.3 - 7.8 mg/l, 48 hours |
| Fish | LC50 Striped bass (Morone saxatilis) | 10.302 - 16.743 mg/l, 96 hours |
| n-Hexane (CAS 110-54-3) | | |
| Aquatic | | |
| Fish | LC50 Fathead minnow (Pimephales promelas) | 2.101 - 2.981 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------|-------|
| 2-Methylpentane | 3.74 |
| 3-Methylpentane | 3.6 |
| Acetone | -0.24 |
| Dimethyl Ether | 0.1 |
| n-Hexane | 3.9 |
| Propane | 2.36 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

US RCRA Hazardous Waste U List: Reference

Acetone (CAS 67-64-1) U002

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. Do not re-use empty containers.

14. Transport information**DOT**

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | N82 |
| Packaging exceptions | 306 |
| Packaging non bulk | None |
| Packaging bulk | None |

This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking and both may be displayed concurrently.

IATA

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Environmental hazards | Yes |
| ERG Code | 10L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Other information | |
| Passenger and cargo aircraft | Allowed. |
| Cargo aircraft only | Allowed. |
| Packaging Exceptions | LTD QTY |

IMDG

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | AEROSOLS |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Environmental hazards | |
| Marine pollutant | Yes |
| EmS | F-D, S-U |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |
| Packaging Exceptions | LTD QTY |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.


DOT



IATA; IMDG



Marine pollutant



General information

IMDG Regulated Marine Pollutant.

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Acetone (CAS 67-64-1)

Listed.

n-Hexane (CAS 110-54-3)

Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - Yes
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

| Chemical name | CAS number | Reportable quantity | Threshold planning quantity | Threshold planning quantity, lower value | Threshold planning quantity, upper value |
|---------------|------------|---------------------|-----------------------------|--|--|
| Phenol | 108-95-2 | 1000 | | 500 lbs | 10000 lbs |

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

| Chemical name | CAS number | % by wt. |
|---------------|------------|------------|
| n-Hexane | 110-54-3 | 10 - 20 |
| Ethyl Benzene | 100-41-4 | 0.01 - 0.1 |
| Styrene | 100-42-5 | 0.01 - 0.1 |

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

n-Hexane (CAS 110-54-3)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Dimethyl Ether (CAS 115-10-6)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.**Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number**

Acetone (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

US state regulations**US. Massachusetts RTK - Substance List**

2-Methylpentane (CAS 107-83-5)

3-Methylpentane (CAS 96-14-0)

Acetone (CAS 67-64-1)

Dimethyl Ether (CAS 115-10-6)

n-Hexane (CAS 110-54-3)

Propane (CAS 74-98-6)

US. New Jersey Worker and Community Right-to-Know Act

2-Methylpentane (CAS 107-83-5)

Acetone (CAS 67-64-1)

Dimethyl Ether (CAS 115-10-6)

n-Hexane (CAS 110-54-3)

Propane (CAS 74-98-6)

US. Pennsylvania Worker and Community Right-to-Know Law

2-Methylpentane (CAS 107-83-5)

3-Methylpentane (CAS 96-14-0)

Acetone (CAS 67-64-1)

Dimethyl Ether (CAS 115-10-6)

n-Hexane (CAS 110-54-3)

Propane (CAS 74-98-6)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Dimethyl Ether (CAS 115-10-6)

n-Hexane (CAS 110-54-3)

Propane (CAS 74-98-6)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | No |
| Canada | Domestic Substances List (DSL) | No |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | No |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Korea | Existing Chemicals List (ECL) | No |
| New Zealand | New Zealand Inventory | No |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 06-16-2015

Version # 01

Disclaimer The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Revision Information Product and Company Identification: Alternate Trade Names



Revision Number: 003.3

Issue date: 08/07/2017

1. PRODUCT AND COMPANY IDENTIFICATION

Product name: LOCTITE LB 8014 FOODGRADE ANTI-SEIZE known as LOCTITE® Food Grade Anti-Seize
Product type: Lubricant
Restriction of Use: None identified
Company address: Henkel Corporation
 One Henkel Way
 Rocky Hill, Connecticut 06067

IDH number: 1228666

Item number: 1228666
Region: United States

Contact information:
 Telephone: +1 (860) 571-5100
 MEDICAL EMERGENCY Phone: Poison Control Center
 1-877-671-4608 (toll free) or 1-303-592-1711
 TRANSPORT EMERGENCY Phone: CHEMTREC
 1-800-424-9300 (toll free) or 1-703-527-3887
 Internet: www.henkelna.com

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

DANGER: CAUSES SKIN IRRITATION.
 CAUSES SERIOUS EYE DAMAGE.

| HAZARD CLASS | HAZARD CATEGORY |
|--------------------|-----------------|
| SKIN IRRITATION | 2 |
| SERIOUS EYE DAMAGE | 1 |

PICTOGRAM(S)



Precautionary Statements

Prevention: Wash affected area thoroughly after handling. Wear protective gloves, eye protection, and face protection.

Response: IF ON SKIN: Wash with plenty of water. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation occurs: Get medical attention. Take off contaminated clothing.

Storage: Not prescribed

Disposal: Not prescribed

Classification complies with OSHA Hazard Communication Standard (29 CFR 1910.1200) and is consistent with the provisions of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

| Hazardous Component(s) | CAS Number | Percentage* |
|---|------------|-------------|
| Mineral oil | Unknown | 40 - 50 |
| White mineral oil (petroleum), highly refined | 8042-47-5 | 10 - 20 |

IDH number: 1228666

Product name: LOCTITE LB 8014 FOODGRADE ANTI-SEIZE known as LOCTITE® Food Grade Anti-Seize

| | | |
|---------------------|------------|---------|
| Calcium dihydroxide | 1305-62-0 | 10 - 20 |
| Talc | 14807-96-6 | 5 - 10 |

* Exact percentages may vary or are trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

| | |
|----------------------|---|
| Inhalation: | Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. If symptoms develop and persist, get medical attention. |
| Skin contact: | Wash with soap and water. If symptoms develop and persist, get medical attention. |
| Eye contact: | Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. If symptoms develop and persist, get medical attention. |
| Ingestion: | Do not induce vomiting. Never give anything by mouth to an unconscious person. If symptoms develop and persist, get medical attention. |
| Symptoms: | See Section 11. |

5. FIRE FIGHTING MEASURES

| | |
|---|--|
| Extinguishing media: | Water spray (fog), foam, dry chemical or carbon dioxide. |
| Special firefighting procedures: | Wear self-contained breathing apparatus and full protective clothing, such as turn-out gear. |
| Unusual fire or explosion hazards: | Closed containers may rupture (due to build up of pressure) when exposed to extreme heat. |
| Hazardous combustion products: | Oxides of carbon. Toxic and irritating vapors. |

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

| | |
|-----------------------------------|--|
| Environmental precautions: | Do not allow product to enter sewer or waterways. |
| Clean-up methods: | Keep unnecessary personnel away. Scrape up as much material as possible. Clean residue with soap and water. Store in a partly filled, closed container until disposal. Refer to Section 8 "Exposure Controls / Personal Protection" prior to clean up. |

7. HANDLING AND STORAGE

| | |
|------------------|---|
| Handling: | Avoid contact with eyes, skin and clothing. Do not breathe gas/fumes/vapor/spray. Wash thoroughly after handling. Refer to Section 8. |
| Storage: | Keep in a cool, well ventilated area away from heat, sparks and open flame. Keep container tightly closed until ready for use. |

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

| Hazardous Component(s) | ACGIH TLV | OSHA PEL | AIHA WEEL | OTHER |
|---|--|--|-----------|--------|
| Mineral oil | 5 mg/m ³ TWA mist 10 mg/m ³ STEL mist | 5 mg/m ³ TWA mist | None | None |
| White mineral oil (petroleum), highly refined | 5 mg/m ³ TWA Inhalable fraction. | 5 mg/m ³ TWA mist 5 mg/m ³ PEL Mist. | None | None |
| Calcium dihydroxide | 5 mg/m ³ TWA | 5 mg/m ³ PEL Respirable fraction. 15 mg/m ³ PEL Total dust. | None | None |
| Talc | 2 mg/m ³ TWA Respirable fraction. | 0.1 mg/m ³ TWA Respirable. 2.4 MPPCF TWA Respirable. 20 MPPCF TWA | None | 50 ppm |

Engineering controls:

Use only with adequate ventilation. Local exhaust ventilation is recommended when general ventilation is not sufficient to control airborne contamination below occupational exposure limits.

Respiratory protection:

Use NIOSH approved respirator if there is potential to exceed exposure limit(s). Observe OSHA regulations for respirator use (29 CFR 1910.134).

Eye/face protection:

Safety goggles or safety glasses with side shields. Full face protection should be used if the potential for splashing or spraying of product exists. Safety showers and eye wash stations should be available.

Skin protection:

Use impermeable gloves and protective clothing as necessary to prevent skin contact.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|------------------------------|
| Physical state: | Paste |
| Color: | White |
| Odor: | Mild |
| Odor threshold: | Not available. |
| pH: | Not available. |
| Vapor pressure: | Not determined |
| Boiling point/range: | Not available. |
| Melting point/ range: | Not available. |
| Specific gravity: | 1.18 |
| Vapor density: | Not available. |
| Flash point: | 154 °C (309.2 °F) calculated |
| Flammable/Explosive limits - lower: | Not available. |
| Flammable/Explosive limits - upper: | Not available. |
| Autoignition temperature: | Not available. |
| Flammability: | Not applicable |
| Evaporation rate: | Not available. |
| Solubility in water: | Insoluble |
| Partition coefficient (n-octanol/water): | Not determined |
| VOC content: | < 3 % |
| Viscosity: | Not available. |
| Decomposition temperature: | Not available. |

10. STABILITY AND REACTIVITY

| | |
|--|---|
| Stability: | Stable under normal conditions of storage and use. |
| Hazardous reactions: | Will not occur. |
| Hazardous decomposition products: | Oxides of carbon. Hydrocarbons. Irritating organic vapours. |
| Incompatible materials: | Oxidizing agents. |
| Reactivity: | Not available. |
| Conditions to avoid: | Excessive heat. Store away from incompatible materials. |

11. TOXICOLOGICAL INFORMATION

Relevant routes of exposure: Skin, Inhalation, Eyes, Ingestion

Potential Health Effects/Symptoms

| | |
|----------------------|--|
| Inhalation: | This product has low volatility and is not expected to cause respiratory tract irritation during normal conditions of use. |
| Skin contact: | Causes skin irritation. |
| Eye contact: | Causes serious eye damage. |
| Ingestion: | Not expected under normal conditions of use. May cause gastrointestinal tract irritation if swallowed. |

| Hazardous Component(s) | LD50s and LC50s | Immediate and Delayed Health Effects |
|---|-------------------------------|--|
| Mineral oil | None | No Data |
| White mineral oil (petroleum), highly refined | None | Irritant |
| Calcium dihydroxide | Oral LD50 (Rat) = 7,340 mg/kg | Irritant, Corrosive |
| Talc | None | Irritant, Lung, Some evidence of carcinogenicity |

| Hazardous Component(s) | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen (Specifically Regulated) |
|---|----------------|-----------------|--|
| Mineral oil | No | No | No |
| White mineral oil (petroleum), highly refined | No | No | No |
| Calcium dihydroxide | No | No | No |
| Talc | No | Group 2B | No |

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Follow all local, state, federal and provincial regulations for disposal.
Hazardous waste number: Not a RCRA hazardous waste.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any package/configuration.

U.S. Department of Transportation Ground (49 CFR)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

International Air Transportation (ICAO/IATA)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

Water Transportation (IMO/IMDG)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

15. REGULATORY INFORMATION

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory.
TSCA 12 (b) Export Notification: None above reporting de minimis
CERCLA/SARA Section 302 EHS: None above reporting de minimis.
CERCLA/SARA Section 311/312: Immediate Health, Delayed Health
CERCLA/SARA Section 313: None above reporting de minimis.
California Proposition 65: This product contains a chemical known in the State of California to cause cancer. This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Canada Regulatory Information

CEPA DSL/NDSL Status: All components are listed on or are exempt from listing on the Canadian Domestic Substances List.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: New Safety Data Sheet format.

Prepared by: Cara R. Rivera, Regulatory Affairs Specialist
Issue date: 08/07/2017

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.



SAFETY DATA SHEET

1. Identification

| | |
|---|---|
| Product identifier | Hercules MegaBubble |
| Other means of identification | |
| Product code | 7322E |
| Synonyms | Part Numbers: 45801, 45802, 45803, 45804 |
| Recommended use | Leak Detector |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | HCC Holdings, Inc. an Oatey Affiliate |
| Address | 4700 West 160th Street Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | |
|--|--|
| Physical hazards | Not classified. |
| Health hazards | Not classified. |
| Environmental hazards | Hazardous to the aquatic environment, acute Not applicable hazard |
| OSHA defined hazards | Not classified. |
| Label elements | |
| Hazard symbol | None. |
| Signal word | None. |
| Hazard statement | The mixture does not meet the criteria for classification. |
| Precautionary statement | |
| Prevention | Observe good industrial hygiene practices. |
| Response | Wash hands after handling. |
| Storage | Store away from incompatible materials. |
| Disposal | Dispose of waste and residues in accordance with local authority requirements. |
| Hazard(s) not otherwise classified (HNOC) | None known. |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|----------------------|-------------------|----------|
| Propylene glycol | 57-55-6 | 30-60 |
| Water | 7732-18-5 | 30-60 |
| Glycerol | 56-81-5 | 10-30 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---------------------|---|
| Inhalation | If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Call a physician if symptoms develop or persist. |
| Skin contact | Rinse skin with water/shower. Get medical attention if irritation develops and persists. |

| | |
|---|--|
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. If ingestion of a large amount does occur, call a poison control center immediately. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Avoid prolonged exposure. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------|------|---|-------------------------------------|
| Glycerol (CAS 56-81-5) | PEL | 5 mg/m ³ 15 mg/m ³ | Respirable fraction. Total dust. |

US. Workplace Environmental Exposure Level (WEEL) Guides

| Components | Type | Value | Form |
|--------------------------------|------|----------------------|----------|
| Propylene glycol (CAS 57-55-6) | TWA | 10 mg/m ³ | Aerosol. |

Biological limit values No biological exposure limits noted for the ingredient(s).

| | |
|--|---|
| Appropriate engineering controls | Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. |
| Individual protection measures, such as personal protective equipment | |
| Eye/face protection | Wear safety glasses with side shields (or goggles). |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear suitable protective clothing. |
| Respiratory protection | In case of insufficient ventilation, wear suitable respiratory equipment. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|---|-------------------------|
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Blue. |
| Odor | Odorless. |
| Odor threshold | Not available. |
| pH | 7.2 |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 212 °F (100 °C) |
| Flash point | > 212.0 °F (> 100.0 °C) |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Relative density | 1.05 |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 100 cP |
| Other information | |
| VOC (Weight %) | 435 g/l |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |

| | |
|---|--|
| Conditions to avoid | Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | Prolonged inhalation may be harmful. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|--------------------------------|---------|--------------|
| Glycerol (CAS 56-81-5) | | |
| Acute | | |
| <i>Oral</i> | | |
| LD50 | Rat | 12600 mg/kg |
| Propylene glycol (CAS 57-55-6) | | |
| Acute | | |
| <i>Oral</i> | | |
| LD50 | Rat | 30 g/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.
Serious eye damage/eye irritation Direct contact with eyes may cause temporary irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.
Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

Further information This product has no known adverse effect on human health.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | | Test Results |
|--------------------------------|---------|---------------------|----------------------|
| Propylene glycol (CAS 57-55-6) | | | |
| Aquatic | | | |
| Crustacea | LC50 | Ceriodaphnia dubia | 18340 mg/l, 48 hours |
| Fish | LC50 | Pimephales promelas | 46500 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

| | |
|--------------------------------|-------|
| Glycerol (CAS 56-81-5) | -1.76 |
| Propylene glycol (CAS 57-55-6) | -0.92 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is not known to be a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - No
Delayed Hazard - No
Fire Hazard - No
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List
Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)
Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. Massachusetts RTK - Substance List
Glycerol (CAS 56-81-5)

US. New Jersey Worker and Community Right-to-Know Act
Glycerol (CAS 56-81-5)
Propylene glycol (CAS 57-55-6)

US. Pennsylvania Worker and Community Right-to-Know Law
Glycerol (CAS 56-81-5)
Propylene glycol (CAS 57-55-6)

US. Rhode Island RTK
Not regulated.

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|-------------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 05-February-2015

Revision date -

Version # 01

HMIS® ratings
Health: 0
Flammability: 0
Physical hazard: 0

Disclaimer
HCC Holdings Inc. an Oatey Affiliate cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.

FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Date of issue: 12/17/2015


Revision date: 12/17/2015

Supersedes: 12/17/2015

Version: 1.2

SECTION 1: Identification

1.1. Identification

| | |
|--------------------|---|
| Product form | Mixture |
| Name | FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL |
| Product code | BU Chemicals |
| Chemical structure |  |

1.2. Relevant identified uses of the substance or mixture and uses advised against

No additional information available

1.3. Details of the supplier of the safety data sheet

Hilti, Inc.
 Legacy Tower, Suite 1000
 75024 Plano - USA
 T +1 9724035800
 1-800-879-8000 toll free - F +1 918 254 0522

Supplier

Hilti, Inc.
 Legacy Tower, Suite 1000
 75024 Plano - USA
 T +1 9724035800
 1-800-879-8000 toll free - F +1 918 254 0522

Department issuing data specification sheet

Hilti AG
 Feldkircherstraße 100
 9494 Schaan - Liechtenstein
 T +423 234 2111
chemicals.hse@hilti.com

1.4. Emergency telephone number

| | |
|------------------|---|
| Emergency number | Chem-Trec Tel.: 1 800 424 9300 (USA, PR, Virgin Islands, Canada) Tel.: 703 527 3887 (Other countries) +1 918 8723000 1-800-879-8000 toll free |
|------------------|---|

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

Not classified

2.2. Label elements

GHS-US labelling

No labelling applicable

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable

3.2. Mixture

| Name | Product identifier | % | GHS-US classification |
|--------|---------------------|---------|-----------------------|
| Quartz | (CAS No) 14808-60-7 | 2.5 - 5 | Carc. 1A, H350 |

Full text of H-statements: see section 16

SECTION 4: First aid measures

4.1. Description of first aid measures

| | |
|---------------------------------------|--|
| First-aid measures after inhalation | Get medical advice/attention if you feel unwell. |
| First-aid measures after skin contact | Wash skin with plenty of water. If skin irritation occurs: Get medical advice/attention. |
| First-aid measures after eye contact | Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| First-aid measures after ingestion | Get medical advice/attention if you feel unwell. |

4.2. Most important symptoms and effects, both acute and delayed

No additional information available

4.3. Indication of any immediate medical attention and special treatment needed

No additional information available

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media Water spray. Dry powder. Foam. Carbon dioxide.

5.2. Special hazards arising from the substance or mixture

Reactivity The product is non-reactive under normal conditions of use, storage and transport.

5.3. Advice for firefighters

Protection during firefighting Self-contained breathing apparatus. Complete protective clothing.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

6.1.1. For non-emergency personnel

No additional information available

6.1.2. For emergency responders

Protective equipment For further information refer to section 8: "Exposure controls/personal protection".

6.2. Environmental precautions

No additional information available

6.3. Methods and material for containment and cleaning up

Methods for cleaning up Recover mechanically the product.

6.4. Reference to other sections

For further information refer to section 13.

FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 7: Handling and storage

7.1. Precautions for safe handling

| | |
|-------------------------------|--|
| Precautions for safe handling | Wear personal protective equipment. |
| Hygiene measures | Wash contaminated clothing before reuse. Do not eat, drink or smoke when using this product. Always wash hands after handling the product. |

7.2. Conditions for safe storage, including any incompatibilities

| | |
|---------------------|----------------------------------|
| Storage conditions | Keep cool. Store in a dry place. |
| Storage temperature | 41 - 77 °F |

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Quartz (14808-60-7) | | |
|---------------------|---------------|--------------------|
| OSHA | Remark (OSHA) | (3) See Table Z-3. |

8.2. Exposure controls

Personal protective equipment Protective clothing. Safety glasses. Gloves.



| | |
|--------------------------|------------------------------------|
| Hand protection | Protective gloves. EN 374. |
| Eye protection | Safety glasses. EN 166. EN 170. |
| Skin and body protection | Wear suitable protective clothing. |

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|--------------------------|
| Physical state | Liquid |
| Appearance | Pasty. |
| Colour | red |
| Odour | characteristic |
| Odour threshold | Not determined |
| pH | ≈ 7.85 |
| Melting point | Not applicable |
| Freezing point | No data available |
| Boiling point | No data available |
| Flash point | Not applicable |
| Relative evaporation rate (butylacetate=1) | No data available |
| Flammability (solid, gas) | No data available |
| Explosive limits | No data available |
| Explosive properties | No data available |
| Oxidising properties | No data available |
| Vapour pressure | No data available |
| Relative density | No data available |
| Relative vapour density at 20 °C | No data available |
| Density | ≈ 1.35 g/cm ³ |
| Molecular mass | Not determined |

FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|---------------------------|-------------------|
| Solubility | No data available |
| Log Pow | No data available |
| Auto-ignition temperature | No data available |
| Decomposition temperature | No data available |
| Viscosity | No data available |
| Viscosity, kinematic | No data available |
| Viscosity, dynamic | No data available |

9.2. Other information

| | |
|-------------|-------|
| VOC content | 9 g/l |
|-------------|-------|

SECTION 10: Stability and reactivity

10.1. Reactivity

The product is non-reactive under normal conditions of use, storage and transport.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

No dangerous reactions known under normal conditions of use.

10.4. Conditions to avoid

None under recommended storage and handling conditions (see section 7).

10.5. Incompatible materials

No additional information available

10.6. Hazardous decomposition products

Under normal conditions of storage and use, hazardous decomposition products should not be produced.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

| | |
|-----------------------------------|------------------------------|
| Acute toxicity | Not classified |
| Skin corrosion/irritation | Not classified pH: ≈ 7.85 |
| Serious eye damage/irritation | Not classified pH: ≈ 7.85 |
| Respiratory or skin sensitisation | Not classified |
| Germ cell mutagenicity | Not classified |
| Carcinogenicity | Not classified |

| Quartz (14808-60-7) | |
|--|----------------------------|
| IARC group | 1 - Carcinogenic to humans |
| Reproductive toxicity | Not classified |
| Specific target organ toxicity (single exposure) | Not classified |
| Specific target organ toxicity (repeated exposure) | Not classified |
| Aspiration hazard | Not classified |

FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 12: Ecological information

12.1. Toxicity

| | |
|-------------------|--|
| Ecology - general | The product is not considered harmful to aquatic organisms or to cause long-term adverse effects in the environment. |
|-------------------|--|

12.2. Persistence and degradability

No additional information available

12.3. Bioaccumulative potential

No additional information available

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

| | |
|------------------------------|--|
| Effect on the global warming | No known ecological damage caused by this product. |
|------------------------------|--|

SECTION 13: Disposal considerations

13.1. Waste treatment methods

| | |
|--------------------------------|---|
| Waste treatment methods | Dispose of contents/container in accordance with licensed collector's sorting instructions. |
| Waste disposal recommendations | Dispose in a safe manner in accordance with local/national regulations. |

SECTION 14: Transport information

In accordance with ADR / RID / IMDG / IATA / ADN

14.1. UN number

Not regulated for transport

14.2. UN proper shipping name

| | |
|-----------------------------|----------------|
| Proper Shipping Name (ADR) | Not applicable |
| Proper Shipping Name (IMDG) | Not applicable |
| Proper Shipping Name (IATA) | Not applicable |
| Proper Shipping Name (ADN) | Not applicable |
| Proper Shipping Name (RID) | Not applicable |

14.3. Transport hazard class(es)

ADR

| | |
|----------------------------------|----------------|
| Transport hazard class(es) (ADR) | Not applicable |
|----------------------------------|----------------|

IMDG

| | |
|-----------------------------------|----------------|
| Transport hazard class(es) (IMDG) | Not applicable |
|-----------------------------------|----------------|

IATA

| | |
|-----------------------------------|----------------|
| Transport hazard class(es) (IATA) | Not applicable |
|-----------------------------------|----------------|

ADN

| | |
|----------------------------------|----------------|
| Transport hazard class(es) (ADN) | Not applicable |
|----------------------------------|----------------|

RID

FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Transport hazard class(es) (RID) Not applicable

14.4. Packing group

| | |
|----------------------|----------------|
| Packing group (ADR) | Not applicable |
| Packing group (IMDG) | Not applicable |
| Packing group (IATA) | Not applicable |
| Packing group (ADN) | Not applicable |
| Packing group (RID) | Not applicable |

14.5. Environmental hazards

| | |
|-------------------------------|--|
| Dangerous for the environment | No |
| Marine pollutant | No |
| Other information | No supplementary information available |

14.6. Special precautions for user

- Overland transport

- Transport by sea

No data available

- Air transport

No data available

- Inland waterway transport

| | |
|---------------------------|----|
| Carriage prohibited (ADN) | No |
| Not subject to ADN | No |

- Rail transport

| | |
|---------------------------|----|
| Carriage prohibited (RID) | No |
|---------------------------|----|

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

SECTION 15: Regulatory information

15.1. US Federal regulations

This product or mixture does not contain a toxic chemical or chemicals in excess of the applicable de minimis concentration as specified in 40 CFR §372.38(a) subject to the reporting requirements of section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR Part 372.

Quartz (14808-60-7)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

15.2. International regulations

CANADA

FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL

| | |
|----------------------|---|
| WHMIS Classification | Uncontrolled product according to WHMIS classification criteria |
|----------------------|---|

EU-Regulations

No additional information available

Classification according to Regulation (EC) No. 1272/2008 [CLP]

Not classified

National regulations

FS-ONE MAX; Hilti Firestop Filler Mastic CFS-FIL

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| |
|--|
| Quartz (14808-60-7) |
| Listed on IARC (International Agency for Research on Cancer) |

15.3. US State regulations

California Proposition 65 - This product does not contain any substances known to the state of California to cause cancer, developmental and/or reproductive harm

SECTION 16: Other information

Revision date 12/17/2015

Full text of H-statements:

| | |
|----------|------------------------------|
| Carc. 1A | Carcinogenicity, Category 1A |
| H350 | May cause cancer |

HMIS III Rating

Health 0 Minimal Hazard - No significant risk to health
 Flammability 0 Minimal Hazard - Materials that will not burn
 Physical 0 Minimal Hazard - Materials that are normally stable, even under fire conditions, and will NOT react with water, polymerize, decompose, condense, or self-react. Non-Explosives.
 Personal Protection B
 B - Safety glasses, Gloves

SDS_US_Hilti

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product



1. Product and company identification

Product name Moly Dee CF Tapping Fluid

MSDS # 467723

Historic MSDS #: 05226-BE

Code 467723-US03

Product use Metalworking fluid - neat.
For specific application advice see appropriate Technical Data Sheet or consult our company representative.

Manufacturer Castrol Industrial North America, Inc.
150 W. Warrenville Road
Naperville, IL 60563

Supplier Wakefield Canada, Limited
3620 Lakeshore Blvd West
Toronto, Ontario, Canada
M8W 1P2

Castrol Industrial North America, Inc.
150 W. Warrenville Road
Naperville, IL 60563
Product Information: +1-877-641-1600

EMERGENCY SPILL INFORMATION: 1 (613) 996-6666 CANUTEC (Canada)
1 (703) 527-3887 CHEMTREC (USA)

2. Hazards identification

Physical state Liquid.

Color Gray.

Emergency overview CAUTION !

MAY CAUSE RESPIRATORY TRACT, EYE AND SKIN IRRITATION.
POSSIBLE REPRODUCTIVE HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE ADVERSE REPRODUCTIVE EFFECTS BASED ON ANIMAL DATA.

Prolonged or repeated contact can defat the skin and lead to irritation and/or dermatitis. Do not breathe vapor or mist. Do not get on skin or clothing. Avoid contact with eyes. Contains material which may impair fertility, based on animal data. Use only with adequate ventilation. Keep container tightly closed and sealed until ready for use. Wash thoroughly after handling.

Routes of entry Dermal contact. Eye contact. Inhalation.

Potential health effects

- Eyes** May cause eye irritation.
- Skin** May cause skin irritation. Prolonged or repeated contact can defat the skin and lead to irritation and/or dermatitis.
- Inhalation** May cause respiratory tract irritation.
- Ingestion** Ingestion may cause gastrointestinal irritation and diarrhea.

See toxicological information (Section 11)

| | | |
|--|---------------------------------|-------------------------|
| Product name Moly Dee CF Tapping Fluid | Product code 467723-US03 | Page: 1/6 |
| Version 2.02 Date of issue 08/27/2012. | Format Canada | Language ENGLISH |
| | (Canada) | (ENGLISH) |

3. Composition/information on ingredients

| Ingredient name | CAS # | % |
|---------------------------|------------|---------|
| Base oil - highly refined | Varies | 40 - 45 |
| trixyl phosphate | 25155-23-1 | 1 - 5 |

4. First aid measures

| | |
|---------------------|--|
| Eye contact | In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if symptoms occur. |
| Skin contact | Immediately wash exposed skin with soap and water. Remove contaminated clothing and shoes. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention if symptoms occur. |
| Inhalation | If inhaled, remove to fresh air. Get medical attention if symptoms occur. |
| Ingestion | Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately. |

5. Fire-fighting measures

| | |
|--------------------------------------|---|
| Flash point | Open cup: 200°C (392°F) [Cleveland.] |
| Fire/explosion hazards | In a fire or if heated, a pressure increase will occur and the container may burst. |
| Extinguishing media | |
| Suitable | Use an extinguishing agent suitable for the surrounding fire. |
| Not suitable | Do not use water jet. |
| Fire-fighting procedures | Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Fire water contaminated with this material must be contained and prevented from being discharged to any waterway, sewer or drain. |
| Hazardous combustion products | Combustion products may include the following: phosphorus oxides carbon oxides (CO, CO ₂) (carbon monoxide, carbon dioxide) sulfur oxides (SO, SO ₂ etc.) |
| Protective clothing (fire) | Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode. |

6. Accidental release measures

| | |
|----------------------------------|---|
| Personal precautions | No action shall be taken involving any personal risk or without suitable training. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. In accordance with good industrial hygiene and safety work practices, airborne exposures should be controlled to the lowest extent practicable. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see Section 8). |
| Environmental precautions | Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air). Water polluting material. May be harmful to the environment if released in large quantities. |
| Methods for cleaning up | |
| Large spill | Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal. |
| Small spill | Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor. |

7. Handling and storage

| | |
|--------------------------|---|
| Handling | Put on appropriate personal protective equipment (see Section 8). Workers should wash hands and face before eating, drinking and smoking. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. Avoid release to the environment. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. |
| Storage | Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination. |
| Other information | Sulfur compounds in this material may decompose when heated to release hydrogen sulfide gas which may accumulate to potentially lethal concentrations in enclosed air spaces. Vapor concentrations of hydrogen sulfide above 50 ppm, or prolonged exposure at lower concentrations, may saturate human odor perceptions so that the smell of gas may not be apparent. Exposure to concentrations of hydrogen sulfide vapor above 500 ppm may cause rapid death. Do not rely on the sense of smell to detect hydrogen sulfide. |

8. Exposure controls/personal protection

Occupational exposure limits

| Ingredient name | Occupational exposure limits |
|---------------------------|---|
| Base oil - highly refined | ACGIH (United States). TWA: 5 mg/m ³ 8 hours. Form: Mineral oil, mist OSHA (United States). TWA: 5 mg/m ³ 8 hours. Form: Mineral oil, mist |
| trixyl yl phosphate | CA Ontario Provincial (Canada). TWA: 0.1 mg/m ³ 8 hours. Issued/Revised: 7/2010 |

While specific OELs for certain components may be shown in this section, other components may be present in any mist, vapor or dust produced. Therefore, the specific OELs may not be applicable to the product as a whole and are provided for guidance only.

Control Measures Use only with adequate ventilation. If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.

Hygiene measures Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing.

Personal protection

| | |
|----------------------|--|
| Eyes | Avoid contact with eyes. Safety glasses with side shields or chemical goggles. |
| Skin and body | Do not get on skin or clothing. Wear clothing and footwear that cannot be penetrated by chemicals or oil. Wear face shield. |
| Respiratory | Use adequate ventilation. Do not breathe vapor or mist. |
| Hands | The correct choice of protective gloves depends upon the chemicals being handled, the conditions of work and use, and the condition of the gloves (even the best chemically resistant glove will break down after repeated chemical exposures). Most gloves provide only a short time of protection before they must be discarded and replaced. Because specific work environments and material handling practices vary, safety procedures should be developed for each intended application. Gloves should therefore be chosen in consultation with the supplier/manufacturer and with a full assessment of the working conditions. |

9. Physical and chemical properties

| | |
|-----------------------|--------------------------------------|
| Physical state | Liquid. |
| Color | Gray. |
| Odor | Odorless. |
| Odor threshold | Not available. |
| Flash point | Open cup: 200°C (392°F) [Cleveland.] |

| | | |
|--|---------------------------------|-------------------------|
| Product name Moly Dee CF Tapping Fluid | Product code 467723-US03 | Page: 3/6 |
| Version 2.02 Date of issue 08/27/2012. | Format Canada | Language ENGLISH |
| | (Canada) | (ENGLISH) |

| | |
|------------------------------|---|
| Specific gravity | Not available. |
| Density | 950 kg/m ³ (0.95 g/cm ³) at 15.6°C |
| pH | Not available. |
| Viscosity | Kinematic: 165 mm ² /s (165 cSt) at 40°C |
| Boiling point / Range | Not available. |
| Melting point / Range | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Evaporation rate | Not available. |
| Solubility | insoluble in water. |
| LogK_{ow} | Not available. |

10. Stability and reactivity

| | |
|--|--|
| Stability and reactivity | The product is stable. |
| Possibility of hazardous reactions | Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | Avoid all possible sources of ignition (spark or flame). |
| Incompatibility with various substances | Reactive or incompatible with the following materials: oxidizing materials. |
| Hazardous decomposition products | Hydrogen Sulfide (H ₂ S) |
| Hazardous polymerization | Under normal conditions of storage and use, hazardous polymerization will not occur. |

11. Toxicological information

| | |
|---|--|
| Other Toxicity Data | <p>Although biological testing has found evidence of delayed neurotoxic effects with various grades of trixylyl phosphate, no neurotoxic effects have been observed with this product. However, product should still be regarded as having a potential to cause damage to the nervous system by inhalation, skin contact or ingestion. Good working practices and personal hygiene must be maintained at all times to ensure contact with the product is avoided.</p> <p>trixylyl phosphate: Possible reproductive hazard based on studies with laboratory animals.</p> <p>Over exposure to vapors may result in headaches, dizziness, nausea.</p> |
| Potential chronic health effects | |
| Carcinogenicity | No known significant effects or critical hazards. |
| Mutagenicity | No known significant effects or critical hazards. |
| Teratogenicity | No known significant effects or critical hazards. |
| Fertility effects | Contains material which may impair male fertility, based on animal data. |
| Reproductive effects | Contains material which can cause developmental abnormalities. |
| Medical conditions aggravated by over-exposure | None known. |

12. Ecological information

Ecotoxicity

No testing has been performed by the manufacturer.

| | | |
|--|---------------------------------|-------------------------|
| Product name Moly Dee CF Tapping Fluid | Product code 467723-US03 | Page: 4/6 |
| Version 2.02 Date of issue 08/27/2012. | Format Canada | Language ENGLISH |
| | (Canada) | (ENGLISH) |

13. Disposal considerations

Waste information

The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

NOTE: The generator of waste has the responsibility for proper waste identification (based on characteristic(s) or listing), transportation and disposal

14. Transport information

International transport regulations

| Regulatory information | UN number | Proper shipping name | Class | Packing group | Additional information |
|---------------------------------|----------------|--|-------|---------------|---|
| DOT Classification | Not regulated. | - | - | - | - |
| TDG Classification | Not regulated. | - | - | - | - |
| IMDG Classification | UN3082 | Environmentally hazardous substance, liquid, n.o.s. (trixyl phosphate). Marine pollutant | 9 | III | - |
| IATA/ICAO Classification | UN3082 | Environmentally hazardous substance, liquid, n.o.s. (trixyl phosphate) | 9 | III | Remarks Environmentally hazardous substance mark. |

15. Regulatory information

WHMIS (Canada)

Class D-2A: Material causing other toxic effects (Very toxic).
Class D-2B: Material causing other toxic effects (Toxic).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

Other regulations

Canada inventory

All components are listed or exempted.

United States inventory (TSCA 8b)

All components are listed or exempted.

REACH Status

For the REACH status of this product please consult your company contact, as identified in Section 1.

Australia inventory (AICS)

At least one component is not listed.

China inventory (IECSC)

All components are listed or exempted.

Japan inventory (ENCS)

At least one component is not listed.

Korea inventory (KECI)

All components are listed or exempted.

Philippines inventory (PICCS)

At least one component is not listed.

Product name Moly Dee CF Tapping Fluid

Product code 467723-US03

Page: 5/6

Version 2.02 **Date of issue** 08/27/2012.

Format Canada
(Canada)

Language ENGLISH
(ENGLISH)

16. Other information

Label requirements

CAUTION !

MAY CAUSE RESPIRATORY TRACT, EYE AND SKIN IRRITATION.
POSSIBLE REPRODUCTIVE HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE
ADVERSE REPRODUCTIVE EFFECTS BASED ON ANIMAL DATA.

History

Date of issue

08/27/2012.

Date of previous issue

08/27/2012.

Prepared by

Product Stewardship

✔ Indicates information that has changed from previously issued version.

Notice to reader

All reasonably practicable steps have been taken to ensure this data sheet and the health, safety and environmental information contained in it is accurate as of the date specified below. No warranty or representation, express or implied is made as to the accuracy or completeness of the data and information in this data sheet.

The data and advice given apply when the product is sold for the stated application or applications. You should not use the product other than for the stated application or applications without seeking advice from BP Group.

It is the user's obligation to evaluate and use this product safely and to comply with all applicable laws and regulations. The BP Group shall not be responsible for any damage or injury resulting from use, other than the stated product use of the material, from any failure to adhere to recommendations, or from any hazards inherent in the nature of the material. Purchasers of the product for supply to a third party for use at work, have a duty to take all necessary steps to ensure that any person handling or using the product is provided with the information in this sheet. Employers have a duty to tell employees and others who may be affected of any hazards described in this sheet and of any precautions that should be taken. You can contact the BP Group to ensure that this document is the most current available. Alteration of this document is strictly prohibited.



MARVEL OIL CO., INC.
2250 W. Pinehurst Blvd., STE 150
Addison, IL 60101

SAFETY DATA SHEET

1. Product and Company Identification

1.1 Product Identifier

Product Name: Marvel Air Tool Oil
Product Code (SKU): MM85R1 (50100), MM080R (50093) - See Section 15 for discontinued SKU's

1.2 Relevant Identified Uses Of The Substance

Product Use: Engine Oil Additive – Fuel additive (EPA Registered)

1.3 Details of the Supplier of the SDS

Company Name: Marvel Oil Company, Inc.
Street Address: 2250 W. Pinehurst Blvd., Suite 150
City, State, Zip Code: Addison, IL 60101

1.4 Emergency Telephone Numbers

Phone Number: 1(630)455-3700
Fax Number: 1(630)455-3868
Transportation: 1(800)424-9300 (CHEMTREC)
Medical Assistance: Call your local Poison Control Center

2. Hazard Identification:

2.1 Classification of the Substance or Mixture

Hazard Classification: Flammable liquid 3
Skin irritation 2
Reproductive Toxicity 2
Aspiration toxicity 1

2.2 Label Elements



Pictogram:

Signal Word: Danger

Hazard Statement: Flammable liquid and vapor. Causes skin irritation. Suspected of damaging fertility of the un-born child. May be fatal if swallowed and enters airways.

Precautionary Statement: Keep away from heat, sparks, open flames or hot surfaces. Do not smoke. Keep containers tightly closed. Ground all containers and receiving equipment. Use explosion proof electrical, ventilation, and lighting equipment. Use only non-sparking tools. Take precautionary measures against static

discharge. Wear protective gloves, clothing, eye glasses and face shield. Do not handle until all safety precautions have been read and understood. Wash hands thoroughly after handling. If exposed, get medical attention. If on skin or hair, remove immediately all contaminated clothing and launder before re-use. Wash skin with soap and water. If skin irritation occurs, get medical attention. If swallowed, immediately call a poison control center or doctor. Do NOT induce vomiting. Store in a well ventilated place. Dispose of contents and container in accordance with all local, state, national and international regulations.

2.3 Other Hazards

Description of additional HNOC: None

3. Information on Ingredients:

3.1 Substance not applicable

3.2 Mixture

| <u>Component</u> | <u>CAS Number</u> | <u>Concentration (wt%)</u> |
|---|-------------------|----------------------------|
| Petroleum Distillates (Hydrotreated Heavy Naphthenic) | 64742-52-5 | 60-100% |
| Petroleum Distillates (Stoddard Solvent) | 8052-41-3 | 10-30% |
| Tricresyl Phosphate | 1330-78-5 | 0.1-1.0% |
| Ortho Dichlorobenzene | 95-50-1 | 0.1-1.0% |
| Para Dichlorobenzene | 106-46-7 | <0.1% |

4. First Aid Measures:

4.1 Description of First Aid Measures

Inhalation: Remove to fresh air and promote deep breathing. Get medical attention if effects persist or you feel un-well.

Skin: In case of skin contact, wash thoroughly with soap and water. Remove contaminated clothing and footwear. Launder clothing before re-use. Call a physician if irritation develops or persists.

Eyes: In case of eye contact, immediately flush eyes with plenty of water. Remove contact lenses if worn. If irritation persists, get medical attention

Ingestion: If swallowed, do not induce vomiting. Never give anything by mouth to an unconscious person. Immediately call a poison control center or physician.

4.2 Most important symptoms and effects – acute and chronic

Inhalation: May cause respiratory tract irritation. Vapors may cause drowsiness or dizziness.

Skin: Cause skin irritation. Symptoms may include redness, edema, drying, defatting, and cracking of skin.

Eyes: May cause temporary eye irritation. Symptoms may include discomfort or pain, excess blinking and tearing, with redness and swelling.

Ingestion: May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea, and vomiting.

4.3 Indication of any immediate medical attention and special treatment

Symptoms may not appear immediately. Seek medical attention if effects develop or persist and you feel un-well.

5. Fire Fighting Measures:

5.1 Extinguishing media

Carbon dioxide, dry chemical, and alcohol foam

5.2 Special hazards arising from the substance or mixture

CO₂, CO, and hydrocarbons

5.3 Advice for Fire Fighters

Keep up wind of fire. Wear full firefighting turn out gear (full bunker gear) and respiratory protection (SCBA). Cool closed containers exposed to fire with water. See Section 8 for personal protection.

6. Accidental Release Measures:

6.1 Personal precautions, protective equipment, and emergency procedures

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Eliminate all source of ignition.

6.2 Methods and materials for containment and clean up

For containment: Contain and absorb spill with inert material. Place in suitable container for disposal. Do not flush to sewer or allow to enter waterways. See section 8 for PPE.

For clean up: Take up material and place in a suitable container. Vapors may be heavier than air and may travel along the ground to a distant source of ignition. Provide adequate ventilation.

7. Handling and Storage

7.1 Precautions for safe handling

Keep away from source of ignition. Do not smoke. Take precaution to eliminate static discharge. Avoid contact with skin and eyes. Avoid breathing vapor or mist. Do not swallow. Do not eat or drink while handling. Wash hands with soap and water after handling. Use only non-sparking tools.

7.2 Conditions for safe storage including incompatibilities

Keep out of reach of children. Store in a well ventilated place. Do not store above 49°C (120°F).

7.3 Specific end uses

Shelf Life: Shelf life is considered to be 7 – 10 years when properly stored.

8. Exposure Control/Personal Protection:

8.1 Control parameters

| <u>Exposure Limits</u> | <u>8 hr TWA:</u> | <u>(OSHA PEL)</u> | <u>(ACGIH TWA)</u> |
|---|------------------|-------------------|--------------------|
| Petroleum Distillates (Hydrotreated Heavy Naphthenic) | | not applicable | not applicable |
| Petroleum Distillates (Stoddard Solvent) | | 500 ppm | 100 ppm |
| Tricresyl Phosphate | | not applicable | not applicable |
| Ortho Dichlorobenzene | | 50 ppm | 25 ppm |
| Para Dichlorobenzene | | 75 ppm | 10 ppm |

8.2 Exposure controls

Use adequate ventilation to keep exposure below recommended limits. Ensure that eye wash station and safety shower are close to work station.

Hand Protection Equipment: Wear chemical resistant gloves to prevent skin contact.

Eye Protection Equipment: Wear safety glasses or splash goggles to prevent eye contact.

Skin and Body Protection: Wear suitable protective clothing.

Respiration/Ventilation Protection Requirements: Provide good ventilation.

Ingestion Protection Requirements: Do not eat, drink or smoke while handling. Wash hands with soap and water after handling. Launder all clothing and foot wear before re-use.

9. Physical And Chemical Properties:

9.1 Information of basic chemical and physical properties

| | |
|---|--|
| Physical Form: | thin liquid |
| Color: | clear red |
| Odor: | typical oily |
| Odor Threshold: | not available |
| pH: | not applicable – oil based product |
| Melting Point/Freeze Point: | -51°C (-60°F) |
| Initial Boiling Point: | not available |
| Flash Point (Seta Closed Cup): | 53°C (128°F) |
| Flammability Limits: | Explosive Limits: Upper: not available Lower: not available |
| Evaporation Rate: | not available |
| Flammability Solid/Gas: | not applicable |
| Vapor Pressure: | not available |
| Vapor Density: | not available |
| Specific Gravity: | 0.876 |
| Solubility in Water: | insoluble |
| Auto Ignition Temperature: | not available |
| Partition coefficient (n/octonol/water): | not available |
| Viscosity (Kinimatic @ 100°C): | 2.0 – 3.0 cSt |

9.2 Other information

| | |
|------------------------------------|--------|
| % NVM by Weight: | 75.0% |
| % VOC Content (California): | 24.92% |

10. Stability and Reactivity:

10.1 Reactivity

Does not react under normal conditions

10.2 Chemical stability

Stable

10.3 Possibility of hazardous reactions

Does not react under normal conditions

10.4 Conditions to avoid

Heat and incompatible materials

10.5 Incompatible materials

Strong oxidizers such as bleach and peroxides

10.6 Hazardous decomposition products

CO₂, CO and hydrocarbons

11. Toxicological Information:

11.1 Information on Toxicological effects

Marvel Mystery Oil

| | |
|-----------------------|-----------------|
| LD50 – Oral Rat | >2000 mg/Kg |
| LD50 – Dermal Rabbit | >2000 mg/Kg |
| LC50 – Inhalation Rat | >20 mg/L (4 hr) |

Petroleum Distillates Hydrotreated Heavy Naphthenic (64742-52-5)

| | |
|-----------------------|----------------|
| LD50 – Oral Rat | >5000 mg/Kg |
| LD50 – Dermal Rabbit | >5000 mg/Kg |
| LC50 – Inhalation Rat | >5 mg/L (4 hr) |

Tricresyl Phosphate (1330-78-5)

| | |
|-----------------|------------|
| LD50 – Oral Rat | 3000 mg/Kg |
|-----------------|------------|

o-Dichlorobenzene (95-50-1)

| | |
|-----------------------|------------------|
| LD50 – Oral Rat | 500 mg/Kg |
| LD50 – Dermal Rabbit | >10000 mg/Kg |
| LC50 – Inhalation Rat | 8.15 mg/L (4 hr) |

p-Dichlorobenzene (106-46-7)

| | |
|----------------------|-------------|
| LD50 – Oral Rat | >2000 mg/Kg |
| LD50 – Dermal Rabbit | >2000 mg/Kg |

Skin corrosion/irritation

Causes skin irritation

Serious eye damage/irritation

Based on available data, classification data are not met

Respiratory or skin sensitization

Based on available data, classification data are not met

Germ cell mutagenicity

Based on available data, classification data are not met

Carcinogenicity

Based on available data, classification data are not met

o-Dichlorobenzene (95-50-1)

IARC Group 3 – Not Classified

| | |
|--|--|
| p-dichlorobenzene (106-46-7) | IARC Group 2B – Possible carcinogen to humans. NTP 1-Evidence of Carcinogenicity 3, Reasonably anticipated to be a human Carcinogen |
| Reproductive toxicity | Suspected of damaging fertility of un-born child |
| Specific target organs – single exposure | Based on available data, classification data are not met |
| Specific target organs – repeated exposure | Based on available data, classification data are not met |
| Aspiration hazard | May be fatal if swallowed and enters air ways. |
| Symptoms/injuries after inhalation | May cause respiratory tract irritation. Vapors may cause drowsiness and dizziness. |
| Symptoms/injuries after skin contact | Cause skin irritation. Symptoms may include redness, edema, drying, defatting, and cracking of skin. |
| Symptoms/injuries after eye contact | May cause temporary eye irritation. Symptoms may include discomfort or pain, excess blinking and tearing, with redness and swelling. |
| Symptoms/injuries after ingestion | May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea, and vomiting. |

12. Ecological Information:

12.1 Toxicity

Not recommended for release into aquatic systems without treatment

12.2 Persistence and degradability

Not established

12.3 Bioaccumulative potential

Not established

12.4 Mobility in soil

Not established

12.5 Other adverse effects

None known

13. Disposal Considerations:

13.1 Waste treatment methods

RCRA Hazardous Waste:

Regulated as a hazardous waste (D-001 Ignitable).

Waste Disposal Method:

Dispose of in accordance with local, state and federal regulations

Waste Disposal Vessel:

Metal drums are recommended.

14. Transportation Information:

14.1 UN number

1268

14.2 UN Proper shipping name

Petroleum Distillate n.o.s.

14.3 Transport Hazard class

3

14.4 Packaging group

III

14.5 Marine Pollutant

No

14.6 Transportation in Bulk

Not applicable

14.7 Special precautions

Use limited quantities

15. Regulatory Information:

15.1 US Federal Regulations

TSCA Status: All ingredients are commercially available and listed by the manufacturer under TSCA.

15.2 Foreign Regulations

Canadian Status: All materials contained in this product are listed on the Canadian Domestic Substance List (DSL). Consult Turtle Wax, Inc. regarding status of ingredients.

European Union: All materials contained in this product are listed on EINECS.

AICS: All materials are registered for AICS (Australia)

15.3 State Regulations

State Regulatory Information:

The following chemicals are specifically listed by individual states; other product specific health and safety data in other sections of the SDS may also be applicable for state requirements. For details on your regulatory requirements, contact the appropriate agency in your state.

California Prop 65:

| <u>CAS Number</u> | <u>Concentration</u> | <u>State Code</u> |
|------------------------------|----------------------|-------------------|
| p-Dichlorobenzene (106-46-7) | <0.1% | Cancer |

15.4 HMIS & NFPA Classifications

| | | |
|----------------------|--------------|---|
| HMIS Classification: | Health | 2 |
| | Flammability | 2 |
| | Reactivity | 0 |

| | | |
|----------------------|--------------|---|
| NFPA Classification: | Health | 2 |
| | Flammability | 2 |

Reactivity 0

15.5 Discontinued SKU's All discontinued SKU's used this same formula.

MM080, MM085, MM85R, MM086, MM088R, MM089

16. Other Information:

| | |
|--------------------------|--|
| Reason For Issue | Address Update |
| Prepared By | James Heidel |
| Preparer's Title | Technical Director, R&D |
| SDS Administrator | Jean Mayszak - Technical Compliance Manager, R&D |
| Approval Date | January 26, 2017 |
| Supersedes Date | March 10, 2015 |
| Revision Number | #12 |

This information is, to the best of Turtle Wax, Inc.'s knowledge and belief, accurate and reliable. However, no representation, warranty, or guarantee is made to its accuracy, reliability or completeness. It is the user's responsibility to satisfy oneself as to the suitability and completeness of such information for their own particular use.

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

1 Identification

- **Product identifier**
- **Trade name:** Sheila Shine (Liquid)
- **Other means of identification:** No other identifiers
- **Recommended use and restriction on use**
- **Recommended use:** Polishing agent/ Burnishing compound
- **Restrictions on use:** No relevant information available.
- **Details of the supplier of the Safety Data Sheet**
- **Manufacturer/Supplier:**
Sheila Shine Inc.
7725 W 2nd Court
Hialeah, FL 33014
Phone: (305) 557-1729
- **Emergency telephone number:**
ChemTel Inc.
(800)255-3924 (North America)
+1 (813)248-0585 (International)

2 Hazard(s) identification

- **Classification of the substance or mixture**
Flam. Liq. 3 H226 Flammable liquid and vapor.
Skin Irrit. 2 H315 Causes skin irritation.
Eye Irrit. 2A H319 Causes serious eye irritation.
Carc. 1B H350 May cause cancer.
STOT RE 2 H373 May cause damage to the hearing organs through prolonged or repeated exposure.
Route of exposure: Oral, Inhalation.
Asp. Tox. 1 H304 May be fatal if swallowed and enters airways.

· Label elements

· GHS label elements

The product is classified and labeled according to the Globally Harmonized System (GHS).

· Hazard pictograms:



GHS02 GHS07 GHS08

- **Signal word:** Danger
- **Hazard statements:**
H226 Flammable liquid and vapor.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H350 May cause cancer.
H373 May cause damage to the hearing organs through prolonged or repeated exposure. Route of exposure: Oral, Inhalation.
H304 May be fatal if swallowed and enters airways.
- **Precautionary statements:**

(Cont'd. on page 2)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 1)

| | |
|----------------|--|
| P201 | Obtain special instructions before use. |
| P202 | Do not handle until all safety precautions have been read and understood. |
| P210 | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. |
| P233 | Keep container tightly closed. |
| P240 | Ground/bond container and receiving equipment. |
| P241 | Use explosion-proof electrical/ventilating/lighting/equipment. |
| P242 | Use only non-sparking tools. |
| P243 | Take precautionary measures against static discharge. |
| P264 | Wash thoroughly after handling. |
| P280 | Wear protective gloves/protective clothing/eye protection. |
| P301+P310 | If swallowed: Immediately call a poison center/doctor. |
| P331 | Do NOT induce vomiting. |
| P303+P361+P353 | If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P314 | Get medical advice/attention if you feel unwell. |
| P332+P313 | If skin irritation occurs: Get medical advice/attention. |
| P362+P364 | Take off contaminated clothing and wash it before reuse. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P370+P378 | In case of fire: Use foam, powder, or carbon dioxide for extinction. |
| P403+P235 | Store in a well-ventilated place. Keep cool. |
| P405 | Store locked up. |
| P501 | Dispose of contents/container in accordance with local/regional/national/international regulations. |

· **Other hazards** There are no other hazards not otherwise classified that have been identified.

3 Composition/information on ingredients

· **Chemical characterization: Mixtures**

· **Components:**

| | | |
|------------|--|--------|
| 64741-89-5 | Distillates (petroleum), solvent-refined light paraffinic ⚠ Carc. 1B, H350 | 30-60% |
| 127-18-4 | tetrachloroethylene ⚠ Carc. 2, H351 | 10-30% |
| 64741-88-4 | Distillates (petroleum), solvent-refined heavy paraffinic ⚠ Carc. 1B, H350 | 10-30% |
| 1330-20-7 | Xylene ⚠ Flam. Liq. 3, H226 ⚠ Asp. Tox. 1, H304 ⚠ Acute Tox. 4, H312; Acute Tox. 4, H332; Skin Irrit. 2, H315; Eye Irrit. 2A, H319; STOT SE 3, H335 | 7-13% |
| 100-41-4 | Ethylbenzene ⚠ Flam. Liq. 2, H225 ⚠ Carc. 2, H351; STOT RE 2, H373; Asp. Tox. 1, H304 ⚠ Acute Tox. 4, H332 | 1-5% |

· **Additional information:**

(Cont'd. on page 3)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 2)

For the wording of the listed Hazard Statements, refer to section 16.
For the listed ingredient(s), the identity and/or exact percentage(s) are being withheld as a trade secret.

4 First-aid measures

- **Description of first aid measures**

- **After inhalation:**

Supply fresh air; consult doctor in case of complaints.
Provide oxygen treatment if affected person has difficulty breathing.
In case of irregular breathing or respiratory arrest provide artificial respiration.
In case of unconsciousness place patient stably in side position for transportation.

- **After skin contact:**

Immediately wash with water and soap and rinse thoroughly.
Seek medical treatment in case of complaints.

- **After eye contact:**

Remove contact lenses if worn.
Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor.

- **After swallowing:**

Rinse out mouth and then drink plenty of water.
Do not induce vomiting; immediately call for medical help.
A person vomiting while lying on their back should be turned onto their side.

- **Most important symptoms and effects, both acute and delayed:**

Coughing
Dizziness
Breathing difficulty
Irritant to skin and mucous membranes.
Causes eye irritation.
Nausea
Gastric or intestinal disorders when ingested.
Disorientation

- **Danger:**

May be harmful if inhaled.
May be fatal if swallowed and enters airways.
Danger of impaired breathing.
Danger of disturbed cardiac rhythm.
Danger of convulsion.
Carcinogenic.
May cause damage to the hearing organs through prolonged or repeated exposure. Route of exposure:
Oral, Inhalation.

- **Indication of any immediate medical attention and special treatment needed:**

Medical supervision for at least 48 hours.
Later observation for pneumonia and pulmonary edema.
If necessary oxygen respiration treatment.
Monitor circulation.

5 Fire-fighting measures

- **Extinguishing media**

- **Suitable extinguishing agents:**

(Cont'd. on page 4)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 3)

Water fog / haze

Foam

Fire-extinguishing powder

Carbon dioxide

- **For safety reasons unsuitable extinguishing agents:** Water stream.

- **Special hazards arising from the substance or mixture**

During heating or in case of fire poisonous gases are produced.

- **Advice for firefighters**

- **Protective equipment:**

Wear self-contained respiratory protective device.

Wear fully protective suit.

- **Additional information:**

Eliminate all ignition sources if safe to do so.

Cool endangered containers with water fog.

6 Accidental release measures

- **Personal precautions, protective equipment and emergency procedures**

Use respiratory protective device against the effects of fumes/dust/aerosol.

Wear protective equipment. Keep unprotected persons away.

Ensure adequate ventilation.

Keep away from ignition sources.

Particular danger of slipping on leaked/spilled product.

- **Environmental precautions**

Do not allow to enter sewers/ surface or ground water.

Inform respective authorities in case of seepage into water course or sewage system.

- **Methods and material for containment and cleaning up**

Absorb with non-combustible liquid-binding material (sand, diatomite, acid binders, universal binders).

Remove from the water surface (e.g. skim or suck off).

Send for recovery or disposal in suitable receptacles.

- **Reference to other sections**

See Section 7 for information on safe handling.

See Section 8 for information on personal protection equipment.

See Section 13 for disposal information.

7 Handling and storage

- **Handling**

- **Precautions for safe handling:**

Keep away from heat and direct sunlight.

Avoid splashes or spray in enclosed areas.

Use only in well ventilated areas.

Rags, metal wools / cuttings / shavings and waste papers soaked with product must be placed in a sealed metal container rated for flammable waste.

- **Information about protection against explosions and fires:**

Emergency cooling must be available in case of nearby fire.

Keep ignition sources away - Do not smoke.

Prevent impact and friction.

(Cont'd. on page 5)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 4)

- **Conditions for safe storage, including any incompatibilities**
- **Requirements to be met by storerooms and receptacles:**
Avoid storage near extreme heat, ignition sources or open flame.
Store in cool, dry conditions in well sealed receptacles.
- **Information about storage in one common storage facility:**
Store away from foodstuffs.
Store away from oxidizing agents.
- **Specific end use(s)** No relevant information available.

8 Exposure controls/personal protection

· Control parameters

· Components with limit values that require monitoring at the workplace:

127-18-4 tetrachloroethylene

| | |
|---------------|---|
| PEL (USA) | Long-term value: 100 ppm Ceiling limit value: 200; 300* ppm *5-min peak in any 3 hrs |
| REL (USA) | Minimize workplace exp. concs.; Pocket Guide App. A |
| TLV (USA) | Short-term value: 685 mg/m ³ , 100 ppm Long-term value: 170 mg/m ³ , 25 ppm BEI |
| EL (Canada) | Short-term value: 100 ppm Long-term value: 25 ppm IARC 2A |
| EV (Canada) | Short-term value: 100 ppm Long-term value: 25 ppm |
| LMPE (Mexico) | Short-term value: 100 ppm Long-term value: 25 ppm A3, IBE |

1330-20-7 Xylene

| | |
|---------------|--|
| PEL (USA) | Long-term value: 435 mg/m ³ , 100 ppm |
| REL (USA) | Short-term value: 655 mg/m ³ , 150 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| TLV (USA) | Short-term value: 651 mg/m ³ , 150 ppm Long-term value: 434 mg/m ³ , 100 ppm BEI |
| EL (Canada) | Short-term value: 150 ppm Long-term value: 100 ppm |
| EV (Canada) | Short-term value: 650 mg/m ³ , 150 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| LMPE (Mexico) | Short-term value: 150 ppm Long-term value: 100 ppm A4, IBE |

100-41-4 Ethylbenzene

| | |
|-----------|--|
| PEL (USA) | Long-term value: 435 mg/m ³ , 100 ppm |
|-----------|--|

(Cont'd. on page 6)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 5)

| | |
|---------------|---|
| REL (USA) | Short-term value: 545 mg/m ³ , 125 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| TLV (USA) | Long-term value: 87 mg/m ³ , 20 ppm BEI |
| EL (Canada) | Long-term value: 20 ppm IARC 2B |
| EV (Canada) | Short-term value: 540 mg/m ³ , 125 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| LMPE (Mexico) | Long-term value: 20 ppm |

· **Ingredients with biological limit values:**

127-18-4 tetrachloroethylene

| | |
|-----------|--|
| BEI (USA) | 3 ppm Medium: end-exhaled air Time: prior to shift Parameter: Tetrachloroethylene |
| | 0.5 mg/L Medium: blood Time: prior to shift Parameter: Tetrachloroethylene |

1330-20-7 Xylene

| | |
|-----------|--|
| BEI (USA) | 1.5 g/g creatinine Medium: urine Time: end of shift Parameter: Methylhippuric acids |
|-----------|--|

100-41-4 Ethylbenzene

| | |
|-----------|---|
| BEI (USA) | 0.7 g/g creatinine Medium: urine Time: end of shift at end of workweek Parameter: Sum of mandelic acid and phenylglyoxylic acid (nonspecific, semi-quantitative) |
| | - Medium: end-exhaled air Time: not critical Parameter: Ethyl benzene (semi-quantitative) |

· **Exposure controls**

· **General protective and hygienic measures:**

- The usual precautionary measures for handling chemicals should be followed.
- Keep away from foodstuffs, beverages and feed.
- Wash hands before breaks and at the end of work.
- Avoid contact with the eyes and skin.
- Do not inhale gases / fumes / aerosols.
- Do not carry product impregnated cleaning cloths in trouser pockets.

· **Engineering controls:** No relevant information available.

· **Breathing equipment:**

- Use suitable respiratory protective device in case of insufficient ventilation.
- Use suitable respiratory protective device when aerosol or mist is formed.
- For spills, respiratory protection may be advisable.

(Cont'd. on page 7)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 6)

NIOSH or EN approved organic vapor respirator equipped with a dust/mist prefilter should be used.

· **Protection of hands:**



Protective gloves

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.

· **Eye protection:**



Safety glasses

· **Body protection:** Protective work clothing

· **Limitation and supervision of exposure into the environment**

No relevant information available.

· **Risk management measures** No relevant information available.

9 Physical and chemical properties

· **Information on basic physical and chemical properties**

· **Appearance:**

Form: Liquid

Color: Clear

· **Odor:** Pleasant

· **Odor threshold:** Not determined.

· **pH-value:** Not determined.

· **Melting point/Melting range:** Not determined.

· **Boiling point/Boiling range:** 112 °C (233.6 °F)

· **Flash point:** 56 °C (132.8 °F) (TOC)

· **Flammability (solid, gaseous):** Not applicable.

· **Auto-ignition temperature:** Not determined.

· **Decomposition temperature:** Not determined.

· **Danger of explosion:** Product is not explosive. However, formation of explosive air/vapor mixtures are possible.

· **Explosion limits**

Lower: ~1.1 Vol %

Upper: ~7.0 Vol %

· **Oxidizing properties:** Non-oxidizing.

· **Vapor pressure at 20 °C (68 °F):** 10 mmHg

· **Density:**

Relative density at 20 °C (68 °F): 0.964 g/cm³ (8.04 lbs/gal)

Vapor density at 20 °C (68 °F): > 1 (air = 1)

Evaporation rate at 20 °C (68 °F): < 1 (butyl acetate = 1)

(Cont'd. on page 8)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 7)

- **Solubility in / Miscibility with Water:** Not miscible or difficult to mix.
- **Partition coefficient (n-octanol/water):** Not determined.
- **Viscosity**
 - Dynamic:** Not determined.
 - Kinematic at 40 °C (104 °F):** <20.5 mm²/s
- **Other information** No relevant information available.

10 Stability and reactivity

- **Reactivity:** No relevant information available.
- **Chemical stability:**
- **Thermal decomposition / conditions to be avoided:**
No decomposition if used and stored according to specifications.
- **Possibility of hazardous reactions**
Develops readily flammable gases / fumes.
Can form explosive mixtures in air if heated above flash point and/or when sprayed or atomized.
Used empty containers may contain product gases which form explosive mixtures with air.
Toxic fumes may be released if heated above the decomposition point.
Reacts with strong acids and oxidizing agents.
Reacts with certain metals.
- **Conditions to avoid** Excessive heat.
- **Incompatible materials** No relevant information available.
- **Hazardous decomposition products**
Carbon monoxide and carbon dioxide
Hydrocarbons
Chlorine compounds

11 Toxicological information

- **Information on toxicological effects**
- **Acute toxicity:** Based on available data, the classification criteria are not met.

· LD/LC50 values that are relevant for classification:

127-18-4 tetrachloroethylene

| | | |
|------|------|------------------|
| Oral | LD50 | 2629 mg/kg (rat) |
|------|------|------------------|

1330-20-7 Xylene

| | | |
|--------|------|---------------------|
| Oral | LD50 | 4300 mg/kg (rat) |
| Dermal | LD50 | 2000 mg/kg (rabbit) |

100-41-4 Ethylbenzene

| | | |
|--------|------|----------------------|
| Oral | LD50 | 3500 mg/kg (rat) |
| Dermal | LD50 | 17800 mg/kg (rabbit) |

- **Primary irritant effect:**
- **On the skin:** Irritant to skin and mucous membranes.

(Cont'd. on page 9)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 8)

- **On the eye:** Causes eye irritation.
- **Sensitization:** Based on available data, the classification criteria are not met.

· **IARC (International Agency for Research on Cancer):**

| | | |
|----------|---------------------|----|
| 127-18-4 | tetrachloroethylene | 2A |
| 100-41-4 | Ethylbenzene | 2B |

· **NTP (National Toxicology Program):**

| | | |
|----------|---------------------|---|
| 127-18-4 | tetrachloroethylene | R |
|----------|---------------------|---|

· **OSHA-Ca (Occupational Safety & Health Administration):**

None of the ingredients are listed.

· **Probable route(s) of exposure:**

Ingestion.
Inhalation.
Eye contact.
Skin contact.

- **Germ cell mutagenicity:** Based on available data, the classification criteria are not met.
- **Carcinogenicity:** May cause cancer.
- **Reproductive toxicity:** Based on available data, the classification criteria are not met.
- **STOT-single exposure:** Based on available data, the classification criteria are not met.
- **STOT-repeated exposure:**
May cause damage to the hearing organs through prolonged or repeated exposure. Route of exposure: Oral, Inhalation.
- **Aspiration hazard:** May be fatal if swallowed and enters airways.

12 Ecological information

- **Toxicity**
- **Aquatic toxicity**
Toxic to aquatic life with long lasting effects.

127-18-4 tetrachloroethylene

LC50 | 4.99 mg/l (Oncorhynchus mykiss)

1330-20-7 Xylene

LC50 | 13.4 mg/l (pimephales promelas)

100-41-4 Ethylbenzene

EC50 | 1-10 mg/kg (daphnia)

LC50 | 1-10 mg/l (Green Algae (chlorophyta))

4.2 mg/l (Oncorhynchus mykiss)

- **Persistence and degradability** The product is partially biodegradable. Significant residuals remain.
- **Bioaccumulative potential:** No relevant information available.
- **Mobility in soil:** No relevant information available.
- **Additional ecological information**
- **General notes:**
Due to available data on eliminability/decomposition and bioaccumulation potential prolonged term damage of the environment can not be excluded.
Do not allow product to reach ground water, water course or sewage system.
- **Other adverse effects** No relevant information available.

(Cont'd. on page 10)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 9)

13 Disposal considerations

- **Waste treatment methods**

- **Recommendation:**

The user of this material has the responsibility to dispose of unused material, residues and containers in compliance with all relevant local, state and federal laws and regulations regarding treatment, storage and disposal for hazardous and nonhazardous wastes.

- **Uncleaned packagings**

- **Recommendation:** Disposal must be made according to official regulations.

14 Transport information

- **UN-Number**

- **DOT, ADR/RID/ADN, IMDG, IATA** UN1992

- **UN proper shipping name**

- **DOT** Flammable liquids, toxic, n.o.s. (Ethylbenzene, Tetrachloroethylene)
- **ADR/RID/ADN, IMDG** FLAMMABLE LIQUID, TOXIC, N.O.S. (ETHYLBENZENE, TETRACHLOROETHYLENE)
- **IATA** Flammable liquid, toxic, n.o.s. (Ethylbenzene, Tetrachloroethylene)

- **Transport hazard class(es)**

- **DOT**



- **Class** 3

- **Label** 3, 6.1

- **ADR/RID/ADN**



- **Class** 3 (FT1)

- **Label** 3, 6.1

- **IMDG**



- **Class** 3

- **Label** 3/6.1

(Cont'd. on page 11)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 10)

· IATA



· Class 3
· Label 3 (6.1)

· Packing group III
· DOT, ADR/RID/ADN, IMDG, IATA

· Environmental hazards Product contains environmentally hazardous substances: tetrachloroethylene

· Marine pollutant:



Yes

· Special precautions for user Warning: Flammable liquids
· Danger code (Kemler): 36
· EMS Number: F-E,S-D
· Segregation groups Liquid halogenated hydrocarbons

· Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code Not applicable.

· Transport/Additional information:

· DOT



Limited Quantity for packages less than 30 kg gross and inner packagings less than 5 L each.

Labeling as a Marine Pollutant is only required for bulk single package shipments. Bulk packaging consists of a maximum capacity of greater than 450 L (119 gallons) for a liquid and a maximum net mass greater than 400 kg (882 pounds) for a solid. (See 171.4(c))

· ADR/RID/ADN



Limited Quantity for packages less than 30 kg gross and inner packagings less than 5 L each.

Marine pollutants packaged in single or combination packagings containing a net quantity per single or inner packaging of 5 L or less for liquids or having a net mass per single or inner packaging of 5 kg or less for solids are not subject to provisions relevant to marine pollutants. (See 5.2.1.8.1)

· IMDG



Limited Quantity for packages less than 30 kg gross and inner packagings less than 5 L each.

(Cont'd. on page 12)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 11)

Marine pollutants packaged in single or combination packagings containing a net quantity per single or inner packaging of 5 L or less for liquids or having a net mass per single or inner packaging of 5 kg or less for solids are not subject to provisions relevant to marine pollutants. (See 2.10.2.7)

· IATA



Limited Quantity for packages less than 30 kg gross and inner packagings less than 1 L each / 2 L net.

15 Regulatory information

- **Safety, health and environmental regulations/legislation specific for the substance or mixture**
- **United States (USA)**
- **SARA**

· **Section 302 (extremely hazardous substances):**

None of the ingredients are listed.

· **Section 355 (extremely hazardous substances):**

None of the ingredients are listed.

· **Section 313 (Specific toxic chemical listings):**

| | |
|----------|---------------------|
| 127-18-4 | tetrachloroethylene |
|----------|---------------------|

| | |
|-----------|--------|
| 1330-20-7 | Xylene |
|-----------|--------|

| | |
|----------|--------------|
| 100-41-4 | Ethylbenzene |
|----------|--------------|

· **TSCA (Toxic Substances Control Act)**

All ingredients are listed or exempt.

· **Proposition 65 (California)**

· **Chemicals known to cause cancer:**

| | |
|----------|---------------------|
| 127-18-4 | tetrachloroethylene |
|----------|---------------------|

| | |
|----------|--------------|
| 100-41-4 | Ethylbenzene |
|----------|--------------|

· **Chemicals known to cause developmental toxicity for females:**

None of the ingredients are listed.

· **Chemicals known to cause developmental toxicity for males:**

None of the ingredients are listed.

· **Chemicals known to cause developmental toxicity:**

None of the ingredients are listed.

· **EPA (Environmental Protection Agency):**

| | | |
|----------|---------------------|---|
| 127-18-4 | tetrachloroethylene | L |
|----------|---------------------|---|

| | | |
|-----------|--------|---|
| 1330-20-7 | Xylene | I |
|-----------|--------|---|

| | | |
|----------|--------------|---|
| 100-41-4 | Ethylbenzene | D |
|----------|--------------|---|

· **IARC (International Agency for Research on Cancer):**

(Cont'd. on page 13)

Safety Data Sheet

according to OSHA HCS (29CFR 1910.1200) and WHMIS 2015 Regulations

Revision: October 10, 2019

Trade name: Sheila Shine (Liquid)

(Cont'd. of page 12)

| | | |
|----------|---------------------|----|
| 127-18-4 | tetrachloroethylene | 2A |
| 100-41-4 | Ethylbenzene | 2B |

Canadian Domestic Substances List (DSL):

All ingredients are listed or exempt.

16 Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

Abbreviations and acronyms:

ADR: European Agreement concerning the International Carriage of Dangerous Goods by Road

IMDG: International Maritime Code for Dangerous Goods

DOT: US Department of Transportation

IATA: International Air Transport Association

CAS: Chemical Abstracts Service (division of the American Chemical Society)

LC50: Lethal concentration, 50 percent

LD50: Lethal dose, 50 percent

OSHA: Occupational Safety & Health Administration

Flam. Liq. 2: Flammable liquids – Category 2

Flam. Liq. 3: Flammable liquids – Category 3

Acute Tox. 4: Acute toxicity – Category 4

Skin Irrit. 2: Skin corrosion/irritation – Category 2

Eye Irrit. 2A: Serious eye damage/eye irritation – Category 2A

Carc. 1B: Carcinogenicity – Category 1B

Carc. 2: Carcinogenicity – Category 2

STOT SE 3: Specific target organ toxicity (single exposure) – Category 3

STOT RE 2: Specific target organ toxicity (repeated exposure) – Category 2

Asp. Tox. 1: Aspiration hazard – Category 1

Sources

Website, European Chemicals Agency (echa.europa.eu)

Website, US EPA Substance Registry Services (ofmpub.epa.gov/sorinternet/registry/substreg/home/overview/home.do)

Website, Chemical Abstracts Registry, American Chemical Society (www.cas.org)

Patty's Industrial Hygiene, 6th ed., Rose, Vernon, ed. ISBN: 978-0-470-07488-6

Casarett and Doull's Toxicology: The Basic Science of Poisons, 8th Ed., Klaasen, Curtis D., ed., ISBN: 978-0-07-176923-5.

Safety Data Sheets, Individual Manufacturers

SDS Prepared by:

ChemTel Inc.

1305 North Florida Avenue

Tampa, Florida USA 33602-2902

Toll Free North America 1-888-255-3924 Intl. +01 813-248-0573

Website: www.chemtelinc.com

SAFETY DATA SHEET



Version 16.1 replaces Version 15.1
Revision date: 01.04.2016
According to (EU) No. 2015/830

SECTION 1

IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY / UNDERTAKING

- 1.1 Product identifier:** SPOTCHECK® SKC-S - aerosol
- 1.2 Relevant identified uses of the mixture and uses advised against:**
Relevant identified uses: Solvent cleaner used in penetrant inspection.
Uses advised against: This product is not recommended for any use other than the identified uses above.
- 1.3 Details of the supplier of the safety data sheet**
Manufacturer: Magnaflux® (A Division of ITW Ltd)
Address: Faraday Road, South Dorcan Industrial Estate, Swindon, UK
Postcode: SN3 5HE
Telephone/fax number: Telephone: +44 (0)1793 524566
Fax: +44 (0)1793 490459
Web: www.eu.magnaflux.com
Email address of competent person responsible for SDS: datasheets@magnaflux.co.uk
National contact: None appointed.
- 1.4 Emergency telephone number:** T: +44 (0)1793 524566 (office hours)
Opening hours: Office hours (GMT) Monday - Thursday 8am - 5pm, Friday 8am - 4pm
Other comments: Emergency telephone service is provided in English only.

SECTION 2

HAZARDS IDENTIFICATION

- 2.1 Classification of the substance or mixture:**
Classification according to Regulation (EC) No 1272/2008 (CLP): **Physical and Chemical Hazard:** Aerosol 1 H222, H229
Health Hazard: Skin Irrit. 2 H315
STOT SE 3 H336
Environmental Hazard: Aquatic Chronic 2 H411
Additional information: No other information.

For full text of hazard statements and EU hazard statements see SECTION 16.

- 2.2 Label Elements:**
Labelling according to regulation (EC) No 1272/2008 [CLP]



Signal Word: DANGER

SAFETY DATA SHEET

Hazard Statement(s):

H222: Extremely flammable aerosol.
 H229: Pressurised container: may burst if heated.
 H315: Causes skin irritation
 H336: May cause drowsiness or dizziness
 H411: Toxic to aquatic life with long lasting effects

Precautionary Statement(s):

P210: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
 P211: Do not spray on an open flame or other ignition source.
 P251 Do not pierce or burn even after use.
 P410 + P412: Protect from sunlight. Do not expose to temperatures exceeding 50 °C.
 P261: Avoid breathing dust/fume/gas/mist/vapours/spray.
 P280: Wear protective gloves/protective clothing/eye protection/face protection.
 P501: Dispose of contents/container to hazardous waste or special collection point.
 P271: Use only outdoors or in a well ventilated area.
 P302+352: IF ON SKIN: Wash with soap and water
 P264: Wash thoroughly after handling.
 P362+P364: Take off contaminated clothing and wash it before reuse.

Supplementary Precautionary Statement(s):

None

Supplementary Hazard Information (EU)

Hazard Determining Component(s)

Hydrocarbons, C7 – C9, isoalkanes

2.3

Other hazards:

Pressurised container: protect from sunlight and do not expose to temperatures exceeding 50 °C. Vapours can form explosive mixtures with air.

SECTION 3

COMPOSITION / INFORMATION ON INGREDIENTS

3.2 Mixtures

| Ingredient Name | CAS No | EC No | REACH Registration Number | % Weight | Classification according to Regulation (EC) No 1272/2008 [CLP] | Additional information |
|---|------------|-----------|---------------------------|----------|--|------------------------|
| Hydrocarbons, C7- C9, isoalkanes | | 921-728-3 | 01-2119471305-42 | 60 -100 | Flam. Liq 2: H225 Skin Irrit. 2: H315 STOT SE3: H336 Asp. Tox. 1: H304 (note1) Aquatic Chronic 2: H411 | No other information |
| Hydrocarbons, C3-4-rich petroleum distillate petroleum gas (1,3 butadiene < 0.1%) | 68512-91-4 | 270-990-9 | (note2) | 10-30 | Press. Gas H280 Flam. Gas 1 H220 | (note3) |
| 1. Mixtures classified as Asp. Tox. 1 H304 need not be labelled when placed on the market in aerosol containers or in containers fitted with a sealed spray attachment. 2. Exempted from the obligation to register in accordance with art.2(7)(a) of REACH Regulation No 1907/2006 3. Not classified as carcinogen, less than 0.1% w/w 1,3 butadiene (EINECS no 203-450-8) | | | | | | |

Note: Hazard statement(s) in this section apply only to raw materials, not necessarily to finished products.

*See Section 16 for hazard statement(s) text in full.

SAFETY DATA SHEET

SECTION 4

FIRST AID MEASURES

- 4.1 Description of first aid measures:**
- General notes:** If symptoms persist, seek medical attention. Show this safety data sheet to the doctor in attendance.
- Following inhalation:** Remove to fresh air. Keep at rest. If not breathing give artificial respiration. Seek prompt medical attention if discomfort persists.
- Following skin contact:** Flush with water, use soap if available. Contaminated clothing should be washed before re-use. Seek medical attention if irritation persists.
- Following eye contact:** Flush eyes with large amounts of water for at least 15 minutes with eyelids held open. Seek medical attention if irritation persists.
- Following ingestion:** Unlikely route of exposure. Rinse mouth with water. Do NOT induce vomiting. If vomiting occurs, keep head low so that stomach contents don't enter the lungs. Never give anything by mouth to an unconscious person. Seek medical attention immediately.
- Self-protection of the first aider:** No action shall be taken involving any personal risk or without suitable training. If it is suspected that the mixture is still present, wear appropriate personal protective equipment.
- 4.2 Most important symptoms, both acute and delayed:**
Prolonged skin contact may cause redness and irritation.
In high concentrations, vapours are anaesthetic and may cause headache, fatigue, dizziness and central nervous system effects.
Fumes from the stomach contents may be inhaled resulting in the same symptoms as inhalation. Avoid vomiting and normal rinse of stomach because of risk of aspiration. May cause discomfort to the eyes. Symptoms: redness and pain.
- 4.3 Indication of any immediate medical attention and special treatment needed:**
None known.

SECTION 5

FIREFIGHTING MEASURES

- 5.1 Extinguishing media:**
Suitable extinguishing media: Carbon dioxide, foam, dry chemical, water fog or spray.
- 5.2 Unsuitable extinguishing media:** Do not use water jet.
Special hazards arising from the substance or mixture: Evacuate immediate area. Shut off 'fuel' to fire. If possible keep unaffected containers cool with water spray.
Aerosols may explode in a fire.
Aerosol contents are extremely flammable.
Hazardous combustion products: Smoke, soot and oxides of carbon. Burning vapour may give off toxic fumes.
- 5.3 Advice for fire-fighter:**
Warn firefighters that aerosols are involved. Self contained breathing apparatus and full protective clothing must be worn. Water spray should be used to cool containers. Contaminated extinguishing water must be disposed of in accordance with official regulations.

SAFETY DATA SHEET

SECTION 6

ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures:**
Suitable protective equipment (see Section 8) should be worn to prevent any contamination of skin, eyes and personal clothing.
- For non-emergency personnel:** Remove ignition sources. Avoid breathing vapours, mist or gas.
- For emergency responders:** Remove ignition sources. Avoid breathing vapours, mist or gas. Keep unnecessary people at a safe distance.
- 6.2 Environmental precautions:**
Prevent liquid from entering drains, sewers and watercourses. Notify the Environment Agency or water authorities if a major spillage occurs.
- 6.3 Methods and material for containment and cleaning up:**
Eliminate sources of ignition. Take measures to prevent the build-up of electrostatic charge.
Avoid breathing vapours. Ventilate surrounding area.
- For containment:** Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite). Place in a UN approved container for disposal.
Large spills should be pumped (using an earthed explosion proof pump) into UN approved containers pending disposal. Dispose of waste according to local/national regulations.
- For cleaning up:** Do not flush away residues with water.
- Other information:** No other information.
- 6.4 Reference to other sections:**
For Personal Protective Equipment see Section 8. For disposal information see Section 13.

SECTION 7

HANDLING & STORAGE

- 7.1 Precautions for safer handling:**
- Protective Measures:** Wear suitable protective clothing such as chemical resistant gloves, apron and goggles/face mask to protect from splashes. Ensure adequate exhaust ventilation when in use.
Avoid contact with skin and eyes. Do not breathe product spray or mist. Risk of vapour concentration in low areas.
- Measures to prevent fire:** Aerosol contents are highly flammable and volatile. Keep away from sources of ignition – no smoking.
Take measures to prevent the build-up of electrostatic charge.
Equipment should be earthed. Use explosion proof electrical/ventilating/lighting equipment. Use only non-sparking tools.
- Advice on general occupational hygiene:** Wash thoroughly after handling.

SAFETY DATA SHEET

| | | |
|-----|--|--|
| 7.2 | Conditions for safe storage, including any incompatibilities: Technical measures and storage conditions: Packaging materials: | Store in a cool dry area away from heat and sources of ignition. Store in original container. |
| | Requirements for storage rooms and vessels: | Pressurised container: protect from sunlight and do not expose to temperatures exceeding 50 °C. Recommended storage temperature 10 °C to 30 °C. |
| | Further information on storage conditions: | Rotate stock and check regularly for damaged items. |
| 7.3 | Specific end use(s): Recommendations: | Use only for Non Destructive Testing (NDT) applications. |
| | Industrial sector specific solutions: | See product data sheet for further information. |

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

- 8.1 **Control parameters:**
Occupational exposure limit values:
 Occupational exposure figures have been set for some of the components of this preparation based on GESTIS International Limit Values or manufacturers' recommendation.

| Ingredient name | Country | Limit value - 8 hours | | Limit value - short term | |
|-----------------------------------|---------|-----------------------|--------------------|--------------------------|--------------------|
| | | ppm | mg /m ³ | ppm | mg /m ³ |
| Hydrocarbons, C7 – C9, isoalkanes | UK | 241 | 1200 | | |

Data obtained from GESTIS International Limit Values, EH40, supplier's SDS

Note: Where no specific short-term exposure limit is listed, a figure three times the long-term exposure limit should be used.

Derived No Effect Level (DNEL) - Hydrocarbons, C7 – C9, isoalkanes

| End User | Exposure Route | Exposure Time | Effects | DNEL |
|----------|----------------|---------------|----------|------------------------|
| Worker | Inhalation | Long term | Systemic | 2035 mg/m ³ |
| Worker | Dermal | Long term | Systemic | 773 mg/kg bw/day |

Note: The Derived No Effect Level (DNEL) is an estimated safe level of exposure that is derived from toxicity data in accordance with specific guidance within the European REACH regulation. The DNEL may differ from an Occupational Exposure Limit (OEL) for the same chemical. OELs may be recommended by an individual company, a government regulatory body or an expert organization, such as the Scientific Committee for Occupational Exposure Limits (SCOEL) or the American Conference of Governmental Industrial Hygienists (ACGIH). OELs are considered to be safe exposure levels for a typical worker in an occupational setting for an 8-hour work shift, 40 hour work week, as a time weighted average (TWA) or a 15 minute short-term exposure limit (STEL). While also considered to be protective of health, OELs are derived by a process different from that of REACH.

Predicted No Effect Concentration (PNEC) - Hydrocarbons, C7 – C9, isoalkanes

| | |
|------------------------------|---|
| Water - Fresh Water | No data available: testing technically not feasible |
| Water - Marine Water | No data available: testing technically not feasible |
| Water - Intermittent release | No data available: testing technically not feasible |
| Sediment - Fresh water | No data available: testing technically not feasible |
| Sediment - Marine water | No data available: testing technically not feasible |
| Soil | No data available: testing technically not feasible |
| Sewage Treatment plant | No data available: testing technically not feasible |

SAFETY DATA SHEET

8.2 Exposure controls:

Concentrations of product vapours and mists in the working atmosphere must be kept as low as is reasonably practicable. Exposure should be minimised by the use of appropriate containment, engineering control and ventilation measures. Where this is not possible, personal protective equipment should be worn as indicated below where appropriate.

Appropriate engineering controls:

Provide adequate ventilation, including appropriate local extraction, to ensure that the defined occupational exposure limits are not exceeded

Personal protection equipment:

Eye and face protection:

Safety glasses with side-shields conforming to EN166.

Skin protection - hand:

Protective gloves conforming to EN374-3. Use chemical resistant gloves recommended by glove manufacturer as being suitable for **isoparaffins**, if hand exposure is unavoidable. Protective gloves made of **nitrile rubber** are suitable, although other types may be more suitable in other circumstances. For prolonged exposure, recommended gloves with protective index 6, > 480 minutes permeation time according to EN374.

Skin protection – other:

Consult the glove manufacturer for exact breakthrough time. Glove manufacturer's directions for use should be observed. Wear impervious, flame retardant antistatic protective clothing. The type of protective equipment must be selected according to the concentration and amount of dangerous substance at the specific workplace.

Respiratory protection:

In case of insufficient ventilation, wear suitable respiratory equipment. Filter type A. (EN 136, 140, 405, 149, 143) For higher level protection use type ABEK-P3 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under CEN standards.

Thermal hazards:

Not applicable.

Environmental exposure controls:

Avoid any release to the environment.

SECTION 9

PHYSICAL & CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties:

Appearance:

Aerosol containing mobile clear liquid.

Odour:

Mild hydrocarbon.

Odour threshold:

No data available.

pH:

Neutral.

Melting point/freezing point:

No data available.

Initial boiling point and boiling range:

113 – 143 °C.

Flash point (PMCC):

-40 °C (aerosol propellant).

Evaporation rate (BuAc = 100):

155.

Flammability (solid, gas) (Limits in air):

No data available.

Upper/lower flammability or explosive limits:

0.7 – 6.0% (Vol%)

SAFETY DATA SHEET

| | |
|---|---|
| Vapour pressure: | 1.627 kPa @ 20 °C. |
| Vapour density (Air = 1): | > 1. |
| Relative density: | 0.72 g/cm ³ . |
| Solubility: | Insoluble. |
| Partition coefficient: n-octanol/water: | No data available. |
| Auto-ignition temperature: | > 200 °C. |
| Decomposition temperature: | No data available. |
| Viscosity (ASTM D445): | 0.86 mm ² /s @ 25 °C. |
| Explosive properties: | Under normal conditions no danger of explosion. |
| Oxidising properties: | No data available. |

Note: properties relate to the bulk product only unless otherwise stated.

9.2 Other information:
No other information.

SECTION 10 STABILITY & REACTIVITY

| | | |
|------|-------------------------------------|--|
| 10.1 | Reactivity: | No specific reactivity hazards associated with this product. |
| 10.2 | Chemical stability | Stable under normal conditions of use and applications. |
| 10.3 | Possibility of hazardous reactions: | No data available. |
| 10.4 | Conditions to avoid: | Keep away from sources of ignition, hot surfaces and direct sun light. |
| 10.5 | Incompatible materials: | Strong oxidising agents. |
| 10.6 | Hazardous decomposition materials: | None under normal conditions of use. Smoke, soot and oxides of carbon on combustion. |

SECTION 11 TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects: based on data for component materials.

| | |
|--------------------------------|---|
| Acute toxicity - oral: | Based on the available data, the classification criteria are not met. |
| Acute toxicity – dermal: | Based on the available data, the classification criteria are not met. |
| Acute toxicity – inhalation: | Based on the available data, the classification criteria are not met. |
| Skin corrosion/irritation: | Skin Irrit. 2 H315: Causes skin irritation. |
| Serious eye damage/irritation: | Based on the available data, the classification criteria are not met. |
| Respiratory sensitisation: | Data lacking. |
| Skin sensitisation: | Based on the available data, the classification criteria are not met. |
| Germ cell mutagenicity: | Based on the available data, the classification criteria are not met. |
| Carcinogenicity: | Data lacking. |
| Reproductive toxicity: | Based on the available data, the classification criteria are not met. |

SAFETY DATA SHEET

STOT single exposure: STOT Single Exp. 3 H336: May cause drowsiness or dizziness.
Affected organs: central nervous system
Route of exposure: inhalation

STOT repeated exposure: Based on the available data, the classification criteria are not met.

Aspiration hazard: Mixtures from Aerosol Dispensers - need not be classified as Asp. Tox. 1 - H304 as the aerosol spray is fine and a pool of product may not be formed in the mouth.

Information on likely Routes of Exposure and Potential Health Effects:

Inhalation: Vapour concentrations above the recommended exposure levels are irritating to the eyes and respiratory tract, may cause headaches and dizziness, are anaesthetic and may have other central nervous system effects.

Ingestion: Not a likely route of exposure. However, harmful: May cause lung damage if swallowed. Ingestion may cause irritation of the mouth, throat and digestive tract. Small amounts of product aspirated into the respiratory system during ingestion or from vomiting may cause bronchopneumonia or pulmonary edema.

Eye contact: May cause redness and pain.

Skin contact: Frequent or prolonged contact with the product may produce irritation and/or skin dryness and cracking. Product will have a de-fatting effect on the skin.

Toxicity Test Results: based on data for component materials, where available.

Hydrocarbons, C7 – C9, isoalkanes

| | | |
|-----------------------------|---------------|-----------------------|
| Acute Toxicity – oral | LD50 (rat) | > 5000 mg/kg |
| Acute Toxicity – dermal | LD50 (rabbit) | > 2000 mg/kg |
| Acute Toxicity – inhalation | LC50 (rat) | 21 mg/l (4 h; vapour) |

Other Information: No other information.

SECTION 12 ECOLOGICAL INFORMATION

Based on data for component materials

12.1 Toxicity:

Hydrocarbons, C7 – C9, isoalkanes

| | | | | |
|-----------------------|---------------------------------|------|-----|-----------|
| Fish | Oncorhynchus mykiss | LL50 | 96h | 18.4 mg/l |
| Aquatic Invertebrates | Daphnia magna | EL50 | 48h | 2.4 mg/l |
| Aquatic Plants | Pseudokirchneriella subcapitata | EL50 | 72h | 29 mg/l |

12.2 Persistence and degradability: Hydrocarbons, C7 – C9, isoalkanes - Biodegradable.

12.3 Bioaccumulative potential: No data available.

Partition coefficient: n-octanol/water (log Kow): No data available.

Bioconcentration factor (BCF): No data available.

SAFETY DATA SHEET

| | | |
|------|--|--|
| 12.4 | Mobility in soil: | The product is immiscible with water and will spread on the water surface. Product is highly volatile - will partition rapidly to air. |
| 12.5 | Results of PBT and vPvB assessment: | This mixture does not contain any substances that are assessed to be a PBT or vPvB. |
| 12.6 | Other adverse effects: | No data available. |

SECTION 13 DISPOSAL CONSIDERATIONS

| | | |
|------|---|--|
| 13.1 | Waste treatment methods: | Dispose of waste and residues in accordance with local authority requirements. Seek the advice of an approved waste disposal contractor for disposal at a licensed facility in accordance with national legislation. |
| | Product/packing disposal: | Empty containers may contain residual product and flammable vapours. Do not pierce or burn container, even after use. Do NOT remove labels. Keep away from sources of ignition. |
| | Waste codes/waste designations according to LoW: | 16 05 04* gases in pressure containers containing dangerous substances. |

NOTE: Waste codes are assigned based upon the most common uses for this material and may not reflect contaminants resulting from actual use. Waste producers need to assess the actual process used when generating the waste and its contaminants in order to assign the proper waste code(s).

| | |
|--|---|
| Waste treatment – relevant information: | Dispose of waste and residues in accordance with local authority requirements. Seek the advice of an approved waste disposal contractor for disposal at a licensed facility in accordance with national legislation |
| Sewage disposal – relevant information: | Do not empty down the drain. |
| Other disposal recommendations: | Use a licensed waste contractor |

SECTION 14 TRANSPORT INFORMATION

| | | |
|------|------------------------------------|--|
| 14.1 | UN number: | ADR/RID: UN1950 IMDG: UN1950 IATA: UN1950 |
| 14.2 | UN proper shipping name: | ADR/RID: AEROSOLS, flammable IMDG: AEROSOLS, flammable IATA: AEROSOLS, flammable |
| 14.3 | Transport hazard class(es): | ADR/RID: 2.1 IMDG: 2.1 IATA: 2.1 |
| 14.4 | Packing group: | ADR/RID: N/A IMDG: N/A IATA: N/A |
| 14.5 | Environmental hazards: | ADR/RID: Yes IMDG: Marine Pollutant: Yes IATA: Yes |

SAFETY DATA SHEET

- 14.6 Special precautions for user:**
ADR/RID – Tunnel code: (D)
IMDG – Ems: F-D, S-U
IATA/ICAO – PAX: 203
IATA/ICAO – CAO: 203
- 14.7 Transport in bulk according to Annex II of Marpol 73/78 and the IBC code:**
Not applicable

SECTION 15 REGULATORY INFORMATION

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture:**
EU Regulations:
This data sheet complies with the requirements of Regulation (EC) No 1272/2008 on the classification, labelling and packaging of substances and mixtures.
Safety data sheet as required by EC-Regulations 1907/2006 and REACH Annex II Amendment (EU) No. 2015/830.
Information according to 2013/10/EU and 2008/47/EC amendment of the aerosol directive 75/324/EEC.
This data sheet is complied according Dir 2013/10/EU, 2008/47/EEC amendment of the aerosol directive 75/324/EEC.
Extra label elements: Pressured container: protect from sunlight and do not expose to temperatures exceeding 50 °C. Do not pierce or burn, even after use. Do not spray on a naked flame or any incandescent material.
Mixtures classified as Asp. Tox. 1 H304 need not be labelled when placed on the market in aerosol containers or in containers fitted with a sealed spray attachment.
- National regulations (Germany):**
Wassergefährdungsklasse (water hazard class): WGK 2 - Hazard to waters.
TechnischeAnleitungLuft (TA-Luft): Class 5.2.5 Organic Substances, except dusts
- 15.2 Chemical safety assessment:**
No data available

SECTION 16 OTHER INFORMATION

- (i) Indication of changes:**
This safety data sheet has been updated to meet the requirements of Regulation EU No 2015/830 and Regulation (EC) No 1272/2008. Removal of the Classification according to 67/548/EEC as amended & Directive 1999/45/EC. Version 16.1 also updated in Section 8 due to updated safety information.
Vertical lines on the left hand side indicate an amendment from the previous version.
- (ii) Abbreviations and acronyms:**
- | | |
|-----------|---|
| ADR | European Agreement concerning the International Carriage of Dangerous Goods by Road (Accord européen relatif au transport international des marchandises Dangereuses par Route) |
| CAS No. | Chemical Abstracts Service number |
| CEN | European Committee for Standardisation |
| CLP | Classification, Labelling Packaging Regulation; Regulation (EC) No 1272/2008 |
| ECHA | European Chemicals Agency |
| EC50 | Half Maximal Effective Concentration |
| EC number | EINECS and ELINCS number |
| EINECS | European Inventory of Existing Commercial Substances |
| ELINCS | European List of notified Chemical Substances |
| GHS | Globally Harmonized System |
| IATA | International Air Transport Association |
| IMDG | International Maritime Dangerous Goods |

SAFETY DATA SHEET

| | |
|---------|---|
| LC50 | Lethal Concentration to 50% of a test population |
| LD50 | Lethal Dose to 50% of a test population |
| MPI | Magnetic Particle Inspection |
| NDT | Non-Destructive Testing |
| OEL | Occupational Exposure Limit |
| PBT | Persistent, Bioaccumulative and Toxic Substance |
| PMCC | Pensky-Martens closed cup method |
| PPE | Personal Protection Equipment |
| REACH | Registration, Evaluation, Authorisation and Restriction of Chemicals Regulation EC (No) 1907/2006 |
| RID | Regulations concerning the International Carriage of Dangerous Goods by Rail (Reglement International concernant le transport des marchandises Dangereuses par chemin de fer) |
| SDS | Safety Data Sheet |
| STOT RE | Specific Target Organ Toxicity, Repeat Exposure |
| STOT SE | Specific Target Organ Toxicity, Single Exposure |
| TA-Luft | Technical Instructions on Air Quality Control (Technische Anleitung zur Reinhaltung der Luft) |
| vPvB | Very Persistent and Very Bioaccumulative |
| WEL | Workplace Exposure Limit |
| WGK | German Water Hazard Class (Wassergefährdungsklasse) |

(iii) Key literature and sources of data:

- Supplier's safety data sheets for components listed in Section 3.
- European Chemicals Agency, <http://echa.europa.eu/>
- GESTIS International Limit Values Database, http://limitvalue.ifa.dguv.de/Webform_gw.aspx
- Occupational Exposure Limits EH40/2005.
- Commission regulation (EU) 2015/830.
- Control of Substances Hazardous to Health Regulations 2002.
- Hazardous waste regulations 2005.
- Health & Safety at Work Act 1974.
- REACH Directive (EC) 1907/2006.

(iv) Classification and procedure used to derive the classification for mixtures according to Regulation (EC) 1272/2008 (CLP):

| Classification according to Regulation (EC) No 1272/2008 | Classification procedure |
|--|--------------------------|
| Aerosol. 1: H222, H229 | Test Method |
| Skin Irr. 2: H315 | Calculation Method |
| STOT SE3: H336: | Calculation Method |
| Aquatic Chronic 2: H411 | Calculation Method |

(v) Hazard statements (number and full text):

- H220: Extremely flammable gas.
H225: Highly flammable liquid and vapour
H222: Extremely flammable aerosol.
H229: Pressurised container: may explode if heated.
H280: Contains gas under pressure; may burst if heated.
H304: May be fatal if swallowed and enters airways
H315: Causes skin irritation
H336: May cause drowsiness or dizziness
H411: Toxic to aquatic life with long lasting effects

Hazard Class and Category Code (full text):

- Aerosol 1: Aerosol
Aquatic Chronic 2: Hazardous to the aquatic environment
Asp. Tox. 1: Aspiration hazard
Flam. Gas 1: Flammable Gas
Flam. Liq. 2: Flammable liquid
Press. Gas: Gases under pressure
Skin Irrit. 2: Skin corrosion/irritation
STOT SE 3: Specific target organ toxicity - single exposure

SAFETY DATA SHEET

Relevant precautionary statements (number and full text):

P210: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

P211: Do not spray on an open flame or other ignition source.

P251 Do not pierce or burn even after use.

P261: Avoid breathing dust/fume/gas/mist/vapours/spray.

P271: Use only outdoors or in a well ventilated area.

P410 + P412: Protect from sunlight. Do not expose to temperatures exceeding 50 °C.

P280: Wear protective gloves/protective clothing/eye protection/face protection

P302+352: IF ON SKIN: Wash with soap and water

P362+P364: Take off contaminated clothing and wash it before reuse.

P264: Wash thoroughly after handling.

P501: Dispose of contents/container to hazardous waste or special collection point.

(vi)

Training advice:

Chemical hazard awareness training, incorporating labelling, Safety Data Sheets (SDS), Personal Protective Equipment (PPE) and hygiene. Chemical hazard risk assessment.

Provide adequate information, instruction and training to operators.

DISCLAIMER

The information and recommendations contained herein are based upon data believed to be up-to-date and correct. However, no guarantee or warranty of any kind, express or implied, is made with respect to the information and recommendations contained herein. We accept no responsibility and disclaim all liability for any harmful effects that may be caused by (incorrect) use, handling, purchase, resale, or exposure to our product. Customers and users of our product must comply with all applicable health and safety laws, regulations, and orders. In particular, they are under an obligation to carry out a risk assessment for the particular work places and to take adequate risk management measures in accordance with the national implementation legislation of EU Directives 89/391/EEC and 98/24/EC amended by Directive 2014/27/EU.

| | | |
|--------------------------|--------------------------|--|
| Revision summary: | Revision Comments | This SDS is valid from the Revision Date. If you require a SDS for the product manufactured before the Revision Date please contact us at datasheets@magnaflux.co.uk . |
| | Revision Date | 01.04.2016 |
| | Version | 16.1 |

COLD FIRE®

Fire Suppressing Agent
Safety Data Sheet



Cold Fire is an environmentally friendly fire suppressing agent, specially designed to extinguish Class A, B, and D fires. Cold Fire has a rapid cooling effect, which provides rapid extinguishment, prevention of re-ignition, and the encapsulation of hydrocarbons. The product is safe to store, handle and use, leaves virtually no residue and is environmentally friendly, nontoxic, non-corrosive, and biodegradable.

Section 1: Identification

Manufacturer: Firefreeze Worldwide, Inc.
Address: 272 Route 46 E., Rockaway, N.J. 07866
Phone: (973) 627-0722 **Fax:** (973) 627-2982
Email: Info@firefreeze.com
Formulation: CF302
Trade Name: Cold Fire Product
Usage: Class A, B, D & K fire suppressant agent.
Not recommended for Class C fires

Section 2: Hazard Identification

HMIS RATING: Health: 0 Flammability: 0 Reactivity: 0

Product may be slippery in concentration form.
No components are believed to be hazardous or listed in the NIOSH Recommendations for Occupational Safety and Health Standards, 1988, or are listed as hazardous by SARA, CERCLA, or RCRA. No OSHA PEL's are established for any of the ingredients.

Section 3: Composition

Components are classified trade secret.

Cold Fire is an environmentally friendly fire suppressing agent composed of natural water based surfactants and other natural plant based ingredients. Cold Fire is a clear liquid with a fresh smell that leaves no residue and biodegrades in 21 days.

Section 4: First Aid

Skin: Rinse with water.
Eyes: Immediately flush eyes with water.
Inhalation: Negligible
Ingestion: Not considered to be orally toxic.

Section 5: Fire Fighting Measures

Components are classified trade secret.

Non flammable: Water based product, will not ignite.

Section 6: Accidental Release

Spill or Leak Procedure: Rinse affected area with water.

Waste Disposal Method: Dispose as non-hazardous waste in accordance with local regulations.

Section 7: Handling and Storage

Respiratory Protection: Not required

Ventilation: Under ordinary conditions of use for its intended purpose, no special ventilation is required.

Protective Gloves: Wear if there is prolonged skin contact.

Eye Protection: Wear if needed to prevent reasonable probability of eye contact.

Storage and Handling Precautions: Store in temperatures from 32°F to 120°F in closed containers to prevent evaporation and deterioration. Freezing will not damage material as long as container remains intact.

Section 8: Exposure Control Measures

Avoid prolonged skin contact with concentrate, wash hands after handling. Wear eye protection where required.

More



272 Rt. 46, East Rockaway, NJ 07866 ■ PHONE: (973) 627-0722 ■ EMAIL: info@firefreeze.com



COLD FIRE®

Fire Suppressing Agent
Safety Data Sheet



Section 9: Physical And Chemical Properties

| | |
|--------------------------------|---|
| Boiling Point: | 212°F. |
| Vapor Pressure (mm Hg): | Same as water. |
| Solubility in water: 1 | 00% |
| Specific Gravity: | 1.02 @ 60°F. |
| pH: | ~6.8 (concentrate) Neutral when diluted |
| Appearance and Odor: | Clear liquid, fresh smell |

Section 10: Stability And Reactivity

| | |
|--|-------------------------------------|
| Stability: | Product is stable |
| Incompatibility: | None |
| Hazardous Polymerization: | Will not occur. |
| Hazardous Decomposition Products: | Carbon monoxide and carbon dioxide. |

Section 11: Toxicological Information

Biodegradability: Product is 100% biodegradable in an active environment within 21 days.

Toxicity: In accordance with U.S. EPA Office of Pollution Prevention and Toxics criteria for ranking the acute toxicity of chemicals in the aquatic environment, ColdFire 302 is considered to be of low concern.

96 hour acute toxicity versus freshwater alga (*Selenastrum capricornutum*) IAW 40 CFR 797.1050 showed ColdFire 302 was algicidal at concentrations above 750 ppm.

96 hour acute toxicity versus juvenile rainbow trout (*Oncorhynchus mykiss*) IAW 49 CFR 797.1400 showed an LC50 of 105 ppm.

The information presented in this SDS is believed to be factual. However, nothing contained in this information is to be taken as a warranty of any kind by Firefreeze Worldwide, Inc. The user should review any recommendations, in the specific context of the intended use, to determine whether they are appropriate.

Section 12: Ecological Information

No Data Available

Section 13: Disposal Considerations

Dispose as non-hazardous waste in accordance with local regulations

Section 14: Transport Information

| | |
|--------------------------------------|----------------------|
| NMFC CODE: | 69160 |
| US DOT Hazard Class: | Not regulated by DOT |
| US DOT Identification Number: | Not applicable. |

Section 15: Regulatory Information

| | |
|------------------|---|
| NFPA-18: | UL Classified Wetting Agent 2N75 |
| EPA SNAP: | Significantly new alternative policy program, listed by the EPA as a substitute for Halon 1211. |

Section 16: Other Information

Preparation/Revision Date: February 5, 2016 – Rev. 1.0



272 Rt. 46, East Rockaway, NJ 07866 ■ PHONE: (973) 627-0722 ■ EMAIL: info@firefreeze.com



MT. HOOD CHEMICAL CORPORATION (MT. HOOD SOLUTIONS)

14546 N. Lombard

Portland, Oregon 97203

Emergency Phone: 503-227-3505

N/A = NOT APPLICABLE

NA = NOT AVAILABLE

MATERIAL SAFETY DATA SHEET**PRODUCT NAME: ISOPROPANOL**

Date Printed: 10/1/2010

PRODUCT NAME: ISOPROPANOL

PREPARED BY: K. Woods

DATE: December 31, 1998

CHEMICAL FAMILY: Alcohol

FORMULA: CH₃CHOHCH₃ (in water)

HAZARDOUS INGREDIENTS (CAS #):

Isopropyl Alcohol (67-63-0)

%

More than 85%

EXPOSURE LIMITS, ppm: ACGIH TLV OSHA-PEL

400

400

CARCINOGENIC INGREDIENTS: Contains no known or suspected carcinogens.

SARA Title III, Section 313 Reportable Ingredients: None. Isopropyl Alcohol is reportable only for manufacturers of Isopropyl alcohol.

PHYSICAL PROPERTIES:

Boiling Point: About 177° F

Solubility in Water: 100%

Specific Gravity - Liquid (H₂O = 1): 0.82-0.85

Odor and Appearance: Clear liquid; alcohol odor

% Volatiles: 100%

% Volatile Organic Content (VOC): 90%

Vapor Pressure: 33 mm Hg at 68° F

Vapor Density (Air = 1): 2.10

FIRE AND EXPLOSION DATA:

Flash Point: 65° F, TCC

Flammability Limits: Lower 2.5%, upper 12.0%

Extinguishing Media: CO₂, foam, dry chemical, water fog

Special Firefighting Procedures: When large amounts are present, wear full protective equipment and self-contained breathing apparatus.

Unusual Hazards: Vapors from this product may concentrate in confined spaces.

HEALTH EFFECTS:

Effects of overexposure: May cause eye irritation. Prolonged skin contact may cause irritation. Ingestion may cause nausea, vomiting, or diarrhea.

Overexposure to vapors may cause dizziness, headache, or nausea.

Chronic effects of overexposure: None known or expected.

Medical conditions that may be aggravated by exposure: None known.

Primary routes of entry: Ingestion, inhalation of vapors or mist, skin contact.

EMERGENCY AND FIRST AID PROCEDURES:

Eye Contact: Flush thoroughly with plenty of water for at least 15 minutes. Get prompt medical attention.

Skin Contact: Flush thoroughly from skin with plenty of water. If skin irritation persists, see a physician.

Ingestion: DO NOT INDUCE VOMITING UNLESS INSTRUCTED BY A PHYSICIAN. Give plenty of water or milk and call a physician immediately.

Inhalation of mist or vapor: Move to fresh air. Give oxygen if breathing is difficult. Call a physician.

REACTIVITY DATA:

Stability: Stable

Hazardous Polymerization: Will not occur

Incompatibility: Acids, strong oxidizers, chlorine bleach, amines, ammonia, caustics

Hazardous Decomposition Products: Carbon monoxide, carbon dioxide if burned

Conditions to Avoid: High heat, open flames, sparks

SPILL OR LEAKAGE PROCEDURES:

Steps to be taken if material is released or spilled: Ventilate area well. Extinguish all sources of ignition. Flush to sewer with plenty of water OR mop up OR absorb on an absorbent, sweep-up absorbent material and place in a closed container.

Waste disposal method: According to local, state, or federal ordinances.

SPECIAL PROTECTION INFORMATION:

Ventilation: Normal room ventilation adequate for normal use.

Respiration Protection: If TLV may be exceeded, NIOSH approved respirator with proper canister.

Eye Protection: Safety glasses recommended if spraying or splashing.

Protective Gloves: For prolonged contact or sensitive individuals, rubber or neoprene gloves recommended.

Other Protective Equipment: None

SPECIAL PRECAUTIONS:

Precautions to be taken in handling and storage:

Store in closed container in cool, dry area. Store away from open flame, sparks, heat..

Wash thoroughly after handling. Ground metal containers when transferring.

KEEP OUT OF REACH OF CHILDREN.

HAZARD RATING:

Health: 2

0 = Minimal

3 = Serious

Fire: 3

1 = Slight

4 = Severe



Reactivity: 0

2 = Moderate

**SECTION 1 - IDENTIFICATION**

| | |
|--|--|
| Manufacturer: Black Swan Mfg. Co. 4540 W. Thomas St. Chicago, IL 60651-3318 Tel.: 800-252-5796 Fax: 773-227-3705 Web Site : www.blackswanmfg.com E-mail : info@blackswanmfg.com | For any Transportation or Medical Chemical Emergencies call: <p style="text-align: center;">INFOTRAC</p> <p style="text-align: center;">(800) 535-5053 OR (352) 323-3500</p> <p style="text-align: center;">24 hours per day - 7 days a week</p> |
| Product Name: PVC Cement (Clear) – Regular Bodied | Recommended Use: For connecting PVC pipe and fittings. |

SECTION 2 – HAZARD(S) IDENTIFICATION

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|--|---|------------|---|---|--|---|----------|----|------|------|--------|-----|-----------|-----|--------------|---|-------------|---|------------------|---------------------------------|-----------------------------|------------------------|------------|
| <p>Labels</p>  <p>Flammable Health Hazard Irritant</p> <p>Signal Word Danger</p> <p>HMIS</p> <table border="1" style="width: 100%;"> <tr><td>HEALTH</td><td style="text-align: right;">2</td></tr> <tr><td>FLAMMABILITY</td><td style="text-align: right;">3</td></tr> <tr><td>REACTIVITY</td><td style="text-align: right;">0</td></tr> </table> | HEALTH | 2 | FLAMMABILITY | 3 | REACTIVITY | 0 | <p>NFPA</p> <table border="1" style="width: 100%; text-align: center;"> <tr> <td style="width: 50%; vertical-align: top;"> HEALTH HAZARD 4 – Deadly 3 – Extreme Danger 2 – Hazardous 1 – Slight Hazardous 0 – Normal Material </td> <td style="width: 50%; vertical-align: top;"> FIRE HAZARD Flash Points 4 – Below 73°F 3 – Below 100°F 2 – Above 100°F, Not exceeding 200°F 1 – Above 200°F 0 – Will not burn </td> </tr> </table>  <p>SPECIFIC HAZARD</p> <table border="0"> <tr><td>Oxidizer</td><td>OX</td></tr> <tr><td>Acid</td><td>ACID</td></tr> <tr><td>Alkali</td><td>ALK</td></tr> <tr><td>Corrosive</td><td>COR</td></tr> <tr><td>Use NO WATER</td><td>W</td></tr> <tr><td>Radioactive</td><td>☢</td></tr> </table> <p>REACTIVITY</p> <table border="0"> <tr><td>4 – May detonate</td></tr> <tr><td>3 – Shock and heat may detonate</td></tr> <tr><td>2 – Violent chemical change</td></tr> <tr><td>1 – Unstable if heated</td></tr> <tr><td>0 – Stable</td></tr> </table> | HEALTH HAZARD 4 – Deadly 3 – Extreme Danger 2 – Hazardous 1 – Slight Hazardous 0 – Normal Material | FIRE HAZARD Flash Points 4 – Below 73°F 3 – Below 100°F 2 – Above 100°F, Not exceeding 200°F 1 – Above 200°F 0 – Will not burn | Oxidizer | OX | Acid | ACID | Alkali | ALK | Corrosive | COR | Use NO WATER | W | Radioactive | ☢ | 4 – May detonate | 3 – Shock and heat may detonate | 2 – Violent chemical change | 1 – Unstable if heated | 0 – Stable |
| HEALTH | 2 | | | | | | | | | | | | | | | | | | | | | | | | | |
| FLAMMABILITY | 3 | | | | | | | | | | | | | | | | | | | | | | | | | |
| REACTIVITY | 0 | | | | | | | | | | | | | | | | | | | | | | | | | |
| HEALTH HAZARD 4 – Deadly 3 – Extreme Danger 2 – Hazardous 1 – Slight Hazardous 0 – Normal Material | FIRE HAZARD Flash Points 4 – Below 73°F 3 – Below 100°F 2 – Above 100°F, Not exceeding 200°F 1 – Above 200°F 0 – Will not burn | | | | | | | | | | | | | | | | | | | | | | | | | |
| Oxidizer | OX | | | | | | | | | | | | | | | | | | | | | | | | | |
| Acid | ACID | | | | | | | | | | | | | | | | | | | | | | | | | |
| Alkali | ALK | | | | | | | | | | | | | | | | | | | | | | | | | |
| Corrosive | COR | | | | | | | | | | | | | | | | | | | | | | | | | |
| Use NO WATER | W | | | | | | | | | | | | | | | | | | | | | | | | | |
| Radioactive | ☢ | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 – May detonate | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 – Shock and heat may detonate | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 – Violent chemical change | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 – Unstable if heated | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 – Stable | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Hazardous Statements</p> <p>H225: Highly flammable liquid and vapor H304: May be fatal if swallowed and enters airways H312: Harmful in contact with skin H319: Causes serious eye irritation H332: Harmful if inhaled H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Contains a chemical classified by the U.S. EPA as a suspected possible carcinogen</p> | <p>GHS Classification</p> <table border="1" style="width: 100%;"> <tr> <td style="width: 50%; vertical-align: top;"> Health Acute Toxicity: Cat. 4 Skin Irritation: Cat. 3 Eye Irritation: Cat. 2B Skin Sensitization: NO </td> <td style="width: 50%; vertical-align: top;"> Environmental Acute Aquatic Toxicity: Not Established Chronic Aquatic Toxicity: Not Established </td> </tr> </table> <p>Physical Flammable Liquid: Cat. 2</p> <p>Precautionary Statements</p> <p>P102: Keep out of reach of children P210: Keep away from heat, sparks, open flames, and hot surfaces – No smoking P233/P235: Keep container tightly closed and cool P243: Take precautionary measures against static discharge P261: Avoid breathing dust, fumes, gas, mist, vapors, and spray P262: Do not get in eyes, on skin, or on clothing P264: Wash thoroughly after handling P270: Do not eat, drink or smoke when using this product P271: Use only outdoors or in a well-ventilated area P280/P284: Wear protective gloves, protective clothing, eye protection, and face protection. Wear a NIOSH approved respirator for organic solvents.</p> | Health Acute Toxicity: Cat. 4 Skin Irritation: Cat. 3 Eye Irritation: Cat. 2B Skin Sensitization: NO | Environmental Acute Aquatic Toxicity: Not Established Chronic Aquatic Toxicity: Not Established | | | | | | | | | | | | | | | | | | | | | | | |
| Health Acute Toxicity: Cat. 4 Skin Irritation: Cat. 3 Eye Irritation: Cat. 2B Skin Sensitization: NO | Environmental Acute Aquatic Toxicity: Not Established Chronic Aquatic Toxicity: Not Established | | | | | | | | | | | | | | | | | | | | | | | | | |

SECTION 3 – COMPOSITION / INFORMATION ON INGREDIENTS

| Hazardous Chemicals | CAS# | EINECS# | REACH Pre-registration Number | Approx % |
|----------------------------|-------------|----------------|--|-----------------|
| TETRAHYDROFURAN | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 20-30% |
| METHYL ETHYL KETONE | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 10-20% |
| CYCLOHEXANONE | 108-94-1 | 203-631-1 | 05-2116297718-25-0000 | 10-20% |
| ACETONE | 67-64-1 | 200-662-2 | 05-2116297713-35-0000 | 20-30% |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.

SECTION 4 – FIRST-AID MEASURES

| |
|--|
| <p>Inhalation: Move into fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen and call physician.</p> <p>Skin: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water.</p> <p>Eyes: Flush with water for 15 minutes. If irritation persists, get medical attention.</p> <p>Ingestion: Give 1 or 2 glasses of water. DO NOT INDUCE VOMITING. Contact physician immediately.</p> |
|--|

GHS SAFETY DATA SHEET

SECTION 5 – FIRE-FIGHTING MEASURES

Fire Hazard: Highly flammable liquid and vapor. Keep away from heat and all sources of ignition including sparks, flames, lighted cigarettes and pilot lights. Containers may rupture or explode in the heat of a fire. Vapors are heavier than air and may travel to a remote ignition source and flash back.

Combustion Products: Combustion will produce toxic and irritating vapors including carbon monoxide, carbon dioxide and hydrogen chloride.

Extinguishing Media: Carbon Dioxide Gas, Dry Chemical Powder, Foam.

Unsuitable Extinguishing Media: Water Spray, Water Stream.

Protective Equipment: Self-contained breathing apparatus {(SCBA), MSHA/NIOSH}. Full protective gear.

Special Fire Fighting Procedures: Evacuate enclosed areas, stay upwind. Closed or confined quarters require self-contained breathing apparatus, positive pressure hose masks or airline masks. Use water spray to cool containers, to flush spills from sources of ignition and to disperse vapors.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Personal Precautions: Prevent contact with skin or eyes. Personnel cleaning up the spill should wear appropriate personal protective equipment, including respirators if vapor concentrations are high.

Protective Equipment: Wear suitable respiratory protective equipment.

Emergency Procedures: Remove all sources of ignition and ventilate area. For leaks, stop leak if it can be done safely. Evacuate area and keep unnecessary and unprotected personnel from entering the spill area.

Environmental Precautions: Avoid runoff into storm sewers, ditches and waterways.

Methods for Cleaning Up: Soak up spill with an inert absorbent such as sand, earth or other noncombusting material. Transfer absorbent material to a covered, labeled, metal container. Do not use plastic or aluminum containers.

SECTION 7 – HANDLING AND STORAGE

Handling

Avoid contact with eyes, skin and clothing. Avoid prolonged breathing of vapor and mist. Use with adequate ventilation. Wash thoroughly after handling. Do not eat, drink or smoke in the work area. Keep products away from heat, sparks, flames and all other sources of ignition. Keep containers closed when not in use.

Storage

Store in a cool, dry, well-ventilated area away from incompatible materials. Store in shade between 40°F – 110°F. Keep container closed when not in use. Keep away from heat, sparks, open flame and other sources of ignition. **Incompatible Materials:** caustics, ammonia, inorganic acids, chlorinated compounds, amines, strong oxidizers and isocyanates.

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure Limits

| <u>Hazardous Chemicals</u> | <u>ACGIH-TLV</u> | <u>ACGIH-STEL</u> | <u>OSHA-PEL</u> |
|----------------------------|------------------|-------------------|-----------------|
| TETRAHYDROFURAN | 50 ppm | 100 ppm | 200 ppm |
| METHYL ETHYL KETONE | 200 ppm | 300 ppm | 200 ppm |
| CYCLOHEXANONE | 20 ppm | 50 ppm | 50 ppm |
| ACETONE | 500 ppm | 750 ppm | 1000 ppm |

Engineering Controls: A source of running water to flush or wash the eyes and skin in case of contact. Use local exhaust as needed.

Ventilation: Local ventilation is adequate. Use only explosion proof ventilation equipment.

Personal Protective Equipment – Respiratory: Atmospheric levels should be maintained below established exposure limits. If airborne concentrations exceed those limits, use of a NIOSH approved organic vapor cartridge respirator with full face-piece is recommended. The effectiveness of an air purifying respirator is limited. Use it only for a single short-term exposure. For emergency and other conditions where short term exposure guidelines may be exceeded, use an approved positive pressure self-contained breathing apparatus.

Personal Protective Equipment – Skin: Prevent contact with skin. Butyl rubber gloves should be used.

Personal Protective Equipment – Eyes: Use glasses with side shield or splash proof goggles.

SECTION 9 – PHYSICAL & CHEMICAL PROPERTIES

| | | | | | |
|------------------------|-----------------|--------------------------|--------------------------------------|-----------------------------|----------------|
| Appearance: | Clear Liquid | Flash Point: | 6°F | Vapor Pressure: | 143mm Hg @20°C |
| Odor: | Ketone | Specific Gravity: | 0.95 ± 0.02 @ 20°C | Flammability: | Category 2 |
| pH: | Not Established | Solubility (H2O): | Solvent-Complete, Resin-Precipitates | Flammability Limits: | LEL - 1.8% |
| Melting Point: | Not Established | Evaporation Rate: | 8 (BUAC=1) | | UEL – 11.8% |
| Freezing Point: | Not Established | Vapor Density: | >2.00 (AIR=1) | | |
| Boiling Point: | 151°F (66°C) | VOC: | 510 g/l | | |

GHS SAFETY DATA SHEET

SECTION 10 – STABILITY AND REACTIVITY

Stability: Stable.

Hazardous polymerization: Will not occur.

Conditions to avoid: Keep away from heat, sparks, open flame and other sources of ignition.

Incompatible materials: Caustics, ammonia, inorganic acids, chlorinated compounds, amines, strong oxidizers and isocyanates.

Hazardous decomposition products: When forced to burn, this product gives out carbon monoxide, carbon dioxide, hydrogen chloride and smoke.

SECTION 11 – TOXICOLOGICAL INFORMATION

| <u>Hazardous Chemicals</u> | <u>Toxicity</u> | |
|----------------------------|---|---|
| | <u>LD₅₀</u> | <u>LC₅₀</u> |
| TETRAHYDROFURAN | Oral: 2842 mg/kg (rat) | Inhalation: 3 hrs., 21000 mg/m ³ (rat) |
| METHYL ETHYL KETONE | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation: 8 hrs., 23500 mg/m ³ (rat) |
| CYCLOHEXANONE | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation: 4 hrs., 8000 ppm (rat) |
| ACETONE | Oral: 5800 mg/kg (rat) | Inhalation: 50100 mg/m ³ (rat) |

Likely Routes of Exposure: Inhalation, Skin Contact and Eye Contact.

Symptoms and Effect - Inhalation: Severe overexposure may result in nausea, dizziness, and headaches. Can cause drowsiness, irritation of eyes and nasal passages. **Skin Contact:** Liquid contact may remove natural skin oils resulting in irritation. Dermatitis may occur with prolonged contact. **Eye Contact:** Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid. **Ingestion:** May cause nausea, vomiting, diarrhea and mental sluggishness.

Long-Term Effect: None known.

Pre-Existing Conditions: Individuals with pre-existing diseases of the eyes, skin or respiratory system may have increased susceptibility to the toxicity of excessive exposure.

SECTION 12 – ECOLOGICAL INFORMATION

Ecotoxicity: None known.

Persistence & Degradability: Biodegradable.

Bioaccumulative Potential: None known.

Mobility in soil: In normal use, emission of Volatile Organic Compounds (VOC's) to the air takes place, typically at a rate of ≤ 510 g/l.

SECTION 13 – DISPOSAL CONSIDERATION

Dispose of product or container in accordance with federal, state or local regulations.

SECTION 14 – TRANSPORTATION INFORMATION

Shipping Information

Shipping Name: Adhesives, Containing a Flammable Liquid

Hazardous Class: 3

I.D. Number: UN1133

Packing Group: II

Label Required: Flammable Liquid

Marine Pollutant: No

Exception to the rule: If the package that contains the hazardous material is in a small consumer size (Less than 1L), then the rules that apply to shipping hazardous materials do not apply. This is called an "Exception".

This is classified as Limited Quantity.

SECTION 15 – REGULATORY INFORMATION

Precautionary Label Information: Highly Flammable, Irritant and Health Hazard.

Risk Phrases: **R11**-Highly Flammable. **R36/37**-Irritant to eyes and respiratory system. **R66**-Repeated exposure may cause skin dryness or cracking. **R67**-Vapors may cause drowsiness and dizziness.

Safety Phrases: **S2**-Keep out of reach of children. **S9**-Keep container in a well-ventilated place. **S16**-Keep away from sources of ignition-No smoking. **S25**-Avoid contact with eyes. **S26**-In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. **S33**-Take precautionary measures against static discharges.

SECTION 16 – OTHER INFORMATION

Information on this form is furnished solely for the purpose of compliance with the Occupational Safety and Health Act and shall not be used for any other purpose. Black Swan Mfg. Co. urges the customers receiving this Material Safety Data Sheet to study it carefully to become aware of the hazards, if any, of the product involved. In the interest of safety, you should notify your employees, agents and contractors of the information on the sheets.

DATE: 01/01/2021

SAFETY DATA SHEET



Date of issue/Date of revision 16 November 2019

Version 7

Section 1. Identification

Product name : 55-611 PITT BULL SPRAY GLOSS WHITE
Product code : 00351706
Other means of identification : Not available.
Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Product use : Consumer applications, Professional applications.
Use of the substance/mixture : Coating.
Uses advised against : Not applicable.

Manufacturer : PPG Industries, Inc.
One PPG Place
Pittsburgh, PA 15272
Emergency telephone number : (412) 434-4515 (U.S.)
(514) 645-1320 (Canada)
01-800-00-21-400 or + 52 55 5559 1588 (Mexico)

Technical Phone Number : 1-800-441-9695 (8:00 am to 5:00 pm EST)


Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SKIN IRRITATION - Category 2
EYE IRRITATION - Category 2A
TOXIC TO REPRODUCTION (Unborn child) - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
Percentage of the mixture consisting of ingredient(s) of unknown acute toxicity: 50% (Oral), 55% (Dermal), 38% (Inhalation)

GHS label elements

Hazard pictograms :

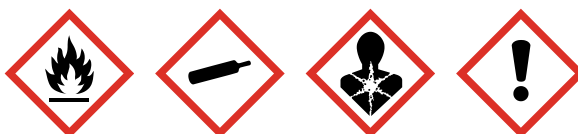

United States

Page: 1/16

Section 2. Hazards identification

| | |
|---|---|
| Signal word | : Danger |
| Hazard statements | : Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes serious eye irritation. Causes skin irritation. Suspected of damaging the unborn child. May cause drowsiness or dizziness. May cause damage to organs through prolonged or repeated exposure. |
| <u>Precautionary statements</u> | |
| General | : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. |
| Prevention | : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe the dust or mist. Wash hands thoroughly after handling. Pressurized container: Do not pierce or burn, even after use. |
| Response | : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. |
| Storage | : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. |
| Disposal | : Dispose of contents and container in accordance with all local, regional, national and international regulations. |
| Supplemental label elements | : Contents under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode. Do not puncture or incinerate. Keep away from heat and direct sunlight. Avoid contact with skin and clothing. Wash thoroughly after handling. Emits toxic fumes when heated. DANGER - RAGS, STEEL WOOL OR WASTE SOAKED WITH THIS PRODUCT MAY SPONTANEOUSLY CATCH FIRE IF IMPROPERLY DISCARDED. IMMEDIATELY AFTER EACH USE, PLACE RAGS, STEEL WOOL OR WASTE IN A SEALED WATER-FILLED METAL CONTAINER. |
| Hazards not otherwise classified | : Prolonged or repeated contact may dry skin and cause irritation. |

Section 3. Composition/information on ingredients

| | |
|--------------------------|--------------------------------------|
| Substance/mixture | : Mixture |
| Product name | : 55-611 PITT BULL SPRAY GLOSS WHITE |

Section 3. Composition/information on ingredients

| Ingredient name | % | CAS number |
|---|-------------|------------|
| acetone | ≥20 - ≤50 | 67-64-1 |
| toluene | ≥10 - ≤20 | 108-88-3 |
| propane | ≥10 - ≤20 | 74-98-6 |
| butane | ≥10 - ≤20 | 106-97-8 |
| Solvent naphtha (petroleum), light aliph. | ≥5.0 - ≤10 | 64742-89-8 |
| Ligroine | ≥1.0 - ≤5.0 | 8032-32-4 |

SUB codes represent substances without registered CAS Numbers.

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

If ingestion, irritation, any type of overexposure or symptoms of overexposure occur during or persists after use of this product, contact a POISON CONTROL CENTER, EMERGENCY ROOM OR PHYSICIAN immediately; have Safety Data Sheet information available. Never give anything by mouth to an unconscious or convulsing person.

Description of necessary first aid measures

- Eye contact** : Remove contact lenses, irrigate copiously with clean, fresh water, holding the eyelids apart for at least 10 minutes and seek immediate medical advice.
- Inhalation** : Remove to fresh air. Keep person warm and at rest. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel.
- Skin contact** : Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognized skin cleanser. Do NOT use solvents or thinners.
- Ingestion** : If swallowed, seek medical advice immediately and show this container or label. Keep person warm and at rest. Do NOT induce vomiting.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness.
- Skin contact** : Causes skin irritation. Defatting to the skin.
- Ingestion** : Can cause central nervous system (CNS) depression.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness

Section 4. First aid measures

- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
dryness
cracking
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Extremely flammable aerosol. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed. Runoff to sewer may create fire or explosion hazard.

Section 5. Fire-fighting measures

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon oxides
- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.
- Special precautions** : Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Vapors are heavier than air and may spread along floors. Materials such as cleaning rags, paper wipes and protective clothing, which are contaminated with the product may spontaneously self-ignite some hours later. To avoid the risks of fires, all contaminated materials should be stored in purpose-built containers or in metal containers with tight-fitting, self-closing lids. Contaminated materials should be removed from the workplace at the end of each working day and be stored outside. If this material is part of a multiple component system, read the Safety Data Sheet(s) for the other component or components before blending as the resulting mixture may have the hazards of all of its parts.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Do not store above the following temperature: 50°C (122°F). Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|-----------------|---|
| acetone | ACGIH TLV (United States, 3/2019). STEL: 500 ppm 15 minutes. TWA: 250 ppm 8 hours. OSHA PEL (United States, 5/2018). TWA: 2400 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. |
| toluene | OSHA PEL Z2 (United States, 2/2013). AMP: 500 ppm 10 minutes. CEIL: 300 ppm TWA: 200 ppm 8 hours. ACGIH TLV (United States, 3/2019). TWA: 20 ppm 8 hours. |

Section 8. Exposure controls/personal protection

| | |
|---|---|
| propane | OSHA PEL (United States, 5/2018). TWA: 1800 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. ACGIH TLV (United States, 3/2019). Oxygen Depletion [Asphyxiant]. Explosive potential. |
| butane | ACGIH TLV (United States, 3/2019). Explosive potential. STEL: 1000 ppm 15 minutes. None. None. |
| Solvent naphtha (petroleum), light aliph. Ligroine | None. None. |

Key to abbreviations

| | | | |
|-------|--|------|------------------------------------|
| A | = Acceptable Maximum Peak | S | = Potential skin absorption |
| ACGIH | = American Conference of Governmental Industrial Hygienists. | SR | = Respiratory sensitization |
| C | = Ceiling Limit | SS | = Skin sensitization |
| F | = Fume | STEL | = Short term Exposure limit values |
| IPEL | = Internal Permissible Exposure Limit | TD | = Total dust |
| OSHA | = Occupational Safety and Health Administration. | TLV | = Threshold Limit Value |
| R | = Respirable | TWA | = Time Weighted Average |
| Z | = OSHA 29 CFR 1910.1200 Subpart Z - Toxic and Hazardous Substances | | |

Consult local authorities for acceptable exposure limits.

Recommended monitoring procedures : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment. Reference should be made to appropriate monitoring standards. Reference to national guidance documents for methods for the determination of hazardous substances will also be required.

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Chemical splash goggles.

Skin protection

Section 8. Exposure controls/personal protection

- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Gloves** : For prolonged or repeated handling, use the following type of gloves:

Recommended: butyl rubber
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. If workers are exposed to concentrations above the exposure limit, they must use appropriate, certified respirators. Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Characteristic.
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : Not available.
- Boiling point** : <35°C (<95°F)
- Flash point** : Closed cup: -60°C (-76°F)
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Evaporation rate** : Not available.
- Vapor pressure** : Not available.
- Vapor density** : Not available.
- Relative density** : 0.75
- Density (lbs / gal)** : 6.26
- Solubility** : Insoluble in the following materials: cold water.

Section 9. Physical and chemical properties

| | |
|---|--|
| Partition coefficient: n-octanol/water | : Not available. |
| Viscosity | : Kinematic (40°C (104°F)): >0.21 cm ² /s (>21 cSt) |
| Volatility | : 89% (v/v), 83.29% (w/w) |
| % Solid. (w/w) | : 16.71 |
| Aerosol product | |
| Type of aerosol | : Spray |
| Heat of combustion | : 29.63 kJ/g |

Section 10. Stability and reactivity

| | |
|---|--|
| Reactivity | : No specific test data related to reactivity available for this product or its ingredients. |
| Chemical stability | : The product is stable. |
| Possibility of hazardous reactions | : Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | : When exposed to high temperatures may produce hazardous decomposition products. Refer to protective measures listed in sections 7 and 8. |
| Incompatible materials | : Keep away from the following materials to prevent strong exothermic reactions: oxidizing agents, strong alkalis, strong acids. |
| Hazardous decomposition products | : Decomposition products may include the following materials: carbon monoxide, carbon dioxide, smoke, oxides of nitrogen. |

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|--------------------------|----------|
| acetone | LC50 Inhalation Vapor | Rat | 76000 mg/m ³ | 4 hours |
| | LD50 Dermal | Rabbit | 15.8 g/kg | - |
| | LD50 Oral | Rat | 5800 mg/kg | - |
| toluene | LC50 Inhalation Vapor | Rat | 49 g/m ³ | 4 hours |
| | LD50 Dermal | Rabbit | 8.39 g/kg | - |
| | LD50 Oral | Rat | 5580 mg/kg | - |
| butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| Ligroine | LC50 Inhalation Gas. | Rat | 3400 ppm | 4 hours |

Conclusion/Summary : There are no data available on the mixture itself.

Irritation/Corrosion

Conclusion/Summary

Skin : There are no data available on the mixture itself.

Eyes : There are no data available on the mixture itself.

Section 11. Toxicological information

Respiratory : There are no data available on the mixture itself.

Sensitization

Conclusion/Summary

Skin : There are no data available on the mixture itself.

Respiratory : There are no data available on the mixture itself.

Mutagenicity

Conclusion/Summary : There are no data available on the mixture itself.

Carcinogenicity

Conclusion/Summary : There are no data available on the mixture itself.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| toluene | - | 3 | - |

Carcinogen Classification code:

IARC: 1, 2A, 2B, 3, 4

NTP: Known to be a human carcinogen; Reasonably anticipated to be a human carcinogen

OSHA: +

Not listed/not regulated: -

Reproductive toxicity

Conclusion/Summary : There are no data available on the mixture itself.

Teratogenicity

Conclusion/Summary : There are no data available on the mixture itself.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|---|------------|-------------------|------------------------------|
| acetone | Category 3 | Not applicable. | Narcotic effects |
| toluene | Category 3 | Not applicable. | Narcotic effects |
| Solvent naphtha (petroleum), light aliph. | Category 3 | Not applicable. | Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|---------|------------|-------------------|----------------|
| toluene | Category 2 | Not determined | Not determined |
| propane | Category 2 | Not determined | Not determined |
| butane | Category 2 | Not determined | Not determined |

Target organs

: Contains material which causes damage to the following organs: brain, central nervous system (CNS).

Contains material which may cause damage to the following organs: blood, kidneys, lungs, the nervous system, the reproductive system, liver, heart, gastrointestinal tract, upper respiratory tract, skin, eye, lens or cornea.

Aspiration hazard

Section 11. Toxicological information

| Name | Result |
|--|--|
| Toluene Solvent naphtha (petroleum), light aliph. Lignoine | ASPIRATION HAZARD - Category 1 ASPIRATION HAZARD - Category 1 ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness.
- Skin contact** : Causes skin irritation. Defatting to the skin.
- Ingestion** : Can cause central nervous system (CNS) depression.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
 irritation
 redness
 dryness
 cracking
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

- Conclusion/Summary** : There are no data available on the mixture itself. Exposure to component solvent vapor concentrations in excess of the stated occupational exposure limit may result in adverse health effects such as mucous membrane and respiratory system irritation and adverse effects on the kidneys, liver and central nervous system. Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and, in extreme cases, loss of consciousness. Solvents may cause some of the above effects by absorption through the skin. There is some evidence that repeated exposure to organic solvent vapors in combination with constant loud noise can cause greater hearing loss than expected from exposure to noise alone. If splashed in the eyes, the liquid may cause irritation and reversible damage. Ingestion may cause nausea, diarrhea and vomiting.

Section 11. Toxicological information

This takes into account, where known, delayed and immediate effects and also chronic effects of components from short-term and long-term exposure by oral, inhalation and dermal routes of exposure and eye contact.

Short term exposure

Potential immediate effects : There are no data available on the mixture itself.

Potential delayed effects : There are no data available on the mixture itself.

Long term exposure

Potential immediate effects : There are no data available on the mixture itself.

Potential delayed effects : There are no data available on the mixture itself.

Potential chronic health effects

General : May cause damage to organs through prolonged or repeated exposure. Prolonged or repeated contact can defat the skin and lead to irritation, cracking and/or dermatitis.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : Suspected of damaging the unborn child.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Product/ingredient name | Oral (mg/kg) | Dermal (mg/kg) | Inhalation (gases) (ppm) | Inhalation (vapors) (mg/l) | Inhalation (dusts and mists) (mg/l) |
|---|--------------|----------------|--------------------------|----------------------------|-------------------------------------|
| 55-611 PITT BULL SPRAY GLOSS WHITE | 5000 | N/A | 70266.7 | N/A | N/A |
| acetone | 5800 | 15800 | N/A | 76 | N/A |
| toluene | 5580 | 8390 | N/A | 49 | N/A |
| butane | N/A | N/A | N/A | 658 | N/A |
| Solvent naphtha (petroleum), light aliph. | 500 | N/A | N/A | N/A | N/A |
| Ligroine | N/A | N/A | 3400 | N/A | N/A |

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| acetone | - | - | Readily |
| toluene | - | - | Readily |

Bioaccumulative potential

Section 12. Ecological information

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|------|-----------|
| acetone | -0.24 | 3 | low |
| toluene | 2.73 | 8.32 | low |
| propane | 2.36 | - | low |
| butane | 2.89 | - | low |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees. Section 6. Accidental release measures

14. Transport information

| | DOT | IMDG | IATA |
|-----------------------------|--------------------|-----------------|---------------------|
| UN number | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | Aerosols, flammable |
| Transport hazard class (es) | 2.1 | 2.1 | 2.1 |
| Packing group | - | - | - |
| Environmental hazards | No. | No. | No. |
| Marine pollutant substances | Not applicable. | Not applicable. | Not applicable. |
| Product RQ (lbs) | 5555.6 | Not applicable. | Not applicable. |
| RQ substances | (toluene, acetone) | Not applicable. | Not applicable. |

Additional information

DOT : Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements.

14. Transport information

IMDG : None identified.

IATA : None identified.

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Section 15. Regulatory information

United States

United States inventory (TSCA 8b) : All components are listed or exempted.

SARA 302/304

SARA 304 RQ : Not applicable.

Composition/information on ingredients

No products were found.

SARA 311/312

Classification : FLAMMABLE AEROSOLS - Category 1
 GASES UNDER PRESSURE - Compressed gas
 SKIN IRRITATION - Category 2
 EYE IRRITATION - Category 2A
 TOXIC TO REPRODUCTION (Unborn child) - Category 2
 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
 SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
 HNOC - Defatting irritant

Composition/information on ingredients

| Name | % | Classification |
|---------|-----------|---|
| acetone | ≥20 - ≤50 | FLAMMABLE LIQUIDS - Category 2 EYE IRRITATION - Category 2A SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 HNOC - Defatting irritant |
| toluene | ≥10 - ≤20 | FLAMMABLE LIQUIDS - Category 2 SKIN IRRITATION - Category 2 TOXIC TO REPRODUCTION (Unborn child) - Category 2 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 ASPIRATION HAZARD - Category 1 HNOC - Defatting irritant |
| propane | ≥10 - ≤20 | FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Compressed gas SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 |
| butane | ≥10 - ≤20 | FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Compressed gas |

Product code 00351706

Date of issue 16 November 2019 Version 7

Product name 55-611 PITT BULL SPRAY GLOSS WHITE

Section 15. Regulatory information

| | | |
|---|-------------|--|
| Solvent naphtha (petroleum), light aliph. | ≥5.0 - ≤10 | SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 ACUTE TOXICITY (oral) - Category 4 EYE IRRITATION - Category 2A SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 ASPIRATION HAZARD - Category 1 HNOC - Defatting irritant |
| Ligroine | ≥1.0 - ≤5.0 | FLAMMABLE LIQUIDS - Category 2 ACUTE TOXICITY (inhalation) - Category 4 EYE IRRITATION - Category 2A ASPIRATION HAZARD - Category 1 HNOC - Defatting irritant |

SARA 313

| | <u>Chemical name</u> | <u>CAS number</u> | <u>Concentration</u> |
|------------------------------|----------------------|-------------------|----------------------|
| Supplier notification | : toluene | 108-88-3 | 10 - 30 |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

Additional environmental information is contained on the Environmental Data Sheet for this product, which can be obtained from your PPG representative.

California Prop. 65

 **WARNING:** Reproductive Harm - www.P65Warnings.ca.gov.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

Health : 2 * **Flammability** : 4 **Physical hazards** : 0

(*) - Chronic effects

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on MSDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)

Health : 2 **Flammability** : 4 **Instability** : 0

Date of previous issue : 6/4/2018

Organization that prepared the MSDS : EHS

Key to abbreviations : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973

United States Page: 15/16

Product code 00351706

Date of issue 16 November 2019 **Version** 7

Product name 55-611 PITT BULL SPRAY GLOSS WHITE

Section 16. Other information

as modified by the Protocol of 1978. ("Marpol" = marine pollution)

N/A = Not available

SGG = Segregation Group

UN = United Nations

✔ Indicates information that has changed from previously issued version.

Disclaimer

The information contained in this data sheet is based on present scientific and technical knowledge. The purpose of this information is to draw attention to the health and safety aspects concerning the products supplied by PPG, and to recommend precautionary measures for the storage and handling of the products. No warranty or guarantee is given in respect of the properties of the products. No liability can be accepted for any failure to observe the precautionary measures described in this data sheet or for any misuse of the products.

SECTION 1: Identification of the substance/mixture and of the company/undertaking
1.1. Product identifier

Product form : Mixture
 Product name : Snoop

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Snoop® is a proprietary blend of water, non-ionic surfactants, and a bactericide.

1.3. Details of the supplier of the safety data sheet

Swagelok
 29495 F.A. Lennon Drive
 Solon, OH 44139 - United States
 T 440-349-5600 - F 440-519-3304

Supplier:
[Distributor, add your contact information](#)

www.swagelok.com

1.4. Emergency telephone number

Emergency number : **Infotrac:** North America: 1-800-535-5053 International: 1-352-323-3500

SECTION 2: Hazards identification
2.1. Classification of the substance or mixture
GHS US classification

Not classified- Non Hazardous

2.2. Label elements
GHS US labeling

No labeling applicable

2.3. Other hazards

Other hazards not contributing to the classification : Exposure may aggravate pre-existing eye, skin, or respiratory conditions.

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/Information on ingredients
3.1. Substances

Not applicable

3.2. Mixtures

Full text of H-phrases: see section 16

SECTION 4: First aid measures
4.1. Description of first aid measures

First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).
 First-aid measures after inhalation : Allow affected person to breathe fresh air. Allow the victim to rest.
 First-aid measures after skin contact : Remove affected clothing and wash all exposed skin area with mild soap and water, followed by warm water rinse.
 First-aid measures after eye contact : Rinse immediately with plenty of water. Obtain medical attention if pain, blinking or redness persists.
 First-aid measures after ingestion : Rinse mouth. Do NOT induce vomiting. Obtain emergency medical attention.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms/effects : Not expected to present a significant hazard under anticipated conditions of normal use.
 Symptoms/effects after inhalation : Prolonged exposure may cause irritation.
 Symptoms/effects after skin contact : Prolonged exposure may cause skin irritation.
 Symptoms/effects after eye contact : May cause slight irritation.

Snoop

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Symptoms/effects after ingestion : Ingestion may cause adverse effects.

4.3. Indication of any immediate medical attention and special treatment needed

If exposed or concerned, get medical advice and attention. If medical advice is needed, have product container and SDS at hand.

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media : Foam. Dry powder. Carbon dioxide. Water spray. Sand.

Unsuitable extinguishing media : Do not use a heavy water stream.

5.2. Special hazards arising from the substance or mixture

Fire hazard : Not considered flammable but may burn at high temperatures.

Explosion hazard : Product is not explosive.

Reactivity : Hazardous reactions will not occur under normal conditions.

5.3. Advice for firefighters

Firefighting instructions : Use water spray or fog for cooling exposed containers. Exercise caution when fighting any chemical fire. Prevent fire-fighting water from entering environment.

Protection during firefighting : Do not enter fire area without proper protective equipment, including respiratory protection.

Other information : Oxides of carbon and sulfur formed if burned.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : Use appropriate personal protection equipment (PPE).

6.1.1. For non-emergency personnel

Emergency procedures : Evacuate unnecessary personnel.

6.1.2. For emergency responders

Protective equipment : Equip cleanup crew with proper protection.

Emergency procedures : Ventilate area.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

For containment : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams.

Methods for cleaning up : Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Collect spillage. Store away from other materials.

Other information : Clean up spills immediately and dispose of waste safely. Transfer spilled material to a suitable container for disposal. Contact competent authorities after a spill.

6.4. Reference to other sections

See Heading 8. Exposure controls and personal protection.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Additional hazards when processed : Handle in accordance with standard industrial practices and ensure appropriate usage. Practice good housekeeping - spillage can be slippery on smooth surface either wet or dry.

Precautions for safe handling : Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work. Provide good ventilation in process area to prevent formation of vapor.

Hygiene measures : Do not eat, drink or smoke when using this product.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Keep only in the original container in a cool, well ventilated place away from: children. Keep container closed when not in use.

Incompatible products : Strong acids, strong bases, strong oxidizers, water-reactive materials.

Incompatible materials : Sources of ignition. Direct sunlight.

Storage area : Keep from freezing and extreme heat to protect quality of the product. Store in a dry, cool and well-ventilated place.

Snoop

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

7.3. Specific end use(s)

No additional information available

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Snoop | |
|-------|----------------|
| ACGIH | Not applicable |
| OSHA | Not applicable |

8.2. Exposure controls

| | |
|----------------------------------|--|
| Appropriate engineering controls | : Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure. Ensure good ventilation of the workstation. General industrial hygiene practice. |
| Personal protective equipment | : Avoid all unnecessary exposure. |
| Hand protection | : Wear protective gloves. |
| Eye protection | : Chemical goggles or safety glasses. |
| Skin and body protection | : Chemical resistant safety shoes. Impervious clothing. |
| Respiratory protection | : If exposure limits are exceeded or irritation is experienced, approved respiratory protection should be worn. In case of inadequate ventilation, oxygen deficient atmosphere, or where exposure levels are not known wear approved respiratory protection. |
| Environmental exposure controls | : Avoid release to the environment. |
| Other information | : Do not eat, drink or smoke during use. |

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|---|---------------------|
| Physical state | : Liquid |
| Color | : No data available |
| Odor | : Characteristic |
| Odor threshold | : No data available |
| pH | : No data available |
| Relative evaporation rate (butyl acetate=1) | : No data available |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : No data available |
| Flash point | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Flammability (solid, gas) | : No data available |
| Vapor pressure | : No data available |
| Relative vapor density at 20 °C | : No data available |
| Relative density | : No data available |
| Solubility | : No data available |
| Log Pow | : No data available |
| Log Kow | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |
| Explosive properties | : No data available |
| Oxidizing properties | : No data available |
| Explosion limits | : No data available |

9.2. Other information

No additional information available

Snoop

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 10: Stability and reactivity

10.1. Reactivity

Hazardous reactions will not occur under normal conditions.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids, strong bases, strong oxidizers, water-reactive materials.

10.6. Hazardous decomposition products

Hazardous fumes. Carbon monoxide. Carbon dioxide.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

| | |
|---|---|
| Acute toxicity | : Not classified |
| Skin corrosion/irritation | : Not classified |
| Serious eye damage/irritation | : Not classified |
| Respiratory or skin sensitization | : Not classified |
| Germ cell mutagenicity | : Not classified |
| Carcinogenicity | : Not classified |
| Reproductive toxicity | : Not classified |
| Specific target organ toxicity – single exposure | : Not classified |
| Specific target organ toxicity – repeated exposure | : Not classified |
| Aspiration hazard | : Not classified |
| Potential Adverse human health effects and symptoms | : Based on available data, the classification criteria are not met. |
| Symptoms/effects after inhalation | : Prolonged exposure may cause irritation. |
| Symptoms/effects after skin contact | : Prolonged exposure may cause skin irritation. |
| Symptoms/effects after eye contact | : May cause slight irritation. |
| Symptoms/effects after ingestion | : Ingestion may cause adverse effects. |

SECTION 12: Ecological information

12.1. Toxicity

No additional information available

12.2. Persistence and degradability

| | |
|-------------------------------|------------------|
| Snoop | |
| Persistence and degradability | Not established. |

12.3. Bioaccumulative potential

| | |
|---------------------------|------------------|
| Snoop | |
| Bioaccumulative potential | Not established. |

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

| | |
|------------------------------|---------------------------------------|
| Effect on ozone layer | : No additional information available |
| Effect on the global warming | : No known effects from this product. |

Snoop

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Other information : Avoid release to the environment.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Product/Packaging disposal recommendations : Dispose in a safe manner in accordance with local/national regulations.

Ecology - waste materials : Avoid release to the environment.

SECTION 14: Transport information

In accordance with DOT

Not regulated for transport

Additional information

Other information : No supplementary information available.

ADR

No additional information available

Transport by sea

No additional information available

Air transport

No additional information available

SECTION 15: Regulatory information

15.1. US Federal regulations

No additional information available

15.2. International regulations

CANADA

No additional information available

EU-Regulations

No additional information available

Classification according to Regulation (EC) No. 1272/2008 [CLP]

Classification according to Directive 67/548/EEC [DSD] or 1999/45/EC [DPD]

Not classified

15.2.2. National regulations

15.3. US State regulations

SECTION 16: Other information

Other information : None.

GHS US SDS

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.



SAFETY DATA SHEET

1. IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY UNDERTAKING

1.1 Identification of the Mixture:

Trade Name: SpecSeal® Series SSS Sealant
Product Name: SpecSeal® Series SSS Sealant
EC No.: Not Registered (or Not Subject to Registration)

1.2 Relevant Identified Uses of the substance and uses advised against:

Intended Use: Firestop and Sound Transmission

1.3 Details of the Supplier of the Safety Data Sheet:

Supplier Name: **Specified Technologies, Inc.**
Address: 210 Evans Way
Somerville, New Jersey 08876, USA
Business Phone: 1-908-526-8000
Email: techserv@stifirestop.com

1.4 Emergency Telephone Number of Supplier

Emergency Phone: USA 1-800-255-3924 (24 hrs)
International: +1-813-248-0585 (collect-24 hrs)

Hours of Operation: 24 Hours
Language: English

2. HAZARD IDENTIFICATION

2.1 Classification of substance or mixture

This product is not a hazardous mixture as defined by the criteria established by the OSHA Hazard Communication Standard (29 CFR 1910.1200) and of the United Nations Globally Harmonized System of Classification and Labelling of Chemicals (GHS).

2.1.1 Classification according to Regulation (EC) No 1272/2008 (CLP)

This product does not meet the criteria for classification in any hazard class according to Regulation (EC) No 1272/2008 on classification, labelling and packaging of substances and mixtures.

2.1.2 Classification according to Directive EC 67/548/EEC or 1999/45/EC as amended

This product does not meet the criteria for classification in any hazard class according to Directive EC 67/548/EEC or 1999/45/EC as amended on classification, labelling and packaging of substances and mixtures.

2.2 Label Elements

Label in accordance with (EC) No. 1272/2008: Not classified
Label in accordance with 1999/45/EC: Not classified

2.3 Other Hazards

This product does not contain any PBT or vPvB substances.

3. COMPOSITION and INFORMATION ON INGREDIENTS

3.1 Mixture Composition

This product does not meet the criteria for classification in any hazard class according to Regulation (EC) No 1272/2008 on classification, labelling and packaging of substances and mixtures.

4. FIRST-AID MEASURES

4.1 Description of first aid measures

| | |
|---------------|--|
| Inhalation: | Not anticipate based on product form If vapours are inhaled, remove person to fresh air. |
| Skin contact: | If mechanical irritation occurs, remove contaminated clothing and wash skin gently with soap and water. |
| Eye contact: | If this product contaminated the eyes, rinse eyes under gently running water. Use sufficient force to open eyelids and the "roll" eyes while flushing. Minimum flushing is 20 minutes |
| Ingestion: | If this product is swallowed, CALL PHYSICIAN OR POISON CONTROL CENTRE FOR MOST CURRENT INFORMATION. If professional advice is not available, DO NOT INDUCE VOMITING. Never induce vomiting or give diluents (milk or water) to someone who is unconscious, having convulsions, or unable to swallow. |

4.2 Most important symptoms and effects, both acute and delayed

Contact with skin, eyes, and upper respiratory system may cause mechanical irritation.

4.3 Indication of any immediate medical attention and special treatment needed

If any adverse reaction or discomfort continues from any of the above exposures, seek professional medical advice.

5. FIRE-FIGHTING MEASURES

5.1 Fire extinguishing media

5.1.1 Suitable extinguishing media

Water, foam, carbon dioxide (CO₂), and dry powder

5.1.2 Unsuitable extinguishing media

Not available

5.2 Special hazards arising from the substance or mixture

This product is formulated to be non-flammable and non-combustible. When involved in a fire, this material may decompose and produce irritating vapors and toxic gases.

5.3 Advice for Firefighters

In large fires in poorly ventilated areas involving packaging materials respiratory protection / breathing apparatus may be required.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment, and emergency procedures

6.1.1 For non-emergency personnel

Under normal handling conditions an accidental release is highly unlikely. Uncontrolled releases should be responded to by trained personnel.

6.1.2 For emergency personnel

Use personal protection recommended in Section 8 of the SDS

6.2 Environmental Precautions

The product should not be released into nature but collected and delivered according to agreement with local authorities and practices.

6.3 Methods and material for containment and clean up

In dusty environments, use vacuum equipment where possible to minimize dust levels.

6.3 References to other sections

For personal protection see section 8. For waste disposal see section 13.

7. HANDLING and USE

7.1 Precautions for Safe Handling

As with all chemicals, avoid getting this material ON YOU or IN YOU. Do not eat, drink, smoke, or apply cosmetics while handling this product. Wash hands thoroughly after handling this product or containers of this product. Avoid breathing fumes or vapors generated by this product. Use in a well-ventilated location.

7.2 Conditions for Safe Storage, including any incompatibilities

Store containers in a cool, dry location, away from direct sunlight, sources of intense heat. Do not store above 55°C (131°F).

7.3 Specific End Use(s)

This product is used as a sealant. Follow industry standards for use of this product.

8. EXPOSURE CONTROLS and PERSONAL PROTECTION

8.2 Exposure Controls – During normal handling of SpecSeal® SSS Sealant

8.2.1 Appropriate Engineering Controls

Engineering measures: Maintain sufficient mechanical or natural ventilation to that dust levels remain low. Use local exhaust if necessary. Power equipment should be equipped with properly designed dust collection devices.

8.2.2 Personal protection equipment

Eye/face Protection: Wear safety glasses as appropriate for the task.

Skin Protection: Minimize direct contact with skin. Wear chemical resistant gloves if needed to minimize contact with the product.

Other Skin Protection: After contact with the product, rinse skin in cold water to reduce potential effects of mechanical itching

Respiratory Protection: Respiratory protection is not required for normal use. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Thermal Hazards: Combustion: If exposed to extremely high temperatures, thermal decomposition may generate irritating fumes and toxic gases (e.g., aluminum, calcium, carbon, and sulfur oxides, and acrylic monomers).

8.2.3 Environmental exposure controls

This product should not be released into the environment. Controls should be engineered to prevent release to the environment, include procedures to prevent spills and releases to waterways.

9. PHYSICAL and CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Form: Paste.

Odor: Mild acrylic.

Flammable Limits (in air by volume, %): No data applicable.

Decomposition Temperature: No data available.

Auto ignition Temperature: No data available.

Freezing / Melting Points: No data available.

Vapor Pressure: No data available.

Vapor Density (air = 1): No data available.

Evaporation Rate (n-BuAc = 1): > 1

Solubility in Water: Insoluble.

Coefficient Waster/Oil Distribution: No data available

Color: Red

Odor Threshold: No data available

Oxidizing Properties: No data available

Percent Volatile: 20

Flash point: 320°C (608°F)

Boiling Point: > 100°C (> 212°F)

Specific Gravity (water = 1): 1.24

CARB VOC: 0.4 wt % (calc.)

SCAQMD (U.S. EPA Method 24): 29.2 gm/L

Solubility in Solvent: No data available

pH: Not available.

9.2 Other information

No additional properties information available

10. STABILITY and REACTIVITY

10.1 Reactivity

This product is stable when properly stored at normal temperature and pressures.

10.2 Chemical stability

This product is stable when properly stored at normal temperature and pressures.

10.3 Possibility of hazardous reactions

This product is incompatible with strong oxidizers.

10.4 Conditions to avoid

Avoid exposure to or contact with extreme temperatures and incompatible chemicals.

10.5 Incompatible materials

This product is incompatible with strong oxidizers.

10.6 Hazardous decomposition products

None in normal conditions of use.

Combustion: If exposed to extremely high temperatures, thermal decomposition may generate irritating fumes and toxic gases (e.g., aluminum, calcium, carbon, and sulfur oxides, and acrylic monomers).

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute Toxicity: No data were identified for the product.

Serious eye damage/irritation: Direct eye contact may cause irritation, redness, and tearing from mechanical irritation.

Skin Corrosion/Irritation: Prolonged and repeated skin exposure may cause dermatitis (dry skin).

Respiratory or skin sensitization: Inhalation of vapors may cause irritation of the nose, throat, and lungs and cause coughing. Due to the form of this product it is not expected to produce vapors.

Germ cell mutagenicity: No data were identified for this product.

Carcinogenicity: No data were identified for this finished product.
Reproductive Toxicity: No data available for this product.
Developmental Effects: No data were identified for this product.
STOT - Single exposure: No data were identified for this product.
STOT - Repeated exposure: No data were identified for this product.
Aspiration hazard: Not relevant

Likely Routes of exposure:

Ingestion: Ingestion is not a significant route of occupational exposure and is unlikely to occur.
Inhalation: Due to the form of this product it is not expected to produce vapors.
Respiratory protection is not required for normal use.
Eye contact: Direct eye contact may cause irritation, redness, and tearing from mechanical irritation
Symptoms associated with exposure: Contact with skin, eyes and upper respiratory system may cause mechanical irritation.

12. ECOLOGICAL INFORMATION

This material does not meet the criteria of environmentally hazardous according to the criteria of the UN Model Regulations (as reflected in the IMDG Code, ADR, RID, and ADN) and is not listed in Annex III under MARPOL 73/78.

12.1 Toxicity

This product is not ecotoxic to air, water or soil, by composition.

12.2 Persistence and Biodegradability

This product has not been tested for persistence or biodegradability. The mineral components are not expected to biodegrade to great extent.

12.3 Bioaccumulation Potential

This product has not been tested for bio-accumulation potential.

12.4 Mobility in soil

This product has not been tested for mobility in soil.

12.5 Results of PBT and vPvB assessment

Not relevant.

12.6 Other adverse effects:

None known.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Dispose of in accordance with local, state, and federal laws and regulations.

14. TRANSPORTATION INFORMATION

14.1 UN Number

Not regulated

14.2 UN proper shipping name

Not regulated

14.3 Transportation hazard class(es)

This product is not classified as dangerous goods under rules of IATA.

14.4 Packing group

Not regulated

14.5 Environmental hazards

Not regulated

14.6 Special precautions for user

Not regulated

14.7 Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

This material does not meet the criteria of environmentally hazardous according to the criteria of the UN Model Regulations (as reflected in the IMDG Code, ADR, RID, and ADN) and is not listed in Annex III under MARPOL 73/78.

15. REGULATORY INFORMATION

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

| | |
|--|---|
| EU Regulations: | Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006 concerning the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH), establishing a European Chemicals Agency, amending Directive 1999/45/EC and repealing Council Regulation (EEC) No 793/93 and Commission Regulations (EC) No 1488/94 as well as Council Directive 76/769/EEC and Commission Directives 91/155/EEC, 93/67/EEC, 93/105/EC and 2000/21/EC, including amendments. Regulation (EC) No 1272/2008 of the European Parliament and of the Council of 16 December 2008 on classification, labelling and packaging of substances and mixtures, amending and repealing Directives 67/548/EEC and 1999/45/EC, and amending Regulation (EC) No 1907/2006 with amendments. |
| National regulations (Germany): | |
| Restrictions of occupation: | Not relevant |
| Störfallverordnung (12.BImSchV): | Not relevant |
| Wassergefährdungsklasse (water hazard class): | Not relevant |
| Technische Anleitung Luft (TA-Luft): | Not relevant |
| Other regulations, restrictions and prohibition regulations: | Not relevant |

15.2 Chemical safety assessment

No Chemical Safety Assessment has been carried out for this product.

16. OTHER INFORMATION

The information contained herein is based on data available to us and is accurate and reliable to the best of our knowledge and belief. However, Specified Technologies, Inc. makes no representations as to its completeness or accuracy. Information is supplied on condition that persons receiving such information will make their own determination as to its suitability for their purposes prior to use.

Prepared by: Specified Technologies, Inc
Preparation Date: May 4, 2017
Version: 1

1. Product and Company Identification

| | |
|--------------------------------------|---|
| Product identifier | Nickel-Safe Ice Machine Cleaner (4287-08, 4287-34, 4841-AB, 4841-08) |
| Other means of identification | Not available |
| Recommended use | Cleaning scale from ice machines |
| Recommended restrictions | None known. |
| Manufacturer information | Nu-Calgon 2008 Altom Court St. Louis, MO 63146 US Phone: 314-469-7000 / 800-554-5499 Emergency Phone: 1-800-424-9300 (CHEMTREC) |
| Supplier | See above. |

2. Hazards Identification

| | | |
|-----------------------------------|-----------------------------------|------------|
| Physical hazards | Corrosive to metals | Category 1 |
| Health hazards | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 1 |
| Environmental hazards | Not classified. | |
| WHMIS 2015 defined hazards | Not classified | |
| Label elements | | |



| | |
|--|--|
| Signal word | Danger |
| Hazard statement | May be corrosive to metals. Causes skin irritation. Causes serious eye damage. |
| Precautionary statement | |
| Prevention | Wear eye/face protection. Wear protective gloves. Wash thoroughly after handling. Keep only in original packaging. |
| Response | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor. IF ON SKIN: Wash with plenty of water. Specific treatment (see information on this label). If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash it before reuse. Absorb spillage to prevent material-damage. |
| Storage | Store in a corrosion resistant container with a resistant inner liner. |
| Disposal | Dispose of waste and residues in accordance with local authority requirements. |
| WHMIS 2015: Health Hazard(s) not otherwise classified (HHNOC) | None known |
| WHMIS 2015: Physical Hazard(s) not otherwise classified (PHNOC) | None known |
| Hazard(s) not otherwise classified (HNOC) | None known. |
| Supplemental information | Not applicable. |

3. Composition/Information on Ingredients

Mixture

| Chemical name | Common name and synonyms | CAS number | % |
|-----------------|--------------------------|------------|-------|
| Phosphoric acid | | 7664-38-2 | 15-40 |
| Citric Acid | | 77-92-9 | 1-5 |

All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First Aid Measures

| | |
|---|---|
| Inhalation | If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Call a physician if symptoms develop or persist. |
| Skin contact | IF ON SKIN: Wash with plenty of water. If skin irritation occurs: Get medical advice/attention. Specific treatment (see information on this label). Take off contaminated clothing and wash it before reuse. |
| Eye contact | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor. |
| Ingestion | If swallowed, DO NOT induce vomiting. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Never give anything by mouth if victim is unconscious, or is convulsing. Obtain medical attention. |
| Most important symptoms/effects, acute and delayed | Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire Fighting Measures

| | |
|--|---|
| Suitable extinguishing media | Dry chemical powder. Foam. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire-fighting equipment/instructions | Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| Hazardous combustion products | Not available |

6. Accidental Release Measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep out of low areas. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Stop the flow of material, if this is without risk. Should not be released into the environment. Large Spills: Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Absorb spillage to prevent material damage. Absorb in vermiculite, dry sand or earth and place into containers. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. |
| Environmental precautions | Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground. |

7. Handling and Storage

| | |
|---|---|
| Precautions for safe handling | Do not get this material in contact with eyes. Avoid contact with skin. Avoid prolonged exposure. Avoid contact with clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. Use care in handling/storage. |
| Conditions for safe storage, including any incompatibilities | Store in corrosive resistant container with a resistant inner liner. Keep only in the original container. Keep container tightly closed. Store in a cool, dry place out of direct sunlight. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure Controls/Personal Protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|---------------------------------|------|---------------------|
| Phosphoric acid (CAS 7664-38-2) | PEL | 1 mg/m ³ |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|---------------------------------|------|---------------------|
| Phosphoric acid (CAS 7664-38-2) | STEL | 3 mg/m ³ |
| | TWA | 1 mg/m ³ |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---------------------------------|------|---------------------|
| Phosphoric acid (CAS 7664-38-2) | STEL | 3 mg/m ³ |
| | TWA | 1 mg/m ³ |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Chemical goggles are recommended.

Skin protection

Hand protection Rubber gloves. Confirm with a reputable supplier first.

Other Wear appropriate chemical resistant clothing.

Respiratory protection Not normally required if good ventilation is maintained.

Thermal hazards Not available.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and Chemical Properties

| | |
|---|----------------------|
| Appearance | Liquid |
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Green |
| Odor | Mild chemical |
| Odor threshold | Not available. |
| pH | < 1 |
| Melting point/freezing point | -0.4 °F (-18 °C) |
| Initial boiling point and boiling range | > 199.4 °F (> 93 °C) |
| Pour point | Not available. |
| Specific gravity | 1.19 |
| Partition coefficient (n-octanol/water) | Not available |
| Flash point | None |
| Evaporation rate | Not available |
| Flammability (solid, gas) | Not applicable. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available |
| Flammability limit - upper (%) | Not available |
| Explosive limit - lower (%) | Not available. |

| | |
|------------------------------------|----------------|
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available |
| Relative density | Not available. |
| Solubility(ies) | Complete |
| Auto-ignition temperature | Not available |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |

10. Stability and Reactivity

| | |
|---|---|
| Reactivity | Corrosive to metals. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Chemical stability | Material is stable under normal conditions. |
| Conditions to avoid | Reacts violently with strong alkaline substances. This product may react with reducing agents. Do not mix with other chemicals. |
| Incompatible materials | This product may react with reducing agents. Incompatible with bases. |
| Hazardous decomposition products | May include and are not limited to: Oxides of carbon. Oxides of phosphorus. |

11. Toxicological Information

| | | |
|---|---|---------------------|
| Routes of exposure | Inhalation. Ingestion. Skin contact. Eye contact. | |
| Information on likely routes of exposure | | |
| Ingestion | May cause stomach distress, nausea or vomiting. | |
| Inhalation | Prolonged inhalation may be harmful. | |
| Skin contact | Causes skin irritation. | |
| Eye contact | Causes serious eye damage. | |
| Symptoms related to the physical, chemical and toxicological characteristics | Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. Skin irritation. | |
| Information on toxicological effects | | |
| Acute toxicity | | |
| Components | Species | Test Results |
| Citric Acid (CAS 77-92-9) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Not available | |
| <i>Inhalation</i> | | |
| LC50 | Not available | |
| <i>Oral</i> | | |
| LD50 | Mouse | 5040 mg/kg |
| | Rat | 3000 mg/kg |
| Phosphoric acid (CAS 7664-38-2) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 2740 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Not available | |
| <i>Oral</i> | | |
| LD50 | Rat | 1530 mg/kg |
| Skin corrosion/irritation | Causes skin irritation. | |
| Exposure minutes | Not available. | |
| Erythema value | Not available. | |
| Oedema value | Not available. | |

| | |
|---|--|
| Serious eye damage/eye irritation | Causes serious eye damage. |
| Corneal opacity value | Not available. |
| Iris lesion value | Not available. |
| Conjunctival reddening value | Not available. |
| Conjunctival oedema value | Not available. |
| Recover days | Not available. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | Not listed. |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Teratogenicity | Not available. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not available. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological Information

Ecotoxicity Because of the low pH of this product, it would be expected to produce significant ecotoxicity upon exposure to aquatic organisms and aquatic systems.

Ecotoxicological data

| Components | | Species | Test Results |
|---------------------------------|------|--|---------------------|
| Citric Acid (CAS 77-92-9) | | | |
| <i>Acute</i> | | | |
| Crustacea | EC50 | Daphnia magna | 120 mg/L, 72 hr |
| Aquatic | | | |
| <i>Acute</i> | | | |
| Fish | LC50 | Bluegill (<i>Lepomis macrochirus</i>) | 1516 mg/L, 96 hr |
| Phosphoric acid (CAS 7664-38-2) | | | |
| Aquatic | | | |
| <i>Acute</i> | | | |
| Crustacea | LC50 | Water flea (<i>Daphnia magna</i>) | 4.6 mg/L, 12 hr |
| Fish | LC50 | Mosquitofish (<i>Gambusia affinis affinis</i>) | 3 - 3.5 mg/L, 96 hr |

| | |
|--------------------------------------|--|
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | Not available. |
| Mobility in soil | Not available. |
| Mobility in general | Not available. |
| Other adverse effects | Not available. |

13. Disposal Considerations

| | |
|--|---|
| Disposal instructions | Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. |

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport Information

Transport of Dangerous Goods (TDG) Proof of Classification In accordance with Part 2.2.1 (SOR/2014-152) of the Transportation of Dangerous Goods Regulations, we certify that the classification of this product is correct as of the SDS date of issue.

U.S. Department of Transportation (DOT)**Basic shipping requirements:**

| | |
|-----------------------------|---|
| UN number | UN3264 |
| Proper shipping name | Corrosive liquid, acidic, inorganic, n.o.s. |
| Technical name | Phosphoric acid |
| Hazard class | Limited Quantity - US |
| Packing group | III |
| Special provisions | IB3, T7, TP1, TP28 |
| Packaging exceptions | 154 |

Transportation of Dangerous Goods (TDG - Canada)**Basic shipping requirements:**

| | |
|-----------------------------|---|
| UN number | UN3264 |
| Proper shipping name | CORROSIVE LIQUID, ACIDIC, INORGANIC, N.O.S. |
| Technical name | Phosphoric acid |
| Hazard class | Limited Quantity - Canada |
| Packing group | III |
| Special provisions | 16 |

IATA/ICAO (Air)**Basic shipping requirements:**

| | |
|-----------------------------|---|
| UN number | UN3264 |
| Proper shipping name | Corrosive liquid, acidic, inorganic, n.o.s. |
| Technical name | Phosphoric acid |
| Hazard class | Limited Quantity - IATA |
| Packing group | III |

IMDG (Marine Transport)**Basic shipping requirements:**

| | |
|-----------------------------|---|
| UN number | UN3264 |
| Proper shipping name | CORROSIVE LIQUID, ACIDIC, INORGANIC, N.O.S. |
| Technical name | Phosphoric acid |
| Hazard class | Limited Quantity - IMDG |
| Packing group | III |

DOT; IMDG; TDG**IATA**

15. Regulatory Information

Canadian federal regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Not regulated.

WHMIS 2015 Exemptions

Not applicable

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Phosphoric acid (CAS 7664-38-2) Listed.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - No
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

No

SARA 311/312 Hazardous chemical

No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA)

Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Not listed.

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Not regulated.

DEA Exempt Chemical Mixtures Code Number

Not regulated.

FEMA Priority Substances Respiratory Health and Safety in the Flavor Manufacturing Workplace

Phosphoric acid (CAS 7664-38-2) High priority

Food and Drug Administration (FDA)

Not regulated.

US state regulations

See below

US - California Hazardous Substances (Director's): Listed substance

Phosphoric acid (CAS 7664-38-2) Listed.

US - Illinois Chemical Safety Act: Listed substance

Phosphoric acid (CAS 7664-38-2)

US - Louisiana Spill Reporting: Listed substance

Phosphoric acid (CAS 7664-38-2) Listed.

US - Minnesota Haz Subs: Listed substance

Phosphoric acid (CAS 7664-38-2) Listed.

US - New Jersey RTK - Substances: Listed substance

Phosphoric acid (CAS 7664-38-2)

US - Texas Effects Screening Levels: Listed substance

Citric Acid (CAS 77-92-9) Listed.

Phosphoric acid (CAS 7664-38-2) Listed.

US. Massachusetts RTK - Substance List

Phosphoric acid (CAS 7664-38-2)

US. New Jersey Worker and Community Right-to-Know Act

Not regulated.

US. Pennsylvania RTK - Hazardous Substances

Phosphoric acid (CAS 7664-38-2)

US. Rhode Island RTK

Phosphoric acid (CAS 7664-38-2)

US. California Proposition 65

This product is not subject to warning labeling under the California Proposition 65 regulation.

Inventory status


| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

16. Other Information

| LEGEND | |
|----------|---|
| Severe | 4 |
| Serious | 3 |
| Moderate | 2 |
| Slight | 1 |
| Minimal | 0 |

| | |
|----------------------------|-----|
| HEALTH | / 2 |
| FLAMMABILITY | 0 |
| PHYSICAL HAZARD | 0 |
| PERSONAL PROTECTION | X |



Disclaimer

Information contained herein was obtained from sources considered technically accurate and reliable. While every effort has been made to ensure full disclosure of product hazards, in some cases data is not available and is so stated. Since conditions of actual product use are beyond control of the supplier, it is assumed that users of this material have been fully trained according to the requirements of all applicable legislation and regulatory instruments. No warranty, expressed or implied, is made and supplier will not be liable for any losses, injuries or consequential damages which may result from the use of or reliance on any information contained in this document. The above SDS reflects the latest information on file with respect to hazards, properties and handling of this product. No warranty however, expressed or implied, is made with regard to the use of this information.

Issue date

29-April-2016

Version #

01

Effective date

29-April-2016

Prepared by

Nu-Calgon Technical Service Phone: (314) 469-7000



Safety Data Sheet

Issue Date 12-Aug-2013

Revision Date: 01-Oct-2017

Version 1

1. IDENTIFICATION

Product Identifier

Product Name Industrial Grade Silicone – Acetoxy Cure – Clear, White & Colors

Other means of identification

SDS # RD-0080A

Product Code 0816/OI, 0826OI Series

Recommended use of the chemical and restrictions on use

Recommended Use Silicone Sealant.

Details of the supplier of the safety data sheet

Supplier Address

Red Devil, Inc.
4175 Webb Street
Pryor, Oklahoma 74361
www.reddevil.com

Emergency Telephone Number

Company Phone Number 918-825-5744
Fax: 918-825-5761
Emergency Telephone (24 hr) INFOTRAC 1-352-323-3500 (International)
1-800-535-5053 (North America)

2. HAZARDS IDENTIFICATION

Classification

| | |
|-----------------------------------|------------|
| Skin corrosion/irritation | Category 2 |
| Serious eye damage/eye irritation | Category 2 |

Signal Word

Warning

Hazard Statements

Causes skin irritation
Causes serious eye irritation



Appearance Clear/opaque or colored
paste

Physical State Paste

Odor Acetic Acid Odor (Vinegar odor)

Precautionary Statements - Prevention

Wash face, hands and any exposed skin thoroughly after handling
Wear protective gloves/protective clothing/eye protection/face protection

Precautionary Statements - Response

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
Get medical attention
IF ON SKIN: Wash with plenty of soap and water
If skin irritation occurs: Get medical advice/attention
Take off contaminated clothing and wash it before reuse

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% |
|--------------------------------------|-------------|----------|
| Hydroxy-terminated Dimethyl siloxane | 70131-67-8 | >50 |
| Non-hazardous ingredients * | Proprietary | >10 |
| Amorphous silica (glass) | 7631-86-9 | <13 |
| Polydimethylsiloxane | 63148-62-9 | <10 |
| Methyltriacetoxysilane | 4253-34-3 | <6 |
| Titanium Dioxide | 13463-67-7 | <5 |
| Ethyltriacetoxysilane | 17689-77-9 | <6 |

* Unlisted ingredients are not considered hazardous under the OSHA GHS Hazard Communication Standard (29 CFR 1910.1200). (Methyltriacetoxysilane) Observe limits for acetic acid formed during curing on exposure to water or humid air. (Silica, amorphous; Titanium Dioxide) Inhalation of particulates unlikely due to product's physical state.

4. FIRST-AID MEASURES

First Aid Measures

- General Advice** Provide this SDS to medical personnel for treatment.
- Eye Contact** Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 5 minutes while holding the eyelid(s) open. Obtain medical attention.
- Skin Contact** No health effects expected. If irritation does occur, flush with lukewarm, gently flowing water for 5 minutes. If irritation persists, obtain medical advice.
- Inhalation** If symptoms are experienced remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice.
- Ingestion** Rinse mouth thoroughly with water. If irritation or discomfort occurs, obtain medical advice.

Most important symptoms and effects

- Symptoms** Causes skin irritation. May cause nose, throat & respiratory tract irritation. Direct contact with eyes may cause temporary irritation.

Indication of any immediate medical attention and special treatment needed

Notes to Physician Treat according to person's condition & specifics of exposure.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

Small Fire Use carbon dioxide (CO₂), dry chemical or water spray.

Large Fire Use dry chemical, foam or water spray.

Unsuitable Extinguishing Media Not determined.

Specific Hazards Arising from the Chemical

Not determined.

Hazardous Combustion Products Carbon oxides & traces of incompletely burned carbon compounds. Silicon dioxide. Formaldehyde.

Protective equipment and precautions for firefighters

Self-contained breathing apparatus & protective clothing should be worn in fighting large fires involving chemicals. Determine the need to evacuate or isolate the area according to your local emergency plan. Use water spray to keep fire exposed containers cool.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal Precautions Observe all personal protection equipment recommendations described in Sections 5 & 8.

Environmental Precautions See Section 12 for additional Ecological Information.

Methods and material for containment and cleaning up

Methods for Containment Prevent further leakage or spillage if safe to do so. Use absorbent material to contain spill.

Methods for Clean-Up Wipe up or scrape up & contain for salvage or disposal. Clean area as appropriate since spilled materials, even in small quantities, may present a slip hazard. Final cleaning may require use of steam, solvents or detergents. Dispose of saturated absorbent or cleaning materials appropriately, since spontaneous heating may occur. Local, state & federal laws & regulations may apply to releases & disposal of this material as well as those materials & items employed in the cleanup of releases. You will need to determine which federal, state & local laws & regulations are applicable. Sections 13 & 15 of this SDS provide information regarding certain federal & state requirements.

7. HANDLING AND STORAGE

Precautions for safe handling

Advice on Safe Handling Handle in accordance with good industrial hygiene and safety practice. Wash face, hands, and any exposed skin thoroughly after handling. Use personal protection recommended in Section 8. Use only in well-ventilated areas. Avoid contact with skin and eyes. Product evolves acetic acid (HOAc) when exposed to water or humid air.

Conditions for safe storage, including any incompatibilities

Storage Conditions Keep container closed & store away from water or moisture.

Incompatible Materials Oxidizing material can cause a reaction. Water, moisture or humid air can cause hazardous vapors to form as described in Section 8.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines Exposure guidelines / protective equipment are for routine handling and accidental spills

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|---------------------------------------|---------------------------|---|--|
| Amorphous silica (glass) 7631-86-9 | - | (vacated) TWA: 6 mg/m ³ <1% Crystalline silica TWA: 20 mppcf : (80)/(% SiO ₂) mg/m ³ TWA | IDLH: 3000 mg/m ³ TWA: 6 mg/m ³ |
| Titanium Dioxide 13463-67-7 | TWA: 10 mg/m ³ | TWA: 15 mg/m ³ total dust (vacated) TWA: 10 mg/m ³ total dust | IDLH: 5000 mg/m ³ |

Other Information Acetic acid is formed upon contact w/ water or humid air. Provide adequate ventilation to control exposures within guidelines of OSHA PEL: TWA 10 ppm & ACGIH TLV: TWA 10 ppm, STEL 15 ppm.

Appropriate engineering controls

Engineering Controls Ventilation must be adequate to maintain the ambient workplace atmosphere below the exposure limit(s) outlined in the SDS. Good general ventilation should be sufficient.

Individual protection measures, such as personal protective equipment

Eye/Face Protection Safety glasses as a minimum for protection.

Skin and Body Protection Wear suitable protective clothing.

Respiratory Protection No special equipment needed.

General Hygiene Considerations Note: These precautions are for room temperature handling. Use at elevated temperature or aerosol/spray applications may require added precautions. Handle in accordance with good industrial hygiene and safety practice. Wash @ mealtime & end of shift. Contaminated clothing & shoes should be removed as soon as practical & thoroughly cleaned before reuse.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | | | |
|------------------------------|-------------------------------|-------------------------|---------------------------------|
| Physical State | Paste | Odor | Acetic Acid Odor (Vinegar odor) |
| Appearance | Clear/opaque or colored paste | Odor Threshold | Not determined |
| Color | Various | Remarks • Method | |
| Property | Values | | |
| pH | Not determined | | |
| Melting Point/Freezing Point | Not determined | | |
| Boiling Point/Boiling Range | Not determined | | |
| Flash Point | Not applicable | | |
| Evaporation Rate | Not determined | | |

| | | |
|-------------------------------------|---|-----------------|
| Flammability (Solid, Gas) | Not determined | |
| Upper Flammability Limits | Not determined | |
| Lower Flammability Limit | Not determined | |
| Vapor Pressure | Not determined | |
| Vapor Density | Not determined | |
| Specific Gravity | ~1.04 | @ 25 °C (77 °F) |
| Water Solubility | Not determined | |
| Solubility in other solvents | Not determined | |
| Partition Coefficient | Not determined | |
| Autoignition Temperature | Not determined | |
| Decomposition Temperature | Not determined | |
| Kinematic Viscosity | Not determined | |
| Dynamic Viscosity | Not determined | |
| Explosive Properties | Not determined | |
| Oxidizing Properties | Not determined | |
| Additional Information | Note: The above information is not intended for use in preparing product specifications | |
| VOC Content (%) | < 3%/wt (< 40 g/L) | |

10. STABILITY AND REACTIVITY

Reactivity

Not reactive under normal conditions.

Chemical Stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

None under normal processing.

Hazardous Polymerization

Hazardous polymerization does not occur.

Conditions to Avoid

Incompatible Materials.

Incompatible Materials

Oxidizing material can cause a reaction. Water, moisture or humid air can cause hazardous vapors to form as described in Section 8.

Hazardous Decomposition Products

Thermal breakdown of this product during fire or very high heat conditions may evolve the following decomposition products: Carbon oxides & traces of incompletely burned carbon compounds. Silicon dioxide. Formaldehyde, Nitrogen oxides & metal oxides.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Product Information

Eye Contact

Causes serious eye irritation.

Skin Contact

Causes skin irritation. Can be absorbed through the skin.

Inhalation

May cause irritation of respiratory tract.

Ingestion

Can be harmful if swallowed.

Component Information

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|---------------------------------------|-----------------------|-------------------------|------------------------|
| Amorphous silica (glass) 7631-86-9 | > 5000 mg/kg (Rat) | > 2000 mg/kg (Rabbit) | > 2.2 mg/L (Rat) 1 h |
| Polydimethylsiloxane 63148-62-9 | > 17 g/kg (Rat) | > 2 g/kg (Rabbit) | - |
| Methyltriacetoxysilane 4253-34-3 | = 2060 mg/kg (Rat) | - | - |
| Titanium Dioxide 13463-67-7 | > 10000 mg/kg (Rat) | - | - |

Information on physical, chemical and toxicological effects

Symptoms Please see section 4 of this SDS for symptoms.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen. Titanium dioxide is a possible carcinogen when it appears as a respirable dust.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|---------------------------------------|-------|----------|-----|------|
| Amorphous silica (glass) 7631-86-9 | | Group 3 | | |
| Titanium Dioxide 13463-67-7 | | Group 2B | | X |

Group 2B - Possibly Carcinogenic to Humans
Group 3 IARC components are "not classifiable as human carcinogens"

X - Present

Numerical measures of toxicity

Not determined

12. ECOLOGICAL INFORMATION

Ecotoxicity

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Component Information

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to microorganisms | Crustacea |
|---------------------------------------|---|--|----------------------------|--|
| Amorphous silica (glass) 7631-86-9 | 440: 72 h Pseudokirchneriella subcapitata mg/L EC50 | 5000: 96 h Brachydanio rerio mg/L LC50 static | | 7600: 48 h Ceriodaphnia dubia mg/L EC50 |

Persistence/Degradability

Complete information is not yet available

Bioaccumulation

Complete information is not yet available

Mobility

Complete information is not yet available

Other Adverse Effects

Not determined

13. DISPOSAL CONSIDERATIONS

Waste Treatment Methods

| | |
|-------------------------------|---|
| Disposal of Wastes | Disposal should be in accordance with applicable regional, national and local laws and regulations. |
| Contaminated Packaging | Disposal should be in accordance with applicable regional, national and local laws and regulations. |

14. TRANSPORT INFORMATION

| | |
|-------------|---|
| Note | Please see current shipping paper for most up to date shipping information, including exemptions and special circumstances. |
| DOT | Not regulated |
| IATA | Not regulated |
| IMDG | Not regulated |

15. REGULATORY INFORMATION

International Inventories

Not determined

Legend:

- *United States Toxic Substances Control Act Section 8(b) Inventory*
- *Canadian Domestic Substances List/Non-Domestic Substances List*
- *European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances*
- *Japan Existing and New Chemical Substances*
- *China Inventory of Existing Chemical Substances*
- *Korean Existing and Evaluated Chemical Substances*
- *Philippines Inventory of Chemicals and Chemical Substances*

US Federal Regulations

SARA 311/312 Hazard Categories

| | |
|--|----|
| Acute Health Hazard | No |
| Chronic Health Hazard | No |
| Fire Hazard | No |
| Sudden Release of Pressure Hazard | No |
| Reactive Hazard | No |

SARA 313

Not determined

US State Regulations

California Proposition 65

This product contains the following Proposition 65 chemicals.

| Chemical Name | California Proposition 65 |
|-------------------------------|---------------------------|
| Titanium Dioxide - 13463-67-7 | Carcinogen |

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania |
|---------------------------------------|------------|---------------|--------------|
| Amorphous silica (glass) 7631-86-9 | X | X | X |
| Titanium Dioxide 13463-67-7 | X | X | X |

16. OTHER INFORMATION

| | | | | |
|-------------|-----------------------|---------------------|-------------------------|------------------------------|
| NFPA | Health Hazards | Flammability | Instability | Special Hazards |
| | 1 | 1 | 0 | Not determined |
| HMIS | Health Hazards | Flammability | Physical Hazards | Personal Protection |
| | 1 | 0 | 0 | B- Safety Glasses, Gloves |

Issue Date: 12-Aug-2013
 Revision Date: 01-Oct-2017
 Revision Note: New format

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

SAFETY DATA SHEET

SUPERIOR NO. 9

DATE REVISED: January 1, 2018

Product Name: Superior No. 9

Manufacturer: Superior Flux & Mfg. Co. 6615 Parkland Blvd. Cleveland, OH 44139

Emergency Phone Number: 1-800-424-9300 (CHEMTREC)

Other Information Calls: (440) 349-3000

To the Purchaser: This SDS contains important environmental, health, and toxicology information for your employees who have ordered this product. Please be sure this information is given to them. If you resell this product, a copy of the SDS should be given to the buyer.

H.M.I.S. INFORMATION: HEALTH = 2 FLAMMABILITY = 0 REACTIVITY = 0

SECTION I - IDENTIFICATION

Common Name: Superior No. 9

Chemical Family: Back-Up Welding Powder Flux

CAS Number: NA

Chemical Name: NA

Formula: See below

SECTION II – HAZARDS IDENTIFICATION

Classification of Substance or Mixture:

Classification (CLP): NA

Label Elements (CLP): NA



Risk Phrases: R36/37/38

Safety Phrases: S-26, S-27, S-36/37/39, S-45

See section XVI for full text description of S and R phrases

Other Hazards: None if used properly

SECTION III- COMPOSITION INFORMATION

| Components | CAS Number | % | OSHA PEL |
|-------------------|------------|-------|-----------------------|
| Calcium Fluoride | 7789-75-5 | 50-70 | 2.5 mg/m ³ |
| Sodium Fluoride | 7681-49-4 | 15-30 | 2.5 mg/m ³ |
| Boric Acid | 10043-35-3 | 5-10 | 10 mg/m ³ |
| Silicon Dioxide | 7631-86-9 | 5-10 | 10 mg/m ³ |
| Titanium Dioxide | 1317-80-2 | 5-10 | 10 mg/m ³ |
| Manganese Dioxide | 1313-13-9 | 1-4 | 5 mg/m ³ |
| Wollastonite | 10101-39-0 | 4-6 | 10 mg/m ³ |

Unlisted percentages are non-hazardous stabilizers, and water. None of the materials in this product are listed in NTP, IARC, or OSHA as carcinogens.

SECTION IV – FIRST AID MEASURES

Inhalation: Remove to fresh air
Eyes: Flush with water for fifteen (15) Minutes. Call physician.
Skin: Wash thoroughly with soap and water.
Ingestion: If patient is fully conscious, give large amounts of water. Obtain medical attention immediately.

Most Important Symptoms and effects, both acute and delayed

Primary Routes of Entry into Body: Fume inhalation, ingestion, skin, and eyes.

Symptoms of Overexposure: Salivation, coughing, choking, chills, may cause weight loss, brittle bones, anemia, and stiff joints.

Medical Conditions Generally Aggravated by Exposure: Any weakness of the lungs, kidneys or liver will be aggravated.

Chemical Listed as Carcinogen or Potential Carcinogen: None

OSHA Permissible Exposure Limit (PEL): 1 mg/m³

ACGIH Threshold Limit Value (TLV): 1 mg/m³

SECTION V - FIRE AND EXPLOSION HAZARD DATA

Flash Point: NA

Flammable Limits: NA

Extinguishing Media: Not necessary

Auto Ignition Temperature: None

Special Fire Fighting Procedures: Normal cautions when dealing with chemicals

Unusual Fire and Explosion Hazards: Fluorides

SECTION VI - ACCIDENTAL RELEASE MEASURES

Steps to be taken in case material is spilled: Clean up powder and flush remaining material with lots of water.

SECTION VII - HANDLING AND STORAGE

Storage Requirements: Store in plastic containers in cool area, away from heat.

Handling Precautions: Safe precautionary practices to avoid spills and exposure to skin and fumes.

Other Precautions: NA

SECTION VIII - CONTROL MEASURES

Respiratory Protection (TYPE): NIOSH approved respirator.

Ventilation: Yes

Mechanical (General): Yes

Local Exhaust: Yes

Protective Gloves: Recommended, NIOSH approved

Other Protective Clothing or Equipment: Rubber apron is recommended

Eye Protection: Safety Glasses

SECTION IX - PHYSICAL AND CHEMICAL CHARACTERISTICS

Boiling Point: NA
Percent Volatile by Volume: 0.5%
Vapor Pressure (mm Hg): NA
Evaporation Rate (Butyl Acetate = 1): NA
Vapor Density (Air = 1): NA
Solubility in Water: Sparingly Soluble
Melting Point: ~1250°C/2282°F
Appearance and Odor: Dark gray odorless powder
Reactivity in Water: None

SECTION X - STABILITY AND REACTIVITY

Stability: Product is stable (Conditions to Avoid): Metals
Incompatibility: Alkaline, strong oxidizing or reducing materials, cyanides or combustible materials.
Hazardous Decomposition Products: HCl, zinc chloride, zinc oxide, ammonium.
Hazardous Polymerization: Will not occur (Conditions to Avoid): Excessive heat or cold

SECTION XI - TOXICOLOGICAL INFORMATION

Acute Toxicity Data

- 1) **Oral:** LD-50 (rat): Not available
- 2) **Inhalation:** LC-50 (rat): Not available
- 3) **Dermal:** LD-50 (rabbit): Not available
- 4) **Skin Irritation:** (rabbit): Not available

Chronic Toxicity Data

- 1) **Repeated Skin Application:** (rat): Not available
 - 2) **Eye Irritation:** (rabbit): Not available
-

SECTION XII - ECOLOGICAL INFORMATION

This material has not been tested for environmental effects.

SECTION XIII - DISPOSAL CONSIDERATIONS

Waste Disposal Method: Dispose of in accordance with EPA regulations

SECTION XIV- TRANSPORTATION

D.O.T. Proper Shipping Name: Non-Hazardous
Hazard Class: NA
Identification Number: NA
Packing Group: NA
Type D.O.T Label Required Information: NA
Waste Disposal Method: Dispose of in accordance with EPA regulations

SECTION XV - REGULATORY INFORMATION

OSHA Hazardous Chemical According to 29 CFR 1910.1200: NA

Carcinogenicity Classification: (Components Present at 0.1% or More)

International Agency for Research on Cancer (IARC): NA

American Conference of Governmental Industrial Hygienists (ACGIH): NA

National Toxicology Program (NTP): NA

Occupational Safety and Health Administration (OSHA): NA

All Components of this Product are Listed on the U.S. Toxic Substances Control Act Inventory or Otherwise Comply with TSCA Pre-manufacture Notification Requirements.

This product is RoHS compliant.

SECTION XVI - OTHER INFORMATION

The labeling of this product is indicated in Section II. The full text of all abbreviations indicated by codes in the SDS are as follows:

| | |
|------------|---|
| R36 | Irritating to eyes |
| R37 | Irritating to respiratory system |
| R38 | Irritating to skin |
| | |
| S-26 | In case of eye contact, rinse thoroughly and get medical attention |
| S-27 | Take off immediately contaminated clothing |
| S-36/37/39 | Wear suitable protective clothing, gloves, and eye/face protection |
| S-45 | In case of accident or if feel unwell call medical advice immediately |

Further information:

Judgments as to the suitability of information herein or the purchaser's purposes are necessarily the purchaser's responsibility. Reasonable care has been taken in the preparation of this material, but there are **NO WARRANTIES, NO REPRESENTATIONS AND NO RESPONSIBILITY AS TO THE ACCURACY OR THE SUITABILITY OF THIS INFORMATION FOR ANY PURCHASER'S USE OR FOR ANY CONSEQUENCE TO USE.**

SECTION 1: Identification of the substance/mixture and of the company/undertaking
1.1. Product identifier

Product form : Mixture
 Trade name : CIP 150® Alkaline Process & Research Cleaner
 Product code : 1D15

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Alkaline Cage Wash Detergent
 Use of the substance/mixture : For industrial and institutional use only. Not for home use.

1.3. Details of the supplier of the safety data sheet

STERIS Corporation
 P. O. Box 147, St. Louis, MO 63166, US
 Telephone Number for Information: 1-800-444-9009 (Customer Service-Scientific Products)

1.4. Emergency telephone number

Emergency number : US Emergency Telephone No.1-314-535-1395 (STERIS); 1-800-424-9300 (CHEMTREC)

SECTION 2: Hazards identification
2.1. Classification of the substance or mixture
GHS-US classification

Acute Tox. 4 (Oral) H302
 Skin Corr. 1A H314
 Eye Dam. 1 H318

2.2. Label elements
GHS-US labelling

Hazard pictograms (GHS-US) :



GHS05

GHS07

Signal word (GHS-US) :

: Danger

Hazard statements (GHS-US) :

: H302 – Harmful if swallowed.
 H314 – Causes severe skin burns and eye damage.
 H318 – Causes serious eye damage.

Precautionary statements (GHS-US) :

: P260 – Do not breathe mist, spray, vapors.
 P264 – Wash hands thoroughly after handling.
 P270 – Do not eat, drink or smoke when using this product.
 P280 – Wear eye protection, protective clothing, protective gloves.
 P301+P330+P331 – IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
 P303+P361+P353 – IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
 P304+P340 – IF INHALED: Remove person to fresh air and keep comfortable for breathing
 P305+P351+P338 – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 P310 – Immediately call a POISON CENTER/doctor.
 P363 – Wash contaminated clothing before reuse.

2.3. Other hazards

No additional information available.

2.4. Unknown acute toxicity (GHS-US)

No data available.

SECTION 3: Composition/information on ingredients**3.1. Substance**

Not applicable.

3.2. Mixture

| Name | Product identifier | % | GHS-US classification |
|---------------------|--|---------|-----------------------------|
| Potassium hydroxide | (CAS No) 1310-58-3 (REACH No) 01-2119487136-33-0057 | 10 - 15 | H302 Skin Corr. 1A, H314 |
| Sodium hypochlorite | (CAS No) 7681-52-9 | 1 - 5 | Skin Corr. 1B, H314 |

Full text of H-phrases: see Section 16.

SECTION 4: First aid measures**4.1. Description of first aid measures**

- First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).
- First-aid measures after inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, give artificial respiration. Get medical attention.
- First-aid measures after skin contact : Immediately flush skin with plenty of water for at least 15 minutes. Remove/Take off immediately all contaminated clothing. Obtain medical attention.
- First-aid measures after eye contact : In case of contact with eyes flush immediately with plenty of flowing water for 10 to 15 minutes holding eyelids apart and consult an ophthalmologist. Remove contact lenses, if present and easy to do. Continue rinsing. Seek medical attention immediately.
- First-aid measures after ingestion : If swallowed, rinse mouth with water (only if the person is conscious). Immediately call a POISON CENTER or doctor/physician. Do NOT induce vomiting. Give water to drink if victim completely conscious/alert.

4.2. Most important symptoms and effects, both acute and delayed

- Symptoms/injuries : Causes severe skin burns and eye damage.
- Symptoms/injuries after inhalation : Inhalation of mists is extremely irritating to mucous membranes and upper respiratory tract.
- Symptoms/injuries after skin contact : Caustic burns/corrosion of the skin.
- Symptoms/injuries after eye contact : Causes serious eye damage.
- Symptoms/injuries after ingestion : Swallowing a small quantity of this material will result in serious health hazard. Although ingestion is an unlikely route of entry, ingestion will cause corrosion of the mouth and the upper gastrointestinal tract. Swelling of the tissues in the throat and mouth may result in extreme difficulty in swallowing. Significant swelling may restrict air passages. In all cases of ingestion, the risk of aspiration into the lungs exists. Entry into the lungs can cause permanent damage to the lungs resulting in pulmonary edema. This condition may lead to death.

4.3. Indication of any immediate medical attention and special treatment needed

No additional information available.

SECTION 5: Firefighting measures**5.1. Extinguishing media**

- Suitable extinguishing media : Use extinguishing media appropriate for surrounding fire. Foam. Dry powder. Carbon dioxide. Water spray.

5.2. Special hazards arising from the substance or mixture

No additional information available.

5.3. Advice for firefighters

- Firefighting instructions : Exercise caution when fighting any chemical fire. Prevent fire-fighting water from entering environment.
- Protective equipment for firefighters : Use self-contained breathing apparatus. Do not enter fire area without proper protective equipment, including respiratory protection.
- Other information : May react with soft metals to evolve flammable hydrogen gas. Thermal decomposition generates: Corrosive vapors. Fume. Carbon monoxide. CO₂, HCl, Cl₂, HOCl, hydrogen gas.

CIP 150[®]

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : Do not breathe fumes, vapors. Avoid contact with skin, eyes and clothes. Use personal protective equipment as required. Stop leak if safe to do so.

6.1.1. For non-emergency personnel

Protective equipment : Wear suitable protective clothing. For further information refer to Section 8: Exposure-controls/personal protection.

Emergency procedures : Stop leak if safe to do so. Evacuate unnecessary personnel.

6.1.2. For emergency responders

Protective equipment : Equip cleanup crew with proper protection.

Emergency procedures : Ventilate area.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters. Avoid release to the environment.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams. Ensure all national/local regulations are observed. Neutralize spill carefully with any weak acid and flush remainder with plenty of water. Consult hazardous waste contractor for disposal of large amounts. Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Collect in closed containers for disposal. Store away from other materials. Wash contaminated areas with large quantities of water to a sanitary sewer, if in accordance with local, state or national legislation.

6.4. Reference to other sections

See Heading 8. Exposure controls and personal protection.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Product for industrial use only. Read label before use. Avoid contact with skin, eyes and clothing. Avoid breathing mist or vapor. Provide good ventilation in process area to prevent formation of vapor. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.

Hygiene measures : Wash hands thoroughly after handling. Take care for general good hygiene and housekeeping. Do not eat, drink or smoke when using this product. Wash contaminated clothing before reuse. Separate working clothes from town clothes. Launder separately.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : A washing facility/water for eye and skin cleaning purposes should be present. Provide adequate ventilation. Comply with applicable regulations.

Storage conditions : Keep only in the original container in a cool, well ventilated place. Keep out of reach of children. Keep away from incompatible materials. Keep container closed when not in use.

Incompatible materials : Acids, soft metals, oxidizers, organic halogen compounds. Contact with some metals such as magnesium, aluminum, zinc (galvanized), tin, chromium, brass and bronze may generate hydrogen. Reacts violently with acids liberating irritating gas. May evolve flammable hydrogen gas on contact with soft metals.

7.3. Specific end use(s)

No additional information available.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Potassium hydroxide (1310-58-3)

| | | |
|-----------|------------------------------------|---------------------|
| USA ACGIH | ACGIH Ceiling (mg/m ³) | 2 mg/m ³ |
|-----------|------------------------------------|---------------------|

8.2. Exposure controls

Appropriate engineering controls : Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of mists and/or vapors below the recommended exposure limits. Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure.

CIP 150[®]

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

Personal protective equipment : Personal protective equipment should be selected based upon the conditions under which this product is handled or used. protective clothing. Protective clothing. Gloves. Protective goggles. For certain operations, additional Personal Protection Equipment (PPE) may be required.



Hand protection : Wear rubber gloves.
Eye protection : Wear chemical goggles or face shield.
Skin and body protection : Wear suitable protective clothing. Rubber apron, boots.
Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment.
Other information : Do not eat, drink or smoke during use.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Liquid
Appearance : Clear
Color : Light yellow
Odor : Chlorine odor
Odor threshold : No data available
pH : No data available
pH solution : 11.8 - 12.2 (1% solution)
Relative evaporation rate (butyl acetate=1) : No data available
Melting point : No data available
Freezing point : No data available
Boiling point : No data available
Flash point : No data available
Auto-ignition temperature : No data available
Decomposition temperature : No data available
Flammability (solid, gas) : Non-flammable
Vapor pressure : No data available
Relative vapor density at 20 °C : No data available
Relative density : No data available
Density : ca. 1.16 g/ml Specific Gravity
Solubility : Water: Completely soluble
Log Pow : No data available
Log Kow : No data available
Viscosity, kinematic : No data available
Viscosity, dynamic : No data available
Explosive properties : No data available
Oxidizing properties : No data available
Explosive limits : No data available.

9.2. Other information

No additional information available.

SECTION 10: Stability and reactivity

10.1. Reactivity

No additional information available.

10.2. Chemical stability

Stable under normal conditions of use.

CIP 150®

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

keep away from incompatible materials. Heat. Direct sunlight.

10.5. Incompatible materials

Strong oxidizers. Strong acids. Strong bases.

10.6. Hazardous decomposition products

CO₂, HCl, Cl₂, HOCl, hydrogen gas. Fumes.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Corrosive to mouth, throat, and stomach.

| Potassium hydroxide (1310-58-3) | |
|---------------------------------|--------------------------|
| LD50 oral rat | 214 mg/kg |
| ATE CLP (oral) | 500.000 mg/kg bodyweight |

| Sodium hypochlorite (7681-52-9) | |
|---------------------------------|---------------------------|
| LD50 oral rat | 8200 mg/kg |
| LD50 dermal rabbit | > 10000 mg/kg |
| ATE CLP (oral) | 8200.000 mg/kg bodyweight |

| Potassium silicate (1312-76-1) | |
|--------------------------------|---------------------------|
| LD50 oral rat | 1300 mg/kg |
| ATE CLP (oral) | 1300.000 mg/kg bodyweight |
| IARC group | 3 - Not classifiable |

| | |
|---|--|
| Skin corrosion/irritation | : Causes severe skin burns pH: ca. 12 |
| Serious eye damage/irritation | : Causes serious eye damage pH: ca. 12 |
| Respiratory or skin sensitisation | : Not classified Based on available data, the classification criteria are not met |
| Germ cell mutagenicity | : Not classified Based on available data, the classification criteria are not met |
| Carcinogenicity | : Not classified Based on available data, the classification criteria are not me |
| Reproductive toxicity | : Not classified Based on available data, the classification criteria are not met |
| Specific target organ toxicity (single exposure) | : Not classified Based on available data, the classification criteria are not met |
| Specific target organ toxicity (repeated exposure) | : Not classified Based on available data, the classification criteria are not met |
| Aspiration hazard | : Not classified Based on available data, the classification criteria are not met |
| Potential Adverse human health effects and symptoms | : Harmful if swallowed. |

SECTION 12: Ecological information

12.1. Toxicity

Ecology - water : Very toxic to aquatic life.

| CIP 150® Alkaline Process & Research Cleaner | |
|--|--|
| LC50 fishes 1 | > 750 mg/l (Fish - Pimephales promelas) (10% Solution) |

CIP 150®

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

| Sodium hypochlorite (7681-52-9) | |
|---------------------------------|--|
| LC50 fishes 1 | 0.06 - 0.11 mg/l (Exposure time: 96 h - Species: Pimephales promelas [Flow-through]) |
| EC50 Daphnia 1 | 0.033 - 0.044 mg/l (Exposure time: 48 h - Species: Daphnia magna [Static]) |
| LC50 fish 2 | 4.5 - 7.6 mg/l (Exposure time: 96 h - Species: Pimephales promelas [Static]) |

12.2. Persistence and degradability

| CIP 150® Alkaline Process & Research Cleaner | |
|--|---|
| Persistence and degradability | The surfactant(s) contained in this preparation complies (comply) with the biodegradability criteria as laid down in Regulation (EC) No. 648/2004 on detergents. Data to support this assertion are held at the disposal of the competent authorities of the Member States and will be made available to them, at their direct request or at the request of a detergent manufacturer. |

12.3. Bioaccumulative potential

| CIP 150® Alkaline Process & Research Cleaner | |
|--|-------------------------------|
| Bioaccumulative potential | Not established. |
| Potassium hydroxide (1310-58-3) | |
| Log Pow | 0.65 |
| Potassium silicate (1312-76-1) | |
| BCF fish 1 | (no bioaccumulation expected) |

12.4. Mobility in soil

No additional information available.

12.5. Other adverse effects


Other information : Avoid release to the environment.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

| | |
|--------------------------------|--|
| Waste disposal recommendations | : Dispose in a safe manner in accordance with local/national regulations. Do not contaminate water with the product or its container (Do not clean application equipment near surface water/Avoid contamination via drains from farmyards and roads.) High concentration in receiving water will injure aquatic life by pH effect. Do not re-use empty containers. |
| Additional information | : Never return unused material to original container. Empty containers should be thoroughly rinsed with large quantities of clean water. Dispose of empty containers and wastes safely. Containers may be send for reconditioning, recycling. Dispose in a safe manner in accordance with local/national regulations. Small spills may be flushed to a sanitary sewer with copious amounts of water, if in accordance with local, state or national legislation. |
| Ecology - waste materials | : Avoid release to the environment. |

SECTION 14: Transport information

| | |
|---|---|
| In accordance with DOT | |
| Transport document description | : UN3266 CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S. (Potassium Hydroxide and Sodium Hypochlorite Solution) 8, III |
| UN-No.(DOT) | : 3266 |
| DOT NA no. | : UN3266 |
| DOT Proper Shipping Name | : CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S. |
| Department of Transportation (DOT) Hazard Classes | : 8 - Class 8 - Corrosive material 49 CFR 173.136 |
| Hazard labels (DOT) | : 8 - Corrosive |
| |  |
| Packing group (DOT) | : III - Minor Danger |

CIP 150[®]

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

Additional information

Special transport precautions : NOT approved for air shipment.

ADR

No additional information available.

Transport by sea

No additional information available.

Air transport

NOT approved for air shipment.

SECTION 15: Regulatory information

15.1. US Federal regulations

Potassium hydroxide (1310-58-3)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

RQ (Reportable quantity, Section 304 of EPA's List of Lists) : 1000 lb

Sodium hypochlorite (7681-52-9)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

15.2. US State regulations

No additional information available.

SECTION 16: Other information

Revision date : 10/29/2018

Other information : None.

Full text of H-phrases:

| | |
|---------------------|---|
| Acute Tox. 4 (Oral) | Acute toxicity (oral), Category 4 |
| Eye Dam. 1 | Serious eye damage/eye irritation, Category 1 |
| Skin Corr. 1A | Skin corrosion/irritation, Category 1A |
| Skin Corr. 1B | Skin corrosion/irritation, Category 1B |
| H302 | Harmful if swallowed |
| H314 | Causes severe skin burns and eye damage |
| H318 | Causes serious eye damage |

NFPA health hazard


: 3 - Short exposure could cause serious temporary or residual injury even though prompt medical attention was given.

NFPA fire hazard

: 1 - Must be preheated before ignition can occur.

NFPA reactivity

: 1 - Normally stable, but can become unstable at elevated temperatures and pressures or may react with water with some release of energy, but not violently.



SDS US

The information on this sheet is not a specification and does not guarantee specific properties. The information is intended to provide general knowledge as to health and safety based upon our knowledge of the handling, storage and use of the product. It is not applicable to unusual or non-standard uses of the product or where instruction or recommendations are not followed.

MATERIAL SAFETY DATA SHEET

MSDS 0155

 =====
 Section 1 -- PRODUCT AND COMPANY IDENTIFICATION

| | | | |
|---------------------|-----------------------------------|---------------------------------|---|
| PRODUCT NAME | RectorSeal Cold Galvanizing Spray | HMIS CODES | |
| | | Health | 2 |
| | | Flammability | 3 |
| | | Reactivity | 0 |
| PRODUCT CODES | 86625 | PPI | B |
| CHEMICAL FAMILY | Organic | | |
| USE | Metal coating | | |
| MANUFACTURER'S NAME | The RectorSeal Corporation | EMERGENCY TELEPHONE NO. | |
| | 2601 Spenwick Drive | Chemtrec 24 Hours | |
| | Houston, Texas 77055 USA | (800)424-9300 USA | |
| | | (703)527-3887 International | |
| DATE OF VALIDATION | November 28, 2012 | TECHNICAL SERVICE TELEPHONE NO. | |
| | | (800)231-3345 or (713)263-8001 | |
| DATE OF PREPARATION | November 28, 2012 | | |

 =====
 Section 2 -- HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

OSHA Hazards

Flammable gas, Compressed Gas, Target Organ Effect, Irritant

TARGET ORGANS

Liver, Kidney, Bladder, Brain.

GHS CLASSIFICATION

PHYSICAL HAZARDS: Flammable gases (Category 1)

Gases under pressure (Liquefied gas)

HEALTH HAZARDS

Acute toxicity, Inhalation (Category 4)

Skin irritation (Category 2)

Eye irritation (Category 2A)

Reproductive toxicity (Category 2)

Specific target organ toxicity - single exposure (Category 2)

Specific target organ toxicity - single exposure (Category 3)

Aspiration hazard (Category 1)

Acute aquatic toxicity (Category 2)

 GHS Label elements, including precautionary statements

Pictogram: Flammable, Compressed Gas, Health Hazard, Harmful / Irritant,

Signal Word: Danger

Hazard Statements:

H220 - Extremely flammable gas.

H225 - Highly flammable liquid and vapour.

H304 - May be fatal if swallowed and enters airways.

H315 - Causes skin irritation.

H319 - Causes serious eye irritation.

H332 - Harmful if inhaled.

H336 - May cause drowsiness or dizziness.

H361 - Suspected of damaging fertility or the unborn child.

H371 - May cause damage to organs.

H401 - Toxic to aquatic life.

Precautionary Statements:

P102 - Keep out of reach of children.

P210 - Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P260 - Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.

1399

P281 - Use personal protective equipment as required.

P301 + P310 - IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.

P305 + P351 + P338 - IF IN EYES: Rinse cautiously with water for several minutes.

Remove contact lenses, if present and easy to do. Continue rinsing.

P331 - Do NOT induce vomiting.

SUMMARY OF ACUTE HAZARDS

Repeated inhalation may cause dizziness, nausea and CNS effects. May cause severe eye and skin irritation.

ROUTE OF EXPOSURE, SIGNS AND SYMPTOMS

INHALATION

Inhalation of high concentrations may cause central nervous system effects characterized by headache, dizziness, drowsiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure.

EYE CONTACT

Contact with eyes may cause severe irritation.

SKIN CONTACT

Irritation and drying.

INGESTION

May cause irritation of the digestive tract. May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure.

SUMMARY OF CHRONIC HAZARDS

Skin irritation, contact dermatitis, and defatting.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Individuals with pre-existing or chronic diseases of the eyes, skin, respiratory system, cardiovascular system, gastrointestinal system, liver, or kidneys may have increased susceptibility to excessive exposure.

=====
Section 3 -- COMPOSITION/INFORMATION ON INGREDIENTS

INGREDIENT: Propane

PERCENTAGE BY WEIGHT: --

CAS NUMBER: 68476-85-7

EC# : 200-827-9

INGREDIENT: Toluene

PERCENTAGE BY WEIGHT: 20 Max

CAS NUMBER: 109-99-9

EC# : 203-625-9

INGREDIENT: Xylene

PERCENTAGE BY WEIGHT: 10 Max

CAS NUMBER: 1330-20-7

EC# : 203-576-3

INGREDIENT: Zinc Dust

PERCENTAGE BY WEIGHT: 40 Max

CAS NUMBER: 7440-66-6

EC# : 231-175-3
=====

Section 4 -- FIRST AID MEASURES

If INHALED: If overcome by exposure, remove victim to fresh air immediately. Give oxygen or artificial respiration as needed. Obtain emergency medical attention. Prompt action is essential.

If on SKIN: Immediately wash with soap and water. Remove and wash any contaminated clothing.

If in EYES: Flush eyes with large amounts of water for 15 minutes. Get medical attention if irritation persists.

If SWALLOWED: If swallowed, call a physician immediately. Only induce vomiting at the instruction of a physician. Never give

anything by mouth to an unconscious person.

Section 5 -- FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Foam, dry chemical, CO2, or water fog.
SPECIAL FIRE FIGHTING PROCEDURES: Wear self-contained full face piece breathing apparatus and full body protective clothing. Hazardous decomposition products possible (see Section 10). Evacuate area. Dike area as run-off may create additional environmental contamination.
UNUSUAL FIRE AND EXPLOSION HAZARDS: Aerosol cans are under pressure - exposure to temperatures above 120F can cause bursting or "rocketing" of cans.

Section 6 -- ACCIDENTAL RELEASE MEASURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: Use absorbent materials to prevent footing hazard and to contain. Ventilate area with forced air ventilation. Avoid flushing into sewers, drains, waterways, and soil. Wear protective clothing and respiratory protection during cleanup.

Section 7 -- HANDLING AND STORAGE

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING: Shake well before using. Keep away from heat and open flames. Prolonged exposure to direct sunshine or storage above 120 F may cause can to burst. Do not puncture or incinerate can. OTHER PRECAUTIONS: Avoid prolonged or repeated contact with skin or clothing. Empty containers may contain residues; treat as if full and observe all products precautions.

Section 8 -- EXPOSURE CONTROLS/PERSONAL PROTECTION

Table with 2 columns: INGREDIENT and UNITS. Rows include Propane, Toluene, Xylene, and Zinc Dust with their respective ACGIH TLV, OSHA PEL, and OSHA STEL values.

RESPIRATORY PROTECTION (SPECIFY TYPE): In confined, poorly ventilated areas, use NIOSH/MSHA approved air purifying or supplied air respirator.
VENTILATION - LOCAL EXHAUST: Acceptable
SPECIAL: Explosion proof
MECHANICAL (GENERAL): Acceptable
OTHER: N/A
PROTECTIVE GLOVES: Wear rubber gloves.
EYE PROTECTION: Safety glasses (ANSI Z-87.1 or equivalent)
OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Chemical resistant coveralls recommended.
WORK/HYGIENIC PRACTICES: Where use can result in skin contact, wash exposed areas thoroughly before eating, drinking, smoking, or leaving work area. Launder contaminated clothing before reuse.

Section 9 -- PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: >165 F 74 C) @ 760mm Hg
SPECIFIC GRAVITY (H2O = 1): 1.00
VAPOR PRESSURE (mm Hg): N/D

MELTING POINT: N/A
 VAPOR DENSITY (AIR = 1): <1
 EVAPORATION RATE (ETHYL ACETATE = 1): >1
 APPEARANCE/ODOR: Gray Liquid / Petroleum Odor
 SOLUBILITY IN WATER: Slightly
 FLASH POINT: N/D
 AEROSOL FLAME EXTENSION: Positive
 NFPA AEROSOL LEVEL: 3
 VOLATILE ORGANIC COMPOUNDS(VOC)Content
 (Theoretical Percentage By Weight): 64.5% or (645 g/L)

=====
 Section 10 -- STABILITY AND REACTIVITY

STABILITY: Stable
 CONDITIONS TO AVOID: Do not store in temperatures above 120 F.
 INCOMPATIBILITY (MATERIALS TO AVOID): Oxidizers, acids and bases.
 HAZARDOUS DECOMPOSITION PRODUCTS: CO, CO, and fragmented hydrocarbons.
 HAZARDOUS POLYMERIZATION: Will not occur.

=====
 Section 11 -- TOXICOLOGY INFORMATION

CHRONIC HEALTH HAZARDS

No ingredient in this product is an IARC, NTP or OSHA listed carcinogen.

 TOXICOLOGY DATA

Ingredient Name

 Propane
 Oral-Rat LD50:N/D
 Inhalation-Rat LC50:N/D
 Toluene
 Oral-Rat LD50:5000 mg/kg
 Inhalation-Rat LCLo:4000 ppm/4H
 Xylene
 Oral-Rat LD50:4300 mg/kg
 Inhalation-Rat LC50:5000 ppm/4H
 Zinc Dust
 Oral-Rat LD50:N/D
 Inhalation-Rat LC50:N/D

=====
 Section 12 -- Ecological Information

ECOLOGICAL DATA

Ingredient Name

 Propane
 Food Chain Concentration Potential: None
 Waterfowl Toxicity: None
 BOD: None
 Aquatic Toxicity: None
 Toluene
 Food Chain Concentration Potential: None
 Waterfowl Toxicity: N/A
 BOD: 38%
 Aquatic Toxicity: 1180 mg/l/96 hr/sunfish/TLm
 Xylene
 Food Chain Concentration Potential: N/A
 Waterfowl Toxicity: N/A
 BOD: 0%
 Aquatic Toxicity: 22 ppm/96 hr/bluegill/TLm
 Zinc Dust
 Food Chain Concentration Potential: N/D
 Waterfowl Toxicity: N/D
 BOD: N/D
 Aquatic Toxicity: N/D

=====
 Section 13 -- DISPOSAL CONSIDERATIONS

Waste Classification: Aerosols

Disposal Method: Empty containers can be disposed of in trash. Full containers should be depressurized to separate liquid phase.

Dispose of all liquid waste in accordance with all local, state and federal regulations.

 =====
 Section 14 -- TRANSPORTATION INFORMATION

DOT: UN1950, Aerosols, 2.1, Limited Quantities or LTD QTY

OCEAN (IMDG): UN1950, Aerosols, 2.1, Limited Quantities or LTD QTY, EmS No. F-D, S-U

AIR (IATA): UN1950, Aerosols, 2.1, ERG#126

 =====
 Section 15 -- REGULATORY INFORMATION

REGULATORY DATA

 Ingredient Name

Propane

| | |
|----------------|-----|
| SARA 313 | No |
| TSCA Inventory | Yes |
| CERCLA RQ | N/A |
| RCRA Code | N/A |

Toluene

| | |
|----------------|------------|
| SARA 313 | Yes |
| TSCA Inventory | Yes |
| CERCLA RQ | 1,000 lbs. |
| RCRA Code | U220 |

Xylene

| | |
|----------------|----------|
| SARA 313 | Yes |
| TSCA Inventory | Yes |
| CERCLA RQ | 100 lbs. |
| RCRA Code | U239 |

Zinc Dust

| | |
|----------------|------------|
| SARA 313 | Yes |
| TSCA Inventory | Yes |
| CERCLA RQ | 1,000 lbs. |
| RCRA Code | N/A |

 =====
 Section 16 -- OTHER INFORMATION

This document is prepared pursuant to the OSHA Hazard Communication Standard (29 CFR 1910.1200). The information herein is given in good faith, but no warranty, expressed or implied is made. Consult RectorSeal for further information: (713) 263-8001

1. Identification

| | | |
|---|---|-------------------------|
| Product identifier | Oatey Clear or Purple Primer Cleaner | |
| Other means of identification | | |
| SDS number | 1401E | |
| Synonyms | Part Numbers: 30780, 30783, 30796, 30806, 30768 | |
| Recommended use | Joining PVC Pipes | |
| Recommended restrictions | None known. | |
| Manufacturer/Importer/Supplier/Distributor information | | |
| Company name | Oatey Co. | |
| Address | 4700 West 160th Street | |
| Telephone | 216-267-7100 | Outside US 703-527-3887 |
| E-mail | info@oatey.com | |
| Contact person | MSDS Coordinator | |
| Emergency phone number | First Aid 877-740-5015 | Chemtrec 800-424-9300 |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable Liquids | Category 2 |
| Health Hazards | Serious eye damage/eye irritation | Category 2A |
| | Specific Target Organ Toxicity, Single Exposure | Category 3 respiratory tract irritation |
| | Specific Target Organ Toxicity, Single Exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. May be fatal if swallowed and enters airways. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/eye protection/face protection. |
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Do NOT induce vomiting. If eye irritation persists: Get medical advice/attention. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------|------------|--------|
| Acetone | 67-64-1 | 60-100 |
| Cyclohexanone | 108-94-1 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|---|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Rinse skin with water/shower. Get medical attention if irritation develops and persists. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. |
| Ingestion | Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. |
| Most important symptoms/effects, acute and delayed | May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
|--|---|

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage**Precautions for safe handling**

Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. When using do not smoke. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes. Avoid prolonged exposure. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

| Components | Type | Value |
|------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 50 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|------------------------------|------|----------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 25 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Components | Value | Determinant | Specimen | Sampling Time |
|------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|------------|--------|----------------------------------|----------|---------------|
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Provide eyewash station.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves.

Other

Wear suitable protective clothing.

Respiratory protection

Use a positive-pressure air-supplied respirator if there is any potential for an uncontrolled release, exposure levels are not known, or any other circumstances where air-purifying respirators may not provide adequate protection. If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Translucent.

Physical state

Liquid.

Form

Liquid.

Color

Clear. Purple

Odor

Solvent.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

Not available.

Initial boiling point and boiling range

133 °F (56.11 °C)

Flash point

-4.0 °F (-20.0 °C)

Evaporation rate

Not available.

Flammability (solid, gas)

Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)

Not available.

Flammability limit - upper (%)

Not available.

| | |
|--|---------------------------|
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.79 |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | < 10 cP |
| Other information | |
| VOC (Weight %) | < 25 g/l SQACMD Method 24 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. May cause drowsiness and dizziness. May cause irritation to the respiratory system. Prolonged inhalation may be harmful. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. |

Symptoms related to the physical, chemical and toxicological characteristics May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|----------------|---------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |

| Components | Species | Test Results |
|---------------------------|---------|--|
| <i>Inhalation</i> LC50 | Rat | 8000 ppm, 4 hours > 6.2 mg/l, 4 Hours |
| <i>Oral</i> LD50 | Rat | 1620 mg/kg 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|---|--|
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| Not listed. | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | May cause respiratory irritation. May cause drowsiness and dizziness. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|---|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

| | |
|--|---|
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | No data available. |
| Partition coefficient n-octanol / water (log Kow) | |
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Mobility in soil | No data available. |
| Other adverse effects | No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component. |

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.
Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

US RCRA Hazardous Waste U List: Reference

Acetone (CAS 67-64-1) U002
Cyclohexanone (CAS 108-94-1) U057

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

UN number UN1993
UN proper shipping name Flammable liquids, n.o.s. (Acetone RQ = 5128 LBS)
Transport hazard class(es)
Class 3
Subsidiary risk -
Label(s) 3
Packing group II
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions IB2, T7, TP1, TP8, TP28
Packaging exceptions 150
Packaging non bulk 202
Packaging bulk 242

IATA

UN number UN1993
UN proper shipping name Flammable liquid, n.o.s (Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3H
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1993
UN proper shipping name FLAMMABLE LIQUID, N.O.S (Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards
Marine pollutant No.
EmS F-E, S-E
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

| |
|------------------------|
| Immediate Hazard - Yes |
| Delayed Hazard - No |
| Fire Hazard - Yes |
| Pressure Hazard - No |
| Reactivity Hazard - No |

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
|-----------------------|------|

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------|--------|
| Acetone (CAS 67-64-1) | 35 %WV |
|-----------------------|--------|

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
|-----------------------|------|

US state regulations**US. Massachusetts RTK - Substance List**

| |
|------------------------------|
| Acetone (CAS 67-64-1) |
| Cyclohexanone (CAS 108-94-1) |

US. New Jersey Worker and Community Right-to-Know Act

| |
|------------------------------|
| Acetone (CAS 67-64-1) |
| Cyclohexanone (CAS 108-94-1) |

US. Pennsylvania Worker and Community Right-to-Know Law

| |
|------------------------------|
| Acetone (CAS 67-64-1) |
| Cyclohexanone (CAS 108-94-1) |

US. Rhode Island RTK

| |
|------------------------------|
| Acetone (CAS 67-64-1) |
| Cyclohexanone (CAS 108-94-1) |

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

US - California Proposition 65 - Carcinogens & Reproductive Toxicity (CRT): Listed substance

Not listed.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 22-September-2014

Revision date -

Version # 01

HMIS® ratings
 Health: 2
 Flammability: 3
 Physical hazard: 0

Disclaimer Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.



Speedline® Corporation

SAFETY DATA SHEET

Date Issued : 06/12/2015

Date Revised : 02/19/2016

POLYCO ADHESIVE

1. PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: Polyco Adhesive

DISTRIBUTOR:

Speedline Corporation
6810 Cochran Road
440-914-1122

EMERGENCY PHONE: Chemtel 800-255-3924

RECOMMENDED USE OF CHEMICAL AND RESTRICTIONS ON USE: Product is an adhesive solvent mixture used to bond PVC plastic. Not intended for any other use or application.

2. HAZARDS IDENTIFICATION

CLASSIFICATION OF THE CHEMICAL

HAZARD CLASS

FLAMMABLE LIQUIDS: Category 1.

ACUTE TOXICITY: 4 (oral).

SKIN CORROSION: 2.

SERIOUS EYE DAMAGE: 1.

SKIN SENSITIZATION: No.

RESPIRATORY SENSITIZATION: No.

SPECIFIC TARGET ORGAN TOXICITY - SINGLE EXPOSURE: 3.

LABEL ELEMENTS HAZARD

PICTOGRAMS:



SIGNAL WORD: Danger.

HAZARD STATEMENT: Highly flammable liquid and vapor. Causes serious eye irritation. Harmful if swallowed. Harmful if inhaled. May be fatal if swallowed and enters airways. May cause drowsiness or dizziness. May cause respiratory irritation. Read entire label carefully before use.

PREVENTION: Keep only in original container. Do not eat, drink, or smoke when using this product. Wash hands thoroughly after handling. Do not breathe dusts or mists. Wear protective gloves/protective clothing/eye protection/face protection. Use only with good ventilation.

RESPONSE: Eliminate all ignition sources. Avoid breathing vapors. Prevent liquid from entering sewers. Absorb spillage to prevent material damage. If swallowed: Do NOT induce vomiting due to risk of aspiration into lungs. Immediately call a poison center/doctor. If on skin (or hair) wash with soap and water. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if symptoms persist. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing. Call a poison center/doctor if symptoms persist.

STORAGE: Store in original packaging. Keep containers tightly closed. Store in a well ventilated place.

DISPOSAL: Dispose of contents and container in accordance with all local, regional, national, and international regulations. We recommend evaporation of the contents in an outdoor location and recycling of the steel container.



Speedline® Corporation

SAFETY DATA SHEET

Date Issued : 06/12/2015

Date Revised : 02/19/2016

POLYCO ADHESIVE

3. COMPOSITION/INFORMATION ON INGREDIENTS

MIXTURES

Tetrahydrofuran CAS # 109-99-9 (65-85%)

OSHA PEL 200 PPM

ACGIH TLV 200 PPM

Other recommended limits STEL 250 PPM

The exact percentage of composition has been withheld as a trade secret in accordance with paragraph(i) of 1910.1200.

4. FIRST AID MEASURES

EMERGENCY AND FIRST AID PROCEDURES:

EYE: For contact with eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing. Call a poison center/ doctor if symptoms persist.

SKIN: For contact with skin (or hair) wash with soap and water.

INHALATION: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if symptoms persist.

INGESTION: If swallowed, do NOT induce vomiting due to risk of aspiration into lungs. Immediately call a poison center/doctor.

MOST IMPORTANT SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED:

EYE: Eye irritant. Symptoms may include discomfort or pain, excessive blinking and tear production, with marked redness and swelling of the conjunctiva.

SKIN: Harmful in contact with skin. May cause redness, drying, defatting, and cracking of the skin.

INHALATION: May cause drowsiness and dizziness. May cause respiratory irritation. May cause nausea or vomiting.

INGESTION: Will cause liver and kidney damage. May cause stomach distress, nausea or vomiting.

INDICATION OF IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENTS NEEDED:

NOTE TO PHYSICIANS: Symptoms may not appear immediately.

SPECIFIC TREATMENTS: In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

5. FIRE-FIGHTING MEASURES

EXTINGUISHING MEDIA: Dry chemical or carbon dioxide (CO₂). For large fire use alcohol foam. Water spray may be used to cool containers, but may be ineffective in controlling fire.

SPECIAL HAZARDS ARISING FROM THE CHEMICAL

PRODUCTS OF COMBUSTION: May generate toxic or irritating combustion products.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Fire hazard because of low flash point, high volatility, and heavy vapor.

SPECIAL PROTECTIVE EQUIPMENT AND PRECAUTIONS FOR FIREFIGHTERS: Keep upwind of fire. Wear full firefighting turn-out gear (full bunker gear) and respiratory protection (SCBA).

6. ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT, AND EMERGENCY PROCEDURES: Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel.

METHODS AND MATERIALS FOR CONTAINMENT AND CLEANUP

METHODS FOR CONTAINMENT: Use polyethylene bag or containment drum or pail to contain spill. Provide ventilation. Dike area to prevent spreading. Use appropriate Personal Protective Equipment (PPE).

METHODS FOR CLEANING UP: Absorb spillage in non-combustible absorbent such as sand or vermiculite, and place in a suitable container for disposal. Allow spilled material to evaporate, providing adequate ventilation and eliminating all ignition sources. 1414



Speedline® Corporation

SAFETY DATA SHEET

Date Issued : 06/12/2015

Date Revised : 02/19/2016

POLYCO ADHESIVE

7. HANDLING AND STORAGE

PRECAUTIONS FOR SAFE HANDLING

CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES: Store in original packaging. Keep containers tightly closed. Store in a well ventilated place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

CONTROL PARAMETERS

Tetrahydrofuran CAS # 109-99-9

OSHA PEL 200 PPM

ACGIH TLV 200 PPM

Other recommended limits STEL 250 PPM

EXPOSURE CONTROLS: Use ventilation adequate to keep exposure below recommended exposure limits.

INDIVIDUAL PROTECTIVE MEASURES

RESPIRATORY PROTECTION (SPECIFY TYPE): None required with normal ventilation. If using where ventilation cannot be supplied, a half-mask respirator with an organic-vapors cartridge is recommended.

PROTECTIVE GLOVES: Rubber or PVA.

EYE PROTECTION: Chemical safety goggles to prevent splashing in eyes.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Rubber, polyethylene, or Tyvek apron.

WORK/HYGIENE PRACTICES: Use good industrial hygiene practice.

9. PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: White or clear liquid. Characteristic ether-like solvent odor.

COLOR: White or clear.

ODOR: Pungent ether-like solvent odor.

ODOR THRESHOLD: 25 PPM.

PHYSICAL STATE: Liquid.

pH: 7.

MELTING POINT/FREEZING POINT: Freeze point is below -40°C.

BOILING POINT: 65.5 - 66.5°C.

FLASH POINT (METHOD USED): -22°C tag closed cup.

EVAPORATION RATE (BUTYL ACETATE=1): 5.5 to 8.

FLAMMABLE LIMITS AT 25 C: LEL 1.8% UEL 11.8%.

VAPOR PRESSURE (MM HG): 190.

VAPOR DENSITY (AIR =1): 2.5.

RELATIVE DENSITY/SPECIFIC GRAVITY (H₂O=1): Approximately 0.9.

SOLUBILITY: Miscible.

PARTITION COEFFICIENT: n-octanol/water: .45.

AUTO-IGNITION TEMPERATURE: The product is not self-igniting.

DECOMPOSITION TEMPERATURE: 110°C to 400°C.

VISCOSITY: Varies from 100 to 1600 cps depending on formula.

PERCENT VOLATILE, WT. %: Approximately 85%.

VOC CONTENT GRAMS/LITER: 710.



Speedline® Corporation

SAFETY DATA SHEET

Date Issued : 06/12/2015

Date Revised : 02/19/2016

POLYCO ADHESIVE

10. STABILITY AND REACTIVITY

REACTIVITY: Reacts with oxidizing agents.

CHEMICAL STABILITY: The product is chemically stable.

POSSIBILITY OF HAZARDOUS REACTIONS: No dangerous reaction known under conditions of normal use.

CONDITIONS TO AVOID: Avoid all sources of ignition: heat sparks, open flame. Avoid electrostatic discharge.

INCOMPATIBLE MATERIALS: Aluminum lithium hydride, alkaline-earth metal hydroxides, any oxidizer.

HAZARDOUS DECOMPOSITION PRODUCTS: No hazardous decomposition products if stored and handled as prescribed/indicated.

11. TOXICOLOGICAL INFORMATION

INFORMATION ON TOXICOLOGICAL EFFECTS

LIKELY ROUTES OF EXPOSURE: Skin contact, skin absorption, eye contact, inhalation, and ingestion.

ACUTE TOXICITY: Oral: LD 50. **Rat** 1650 mg/kg.

INHALATION: LC 50 Rat >14.7 mg/l.

DERMAL: LD 50 Rat >2000 mg/kg.

IRRITATION/CORROSION: Rabbit Draize Test - Non-irritant.

SKIN: Rabbit Draize Test - Non-irritant.

EYE: Rabbit Draize Test - Risk of serious damage to eyes.

SENSITIZATION: Mouse Local Lymph Node Assay (LLNA) - Non-sensitizing OECD Guideline 429.

ASPIRATION HAZARD: Possible severe lung damage and death if aspirated into lungs.

DELAYED, IMMEDIATE, AND CHRONIC EFFECTS OF SHORT- AND LONG-TERM EXPOSURE

SKIN CORROSION/IRRITATION: Causes skin irritation.

RESPIRATORY SENSITIZATION: May cause allergy or asthma symptoms or breathing difficulties if inhaled.

SKIN SENSITIZATION: Non-sensitizing.

STOT-SINGLE EXPOSURE: May cause respiratory irritation. May cause drowsiness, dizziness, or nausea.

CHRONIC HEALTH EFFECTS: Based on available data, the classification criteria are not met.

CARCINOGENICITY: Although rodent testing has shown a tumorigenic effect, these results are thought to be due to a rodent specific liver effect that is not relevant to humans.

GERM CELL MUTAGENICITY: Ames test is negative.

STOT-REPEATED EXPOSURE: Based on available data, the classification criteria are not met.

ASPIRATION HAZARD: Possible severe lung damage and death if aspirated into lungs.

TOXICOLOGICALLY SYNERGISTIC MATERIALS: Not available.

OTHER INFORMATION: Not available.

12. ECOLOGICAL INFORMATION

ECOTOXICITY: May cause long term adverse effect in the aquatic environment.

PERSISTENCE AND DEGRADABILITY: Not available.

BIOACCUMULATIVE POTENTIAL: Because of the n-octanol/water distribution coefficient (log Pow), accumulation in organisms is not to be expected.

MOBILITY IN SOIL: Not available.

OTHER ADVERSE EFFECTS: Not available.



Speedline® Corporation

SAFETY DATA SHEET

Date Issued : 06/12/2015

Date Revised : 02/19/2016

POLYCO ADHESIVE

13. DISPOSAL CONSIDERATIONS

Dispose of contents and container in accordance with all local, regional, national, and international regulations. We recommend evaporation of the contents in an outdoor location and recycling of the steel container.

14. TRANSPORT INFORMATION

US DEPARTMENT OF TRANSPORTATION

HAZARD CLASS: 3.

SHIPPING NAME: Flammable Liquid.

ID NUMBER: UN1133.

PACKING GROUP: II.

EXEMPTIONS: 1 Liter or smaller containers ship as Limited Quantity / ORM-D. No label or placard required. International Limited Quantity Label may also be used.

IMDG

HAZARD CLASS: 3.

SHIPPING NAME: Flammable Liquid.

ID NUMBER: UN1133.

PACKING GROUP: II.

MARINE POLLUTANT: No.

AIR TRANSPORT IATA/ICAO

HAZARD CLASS: 3.

SHIPPING NAME: Flammable Liquid.

ID NUMBER: UN1133.

PACKING GROUP: II.

15. REGULATORY INFORMATION

REGISTRATION STATUS: All components of this product are registered under TSCA.

CERCLA RQ: 1000 lbs CAS Number 109-99-9 Tetrahydrofuran.

REPORTABLE QUANTITY FOR RELEASE: 1000 lbs.

16. OTHER INFORMATION

HMIS:

H: 2

F: 4

R: 1

PP: B

NFPA:

H: 2

F: 4

R: 1

SAFETY DATA SHEET

A03410004

Section 1. Identification

Product name : KRYLON® QUIK-MARK™ Water-Based Inverted Marking Paint (Fluorescent)
Fluorescent Red Orange

Product code : A03410004

Other means of identification : Not available.

Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : Krylon Products Group
101 Prospect Avenue NW
Cleveland, OH 44115

Emergency telephone number of the company : US/Canada: (800) 424-9300
Mexico: CHEMTREC Mexico 01-800-681-9531. Available 24 hours and 365 days per year

Product Information Telephone Number : US/Canada: (800) 247-3266
Mexico: Not Available

Regulatory Information Telephone Number : US/Canada: (216) 566-2902
Mexico: Not Available

Transportation Emergency Telephone Number : US/Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year


Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
TOXIC TO REPRODUCTION - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown acute toxicity: 18.7% (oral), 28.5% (dermal), 18.7% (inhalation)

GHS label elements

Hazard pictograms :

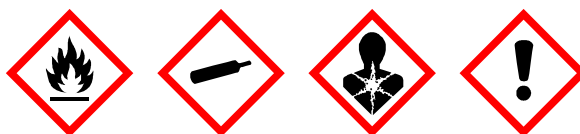

Signal word : Danger

Date of issue/Date of revision : 10/13/2020 **Date of previous issue** : 5/13/2020

A03410004

KRYLON® QUIK-MARK™ Water-Based Inverted Marking Paint (Fluorescent)
Fluorescent Red Orange

Version : 17

SHW-85-NA-GHS-US

1/16

1418

Section 2. Hazards identification

Hazard statements : Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 May be fatal if swallowed and enters airways.
 May cause respiratory irritation.
 May cause drowsiness or dizziness.
 Suspected of damaging fertility or the unborn child.
 May cause damage to organs through prolonged or repeated exposure.

Precautionary statements

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves, protective clothing and eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Pressurized container: Do not pierce or burn, even after use.

Response : IF exposed or concerned: Get medical advice or attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or doctor. Do NOT induce vomiting.

Storage : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Keep container tightly closed.

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Supplemental label elements DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY.
 Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.

Hazards not otherwise classified : DANGER: Rags, steel wool, other waste soaked with this product, and sanding residue may spontaneously catch fire if improperly discarded. Immediately place rags, steel wool, other waste soaked with this product, and sanding residue in a sealed, water-filled, metal container. Dispose of in accordance with local fire regulations.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Other means of identification : Not available.

CAS number/other identifiers

| Ingredient name | % by weight | CAS number |
|-----------------------------------|-------------|------------|
| Toluene | <10 | 108-88-3 |
| Propane | ≤10 | 74-98-6 |
| Light Aliphatic Hydrocarbon | ≤10 | 64742-47-8 |
| Butane | ≤5 | 106-97-8 |
| Lt. Aliphatic Hydrocarbon Solvent | ≤3 | 64742-89-8 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention following exposure or if feeling unwell.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
irritation
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations

Section 4. First aid measures

- Skin contact** : Adverse symptoms may include the following:
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
 - nausea or vomiting
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

Hazardous thermal decomposition products : Decomposition products may include the following materials:

- carbon dioxide
- carbon monoxide
- nitrogen oxides
- sulfur oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Section 7. Handling and storage

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|-----------------------------------|------------|--|
| Toluene | 108-88-3 | OSHA PEL Z2 (United States, 2/2013). TWA: 200 ppm 8 hours. CEIL: 300 ppm AMP: 500 ppm 10 minutes. NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 375 mg/m ³ 10 hours. STEL: 150 ppm 15 minutes. STEL: 560 mg/m ³ 15 minutes. ACGIH TLV (United States, 3/2020). TWA: 20 ppm 8 hours. |
| Propane | 74-98-6 | NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2020). Oxygen Depletion [Asphyxiant]. Explosive potential. |
| Light Aliphatic Hydrocarbon | 64742-47-8 | ACGIH TLV (United States, 3/2020). Absorbed through skin. TWA: 200 mg/m ³ , (as total hydrocarbon vapor) 8 hours. |
| Butane | 106-97-8 | NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m ³ 10 hours. ACGIH TLV (United States, 3/2020). Explosive potential. STEL: 1000 ppm 15 minutes. |
| Lt. Aliphatic Hydrocarbon Solvent | 64742-89-8 | None. |

Occupational exposure limits (Canada)

| Ingredient name | CAS # | Exposure limits |
|-----------------|----------|---|
| Toluene | 108-88-3 | CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 50 ppm 8 hours. 8 hrs OEL: 188 mg/m ³ 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 20 ppm 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 20 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). Absorbed through skin. TWAEV: 50 ppm 8 hours. |

Section 8. Exposure controls/personal protection

| | | |
|---|------------|---|
| Normal propane | 74-98-6 | <p>TWAEV: 188 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). Absorbed through skin. STEL: 60 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours.</p> <p>CA Ontario Provincial (Canada, 6/2019). TWA: 1000 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours.</p> <p>CA British Columbia Provincial (Canada, 1/2020). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> |
| Petroleum refining, hydrotreated light distillate | 64742-47-8 | <p>CA British Columbia Provincial (Canada, 1/2020). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapour) 8 hours.</p> <p>CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 200 mg/m³, (as total hydrocarbon vapour) 8 hours.</p> <p>CA Ontario Provincial (Canada, 6/2019). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapour) 8 hours.</p> |
| Butane | 106-97-8 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours.</p> <p>CA Ontario Provincial (Canada, 6/2019). TWA: 800 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours.</p> <p>CA British Columbia Provincial (Canada, 1/2020). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |

[Occupational exposure limits \(Mexico\)](#)

| | CAS # | Exposure limits |
|-----------------------------|------------|--|
| Toluene | 108-88-3 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Light Aliphatic Hydrocarbon | 64742-47-8 | ACGIH TLV (United States, 3/2020). Absorbed through skin. TWA: 200 mg/m ³ , (as total hydrocarbon vapor) 8 hours. |

Section 8. Exposure controls/personal protection

| | | |
|--------|----------|--|
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
|--------|----------|--|

- Appropriate engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
 - Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
 - Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
 - Skin protection**
 - Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
 - Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
 - Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
 - Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

- Appearance**
- Physical state** : Liquid.
 - Color** : Not available.
 - Odor** : Not available.
 - Odor threshold** : Not available.
 - pH** : 7
 - Melting point/freezing point** : Not available.
 - Boiling point/boiling range** : Not available.

Section 9. Physical and chemical properties

- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
Evaporation rate : 2 (butyl acetate = 1)
Flammability (solid, gas) : Not available.
Lower and upper explosive (flammable) limits : Lower: 0.9%
Upper: 9.5%
Vapor pressure : 101.3 kPa (760 mm Hg) [at 20°C]
Vapor density : 1 [Air = 1]
Relative density : 0.86
Solubility : Not available.
Partition coefficient: n-octanol/water : Not available.
Auto-ignition temperature : Not available.
Decomposition temperature : Not available.
Viscosity : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
Molecular weight : Not applicable.
Aerosol product
Type of aerosol : Spray
Heat of combustion : 13.177 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
Chemical stability : The product is stable.
Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid : Avoid all possible sources of ignition (spark or flame).
Incompatible materials : No specific data.
Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|--------------------------|----------|
| Toluene | LC50 Inhalation Vapor | Rat | 49 g/m ³ | 4 hours |
| Butane | LD50 Oral | Rat | 636 mg/kg | - |
| | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |

Irritation/Corrosion

Section 11. Toxicological information

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-----------------------|-------------|
| Toluene | Eyes - Mild irritant | Rabbit | - | 0.5 minutes 100 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 870 ug | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 2 mg | - |
| | Skin - Mild irritant | Pig | - | 24 hours 250 UJ | - |
| | Skin - Mild irritant | Rabbit | - | 435 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 500 mg | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Toluene | - | 3 | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|-----------------------------------|------------|-------------------|------------------------------|
| Toluene | Category 3 | - | Respiratory tract irritation |
| Propane | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Light Aliphatic Hydrocarbon | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Butane | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Lt. Aliphatic Hydrocarbon Solvent | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| | Category 3 | | Narcotic effects |

Specific target organ toxicity (repeated exposure)

Section 11. Toxicological information

| Name | Category | Route of exposure | Target organs |
|-----------------------------------|------------|-------------------|---------------|
| Toluene | Category 2 | - | - |
| Propane | Category 2 | - | - |
| Light Aliphatic Hydrocarbon | Category 2 | - | - |
| Butane | Category 2 | - | - |
| Lt. Aliphatic Hydrocarbon Solvent | Category 2 | - | - |

Aspiration hazard

| Name | Result |
|-----------------------------------|--------------------------------|
| Toluene | ASPIRATION HAZARD - Category 1 |
| Propane | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Lt. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
irritation
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting
reduced fetal weight
increase in fetal deaths
skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Section 11. Toxicological information

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : May cause damage to organs through prolonged or repeated exposure.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : Suspected of damaging the unborn child.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|-------|---------------|
| Oral | 5293.29 mg/kg |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-----------------------------------|------------------------------------|---|----------|
| Toluene | Acute EC50 12500 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 11600 µg/l Fresh water | Crustaceans - Gammarus pseudolimnaeus - Adult | 48 hours |
| | Acute EC50 6000 µg/l Fresh water | Daphnia - Daphnia magna - Juvenile (Fledgling, Hatchling, Weanling) | 48 hours |
| | Acute LC50 5500 µg/l Fresh water | Fish - Oncorhynchus kisutch - Fry | 96 hours |
| | Chronic NOEC 1000 µg/l Fresh water | Daphnia - Daphnia magna | 21 days |
| | Acute LC50 2200 µg/l Fresh water | Fish - Lepomis macrochirus | 4 days |
| Light Aliphatic Hydrocarbon | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| Lt. Aliphatic Hydrocarbon Solvent | | | |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Toluene | - | - | Readily |

Bioaccumulative potential

Section 12. Ecological information

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|---|--------------------|------------------|-------------|
| Toluene Lt. Aliphatic Hydrocarbon Solvent | - - | 90 10 to 2500 | low high |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. 126 | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. 126 | - ERG No. 126 | - | Emergency schedules F-D, S-U |

Section 14. Transport information

| | | | | | |
|--|---|---|---|---|---|
| | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Dependent upon container size, this product may ship under the Limited Quantity shipping exception. |
|--|---|---|---|---|---|

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to IMO instruments : Not available.

Proper shipping name : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

- International lists** :
- Australia inventory (AICS):** Not determined.
 - China inventory (IECSC):** Not determined.
 - Japan inventory (ENCS):** Not determined.
 - Japan inventory (ISHL):** Not determined.
 - Korea inventory (KECI):** Not determined.
 - New Zealand Inventory of Chemicals (NZIoC):** Not determined.
 - Philippines inventory (PICCS):** Not determined.
 - Taiwan Chemical Substances Inventory (TCSI):** Not determined.
 - Thailand inventory:** Not determined.
 - Turkey inventory:** Not determined.
 - Vietnam inventory:** Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 2 |
| Physical hazards | | 3 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

Section 16. Other information

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| TOXIC TO REPRODUCTION - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Date of printing : 10/13/2020

Date of issue/Date of revision : 10/13/2020

Date of previous issue : 5/13/2020

Version : 17

Key to abbreviations : ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 N/A = Not available
 SGG = Segregation Group
 UN = United Nations

Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.



SAFETY DATA SHEET

1. Product and Company Identification

| | | | |
|-----------------------------|--|-----------------------------|----------------|
| PRODUCT NUMBER: | 1221 | COMPANY PHONE: | 1-800-241-8180 |
| PRODUCT NAME: | MARK OUT | EMERGENCY TELEPHONE: | 1-800-241-8180 |
| PRODUCT DESCRIPTION: | Aerosol Vandal Mark and Graffiti Remover | INFOTRAC: | 1-800-535-5053 |
| COMPANY INFORMATION: | PRO CHEM, INC. 1475 Bluegrass Lakes Parkway Alpharetta, GA 30004 | | |

2. Hazards Identification

| | | | |
|---|-------------------------------|----------------|--|
| GHS CLASSIFICATION: Flammable aerosols: Category 1 Skin corrosion/irritation Category 2 Serious eye damage/eye irritation Category 2 Reproductive toxicity Category 2 Specific target organ toxicity, single exposure Category 3 narcotic effects Specific target organ toxicity, repeated exposure: Category 2 Aspiration hazard Category 1 Environmental hazards: Not classified. OSHA defined hazards: Not classified. | SIGNAL WORD: DANGER | SYMBOL: | |
|---|-------------------------------|----------------|--|

HAZARD STATEMENTS:

Extremely flammable aerosol. May be fatal if swallowed and enters airways. Causes skin irritation. May cause drowsiness or dizziness. May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure.

PRECAUTIONARY STATEMENTS:

Prevention: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe gas. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection.

Response: IF SWALLOWED: Immediately call a poison center/doctor. IF ON SKIN: Wash with plenty of water. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. Specific treatment (see this label). Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. Collect spillage.

Storage: Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal: Dispose of contents/container in accordance with local/regional/national/international regulations.

HAZARDS NOT OTHERWISE SPECIFIED:

None known.

SUPPLEMENTAL INFORMATION:

None.

3. Composition / Information on Ingredients

| CHEMICAL NAME | CAS | Concentration % by Weight |
|--|----------|---------------------------|
| Toluene | 108-88-3 | 40-60 |
| Butane | 106-97-8 | 10-20 |
| Diacetone Alcohol | 123-42-2 | 2.5-10 |
| Isopropyl Alcohol | 67-63-0 | 2.5-10 |
| Propane | 74-98-6 | 2.5-10 |
| Other components below reportable levels | | 10-20 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First Aid Measures

EMERGENCY OVERVIEW

GENERAL: IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

EYES: Rinse with water. Get medical attention if irritation develops and persists.

SKIN: Wash off with soap and water. Get medical attention if irritation develops and persists. Take off contaminated clothing and wash before reuse.

INHALATION:

Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

INGESTION:

In the unlikely event of swallowing, contact a physician or poison control center. Rinse mouth. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

MOST IMPORTANT SYMPTOMS/EFFECTS, ACUTE AND DELAYED:

May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause

redness and pain. Prolonged exposure may cause chronic effects.

INDICATION OF IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT NEEDED:

Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

5. Fire-Fighting Measures

SUITABLE FIRE EXTINGUISHING MEDIA:

Powder. Foam. Carbon dioxide (CO₂).

UNSUITABLE FIRE EXTINGUISHING MEDIA:

Do not use water jet as an extinguisher, as this will spread the fire.

SPECIFIC HAZARDS ARISING FROM THE CHEMICAL:

Contents under pressure. Pressurized container may explode when exposed to heat or flame.

SPECIFIC FIRE-FIGHTING METHODS:

Move containers from fire area if you can do so without risk. Use water spray to cool unopened containers. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. Use standard firefighting procedures and consider the hazards of other involved materials. Move container from fire area if it can be done without risk. Cool containers exposed to flames with water until well after the fire is out. In the event of fire and/or explosion do not breathe fumes.

SPECIAL PROTECTIVE EQUIPMENT FOR FIREFIGHTERS:

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

6. Accidental Release Measures

PERSONAL PRECAUTIONS:

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean up. Do not breathe gas. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see Section 8 of the SDS.

ENVIRONMENTAL PRECAUTIONS AND CLEAN-UP METHODS:

Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak, if you can do so without risk. Move the cylinder to a safe and open area, if the leak is irreparable. Isolate area until gas has dispersed. Scoop up used absorbent into drums or other appropriate container. Prevent entry into waterways, sewer, basements, or confined areas. For waste disposal, see Section 13 of the SDS. Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage, if safe to do so. Avoid discharge into drains, watercourses or onto the ground.

7. Handling and Storage

SAFE HANDLING:

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe gas. Avoid contact with skin, eyes, and clothing. Avoid prolonged exposure. Use only in well-ventilated areas. Should be handled in closed systems, if possible. Pregnant or breastfeeding women must not handle this product. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

SAFE STORAGE & INCOMPATIBILITIES:

Level 2 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate, or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store in original tightly closed container. Refrigeration recommended. Keep out of the reach of children. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure Controls / Personal Protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| COMPONENTS | TYPE | VALUE |
|----------------------------------|------|------------------------------------|
| Diacetone Alcohol (CAS 123-42-2) | PEL | 240 mg/m ³ 50 ppm |
| Isopropyl Alcohol (CAS 67-63-0) | PEL | 980 mg/m ³ 400 ppm |
| Propane (CAS 74-98-6) | PEL | 1800 mg/m ³ 1000 ppm |

US. ACGIH Threshold Limit Values

| COMPONENTS | TYPE | VALUE |
|------------------------|---------|---------|
| Toluene (CAS 108-88-3) | Ceiling | 300 ppm |
| | TWA | 200 ppm |

US. ACGIH Threshold Limit Values

| COMPONENTS | TYPE | VALUE |
|----------------------------------|------|----------|
| Butane (CAS 106-97-8) | STEL | 1000 ppm |
| Diacetone Alcohol (CAS 123-42-2) | TWA | 50 ppm |
| Isopropyl Alcohol (CAS 67-63-0) | STEL | 400 ppm |
| | TWA | 200 ppm |
| Toluene (CAS 108-88-3) | TWA | 20 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| COMPONENTS | TYPE | VALUE |
|-----------------------|------|-----------------------------------|
| Butane (CAS 106-97-8) | TWA | 1900 mg/m ³ 800 ppm |

| | | |
|----------------------------------|------|------------------------------------|
| Diacetone Alcohol (CAS 123-42-2) | TWA | 240 mg/m ³ 50 ppm |
| Isopropyl Alcohol (CAS 67-63-0) | STEL | 1225 mg/m ³ 800 ppm |
| | TWA | 980 mg/m ³ 400 ppm |
| Propane (CAS 74-98-6) | TWA | 1800 mg/m ³ 1000 ppm |
| Toluene (CAS 108-88-3) | STEL | 560 mg/m ³ 150 ppm |
| | TWA | 375 mg/m ³ 100 ppm |

BIOLOGICAL LIMIT VALUE:

ACGIH Biological Exposure Indices

| COMPONENTS | VALUE | DETERMINANT | SPECIMEN | SAMPLING TIME |
|---------------------------------|-----------|---------------------------|---------------------|---------------|
| Isopropyl Alcohol (CAS 67-63-0) | 40 mg/l | Acetone | Urine | * |
| Toluene (CAS 108-88-3) | 0.3 mg/g | o-Cresol, with hydrolysis | Creatinine in urine | * |
| | 0.03 mg/l | Toluene | Urine | * |
| | 0.02 mg/l | Toluene | Blood | * |

*For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Toluene (CAS 108-88-3) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Toluene (CAS 108-88-3) Skin designation applies.

ENGINEERING CONTROLS:

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

INDIVIDUAL PROTECTION MEASURES, SUCH AS PERSONAL PROTECTIVE EQUIPMENT:



EYE PROTECTION: Wear safety glasses with side shields (or goggles).

SKIN PROTECTION: Wear appropriate chemical resistant gloves. Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

RESPIRATORY PROTECTION: If permissible levels are exceeded use NIOSH mechanical filter/organic vapor cartridge or an air-supplied respirator.

THERMAL HAZARDS: Wear appropriate thermal protective clothing, when necessary.

GENERAL HYGIENE CONSIDERATIONS: When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical & Chemical Properties

| | | | |
|---|------------------------------------|----------------------------------|------------------------------|
| Appearance: | | Vapor Pressure: | 35 - 55 psig @70°F estimated |
| Physical State: | Gas. | Vapor Density: | Not available. |
| Form: | Aerosol. | pH: | Not available. |
| Color: | White. | Viscosity: | Not available. |
| Odor: | Solvent. | Evaporation Rate: | Not available. |
| Odor Threshold: | Not available. | Flammability(solid/gas): | Not available. |
| Melting/Freezing Point: | Not available. | Upper Flammability Limit: | 2.5% estimated |
| Boiling Point/Range: | 257.08°F (125.05°C) estimated | Lower Flammability Limit: | 12% estimated |
| Flash Point: | -156.0°F (-104.4°C) Propellant est | Upper Explosive Limit: | Not available. |
| Relative Density: | Not available. | Lower Explosive Limit: | Not available. |
| Solubility (water): | Not available. | Decomposition Temp: | Not available. |
| Auto-Ignition Temperature: | 886.24°F (474.58°C) estimated | Specific Gravity: | 0.817 estimated |
| Partition Coeff (n-octanol/water): | Not available. | Viscosity: | Not available. |

10. Stability & Reactivity Information

REACTIVITY:

The product is stable and non-reactive under normal conditions of use, storage, and transport.

CHEMICAL STABILITY:

Material is stable under normal conditions.

POSSIBILITY OF HAZARDOUS REACTIONS:

Hazardous polymerization does not occur.

CONDITIONS TO AVOID:

Avoid temperatures exceeding the flash point. Contact with incompatible materials.

INCOMPATIBLE MATERIALS:

Acids. Strong oxidizing agents. Nitrates. Isocyanates. Fluorine. Chlorine.

DECOMPOSITION PRODUCTS:

No hazardous decomposition products are known.

11. Toxicological Information

PRIMARY ROUTE OF ENTRY:

EYES: Causes serious eye irritation.

SKIN: Causes skin irritation.

INHALATION: May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Narcotic effects. Prolonged inhalation may be harmful.

INGESTION: Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.

SYMPTOMS RELATED TO THE PHYSICAL, CHEMICAL AND TOXICOLOGICAL CHARACTERISTICS:

May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

ACUTE TOXICITY:

May be fatal if swallowed and enters airways. Narcotic effects. In high concentrations, vapors are anesthetic and may cause headache, fatigue, dizziness, and central nervous system effects.

| COMPONENTS | SPECIES | TEST RESULTS |
|---|---------|---|
| Butane (CAS 106-97-8) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l |
| Diacetone Alcohol (CAS 123-42-2) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 14.5 ml/kg, 24 Hours |
| | Rat | > 1875 mg/kg, 24 Hours 13500 mg/kg |
| <i>Oral</i> | | |
| LD50 | Rat | 3002 mg/kg |
| Isopropyl Alcohol (CAS 67-63-0) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 16.4 ml/kg, 24 Hours |
| <i>Inhalation</i> | | |
| LC50 | Rat | > 10000 ppm, 6 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5.84 g/kg |
| Propane (CAS 74-98-6) | | |
| Acute | | |
| <i>Inhalation</i> | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l 658 mg/l/4h |
| Toluene (CAS 108-88-3) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | > 5000 mg/kg, 24 Hours |
| <i>Inhalation</i> | | |
| LC50 | Mouse | 6405 - 7436 ppm, 6 Hours 5320 ppm, 8 Hours |
| | Rat | 5879 - 6281 ppm, 6 Hours 12.5 - 28.8 mg/l, 4 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5000 mg/kg |

* Estimates for product may be based on additional component data not shown.

SKIN CORROSION/IRRITATION:

Causes skin irritation.

SERIOUS EYE DAMAGE/IRRITATION:

Causes serious eye irritation.

RESPIRATORY SENSITIZATION:

Not available.

SKIN SENSITIZATION:

This product is not expected to cause skin sensitization.

GERM CELL MUTAGENICITY:

No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

CARCINOGENICITY:

This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

IARC Monographs. Overall Evaluation of Carcinogenicity

Toluene (CAS 108-88-3) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

REPRODUCTIVE TOXICITY:

Suspected of damaging fertility or the unborn child.

SPECIFIC TARGET ORGAN TOXICITY (single exposure):

May cause drowsiness and dizziness.

SPECIFIC TARGET ORGAN TOXICITY (repeated exposures):

Respiratory system. Skin. Kidneys. Central nervous system. Eyes. Liver. May cause damage to organs through prolonged or repeated exposure.

ASPIRATION HAZARD:

May be fatal if swallowed and enters airways.

CHRONIC EFFECTS:

Prolonged inhalation may be harmful. May cause damage to organs through prolonged or repeated exposure.

12. Ecological Information**ECOTOXICITY:**

Toxic to aquatic life with long lasting effects.

| COMPONENT | | SPECIES | TEST RESULTS |
|----------------------------------|----------------|---|----------------------------|
| Diacetone Alcohol (CAS 123-42-2) | Aquatic | | |
| | Fish | Bluegill (Lepomis macrochirus) | 420 mg/l, 96 hours |
| Isopropyl Alcohol (CAS 67-63-0) | Aquatic | | |
| | Algae | Algae | 1000.0001 mg/L, 72 Hours |
| | Crustacea | Daphnia | 13299 mg/L, 48 Hours |
| | Fish | Bluegill (Lepomis macrochirus) | > 1400 mg/l, 96 hours |
| Toluene (CAS 108-88-3) | Aquatic | | |
| | Algae | Algae | 433.0001 mg/L, 72 Hours |
| | Crustacea | Daphnia | 7.645 mg/L, 48 Hours |
| | Fish | Water flea (Daphnia magna) | 5.46 - 9.83 mg/l, 48 hours |
| | | Coho salmon, silver salmon (Oncorhynchus kisutch) | 8.11 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

PERSISTENCE AND DEGRADABILITY:

No data is available on the degradability of this product.

BIOACCUMULATIVE POTENTIAL:

No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-------------------|--------|
| Butane | 2.89 |
| Diacetone Alcohol | -0.098 |
| Isopropyl Alcohol | 0.05 |
| Propane | 2.36 |
| Toluene | 2.73 |

MOBILITY IN SOIL:

No data available.

OTHER ADVERSE EFFECTS:

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal Consideration**DISPOSAL INSTRUCTIONS:**

Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate, or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways, or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

LOCAL DISPOSAL REGULATIONS:

Dispose in accordance with all applicable regulations.

HAZARDOUS WASTE CODE:

The waste code should be assigned in discussion between the user, the producer, and the waste disposal company.

US RCRA Hazardous Waste U List: Reference

Toluene (CAS 108-88-3) U220

WASTE FROM RESIDUES/UNUSED PRODUCTS:

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

CONTAMINATED PACKAGING:

Empty containers should be taken to an approved waste-handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. Do not reuse empty containers.

14. Transportation Information

DOT: UN NUMBER: UN1950
UN PROPER SHIPPING NAME: Aerosols, flammable
TRANSPORT HAZARD CLASS(ES)

Class: 2.1

Subsidiary Risk: -

Label(s): 2.1

PACKING GROUP: Not available.

SPECIAL PRECAUTIONS FOR USER: Read safety instructions, SDS and emergency procedures before handling.

LABELS REQUIRED: 2.1



SPECIAL PROVISIONS: N82
PACKAGING EXCEPTIONS: 306
PACKAGING NON BULK: None.
PACKAGING BULK: None.

This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking and both may be displayed concurrently.

IATA: **UN NUMBER:** UN1950
UN PROPER SHIPPING NAME: Aerosols, flammable
TRANSPORT HAZARD CLASS(ES)
Class: 2.1
Subsidiary Risk: -
LABEL(S): 2.1



PACKING GROUP: Not applicable.

ENVIRONMENTAL HAZARDS: Yes.

SPECIAL PRECAUTIONS FOR USER: Read safety instructions, SDS and emergency procedures before handling.

OTHER INFORMATION:

PASSENGER AND CARGO AIRCRAFT: Forbidden.

CARGO AIRCRAFT ONLY: Forbidden.

PACKAGING EXCEPTIONS: LTD QTY

IMDG: **UN NUMBER:** UN1950
UN PROPER SHIPPING NAME: AEROSOLS
TRANSPORT HAZARD CLASS(ES)
Class: 2.1
Subsidiary Risk: -
Label(s): 2.1



PACKING GROUP: Not applicable.

ENVIRONMENTAL HAZARDS:

Marine pollutant: Yes.

EmS: Not available.

SPECIAL PRECAUTIONS FOR USER: Read safety instructions, SDS and emergency procedures before handling.

PACKAGING EXCEPTIONS: LTD QTY

TRANSPORT IN BULK ACCORDING TO ANNEX II OF MARPOL 73/78 and the IBC CODE:
Not applicable.

15. Regulatory Information

US FEDERAL REGULATIONS:

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200. All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D): Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Toluene (CAS 108-88-3) Listed.

SARA 304 Emergency release notification: Not regulated.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050): Not listed.

SUPERFUND AMENDMENTS AND REAUTHORIZATION ACT of 1986 (SARA):

Hazard categories:
Immediate Hazard – Yes.
Delayed Hazard – Yes.
Fire Hazard – Yes.
Pressure Hazard – No.
Reactivity Hazard – No.

SARA 302 Extremely hazardous substance: No.

SARA 311/312 Hazardous Chemical: No.

SARA 313 (TRI reporting)

| Chemical Name | CAS Number | % by Wt |
|---------------|------------|---------|
| Toluene | 108-88-3 | 40-60 |

OTHER FEDERAL REGULATIONS

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Toluene (CAS 108-88-3)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA): Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Toluene (CAS 108-88-3) 6594

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Toluene (CAS 108-88-3) 35 % weight/volume

DEA Exempt Chemical Mixtures Code Number

Toluene (CAS 108-88-3) 594

US STATE REGULATIONS

US. Massachusetts RTK - Substance List

Butane (CAS 106-97-8)

Diacetone Alcohol (CAS 123-42-2)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)
Toluene (CAS 108-88-3)

US. New Jersey Worker and Community Right-to-Know Act

Butane (CAS 106-97-8)
Diacetone Alcohol (CAS 123-42-2)
Isopropyl Alcohol (CAS 67-63-0)
Propane (CAS 74-98-6)
Toluene (CAS 108-88-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Butane (CAS 106-97-8)
Diacetone Alcohol (CAS 123-42-2)
Isopropyl Alcohol (CAS 67-63-0)
Propane (CAS 74-98-6)
Toluene (CAS 108-88-3)

US. Rhode Island RTK

Butane (CAS 106-97-8)
Isopropyl Alcohol (CAS 67-63-0)
Propane (CAS 74-98-6)
Toluene (CAS 108-88-3)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

US - California Proposition 65 - CRT: Listed date/Developmental toxin

Toluene (CAS 108-88-3) Listed: January 1, 1991

US - California Proposition 65 - CRT: Listed date/Female reproductive toxin

Toluene (CAS 108-88-3) Listed: August 7, 2009

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other Information

N/A = Not Applicable; N/D = Not Determined

DISCLAIMER:

To the best of our knowledge, information contained herein is accurate. However, there is no assumption of liability for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazard, which exists. The information contained in this SDS was obtained from current and reliable sources; however, the data is provided without any warranty, expressed or implied, regarding its correctness or accuracy. Since the conditions or handling, storage and disposal of this product are beyond the control of the manufacturer, the manufacturer will not be responsible for loss, injury, or expense arising out of the products improper use. No warranty, expressed or inferred, regarding the product described in this SDS shall be created or inferred by any statement in this SDS. Various government agencies may have specific regulations regarding the transportation, handling, storage, use, or disposal of this product, which may not be covered by this SDS. The user is responsible for full compliance.

**KANO LABORATORIES,
INC. SAFETY DATA SHEET**

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

Product Name: Penephite (aerosol)
Product Use: Penetrant/Lubricant for Industrial Use

Manufacturer: Kano Laboratories, Inc.
1000 E. Thompson Lane
Nashville, TN 37211

Emergency Phone Number: Chemtrec 1 (800) 424-9300

Manufacturer Phone Number: (615) 833-4101

Website: www.kanolabs.com

SDS Date of Preparation: June 6, 2018

SECTION 2: HAZARDS IDENTIFICATION

GHS / HAZCOM 2012 Classification:

| Health | Physical |
|--|--|
| Skin Irritation Category 2 Eye Irritation Category 2A Specific Target Organ Toxicity – Single Exposure Category 3 (Respiratory Irritation, CNS) Aspiration Hazard Category 1 | Flammable Aerosol Category 2 Gas Under Pressure: Compressed Gas |

Label Elements

Danger!



Flammable aerosol.
Contains gas under pressure; may explode if heated.
Causes skin irritation.
Causes serious eye irritation.
May be fatal if swallowed and enters airways.
May cause respiratory irritation.
May cause drowsiness or dizziness.

Keep away from heat, sparks, open flames, and hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container. Do not pierce or burn, even after use.

Avoid breathing mist, vapors or spray. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves, eye protection and face protection.

IF SWALLOWED: Immediately call a POISON CENTER. Do NOT induce vomiting.

IF ON SKIN: Wash with plenty of soap and water. If skin irritation occurs: Get medical attention. Take off contaminated clothing and wash it before reuse.

IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER if you feel unwell.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

In case of fire: Use carbon dioxide, dry chemical or foam to extinguish.
Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Store in a well-ventilated place. Store locked up.

Dispose of contents and container in accordance with local and national regulations.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS# | % |
|---|--|-------|
| Petroleum Distillates | 64742-47-8 64742-96-7 64742-95-6 | 40-60 |
| Severely Hydrotreated Petroleum Distillates | 64742-52-5 | 30-50 |
| Graphite | 778212-4 | 1-10% |
| 1,2,4-trimethylbenzene | 95-63-3 | <15 |
| Carbon Dioxide Propellant | 124-38-9 | 1-15 |

The specific identity and/or exact percentage has been withheld as a trade secret.

SECTION 4: FIRST AID MEASURES

Eye: Rinse thoroughly with water for several minutes, holding the eye lids open to be sure the material is washed out. Get medical attention if irritation develops or persists.

Skin: Remove contaminated clothing. Wash contact area thoroughly with soap and water. Get medical attention if irritation or symptoms of exposure develop. Launder clothing before re-use.

Inhalation: Remove victim to fresh air. Give artificial respiration if needed. If breathing is difficult, oxygen should be administered by qualified personnel. Get medical attention if symptoms develop.

Ingestion: Do not induce vomiting. Keep the victim calm and warm. Never give anything by mouth to an unconscious or drowsy person. Get immediate medical attention.

Most important symptoms and effects, acute and delayed: May cause eye and skin irritation. Inhalation of vapors or mist may cause respiratory irritation and central nervous system effects such as headache, dizziness, nausea and vomiting. Harmful or fatal if swallowed. Aspiration into the lungs during ingestion or vomiting may cause lung damage.

Indication of immediate medical attention and special treatment, if needed: If swallowed, get immediate medical attention.

SECTION 5: FIRE FIGHTING MEASURES

Suitable (and Unsuitable) Extinguishing Media: Use carbon dioxide, dry chemical or foam. Water may be ineffective but can be used to cool containers and structures.

Specific Hazards Arising from the Chemical: Contents under pressure. Keep away from heat and open flames. Container may rupture or explode in the heat of a fire. Prolonged exposure to temperatures above 120°F may cause cans to burst. Vapors are heavier than air and may travel along surfaces to remote ignition sources and flash back. Never use welding or cutting torch on or near containers (even empty) because product can ignite explosively. Combustion products may be hazardous: Oxides of carbon, organic compounds, smoke and fumes.

Special Protective Equipment and Precautions for Fire-fighters: Wear NIOSH approved positive pressure, self-contained breathing apparatus and full protective clothing. Cool fire exposed containers with water. Protect against bursting cans.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Personal precautions, Protective equipment, and Emergency procedures: Wear appropriate protective clothing to prevent eye and skin contact including impervious gloves, safety goggles and respirator if needed.

Environmental precautions: Avoid release to the environment. Report spills and releases as required to appropriate authorities.

Methods and Materials for Containment and Cleaning up: Remove all ignition sources such as open flames, spark producing equipment, pilot lights, etc. Ventilate area. Cover with an inert absorbent material and collect into an appropriate container for disposal.

SECTION 7: HANDLING AND STORAGE

Precautions for Safe Handling: Avoid breathing vapors, aerosols and mists. Use with adequate ventilation. Avoid contact with the eyes, skin and clothing. Wash exposed skin thoroughly with soap and water after use. Keep product away from heat, sparks, flames and all other sources of ignition. No smoking in storage or use areas. Do not cut, braze, solder, grind or weld on or near containers. Contents under pressure. Do not puncture or incinerate container.

Conditions for Safe Storage, Including any Incompatibilities: Store in a cool, well ventilated area at temperatures below 120°F. Do not store in direct sunlight. Store as a Level 3 aerosol.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

| Chemical Name | Exposure Limits |
|---|--|
| Petroleum Distillates | 500 ppm TWA OSHA PEL (As stoddard solvent) 200 ppm TWA ACGIH TLV (as kerosene) |
| Severely Hydrotreated Petroleum Distillates | 5 mg/m3 TWA OSHA PEL 5 mg/m3 TWA ACGIH TLV (inhalable fraction) |
| 1,2,4-trimethylbenzene | 25 ppm TWA ACGIH TLV |
| Graphite | 5 mg/m3 TWA (respirable), 15 mg/m3 TWA (total dust) OSHA PEL 2 mg/m3 TWA ACGIH TLV (respirable) |
| Carbon Dioxide Propellant | 5000 ppm OSHA PEL-TWA 5000 ppm ACGIH TLV-TWA 30000 ppm ACGIH TLV-STEL |

Appropriate Engineering Controls: Use with adequate general or local exhaust ventilation to maintain concentrations below the occupational exposure limits. Use explosion proof electrical equipment and wiring where required.

Personal Protective Equipment:

Respiratory Protection: If the exposure limits listed above are exceeded, a NIOSH approved respirator with organic vapor cartridges may be used. For higher exposures, a supplied air respirator may be required. Respirator selection and use should be based on contaminant type, form and concentration. Follow OSHA 1910.134, ANSI Z88.2 and good Industrial Hygiene practice.

Hand protection: Impervious gloves are recommended when needed to avoid skin contact.

Eye Protection: Chemical safety goggles recommended.

Skin Protection: Impervious clothing as required to prevent skin contact and contamination of personal clothing.

Hygiene measures: Suitable eye wash and washing facilities should be available in the work area.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-----------------------------------|--|
| Appearance: | Slightly reddish liquid packaged as an aerosol | Odor: | Solvent |
| Odor Threshold: | Not available | pH: | Not available |
| Melting/Freezing Point: | Not available | Boiling Point/Range: | Not available |
| Flash Point: | 132°F (55.5°C) TOC | Evaporation Rate(ether=1): | Less than 1 |
| Flammability: (Solid, Gas) | Not applicable | Flammability Limits: | 10.9% (heavy aliphatic solvent naphtha) LEL: 0.7% (heavy aliphatic solvent naphtha) |
| Vapor Pressure: | Not available | Vapor Density: | Not available |
| Relative Density: | 0.88 | Solubilities: | Negligible in Water |
| Partition Coefficient: (N-Octanol/Water) | Not available | Autoignition Temperature: | Not available |
| Decomposition Temperature: | Not available | Viscosity: | Not available |

SECTION 10: STABILITY AND REACTIVITY

Reactivity: None known.

Chemical Stability: Stable under normal conditions of storage or use.

Possibility of Hazardous Reactions: None known.

Conditions to avoid: Avoid heat, sparks, flames and all other sources of ignition.

Incompatible Materials: Avoid strong oxidizing agents, reducing agents, acids and bases.

Hazardous decomposition products: Combustion will produce oxides of carbon, organic compounds, smoke and fumes.

SECTION 11: TOXICOLOGICAL INFORMATION

Potential Health Effects:

Eye: May cause eye irritation with redness, tearing and stinging.

Skin: May cause irritation with redness, rash, swelling. Prolonged or repeated contact may result in defatting and dermatitis.

Inhalation: Inhalation of vapors or mists may cause mucous membrane and upper respiratory tract irritation and central nervous system depression. Symptoms may include coughing, wheezing, shortness of breath, headache, dizziness, drowsiness, nausea, fatigue and unconsciousness.

Ingestion: Ingestion is an unlikely route of exposure for aerosol products. Swallowing may cause gastrointestinal irritation with abdominal pain, nausea, vomiting and diarrhea and central nervous system depression with symptoms including headache, dizziness, intoxication, weakness, nausea, and vomiting. Aspiration into the lungs during ingestion or vomiting may cause lung damage.

Chronic Hazards: Prolonged or repeated exposure may cause effects on the central nervous system, kidney and liver. Prolonged inhalation of graphite dust may cause lung damage.

Carcinogen Status: None of the components of this product at greater than 0.1% are listed as carcinogens by OSHA, IARC or NTP.

Acute toxicity: Toxicological testing has not been performed on this product as a mixture.

Severely Hydrotreated Petroleum Distillates: Oral rat LD50 > 5000 mg/kg; Dermal rat LD50 > 5000 mg/kg

Inhalation rat LC50 > 2.18 mg/L/4 hr.

Petroleum Distillates: Oral rat LD50 >5000 mg/kg, Inhalation rat LC50 >5.28 mg/L/4 hr, Dermal rabbit LD50 >2000 mg/kg

Graphite: Oral rat LD50 >2000 mg/kg, Inhalation rat LC50 >2.0 mg/L/4 hr (no mortalities)

Carbon Dioxide: Inhalation rat LC50 167857 ppm/4 hr

SECTION 12: ECOLOGICAL INFORMATION

Ecotoxicity: No toxicity data available for the product.

Severely Hydrotreated Petroleum Distillates: 96 hr. LC50 Pimephales promelas > 100 mg/L; 48 hr. EC50 daphnia magna >1000 mg/L; 72 hr. EC50 Pseudokirchnerella subcapitata > 100 mg/L

Petroleum Distillates: 96 hr LL50 Oncorhynchus mykiss 2.5 mg/kg, 48 hr EL50 daphnia magna 1.4 mg/L, 72 hr EL50 Pseudokirchnerella subcapitata 1.3 mg/L

Graphite: 96 hr LC50 Danio rerio >100 mg/L, 48 hr EC50 daphnia magna >100 mg/L, 72 hr EC50

Pseudokirchnerella subcapitata >100 mg/L

Carbon Dioxide: 96 hr LC50 Oncorhynchus mykiss 35 mg/L

Persistence and Degradability: Petroleum distillates is not readily biodegradable. Severely Hydrotreated Petroleum Distillates is inherently biodegradable based on structurally similar chemicals.

Bioaccumulative Potential: Severely Hydrotreated Petroleum Distillates and petroleum distillates have the potential to bioaccumulate.

Mobility in Soil: No data available.

Other Adverse Effects: None known

SECTION 13: DISPOSAL INFORMATION

Disposal instructions: Dispose of product in accordance with all local, state/provincial and federal regulations.

Contaminated packaging: Offer empty packaging material to local recycling facilities.

SECTION 14: TRANSPORT INFORMATION

| | UN Number | Proper shipping name | Hazard Class | Packing Group | Environmental Hazard |
|--------------------|-----------|--|--------------|---------------|----------------------|
| DOT Ground | | Consumer Commodity ORM-D or Limited Quantity | | | |
| DOT / 49CFR | UN1950 | Aerosols, Flammable, Limited Quantity | 2.1 | None | None |
| IMDG | UN1950 | Aerosols, Limited Quantity | 2.1 | None | None |
| IATA | UN1950 | Aerosols, Flammable, Limited Quantity | 2.1 | None | None |

Transport in bulk (according to Annex II of MARPOL 73/78 and the IBC Code): Not applicable – product is transported only in packaged form.

Special precautions: None known.

SECTION 15: REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS:

CERCLA 103 Reportable Quantity: This product is not subject to CERCLA reporting requirements, however, oil spills are reportable to the National Response Center under the Clean Water Act and many states have more stringent release reporting requirements. Report spills required under federal, state and local regulations.

SARA TITLE III:

Hazard Category for Section 311/312: Refer to Section 2 for the OSHA Hazard Classification

Section 313 Toxic Chemicals: This product contains the following chemicals subject to SARA Title III Section 313 Reporting requirements: 1,2,4-trimethylbenzene <15%

Section 302 Extremely Hazardous Substances (TPQ): None

EPA Toxic Substances Control Act (TSCA) Status: All of the components of this product are listed on the TSCA inventory.

| |
|--------------------------------------|
| SECTION 16: OTHER INFORMATION |
|--------------------------------------|

HMIS Ratings: Health - 2 Flammability - 4 Physical Hazard - 0

NFPA Ratings: Health - 1 Flammability - 2 Instability - 0

SDS Revision History: Sections 3, 8, 15

Date of preparation: June 6, 2018

Date of last revision: October 5th, 2016

The information contained herein has been developed based upon current available scientific data. New information may be developed from time to time which may render the conclusions of this report obsolete. Therefore, no warranty is extended as to the applicability of this information to the user's intended purpose or the consequences of its use or misuse.



Safety Data Sheet

Copyright,2021, 3M Company.

All rights reserved. Copying and/or downloading of this information for the purpose of properly utilizing 3M products is allowed provided that: (1) the information is copied in full with no changes unless prior written agreement is obtained from 3M, and (2) neither the copy nor the original is resold or otherwise distributed with the intention of earning a profit thereon.

| | | | |
|------------------------|-----------|-------------------------|----------|
| Document Group: | 16-3472-4 | Version Number: | 41.00 |
| Issue Date: | 04/13/21 | Supersedes Date: | 03/17/21 |

SECTION 1: Identification

1.1. Product identifier

3M(TM) Super 77(TM) Multipurpose Adhesive (Aerosol)

Product Identification Numbers

62-4977-2924-4, 62-4977-2928-5, 62-4977-4730-3, 62-4977-4922-6, 62-4977-4923-4, 62-4977-4925-9, 62-4977-4929-1, 62-4977-4930-9, 62-4977-4935-8

7000046597, 7000000931, 7000121447, 7010366502, 7010366503, 7010330395

1.2. Recommended use and restrictions on use

Recommended use

Adhesive aerosol, General Purpose Aerosol adhesive

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(13)) for consumer paint or coating removal.

1.3. Supplier's details

| | |
|----------------------|---|
| MANUFACTURER: | 3M |
| DIVISION: | Industrial Adhesives and Tapes Division |
| ADDRESS: | 3M Center, St. Paul, MN 55144-1000, USA |
| Telephone: | 1-888-3M HELPS (1-888-364-3577) |

1.4. Emergency telephone number

1-800-364-3577 or (651) 737-6501 (24 hours)

SECTION 2: Hazard identification

2.1. Hazard classification

Flammable Aerosol: Category 1.

Gas Under Pressure: Liquefied gas.

Serious Eye Damage/Irritation: Category 2A.

Reproductive Toxicity: Category 1B.

Simple Asphyxiant.

Specific Target Organ Toxicity (single exposure): Category 1.

Specific Target Organ Toxicity (single exposure): Category 3.

Specific Target Organ Toxicity (repeated exposure): Category 1.

2.2. Label elements

Signal word

Danger

Symbols

Flame | Gas cylinder | Exclamation mark | Health Hazard |

Pictograms**Hazard Statements**

Extremely flammable aerosol.

Contains gas under pressure; may explode if heated.

Causes serious eye irritation.

May cause drowsiness or dizziness.

May damage fertility or the unborn child.

May displace oxygen and cause rapid suffocation.

Causes damage to organs:

cardiovascular system |

Causes damage to organs through prolonged or repeated exposure:

nervous system |

Precautionary Statements**General:**

Keep out of reach of children.

Prevention:

Obtain special instructions before use.

Do not handle until all safety precautions have been read and understood.

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

Do not spray on an open flame or other ignition source.

Pressurized container: Do not pierce or burn, even after use.

Do not breathe dust/fume/gas/mist/vapors/spray.

Use only outdoors or in a well-ventilated area.

Wear protective gloves and eye/face protection.

Do not eat, drink or smoke when using this product.

Wash thoroughly after handling.

Response:

IF INHALED: Remove person to fresh air and keep comfortable for breathing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing.

If eye irritation persists: Get medical advice/attention.

IF exposed or concerned: Get medical advice/attention.

Specific treatment (see Notes to Physician on this label).

Storage:

Protect from sunlight. Do not expose to temperatures exceeding 50C/122F.

Keep container tightly closed.

Store locked up in a well-ventilated place.

Disposal:

Dispose of contents/container in accordance with applicable local/regional/national/international regulations.

Notes to Physician:

Exposure may increase myocardial irritability. Do not administer sympathomimetic drugs unless absolutely necessary.

Supplemental Information:

Intentional concentration and inhalation may be harmful or fatal.

SECTION 3: Composition/information on ingredients

| Ingredient | C.A.S. No. | % by Wt |
|--|---------------|------------------------|
| Acetone | 67-64-1 | 20 - 30 Trade Secret * |
| Non-volatile components - NJTS Registry No. 04499600-6433P | Trade Secret* | 10 - 30 Trade Secret * |
| Propane | 74-98-6 | 15 - 25 Trade Secret * |
| 2-Methylpentane | 107-83-5 | 5 - 20 Trade Secret * |
| Cyclohexane | 110-82-7 | 5 - 15 Trade Secret * |
| Terpane Polymer | 31393-98-3 | 1 - 10 Trade Secret * |
| Ethanol | 64-17-5 | < 4 Trade Secret * |
| Hexane | 110-54-3 | < 3 Trade Secret * |
| PENTANE | 109-66-0 | < 2 Trade Secret * |
| Limestone | 1317-65-3 | < 1.5 Trade Secret * |
| toluene | 108-88-3 | < 1 Trade Secret * |
| Methylene Chloride | 75-09-2 | < 0.01 Trade Secret * |

NJTS or NJTSRN: New Jersey Trade Secret Registry Number.

*The specific chemical identity and/or exact percentage (concentration) of this composition has been withheld as a trade secret.

SECTION 4: First aid measures**4.1. Description of first aid measures****Inhalation:**

Remove person to fresh air. Get medical attention.

Skin Contact:

Wash with soap and water. If signs/symptoms develop, get medical attention.

Eye Contact:

Immediately flush with large amounts of water. Remove contact lenses if easy to do. Continue rinsing. Get medical attention.

If Swallowed:

Rinse mouth. If you feel unwell, get medical attention.

4.2. Most important symptoms and effects, both acute and delayed

Central nervous system depression (headache, dizziness, drowsiness, incoordination, nausea, slurred speech, giddiness, and unconsciousness). Target organ effects. See Section 11 for additional details. Target organ effects following prolonged or repeated exposure. See Section 11 for additional details.

4.3. Indication of any immediate medical attention and special treatment required

Exposure may increase myocardial irritability. Do not administer sympathomimetic drugs unless absolutely necessary.

SECTION 5: Fire-fighting measures

5.1. Suitable extinguishing media

Use a fire fighting agent suitable for the surrounding fire.

5.2. Special hazards arising from the substance or mixture

Closed containers exposed to heat from fire may build pressure and explode.

Hazardous Decomposition or By-Products

| <u>Substance</u> | <u>Condition</u> |
|------------------|-------------------|
| Aldehydes | During Combustion |
| Carbon monoxide | During Combustion |
| Carbon dioxide | During Combustion |

5.3. Special protective actions for fire-fighters

Water may not effectively extinguish fire; however, it should be used to keep fire-exposed containers and surfaces cool and prevent explosive rupture.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

Evacuate area. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only non-sparking tools. Ventilate the area with fresh air. For large spill, or spills in confined spaces, provide mechanical ventilation to disperse or exhaust vapors, in accordance with good industrial hygiene practice. Warning! A motor could be an ignition source and could cause flammable gases or vapors in the spill area to burn or explode. Refer to other sections of this SDS for information regarding physical and health hazards, respiratory protection, ventilation, and personal protective equipment.

6.2. Environmental precautions

For larger spills, cover drains and build dikes to prevent entry into sewer systems or bodies of water.

6.3. Methods and material for containment and cleaning up

If possible, seal leaking container. Place leaking containers in a well-ventilated area, preferably an operating exhaust hood, or if necessary outdoors on an impermeable surface until appropriate packaging for the leaking container or its contents is available. Contain spill. Cover spill area with a fire-extinguishing foam. Working from around the edges of the spill inward, cover with bentonite, vermiculite, or commercially available inorganic absorbent material. Mix in sufficient absorbent until it appears dry. Remember, adding an absorbent material does not remove a physical, health, or environmental hazard. Collect as much of the spilled material as possible using non-sparking tools. Place in a metal container approved for transportation by appropriate authorities. Clean up residue with an appropriate solvent selected by a qualified and authorized person. Ventilate the area with fresh air. Read and follow safety precautions on the solvent label and SDS. Seal the container. Dispose of collected material as soon as possible in accordance with applicable local/regional/national/international regulations.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Keep out of reach of children. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Do not breathe dust/fume/gas/mist/vapors/spray. Do not get in eyes, on skin, or on clothing. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Avoid contact with oxidizing agents (eg. chlorine, chromic acid etc.) Use personal protective equipment (gloves, respirators, etc.) as required.

7.2. Conditions for safe storage including any incompatibilities

Store in a well-ventilated place. Keep container tightly closed. Protect from sunlight. Do not expose to temperatures exceeding 50C/122F. Store away from heat. Store away from acids. Store away from oxidizing agents.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Occupational exposure limits

If a component is disclosed in section 3 but does not appear in the table below, an occupational exposure limit is not available for the component.

| Ingredient | C.A.S. No. | Agency | Limit type | Additional Comments |
|--------------------|------------|--------|--|---|
| 2-Methylpentane | 107-83-5 | ACGIH | TWA:500 ppm;STEL:1000 ppm | |
| toluene | 108-88-3 | ACGIH | TWA:20 ppm | A4: Not class. as human carcin, Ototoxicant |
| toluene | 108-88-3 | OSHA | TWA:200 ppm;CEIL:300 ppm | |
| PENTANE | 109-66-0 | ACGIH | TWA:1000 ppm | |
| PENTANE | 109-66-0 | OSHA | TWA:2950 mg/m3(1000 ppm) | |
| Hexane | 110-54-3 | ACGIH | TWA:50 ppm | Danger of cutaneous absorption |
| Hexane | 110-54-3 | OSHA | TWA:1800 mg/m3(500 ppm) | |
| Cyclohexane | 110-82-7 | ACGIH | TWA:100 ppm | |
| Cyclohexane | 110-82-7 | OSHA | TWA:1050 mg/m3(300 ppm) | |
| Limestone | 1317-65-3 | OSHA | TWA(as total dust):15 mg/m3;TWA(respirable fraction):5 mg/m3 | |
| Ethanol | 64-17-5 | ACGIH | STEL:1000 ppm | A3: Confirmed animal carcin. |
| Ethanol | 64-17-5 | OSHA | TWA:1900 mg/m3(1000 ppm) | |
| Acetone | 67-64-1 | ACGIH | TWA:250 ppm;STEL:500 ppm | A4: Not class. as human carcin |
| Acetone | 67-64-1 | OSHA | TWA:2400 mg/m3(1000 ppm) | |
| Propane | 74-98-6 | ACGIH | Limit value not established: | simple asphyxiant |
| Propane | 74-98-6 | OSHA | TWA:1800 mg/m3(1000 ppm) | |
| Methylene Chloride | 75-09-2 | ACGIH | TWA:50 ppm | A3: Confirmed animal carcin. |
| Methylene Chloride | 75-09-2 | OSHA | TWA:25 ppm;STEL:125 ppm | 29 CFR 1910.1052, SKIN |

ACGIH : American Conference of Governmental Industrial Hygienists

AIHA : American Industrial Hygiene Association

CMRG : Chemical Manufacturer's Recommended Guidelines

OSHA : United States Department of Labor - Occupational Safety and Health Administration

TWA: Time-Weighted-Average

STEL: Short Term Exposure Limit

CEIL: Ceiling

8.2. Exposure controls

8.2.1. Engineering controls

Do not remain in area where available oxygen may be reduced. Use general dilution ventilation and/or local exhaust ventilation to control airborne exposures to below relevant Exposure Limits and/or control dust/fume/gas/mist/vapors/spray. If ventilation is not adequate, use respiratory protection equipment.

8.2.2. Personal protective equipment (PPE)

Eye/face protection

Select and use eye/face protection to prevent contact based on the results of an exposure assessment. The following eye/face protection(s) are recommended:

Indirect Vented Goggles

Skin/hand protection

Select and use gloves and/or protective clothing approved to relevant local standards to prevent skin contact based on the results of an exposure assessment. Selection should be based on use factors such as exposure levels, concentration of the substance or mixture, frequency and duration, physical challenges such as temperature extremes, and other use conditions. Consult with your glove and/or protective clothing manufacturer for selection of appropriate compatible gloves/protective clothing. Note: Nitrile gloves may be worn over polymer laminate gloves to improve dexterity.

Gloves made from the following material(s) are recommended: Polymer laminate

Respiratory protection

An exposure assessment may be needed to decide if a respirator is required. If a respirator is needed, use respirators as part of a full respiratory protection program. Based on the results of the exposure assessment, select from the following respirator type(s) to reduce inhalation exposure:

Half facepiece or full facepiece air-purifying respirator suitable for organic vapors and particulates

Half facepiece or full facepiece supplied-air respirator

Organic vapor respirators may have short service life.

For questions about suitability for a specific application, consult with your respirator manufacturer.

SECTION 9: Physical and chemical properties**9.1. Information on basic physical and chemical properties****Appearance**

Physical state

Liquid aerosol

Color

Colorless

Specific Physical Form:

Aerosol

Odor

Sweet Odor, Fruity Odor

Odor threshold

No Data Available

pH

No Data Available

Melting point

No Data Available

Boiling Point

Not Applicable

Flash Point

-42.00 °F [*Test Method*: Tagliabue Closed Cup]

Evaporation rate

1.9 [*Ref Std*: ETHER=1]

Flammability (solid, gas)

Not Applicable

Flammable Limits(LEL)

No Data Available

Flammable Limits(UEL)

No Data Available

Vapor Pressure

[*Details*: Compressed gas] *Not Applicable*

Vapor Density

2.97 [*Ref Std*: AIR=1]

Density

0.726 g/ml

Specific Gravity

0.726 [*Ref Std*: WATER=1]

Solubility in Water

Nil

Solubility- non-water

No Data Available

Partition coefficient: n-octanol/ water

No Data Available

Autoignition temperature

No Data Available

Decomposition temperature

Not Applicable

Viscosity

Not Applicable

Hazardous Air Pollutants

<=0.4 % weight [*Test Method*: Calculated]

VOC Less H2O & Exempt Solvents

<=51 % [*Test Method*: calculated per CARB title 2]

Solids Content

≥22.4 %

SECTION 10: Stability and reactivity**10.1. Reactivity**

This material may be reactive with certain agents under certain conditions - see the remaining headings in this section.

10.2. Chemical stability

Stable.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Heat

10.5. Incompatible materials

Strong oxidizing agents

10.6. Hazardous decomposition products**Substance****Condition**

None known.

Refer to section 5.2 for hazardous decomposition products during combustion.

SECTION 11: Toxicological information

The information below may not be consistent with the material classification in Section 2 if specific ingredient classifications are mandated by a competent authority. In addition, toxicological data on ingredients may not be reflected in the material classification and/or the signs and symptoms of exposure, because an ingredient may be present below the threshold for labeling, an ingredient may not be available for exposure, or the data may not be relevant to the material as a whole.

11.1. Information on Toxicological effects**Signs and Symptoms of Exposure**

Based on test data and/or information on the components, this material may produce the following health effects:

Inhalation:

Simple Asphyxiation: Signs/symptoms may include increased heart rate, rapid respirations, drowsiness, headache, incoordination, altered judgement, nausea, vomiting, lethargy, seizures, coma, and may be fatal.

Respiratory Tract Irritation: Signs/symptoms may include cough, sneezing, nasal discharge, headache, hoarseness, and nose and throat pain.

May cause additional health effects (see below).

Skin Contact:

Mild Skin Irritation: Signs/symptoms may include localized redness, swelling, itching, and dryness.

Eye Contact:

Severe Eye Irritation: Signs/symptoms may include significant redness, swelling, pain, tearing, cloudy appearance of the cornea, and impaired vision.

Ingestion:

Gastrointestinal Irritation: Signs/symptoms may include abdominal pain, stomach upset, nausea, vomiting and diarrhea.

May cause additional health effects (see below).

Additional Health Effects:**Single exposure may cause target organ effects:**

Central Nervous System (CNS) Depression: Signs/symptoms may include headache, dizziness, drowsiness, incoordination, nausea, slowed reaction time, slurred speech, giddiness, and unconsciousness.

Single exposure, above recommended guidelines, may cause: Cardiac Sensitization: Signs/symptoms may include irregular heartbeat (arrhythmia), faintness, chest pain, and may be fatal.

Prolonged or repeated exposure may cause target organ effects:

Peripheral Neuropathy: Signs/symptoms may include tingling or numbness of the extremities, incoordination, weakness of the hands and feet, tremors and muscle atrophy.

Reproductive/Developmental Toxicity:

Contains a chemical or chemicals which can cause birth defects or other reproductive harm.

Carcinogenicity:

| Ingredient | CAS No. | Class Description | Regulation |
|--------------------|---------|-------------------------------|---|
| Methylene Chloride | 75-09-2 | Grp. 2A: Probable human carc. | International Agency for Research on Cancer |
| Methylene Chloride | 75-09-2 | Anticipated human carcinogen | National Toxicology Program Carcinogens |
| Methylene Chloride | 75-09-2 | Cancer hazard | OSHA Carcinogens |

Additional Information:

This product contains ethanol. Alcoholic beverages and ethanol in alcoholic beverages have been classified by the International Agency for Research on Cancer as carcinogenic to humans. There are also data associating human consumption of alcoholic beverages with developmental toxicity and liver toxicity. Exposure to ethanol during the foreseeable use of this product is not expected to cause cancer, developmental toxicity, or liver toxicity.

Toxicological Data

If a component is disclosed in section 3 but does not appear in a table below, either no data are available for that endpoint or the data are not sufficient for classification.

Acute Toxicity

| Name | Route | Species | Value |
|-----------------|----------------------------|---------|--|
| Overall product | Dermal | | No data available; calculated ATE >5,000 mg/kg |
| Overall product | Inhalation-Vapor(4 hr) | | No data available; calculated ATE >50 mg/l |
| Overall product | Ingestion | | No data available; calculated ATE >5,000 mg/kg |
| Propane | Inhalation-Gas (4 hours) | Rat | LC50 > 200,000 ppm |
| Acetone | Dermal | Rabbit | LD50 > 15,688 mg/kg |
| Acetone | Inhalation-Vapor (4 hours) | Rat | LC50 76 mg/l |
| Acetone | Ingestion | Rat | LD50 5,800 mg/kg |
| 2-Methylpentane | Dermal | | LD50 estimated to be > 5,000 mg/kg |
| 2-Methylpentane | Inhalation-Vapor | | LC50 estimated to be > 50 mg/l |
| 2-Methylpentane | Ingestion | | LD50 estimated to be > 5,000 mg/kg |
| Cyclohexane | Dermal | Rat | LD50 > 2,000 mg/kg |

| | | | |
|--|--------------------------------|--------|--|
| Cyclohexane | Inhalation-Vapor (4 hours) | Rat | LC50 > 32.9 mg/l |
| Cyclohexane | Ingestion | Rat | LD50 6,200 mg/kg |
| Non-volatile components - NJTS Registry No. 04499600-6433P | Dermal | | LD50 estimated to be > 5,000 mg/kg |
| Non-volatile components - NJTS Registry No. 04499600-6433P | Ingestion | | LD50 estimated to be 2,000 - 5,000 mg/kg |
| Terpane Polymer | Dermal | | LD50 estimated to be > 5,000 mg/kg |
| Terpane Polymer | Ingestion | Rat | LD50 > 34,000 mg/kg |
| Ethanol | Dermal | Rabbit | LD50 > 15,800 mg/kg |
| Ethanol | Inhalation-Vapor (4 hours) | Rat | LC50 124.7 mg/l |
| Ethanol | Ingestion | Rat | LD50 17,800 mg/kg |
| PENTANE | Dermal | Rabbit | LD50 3,000 mg/kg |
| PENTANE | Inhalation-Vapor (4 hours) | Rat | LC50 > 18 mg/l |
| PENTANE | Ingestion | Rat | LD50 > 2,000 mg/kg |
| Hexane | Dermal | Rabbit | LD50 > 2,000 mg/kg |
| Hexane | Inhalation-Vapor (4 hours) | Rat | LC50 170 mg/l |
| Hexane | Ingestion | Rat | LD50 > 28,700 mg/kg |
| Limestone | Dermal | Rat | LD50 > 2,000 mg/kg |
| Limestone | Inhalation-Dust/Mist (4 hours) | Rat | LC50 3 mg/l |
| Limestone | Ingestion | Rat | LD50 6,450 mg/kg |
| toluene | Dermal | Rat | LD50 12,000 mg/kg |
| toluene | Inhalation-Vapor (4 hours) | Rat | LC50 30 mg/l |
| toluene | Ingestion | Rat | LD50 5,550 mg/kg |
| Methylene Chloride | Dermal | Rat | LD50 > 2,000 mg/kg |
| Methylene Chloride | Inhalation-Vapor (4 hours) | Rat | LC50 63.7 mg/l |
| Methylene Chloride | Ingestion | Rat | LD50 1,410 mg/kg |

ATE = acute toxicity estimate

Skin Corrosion/Irritation

| Name | Species | Value |
|--|------------------------|---------------------------|
| Propane | Rabbit | Minimal irritation |
| Acetone | Mouse | Minimal irritation |
| 2-Methylpentane | Professional judgement | Mild irritant |
| Cyclohexane | Rabbit | Mild irritant |
| Non-volatile components - NJTS Registry No. 04499600-6433P | Professional judgement | Minimal irritation |
| Ethanol | Rabbit | No significant irritation |
| PENTANE | Rabbit | Minimal irritation |
| Hexane | Human and animal | Mild irritant |
| Limestone | Rabbit | No significant irritation |
| toluene | Rabbit | Irritant |
| Methylene Chloride | Rabbit | Irritant |

Serious Eye Damage/Irritation

| Name | Species | Value |
|--------------------|------------------------|---------------------------|
| Propane | Rabbit | Mild irritant |
| Acetone | Rabbit | Severe irritant |
| 2-Methylpentane | Professional judgement | Moderate irritant |
| Cyclohexane | Rabbit | Mild irritant |
| Ethanol | Rabbit | Severe irritant |
| PENTANE | Rabbit | Mild irritant |
| Hexane | Rabbit | Mild irritant |
| Limestone | Rabbit | No significant irritation |
| toluene | Rabbit | Moderate irritant |
| Methylene Chloride | Rabbit | Severe irritant |

Skin Sensitization

| Name | Species | Value |
|---------|------------|----------------|
| Ethanol | Human | Not classified |
| PENTANE | Guinea pig | Not classified |
| Hexane | Human | Not classified |
| toluene | Guinea pig | Not classified |

Respiratory Sensitization

For the component/components, either no data are currently available or the data are not sufficient for classification.

Germ Cell Mutagenicity

| Name | Route | Value |
|--------------------|----------|--|
| Propane | In Vitro | Not mutagenic |
| Acetone | In vivo | Not mutagenic |
| Acetone | In Vitro | Some positive data exist, but the data are not sufficient for classification |
| Cyclohexane | In Vitro | Not mutagenic |
| Cyclohexane | In vivo | Some positive data exist, but the data are not sufficient for classification |
| Ethanol | In Vitro | Some positive data exist, but the data are not sufficient for classification |
| Ethanol | In vivo | Some positive data exist, but the data are not sufficient for classification |
| PENTANE | In vivo | Not mutagenic |
| PENTANE | In Vitro | Some positive data exist, but the data are not sufficient for classification |
| Hexane | In Vitro | Not mutagenic |
| Hexane | In vivo | Not mutagenic |
| toluene | In Vitro | Not mutagenic |
| toluene | In vivo | Not mutagenic |
| Methylene Chloride | In vivo | Not mutagenic |
| Methylene Chloride | In Vitro | Some positive data exist, but the data are not sufficient for classification |

Carcinogenicity

| Name | Route | Species | Value |
|---------|---------------|-------------------------|--|
| Acetone | Not Specified | Multiple animal species | Not carcinogenic |
| Ethanol | Ingestion | Multiple animal species | Some positive data exist, but the data are not sufficient for classification |
| Hexane | Dermal | Mouse | Not carcinogenic |
| Hexane | Inhalation | Mouse | Some positive data exist, but the data are not |

| | | | |
|--------------------|------------|-------------------------|--|
| | | | sufficient for classification |
| toluene | Dermal | Mouse | Some positive data exist, but the data are not sufficient for classification |
| toluene | Ingestion | Rat | Some positive data exist, but the data are not sufficient for classification |
| toluene | Inhalation | Mouse | Some positive data exist, but the data are not sufficient for classification |
| Methylene Chloride | Inhalation | Multiple animal species | Carcinogenic |

Reproductive Toxicity

Reproductive and/or Developmental Effects

| Name | Route | Value | Species | Test Result | Exposure Duration |
|--------------------|------------|--|-------------------------|-----------------------|--------------------------------|
| Acetone | Ingestion | Not classified for male reproduction | Rat | NOAEL 1,700 mg/kg/day | 13 weeks |
| Acetone | Inhalation | Not classified for development | Rat | NOAEL 5.2 mg/l | during organogenesis |
| Cyclohexane | Inhalation | Not classified for female reproduction | Rat | NOAEL 24 mg/l | 2 generation |
| Cyclohexane | Inhalation | Not classified for male reproduction | Rat | NOAEL 24 mg/l | 2 generation |
| Cyclohexane | Inhalation | Not classified for development | Rat | NOAEL 6.9 mg/l | 2 generation |
| Ethanol | Inhalation | Not classified for development | Rat | NOAEL 38 mg/l | during gestation |
| Ethanol | Ingestion | Not classified for development | Rat | NOAEL 5,200 mg/kg/day | prematuring & during gestation |
| PENTANE | Ingestion | Not classified for development | Rat | NOAEL 1,000 mg/kg/day | during organogenesis |
| PENTANE | Inhalation | Not classified for development | Rat | NOAEL 30 mg/l | during organogenesis |
| Hexane | Ingestion | Not classified for development | Mouse | NOAEL 2,200 mg/kg/day | during organogenesis |
| Hexane | Inhalation | Not classified for development | Rat | NOAEL 0.7 mg/l | during gestation |
| Hexane | Ingestion | Toxic to male reproduction | Rat | NOAEL 1,140 mg/kg/day | 90 days |
| Hexane | Inhalation | Toxic to male reproduction | Rat | LOAEL 3.52 mg/l | 28 days |
| Limestone | Ingestion | Not classified for development | Rat | NOAEL 625 mg/kg/day | prematuring & during gestation |
| toluene | Inhalation | Not classified for female reproduction | Human | NOAEL Not available | occupational exposure |
| toluene | Inhalation | Not classified for male reproduction | Rat | NOAEL 2.3 mg/l | 1 generation |
| toluene | Ingestion | Toxic to development | Rat | LOAEL 520 mg/kg/day | during gestation |
| toluene | Inhalation | Toxic to development | Human | NOAEL Not available | poisoning and/or abuse |
| Methylene Chloride | Inhalation | Not classified for female reproduction | Rat | NOAEL 5.2 mg/l | 2 generation |
| Methylene Chloride | Inhalation | Not classified for male reproduction | Rat | NOAEL 5.2 mg/l | 2 generation |
| Methylene Chloride | Inhalation | Not classified for development | Multiple animal species | NOAEL 4.3 mg/l | during gestation |

Target Organ(s)

Specific Target Organ Toxicity - single exposure

| Name | Route | Target Organ(s) | Value | Species | Test Result | Exposure Duration |
|-----------------|------------|-----------------------------------|--|-------------------------|---------------------|------------------------|
| Propane | Inhalation | cardiac sensitization | Causes damage to organs | Human | NOAEL Not available | |
| Propane | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | |
| Propane | Inhalation | respiratory irritation | Not classified | Human | NOAEL Not available | |
| Acetone | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | |
| Acetone | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Human | NOAEL Not available | |
| Acetone | Inhalation | immune system | Not classified | Human | NOAEL 1.19 mg/l | 6 hours |
| Acetone | Inhalation | liver | Not classified | Guinea pig | NOAEL Not available | |
| Acetone | Ingestion | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | poisoning and/or abuse |
| 2-Methylpentane | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Professional judgement | NOAEL Not available | |
| 2-Methylpentane | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | | NOAEL Not available | |
| 2-Methylpentane | Inhalation | cardiac sensitization | Not classified | Dog | NOAEL Not available | |
| 2-Methylpentane | Ingestion | central nervous system depression | May cause drowsiness or dizziness | Professional judgement | NOAEL Not available | |
| Cyclohexane | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human and animal | NOAEL Not available | |
| Cyclohexane | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Human and animal | NOAEL Not available | |
| Cyclohexane | Ingestion | central nervous system depression | May cause drowsiness or dizziness | Professional judgement | NOAEL Not available | |
| Ethanol | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Human | LOAEL 9.4 mg/l | not available |
| Ethanol | Inhalation | central nervous system depression | Not classified | Human and animal | NOAEL not available | |
| Ethanol | Ingestion | central nervous system depression | Not classified | Multiple animal species | NOAEL not available | |
| Ethanol | Ingestion | kidney and/or bladder | Not classified | Dog | NOAEL 3,000 mg/kg | |
| PENTANE | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Multiple animal species | NOAEL Not available | not available |
| PENTANE | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Not available | NOAEL Not available | not available |
| PENTANE | Inhalation | cardiac sensitization | Not classified | Dog | NOAEL Not available | not available |
| PENTANE | Ingestion | central nervous system depression | May cause drowsiness or dizziness | Professional judgement | NOAEL Not available | not available |

| | | | | nt | | |
|--------------------|------------|-----------------------------------|--|--------|---------------------|------------------------|
| Hexane | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | not available |
| Hexane | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Rabbit | NOAEL Not available | 8 hours |
| Hexane | Inhalation | respiratory system | Not classified | Rat | NOAEL 24.6 mg/l | 8 hours |
| Limestone | Inhalation | respiratory system | Not classified | Rat | NOAEL 0.812 mg/l | 90 minutes |
| toluene | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | |
| toluene | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Human | NOAEL Not available | |
| toluene | Inhalation | immune system | Not classified | Mouse | NOAEL 0.004 mg/l | 3 hours |
| toluene | Ingestion | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | poisoning and/or abuse |
| Methylene Chloride | Dermal | blood | Some positive data exist, but the data are not sufficient for classification | Rat | NOAEL Not available | 4 hours |
| Methylene Chloride | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | occupational exposure |
| Methylene Chloride | Inhalation | blood | Some positive data exist, but the data are not sufficient for classification | Human | NOAEL Not available | |
| Methylene Chloride | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | | NOAEL Not available | |

Specific Target Organ Toxicity - repeated exposure

| Name | Route | Target Organ(s) | Value | Species | Test Result | Exposure Duration |
|-----------------|------------|--|----------------|------------|------------------------|-------------------|
| Acetone | Dermal | eyes | Not classified | Guinea pig | NOAEL Not available | 3 weeks |
| Acetone | Inhalation | hematopoietic system | Not classified | Human | NOAEL 3 mg/l | 6 weeks |
| Acetone | Inhalation | immune system | Not classified | Human | NOAEL 1.19 mg/l | 6 days |
| Acetone | Inhalation | kidney and/or bladder | Not classified | Guinea pig | NOAEL 119 mg/l | not available |
| Acetone | Inhalation | heart liver | Not classified | Rat | NOAEL 45 mg/l | 8 weeks |
| Acetone | Ingestion | kidney and/or bladder | Not classified | Rat | NOAEL 900 mg/kg/day | 13 weeks |
| Acetone | Ingestion | heart | Not classified | Rat | NOAEL 2,500 mg/kg/day | 13 weeks |
| Acetone | Ingestion | hematopoietic system | Not classified | Rat | NOAEL 200 mg/kg/day | 13 weeks |
| Acetone | Ingestion | liver | Not classified | Mouse | NOAEL 3,896 mg/kg/day | 14 days |
| Acetone | Ingestion | eyes | Not classified | Rat | NOAEL 3,400 mg/kg/day | 13 weeks |
| Acetone | Ingestion | respiratory system | Not classified | Rat | NOAEL 2,500 mg/kg/day | 13 weeks |
| Acetone | Ingestion | muscles | Not classified | Rat | NOAEL 2,500 mg/kg | 13 weeks |
| Acetone | Ingestion | skin bone, teeth, nails, and/or hair | Not classified | Mouse | NOAEL 11,298 mg/kg/day | 13 weeks |
| 2-Methylpentane | Inhalation | peripheral nervous system | Not classified | Rat | NOAEL 5.3 mg/l | 14 weeks |

| | | | | | | |
|-----------------|------------|--|--|--------|-----------------------|-----------------------|
| 2-Methylpentane | Ingestion | peripheral nervous system | Not classified | Rat | NOAEL Not available | 8 weeks |
| 2-Methylpentane | Ingestion | kidney and/or bladder | Not classified | Rat | LOAEL 2,000 mg/kg | 28 days |
| Cyclohexane | Inhalation | liver | Not classified | Rat | NOAEL 24 mg/l | 90 days |
| Cyclohexane | Inhalation | auditory system | Not classified | Rat | NOAEL 1.7 mg/l | 90 days |
| Cyclohexane | Inhalation | kidney and/or bladder | Not classified | Rabbit | NOAEL 2.7 mg/l | 10 weeks |
| Cyclohexane | Inhalation | hematopoietic system | Not classified | Mouse | NOAEL 24 mg/l | 14 weeks |
| Cyclohexane | Inhalation | peripheral nervous system | Not classified | Rat | NOAEL 8.6 mg/l | 30 weeks |
| Ethanol | Inhalation | liver | Some positive data exist, but the data are not sufficient for classification | Rabbit | LOAEL 124 mg/l | 365 days |
| Ethanol | Inhalation | hematopoietic system immune system | Not classified | Rat | NOAEL 25 mg/l | 14 days |
| Ethanol | Ingestion | liver | Some positive data exist, but the data are not sufficient for classification | Rat | LOAEL 8,000 mg/kg/day | 4 months |
| Ethanol | Ingestion | kidney and/or bladder | Not classified | Dog | NOAEL 3,000 mg/kg/day | 7 days |
| PENTANE | Inhalation | peripheral nervous system | Not classified | Human | NOAEL Not available | occupational exposure |
| PENTANE | Inhalation | heart skin endocrine system gastrointestinal tract bone, teeth, nails, and/or hair hematopoietic system liver immune system muscles nervous system eyes kidney and/or bladder respiratory system | Not classified | Rat | NOAEL 20 mg/l | 13 weeks |
| PENTANE | Ingestion | kidney and/or bladder | Not classified | Rat | NOAEL 2,000 mg/kg/day | 28 days |
| Hexane | Inhalation | peripheral nervous system | Causes damage to organs through prolonged or repeated exposure | Human | NOAEL Not available | occupational exposure |
| Hexane | Inhalation | respiratory system | Some positive data exist, but the data are not sufficient for classification | Mouse | LOAEL 1.76 mg/l | 13 weeks |
| Hexane | Inhalation | liver | Not classified | Rat | NOAEL Not available | 6 months |
| Hexane | Inhalation | kidney and/or bladder | Not classified | Rat | LOAEL 1.76 mg/l | 6 months |
| Hexane | Inhalation | hematopoietic system | Not classified | Mouse | NOAEL 35.2 mg/l | 13 weeks |
| Hexane | Inhalation | auditory system immune system eyes | Not classified | Human | NOAEL Not available | occupational exposure |
| Hexane | Inhalation | heart skin endocrine system | Not classified | Rat | NOAEL 1.76 mg/l | 6 months |
| Hexane | Ingestion | peripheral nervous system | Some positive data exist, but the data are not sufficient for classification | Rat | NOAEL 1,140 mg/kg/day | 90 days |
| Hexane | Ingestion | endocrine system hematopoietic system liver immune system kidney and/or | Not classified | Rat | NOAEL Not available | 13 weeks |

| | | | | | | |
|--------------------|------------|---|--|-------------------------|-----------------------|------------------------|
| | | bladder | | | | |
| Limestone | Inhalation | respiratory system | Not classified | Human | NOAEL Not available | occupational exposure |
| toluene | Inhalation | auditory system eyes olfactory system | Causes damage to organs through prolonged or repeated exposure | Human | NOAEL Not available | poisoning and/or abuse |
| toluene | Inhalation | nervous system | May cause damage to organs though prolonged or repeated exposure | Human | NOAEL Not available | poisoning and/or abuse |
| toluene | Inhalation | respiratory system | Some positive data exist, but the data are not sufficient for classification | Rat | LOAEL 2.3 mg/l | 15 months |
| toluene | Inhalation | heart liver kidney and/or bladder | Not classified | Rat | NOAEL 11.3 mg/l | 15 weeks |
| toluene | Inhalation | endocrine system | Not classified | Rat | NOAEL 1.1 mg/l | 4 weeks |
| toluene | Inhalation | immune system | Not classified | Mouse | NOAEL Not available | 20 days |
| toluene | Inhalation | bone, teeth, nails, and/or hair | Not classified | Mouse | NOAEL 1.1 mg/l | 8 weeks |
| toluene | Inhalation | hematopoietic system vascular system | Not classified | Human | NOAEL Not available | occupational exposure |
| toluene | Inhalation | gastrointestinal tract | Not classified | Multiple animal species | NOAEL 11.3 mg/l | 15 weeks |
| toluene | Ingestion | nervous system | Some positive data exist, but the data are not sufficient for classification | Rat | NOAEL 625 mg/kg/day | 13 weeks |
| toluene | Ingestion | heart | Not classified | Rat | NOAEL 2,500 mg/kg/day | 13 weeks |
| toluene | Ingestion | liver kidney and/or bladder | Not classified | Multiple animal species | NOAEL 2,500 mg/kg/day | 13 weeks |
| toluene | Ingestion | hematopoietic system | Not classified | Mouse | NOAEL 600 mg/kg/day | 14 days |
| toluene | Ingestion | endocrine system | Not classified | Mouse | NOAEL 105 mg/kg/day | 28 days |
| toluene | Ingestion | immune system | Not classified | Mouse | NOAEL 105 mg/kg/day | 4 weeks |
| Methylene Chloride | Inhalation | kidney and/or bladder | Some positive data exist, but the data are not sufficient for classification | Rat | LOAEL 6.95 mg/l | 2 years |
| Methylene Chloride | Inhalation | liver | Some positive data exist, but the data are not sufficient for classification | Rat | NOAEL 0.17 mg/l | 2 years |
| Methylene Chloride | Inhalation | respiratory system | Some positive data exist, but the data are not sufficient for classification | Multiple animal species | LOAEL 35 mg/l | 8 weeks |
| Methylene Chloride | Inhalation | heart | Not classified | Human | NOAEL Not available | |
| Methylene Chloride | Inhalation | immune system | Not classified | Rat | NOAEL 18 mg/l | 28 days |
| Methylene Chloride | Ingestion | liver | Some positive data exist, but the data are not sufficient for classification | Rat | LOAEL 1,200 mg/kg/day | 3 months |
| Methylene Chloride | Ingestion | blood | Not classified | Rat | NOAEL 249 mg/kg/day | 2 years |
| Methylene Chloride | Ingestion | kidney and/or bladder | Not classified | Rat | NOAEL 1,469 mg/kg/day | 3 months |
| Methylene Chloride | Ingestion | eyes | Not classified | Rat | NOAEL 249 mg/kg/day | 104 weeks |

Aspiration Hazard

| Name | Value |
|------|-------|
|------|-------|

| | |
|-----------------|-------------------|
| 2-Methylpentane | Aspiration hazard |
| Cyclohexane | Aspiration hazard |
| PENTANE | Aspiration hazard |
| Hexane | Aspiration hazard |
| toluene | Aspiration hazard |

Please contact the address or phone number listed on the first page of the SDS for additional toxicological information on this material and/or its components.

SECTION 12: Ecological information

Ecotoxicological information

Please contact the address or phone number listed on the first page of the SDS for additional ecotoxicological information on this material and/or its components.

Chemical fate information

Please contact the address or phone number listed on the first page of the SDS for additional chemical fate information on this material and/or its components.

SECTION 13: Disposal considerations

13.1. Disposal methods

Dispose of contents/ container in accordance with the local/regional/national/international regulations.

Dispose of waste product in a permitted industrial waste facility. Facility must be capable of handling aerosol cans.

EPA Hazardous Waste Number (RCRA): D001 (Ignitable)

SECTION 14: Transport Information

| |
|---|
| For Transport Information, please visit http://3M.com/Transportinfo or call 1-800-364-3577 or 651-737-6501. |
|---|

SECTION 15: Regulatory information

15.1. US Federal Regulations

Contact 3M for more information.

EPCRA 311/312 Hazard Classifications:

| |
|---|
| Physical Hazards |
| Flammable (gases, aerosols, liquids, or solids) |
| Gas under pressure |

| |
|--|
| Health Hazards |
| Reproductive toxicity |
| Serious eye damage or eye irritation |
| Simple Asphyxiant |
| Specific target organ toxicity (single or repeated exposure) |

Section 313 Toxic Chemicals subject to the reporting requirements of that section and 40 CFR part 372 (EPCRA):

| <u>Ingredient</u> | <u>C.A.S. No</u> | <u>% by Wt</u> |
|-------------------|------------------|----------------|
| | | |

| | | |
|-------------|----------|---------------------|
| Cyclohexane | 110-82-7 | Trade Secret 5 - 15 |
| Hexane | 110-54-3 | Trade Secret < 3 |

This material contains a chemical which requires export notification under TSCA Section 12[b]:

| <u>Ingredient (Category if applicable)</u> | <u>C.A.S. No</u> | <u>Regulation</u> | <u>Status</u> |
|--|------------------|---|---------------|
| Methylene Chloride | 75-09-2 | Toxic Substances Control Act (TSCA) 6 Banned or Restricted Use Chemicals | Applicable |

Additional TSCA Information

| <u>Components</u> | <u>CAS No</u> | <u>Additional Information</u> |
|--------------------|---------------|---|
| Methylene Chloride | 75-09-2 | This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal. |

15.2. State Regulations

Contact 3M for more information.

California Proposition 65

| <u>Ingredient</u> | <u>C.A.S. No.</u> | <u>Listing</u> |
|-------------------|-------------------|-------------------------|
| Toluene | 108-88-3 | Developmental Toxin |
| n-Hexane | 110-54-3 | Male reproductive toxin |

15.3. Chemical Inventories

The components of this product are in compliance with the chemical notification requirements of TSCA. All required components of this product are listed on the active portion of the TSCA Inventory.

Contact 3M for more information.

15.4. International Regulations

Contact 3M for more information.

| |
|--|
| This SDS has been prepared to meet the U.S. OSHA Hazard Communication Standard, 29 CFR 1910.1200. |
|--|

SECTION 16: Other information

NFPA Hazard Classification

Health: 2 **Flammability:** 4 **Instability:** 0 **Special Hazards:** None
Aerosol Storage Code: 3

National Fire Protection Association (NFPA) hazard ratings are designed for use by emergency response personnel to address the hazards that are presented by short-term, acute exposure to a material under conditions of fire, spill, or similar emergencies. Hazard ratings are primarily based on the inherent physical and toxic properties of the material but also include the toxic properties of combustion or decomposition products that are known to be generated in significant quantities.

HMIS Hazard Classification

Health: *2 **Flammability:** 4 **Physical Hazard:** 0 **Personal Protection:** X - See PPE section.

Hazardous Material Identification System (HMIS® IV) hazard ratings are designed to inform employees of chemical hazards in the workplace. These ratings are based on the inherent properties of the material under expected conditions of normal use and are not intended for use in emergency situations. HMIS® IV ratings are to be used with a fully implemented HMIS® IV program. HMIS® is a registered mark of the American Coatings Association (ACA).

Document Group: 16-3472-4
Issue Date: 04/13/21

Version Number: 41.00
Supersedes Date: 03/17/21

DISCLAIMER: The information in this Safety Data Sheet (SDS) is believed to be correct as of the date issued. 3M MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's method of use or application. Given the variety of factors that can affect the use and application of a 3M product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for user's method of use or application.

3M provides information in electronic form as a service to its customers. Due to the remote possibility that electronic transfer may have resulted in errors, omissions or alterations in this information, 3M makes no representations as to its completeness or accuracy. In addition, information obtained from a database may not be as current as the information in the SDS available directly from 3M.

3M USA SDSs are available at www.3M.com

| | | |
|-------------------------------|--|---------------------------|
| ASHLAND | | Page: 1 |
| SAFETY DATA SHEET | | Revision Date: 02/01/2016 |
| | | Print Date: 6/23/2016 |
| | | SDS Number: R0290463 |
| Valvoline™ Crimson™ #2 GREASE | | Version: 2.7 |
| VV70120 | | |

1. IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

| | | |
|--|--|--|
| Ashland P.O. Box 2219 Columbus, OH 43216 | Regulatory Information Number Telephone Emergency telephone number | 1-800-325-3751 614-790-3333 1-800-ASHLAND (1-800-274-5263) |
| Product name | Valvoline™ Crimson™ #2 GREASE | |
| Product code | VV70120 | |

2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance: liquid, paste, red

WARNING! MAY CAUSE ALLERGIC SKIN REACTION.

Potential Health Effects

Exposure routes

Inhalation, Skin contact, Eye Contact, Ingestion

Eye contact

Unlikely to cause eye irritation or injury.

Skin contact

May cause allergic skin reaction.

Ingestion

Swallowing this material is not likely to be harmful.

Inhalation

It is possible to breathe this material under certain conditions of handling and use (for example, during heating, spraying, or stirring). Breathing small amounts of this material during normal handling is not likely to cause harmful effects. Breathing large amounts may be harmful. Symptoms are not expected at air concentrations below the recommended exposure limits, if applicable (see Section 8.).

Aggravated Medical Condition

No data.

Symptoms

No symptoms known or expected.

Target Organs

No data.

SAFETY DATA SHEET

Revision Date: 02/01/2016

Print Date: 6/23/2016

SDS Number: R0290463

Version: 2.7

Valvoline™ Crimson™ #2 GREASE

VV70120

Carcinogenicity

This material is not listed as a carcinogen by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP), or the Occupational Safety and Health Administration (OSHA). This material is not listed as a carcinogen by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP), or the Occupational Safety and Health Administration (OSHA).

Reproductive hazard

There are no data available for assessing risk to the fetus from maternal exposure to this material.

3. COMPOSITION/INFORMATION ON INGREDIENTS

WHMIS hazardous composition: No ingredients are hazardous according to the CPR criteria.

Hazardous Components**CAS-No. / Trade Secret No.****Concentration**

PROPRIETARY CORROSION INHIBITOR

>=1-<1.5%

Hazardous Components**CAS-No. / Trade Secret No.****Concentration**

PROPRIETARY CORROSION INHIBITOR

>=1-<1.5%

4. FIRST AID MEASURES**General Information**

Move out of dangerous area. Show this safety data sheet to the doctor in attendance. Do not leave the victim unattended.

Eyes

Flush eyes with water as a precaution. Remove contact lenses. Protect unharmed eye. If eye irritation persists, consult a specialist.

Skin

Remove contaminated clothing. If irritation develops, get medical attention. If on skin, rinse well with water. First aid is not normally required. However, it is recommended that exposed areas be cleaned by washing with soap and water. Wash contaminated clothing before re-use.

Ingestion

Do not give milk or alcoholic beverages. Never give anything by mouth to an unconscious person. If symptoms persist, call a physician.

Inhalation

If breathed in, move person into fresh air. If unconscious place in recovery position and seek medical advice. If symptoms persist, call a physician.

| | | |
|-------------------------------|--|---------------------------|
| ASHLAND | | Page: 3 |
| SAFETY DATA SHEET | | Revision Date: 02/01/2016 |
| | | Print Date: 6/23/2016 |
| | | SDS Number: R0290463 |
| Valvoline™ Crimson™ #2 GREASE | | Version: 2.7 |
| VV70120 | | |

Notes to physician

Hazards: No information available.

Treatment: No hazards which require special first aid measures.

5. FIREFIGHTING MEASURES

Suitable extinguishing media

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment., Water spray, Foam, Carbon dioxide (CO2), Dry chemical

Unsuitable extinguishing media

High volume water jet

Hazardous combustion products

No hazardous combustion products are known

Precautions for fire-fighting

Do not allow run-off from fire fighting to enter drains or water courses. In the event of fire, wear self-contained breathing apparatus. Standard procedure for chemical fires.

NFPA Flammable and Combustible Liquids Classification

Combustible Liquid Class IIIB

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

For personal protection see section 8. Use personal protective equipment. Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed.

Environmental precautions

Prevent product from entering drains. Prevent further leakage or spillage if safe to do so.

Methods for cleaning up

Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal.

Other information

Comply with all applicable federal, state, and local regulations.

7. HANDLING AND STORAGE

Handling

Do not breathe vapours/dust. Do not smoke.\'20 Persons susceptible to skin sensitisation problems or asthma, allergies, chronic or recurrent respiratory disease should not be employed in any process in which this mixture is being used. Container hazardous when empty. Avoid exposure - obtain special instructions before use.

| | | |
|-------------------------------|--|---------------------------|
| ASHLAND | | Page: 4 |
| SAFETY DATA SHEET | | Revision Date: 02/01/2016 |
| | | Print Date: 6/23/2016 |
| | | SDS Number: R0290463 |
| Valvoline™ Crimson™ #2 GREASE | | Version: 2.7 |
| VV70120 | | |

Avoid contact with skin and eyes. Smoking, eating and drinking should be prohibited in the application area. For personal protection see section 8. Dispose of rinse water in accordance with local and national regulations. Normal measures for preventive fire protection.

Storage

Keep container tightly closed in a dry and well-ventilated place. Electrical installations / working materials must comply with the technological safety standards. No decomposition if stored and applied as directed.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines

Contains no substances with occupational exposure limit values. Contains no substances with occupational exposure limit values.

General advice

These recommendations provide general guidance for handling this product. Personal protective equipment should be selected for individual applications and should consider factors which affect exposure potential, such as handling practices, chemical concentrations and ventilation. It is ultimately the responsibility of the employer to follow regulatory guidelines established by local authorities.

Wash hands before breaks and at the end of workday.

Exposure controls

Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Eye protection

Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.

Skin and body protection

Wear as appropriate:

Impervious clothing

Safety shoes

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Discard gloves that show tears, pinholes, or signs of wear.

Wear resistant gloves (consult your safety equipment supplier).

Respiratory protection

Respiratory protection is not required under normal conditions of use.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|-----------------------|--------|
| Physical state | liquid |
| Form | paste |

SAFETY DATA SHEET

Revision Date: 02/01/2016

Print Date: 6/23/2016

SDS Number: R0290463

Version: 2.7

Valvoline™ Crimson™ #2 GREASE

VV70120

| | |
|------------------------------------|---------------------------------------|
| Colour | red |
| Odour | hydrocarbon-like |
| Boiling point/boiling range | > 700 °F / > 371 °C |
| pH | No data available |
| Flash point | > 399 °F / > 204 °C |
| Evaporation rate | (<)0.01 |
| Vapour pressure | < 0.100 mmHg @ 68 °F / 20 °C |
| Density | 0.9 g/cm ³ @ 68 °F / 20 °C |
| | 7.5 lb/gal @ 60.00 °F / 15.56 °C |
| Water solubility | No data available |
| Solubility(ies) | No data available |
| Auto-ignition temperature | No data available |
| Viscosity, dynamic | No data available |
| Viscosity, kinematic | > 1000 mm ² /s @ 40 °C |
| Decomposition temperature | No data available |

10. STABILITY AND REACTIVITY**Stability**

Stable under recommended storage conditions.

Conditions to avoid

None known.

Incompatible products

None known.

Hazardous decomposition products

No hazardous decomposition products are known.

Hazardous reactions

Product will not undergo hazardous polymerization.

Thermal decomposition

No data available

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure : Inhalation
Skin contact

SAFETY DATA SHEET

Revision Date: 02/01/2016

Print Date: 6/23/2016

SDS Number: R0290463

Version: 2.7

Valvoline™ Crimson™ #2 GREASE

VV70120

Eye Contact
Ingestion**Product**

- Acute oral toxicity : No data available
- Acute inhalation toxicity : No data available
- Acute dermal toxicity : No data available
- Skin corrosion/irritation : May cause skin irritation in susceptible persons.
- Serious eye damage/eye irritation : Unlikely to cause eye irritation or injury.
- Respiratory or skin sensitisation : May cause allergic skin reaction.
- Aspiration toxicity : No aspiration toxicity classification
- Further information : No data available

Components:**PROPRIETARY CORROSION INHIBITOR:**

Respiratory or skin sensitisation : Classification: May cause sensitisation by skin contact.

PROPRIETARY CORROSION INHIBITOR:

Respiratory or skin sensitisation : Classification: May cause sensitisation by skin contact.

12. ECOLOGICAL INFORMATION**Ecotoxicity****Product:**

No data available

Components:

No data available

Persistence and degradability

| | | |
|-------------------------------|--|---------------------------|
| ASHLAND | | Page: 7 |
| SAFETY DATA SHEET | | Revision Date: 02/01/2016 |
| | | Print Date: 6/23/2016 |
| | | SDS Number: R0290463 |
| Valvoline™ Crimson™ #2 GREASE | | Version: 2.7 |
| VV70120 | | |

Product:

No data available

Components:

No data available

Bioaccumulative potential

Product:

Partition coefficient: n-octanol/water : No data available

Components:

No data available

Mobility in soil

Product:

No data available

Components:

No data available

Other adverse effects

Product:

Additional ecological information : No data available

13. DISPOSAL CONSIDERATIONS

Waste disposal methods

Do not dispose of waste into sewer. Do not contaminate ponds, waterways or ditches with chemical or used container. Send to a licensed waste management company. Dispose of in accordance with all applicable local, state and federal regulations.

Empty remaining contents. Dispose of as unused product. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. TRANSPORT INFORMATION

REGULATION

| ID NUMBER | PROPER SHIPPING NAME | *HAZARD CLASS | SUBSIDIARY HAZARDS | PACKING GROUP | MARINE POLLUTANT / LTD. QTY. |
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|
| | | | | | |

U.S. DOT - ROAD



SAFETY DATA SHEET

Revision Date: 02/01/2016

Print Date: 6/23/2016

SDS Number: R0290463

Version: 2.7

Valvoline™ Crimson™ #2 GREASE

VV70120

Not dangerous goods

CFR_RAIL_C

Not dangerous goods

U.S. DOT - INLAND WATERWAYS

Not dangerous goods

TDG_ROAD_C

Not dangerous goods

TDG_RAIL_C

Not dangerous goods

TDG_INWT_C

Not dangerous goods

INTERNATIONAL MARITIME DANGEROUS GOODS

Not dangerous goods

INTERNATIONAL AIR TRANSPORT ASSOCIATION - CARGO

Not dangerous goods

INTERNATIONAL AIR TRANSPORT ASSOCIATION - PASSENGER

Not dangerous goods

MX_DG

Not dangerous goods

***ORM = ORM-D, CBL = COMBUSTIBLE LIQUID**


Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

15. REGULATORY INFORMATION

WHMIS Classification

D2B Toxic Material Causing Other Toxic Effects

| | | |
|-------------------------------|--|---------------------------|
| ASHLAND | | Page: 9 |
| SAFETY DATA SHEET | | Revision Date: 02/01/2016 |
| | | Print Date: 6/23/2016 |
| | | SDS Number: R0290463 |
| Valvoline™ Crimson™ #2 GREASE | | Version: 2.7 |
| VV70120 | | |



WHMIS Ingredient Disclosure List IDL: No component is listed on the WHMIS ingredients disclosure list.

WHMIS Ingredient Disclosure List IDL: No component is listed on the WHMIS ingredients disclosure list.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

Canadian National Pollutant Release Inventory (NPRI) Canadian National Pollutant Release Inventory (NPRI): No component is listed on NPRI. Canadian National Pollutant Release Inventory (NPRI): No component is listed on NPRI.

Notification status

| | |
|---|----------------------|
| US. Toxic Substances Control Act | y (positive listing) |
| Canada. Canadian Environmental Protection Act (CEPA). Domestic Substances List (DSL). (Can. Gaz. Part II, Vol. 133) | y (positive listing) |
| Australia. Industrial Chemical (Notification and Assessment) Act | n (Negative listing) |
| Japan. ENCS - Existing and New Chemical Substances Inventory | n (Negative listing) |
| Korea. Toxic Chemical Control Law (TCCL) List | n (Negative listing) |
| Philippines. The Toxic Substances and Hazardous and Nuclear Waste Control Act | n (Negative listing) |
| China. Inventory of Existing Chemical Substances | y (positive listing) |

| | HMIS | NFPA |
|------------------|------|------|
| Health | -- | -- |
| Flammability | -- | -- |
| Physical hazards | -- | |
| Instability | | -- |
| Specific Hazard | -- | -- |

16. OTHER INFORMATION

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Ashland's Environmental Health and Safety Department (1-800-325-3751).

| | | |
|-------------------------------|--|---------------------------|
| ASHLAND | | Page: 10 |
| SAFETY DATA SHEET | | Revision Date: 02/01/2016 |
| | | Print Date: 6/23/2016 |
| | | SDS Number: R0290463 |
| Valvoline™ Crimson™ #2 GREASE | | Version: 2.7 |
| VV70120 | | |

List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists

BEI : Biological Exposure Index

CAS : Chemical Abstracts Service (Division of the American Chemical Society).

CMR : Carcinogenic, Mutagenic or Toxic for Reproduction

FG : Food grade

GHS : Globally Harmonized System of Classification and Labeling of Chemicals.

H-statement : Hazard Statement

IATA : International Air Transport Association.

IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization

ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"

IMDG : International Maritime Code for Dangerous Goods

ISO : International Organization for Standardization

logPow : octanol-water partition coefficient

LCxx : Lethal Concentration, for xx percent of test population

LDxx : Lethal Dose, for xx percent of test population.

ICxx : Inhibitory Concentration for xx of a substance

Ecxx : Effective Concentration of xx

N.O.S.: Not Otherwise Specified

OECD : Organization for Economic Co-operation and Development

OEL : Occupational Exposure Limit

P-Statement : Precautionary Statement

PBT : Persistent , Bioaccumulative and Toxic

PPE : Personal Protective Equipment

STEL : Short-term exposure limit

STOT : Specific Target Organ Toxicity

TLV : Threshold Limit Value

TWA : Time-weighted average

vPvB : Very Persistent and Very Bioaccumulative

WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act

DOT : Department of Transportation

FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act

HMIRC : Hazardous Materials Information Review Commission

HMIS : Hazardous Materials Identification System

NFPA : National Fire Protection Association

NIOSH : National Institute for Occupational Safety and Health

OSHA : Occupational Safety and Health Administration

PMRA : Health Canada Pest Management Regulatory Agency

RTK : Right to Know

WHMIS : Workplace Hazardous Materials Information System

Safety Data Sheet

Printing date 01/02/2020

Revised On 01/02/2020

1 Identification of the substance and manufacturer

Trade name: CLEAR
Product code: KF00200631
Recommended use: Paint and coatings application.
Uses advised against: Any that differs from the recommended use.
Manufacturer/Supplier: Keson LLC
 810 Commerce Street
 Aurora, IL 60504-7931
 Phone: 1-800-34-KESON
 www.keson.com
Emergency telephone number: 1-800-255-3924

2 Hazard(s) identification

Classification of the substance or mixture

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 Eye Irrit. 2A H319 Causes serious eye irritation.
 Repr. 1B H360 May damage fertility or the unborn child.
 STOT SE 3 H336 May cause drowsiness or dizziness.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

GHS Hazard pictograms



GHS02 GHS04 GHS07 GHS08

Signal word
Hazard statements

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 Causes serious eye irritation.

Precautionary statements

May damage fertility or the unborn child.
 May cause drowsiness or dizziness.
 May cause damage to organs through prolonged or repeated exposure.
 Obtain special instructions before use.
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not spray on an open flame or other ignition source.
 Pressurized container: Do not pierce or burn, even after use.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 Wash hands thoroughly after handling.
 Use only outdoors or in a well-ventilated area.
 Wear protective gloves/protective clothing/eye protection/face protection.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 Call a poison center/doctor if you feel unwell.
 If eye irritation persists: Get medical advice/attention.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients

Chemical characterization: Mixtures

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|--------------------|--------|
| 67-64-1 | Acetone | 22.26% |
| 74-98-6 | propane | 15.72% |
| 1317-65-3 | Calcium Carbonate | 10.28% |
| 64742-89-8 | VM&P Naphtha | 9.34% |
| 106-97-8 | n-butane | 9.24% |
| 108-88-3 | Toluene | 4.69% |
| 64742-47-8 | Mineral Spirits | 2.78% |
| 540-88-5 | tert-butyl acetate | 2.72% |
| 2807-30-9 | Glycol Ether EP | 2.25% |

4 First-aid measures

After inhalation: Supply fresh air; consult doctor in case of complaints.
After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor.
After swallowing: Rinse mouth with water. Do not induce vomiting.
Most important symptoms and effects: Dizziness

(Contd. on page 2/5)

Safety Data Sheet

Printing date 01/02/2020

Revised On 01/02/2020

Trade name: CLEAR

Indication of any immediate medical attention needed: No further relevant information available.

(Contd. of page 1)

5 Fire-fighting measures

Extinguishing agents: CO₂, extinguishing powder or water spray. Fight larger fires with water spray.
Special hazards: Can form explosive gas-air mixtures.
Protective equipment for firefighters: A respiratory protective device may be necessary.

6 Accidental release measures

Personal precautions, protective equipment and emergency procedures: Use respiratory protective device against the effects of fumes/dust/aerosol.
Methods and material for containment and cleaning up: Dispose contaminated material as waste according to section 13.

7 Handling and storage

Precautions for safe handling: Use only in well ventilated areas.
Storage requirements: Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up.

8 Exposure controls/personal protection**Components with limit values that require monitoring at the workplace:****67-64-1 Acetone**

PEL (USA) Long-term value: 2400 mg/m³, 1000 ppm
REL (USA) Long-term value: 590 mg/m³, 250 ppm
TLV (USA) Short-term value: 1187 mg/m³, 500 ppm
Long-term value: 594 mg/m³, 250 ppm
BEI

74-98-6 propane

PEL (USA) Long-term value: 1800 mg/m³, 1000 ppm
REL (USA) Long-term value: 1800 mg/m³, 1000 ppm
TLV (USA) refer to Appendix F in TLVs&BEIs book; D, EX

106-97-8 n-butane

REL (USA) Long-term value: 1900 mg/m³, 800 ppm
TLV (USA) Short-term value: 2370 mg/m³, 1000 ppm
(EX)

108-88-3 Toluene

PEL (USA) Long-term value: 200 ppm
Ceiling limit value: 300; 500* ppm
*10-min peak per 8-hr shift
REL (USA) Short-term value: 560 mg/m³, 150 ppm
Long-term value: 375 mg/m³, 100 ppm
TLV (USA) Long-term value: 75 mg/m³, 20 ppm
BEI

540-88-5 tert-butyl acetate

PEL (USA) Long-term value: 950 mg/m³, 200 ppm
REL (USA) Long-term value: 950 mg/m³, 200 ppm
TLV (USA) Short-term value: 712 mg/m³, 150 ppm
Long-term value: 238 mg/m³, 50 ppm

Ingredients with biological limit values:**67-64-1 Acetone**

BEI (USA) 50 mg/L
Medium: urine
Time: end of shift
Parameter: Acetone (nonspecific)

Hygienic protection: Immediately remove all soiled and contaminated clothing.
Wash hands after use.
Store protective clothing separately.
Avoid contact with the eyes and skin.
Do not eat or drink while working.

Breathing equipment: A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene.

Hand protection: Nitrile gloves.
The glove material must be impermeable and resistant to the substance.

1476
(Contd. on page 3)

Safety Data Sheet

Printing date 01/02/2020

Revised On 01/02/2020

Trade name: CLEAR

Eye protection: Tightly sealed goggles

(Contd. of page 2)

9 Physical and chemical properties

Appearance: Aerosol.
Odor: Aromatic
Odor threshold: Not determined.
pH-value: Not determined.
Melting point/Melting range Undetermined.
Boiling point: -44 °C (-111.2 °F)
Flash point: -19 °C (-66.2 °F)
Flammability (solid, gas): Extremely flammable.
Decomposition temperature: Not determined.
Auto igniting: Product is not self-igniting.
Danger of explosion: In use, may form flammable/explosive vapour-air mixture.
Lower Explosion Limit: 1.7 Vol %
Upper Explosion Limit: 10.9 Vol %
Vapor pressure: Not determined.
Relative Density: Between 0.77 and 0.85 (Water equals 1.00)
Vapor density Not determined.
Evaporation rate Not applicable.
Partition coefficient: n-octonal/water: Not determined.
Solubility: Not determined.
Viscosity: Not determined.
VOC content (less exempt solvents): 40.2 %

10 Stability and reactivity

Reactivity: Stable at normal temperatures.
Conditions to avoid: Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures.
Chemical stability: Not fully evaluated.
Possibility of hazardous reactions: No dangerous reactions known.
Incompatible materials: No further relevant information available.
Hazardous decomposition: No dangerous decomposition products known.

11 Toxicological information

LD/LC50 values that are relevant for classification:

106-97-8 n-butane

Inhalative LC50/4 h 658 mg/l (rat)

Information on toxicological effects: No data available.
Skin effects: No irritant effect.
Eye effects: Irritating effect.
Sensitization: No sensitizing effects known.

12 Ecological information

Aquatic toxicity: Hazardous for water, do not empty into drains.
Persistence and degradability: The product is degradable after prolonged exposure to natural weathering processes.
Other information: This product does not contain any chlorofluorocarbons (CFC's), hydrochlorofluorocarbons (HCFC's), perfluorocarbons (PFC's), heavy metals (chromium, lead, cadmium), or chlorinated solvents.
Bioaccumulative potential: No further relevant information available.
Mobility in soil: No further relevant information available.
Other adverse effects: No further relevant information available.

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.
Recommendation: Completely empty cans should be recycled.

14 Transport information

UN-Number UN1950
DOT N/A
DOT Consumer Commodity ORM-D
ADR Aerosols, flammable
 1950 Aerosols

(Contd. on page 4/7)

Safety Data Sheet

Printing date 01/02/2020

Revised On 01/02/2020

Trade name: CLEAR

(Contd. of page 3)

Transport hazard class(es):
Class 2.1
Marine pollutant: No
Special precautions for user: Warning: Gases
EMS Number: F-D,S-U
Packaging Group: --
UN "Model Regulation": UN1950, Aerosols, 2.1

15 Regulatory information**SARA Section 355 (extremely hazardous substances):**

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

108-88-3 | Toluene

Toxic Substances Control Act**(TSCA):** All hazardous ingredients are found on the inventory list of substances.**Canadian Domestic Substances List****(DSL):** All ingredients are listed or exempted.**Consumer Product Safety****Comission (CPSC):** This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.**California Proposition 65 chemicals known to cause cancer:**

100-41-4 | ethyl benzene

Prop 65 chemicals known to cause birth defects or reproductive harm:

108-88-3 | Toluene

EPA:

67-64-1 | Acetone

16 Other information**Contact:** Regulatory Affairs

1. Identification

Other means of identification None known.
Product identifier **CITRIC ACID 50% FCC KOSH**
Recommended use ALL PROPER AND LEGAL PURPOSES
Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Brenntag Pacific Inc.
Address 10747 Patterson Place
 Santa Fe Springs, CA 90670
Telephone 562-903-9626
E-mail Not available.
Emergency phone number 800-424-9300 CHEMTREC

2. Hazard(s) identification

Physical hazards Not classified.
Health hazards Skin corrosion/irritation Category 2
 Serious eye damage/eye irritation Category 2A
Environmental hazards Not classified.
OSHA defined hazards Not classified.

Label elements



Signal word Warning
Hazard statement Causes skin irritation. Causes serious eye irritation.

Precautionary statement

Prevention Wash thoroughly after handling. Wear eye protection/face protection. Wear protective gloves.
Response If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin: Wash with plenty of water. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash it before reuse.

Storage Store away from incompatible materials.

Disposal Dispose of waste and residues in accordance with local authority requirements.

Hazard(s) not otherwise classified (HNOC) None known.

Supplemental information 50% of the mixture consists of component(s) of unknown acute dermal toxicity. 50% of the mixture consists of component(s) of unknown acute inhalation toxicity.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|---|--------------------------|------------|----|
| 1,2,3-PROPANETRICARBOXYLIC ACID, 2-HYDROXY- | | 77-92-9 | 50 |
| Other components below reportable levels | | | 50 |

4. First-aid measures

Inhalation Move to fresh air. Call a physician if symptoms develop or persist.

| | |
|---|---|
| Skin contact | Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. Get medical attention if symptoms occur. |
| Most important symptoms/effects, acute and delayed | Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Water fog. Foam. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Avoid contact with eyes, skin, and clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Store in tightly closed container. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

| | |
|---|--|
| Occupational exposure limits | No exposure limits noted for ingredient(s). |
| Biological limit values | No biological exposure limits noted for the ingredient(s). |
| Appropriate engineering controls | Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Provide eyewash station and safety shower. |

Individual protection measures, such as personal protective equipment

The following are recommendations for Personnel Protective Equipment (PPE). The employer/user of this product must perform a Hazard Assessment of the workplace according to OSHA regulations 29 CFR 1910.132 to determine the appropriate PPE for use while performing any task involving potential exposure to this product.

| | |
|---------------------------------------|---|
| Eye/face protection | Wear safety glasses with side shields (or goggles). Face shield is recommended. |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended. |
| Respiratory protection | In case of insufficient ventilation, wear suitable respiratory equipment. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|--|---------------------------|
| Physical state | Liquid. |
| Form | Liquid. |
| Color | CLEAR COLORLESS |
| Odor | ODORLESS |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | 15 °F (-9.44 °C) |
| Initial boiling point and boiling range | 212 °F (100 °C) estimated |
| Flash point | Not available. |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not applicable. |

Upper/lower flammability or explosive limits

| | |
|--|-----------------------------|
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | 1850 °F (1010 °C) estimated |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Density | 10.32 lbs/gal 1.24 g/ml |
| Explosive properties | Not explosive. |
| Oxidizing properties | Not oxidizing. |
| Percent volatile | 50 % estimated |
| Specific gravity | 1.24 |

10. Stability and reactivity

| | |
|---------------------------|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |

| | |
|---|---|
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | No adverse effects due to inhalation are expected. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity Not known.

| Components | Species | Test Results |
|---|---------|--------------|
| 1,2,3-PROPANETRICARBOXYLIC ACID, 2-HYDROXY- (CAS 77-92-9) | | |
| Acute | | |
| Oral | | |
| LD50 | Mouse | 5040 mg/kg |
| | Rat | 6730 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Due to partial or complete lack of data the classification is not possible.

Skin sensitization Due to partial or complete lack of data the classification is not possible.

Germ cell mutagenicity Due to partial or complete lack of data the classification is not possible.

Carcinogenicity Due to partial or complete lack of data the classification is not possible.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not listed.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicity Due to partial or complete lack of data the classification is not possible.

Specific target organ toxicity - single exposure Due to partial or complete lack of data the classification is not possible.

Specific target organ toxicity - repeated exposure Due to partial or complete lack of data the classification is not possible.

Aspiration hazard Due to partial or complete lack of data the classification is not possible.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Incinerate the material under controlled conditions in an approved incinerator. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code D002: Waste Corrosive material [pH \leq 2 or \geq 12.5, or corrosive to steel]
The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport information

DOT

Not regulated as dangerous goods.

Transport information on packaging may be different from that listed. Transportation information on packaging may be different from that listed.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical Yes

Classified hazard categories Skin corrosion or irritation
Serious eye damage or eye irritation

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| Taiwan | Taiwan Chemical Substance Inventory (TCSI) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------|---|
| Issue date | 05-06-2015 |
| Revision date | 07-05-2021 |
| Version # | 12 |
| HMIS® ratings | Health: 2 Flammability: 0 Physical hazard: 0 |
| NFPA ratings | Health: 3 Flammability: 0 Instability: 0 |
| Disclaimer | While Brenntag believes the information contained herein to be accurate, Brenntag makes no representation or warranty, express or implied, regarding, and assumes no liability for, the accuracy or completeness of the information. The Buyer assumes all responsibility for handling, using and/or reselling the Product in accordance with applicable federal, state, and local law. This SDS shall not in any way limit or preclude the operation and effect of any of the provisions of Brenntag's terms and conditions of sale. |



SAFETY DATA SHEET

1. Identification

Product number 1000002384
 Product identifier **CAMIE 410 FOOD PROCESSORS SILICONE SPRAY**
 Revision date 06-21-2018
 Company information Camie-Campbell, Inc.
 1000 INTEGRAM DRIVE
 PACIFIC, MO 63069 United States
 www.camie.com
 Company phone General Assistance 1-800-325-9572
 Emergency telephone US 1-866-836-8855
 Emergency telephone outside US 1-952-852-4646
 Version # 03
 Supersedes date 04-04-2017
 Recommended use LUBRICANT
 Recommended restrictions None known.

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
 Health hazards Reproductive toxicity Category 2
 OSHA defined hazards Not classified.

Label elements



Signal word Danger
 Hazard statement Extremely flammable aerosol. Suspected of damaging fertility or the unborn child.

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Wear protective gloves/protective clothing/eye protection/face protection.

Response If exposed or concerned: Get medical advice/attention.

Storage Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise classified (HNOC) None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|----------|
| Decamethylcyclopentasiloxane | | 541-02-6 | 60 - 80 |
| Butane | | 106-97-8 | 20 - 40 |
| Propane | | 74-98-6 | 10 - 20 |
| Octamethylcyclotetrasiloxane | | 556-67-2 | 0.1 - 1 |
| Other components below reportable levels | | | 2.5 - 10 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|---|
| Inhalation | If symptoms develop move victim to fresh air. Get medical attention if symptoms persist. |
| Skin contact | Wash off with soap and water. Get medical attention if irritation develops and persists. |
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. Get medical attention if symptoms occur. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed. |
| General information | IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire fighting equipment/instructions | Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes. |
| General fire hazards | Extremely flammable aerosol. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Refer to attached safety data sheets and/or instructions for use. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|--------------------------------------|--|
| Precautions for safe handling | Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
|--------------------------------------|--|

Conditions for safe storage, including any incompatibilities

Level 1 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

| Components | Type | Value |
|-----------------------|------|------------------------|
| Propane (CAS 74-98-6) | PEL | 1800 mg/m3 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------|------|----------|
| Butane (CAS 106-97-8) | STEL | 1000 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------|------|------------------------|
| Butane (CAS 106-97-8) | TWA | 1900 mg/m3 800 ppm |
| Propane (CAS 74-98-6) | TWA | 1800 mg/m3 1000 ppm |

US. Workplace Environmental Exposure Level (WEEL) Guides

| Components | Type | Value |
|---|------|--------|
| Octamethylcyclotetrasiloxane (CAS 556-67-2) | TWA | 10 ppm |

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection If contact is likely, safety glasses with side shields are recommended.

Skin protection**Hand protection**

Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.

Other

Use of an impervious apron is recommended.

Respiratory protection

If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Observe any medical surveillance requirements. When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance**

Physical state Gas.

Form Aerosol.

Color Not available.

Odor Not available.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

| | |
|---|--|
| Initial boiling point and boiling range | 410 °F (210 °C) estimated |
| Flash point | -156.0 °F (-104.4 °C) PROPELLANT estimated |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1.9 % estimated |
| Flammability limit - upper (%) | 9.5 % estimated |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | 737.6 °F (392 °C) estimated |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Oxidizing properties | Not oxidizing. |
| Specific gravity | 0.833 estimated |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |
| Conditions to avoid | Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. Nitrates. Fluorine. Chlorine. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | No adverse effects due to inhalation are expected. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|-----------------------|---------|------------------------|
| Butane (CAS 106-97-8) | | |
| <u>Acute</u> | | |
| Inhalation | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes |

| Components | Species | Test Results |
|---|---------|--|
| | | 52 %, 120 Minutes |
| | Rat | 1355 mg/l |
| Decamethylcyclopentasiloxane (CAS 541-02-6) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg, 24 Hours |
| Inhalation | | |
| LC50 | Rat | > 545 ppm, 4 Hours 8.67 mg/l, 4 Hours |
| Oral | | |
| LD50 | Rat | > 20000 mg/kg |
| Octamethylcyclotetrasiloxane (CAS 556-67-2) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rat | > 2000 mg/kg, 24 Hours > 2.5 ml/kg |
| Inhalation | | |
| <i>Aerosol</i> | | |
| LC50 | Rat | 36 mg/l, 4 Hours |
| Oral | | |
| LD50 | Mouse | 1700 mg/kg |
| | Rat | > 4800 mg/kg |
| Propane (CAS 74-98-6) | | |
| Acute | | |
| Inhalation | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes |
| | | 52 %, 120 Minutes |
| | Rat | 1355 mg/l |
| | | 658 mg/l/4h |

* Estimates for product may be based on additional component data not shown.

| | |
|---|--|
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. |
| Serious eye damage/eye irritation | Direct contact with eyes may cause temporary irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not a respiratory sensitizer. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| Not listed. | |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| Not regulated. | |
| US. National Toxicology Program (NTP) Report on Carcinogens | |
| Not listed. | |
| Reproductive toxicity | Suspected of damaging fertility or the unborn child. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |

Aspiration hazard Not an aspiration hazard.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

| | |
|------------------------------|------|
| Butane | 2.89 |
| Decamethylcyclopentasiloxane | 5.2 |
| Propane | 2.36 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable, (each not exceeding 1 L capacity) |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | N82 |
| Packaging exceptions | 306 |
| Packaging non bulk | None |
| Packaging bulk | None |

This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking.

IATA

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Environmental hazards | No. |
| ERG Code | 10L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling. |

Other information

Passenger and cargo aircraft Allowed with restrictions.

Cargo aircraft only Allowed with restrictions.

Packaging Exceptions LTD QTY

IMDG

UN number UN1950

UN proper shipping name AEROSOLS

Transport hazard class(es)

Class 2.1

Subsidiary risk -

Label(s) None

Packing group Not applicable.

Environmental hazards

Marine pollutant No.

EmS F-D, S-U

Special precautions for user Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling.

Packaging Exceptions LTD QTY

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

DOT



IATA; IMDG



15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - No
Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Butane (CAS 106-97-8)

Decamethylcyclotetrasiloxane (CAS 541-02-6)

Octamethylcyclotetrasiloxane (CAS 556-67-2)

US. Massachusetts RTK - Substance List

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

US. New Jersey Worker and Community Right-to-Know Act

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

US. Pennsylvania Worker and Community Right-to-Know Law

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

US. Rhode Island RTK

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)
A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|-----------------------------|--|
| Issue date | 07-12-2015 |
| Revision date | 06-21-2018 |
| Version # | 03 |
| Disclaimer | The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. |
| Revision information | Composition / Information on Ingredients: Component Summary |

SAFETY DATA SHEET

1. Identification

Product number 1000028751
Product identifier 13 OZ NAPA MAC'S BATTERY TERMINAL CLEANER 1072
Company information NAPA Balkamp
2601 Stout Heritage Parkway
Plainfield, IN 46168 United States
Company phone General Assistance 1-317-754-3900
Emergency telephone US 1-866-836-8855
Emergency telephone outside US 1-952-852-4646
Version # 01
Recommended use CLEANER
Recommended restrictions None known.

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
Health hazards Not classified.
OSHA defined hazards Not classified.

Label elements



Signal word Danger
Hazard statement Extremely flammable aerosol.
Precautionary statement
Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use.
Response Wash hands after handling.
Storage Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal Dispose of waste and residues in accordance with local authority requirements.
Hazard(s) not otherwise classified (HNOC) None known.
Supplemental information None.

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|----------|
| Butane | | 106-97-8 | 2.5 - 10 |
| Isopropyl Alcohol | | 67-63-0 | 2.5 - 10 |
| Propane | | 74-98-6 | 2.5 - 10 |
| Sodium Carbonate Anhydrous | | 497-19-8 | 1 - 2.5 |
| Other components below reportable levels | | | 80 - 90 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation If symptoms develop move victim to fresh air. Get medical attention if symptoms persist.
Skin contact Wash off with soap and water. Get medical attention if irritation develops and persists.

| | |
|---|--|
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. Get medical attention if symptoms occur. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Not available. |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire fighting equipment/instructions | Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. Use water spray to cool unopened containers. In the event of fire and/or explosion do not breathe fumes. |
| General fire hazards | Extremely flammable aerosol. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Refer to attached safety data sheets and/or instructions for use. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|--|
| Precautions for safe handling | Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Level 1 Aerosol. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|---------------------------------|------|-----------|
| Isopropyl Alcohol (CAS 67-63-0) | PEL | 980 mg/m3 |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------|------|------------------------|
| Propane (CAS 74-98-6) | PEL | 400 ppm |
| | | 1800 mg/m ³ |
| | | 1000 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|---------------------------------|------|----------|
| Butane (CAS 106-97-8) | STEL | 1000 ppm |
| Isopropyl Alcohol (CAS 67-63-0) | STEL | 400 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---------------------------------|------|------------------------|
| Butane (CAS 106-97-8) | TWA | 1900 mg/m ³ |
| | | 800 ppm |
| Isopropyl Alcohol (CAS 67-63-0) | STEL | 1225 mg/m ³ |
| | | 500 ppm |
| | | 980 mg/m ³ |
| Propane (CAS 74-98-6) | TWA | 400 ppm |
| | | 1800 mg/m ³ |
| | | 1000 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Components | Value | Determinant | Specimen | Sampling Time |
|---------------------------------|---------|-------------|----------|---------------|
| Isopropyl Alcohol (CAS 67-63-0) | 40 mg/l | Acetone | Urine | * |

* - For sampling details, please see the source document.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.

Other Wear suitable protective clothing.

Respiratory protection If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance**

Physical state Gas.

Form Aerosol.

Color Not available.

Odor Not available.

Odor threshold Not available.

| | |
|---|--|
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 212 °F (100 °C) estimated |
| Flash point | -156.0 °F (-104.4 °C) PROPELLANT estimated |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 2.5 % estimated |
| Flammability limit - upper (%) | 12 % estimated |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 60 psig @70F estimated |
| Vapor density | Not available. |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Oxidizing properties | Not oxidizing. |
| Specific gravity | 0.95 @70F estimated |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |
| Conditions to avoid | Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Nitrates. Isocyanates. Fluorine. Chlorine. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | No adverse effects due to inhalation are expected. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|---|------------|---|
| Butane (CAS 106-97-8) | | |
| Acute | | |
| Inhalation | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l |
| Isopropyl Alcohol (CAS 67-63-0) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | 16.4 ml/kg, 24 Hours |
| Inhalation | | |
| LC50 | Rat | > 10000 ppm, 6 Hours |
| Oral | | |
| LD50 | Rat | 5.84 g/kg |
| Propane (CAS 74-98-6) | | |
| Acute | | |
| Inhalation | | |
| LC50 | Mouse | 1237 mg/l, 120 Minutes 52 %, 120 Minutes |
| | Rat | 1355 mg/l 658 mg/l/4h |
| Sodium Carbonate Anhydrous (CAS 497-19-8) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg |
| Inhalation | | |
| LC50 | Guinea pig | 800 mg/m3, 2 Hours |
| <i>Aerosol</i> | | |
| LC50 | Mouse | 1200 mg/m3, 2 Hours |
| | Rat | 2300 mg/m3, 2 Hours |
| LC50 | Rat | 2.3 mg/l, 2 hours supplier |
| Oral | | |
| LD50 | Rat | 2800 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|---|--|
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. |
| Serious eye damage/eye irritation | Direct contact with eyes may cause temporary irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not a respiratory sensitizer. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| Not listed. | |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| Not regulated. | |
| US. National Toxicology Program (NTP) Report on Carcinogens | |
| Not listed. | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not likely, due to the form of the product.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|---|---------|--|
| Isopropyl Alcohol (CAS 67-63-0) | | |
| Aquatic | | |
| Algae | IC50 | Algae 1000.0001 mg/L, 72 Hours |
| Crustacea | EC50 | Daphnia 13299 mg/L, 48 Hours |
| Fish | LC50 | Bluegill (Lepomis macrochirus) > 1400 mg/l, 96 hours |
| Sodium Carbonate Anhydrous (CAS 497-19-8) | | |
| Aquatic | | |
| Crustacea | EC50 | Daphnia 265 mg/L, 48 Hours |
| | | Water flea (Ceriodaphnia dubia) 156.6 - 298.9 mg/l, 48 hours |
| Fish | LC50 | Bluegill (Lepomis macrochirus) 300 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

| | |
|-------------------|------|
| Butane | 2.89 |
| Isopropyl Alcohol | 0.05 |
| Propane | 2.36 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable, (each not exceeding 1 L capacity) |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not applicable. |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | N82 |

Packaging exceptions 306
Packaging non bulk None
Packaging bulk None

IATA

UN number UN1950
UN proper shipping name Aerosols, flammable
Transport hazard class(es)
Class 2.1
Subsidiary risk -
Label(s) 2.1
Packing group Not applicable.
Environmental hazards No.
ERG Code 10L
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Other information
Passenger and cargo aircraft Allowed with restrictions.
Cargo aircraft only Allowed with restrictions.
Packaging Exceptions LTD QTY

IMDG

UN number UN1950
UN proper shipping name AEROSOLS
Transport hazard class(es)
Class 2.1
Subsidiary risk -
Label(s) None
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS F-D, S-U
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Packaging Exceptions LTD QTY

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

DOT



IATA; IMDG



15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - No
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - Yes
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

US. Massachusetts RTK - Substance List

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)

US. New Jersey Worker and Community Right-to-Know Act

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)

US. Pennsylvania Worker and Community Right-to-Know Law

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)

US. Rhode Island RTK

Butane (CAS 106-97-8)

Isopropyl Alcohol (CAS 67-63-0)

Propane (CAS 74-98-6)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

Formaldehyde (CAS 50-00-0)

Listed: January 1, 1988

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|-------------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | No |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | No |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | No |
| New Zealand | New Zealand Inventory | No |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 06-27-2016

Version # 01

Disclaimer The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Revision information Product and Company Identification: Product and Company Identification



SAFETY DATA SHEET

1. Identification

Product identifier: CITRA JINX ORGANIC ALL PURPOSE CLEANER

Other means of identification

SDS number: RE1000007273

Recommended restrictions

Product Use: cleaner

Restrictions on use: Not known.

Manufacturer/Importer/Distributor Information

Manufacturer

Company Name: CLAIRE MANUFACTURING COMPANY
Address: 1000 Integram Dr
Pacific, MO 63069
Telephone: 1-630-543-7600
Fax:

Emergency telephone number: 1-866-836-8855

2. Hazard(s) identification

Hazard Classification

Physical Hazards

Flammable aerosol Category 1

Health Hazards

Serious Eye Damage/Eye Irritation Category 2A
Skin sensitizer Category 1

Environmental Hazards

Acute hazards to the aquatic environment Category 2
Chronic hazards to the aquatic environment Category 2

Label Elements

Hazard Symbol:



Signal Word: Danger



Hazard Statement: Extremely flammable aerosol.
Causes serious eye irritation.
May cause an allergic skin reaction.
Toxic to aquatic life with long lasting effects.

Precautionary Statements

Prevention: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. Avoid breathing dust/fume/gas/mist/vapors/spray. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment.

Response: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. IF ON SKIN: Wash with plenty of water. If skin irritation or rash occurs: Get medical advice/attention. Specific treatment (see on this label). Wash contaminated clothing before reuse. Collect spillage.

Storage: Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal: Dispose of contents/container to an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal.

Hazard(s) not otherwise classified (HNOC): None.

3. Composition/information on ingredients

Mixtures

| Chemical Identity | CAS number | Content in percent (%)* |
|---|------------|-------------------------|
| Cyclohexene, 1-methyl-4-(1-methylethenyl)-, (4R)- | 5989-27-5 | 1 - <5% |
| Propane | 74-98-6 | 1 - <5% |
| Butane | 106-97-8 | 1 - <5% |
| Proprietary | | 1 - <3% |
| 1,2,3-Propanetriol | 56-81-5 | 0.1 - <1% |

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First-aid measures

Ingestion: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.

Inhalation: Move to fresh air.

Skin Contact: If skin irritation occurs: Get medical advice/attention. Destroy or thoroughly clean contaminated shoes. Immediately remove contaminated clothing and shoes and wash skin with soap and plenty of water. If skin irritation or an allergic skin reaction develops, get medical attention.



Eye contact: Immediately flush with plenty of water for at least 15 minutes. If easy to do, remove contact lenses. Get medical attention.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.

Hazards: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: No data available.

5. Fire-fighting measures

General Fire Hazards: Use water spray to keep fire-exposed containers cool. Fight fire from a protected location. Move containers from fire area if you can do so without risk.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical: Vapors may travel considerable distance to a source of ignition and flash back.

Special protective equipment and precautions for firefighters

Special firefighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures: Ventilate closed spaces before entering them. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Keep upwind. See Section 8 of the SDS for Personal Protective Equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep unauthorized personnel away.

Methods and material for containment and cleaning up: Absorb spill with vermiculite or other inert material, then place in a container for chemical waste.

Notification Procedures: Prevent entry into waterways, sewer, basements or confined areas. Stop the flow of material, if this is without risk. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk.



Environmental Precautions: Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Do not contaminate water sources or sewer.

7. Handling and storage

Precautions for safe handling: Avoid contact with eyes. Wash hands thoroughly after handling. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Avoid contact with eyes, skin, and clothing.

Conditions for safe storage, including any incompatibilities: Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Aerosol Level 1

8. Exposure controls/personal protection

Control Parameters

Occupational Exposure Limits

| Chemical Identity | Type | Exposure Limit Values | Source |
|---|------|-----------------------|---|
| Propane | REL | 1,000 ppm 1,800 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | PEL | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | TWA | 1,000 ppm 1,800 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Butane | REL | 800 ppm 1,900 mg/m3 | US. NIOSH: Pocket Guide to Chemical Hazards (2005) |
| | STEL | 1,000 ppm | US. ACGIH Threshold Limit Values (03 2018) |
| | TWA | 800 ppm 1,900 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| 1,2,3-Propanetriol - Total dust. | PEL | 15 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| | TWA | 10 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| 1,2,3-Propanetriol - Respirable fraction. | TWA | 5 mg/m3 | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| | PEL | 5 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |

Appropriate Engineering Controls No data available.

Individual protection measures, such as personal protective equipment

General information: Provide easy access to water supply and eye wash facilities. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Eye/face protection: Wear safety glasses with side shields (or goggles).

Skin Protection

Hand Protection: No data available.

Other: Wear chemical-resistant gloves, footwear, and protective clothing appropriate for the risk of exposure. Contact health and safety professional or manufacturer for specific information.



Respiratory Protection: In case of inadequate ventilation use suitable respirator. Seek advice from local supervisor.

Hygiene measures: Avoid contact with eyes. Observe good industrial hygiene practices. When using do not smoke. Contaminated work clothing should not be allowed out of the workplace. Avoid contact with skin.

9. Physical and chemical properties

Appearance

Physical state: liquid
Form: Spray Aerosol
Color: No data available.

Odor: No data available.

Odor threshold: No data available.

pH: No data available.

Melting point/freezing point: No data available.

Initial boiling point and boiling range: No data available.

Flash Point: -104.44 °C

Evaporation rate: No data available.

Flammability (solid, gas): No data available.

Upper/lower limit on flammability or explosive limits

Flammability limit - upper (%): No data available.

Flammability limit - lower (%): No data available.

Explosive limit - upper (%): No data available.

Explosive limit - lower (%): No data available.

Vapor pressure: 3,972.1165 - 5,171.068 hPa (20 °C)

Vapor density: No data available.

Density: No data available.

Relative density: No data available.

Solubility(ies)

Solubility in water: No data available.

Solubility (other): No data available.

Partition coefficient (n-octanol/water): No data available.

Auto-ignition temperature: No data available.

Decomposition temperature: No data available.

Viscosity: No data available.

10. Stability and reactivity

Reactivity: No data available.

Chemical Stability: Material is stable under normal conditions.



| | |
|--|------------------------------|
| Possibility of hazardous reactions: | No data available. |
| Conditions to avoid: | Avoid heat or contamination. |
| Incompatible Materials: | No data available. |
| Hazardous Decomposition Products: | No data available. |

11. Toxicological information

Information on likely routes of exposure

| | |
|----------------------|--------------------|
| Inhalation: | No data available. |
| Skin Contact: | No data available. |
| Eye contact: | No data available. |
| Ingestion: | No data available. |

Symptoms related to the physical, chemical and toxicological characteristics

| | |
|----------------------|--------------------|
| Inhalation: | No data available. |
| Skin Contact: | No data available. |
| Eye contact: | No data available. |
| Ingestion: | No data available. |

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

| | |
|----------------------------|--|
| Oral Product: | ATEmix: 160,256.41 mg/kg |
| Dermal Product: | Not classified for acute toxicity based on available data. |
| Inhalation Product: | Not classified for acute toxicity based on available data. |

| | |
|--|--------------------|
| Repeated dose toxicity Product: | No data available. |
|--|--------------------|

| | |
|---|--------------------|
| Skin Corrosion/Irritation Product: | No data available. |
|---|--------------------|

| | |
|---|--------------------|
| Serious Eye Damage/Eye Irritation Product: | No data available. |
|---|--------------------|

| | |
|---|--------------------|
| Respiratory or Skin Sensitization Product: | No data available. |
|---|--------------------|

Carcinogenicity



Product: No data available.

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:
No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:
No carcinogenic components identified

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):
No carcinogenic components identified

Germ Cell Mutagenicity

In vitro
Product: No data available.

In vivo
Product: No data available.

Reproductive toxicity
Product: No data available.

Specific Target Organ Toxicity - Single Exposure
Product: No data available.

Specific Target Organ Toxicity - Repeated Exposure
Product: No data available.

Aspiration Hazard
Product: No data available.

Other effects: No data available.

12. Ecological information

Ecotoxicity:

Acute hazards to the aquatic environment:

Fish
Product: No data available.

Aquatic Invertebrates
Product: No data available.

Chronic hazards to the aquatic environment:

Fish
Product: NOEC : Estimated < 1 mg/l

Aquatic Invertebrates
Product: No data available.

Toxicity to Aquatic Plants
Product: No data available.



Persistence and Degradability

Biodegradation
Product: 60 % (28 d) Readily biodegradable

BOD/COD Ratio
Product: No data available.

Bioaccumulative potential
Bioconcentration Factor (BCF)
Product: No data available.

Partition Coefficient n-octanol / water (log Kow)
Product: No data available.

Mobility in soil: No data available.

Known or predicted distribution to environmental compartments

| | |
|---|--------------------|
| Cyclohexene, 1-methyl-4-(1-methylethenyl)-, (4R)- | No data available. |
| Propane | No data available. |
| Butane | No data available. |
| Proprietary | No data available. |
| 1,2,3-Propanetriol | No data available. |

Other adverse effects: Toxic to aquatic life with long lasting effects.

13. Disposal considerations

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws.

Contaminated Packaging: No data available.

14. Transport information

DOT

| | |
|----------------------------|---------------------|
| UN Number: | UN 1950 |
| UN Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es) | |
| Class: | 2.1 |
| Label(s): | – |
| Packing Group: | II |
| Marine Pollutant: | No |

| | |
|------------------------|----|
| Environmental Hazards: | No |
| Marine Pollutant | No |

Special precautions for user: Not regulated.

IMDG

| | |
|----------------------------|---------------------|
| UN Number: | UN 1950 |
| UN Proper Shipping Name: | Aerosols, flammable |
| Transport Hazard Class(es) | |
| Class: | 2 |
| Label(s): | – |



EmS No.: F-D, S-U
Packing Group: -
Environmental Hazards: Yes
Marine Pollutant: No
Special precautions for user: Not regulated.

IATA

UN Number: UN 1950
Proper Shipping Name: Aerosols, flammable
Transport Hazard Class(es):
Class: 2.1
Label(s): -
Packing Group: -
Environmental Hazards: Yes
Marine Pollutant: No
Special precautions for user: Not regulated.
Cargo aircraft only: Allowed.

15. Regulatory information

US Federal Regulations

Restrictions on use: Not known.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)
US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)
None present or none present in regulated quantities.

CERCLA Hazardous Substance List (40 CFR 302.4):

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Propane | lbs. 100 |
| Butane | lbs. 100 |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Fire Hazard
Immediate (Acute) Health Hazards
Flammable aerosol
Serious Eye Damage/Eye Irritation
Skin sensitizer

SARA 302 Extremely Hazardous Substance
None present or none present in regulated quantities.

SARA 304 Emergency Release Notification

| <u>Chemical Identity</u> | <u>Reportable quantity</u> |
|--------------------------|----------------------------|
| Propane | lbs. 100 |
| Butane | lbs. 100 |

SARA 311/312 Hazardous Chemical

| <u>Chemical Identity</u> | <u>Threshold Planning Quantity</u> |
|--------------------------|------------------------------------|
| Cyclohexene, 1-methyl-4- | 10000 lbs |



| | |
|---------------------------|-----------|
| (1-methylethenyl)-, (4R)- | |
| Propane | 10000 lbs |
| Butane | 10000 lbs |
| Proprietary | 10000 lbs |
| 1,2,3-Propanetriol | 10000 lbs |

SARA 313 (TRI Reporting)

None present or none present in regulated quantities.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130):

Clean Water Act Section 311 Hazardous Substances (40 CFR 117.3)

US State Regulations

US. California Proposition 65

No ingredient requiring a warning under CA Prop 65.

US. New Jersey Worker and Community Right-to-Know Act

Chemical Identity

Cyclohexene, 1-methyl-4-(1-methylethenyl)-, (4R)-
Propane
Butane

US. Massachusetts RTK - Substance List

No ingredient regulated by MA Right-to-Know Law present.

US. Pennsylvania RTK - Hazardous Substances

Chemical Identity

Propane
Butane

US. Rhode Island RTK

No ingredient regulated by RI Right-to-Know Law present.

International regulations

Montreal protocol

Not applicable

Stockholm convention

Not applicable

Rotterdam convention

Not applicable

Kyoto protocol

Not applicable

Inventory Status:

Australia AICS: Not in compliance with the inventory.

Canada DSL Inventory List: Not in compliance with the inventory.

EINECS, ELINCS or NLP: Not in compliance with the inventory.

Japan (ENCS) List: Not in compliance with the inventory.



| | |
|--|--|
| China Inv. Existing Chemical Substances: | Not in compliance with the inventory. |
| Korea Existing Chemicals Inv. (KECI): | Not in compliance with the inventory. |
| Canada NDSL Inventory: | Not in compliance with the inventory. |
| Philippines PICCS: | Not in compliance with the inventory. |
| US TSCA Inventory: | On or in compliance with the inventory |
| New Zealand Inventory of Chemicals: | Not in compliance with the inventory. |
| Japan ISHL Listing: | Not in compliance with the inventory. |
| Japan Pharmacopoeia Listing: | Not in compliance with the inventory. |
| Mexico INSQ: | Not in compliance with the inventory. |
| Ontario Inventory: | Not in compliance with the inventory. |
| Taiwan Chemical Substance Inventory: | Not in compliance with the inventory. |

16. Other information, including date of preparation or last revision

| | |
|------------------------------|---|
| Issue Date: | 09/22/2019 |
| Revision Information: | No data available. |
| Version #: | 1.0 |
| Further Information: | No data available. |
| Disclaimer: | This information is provided without warranty. The information is believed to be correct. This information should be used to make an independent determination of the methods to safeguard workers and the environment. |

SAFETY DATA SHEET

Section 1. IDENTIFICATION

Product Identifier

Product Name Nickel Thred Gard.

Other means of Identification

Product Code NG04, NG08, NG16.

Recommended Use Anti Seize Compound.

Recommended Restrictions None Known.

Manufacturer

Company Name Federal Process Corporation
Address 4520 Richmond Road
Cleveland OH 44128
Telephone 1-800-846-7325

Emergency Telephone Number: Call Chemtrec at 1-800-424-9300

Section 2. HAZARDS IDENTIFICATION

PHYSICAL STATE: Grease Like

Classification:

| | |
|-----------------------------------|------------|
| Serious eye damage/eye irritation | Category 2 |
| Skin sensitization | Category 1 |
| | |

Signal Word:

Warning



Hazard Statements:

H319 – Causes serious eye irritation.

H317 – May cause an allergic skin reaction

Precautionary Statements:

Prevention: Not expected to be present a hazard during normal use.

Response: P305 + P351 + P338 – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P337 + P313–If eye irritation persists: Get medical advice/attention.

P332 + P313 – If skin irritation or rash occurs: Get medical advice/attention.

Disposal: P501 - Dispose of contents/container to an approved waste disposal plant.

Other Hazards: Toxic to aquatic life with long lasting effects.

Unknown Acute Toxicity: 2% of the mixture consists of ingredient(s) of unknown toxicity.

Section 3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS Number | Weight % |
|---------------|------------|----------|
| Petroleum oil | 64741-96-4 | 60-80 |
| Nickel | 7440-02-0 | 5-10 |

Section 4. FIRST AID MEASURES

First Aid Measures:

Eye Contact Rinse thoroughly with plenty of water, for 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical advice/attention.

Skin Contact If skin irritation occurs, rinse affected area with water. If skin irritation or rash occurs: Get medical advice/attention.

Inhalation Remove to fresh air. If signs/symptoms continue, get medical attention. Give oxygen or artificial respiration as needed.

Ingestion Do NOT induce vomiting Get medical attention immediately. Rinse mouth with water. Never give anything by mouth to an unconscious individual.

Most Important Symptoms and effects:

Symptoms Direct contact with eyes may cause temporary irritation.
Do NOT ingest.

Section 5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media: Use foam, dry chemical, carbon dioxide or water fog.

Unsuitable Extinguishing Media: Avoid solid water stream as it may scatter and spread fire.

Specific Hazards Arising from the Chemical:

Carbon oxides expected to be the primary hazardous combustion product.

Protective Equipment and Precautions for Firefighters:

As in any fire, wear self-contained breathing apparatus and other protective clothing (approved or equivalent) and full protective gear.

Section 6. ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures:

Personal Precautions: Use personal protective equipment as required. Keep unnecessary personnel away.

Methods and Material for Containment and Cleaning Up:

Methods for Containment: Prevent further leakage or spillage if safe to do so.

Methods for Clean-Up: Keep in suitable, closed containers for disposal.

Section 7. HANDLING AND STORAGE

Precautions for Safe Handling:

Advice on Safe Handling: Avoid breathing vapors or mists. Contaminated work-clothing should not be allowed out of the workplace.

Conditions for Safe Storage, including

Any Incompatibilities:

Storage Conditions: Keep containers tightly closed in a dry, cool and well-ventilated place.
Do not store near heat, sparks, or open flames.
KEEP OUT OF REACH OF CHILDREN.

Incompatible Materials: None known based on information supplied.

Section 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines:

| Chemical Name | ACGIH TWA | ACGIH STEL | OSHA TWA |
|-----------------------------------|---------------------|------------|-----------------------|
| Petroleum oil (CAS 64741-96-4) | 5 mg/m ³ | N/A | 5 mg/m ³ |
| Nickel (CAS 7440-02-0) | 1 mg/m ³ | N/A | 0.1 mg/m ³ |

Appropriate Engineering Controls:

Engineering Controls: Apply technical measures to comply with the occupational exposure limits.

Individual Protection Measures, such as
Personal Protective Equipment:

Eye/Face Protection: Avoid contact with eyes.

Skin and Body Protection: No protective equipment is needed under normal use conditions.

Respiratory Protection: Ensure adequate ventilation, especially in confined areas. If confined in poorly ventilated areas use NIOSH/MSHA

General Hygiene Considerations: Handle in accordance with good industrial hygiene and safety practice. Wash exposed areas thoroughly before eating, drinking, smoking or leaving work area. Launder contaminated clothing before reusing.

Section 9. PHYSICAL AND CHEMICAL PROPERTIES

Information on Basic Physical and Chemical Properties

| | | | |
|-----------------|---------------|-----------------|-------------------|
| Physical State: | Grease like. | Odor: | Mild/grease like. |
| Appearance: | Viscous.. | Odor Threshold: | Not available. |
| Color: | Grey metallic | | |

| <u>Property</u> | <u>Values</u> |
|-----------------|---------------|
| pH | N/A |

| | |
|--|---------------------------|
| Melting Point/Freezing Point | Not determined. |
| Boiling Point/Boiling Range | Not determined. |
| Flash Point | >450F (>232C) Closed Cup. |
| Evaporation Rate | Not determined. |
| Flammability (Solid, Gas) | n/a-liquid |
| Upper Flammability Limit | Not determined. |
| Lower Flammability Limit | Not determined. |
| Vapor Pressure | Not determined. |
| Vapor Density | Not determined. |
| Specific Gravity | Not determined. |
| Water Solubility | None. |
| Solubility in other Solvents | Not determined. |
| Partition Coefficient (n-octanol/water) | Not determined. |
| Auto-ignition Temperature | Not determined. |
| Decomposition Temperature | Not determined. |
| Kinematic Viscosity | Not determined. |
| Explosive Properties | Not determined. |
| Oxidizing Properties | Not determined. |

Section 10. STABILITY AND REACTIVITY

| | |
|--|--|
| <u>Reactivity:</u> | Not reactive under normal conditions. |
| <u>Chemical Stability:</u> | Stable under recommended storage conditions. |
| <u>Possibility of Hazardous Reactions:</u> | None under normal processing. |
| <u>Conditions to Avoid:</u> | Keep out of reach of children. |
| <u>Incompatible Materials:</u> | None known. |
| <u>Hazardous Decomposition Products:</u> | Oxides of carbon. |

Section 11. TOXICOLOGICAL INFORMATION

Information on Likely Routes of Exposure:

Eye Contact: Causes serious eye irritation.

Skin Contact: May cause an allergic skin reaction.

Inhalation: Avoid breathing vapors or mists.

Ingestion: Do not taste or swallow.

Component Information:

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|-----------------------------------|--------------|-------------|-----------------|
| Petroleum oil (CAS 64741-96-4) | N/A | N/A | N/A |
| Nickel (CAS 7440-02-0) | 5 g/kg (Rat) | NO DATA | NO DATA |

Information on physical, chemical and toxicological effects:

Symptoms: Please section 4 of this SDS for symptoms.

Delayed and Immediate Effects as Well as Chronic Effects From Short and Long Term Exposure:

Sensitization: May cause an allergic skin reaction.

Carcinogenicity: Nickel has been reported by NTP, OSHA and IARC as a possible carcinogen..

| Chemical Name | ACGIH | IARC | NTP | OSHA PEL |
|-----------------------------------|-----------------|---------|---------|----------|
| Petroleum oil (CAS 64741-96-4) | No Data | No Data | No Data | No Data |
| Nickel (CAS740-02-0) | 1 mg/m3 as dust | No Data | No Data | 1 mg/m3 |
| | | | | |

Legend

IARC (International Agency for Research on Cancer).

Group3 IARC components are "not classifiable as human carcinogens".

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

Numerical Measures of Toxicity:

Not Determined.

Section 12. ECOLOGICAL INFORMATION

Ecotoxicity:

Toxic to aquatic life with lasting effects.

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to Microorganisms | Crustacea |
|-------------------------------|----------------------|------|----------------------------|-----------|
| Petroleum oil (64741-96-4) | N/D | N/D | N/D | N/A |
| Nickel (7440-02-0) | N/D | N/D | N/D | N/D |
| | | | | |

Persistence/Degradability: Not determined.

Bioaccumulation: Not determined.

Mobility: Not determined.

Other Adverse Effects: Not determined.

Do not allow this compound to enter water-ways or sewers.

Section 13. DISPOSAL CONSIDERATIONS

Waste Treatment Method:

Disposal of Wastes: Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated Packaging: Disposal should be in accordance with applicable regional, national and local laws and regulations.

Section 14. TRANSPORT INFORMATION

DOT: Not Regulated

PROPER SHIPPING NAME: N/A.

IDENTIFICATION NUMBER: N/A

IATA: Not regulated

IMDG: Not regulated.

Section 15. REGULATORY INFORMATION

| | |
|---------------------------------------|-----------------|
| <u>International Inventories:</u> | Not determined. |
| <u>U.S. Federal Regulations:</u> | Not determined. |
| Petroleum oil <u>SARA 313:</u> | No. |
| Copper flakes SARA 313 | Yes |
| TSCA Inventory: CERCLA RQ | Yes 100 lbs. |
| <u>U.S Right-to-Know Regulations:</u> | Not determined. |

Section 16. OTHER INFORMATION

| | | | | |
|-------|---------------------|-------------------|------------------|-----------------------------------|
| NFPA: | Health Hazards 1 | Flammability 1 | Instability 0 | Special Hazards Not determined |
| HMIS | Health Hazards 1 | Flammability 1 | Instability 0 | Special Hazards Not determined |

Issue Date: 1st March 2014

Revision Date: 23rd March 2018

DISCLAIMER: The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

SECTION 1. IDENTIFICATION

Product name : Shell Rotella T5 NG 15W-40

Product code : 001F4538

Manufacturer or supplier's details

Manufacturer/Supplier : **Shell Oil Products US**
PO Box 4427
Houston TX 77210-4427
USA

SDS Request : (+1) 877-276-7285
Customer Service :

Emergency telephone number

Spill Information : 877-504-9351
Health Information : 877-242-7400

Recommended use of the chemical and restrictions on use

Recommended use : Engine oil.

SECTION 2. HAZARDS IDENTIFICATION

GHS classification in accordance with 29 CFR 1910.1200

Skin sensitisation : Category 1

GHS label elements

Hazard pictograms :



Signal word : Warning

Hazard statements : **PHYSICAL HAZARDS:**
Not classified as a physical hazard under GHS criteria.
HEALTH HAZARDS:
H317 May cause an allergic skin reaction.
ENVIRONMENTAL HAZARDS:
Not classified as an environmental hazard under GHS criteria.

Precautionary statements : **Prevention:**
P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.
Response:

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

P302 + P352 IF ON SKIN: Wash with plenty of water and soap.
P333 + P313 If skin irritation or rash occurs: Get medical advice/attention.

Storage:

No precautionary phrases.

Disposal:

P501 Dispose of contents/ container to an approved waste disposal plant.

Hazardous components which must be listed on the label:
Contains calcium sulphonate.

Other hazards which do not result in classification

Prolonged or repeated skin contact without proper cleaning can clog the pores of the skin resulting in disorders such as oil acne/folliculitis.

Used oil may contain harmful impurities.

Not classified as flammable but will burn.

The classification of this material is based on OSHA HCS 2012 criteria.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Chemical nature : Highly refined mineral oils and additives.
The highly refined mineral oil contains <3% (w/w) DMSO-extract, according to IP346.

* contains one or more of the following CAS-numbers: 64742-53-6, 64742-54-7, 64742-55-8, 64742-56-9, 64742-65-0, 68037-01-4, 72623-86-0, 72623-87-1, 8042-47-5, 848301-69-9.

Hazardous components

| Chemical name | Synonyms | CAS-No. | Concentration (% w/w) |
|--|---------------------|--------------|-----------------------|
| Alkylphenol | dodecylphenol | 27193-86-8 | 0.1 - 0.29 |
| Polyolefin amide alkeneamine borate | Borated succinimide | Not Assigned | 1 - 3 |
| Calcium alkaryl sulphonate | | Not Assigned | 1 - 3 |
| Polyolefin amide alkeneamine | | Not Assigned | 1 - 3 |
| Interchangeable low viscosity base oil (<20,5 cSt @40°C) * | | Not Assigned | 0 - 90 |

SECTION 4. FIRST-AID MEASURES

If inhaled : No treatment necessary under normal conditions of use.
If symptoms persist, obtain medical advice.

In case of skin contact : Remove contaminated clothing. Flush exposed area with water and follow by washing with soap if available.

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

- If persistent irritation occurs, obtain medical attention.
- In case of eye contact : Flush eye with copious quantities of water. Remove contact lenses, if present and easy to do. Continue rinsing.
If persistent irritation occurs, obtain medical attention.
- If swallowed : In general no treatment is necessary unless large quantities are swallowed, however, get medical advice.
- Most important symptoms and effects, both acute and delayed : Skin sensitisation (allergic skin reaction) signs and symptoms may include itching and/or a rash.
Oil acne/folliculitis signs and symptoms may include formation of black pustules and spots on the skin of exposed areas.
Ingestion may result in nausea, vomiting and/or diarrhoea.
- Protection of first-aiders : When administering first aid, ensure that you are wearing the appropriate personal protective equipment according to the incident, injury and surroundings.
- Indication of any immediate medical attention and special treatment needed : Treat symptomatically.
-

SECTION 5. FIRE-FIGHTING MEASURES

- Suitable extinguishing media : Foam, water spray or fog. Dry chemical powder, carbon dioxide, sand or earth may be used for small fires only.
- Unsuitable extinguishing media : Do not use water in a jet.
- Specific hazards during fire-fighting : Hazardous combustion products may include:
A complex mixture of airborne solid and liquid particulates and gases (smoke).
Carbon monoxide may be evolved if incomplete combustion occurs.
Unidentified organic and inorganic compounds.
- Specific extinguishing methods : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
- Special protective equipment for firefighters : Proper protective equipment including chemical resistant gloves are to be worn; chemical resistant suit is indicated if large contact with spilled product is expected. Self-Contained Breathing Apparatus must be worn when approaching a fire in a confined space. Select fire fighter's clothing approved to relevant Standards (e.g. Europe: EN469).
-

SECTION 6. ACCIDENTAL RELEASE MEASURES

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

- Personal precautions, protective equipment and emergency procedures : Avoid contact with skin and eyes.
- Environmental precautions : Use appropriate containment to avoid environmental contamination. Prevent from spreading or entering drains, ditches or rivers by using sand, earth, or other appropriate barriers.

Local authorities should be advised if significant spillages cannot be contained.
- Methods and materials for containment and cleaning up : Slippery when spilt. Avoid accidents, clean up immediately. Prevent from spreading by making a barrier with sand, earth or other containment material. Reclaim liquid directly or in an absorbent. Soak up residue with an absorbent such as clay, sand or other suitable material and dispose of properly.
- Additional advice : For guidance on selection of personal protective equipment see Chapter 8 of this Safety Data Sheet. For guidance on disposal of spilled material see Chapter 13 of this Safety Data Sheet.
-

SECTION 7. HANDLING AND STORAGE

- Technical measures : Use local exhaust ventilation if there is risk of inhalation of vapours, mists or aerosols. Use the information in this data sheet as input to a risk assessment of local circumstances to help determine appropriate controls for safe handling, storage and disposal of this material.
- Advice on safe handling : Avoid prolonged or repeated contact with skin. Avoid inhaling vapour and/or mists. When handling product in drums, safety footwear should be worn and proper handling equipment should be used. Properly dispose of any contaminated rags or cleaning materials in order to prevent fires.
- Avoidance of contact : Strong oxidising agents.
- Product Transfer : Proper grounding and bonding procedures should be used during all bulk transfer operations to avoid static accumulation.
- Further information on storage stability : Keep container tightly closed and in a cool, well-ventilated place. Use properly labeled and closable containers.

Store at ambient temperature.

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

Packaging material : Suitable material: For containers or container linings, use mild steel or high density polyethylene.
Unsuitable material: PVC.

Container Advice : Polyethylene containers should not be exposed to high temperatures because of possible risk of distortion.

SECTION 8. EXPOSURE CONTROLS AND PERSONAL PROTECTION

Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|-------------------|--------------|-------------------------------|--|----------|
| Oil mist, mineral | Not Assigned | TWA (Mist) | 5 mg/m ³ | OSHA Z-1 |
| Oil mist, mineral | | TWA (Inhalable fraction) | 5 mg/m ³ | ACGIH |

Biological occupational exposure limits

No biological limit allocated.

Monitoring Methods

Monitoring of the concentration of substances in the breathing zone of workers or in the general workplace may be required to confirm compliance with an OEL and adequacy of exposure controls. For some substances biological monitoring may also be appropriate.

Validated exposure measurement methods should be applied by a competent person and samples analysed by an accredited laboratory.

Examples of sources of recommended exposure measurement methods are given below or contact the supplier. Further national methods may be available.

National Institute of Occupational Safety and Health (NIOSH), USA: Manual of Analytical Methods <http://www.cdc.gov/niosh/>

Occupational Safety and Health Administration (OSHA), USA: Sampling and Analytical Methods <http://www.osha.gov/>

Health and Safety Executive (HSE), UK: Methods for the Determination of Hazardous Substances <http://www.hse.gov.uk/>

Institut für Arbeitsschutz Deutschen Gesetzlichen Unfallversicherung (IFA), Germany <http://www.dguv.de/inhalt/index.jsp>

L'Institut National de Recherche et de Sécurité, (INRS), France <http://www.inrs.fr/accueil>

Engineering measures : The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Select controls based on a risk assessment of local circumstances. Appropriate measures include:
Adequate ventilation to control airborne concentrations.

Where material is heated, sprayed or mist formed, there is

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version
2.0

Revision Date:
08/31/2018

SDS Number:
800010025929

Print Date: 09/01/2018
Date of last issue: 02/09/2016

greater potential for airborne concentrations to be generated.

General Information:

Define procedures for safe handling and maintenance of controls.

Educate and train workers in the hazards and control measures relevant to normal activities associated with this product.

Ensure appropriate selection, testing and maintenance of equipment used to control exposure, e.g. personal protective equipment, local exhaust ventilation.

Drain down system prior to equipment break-in or maintenance.

Retain drain downs in sealed storage pending disposal or subsequent recycle.

Always observe good personal hygiene measures, such as washing hands after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned.

Practice good housekeeping.

Personal protective equipment

Respiratory protection : No respiratory protection is ordinarily required under normal conditions of use.
In accordance with good industrial hygiene practices, precautions should be taken to avoid breathing of material.
If engineering controls do not maintain airborne concentrations to a level which is adequate to protect worker health, select respiratory protection equipment suitable for the specific conditions of use and meeting relevant legislation.
Check with respiratory protective equipment suppliers.
Where air-filtering respirators are suitable, select an appropriate combination of mask and filter.
Select a filter suitable for the combination of organic gases and vapours [Type A/Type P boiling point >65°C (149°F)].

Hand protection
Remarks

: Where hand contact with the product may occur the use of gloves approved to relevant standards (e.g. Europe: EN374, US: F739) made from the following materials may provide suitable chemical protection. PVC, neoprene or nitrile rubber gloves Suitability and durability of a glove is dependent on usage, e.g. frequency and duration of contact, chemical resistance of glove material, dexterity. Always seek advice from glove suppliers. Contaminated gloves should be replaced. Personal hygiene is a key element of effective hand care. Gloves must only be worn on clean hands. After using gloves, hands should be washed and dried thoroughly. Application of a non-perfumed moisturizer is recommended. For continuous contact we recommend gloves with breakthrough time of more than 240 minutes with preference for >

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

480 minutes where suitable gloves can be identified. For short-term/splash protection we recommend the same, but recognize that suitable gloves offering this level of protection may not be available and in this case a lower breakthrough time maybe acceptable so long as appropriate maintenance and replacement regimes are followed. Glove thickness is not a good predictor of glove resistance to a chemical as it is dependent on the exact composition of the glove material. Glove thickness should be typically greater than 0.35 mm depending on the glove make and model.

- Eye protection : Wear full face shield if splashes are likely to occur.
- Skin and body protection : Wear chemical resistant gloves/gauntlets and boots. Where risk of splashing, also wear an apron.
- Protective measures : Personal protective equipment (PPE) should meet recommended national standards. Check with PPE suppliers.
- Thermal hazards : Not applicable

Environmental exposure controls

- General advice : Take appropriate measures to fulfill the requirements of relevant environmental protection legislation. Avoid contamination of the environment by following advice given in Chapter 6. If necessary, prevent undissolved material from being discharged to waste water. Waste water should be treated in a municipal or industrial waste water treatment plant before discharge to surface water.
Local guidelines on emission limits for volatile substances must be observed for the discharge of exhaust air containing vapour.
-

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Appearance : liquid
- Colour : Clear amber
- Odour : Slight hydrocarbon
- Odour Threshold : Data not available
- pH : Not applicable
- pour point : -45 °C / -49 °F
Method: ASTM D5950
- Initial boiling point and boiling range : > 280 °C / 536 °F
estimated value(s)
- Flash point : 212 °C / 414 °F
-

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR
1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

Method: ASTM D93 (PMCC)

Evaporation rate : Data not available

Flammability (solid, gas) : Data not available

Upper explosion limit / upper flammability limit : Typical 10 %(V)

Lower explosion limit / Lower flammability limit : Typical 1 %(V)

Vapour pressure : < 0.5 Pa (20 °C / 68 °F)
estimated value(s)

Relative vapour density : > 1
estimated value(s)

Relative density : 0.863 (15 °C / 59 °F)

Density : 863 kg/m³ (15.0 °C / 59.0 °F)
Method: ASTM D4052

Solubility(ies)
Water solubility : negligible

Solubility in other solvents : Data not available

Partition coefficient: n-octanol/water : log Pow: > 6
(based on information on similar products)

Auto-ignition temperature : > 320 °C / 608 °F

Decomposition temperature : Data not available

Viscosity
Viscosity, dynamic : Data not available

Viscosity, kinematic : 15.15 mm²/s (100 °C / 212 °F)
Method: ASTM D445

Explosive properties : Not classified

Oxidizing properties : Data not available

Conductivity : This material is not expected to be a static accumulator.

SECTION 10. STABILITY AND REACTIVITY

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

Reactivity : The product does not pose any further reactivity hazards in addition to those listed in the following sub-paragraph.

Chemical stability : Stable.

Possibility of hazardous reactions : Reacts with strong oxidising agents.

Conditions to avoid : Extremes of temperature and direct sunlight.

Incompatible materials : Strong oxidising agents.

Hazardous decomposition products : No decomposition if stored and applied as directed.

SECTION 11. TOXICOLOGICAL INFORMATION

Basis for assessment : Information given is based on data on the components and the toxicology of similar products. Unless indicated otherwise, the data presented is representative of the product as a whole, rather than for individual component(s).

Information on likely routes of exposure

Skin and eye contact are the primary routes of exposure although exposure may occur following accidental ingestion.

Acute toxicity

Product:

Acute oral toxicity : LD50 (rat): > 5,000 mg/kg
Remarks: Low toxicity:
Based on available data, the classification criteria are not met.

Acute inhalation toxicity : Remarks: Based on available data, the classification criteria are not met.

Acute dermal toxicity : LD50 (Rabbit): > 5,000 mg/kg
Remarks: Low toxicity:
Based on available data, the classification criteria are not met.

Skin corrosion/irritation

Product:

Remarks: Slightly irritating to skin., Prolonged or repeated skin contact without proper cleaning can clog the pores of the skin resulting in disorders such as oil acne/folliculitis., Based on available data, the classification criteria are not met.

Serious eye damage/eye irritation

Product:

Remarks: Slightly irritating to the eye., Based on available data, the classification criteria are not met.

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version
2.0

Revision Date:
08/31/2018

SDS Number:
800010025929

Print Date: 09/01/2018
Date of last issue: 02/09/2016

Respiratory or skin sensitisation

Product:

Remarks: Expected to be a skin sensitizer.

Components:

Calcium alkaryl sulphonate:

Remarks: May cause an allergic skin reaction in sensitive individuals.

Germ cell mutagenicity

Product:

: Remarks: Non mutagenic, Based on available data, the classification criteria are not met.

Carcinogenicity

Product:

Remarks: Not a carcinogen., Based on available data, the classification criteria are not met.

Remarks: Product contains mineral oils of types shown to be non-carcinogenic in animal skin-painting studies., Highly refined mineral oils are not classified as carcinogenic by the International Agency for Research on Cancer (IARC).

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

OSHA

No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

NTP

No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

Reproductive toxicity

Product:

: Remarks: Not a developmental toxicant., Does not impair fertility., Based on available data, the classification criteria are not met.

STOT - single exposure

Product:

Remarks: Based on available data, the classification criteria are not met.

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

STOT - repeated exposure

Product:

Remarks: Based on available data, the classification criteria are not met.

Aspiration toxicity

Product:

Not an aspiration hazard.

Further information

Product:

Remarks: Used oils may contain harmful impurities that have accumulated during use. The concentration of such impurities will depend on use and they may present risks to health and the environment on disposal., ALL used oil should be handled with caution and skin contact avoided as far as possible.

Remarks: Continuous contact with used engine oils has caused skin cancer in animal tests.

Remarks: Slightly irritating to respiratory system.

SECTION 12. ECOLOGICAL INFORMATION

Basis for assessment : Ecotoxicological data have not been determined specifically for this product.
Information given is based on a knowledge of the components and the ecotoxicology of similar products.
Unless indicated otherwise, the data presented is representative of the product as a whole, rather than for individual component(s).(LL/EL/IL50 expressed as the nominal amount of product required to prepare aqueous test extract).

Ecotoxicity

Product:

Toxicity to fish (Acute toxicity) : Remarks: LL/EL/IL50 > 100 mg/l
Practically non toxic:
Based on available data, the classification criteria are not met.

Toxicity to daphnia and other aquatic invertebrates (Acute toxicity) : Remarks: LL/EL/IL50 > 100 mg/l
Practically non toxic:
Based on available data, the classification criteria are not met.

Toxicity to algae (Acute toxicity) : Remarks: LL/EL/IL50 > 100 mg/l
Practically non toxic:

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

Based on available data, the classification criteria are not met.

Toxicity to fish (Chronic toxicity) : Remarks: Data not available

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : Remarks: Data not available

Toxicity to microorganisms (Acute toxicity) : Remarks: Data not available

Components:

Alkylphenol:

M-Factor (Acute aquatic toxicity) : 1

Persistence and degradability

Product:

Biodegradability : Remarks: Not readily biodegradable. Major constituents are inherently biodegradable, but contains components that may persist in the environment.

Bioaccumulative potential

Product:

Bioaccumulation : Remarks: Contains components with the potential to bioaccumulate.

Mobility in soil

Product:

Mobility : Remarks: Liquid under most environmental conditions. If it enters soil, it will adsorb to soil particles and will not be mobile.

Remarks: Floats on water.

Other adverse effects

Product:

Additional ecological information : Does not have ozone depletion potential, photochemical ozone creation potential or global warming potential. Product is a mixture of non-volatile components, which will not be released to air in any significant quantities under normal conditions of use.

Poorly soluble mixture.
Causes physical fouling of aquatic organisms.

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version
2.0

Revision Date:
08/31/2018

SDS Number:
800010025929

Print Date: 09/01/2018
Date of last issue: 02/09/2016

Mineral oil does not cause chronic toxicity to aquatic organisms at concentrations less than 1 mg/l.

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : Recover or recycle if possible.
It is the responsibility of the waste generator to determine the toxicity and physical properties of the material generated to determine the proper waste classification and disposal methods in compliance with applicable regulations.
Do not dispose into the environment, in drains or in water courses

Waste product should not be allowed to contaminate soil or ground water, or be disposed of into the environment.
Waste, spills or used product is dangerous waste.

Contaminated packaging : Dispose in accordance with prevailing regulations, preferably to a recognized collector or contractor. The competence of the collector or contractor should be established beforehand. Disposal should be in accordance with applicable regional, national, and local laws and regulations.

Local legislation

Remarks : Disposal should be in accordance with applicable regional, national, and local laws and regulations.

SECTION 14. TRANSPORT INFORMATION

National Regulations

US Department of Transportation Classification (49 CFR Parts 171-180)

Not regulated as a dangerous good

International Regulations

IATA-DGR

Not regulated as a dangerous good

IMDG-Code

Not regulated as a dangerous good

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied. MARPOL Annex 1 rules apply for bulk shipments by sea.

Special precautions for user

Remarks : Special Precautions: Refer to Chapter 7, Handling & Storage, for special precautions which a user needs to be aware of or

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

needs to comply with in connection with transport.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

*: This material does not contain any components with a CERCLA RQ., Shell classifies this material as an "oil" under the CERCLA Petroleum Exclusion, therefore releases to the environment are not reportable under CERCLA.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 302 Extremely Hazardous Substances Threshold Planning Quantity

This material does not contain any components with a section 302 EHS TPQ.

SARA 311/312 Hazards : Respiratory or skin sensitisation

SARA 313 : This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Clean Water Act

This product does not contain any Hazardous Chemicals listed under the U.S. CleanWater Act, Section 311, Table 117.3.

US State Regulations

Pennsylvania Right To Know

| | |
|--|------------|
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | 64742-65-0 |
| Distillates (petroleum), hydrotreated heavy paraffinic | 64742-54-7 |
| Distillates (petroleum), hydrotreated light paraffinic | 64742-55-8 |
| lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based | 72623-86-0 |
| Zinc dialkyldithiophosphate | 68649-42-3 |
| Distillates (petroleum), hydrotreated light | 64742-47-8 |

California Prop. 65

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

California List of Hazardous Substances

| | |
|--|------------|
| Distillates (petroleum), solvent-dewaxed heavy paraffinic | 64742-65-0 |
| Distillates (petroleum), hydrotreated heavy paraffinic | 64742-54-7 |
| Distillates (petroleum), hydrotreated light paraffinic | 64742-55-8 |
| lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based | 72623-86-0 |

Other regulations:

The regulatory information is not intended to be comprehensive. Other regulations may apply to this material.

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR 1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

The components of this product are reported in the following inventories:

EINECS : All components listed or polymer exempt.
TSCA : All components listed.
DSL : All components listed.

SECTION 16. OTHER INFORMATION

Further information

NFPA Rating (Health, Fire, Reactivity) 1, 1, 0

Full text of other abbreviations

ACGIH : USA. ACGIH Threshold Limit Values (TLV)
OSHA Z-1 : USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
ACGIH / TWA : 8-hour, time-weighted average
OSHA Z-1 / TWA : 8-hour time weighted average
Abbreviations and Acronyms : The standard abbreviations and acronyms used in this document can be looked up in reference literature (e.g. scientific dictionaries) and/or websites.

ACGIH = American Conference of Governmental Industrial Hygienists
ADR = European Agreement concerning the International Carriage of Dangerous Goods by Road
AICS = Australian Inventory of Chemical Substances
ASTM = American Society for Testing and Materials
BEL = Biological exposure limits
BTEX = Benzene, Toluene, Ethylbenzene, Xylenes
CAS = Chemical Abstracts Service
CEFIC = European Chemical Industry Council
CLP = Classification Packaging and Labelling
COC = Cleveland Open-Cup
DIN = Deutsches Institut für Normung
DMEL = Derived Minimal Effect Level
DNEL = Derived No Effect Level
DSL = Canada Domestic Substance List
EC = European Commission
EC50 = Effective Concentration fifty
ECETOC = European Center on Ecotoxicology and Toxicology Of Chemicals
ECHA = European Chemicals Agency
EINECS = The European Inventory of Existing Commercial Chemical Substances
EL50 = Effective Loading fifty
ENCS = Japanese Existing and New Chemical Substances Inventory
EWC = European Waste Code

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR
1910.1200

Shell Rotella T5 NG 15W-40

Version 2.0 Revision Date: 08/31/2018 SDS Number: 800010025929 Print Date: 09/01/2018
Date of last issue: 02/09/2016

GHS = Globally Harmonised System of Classification and Labelling of Chemicals
IARC = International Agency for Research on Cancer
IATA = International Air Transport Association
IC50 = Inhibitory Concentration fifty
IL50 = Inhibitory Level fifty
IMDG = International Maritime Dangerous Goods
INV = Chinese Chemicals Inventory
IP346 = Institute of Petroleum test method N° 346 for the determination of polycyclic aromatics DMSO-extractables
KECI = Korea Existing Chemicals Inventory
LC50 = Lethal Concentration fifty
LD50 = Lethal Dose fifty per cent.
LL/EL/IL = Lethal Loading/Effective Loading/Inhibitory loading
LL50 = Lethal Loading fifty
MARPOL = International Convention for the Prevention of Pollution From Ships
NOEC/NOEL = No Observed Effect Concentration / No Observed Effect Level
OE_HP V = Occupational Exposure - High Production Volume
PBT = Persistent, Bioaccumulative and Toxic
PICCS = Philippine Inventory of Chemicals and Chemical Substances
PNEC = Predicted No Effect Concentration
REACH = Registration Evaluation And Authorisation Of Chemicals
RID = Regulations Relating to International Carriage of Dangerous Goods by Rail
SKIN_DES = Skin Designation
STEL = Short term exposure limit
TRA = Targeted Risk Assessment
TSCA = US Toxic Substances Control Act
TWA = Time-Weighted Average
vPvB = very Persistent and very Bioaccumulative

|| Due to a change in detail in Section 15, this document has been released as a significant change.
A vertical bar (|) in the left margin indicates an amendment from the previous version.

Sources of key data used to :
compile the Safety Data
Sheet

The quoted data are from, but not limited to, one or more sources of information (e.g. toxicological data from Shell Health Services, material suppliers' data, CONCAWE, EU IUCLID data base, EC 1272 regulation, etc).

Revision Date : 08/31/2018

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not

SAFETY DATA SHEET

According to OSHA Hazard Communication Standard, 29 CFR
1910.1200

Shell Rotella T5 NG 15W-40

| | | | |
|---------|----------------|--------------|--------------------------------|
| Version | Revision Date: | SDS Number: | Print Date: 09/01/2018 |
| 2.0 | 08/31/2018 | 800010025929 | Date of last issue: 02/09/2016 |

to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

US / EN

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

Issue date: 12/19/2014

Revision date: 03/24/2020

Supersedes: 06/07/2018

Version: 3.0

SECTION 1: Identification

1.1. Identification

Product form : Mixture
Trade name : VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

1.2. Recommended use and restrictions on use

Use of the substance/mixture : Substance for industrial application.
Restrictions on use : No additional information available

1.3. Supplier

LA-CO Industries, Inc.
1201 Pratt Boulevard
Elk Grove Village, IL. 60007-5746
Phone: (847) 956-7600
Fax: (847) 956-9885
E-mail: customer_service@laco.com



1.4. Emergency telephone number

Emergency number : 24-hour emergency: CHEMTREC- U.S. : 1-800-424-9300 International: +1-703-527-3887;
全国应急中心 0532 8388 9090

SECTION 2: Hazard(s) identification

2.1. Classification of the substance or mixture

GHS classification

Not classified

2.2. GHS Label elements, including precautionary statements

GHS-US labelling

No labelling applicable

2.3. Other hazards which do not result in classification

No additional information available

2.4. Unknown acute toxicity (GHS_US)

Not applicable

SECTION 3: Composition/information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

This mixture does not contain any substances to be mentioned according to the criteria of section 3.2 of HazCom 2012

SECTION 4: First-aid measures

4.1. Description of first aid measures

First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).
First-aid measures after inhalation : Allow affected person to breathe fresh air.
First-aid measures after skin contact : Wash skin with mild soap and water.
First-aid measures after eye contact : Rinse eyes with water as a precaution.
First-aid measures after ingestion : Call a POISON CENTER/doctor if you feel unwell.

4.2. Most important symptoms and effects (acute and delayed)

Symptoms/effects : Not expected to present a significant hazard under anticipated conditions of normal use.
Symptoms/effects after inhalation : In high concentrations : May cause drowsiness or dizziness.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

4.3. Immediate medical attention and special treatment, if necessary

No special procedures required.

SECTION 5: Fire-fighting measures

5.1. Suitable (and unsuitable) extinguishing media

Suitable extinguishing media : Dry powder. Foam. Water fog.

Unsuitable extinguishing media : None known.

5.2. Specific hazards arising from the chemical

Fire hazard : No particular fire or explosion hazard.

Reactivity : No dangerous reactions known.

5.3. Special protective equipment and precautions for fire-fighters

Firefighting instructions : Do not allow run-off from fire fighting to enter drains or water courses.

Protection during firefighting : Do not enter fire area without proper protective equipment, including respiratory protection. Fire-resistant protective clothing. Wear a self contained breathing apparatus. EN469.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : This product is not hazardous.

6.1.1. For non-emergency personnel

Emergency procedures : Evacuate unnecessary personnel.

6.1.2. For emergency responders

Emergency procedures : No additional risk management measures required.

6.2. Environmental precautions

Contains no substances known to be hazardous to the environment.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Wipe up with absorbent material (for example cloth).

6.4. Reference to other sections

Section 13: disposal information. Section 7: safe handling. Section 8: personal protective equipment.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Does not necessitate any specific/particular technical measures.

Hygiene measures : Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Store in original container.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

No additional information available

8.2. Appropriate engineering controls

Appropriate engineering controls : Ensure good ventilation of the work station.

8.3. Individual protection measures/Personal protective equipment

Personal protective equipment:

Avoid all unnecessary exposure.

Hand protection:

None under normal use.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

Eye protection:

No special eye protection equipment recommended under normal conditions of use

Respiratory protection:

No special respiratory protection equipment is recommended under normal conditions of use with adequate ventilation

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|----------------------|
| Physical state | : Liquid |
| Appearance | : Viscous liquid. |
| Colour | : light yellow-green |
| Odour | : No data available |
| Odour threshold | : No data available |
| pH | : No data available |
| Melting point | : -10 °C |
| Freezing point | : No data available |
| Boiling point | : 105 °C |
| Flash point | : > 107 °C |
| Relative evaporation rate (butylacetate=1) | : No data available |
| Flammability (solid, gas) | : No data available |
| Vapour pressure | : No data available |
| Relative vapour density at 20 °C | : No data available |
| Relative density | : No data available |
| Solubility | : Soluble in water. |
| Log Pow | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |
| Explosive limits | : No data available |
| Explosive properties | : No data available |
| Oxidising properties | : No data available |

9.2. Other information

VOC content : 30 %

SECTION 10: Stability and reactivity

10.1. Reactivity

No dangerous reactions known.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

None known.

10.5. Incompatible materials

Water reactive.

10.6. Hazardous decomposition products

No dangerous decomposition products known.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

SECTION 11: Toxicological information

11.1. Information on toxicological effects

| | |
|-----------------------------------|--|
| Acute toxicity (oral) | : Not classified |
| Acute toxicity (dermal) | : Not classified |
| Acute toxicity (inhalation) | : Not classified |
| Skin corrosion/irritation | : Not classified |
| Serious eye damage/irritation | : Not classified |
| Respiratory or skin sensitisation | : Not classified |
| Germ cell mutagenicity | : Not classified |
| Carcinogenicity | : Not classified |
| Reproductive toxicity | : Not classified |
| STOT-single exposure | : Not classified |
| STOT-repeated exposure | : Not classified |
| Aspiration hazard | : Not classified |
| Viscosity, kinematic | : No data available |
| Likely routes of exposure | : Skin and eye contact. Inhalation. |
| Symptoms/effects | : Not expected to present a significant hazard under anticipated conditions of normal use. |
| Symptoms/effects after inhalation | : In high concentrations : May cause drowsiness or dizziness. |

SECTION 12: Ecological information

12.1. Toxicity

No additional information available

12.2. Persistence and degradability

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

| | |
|-------------------------------|--------------------|
| Persistence and degradability | : Not established. |
|-------------------------------|--------------------|

12.3. Bioaccumulative potential

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

| | |
|---------------------------|--------------------|
| Bioaccumulative potential | : Not established. |
|---------------------------|--------------------|

12.4. Mobility in soil

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

| | |
|----------------|--------------------|
| Ecology - soil | : Not established. |
|----------------|--------------------|

12.5. Other adverse effects

Other information : No other effects known.

SECTION 13: Disposal considerations

13.1. Disposal methods

| | |
|---------------------------------|---|
| Sewage disposal recommendations | : Do not dispose of waste into sewer. |
| Waste disposal recommendations | : Dispose in a safe manner in accordance with local/national regulations. |

SECTION 14: Transport information

Department of Transportation (DOT)

In accordance with DOT

Not regulated.

Transportation of Dangerous Goods

Not regulated.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

Transport by sea

Not regulated.

Air transport

Not regulated.

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory

15.2. International regulations

CANADA

No additional information available

EU-Regulations

No additional information available

National regulations

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

All ingredients are listed on the Canadian Domestic Substances List (DSL) or Non-Domestic Substances List (NDSL).

15.3. US State regulations

⚠ WARNING: This product can expose you to Diethanolamine, which is known to the State of California to cause cancer, and Methanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

| Component | Carcinogenicity | Developmental toxicity | Reproductive toxicity male | Reproductive toxicity female | No significant risk level (NSRL) | Maximum allowable dose level (MADL) |
|---|-----------------|------------------------|----------------------------|------------------------------|----------------------------------|--|
| Diethanolamine(111-42-2) | X | | | | | |
| sodium orthophenylphenoxide (132-27-4) | X | | | | | |
| amides, coco, N,N-bis(hydroxyethyl)(68603-42-9) | X | | | | | |
| Methanol(67-56-1) | | X | | | | 47000 µg/day (inhalation); 23,000 µg/day (oral) |

SECTION 16: Other information

Revision date : 03/24/2020
Data sources : Canadian Centre for Occupational Health and Safety. Accessed at: http://www.ccohs.ca/oshanswers/legisl/whmis_classifi.html. European Chemicals Agency (ECHA) Registered Substances list. Accessed at <http://echa.europa.eu/>. Krister Forsberg and S.Z. Mansdorf, "Quick Selection Guide to Chemical Protective Clothing", Fifth Edition. OSHA 29CFR 1910.1200 Hazard Communication Standard. REGULATION (EC) No 1272/2008 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 16 December 2008 on classification, labelling and packaging of substances and mixtures, amending and repealing Directives 67/548/EEC and 1999/45/EC, and amending Regulation (EC) No 1907/2006. TSCA Chemical Substance Inventory. Accessed at <http://www.epa.gov/oppt/existingchemicals/pubs/tscainventory/howto.html>. National Fire Protection Association. Fire Protection Guide to Hazardous Materials; 10th edition.

VISU-GLOW® FLUORESCENT GAS LEAK DETECTOR

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations, Canada Hazardous Products Regulations (HPR) / Règlement sur les produits dangereux (RPD)

Other information : None.


Abbreviations and acronyms:

| | |
|--|---|
| | ACGIH (American Conference of Government Industrial Hygienists) |
| | ATE: Acute Toxicity Estimate |
| | CAS (Chemical Abstracts Service) number |
| | CLP: Classification, Labelling, Packaging. |
| | EC50: Environmental Concentration associated with a response by 50% of the test population. |
| | GHS: Globally Harmonized System (of Classification and Labeling of Chemicals). |
| | LD50: Lethal Dose for 50% of the test population |
| | OSHA: Occupational Safety & Health Administration |
| | PBT: Persistent, Bioaccumulative, Toxic |
| | PNEC: Predicted No Effect Level |
| | STEL: Short Term Exposure Limits |
| | TSCA: Toxic Substances Control Act |
| | TWA: Time Weighted Average |

NFPA health hazard : 1 - Materials that, under emergency conditions, can cause significant irritation.

NFPA fire hazard : 1 - Materials that must be preheated before ignition can occur.

NFPA reactivity : 0 - Normally stable, even under fire exposure conditions, and not reactive with water.



Indication of changes:
Regulatory information

SDS Prepared by: The Redstone Group, dba SafeBridge Consultants, Inc.
110 Polaris Pkwy
Suite 200
Westerville, OH USA 43082
P: +1 (614) 923-7472
www.redstonegrp.com

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

SAFETY DATA SHEET



Techspray Blue Shower® G3®

Section 1. Identification

GHS product identifier : Techspray Blue Shower® G3®
Product code : 1630-16S
Other means of identification : Not available. Aerosol.
Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Not applicable.

Supplier's details : Techspray
8125 Cobb Center Drive
Kennesaw, GA 30152
Tel: 678-819-1408
Toll free: 1-800-858-4043
Fax: 1 806-372-8750

Emergency telephone number (with hours of operation) : Chemtrec - 1-800-424-9300
CANUTEC (Canadian Transportation): (613) 996-6666
Emergency phone: (800) 858-4043
24/7

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : SKIN CORROSION/IRRITATION - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
GASES UNDER PRESSURE Compressed gas
Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 2%

GHS label elements

Hazard pictograms :



Signal word : Warning
Hazard statements : Causes serious eye irritation.
Causes skin irritation.
Contains gas under pressure; may explode if heated.

Precautionary statements

Prevention : Wear protective gloves. Wear eye or face protection. Wash hands thoroughly after handling.
Response : IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
Storage : Protect from sunlight. Store in well-ventilated place.
Disposal : Not applicable.
Hazards not otherwise classified : None known.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Other means of identification : Not available. Aerosol.

| Ingredient name | % | CAS number |
|------------------------|-----------|------------|
| trans-dichloroethylene | ≥25 - ≤50 | 156-60-5 |
| ethanol | ≤5 | 64-17-5 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention if adverse health effects persist or are severe. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Causes skin irritation.
- Ingestion** : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing

Section 4. First aid measures

- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : Adverse symptoms may include the following:
Irritating to mouth, throat and stomach.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
halogenated compounds
carbonyl halides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Section 6. Accidental release measures

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Avoid breathing vapor or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Empty containers retain product residue and can be hazardous.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|------------------------|--|
| trans-dichloroethylene | ACGIH TLV (United States, 3/2015). TWA: 200 ppm 8 hours. TWA: 793 mg/m ³ 8 hours. |
| ethanol | ACGIH TLV (United States, 3/2015). STEL: 1000 ppm 15 minutes. NIOSH REL (United States, 10/2013). TWA: 1900 mg/m ³ 10 hours. TWA: 1000 ppm 10 hours. OSHA PEL (United States, 2/2013). TWA: 1900 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. OSHA PEL 1989 (United States, 3/1989). TWA: 1900 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. |

- Appropriate engineering controls** : Use only with adequate ventilation. If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.

Section 8. Exposure controls/personal protection

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid. [Aerosol.]
- Color** : Clear. Colorless.
- Odor** : Ethereal. [Slight]
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : Not available.
- Boiling point** : Not available.
- Flash point** : Not available.
- Evaporation rate** : >1 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : 122.7 kPa (920.45 mm Hg) [room temperature]
- Vapor density** : Not available.
- Relative density** : 1.229
- Solubility** : Not available.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : Not available.

Section 9. Physical and chemical properties

Auto-ignition temperature : Not available.
Decomposition temperature : Not available.
Viscosity : Not available.
Flow time (ISO 2431) : Not available.

Aerosol product

Type of aerosol : Spray
Heat of combustion : 0.84 kJ/g
Ignition distance : 0 cm
Enclosed space ignition - Time equivalent : 429 s/m³
Enclosed space ignition - Deflagration density : 1781 g/m³

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : No specific data.

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|---|-------------------|--|-------------------|
| trans-dichloroethylene | LC50 Inhalation Gas. LD50 Dermal | Rat Rabbit | 24100 ppm >5 g/kg | 4 hours - |
| ethanol | LD50 Oral LC50 Inhalation Vapor LD50 Oral | Rat Rat Rat | 1235 mg/kg 124700 mg/m ³ 7 g/kg | - 4 hours - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--|--|-----------------------|---|-----------------------|
| trans-dichloroethylene | Eyes - Moderate irritant Skin - Moderate irritant | Rabbit Rabbit | - - | 10 milligrams 24 hours 500 milligrams | - - |
| ethanol | Eyes - Mild irritant Eyes - Moderate irritant Eyes - Moderate irritant Eyes - Severe irritant Skin - Mild irritant | Rabbit Rabbit Rabbit Rabbit Rabbit | - - - - - | 24 hours 500 milligrams 0.06666667 minutes 100 milligrams 100 microliters 500 milligrams 400 milligrams | - - - - - |

Section 11. Toxicological information

| | | | | | |
|--|--------------------------|--------|---|------------------------|---|
| | Skin - Moderate irritant | Rabbit | - | 24 hours 20 milligrams | - |
|--|--------------------------|--------|---|------------------------|---|

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|-------|------|-----|
| ethanol | None. | - | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Causes skin irritation.
- Ingestion** : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : Adverse symptoms may include the following:
Irritating to mouth, throat and stomach.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Section 11. Toxicological information

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|-------|--------------|
| Oral | 2744.4 mg/kg |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------------------|---|---|----------|
| trans-dichloroethylene | Acute LC50 220000 to 290000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| ethanol | Acute EC50 17.921 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Acute EC50 2000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 25500 µg/l Marine water | Crustaceans - Artemia franciscana - Larvae | 48 hours |
| | Acute LC50 42000 µg/l Fresh water | Fish - Oncorhynchus mykiss | 4 days |
| | Chronic NOEC 4.995 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 100 µl/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| Chronic NOEC 0.375 µl/L Fresh water | Fish - Gambusia holbrooki - Larvae | 12 weeks | |

Persistence and degradability

Not available.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-----|-----------|
| trans-dichloroethylene | 2.09 | - | low |
| ethanol | -0.35 | - | low |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations




Disposal methods

: The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

United States - RCRA Toxic hazardous waste "U" List

| Ingredient | CAS # | Status | Reference number |
|---|----------|--------|------------------|
| 1,2-Dichloroethylene; Ethene, 1,2-dichloro-, (E)- | 156-60-5 | Listed | U079 |

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | ADR/RID | IMDG | IATA |
|----------------------------|---|---|-----------------------------|---|--|--|
| UN number | - | - | - | UN1950 | UN1950 | ID8000 |
| UN proper shipping name | Consumer commodity ORM-D | Consumer commodity ORM-D | Consumer commodity ORM-D | Aerosols, non-flammable | AEROSOLS IN LIMITED QUANTITIES OF CLASS 2 | Consumer commodity ID8000 |
| Transport hazard class(es) | ORM-D | ORM-D | ORM-D | 2  | 2.2  | 9  |
| Packing group | - | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. | No. |
| Additional information | Reportable quantity 2222.2 lbs / 1008.9 kg [216.86 gal / 820.9 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements. | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). | - | Tunnel code (E) | - | - |

Special precautions for user

: **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Section 14. Transport information

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 5(a)2 final significant new use rules:** Pentane, 1,1,1,2,2,3,4,5,5,5-decafluoro-
TSCA 8(a) CDR Exempt/Partial exemption: Not determined
TSCA 12(b) one-time export: Pentane, 1,1,1,2,2,3,4,5,5,5-decafluoro-
United States inventory (TSCA 8b): All components are listed or exempted.
Clean Water Act (CWA) 307: trans-dichloroethylene

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Immediate (acute) health hazard

Composition/information on ingredients

| Name | % | Fire hazard | Sudden release of pressure | Reactive | Immediate (acute) health hazard | Delayed (chronic) health hazard |
|------------------------|-----------|-------------|----------------------------|----------|---------------------------------|---------------------------------|
| trans-dichloroethylene | ≥25 - ≤50 | Yes. | No. | No. | Yes. | No. |
| ethanol | ≤5 | Yes. | No. | No. | Yes. | No. |

State regulations

Massachusetts : The following components are listed: DICHLOROETHYLENE-TRANS; ETHYL ALCOHOL; DENATURED ALCOHOL; CARBON DIOXIDE

New York : The following components are listed: Ethene, trans-1,2-dichloro-; Dichloroethylene

New Jersey : The following components are listed: ETHYL ALCOHOL; ALCOHOL; CARBON DIOXIDE; CARBONIC ACID GAS

Pennsylvania : The following components are listed: ETHENE, 1,2-DICHLORO-, (E)-; DENATURED ALCOHOL; ETHANOL; CARBON DIOXIDE

California Prop. 65

WARNING: This product contains less than 1% of a chemical known to the State of California to cause birth defects or other reproductive harm.

Section 15. Regulatory information

| Ingredient name | Cancer | Reproductive | No significant risk level | Maximum acceptable dosage level |
|---------------------|------------|--------------|---------------------------|--|
| ethanol methanol | No. No. | No. Yes. | Yes. No. | No. 23000 µg/day (ingestion) 47000 µg/day (inhalation) |

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

International lists

National inventory

- Australia** : All components are listed or exempted.
- Canada** : All components are listed or exempted.
- China** : All components are listed or exempted.
- Europe** : Not determined.
- Japan** : **Japan inventory (ENCS)**: All components are listed or exempted.
Japan inventory (ISHL): Not determined.
- Malaysia** : Not determined.
- New Zealand** : All components are listed or exempted.
- Philippines** : All components are listed or exempted.
- Republic of Korea** : All components are listed or exempted.
- Taiwan** : All components are listed or exempted.
- Turkey** : Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 2 |
| Flammability | | 2 |
| Physical hazards | | 0 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)

Section 16. Other information



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|--|--|
| SKIN IRRITATION - Category 2 EYE IRRITATION - Category 2A | Calculation method Calculation method |

History

Date of printing : 12/5/2018

Date of issue/Date of revision : 12/5/2018

Date of previous issue : No previous validation

Version : 1

Key to abbreviations

: ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 UN = United Nations

References : Not available.

☑ Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Safety Data Sheet (SDS)

Date Prepared/Revised: 1/3/20 Version no.: 03 Supersedes: (9/17/18)

1.) Identification of the Mixture and of the Company

Product identifier: **Aervoe Welding Anti-Spatter - Aerosol**

Product name:

887 Welding Anti-Spatter

Relevant identified uses of the substance: Use on various welding and torch cutting devices where weld spatter could be a problem, including MIG and TIG nozzles and tips, electrode holders, fixtures, resistant welding tips, and all types of maintenance/production welding.

Uses advised against: Aervoe #887 Welding Anti-Spatter is not a lubricant, grease, or oil, and warranty does not cover these misuses. Do not apply paint directly over Anti-Spatter film, as paint will not properly adhere.

| | |
|-----------------------------|---|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe industries Incorporated |
| For Product Information: | 1-800-227-0196 |
| Emergency telephone number: | 1-800-424-9300 (CHEMTREC – 24 hrs) |

2. Hazards identification

Classifications

Physical Hazards: Aerosol - Category 1
Flam. Liq. 2
Liquefied Gas

Health Hazards: Eye Irrit. 2
STOT SE 3

Environmental Hazards: N/AV

Labeling

Signal Word: Danger

Hazard Statements: H220 – Extremely flammable gas.
H222 – Extremely flammable aerosol.
H225 – Highly flammable liquid and vapour.
H229 - Pressurized container: may burst if heated
H319 – Causes serious eye irritation.
H336 – May cause drowsiness or dizziness.



Safety Data Sheet (SDS)

Date Prepared/Revised: 1/3/20 Version no.: 03 Supersedes: (9/17/18)

- Precautionary Statements:
- P101 - If medical advice is needed, have product container or label at hand
 - P102 - Keep out of reach of children
 - P103 - Read label before use
 - P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking
 - P211 - Do not spray on an open flame or other ignition source
 - P251 - Pressurized container: Do not pierce or burn, even after use
 - P261 - Avoid breathing dust/fume/gas/mist/vapours/spray
 - P262 - Do not get in eyes, on skin, or on clothing
 - P264 - Wash ... thoroughly after handling
 - P280 - Wear protective gloves/eye protection/face protection

 - P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.
 - P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F
 - P501 - Dispose of contents/container in accordance with local/regional/national/international regulation
 - P251 - Pressurized container: Do not pierce or burn, even after use



Symbols/Pictograms:

3. Composition / Information on Ingredients

Composition

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|---------------------|-----------|------------|---------------|----------------|---|----------------------|
| Dimethyl Ether | D.M.E. | 115-10-6 | 204-065-8 | 15-40% | Flam. Gas 1 Liquefied Gas | H220 H229 H222 |
| Methyl Ethyl Ketone | M.E.K. | 78-93-3 | 201-159-0 | 15-40% | Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 | H225 H319 H336 |
| Acetone | Propanone | 67-64-1 | 200-662-2 | 1-5% | Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 | H225 H319 H336 |

Other Product Information

Chemical Identity: Mixture

4.) First Aid Measures

General Advice:

If symptoms persist, always call a doctor.

Inhalation First Aid:

Remove victim to fresh air and provide oxygen if breathing is



Safety Data Sheet (SDS)

Date Prepared/Revised: 1/3/20 Version no.: 03 Supersedes: (9/17/18)

| | |
|---|---|
| | difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately. |
| Skin Contact First Aid: | Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. |
| Eye Contact First Aid: | If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately. |
| Ingestion First Aid: | If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |
| Most Important Symptoms/Effects: | Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects. |

5. Fire Fighting Measures

| | |
|--|---|
| Flammable Properties: | Flammable Aerosol |
| Auto Ignition Temperature: | Not Available |
| Suitable extinguishing media: | Carbon dioxide, dry chemical, water spray. |
| Unsuitable extinguishing media: | None known |
| Special hazards arising from the substance or mixture: | None known |
| Hazardous combustion products: | Carbon dioxide, Carbon monoxide |
| Fire & Explosion Hazards: | Closed Containers may rupture due to the buildup of pressure from extreme temperatures. |
| Precautions for fire-fighters: | Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode. |

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.
- 2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage



Safety Data Sheet (SDS)

Date Prepared/Revised: 1/3/20 Version no.: 03 Supersedes: (9/17/18)

Handling:

Flammable Aerosol, use in a well ventilated area.
Do not use near sources of ignition.
Do not to eat, drink and smoke while working with this material.
Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
Storage Temperature: 32° to 120°F (0° to 49°C).
No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
Keep away from sources of ignition.
Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|----------------------|------------|-----------------|------------------|----------------|-----------------|
| Dimethyl Ether | 115-10-6 | N/A | N/A | N/A | N/A |
| Methyl Ethyl Ketone | 78-93-3 | 200PPM | 300PPM | 200PPM | N/A |
| Acetone | 67-64-1 | 250PPM | 500PPM | 1000PPM | N/A |

*Values are based on the 2019 Guide to Occupational Exposure Values by ACGIH

9. Information on Basic Physical and Chemical Properties

| | |
|-----------------------------|-----------------------------------|
| Appearance: Creamy Yellow | Odor: Vanilla odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |



Safety Data Sheet (SDS)

Date Prepared/Revised: 1/3/20 Version no.: 03 Supersedes: (9/17/18)

| | |
|--|---|
| Flash Point: <0° F (-18° C) | Evaporation Rate: Slower than n-Butyl Acetate |
| Flammability Solid/Gas: Flammable gas | Upper LEL: 2.5% Lower LEL: 12% |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions
 Chemical stability: Stable under normal conditions
 Conditions to avoid: Heat and ignition sources
 Incompatible materials: Strong Oxidizing Agents
 Hazardous decomposition products: Will not occur

11. Toxicological Information

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: (Acetone) LD50: 5800 mg/kg (Rat-Oral)
 (Acetone) LC50: 21000 ppm/8 hr (Rat-Inha)
 (DME) LC50: 1644,000 ppm/4 hr

Eye irritation data: Eye Irrit. 2

Skin irritation/sensitization/absorption data: N/AV

Reproductive toxicity data: N/AV

Mutagenicity data: N/AV

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure: Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:



Safety Data Sheet (SDS)

Date Prepared/Revised: 1/3/20 Version no.: 03 Supersedes: (9/17/18)

| | |
|-------|--------|
| NTP: | N/AV |
| IARC: | N/AV |
| OSHA: | TLV-A4 |

12. Ecological Information

Ecotoxicity: **No Data Available**
 Persistence and degradability: **No Data Available**
 Bioaccumulative potential: **No Data Available**
 Mobility in soil: **No Data Available**
 Results of PBT and vPvB assessment: **No Data Available**
 Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.

Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|--------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference 49 CFR 172.101 |

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|----------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|---|
| UN1950 | Aerosols, Flammable | 2.1 | Not Applicable | Not Applicable | Reference IATA Dangerous Goods Regulation |

15. Regulatory Information



Safety Data Sheet (SDS)

Date Prepared/Revised: 1/3/20 Version no.: 03 Supersedes: (9/17/18)

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

PROP 65 (CA): WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 1/3/19

Supersedes: (9/17/18)

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.

MATERIAL SAFETY DATA SHEET

SECTION I: IDENTITY

Product/Material Name: Castrol GTX High Mileage Motor Oil (All SAE Grades) 5W-20, 5W-30, 10W-30, 10W-40, 20W-50, 25W-60
Chemical Name: Mixture
Chemical Family/Classification: Petroleum hydrocarbon
Molecular Weight: NA **Chemical Formula:** NA
Material Use: Motor Oil

HMIS HAZARD RATING:
[0 - Minimal; 1 - Slight; 2 - Moderate; 3 - Serious; 4 - Severe]
 Health: 1
 Flammability: 1
 Reactivity: 0

WARNING STATEMENTS (if Applicable):
 WARNING! AVOID SKIN CONTACT WITH USED MOTOR OILS.

MANUFACTURER'S/ SUPPLIER NAME & ADDRESS:

| | | |
|--|---|--|
| In the US: BP Lubricants USA Inc. 1500 Valley Road Wayne, NJ USA 07474 Telephone: (973) 633-2200 Telecopier: (973) 633-7475 | In Canada: Castrol Canada Inc. 3660 Lakeshore Blvd Toronto, Ontario M8W 1P2 Telephone: (416) 252-5511 Telecopier: (416) 252-1774 | In Latin America: Castrol Latin America Lubricants 3750 NW 87 th Avenue Suite 600 Miami, FL USA 33178 Telephone: (305) 714-2640 Telecopier: (786) 437-6380 |
|--|---|--|

IN THE EVENT OF AN EMERGENCY PLEASE CALL: BP Emergency Response Center 1-800-321-8642

Date Prepared/Updated: 11/28/2005

Preparer: Regulatory, Environmental, Safety Department
 Telephone: (973) 633-2200

SECTION II: PRODUCT/HAZARDOUS INGREDIENT INFORMATION

| INGREDIENTS - CHEMICAL/COMMON NAME | EXPOSURE LIMITS - TLV | LD ₅₀ | LC ₅₀ | % |
|--|--|----------------------|--------------------------------------|--------|
| Severely refined petroleum base stocks. May contain one or more of the following CASRN, 64742-41-2; 64741-88-4; 64742-01-4; 64742-41-2; 64742-46-7; 64742-54-7; 64742-56-9; 64742-57-0; 64742-62-7; 64742-65-0; 72623-83-7; 72623-84-8; 72623-85-9; 72623-86-0; 72623-87-1 | PEL/TWA: 5 mg/m3, mist (OSHA, ACGIH) STEL: 10 mg/m3, mist (ACGIH) | Oral, rat: > 5 g/kg. | Inhalation, 4 hr., rat: > 5000 mg/m3 | 60-100 |
| Multi-functional additive mixture composed of organo-metallic compounds, typically containing zinc dialkyl dithiophosphate, calcium salts of alkylated phenol sulfides, alkylated diphenyl amines [CASRN NA, mixture] | ND | ND | ND | 5-20 |
| Methacrylate polymer and/or ethylene-propylene copolymer with a nitrogen functional group blend [CASRN NA, mixture] | ND | ND | ND | 7-13 |

NOTE: Product contains no materials currently classified as carcinogenic per the Annual Report of the National Toxicology Program [NTP], OSHA Hazard Communication Standard or the International Agency for Research on Cancer [IARC, Groups 1, 2A or 2B].

SECTION III: FIRST AID MEASURES

Signs/Symptoms: Transient eye irritation, redness, tearing.

Eye contact: Flush with clear water for at least 15 minutes or until any irritation subsides. If irritation persists, seek medical attention.

Skin contact: Remove contaminated clothing and wash before reuse. Wipe excess material from skin. Wash exposed area with soap and water.

Inhalation: If irritation or drowsiness occur, move the person to fresh air. Administer respiratory assistance if breathing is difficult or stops; Consult a physician.

Ingestion: Give plenty of water or other mild drinkable fluids and call a physician immediately. Do not induce vomiting without express consent of medical personnel.

SECTION IV: HEALTH HAZARD DATA**Exposure Limits:**

See Section II, Product/Ingredient Information.

(For product) - Recommend using 5 mg/m³ for mineral oil mist averaged over an 8 hour daily exposure, based on established OSHA and ACGIH limits.

PRIMARY ROUTES OF ENTRY:

- Eye Contact
- Skin Contact
- Skin Absorption
- Inhalation (Acute)
- Inhalation (Chronic)
- Ingestion

EFFECTS OF EXPOSURE**Acute - (Evaluation based on components and/or similar products)**

Eyes: Not expected to cause prolonged or significant eye irritation.

Skin: Not expected to cause prolonged or significant skin irritation.

Respiratory system: Harmful concentrations of mists/vapors are unlikely through customary handling or use of this product.

Ingestion: Low order of toxicity, but may cause gastrointestinal disturbances, diarrhea. Ingestion of large amounts may cause headache, drowsiness, nausea, vomiting or diarrhea.

Chronic -

Prolonged or repeated skin contact may cause skin drying, cracking, irritation, defatting and dermatitis.

WARNING! AVOID SKIN CONTACT WITH USED MOTOR OILS. Used motor oils have caused skin cancer in laboratory animals when repeatedly applied and left in place between applications.

The product contains petroleum baseoils which may be refined by various processes including severe solvent extraction, severe hydrocracking, or severe hydrotreating. None of the oils require a cancer warning under the OSHA Hazard Communication Standard [29 CFR 1910.1200]. These oils have not been listed in the National Toxicology Program (NTP) Annual Report nor have they been classified by the International Agency for Research on Cancer (IARC) as carcinogenic to humans (Group 1), probably carcinogenic to humans (Group 2A) or possibly carcinogenic to humans (Group 2B).

Medical Conditions Generally Aggravated by Exposure: Pre-existing skin disorders.

TOXICOLOGY DATA (Product)**Acute Data (Median Lethal Dose - species)**

Oral LD₅₀ - rat: ND

Dermal LD₅₀ - rabbit: ND

Inhalation LC₅₀ - rat: ND

Irritancy Data

Eye irritation - rabbit: ND

Skin irritation - rabbit: ND

Sensitization - guinea pig: ND

Other: No data regarding presence of carcinogenicity, tetragenicity, mutagenicity, respiratory toxicity, sensitizing ability or synergistic substances.

SECTION V: EMPLOYEE PROTECTION**Ventilation:**

No special ventilation is usually necessary. However, if operating conditions may create high airborne concentrations of this material, special or local ventilation may be needed.

PERSONAL PROTECTIVE EQUIPMENT

Respiratory Protection: None required under normal use. If exposure is expected to exceed occupational exposure limits, use a NIOSH-approved respirator to prevent overexposure. In accordance with 29 CFR 1910.134, use either an atmosphere supplying respirator or an air-purifying respirator for organic vapors and particulates.

Eye: Safety goggles or glasses.

Gloves (specify): Wear oil impervious type, such as neoprene, nitrile, polyvinylchloride, to minimize skin contact.

Clothing: No special requirement; Normal work clothing. A coverall or apron may be used to minimize skin contact

Footwear: No special requirement.

Other: NA

Work/Hygienic Practices: Avoid prolonged and repeated skin contact. Do not wear contaminated clothing; Launder before reuse or discard. Wash thoroughly with soap and water after handling.

Storage/Handling: Keep containers closed when not in use. Do not store near heat, sparks, flame or strong oxidants. Avoid breathing mist. Maintain adequate ventilation. Avoid prolonged or repeated contact with skin.

SECTION VI: PHYSICAL/CHEMICAL CHARACTERISTICS

Boiling Point: > 500° F (> 260° C)

Specific Gravity (Water=1): 0.87

Vapor Pressure (mm.Hg. @ 25° C): < 0.01

Vapor Density (Air=1): > 1

Percent Volatiles: Negligible

Evaporation Rate (BuAc=1): < 0.1

Solubility in Water: Negligible

Freezing Point: -22° F to -40° F (-30° C to -40° C)

pH-Value: NA

Viscosity Range @ 100° C, cSt.:

| | | | |
|--------|--------------|--------|--------------|
| 5W-20 | 5.6 to 9.3 | 10W-30 | 9.3 to 12.5 |
| 5W-30 | 9.3 to 12.5 | 10W-40 | 12.5 to 16.3 |
| 20W-50 | 16.3 to 21.9 | 25W-60 | 21.9 to 26.1 |

Odor Threshold: NA

Coefficient of Water/Oil Distribution: ND

Appearance, Odor & Physical State: Clear, amber liquid; mild petroleum odor

SECTION VII: FIRE AND EXPLOSION DATA

FLAMMABILITY Yes [X] No [] NFPA Class IIIB material - Combustible liquid

Flash Point (COC): 400° F (204° C) min.

Fire Point (COC): 430° F (221° C) min.

Autoignition Temperature: ND

Flammability limits in Air, % Vol.: Upper - ND Lower - ND

Extinguishing Media:

CO₂, dry chemical, foam and water fog. Do not use water jets.

Special Firefighting Procedures/Unusual and Explosion Hazards:

Material must be preheated to burn. Do not enter confined areas without full protective equipment, including a positive pressure NIOSH approved self-contained breathing apparatus. Cool fire exposed containers with water.

EXPLOSION DATA

Sensitivity to Mechanical Impact: NA

Sensitivity to Static Discharge: NA

SECTION VIII: REACTIVITY

Stability: Stable at ambient temperatures

Hazardous Polymerization: Will not occur.

Conditions and Materials to Avoid (Incompatibilities):

Heat, open flame and oxidizing materials.

Hazardous Combustion or Decomposition Products:

Smoke, fumes, oxides of carbon

SECTION IX: ENVIRONMENTAL PROTECTION

CHEMTREC EMERGENCY PHONE NUMBER: (800) 424-9300, 24 hrs. for U.S. transportation related spills, leaks, fire, exposure, or accident.

CANUTEC EMERGENCY PHONE NUMBER: (613) 996-6666, 24 hrs. for Canadian transportation related spills, leaks, fire, exposure, or accident.

Spill or Leak Procedures:

Product may burn but is not readily ignitable. Use best engineering practices when attempting cleanup of a large spill.

Large spills - Wear respirator and protective clothing as appropriate. Stop source of leak if possible. Prevent entry into water sources. Dike and contain spill. Remove with vacuum trucks or pump to storage/salvage vessels. Soak up residue with an inert absorbent such as clay, sand or other suitable materials; Store and dispose of properly. Where feasible and appropriate, remove contaminated soil.

Small spills - Soak up spill with an inert absorbent such as clay, sand or other suitable materials; Store in a closed container and dispose of properly.

Regulatory spill reporting requirements may apply; Contact governmental agency or legal counsel for advice.

Waste Disposal Method:

If discarded as supplied, material does not meet RCRA characteristic definition of ignitability, corrosivity or reactivity and is not listed in 40 CFR 261.33. The toxicity characteristic has not been evaluated. Under RCRA, the applicable hazardous waste classification must be evaluated prior to disposal of the material. Use of the product, processing or contamination may render the resulting material hazardous.

All recovered material should be packaged, labeled, transported and disposed of or reclaimed in accordance with governmental regulations regarding air pollution, water pollution or health.

Don't pollute - Conserve Resources. Dispose of used oil properly.

CAUTION: Improper disposal or reuse of the empty container may be hazardous and illegal. Cutting or welding of empty containers may cause fire, explosion or toxic fumes from residues. Do not pressurize or expose to open flame or heat. Keep container closed and drum bungs in place. Refer to applicable governmental regulations.

SECTION X: REGULATORY INFORMATION

TRANSPORTATION

Special Shipping Information/DOT Proper Shipping Name: Not regulated.

CHEMICAL CONTROL REGULATIONS:

TSCA Status: All components of this material appear on the Toxic Substance Control Act Chemical Substances Inventory. This product contains trace amounts of Diphenylamine (CAS #122-39-4) which will require notification prior to export.

CEPA Status: All components of this material appear on the Canadian Domestic Substances List.

Canadian Workplace Hazardous Material Identification System (WHMIS) Classification: Material is not a "controlled product".

EPCRA (SARA Title III):

Section 302/304 Extremely Hazardous Substance: NA

CERCLA Section 102(a) Hazardous Substance: NA

Section 311 Hazard Category

- Acute (immediate)
- Chronic (delayed)
- Fire
- Sudden Release of Pressure
- Reactive
- Not applicable

Section 313 Toxic Release Inventory Chemical/Category:

Zinc compounds, 2.5% (wt.) max.

U.S. STATE RIGHT TO KNOW LAWS

New Jersey Worker and Community Right to Know Act, N.J.A.C. 8:59-5 Labelling Information: Motor Oil

NOTICE:

The information presented herein is compiled from sources considered to be dependable, believed to be accurate to the best of BP Lubricants USA Inc knowledge, and offered in good faith for the purpose of hazard communication. Because product use is beyond our control, no warranty is given, expressed or implied. BP Lubricants USA Inc. cannot assume any liability for the use of information contained herein. To determine applicability or effect of any law or regulation with respect to the product, users should consult a legal advisor or appropriate governmental agency.



SAFETY DATA SHEET

Oil Eater® Cleaner/Degreaser

In compliance with International Regulations: GHS -SDS Effective Date: September 2019
 Federal regulations: CFR 29 and 42 State: Illinois Public Act 83-240
 Applicable Items: AOD0435430 , AOD1G35437, AOD5G35438, AOD3035444,
 AOD5535389, AOD27535001

SECTION 1 – CHEMICAL PRODUCT & COMPANY IDENTIFICATION

GHS Product Identifier: Oil Eater® Degreaser/Cleaner Other Identification means: Aqueous Surfactant Solution
 Uses: General Purpose Cleaning
 Manufacturer Name: Kafko International. Ltd.
 Address: 3555 W Howard St. Skokie, IL. 60076-4012
 Phone: (847) 763-0333 Fax: (847) 763-0334
 Emergency Contact: Chemtrec (800) 424-9300

SECTION 2 - HAZARDS IDENTIFICATION

GHS Classification:

| Health | Environmental | Physical |
|--|--------------------------------|---------------|
| Acute Toxicity – Not considered an oral, dermal, or inhalation toxin | Non-toxic to Aquatic Organisms | Non Flammable |
| Eye - Eye Irritant Category 2B | | |
| Skin Corrosion – Skin Irritant Category 2 | | |
| Skin Sensitization – Not considered a skin sensitizer | | |
| Mutagenicity – Not considered a mutagenic compound | | |
| Carcinogenicity – Not considered a carcinogen | | |
| Target Organ Toxicity – Single Exposure: Not considered a TOS toxin - Repeated Exposure: Not considered a TOS toxin | | |

Labelling:  WARNING: Causes Eye/Skin Irritation

Precautionary Statement: Wash skin / eyes thoroughly after contact. Wear protective glasses/gloves. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. If on skin: Wash with plenty of water. If skin irritation occurs: Get medical attention/advice. Take off contaminated clothing and wash before reuse.

SECTION 3 - INGREDIENTS

| MATERIAL | CAS # | % by WT. |
|------------------------------------|------------|----------|
| Sodium metasilicate - pentahydrate | 6834-92-0 | < 5% |
| 2 Butoxyethanol | 111-76-2 | < 5 % |
| Linear Alcohol Ethoxylate | 68439-46-3 | < 5 % |

SECTION 4 – FIRST AID MEASURES

Skin Contact: Remove contaminated clothing. Rinse skin with warm water for 15 minutes. If irritation occurs seek medical attention.
 Eye Contact: Flush with water for 15 minutes. If irritation persists seek medical attention.
 Ingestion: Drink large quantities of water. Call physician immediately.
 Inhalation: Remove to fresh air immediately. If irritation persists, contact physician

SECTION 5 - FIRE FIGHTING MEASURES

Flammability of the product: Non Flammable
 Flash Point: None
 Extinguishing Media: Dry Chemical, Water Fog, Co2, Sand
 Fire Fighting Procedures: Wear Self Contained Breathing Apparatus
 Products of combustion: Carbon oxides
 Fire Hazards in the presence of other chemicals: No specific information is available
 Unusual Fire Hazards: None Expected

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Small Spill: Absorb with industrial absorbent. Dispose of in accordance with local, state & federal regulations. Rinse residue to avoid slippery conditions.
 Large Spill: Non-flammable material. Wear chemical resistant gloves, boots and goggles. Stop the source of the spill. Collect the spill using mechanical means. Waste disposal method: Fully water-soluble. Follow all local, state and federal regulations.

SECTION 7 – HANDLING & STORAGE

Precautions: Store containers upright in cool dry place
 Storage: Store product in original containers. Do not store in metal vessels
 Other precautions: Keep out of reach of children

SECTION 8 – EXPOSURE CONTRIOLS & PERSONAL PROTECTION

| Chemical name | type | Exposure Limit Values | Source |
|-----------------|------|-----------------------|---|
| 2-butoxyethanol | TWA | 20 ppm | US. ACGIH Threshold Limit Values (01 2010) |
| | PEL | 50 ppm 240 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |

Engineering Controls: No control measures are required under normal conditions. If large quantities are involved use NIOSH or MSHA approved respirator. Limited personal exposures exist with this product. As always keep airborne vapors below TLV limits. Ensure that proper work-station safety mechanisms are operative and tested including showers and eyewash stations.

Personal Protection Equipment: Safety glasses are recommended, chemical resistant gloves aprons and suits are optional for those with dermatological sensitivity.

SECTION 9 - PHYSICAL DATA

Boiling point: 200° F
 Voc content: .42 LBS/GAL
 Vapor pressure: 4.0 mm Hg @ 77 F (ASTM D-2879)
 Solubility in water: COMPLETE
 Appearance and odor: Clear Solution With A Characteristic Odor
 Specific gravity: 1.038 (ASTM 112H @ 20° C)
 Evaporation rate: 1.2 (water=1.0)
 pH: 12.4

SECTION 10 – STABILITY & REACTIVITY DATA

Conditions To Avoid: Extreme Heat
 Stability: Stable
 Incompatibility: Acids, Strong Oxidizers
 Hazardous Polymerization: Will Not Occur
 Corrosivity: Non-corrosive

SECTION 11 - TOXICOLOGICAL DATA

Signs and Symptoms of Overexposure: Redness of eyes or skin due to contact with product, unusual headache.
 Acute Effects: Eye Contact: may cause redness & irritation Skin Contact: may cause redness & irritation

| Acute Toxicity Values | | |
|-----------------------------------|---|------------------------|
| Test | Results | Basis |
| Oral Toxicity (Rats) | Greater than 5000mg/kg | FHSA/CPSC |
| Dermal Toxicity (Rabbits) | Greater than 2000mg/kg | OECD 402 |
| Inhalation Toxicity, Vapor (Rats) | Greater than 2.3mg/L @ 4 hours ATE > 20.0 mg/L | OECD 403 Additivity |
| Eye Irritation (Rabbits) | Eye Irritant Category 2B | FHSA/CPSC |
| Dermal Irritation (Rabbits) | Mild Skin Irritant | OECD 404 |

This product is not considered a carcinogen by OSHA, NTP, or IARC.

SECTION 12 - Ecological Information

Persistence and degradability: This product is expected to be inherently biodegradable.
 Bio-accumulative potential: There is no evidence to suggest bioaccumulation will occur.
 Mobility: Accidental spillage may lead to penetration in the soil and groundwater. However, there is no evidence that this would cause adverse ecological effects.

| Test | Results | Comments |
|----------------|---|-------------------|
| Acute Toxicity | Non-toxic to Aquatic Organisms Fathead Minnow (Pimephales promelas) LC50 > 200mg/L at 96 hours | Product Test Data |

SECTION 13 – DISPOSAL CONSIDERATIONS

Waste Disposal: Dispose of in accordance with local, state & federal regulations.
 Rinse residue to avoid slippery conditions.

SECTION 14 – TRANSPORT INFORMATION

Not regulated

SECTION 15 – REGULATORY INFORMATION

All components used in this compound appear on the TSCA Inventory
 Federal/National: 2 Butoxyethanol - This chemical is subject to S.A.R.A. Title III section 313 part 372 reporting. The hazard communication standard requires that mixtures such as this product be assumed to present the same health hazards, as do the components that constitute at least 1% of the mixture. OSHA has, however, noted that the health hazards of the individual components may be reduced or altered by including them in a mixture.

Food Facility Categories: Per federal guidelines as detailed in FDA 21 CFR:
 (A1) General Purpose Cleaners (A4) Floor & Wall Degreasers (A8) Degreasers/Carbon Removers

SECTION 16 – OTHER INFORMATION

Performance Certifications: Aircraft: Passed Boeing D6-17487 Rev P Exterior and General Cleaners and Liquid Waxes, Polishes and Polishing Compounds when diluted with 5 parts water.
 For further questions regarding the safe use of this product consult our web page www.oileater.com. The Information Herein Is Based On Data Considered To Be Accurate As Of The Date Of The Presentation Of This Safety Data Sheet. No Warranty Or Representation, Expressed Or Implied, Is Made As To The Accuracy Or Completeness Of The Foregoing Data And Safety Information. The User Assumes All Liability For Any Damage Or Injury Resulting From Abnormal Uses, For Any Failure To Adhere To Recommended Practices, Or For Any Hazards Inherent In The Nature Of The Product.



Revision Number: 006.0

Issue date: 03/23/2018

1. PRODUCT AND COMPANY IDENTIFICATION

| | | | |
|-------------------------------|--|---------------------|---------------|
| Product name: | LOCTITE LB 8008 C5-A known as C5-A® Copper Based Anti-Seize | IDH number: | 234292 |
| Product type: | Lubricant | Item number: | 51277 |
| Restriction of Use: | None identified | Region: | United States |
| Company address: | Contact information: | | |
| Henkel Corporation | Telephone: +1 (860) 571-5100 | | |
| One Henkel Way | MEDICAL EMERGENCY Phone: Poison Control Center | | |
| Rocky Hill, Connecticut 06067 | 1-877-671-4608 (toll free) or 1-303-592-1711 | | |
| | TRANSPORT EMERGENCY Phone: CHEMTREC | | |
| | 1-800-424-9300 (toll free) or 1-703-527-3887 | | |
| | Internet: www.henkelna.com | | |

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

DANGER: CAUSES SKIN IRRITATION.
CAUSES SERIOUS EYE DAMAGE.

HAZARD CLASS

HAZARD CATEGORY

| | |
|--------------------|---|
| SKIN IRRITATION | 2 |
| SERIOUS EYE DAMAGE | 1 |

PICTOGRAM(S)



Precautionary Statements

Prevention: Wash affected area thoroughly after handling. Wear protective gloves, eye protection, and face protection.

Response: IF ON SKIN: Wash with plenty of water. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation occurs: Get medical attention. Take off contaminated clothing.

Storage: Not prescribed

Disposal: Not prescribed

Classification complies with OSHA Hazard Communication Standard (29 CFR 1910.1200) and is consistent with the provisions of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

| Hazardous Component(s) | CAS Number | Percentage* |
|--|------------|-------------|
| Calcium dihydroxide | 1305-62-0 | 10 - 20 |
| Distillates (petroleum), hydrotreated heavy naphthenic | 64742-52-5 | 10 - 20 |

| | | |
|---|------------|---------|
| Petroleum distillates, hydrotreated, light naphthenic | 64742-53-6 | 10 - 20 |
| Copper | 7440-50-8 | 10 - 20 |
| Graphite | 7782-42-5 | 5 - 10 |
| Quartz (SiO ₂) | 14808-60-7 | 0.1 - 1 |

* Exact percentages may vary or are trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

| | |
|----------------------|---|
| Inhalation: | Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. If symptoms develop and persist, get medical attention. |
| Skin contact: | Wash with soap and water. If symptoms develop and persist, get medical attention. |
| Eye contact: | Immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention. |
| Ingestion: | Do not induce vomiting. Get medical attention. |
| Symptoms: | See Section 11. |

5. FIRE FIGHTING MEASURES

| | |
|---|--|
| Extinguishing media: | Water spray (fog), foam, dry chemical or carbon dioxide. |
| Special firefighting procedures: | None |
| Unusual fire or explosion hazards: | None |
| Hazardous combustion products: | Oxides of carbon. |

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

| | |
|-----------------------------------|--|
| Environmental precautions: | Do not allow material to contaminate ground water system. |
| Clean-up methods: | Scrape up as much material as possible. Clean residue with soap and water. |

7. HANDLING AND STORAGE

| | |
|------------------|--|
| Handling: | Use only with adequate ventilation. Avoid contact with eyes, skin and clothing. Keep container closed. Wash thoroughly after handling. |
| Storage: | Keep in a cool, well ventilated area. |

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

| Hazardous Component(s) | ACGIH TLV | OSHA PEL | AIHA WEEL | OTHER |
|--|---|---|-----------|-------|
| Calcium dihydroxide | 5 mg/m3 TWA | 5 mg/m3 PEL Respirable fraction. 15 mg/m3 PEL Total dust. | None | None |
| Distillates (petroleum), hydrotreated heavy naphthenic | 5 mg/m3 TWA Inhalable fraction. | 5 mg/m3 TWA mist 500 ppm (2,000 mg/m3) PEL 5 mg/m3 PEL Mist. | None | None |
| Petroleum distillates, hydrotreated, light naphthenic | 5 mg/m3 TWA Inhalable fraction. | 500 ppm (2,000 mg/m3) PEL 5 mg/m3 PEL Mist. | None | None |
| Copper | 0.2 mg/m3 TWA (as Cu) Fume. 1 mg/m3 TWA (as Cu) Dust and mist. | 1 mg/m3 PEL (as Cu) Dust and mist. 0.1 mg/m3 PEL (as Cu) Fume. | None | None |
| Graphite | 2 mg/m3 TWA Respirable fraction. | 5 mg/m3 PEL Respirable fraction. 15 mg/m3 PEL Total dust. 15 MPPCF TWA | None | None |
| Quartz (SiO ₂) | 0.025 mg/m3 TWA Respirable fraction. | 2.4 MPPCF TWA Respirable. 0.1 mg/m3 TWA Respirable. 0.05 mg/m3 TWA (Respirable dust.) (Respirable dust.) 0.025 mg/m3 OSHA_ACT (Respirable dust.) 0.05 mg/m3 PEL Respirable dust. | None | None |

Engineering controls:

Use local ventilation if general ventilation is insufficient to maintain vapor concentration below established exposure limits.

Respiratory protection:

Use NIOSH approved respirator if there is potential to exceed exposure limit(s). Observe OSHA regulations for respirator use (29 CFR 1910.134).

Eye/face protection:

Safety goggles or safety glasses with side shields. Full face protection should be used if the potential for splashing or spraying of product exists.

Skin protection:

Use impermeable gloves and protective clothing as necessary to prevent skin contact.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|------------------------------|----------------------|
| Physical state: | Paste |
| Color: | Copper |
| Odor: | Mild |
| Odor threshold: | Not available. |
| pH: | Not applicable |
| Vapor pressure: | < 5.0 mm hg |
| Boiling point/range: | > 260 °C (> 500°F) |
| Melting point/ range: | Not available. |
| Specific gravity: | 1.30 |
| Vapor density: | Heavier than air. |
| Flash point: | > 93 °C (> 199.4 °F) |

| | |
|---|--------------------|
| Flammable/Explosive limits - lower: | Not determined |
| Flammable/Explosive limits - upper: | Not determined |
| Autoignition temperature: | Not determined |
| Flammability: | Not applicable |
| Evaporation rate: | Slower than ether. |
| Solubility in water: | Insoluble |
| Partition coefficient (n-octanol/water): | Not determined |
| VOC content: | < 3 % Estimated |
| Viscosity: | Not available. |
| Decomposition temperature: | Not available. |

10. STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable at normal conditions. |
| Hazardous reactions: | Will not occur. |
| Hazardous decomposition products: | Hydrocarbons. Oxides of carbon. |
| Incompatible materials: | Strong acids and strong bases. Oxidizing agents. |
| Reactivity: | Not available. |
| Conditions to avoid: | Prolonged exposure to heat. |

11. TOXICOLOGICAL INFORMATION

| | |
|-------------------------------------|-----------------------------------|
| Relevant routes of exposure: | Skin, Inhalation, Eyes, Ingestion |
|-------------------------------------|-----------------------------------|

Potential Health Effects/Symptoms

Inhalation: Inhalation of copper fumes may result in metal fume fever. Symptoms include metallic taste, discoloration of skin or hair. May cause respiratory tract irritation. Contains crystalline silica (quartz), which is classified as a possible carcinogen. However, the crystalline silica present in this product is encapsulated in the liquid and will only be liberated if the product is sanded or abraded, and even then what is liberated will not be pure crystalline silica. Appropriate precautions, however, should be taken if the product is sanded or abraded to prevent personnel from breathing the dust.

Skin contact: Causes skin irritation.

Eye contact: Causes serious eye damage.

Ingestion: May cause gastrointestinal tract irritation if swallowed.

| Hazardous Component(s) | LD50s and LC50s | Immediate and Delayed Health Effects |
|--|-------------------------------|--|
| Calcium dihydroxide | Oral LD50 (Rat) = 7,340 mg/kg | Irritant, Corrosive |
| Distillates (petroleum), hydrotreated heavy naphthenic | None | Irritant |
| Petroleum distillates, hydrotreated, light naphthenic | None | Irritant |
| Copper | None | Allergen, Blood, Central nervous system, Developmental, Gastrointestinal, Immune system, Irritant, Kidney, Liver, Mutagen, Sensory, Skin |
| Graphite | None | Lung |
| Quartz (SiO2) | None | Immune system, Lung, Some evidence of carcinogenicity |

| Hazardous Component(s) | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen (Specifically Regulated) |
|--|-------------------------------|-----------------|--|
| Calcium dihydroxide | No | No | No |
| Distillates (petroleum), hydrotreated heavy naphthenic | No | No | No |
| Petroleum distillates, hydrotreated, light naphthenic | No | No | No |
| Copper | No | No | No |
| Graphite | No | No | No |
| Quartz (SiO2) | Known To Be Human Carcinogen. | Group 1 | Yes |

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Follow all local, state, federal and provincial regulations for disposal.
Hazardous waste number: Not a RCRA hazardous waste.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any package/configuration.

U.S. Department of Transportation Ground (49 CFR)

Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Copper)
Hazard class or division: 9
Identification number: UN 3082
Packing group: III
Marine pollutant: Copper
DOT Hazardous Substance(s): Copper

International Air Transportation (ICAO/IATA)

Proper shipping name: Environmentally hazardous substance, liquid, n.o.s.
Hazard class or division: 9
Identification number: UN 3082
Packing group: III

Water Transportation (IMO/IMDG)

Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (Copper)
Hazard class or division: 9
Identification number: UN 3082
Packing group: III
Marine pollutant: Copper

15. REGULATORY INFORMATION

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory.
TSCA 12 (b) Export Notification: None above reporting de minimis
CERCLA/SARA Section 302 EHS: None above reporting de minimis.
CERCLA/SARA Section 311/312: Immediate Health, Delayed Health
CERCLA/SARA Section 313: This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act of 1986 (40 CFR 372). Copper (CAS# 7440-50-8).
CERCLA Reportable quantity: Copper (CAS# 7440-50-8) 5,000 lbs. (2,270 kg)
California Proposition 65: This product contains a chemical known in the State of California to cause cancer.

Canada Regulatory Information

CEPA DSL/NDL Status: All components are listed on or are exempt from listing on the Canadian Domestic Substances List.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: 2, 8, 11

Prepared by: Product Safety and Regulatory Affairs

Issue date: 03/23/2018

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.

Safety Data Sheet

Printing date 02/04/2016


Revised On 01/15/2016

1 Identification of the substance and manufacturer

Trade name: STRIPE INVERTED TIP CLEAR
Product code: 0000200631
Product category: PC9a Paints and coatings.
Manufacturer/Supplier: Seymour of Sycamore
 917 Crosby Avenue
 Sycamore, IL 60178
 Phone: 815-895-9101 www.seymourpaint.com
Emergency telephone number: CHEMTEL 1-800-255-3924, or 813-248-0585.

2 Hazard(s) identification**Classification of the substance or mixture**

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 Eye Irrit. 2A H319 Causes serious eye irritation.
 Carc. 1B H350 May cause cancer.
 STOT SE 3 H336 May cause drowsiness or dizziness.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

GHS Hazard pictograms

GHS02 GHS04 GHS07 GHS08

Signal word**Hazard statements**

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 Causes serious eye irritation.
 May cause cancer.

Precautionary statements

May cause drowsiness or dizziness.
 May cause damage to organs through prolonged or repeated exposure.
 Obtain special instructions before use.
 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
 Do not spray on an open flame or other ignition source.
 Do not pierce or burn, even after use.
 Wash hands thoroughly after handling.
 Use only outdoors or in a well-ventilated area.
 Wear protective gloves/protective clothing/eye protection/face protection.
 Do not handle until all safety precautions have been read and understood.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 Call a POISON CENTER/doctor if you feel unwell.
 If eye irritation persists: Get medical advice/attention.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Protect from sunlight. Store in a well-ventilated place.
 Store in a well-ventilated place. Keep container tightly closed.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients**Chemical characterization: Mixtures**

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|-------------------|--------|
| 67-64-1 | Acetone | 17.89% |
| 1317-65-3 | Calcium Carbonate | 15.19% |
| 74-98-6 | propane | 13.86% |
| 64742-47-8 | Mineral Spirits | 10.57% |
| 106-97-8 | n-butane | 8.14% |
| 64742-89-8 | VM&P Naphtha | 8.0% |
| 111-76-2 | Glycol Ether EB | 5.25% |
| 1330-20-7 | xylene (mix) | 2.53% |
| 8052-41-3 | Stoddard Solvent | 0.11% |

4 First-aid measures

After inhalation: Supply fresh air; consult doctor in case of complaints.
After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor.
After swallowing: Rinse out mouth and then drink plenty of water.
 Rinse mouth with water. Do not induce vomiting.
Most important symptoms and effects: Dizziness
Indication of any immediate medical attention needed: No further relevant information available.

(Contd. on page 2)

Safety Data Sheet

Printing date 02/04/2016

Revised On 01/15/2016

Trade name: STRIPE INVERTED TIP CLEAR

(Contd. of page 1)

5 Fire-fighting measures

Extinguishing agents: CO₂, extinguishing powder or water spray. Fight larger fires with water spray.
Special hazards: Can form explosive gas-air mixtures.
Protective equipment for firefighters: A respiratory protective device may be necessary.

6 Accidental release measures

Personal precautions, protective equipment and emergency procedures: Wear protective equipment. Keep unprotected persons away.
Use respiratory protective device against the effects of fumes/dust/aerosol.
Methods and material for containment and cleaning up: Ensure adequate ventilation.

7 Handling and storage

Precautions for safe handling Use only in well ventilated areas.
Storage requirements: Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up.

8 Exposure controls/personal protection**Components with limit values that require monitoring at the workplace:****67-64-1 Acetone**

PEL (USA) Long-term value: 2400 mg/m³, 1000 ppm
REL (USA) Long-term value: 590 mg/m³, 250 ppm
TLV (USA) Short-term value: 1187 mg/m³, 500 ppm
Long-term value: 594 mg/m³, 250 ppm
BEI

74-98-6 propane

PEL (USA) Long-term value: 1800 mg/m³, 1000 ppm
REL (USA) Long-term value: 1800 mg/m³, 1000 ppm
TLV (USA) refer to Appendix F in TLVs and BEIs book

106-97-8 n-butane

REL (USA) Long-term value: 1900 mg/m³, 800 ppm
TLV (USA) Short-term value: 2370 mg/m³, 1000 ppm

111-76-2 Glycol Ether EB

PEL (USA) Long-term value: 240 mg/m³, 50 ppm
Skin
REL (USA) Long-term value: 24 mg/m³, 5 ppm
Skin
TLV (USA) Long-term value: 97 mg/m³, 20 ppm
BEI

1330-20-7 xylene (mix)

PEL (USA) Long-term value: 435 mg/m³, 100 ppm
REL (USA) Short-term value: 655 mg/m³, 150 ppm
Long-term value: 435 mg/m³, 100 ppm
TLV (USA) Short-term value: 651 mg/m³, 150 ppm
Long-term value: 434 mg/m³, 100 ppm
BEI

8052-41-3 Stoddard Solvent

PEL (USA) Long-term value: 2900 mg/m³, 500 ppm
REL (USA) Long-term value: 350 mg/m³
Ceiling limit value: 1800* mg/m³
*15-min
TLV (USA) Long-term value: 525 mg/m³, 100 ppm

Ingredients with biological limit values:**67-64-1 Acetone**

BEI (USA) 50 mg/L
Medium: urine
Time: end of shift
Parameter: Acetone (nonspecific)

111-76-2 Glycol Ether EB

BEI (USA) 200 mg/g creatinine
Medium: urine
Time: end of shift
Parameter: Butoxyacetic acid with hydrolysis

1330-20-7 xylene (mix)

BEI (USA) 1.5 g/g creatinine
Medium: urine
Time: end of shift
Parameter: Methylhippuric acids

Hygienic protection: Keep away from foodstuffs and animal feed. Wash hands after use.
Immediately remove all soiled and contaminated clothing.

(Contd. on page 3) 158

Safety Data Sheet

Printing date 02/04/2016

Revised On 01/15/2016

Trade name: STRIPE INVERTED TIP CLEAR

(Contd. of page 2)

| | |
|-----------------------------|---|
| Breathing equipment: | Wash hands after use. Avoid contact with the eyes and skin. Do not eat or drink while working. A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene. |
| Hand protection: | Nitrile gloves. Protective gloves. The glove material must be impermeable and resistant to the substance. |
| Eye protection: | Tightly sealed goggles |

9 Physical and chemical properties

| | |
|--|--|
| Appearance: | Aerosol. |
| Odor: | Aromatic |
| Odor threshold: | Not determined. |
| pH-value: | Not determined. |
| Melting point/Melting range | Undetermined. |
| Boiling point: | -110 °C (-166 °F) |
| Flash point: | -19 °C (-2 °F) |
| Flammability (solid, gas): | Extremely flammable. |
| Decomposition temperature: | Not determined. |
| Auto igniting: | Product is not self-igniting. |
| Danger of explosion: | In use, may form flammable/explosive vapour-air mixture. |
| Lower Explosion Limit: | 0.5 Vol % |
| Upper Explosion Limit: | 10.9 Vol % |
| Vapor pressure: | Not determined. |
| Relative Density: | Between 0.77 and 0.85 (Water equals 1.00) |
| Vapour density | Not determined. |
| Evaporation rate | Not applicable. |
| Partition coefficient: n-octonal/water: | Not determined. |
| Solubility: | Not determined. |
| Viscosity: | Not determined. |
| VOC content: | 395.8 g/l / 3.30 lb/gl |
| VOC content (less exempt solvents): | 49.2 % |
| MIR Value: | 1.03 |
| Solids content: | 32.9 % |

10 Stability and reactivity

| | |
|--|--|
| Reactivity: | Stable at normal temperatures. |
| Conditions to avoid: | Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures. |
| Chemical stability: | Not fully evaluated. |
| Possibility of hazardous reactions: | No dangerous reactions known. |
| Incompatible materials: | No further relevant information available. |
| Hazardous decomposition: | No dangerous decomposition products known. |

11 Toxicological information

LD/LC50 values that are relevant for classification:

106-97-8 n-butane

Inhalative LC50/4 h 658 mg/l (rat)

111-76-2 Glycol Ether EB

Oral LD50 1480 mg/kg (rat)

Dermal LD50 400 mg/kg (rab)

1330-20-7 xylene (mix)

Oral LD50 8700 mg/kg (rat)

Dermal LD50 2000 mg/kg (rbt)

Inhalative LC50/4 h 6350 mg/l (rat)

Information on toxicological effects: No data available.**Skin effects:** No irritant effect.**Eye effects:** Irritating effect.**Sensitization:** No sensitizing effects known.

Carcinogenic categories

IARC (International Agency for Research on Cancer)

111-76-2 Glycol Ether EB 3

1330-20-7 xylene (mix) 3

NTP (National Toxicology Program)

None of the ingredients is listed.

12 Ecological information

Aquatic toxicity: Hazardous for water, do not empty into drains.

(Contd. on page 4)

Safety Data Sheet

Printing date 02/04/2016

Revised On 01/15/2016

Trade name: STRIPE INVERTED TIP CLEAR

(Contd. of page 3)

Persistence and degradability: The product is degradable after prolonged exposure to natural weathering processes.
Bioaccumulative potential: No further relevant information available.
Mobility in soil: No further relevant information available.
Other adverse effects: No further relevant information available.

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.

Recommendation: Completely empty cans should be recycled.

14 Transport information

UN-Number UN1950
DOT N/A
DOT UN1950
DOT Consumer Commodity ORM-D
ADR Aerosols, flammable
Transport hazard class(es): 1950 Aerosols
Class 2.1
Marine pollutant: No
Special precautions for user: Warning: Gases
EMS Number: F-D,S-U
Packaging Group: --
UN "Model Regulation": UN1950, Aerosols, 2.1

15 Regulatory information**SARA Section 355 (extremely hazardous substances):**

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

111-76-2 Glycol Ether EB

1330-20-7 xylene (mix)

CPSC: This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.

California Proposition 65 chemicals known to cause cancer:

100-41-4 ethyl benzene

CANADIAN ENVIRONMENTAL PROTECTION ACT:**WHMIS Symbols for Canada:**

All hazardous ingredients for this product appear on the Canadian Domestic Substance List.
 A - Compressed gas
 D2B - Toxic material causing other toxic effects

**EPA:**

| | | |
|-----------|-----------------|----|
| 67-64-1 | Acetone | I |
| 111-76-2 | Glycol Ether EB | NL |
| 1330-20-7 | xylene (mix) | I |

16 Other information

Contact: Regulatory Affairs
Date of preparation / last revision 02/04/2016 / -



MATERIAL SAFETY DATA SHEET

HI-POINT® 90

Version: 1.8
Date of Issue: 02/27/2007
Date printed: 03/01/2007

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : HI-POINT® 90

Chemical name: Methyl ethyl ketone peroxides

Use of substance/preparation: Initiator ("catalyst") for curing polyester resin formulatons.

Supplier: Chemtura USA Corporation
Chemtura Corporation (Worldwide HQ)
199 Benson Road
Middlebury, CT 06749 USA

Emergency telephone number: CHEMTREC (24 hours) 800-424-9300
Chemtura Corporation Emergency Response (24 hours) 800-292-5898
For additional emergency telephone numbers see section 16 of the Safety Data Sheet.

Environmental, Health and Safety Department: 866-430-2775

Customer Service: 877-948-2660

2. COMPOSITION / INFORMATION ON INGREDIENTS

| <u>INGREDIENT</u> | <u>% BY WEIGHT</u> |
|--|--------------------|
| Methyl ethyl ketone peroxide CAS# 1338-23-4 | 36 - 40 |
| (% Active Oxygen) CAS# - | <= 9 |
| Dimethyl phthalate CAS# 131-11-3 | 58 - 66 |
| Methyl ethyl ketone CAS# 78-93-3 | 0.1 - 1 |
| Hydrogen peroxide 35% CAS# 7722-84-1 | 0.1 - 1.5 |

3. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW **WARNING!**

MAY BE HARMFUL OR FATAL IF SWALLOWED.
MAY CAUSE ALLERGIC SKIN REACTION.



HI-POINT® 90

Version: 1.8

Date of Issue: 02/27/2007

Date printed: 03/01/2007

MAY BE IRRITATING OR CORROSIVE TO THE SKIN AND/OR EYES.
COMBUSTIBLE LIQUID
OXIDIZING MATERIAL

4. FIRST AID MEASURES

Swallowing

Obtain medical attention. If patient is fully conscious, rinse mouth with water. Give water to drink. Drink water in small sips. (Diluting effect) Never give anything by mouth to an unconscious person. Vomiting may cause aspiration into the lungs resulting in chemical pneumonia.

Inhalation

Remove to fresh air. If exposure is severe, hospitalize and observe. If breathing has stopped, give artificial respiration.

Skin contact

Remove contaminated clothing. Wash skin with soap and water. If irritation persists or if contact has been prolonged, obtain medical attention.

Eye contact

Immediately flush eyes with water and continue washing for at least 15 minutes. Obtain medical attention immediately. May cause blindness.

Notes to physician

ROUTES OF ENTRY: Eyes, skin, ingestion, inhalation, mist.

TARGET ORGANS: Eyes, skin, respiratory system.

5. FIRE-FIGHTING MEASURES

Flash point: 176 °F 80 °C
Flammable limits
Lower limit: Not available
Upper limit: Not available
Autoignition temperature: Not available

NFPA CLASSIFICATION

Table with 4 columns: Health: 3, Flammability: 2, Reactivity: 2, Special provisions:

Hazardous combustion products

Carbon monoxide.
Carbon dioxide.
Hydrocarbons.

Special fire fighting procedures

Evacuate all personnel from danger area.
Use water spray to cool fire-exposed containers and structures.

Special protective equipment for firefighters

Body covering protective clothing.
Self-contained breathing apparatus.

Extinguishing media

Suitable: - water fog
- foam
- CO2
- dry chemical
- dry sand

Unusual fire and explosion hazards

Other harmful gases and vapors may be formed in addition to the major combustion products of carbon dioxide and carbon monoxide. There is a potential for an explosive decomposition in a fire situation. Once ignited, this product will burn vigorously and with acceleration.



HI-POINT® 90

Version: 1.8
Date of Issue: 02/27/2007
Date printed: 03/01/2007

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Avoid contact with eyes and skin., Avoid contact with liquid and vapors., Provide sufficient ventilation.

Environmental precautions

Avoid runoff to sewers or waterways., This product has limited solubility in water.

Methods for cleaning up

Stop the leak if it can be done without risk.
Dike to contain spill.
Absorb on inert material such as sand, earth, vermiculite.
Cover by foam or wet with small quantities of water.
Sweep up using non-sparking equipment.
Collect in a suitable container for disposal.
Storage material: Polypropylene, polyethylene
Dispose of waste material in compliance with all federal, state, and local regulations.

7. HANDLING AND STORAGE

HANDLING

Handling precautions

Keep containers tightly closed to prevent contamination., Avoid contact with eyes, skin and clothing., Do not eat, drink or smoke when handling., Wear recommended personal protection equipment., Remove contaminated clothing and wash before reuse., Use spark-proof tools and explosion-proof equipment.

Other precautions

Store containers in a well-ventilated area. Open them cautiously, in case they may be under slight pressure. Have good ventilation and suitable protective equipment in areas where containers will be opened., Keep away from heat, sparks and flame., Do not expose to direct sunlight.

STORAGE

Storage requirements

Regulated as an Organic Peroxide, Class 5.2, for storage and handling., Store in original containers away from incompatible materials, direct sunlight, flames, and all sources of heat.

Further information on storage

Maximum Storage Temperature: 38 °C (100 °F). In order to maintain the product's original manufactured assay in long term storage, a lower storage temperature of below 30 °C (86 °F) is strongly recommended., Shelf Life: (Calculated from half-life data in benzene solution) Estimate > 48 months at which 95% of the original manufactured assay remains when stored at or below 30 °C (86 °F).

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

EXPOSURE LIMIT VALUES

Table with 5 columns: Component, Country, Type, Value, Remark. Rows include Methyl ethyl ketone peroxide, Dimethyl phthalate, and Methyl ethyl ketone with various exposure limits and remarks.



MATERIAL SAFETY DATA SHEET

HI-POINT® 90

Version: 1.8
 Date of Issue: 02/27/2007
 Date printed: 03/01/2007

| | | | | |
|-----------------------|--|------------|----------------|--|
| Hydrogen peroxide 35% | | TWA, ACGIH | 1 ppm 1 ppm | |
|-----------------------|--|------------|----------------|--|

No other exposure limits have been established

PERSONAL PROTECTION

Respiratory protection

In the absence of engineering controls sufficient to maintain airborne concentrations below recommended occupational exposure limit values, appropriate respiratory protection should be utilized., Supplied air respirator equipped with a full facepiece should be used during any operation where there is potential for release of this product to workplace air.

Hand protection / protective gloves

Neoprene type gloves.

Eye protection

Wear suitable eye protection., Faceshield, Safety goggles., Contact lenses should not be worn.

Skin protection

Wear protective clothing., Apron/boots of neoprene if risk of splashing

ENGINEERING CONTROLS

Ventilation

General (mechanical) room ventilation is expected to be satisfactory.

9. PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE

Physical state Liquid
 Color Colorless to light yellow

OTHER PROPERTIES

Specific gravity (H2O=1) 1.007 at 20 °C
 Flash point 176 °F
 80 °C
 Method: Setaflash closed cup ASTM D 3828
 Autoignition temperature Not available
 Upper explosion limits Not available
 Lower explosion limits Not available
 Percent volatiles < 3.0 %(m)
 Kinematic viscosity 15 cSt at 25 °C

10. STABILITY AND REACTIVITY

Stability: This product is stable only when stored at, or below, the recommended maximum temperature., (see section 7)

SADT:

Value: 70 °C
Remark: 40# Package

Stability - Conditions to avoid:

Contamination with ANY foreign substance,
Exposure to heat.



HI-POINT® 90

Version: 1.8
Date of Issue: 02/27/2007
Date printed: 03/01/2007

Protect from direct sunlight.

Incompatible materials:

Promoters
Accelerators
Reducing agents.
Strong acids.
Other reactive chemicals

Hazardous combustion products:

Carbon monoxide.
Carbon dioxide.
Hydrocarbons.

Hazardous polymerization: Will not occur.

II. TOXICOLOGICAL INFORMATION

SWALLOWING

Acute effects
Harmful or fatal if swallowed.

Test results

Acute toxicity: Test substance: 9% AO MEKP
LD50 Rat
Result: 1,017 mg/kg

SKIN ABSORPTION

Acute effects
May cause eye and skin irritation.

Test results

Acute toxicity: Test substance: 9% AO MEKP
LD50 - Rabbit
Result: 4,000 mg/kg

INHALATION

Acute effects
May be harmful by inhalation.

Test results

Acute toxicity: Test substance: 9% AO MEKP
LC50 - Mouse
Result: 17 mg/l
Exposure time: 4 h

SKIN CONTACT

Acute effects
May cause allergic skin reaction.

Test results

Skin irritation: Species: Rabbit
Result: No data available.

EYE CONTACT

Acute effects
May cause chemical burns of the eye.

Test results

Eye irritation: Species: Rabbit
Result: Corrosive.



MATERIAL SAFETY DATA SHEET

HI-POINT® 90

Version: 1.8
Date of Issue: 02/27/2007
Date printed: 03/01/2007

12. ECOLOGICAL INFORMATION

This product is stable in water, and can be mechanically separated from water. The water may be suitable for disposal in a biological waste water treatment plant.

13. DISPOSAL CONSIDERATIONS

General: Burn in compliance with operative regulations in a hazardous waste incinerator.

US waste

Dispose of waste material in compliance with all federal, state, and local regulations., Hazardous waste ID number U160 & U102 (MEKP & DMP), see 40CFR261.33(f)

14. TRANSPORT INFORMATION

DOT Classification

Proper shipping name: ORGANIC PEROXIDE TYPE D, LIQUID (METHYL ETHYL KETONE PEROXIDES, =<45%)
Class: 5.2
UN ID #: UN3105
Packing group: II
Technical description: METHYL ETHYL KETONE PEROXIDES, =<45%

IMDG Classification

Proper shipping name: ORGANIC PEROXIDE TYPE D, LIQUID
Class: 5.2
UN ID #: UN 3105
Packing group: II
Technical description: (METHYL ETHYL KETONE PEROXIDES, =<45%)

ICAO Classification

Proper shipping name: ORGANIC PEROXIDE TYPE D, LIQUID
Class: 5.2
UN ID #: UN 3105
Packing group: II
Technical description: (METHYL ETHYL KETONE PEROXIDES, =<45%)

15. REGULATORY INFORMATION

Comprehensive Environmental Response Compensation and Liability Act of 1980 (CERCLA) requires notification of the National Response Center of release of quantities of hazardous substances equal to or greater than the reportable quantities (RQ's) in 40CFR302.4.

Components present in this product at a level which could require reporting under the statute are:

| Chemical name | CAS# | Max weight % |
|------------------------------|-----------|---------------|
| Methyl ethyl ketone peroxide | 1338-23-4 | 36.00 - 40.00 |
| Dimethyl phthalate | 131-11-3 | 58.00 - 66.00 |
| Methyl ethyl ketone | 78-93-3 | 0.10 - 1.00 |

Superfund Amendments and Reauthorization Act of 1986 (SARA) Title III requires emergency planning based on Threshold Planning Quantities (TPQ's) and release reporting based on Reportable Quantities (RQ's) in 40CFR355 (used for SARA 302 and 304).

Components present in this product at a level which could require reporting under the statute are:



MATERIAL SAFETY DATA SHEET

HI-POINT® 90

Version: 1.8
 Date of Issue: 02/27/2007
 Date printed: 03/01/2007

| | | |
|-----------------------|-----------|--------------|
| Chemical name | CAS# | Max weight % |
| Hydrogen peroxide 35% | 7722-84-1 | 0.10 - 1.50 |

Superfund Amendments and Reauthorization Act of 1986 (SARA) Title III requires submission of annual reports of release of toxic chemicals that appear in 40CFR372 (for SARA 313). This information must be included in MSDS's that are copied and distributed for this material.

Components present in this product at a level which could require reporting under the statute are:

| | | |
|------------------------------|-----------|---------------|
| Chemical name | CAS# | Max weight % |
| Methyl ethyl ketone peroxide | 1338-23-4 | 36.00 - 40.00 |
| Dimethyl phthalate | 131-11-3 | 58.00 - 66.00 |

New Jersey Worker and Community Right-To-Know Act (Labeling Requirements)

| | | |
|------------------------------|-----------|----------------------|
| Chemical name | CAS# | New Jersey TS Number |
| Methyl ethyl ketone peroxide | 1338-23-4 | |
| Dimethyl phthalate | 131-11-3 | |
| Methyl ethyl ketone | 78-93-3 | |
| Hydrogen peroxide 35% | 7722-84-1 | |

EPA Hazard Categories (SARA 311, 312): Immediate Health Hazard
 Reactive Hazard

CHEMICAL INVENTORY

Canada: The ingredients of this product are on the DSL.
Europe: The ingredients of this mixture are on the EINECS inventory.
United States: The ingredients of this product are on the TSCA inventory.
Australia: The ingredients of this product are on the AICS inventory.
China: This product is on the IECSC Inventory.
Japan: This product is on the ENCS inventory.
Korea: This product is listed on the Existing Chemicals List (ECL).
Philippines: This product is on the PICCS.

EPA

16. OTHER INFORMATION

RECOMMENDED USES AND RESTRICTIONS: Dust generated from the sanding or finishing of certain types of hardened resins can spontaneously combust if stored or disposed of improperly. Consult your resin manufacturer for proper dust storage and disposal.

FURTHER INFORMATION

MAY BE ON THE INVENTORY LIST BUT NOT NECESSARILY REGISTERED, (Korea, China, New Zealand) CONSULT REGULATORY SPECIALIST.

HMIS RATING

| | | | |
|-----------|-----------------|---------------|------|
| Health: 3 | Flammability: 2 | Reactivity: 2 | PPI: |
|-----------|-----------------|---------------|------|



MATERIAL SAFETY DATA SHEET

HI-POINT® 90

Version: 1.8

Date of Issue: 02/27/2007

Date printed: 03/01/2007

| | |
|----------|---|
| STP | Standard temperature and pressure |
| W/W | 0 (HMIS) |
| 1 (HMIS) | Slight hazard |
| 2 (HMIS) | Moderate hazard |
| 3 (HMIS) | Serious hazard |
| 4 (HMIS) | Severe hazard |
| X (HMIS) | Personal protection rating to be supplied by user depending on use conditions |

Copyright
2007
Chemtura
Corporation

THE OPINIONS EXPRESSED HEREIN ARE THOSE OF QUALIFIED EXPERTS WITHIN CHEMTURA CORPORATION. WE BELIEVE THAT THE INFORMATION CONTAINED HEREIN IS CURRENT AS OF THE DATE OF THIS SAFETY DATA SHEET. SINCE THE USE OF THIS INFORMATION AND OF THESE OPINIONS AND THE CONDITIONS OF USE OF THIS PRODUCT ARE NOT WITHIN THE CONTROL OF CHEMTURA CORPORATION, IT IS THE USER'S OBLIGATION TO DETERMINE THE CONDITIONS OF SAFE USE OF THE PRODUCTS.

1. Identification

| | |
|---|---|
| Product identifier | Oatey Industrial Grade Clear Primer |
| Other means of identification | |
| Product code | 1403E |
| Synonyms | Part Numbers: 30773, 30774, 30775 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | Oatey Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |

| | |
|--|--|
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------|------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 40-60 |
| Acetone | 67-64-1 | 10-25 |
| Cyclohexanone | 108-94-1 | 10-25 |
| Methyl ethyl ketone | 78-93-3 | 10-25 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 50 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 200 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 50 ppm |
| | STEL | 300 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------------------|------|-----------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | | 250 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 590 mg/m3 |
| | | 200 ppm |
| | STEL | 885 mg/m3 |
| | TWA | 300 ppm |
| | | 590 mg/m3 |
| | | 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Face shield is recommended. Wear safety glasses with side shields (or goggles).

| | |
|---------------------------------------|---|
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|---|----------------------------------|
| Physical state | Liquid. |
| Form | Translucent liquid. |
| Color | Clear. |
| Odor | Solvent. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 151 °F (66.11 °C) |
| Flash point | 14.0 - 23.0 °F (-10.0 - -5.0 °C) |
| Evaporation rate | 5.5 - 8 |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1.8 |
| Flammability limit - upper (%) | 11.8 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.9 +/- 0.02 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | < 100 cP |
| Other information | |
| Bulk density | 7.5 lb/gal |
| VOC (Weight %) | 520 g/l SQACMD Method 304 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |

Hazardous decomposition products No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics

Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

Cyclohexanone (CAS 108-94-1) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

| | |
|---|---|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|-----------------------------------|--|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquids, n.o.s. (Methyl ethyl ketone RQ = 24284 LBS, Acetone RQ = 38344 LBS) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions IB2, T7, TP1, TP8, TP28
Packaging exceptions 150
Packaging non bulk 202
Packaging bulk 242

IATA

UN number UN1993
UN proper shipping name Flammable liquid, n.o.s. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3H
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1993
UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards
Marine pollutant No.
EmS F-E, S-E
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

Methyl ethyl ketone (CAS 78-93-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 05-27-2015 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Material name : POWER SOLV 5000 LIQUID 4-1GL

Material number : 00000000000055524

Manufacturer or supplier's details

Company : Zep Inc.

Address : 350 Joe Frank Harris Parkway, SE
Emerson, GA 30137

Telephone : 404-352-1680

Emergency telephone numbers
For SDS Information : Compliance Services 1-877-428-9937

For a Medical Emergency : 877-541-2016 Toll Free - All Calls Recorded

For a Transportation Emergency : CHEMTREC: 800-424-9300 - All Calls Recorded.
In the District of Columbia 202-483-7616

Recommended use of the chemical and restrictions on use

Recommended use : Degreaser

SECTION 2. HAZARDS IDENTIFICATION
Emergency Overview

| | |
|------------|-------------------|
| Appearance | liquid |
| Colour | colourless, clear |
| Odour | characteristic |

GHS Classification

Skin irritation : Category 2
 Eye irritation : Category 2A
 Carcinogenicity : Category 2
 Reproductive toxicity : Category 1B
 Specific target organ toxicity - single exposure : Category 3 (Respiratory system, Central nervous system)
 Specific target organ toxicity - repeated exposure (Inhalation) : Category 2

GHS label elements

Hazard pictograms :



Signal word : Danger

Hazard statements : H315 Causes skin irritation.
H319 Causes serious eye irritation.

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

H335 May cause respiratory irritation.
 H336 May cause drowsiness or dizziness.
 H351 Suspected of causing cancer.
 H360 May damage fertility or the unborn child.
 H373 May cause damage to organs through prolonged or repeated exposure if inhaled.

Precautionary statements

: **Prevention:**

P201 Obtain special instructions before use.
 P202 Do not handle until all safety precautions have been read and understood.
 P260 Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
 P264 Wash skin thoroughly after handling.
 P271 Use only outdoors or in a well-ventilated area.
 P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.

Response:

P302 + P352 IF ON SKIN: Wash with plenty of soap and water.
 P304 + P340 + P312 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
 P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 P308 + P313 IF exposed or concerned: Get medical advice/ attention.
 P332 + P313 If skin irritation occurs: Get medical advice/ attention.
 P337 + P313 If eye irritation persists: Get medical advice/ attention.
 P362 Take off contaminated clothing and wash before reuse.

Storage:

P403 + P233 Store in a well-ventilated place. Keep container tightly closed.

Disposal:

P501 Dispose of contents/container in accordance with local regulation.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Concentration [%] |
|-----------------|----------|-------------------|
| 1-bromopropane | 106-94-5 | >= 90 - <= 100 |
| propan-1-ol | 71-23-8 | >= 1 - < 5 |
| 1,2-epoxybutane | 106-88-7 | >= 1 - < 5 |

The exact percentages of disclosed substances are withheld as trade secrets.

SECTION 4. FIRST AID MEASURES

General advice : Move out of dangerous area.
 Consult a physician.

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

- Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : Consult a physician after significant exposure.
If unconscious, place in recovery position and seek medical advice.
- In case of skin contact : If skin irritation persists, call a physician.
Wash off immediately with plenty of water for at least 15 minutes.
Remove contaminated clothing and shoes.
Wash contaminated clothing before reuse.
- In case of eye contact : Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Remove contact lenses.
Protect unharmed eye.
Keep eye wide open while rinsing.
If eye irritation persists, consult a specialist.
- If swallowed : Keep respiratory tract clear.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
Take victim immediately to hospital.
- Most important symptoms and effects, both acute and delayed : Effects are dependent on exposure (dose, concentration, contact time).
Effects are immediate and delayed.
Chronic effects are delayed and symptoms may not be observed during an exposure.
Symptoms may include irritation, redness, pain, and rash.
Causes serious eye damage.
Causes skin irritation.
Suspected of causing cancer.
Review section 2 of SDS to see all potential hazards.
- Notes to physician : Treat symptomatically. Symptoms may be delayed.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Alcohol-resistant foam
Carbon dioxide (CO₂)
Dry chemical
- Unsuitable extinguishing media : High volume water jet
- Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.
- Hazardous combustion products : Carbon dioxide (CO₂)
Carbon monoxide

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

| | |
|---|---|
| Specific extinguishing methods | : Smoke Bromine compounds : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment. |
| Further information | : Collect contaminated fire extinguishing water separately. This must not be discharged into drains. Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations. For safety reasons in case of fire, cans should be stored separately in closed containments. Use a water spray to cool fully closed containers. |
| Special protective equipment for firefighters | : Wear self-contained breathing apparatus for firefighting if necessary. |

SECTION 6. ACCIDENTAL RELEASE MEASURES

| | |
|---|---|
| Personal precautions, protective equipment and emergency procedures | : Use personal protective equipment. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas. |
| Environmental precautions | : Prevent product from entering drains. Prevent further leakage or spillage if safe to do so. If the product contaminates rivers and lakes or drains inform respective authorities. |
| Methods and materials for containment and cleaning up | : Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13). |

SECTION 7. HANDLING AND STORAGE

| | |
|-------------------------|--|
| Technical measures | : This product has no measured flash point and is non-flammable per OSHA, CPSC, and DOT regulations. However, the vapors of this product will form a flammable mixture in a narrow concentration range of 4.6 % to 8.5 % by volume in air based on n-propyl bromide. Do not weld or cut any drum with a torch that contains this product because residual vapors in the drum could be in the flammable range and an explosion could occur. |
| Advice on safe handling | : Avoid formation of aerosol. Do not breathe vapours/dust. Avoid exposure - obtain special instructions before use. Avoid contact with skin and eyes. For personal protection see section 8. Smoking, eating and drinking should be prohibited in the |

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

application area.

Take precautionary measures against static discharges.

Provide sufficient air exchange and/or exhaust in work rooms.

Open drum carefully as content may be under pressure.

Dispose of rinse water in accordance with local and national regulations.

Conditions for safe storage : No smoking.
 Keep container tightly closed in a dry and well-ventilated place.
 Containers which are opened must be carefully resealed and kept upright to prevent leakage.
 Observe label precautions.
 Electrical installations / working materials must comply with the technological safety standards.

Materials to avoid : Keep away from oxidizing agents and strongly acid or alkaline materials.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION
Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|-----------------|----------|----------------------------------|---|-----------|
| 1-bromopropane | 106-94-5 | TWA | 0.1 ppm | ACGIH |
| | | PEL | 5 ppm 25 mg/m ³ | CAL PEL |
| propan-1-ol | 71-23-8 | TWA | 100 ppm | ACGIH |
| | | TWA | 200 ppm 500 mg/m ³ | NIOSH REL |
| | | ST | 250 ppm 625 mg/m ³ | NIOSH REL |
| | | TWA | 200 ppm 500 mg/m ³ | OSHA Z-1 |
| | | STEL | 250 ppm 625 mg/m ³ | OSHA P0 |
| | | TWA | 200 ppm 500 mg/m ³ | OSHA P0 |
| | | PEL | 200 ppm 500 mg/m ³ | CAL PEL |
| | | STEL | 250 ppm 625 mg/m ³ | CAL PEL |
| 1,2-epoxybutane | 106-88-7 | TWA | 2 ppm | US WEEL |

Engineering measures : effective ventilation in all processing areas

Personal protective equipment

Respiratory protection : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines.

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

| | |
|--------------------------|--|
| Hand protection | |
| Material | : Protective gloves |
| Remarks | : The suitability for a specific workplace should be discussed with the producers of the protective gloves. |
| Eye protection | : Tightly fitting safety goggles Wear face-shield and protective suit for abnormal processing problems. Ensure that eyewash stations and safety showers are close to the workstation location. |
| Skin and body protection | : Impervious clothing Choose body protection according to the amount and concentration of the dangerous substance at the work place. |
| Hygiene measures | : When using do not eat or drink. When using do not smoke. Wash hands before breaks and at the end of workday. |

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|------------------------------|---------------------------|
| Appearance | : liquid |
| Colour | : colourless, clear |
| Odour | : characteristic |
| Odour Threshold | : No data available |
| pH | : No data available |
| Melting point/freezing point | : No data available |
| Boiling point | : 70 °C |
| Flash point | : does not flash |
| Evaporation rate | : > 1 |
| Upper explosion limit | : 8.5 %(V) |
| Lower explosion limit | : 4.6 %(V) |
| Vapour pressure | : 147.72 hPa |
| Relative vapour density | : No data available |
| Density | : 1.316 g/cm ³ |
| Bulk density | : No data available |
| Solubility(ies) | |
| Water solubility | : insoluble |
| Solubility in other solvents | : insoluble |

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

| | |
|--|----------------------------------|
| Partition coefficient: n-octanol/water | : No data available |
| Auto-ignition temperature | : No data available |
| Thermal decomposition | : No data available |
| Viscosity | |
| Viscosity, dynamic | : No data available |
| Viscosity, kinematic | : 2.1 mm ² /s (20 °C) |

SECTION 10. STABILITY AND REACTIVITY

| | |
|------------------------------------|---|
| Reactivity | : Stable |
| Chemical stability | : Stable under normal conditions. |
| Possibility of hazardous reactions | : No decomposition if stored and applied as directed. Vapours may form explosive mixture with air. |
| Conditions to avoid | : Heat, flames and sparks. |
| Incompatible materials | : Oxidizing agents Metals Acids Alkali metals Aluminium Zinc |
| Hazardous decomposition products | : Carbon monoxide, carbon dioxide and unburned hydrocarbons (smoke). Bromine |

SECTION 11. TOXICOLOGICAL INFORMATION
Potential Health Effects

| | |
|------------------------------|---|
| Aggravated Medical Condition | : None known. |
| Symptoms of Overexposure | : Effects are dependent on exposure (dose, concentration, contact time). Effects are immediate and delayed. Chronic effects are delayed and symptoms may not be observed during an exposure. Symptoms may include irritation, redness, pain, and rash. |

Carcinogenicity:

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

| | | |
|--------------|--|----------|
| IARC | Group 2B: Possibly carcinogenic to humans | |
| | 1,2-epoxybutane | 106-88-7 |
| ACGIH | Confirmed animal carcinogen with unknown relevance to humans | |
| | 1-bromopropane | 106-94-5 |
| OSHA | No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens. | |
| NTP | Reasonably anticipated to be a human carcinogen | |
| | 1-bromopropane | 106-94-5 |

Acute toxicity**Components:****propan-1-ol:**

Acute dermal toxicity : LD50 Dermal Rabbit: 5,040 mg/kg

Skin corrosion/irritation**Product:**

Remarks: Irritating to skin.

Components:**propan-1-ol:**

Species: human skin

Exposure time: 24 h

Result: Mild skin irritation

Serious eye damage/eye irritation**Product:**

Remarks: Irritating to eyes.

Components:**propan-1-ol:**

Species: Rabbit

Exposure time: 24 h

Result: Moderate eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

STOT - repeated exposure

No data available

Aspiration toxicity

No data available

Further information**Product:**

Remarks: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting., Concentrations substantially above the TLV value may cause narcotic effects., Solvents may degrease the skin.

SECTION 12. ECOLOGICAL INFORMATION**Ecotoxicity**

No data available

Persistence and degradability

No data available

Bioaccumulative potential**Product:**

Partition coefficient: n-octanol/water : Remarks: No data available

Components:

1-bromopropane :
Partition coefficient: n-octanol/water : Pow: 2.1

1,2-epoxybutane :
Partition coefficient: n-octanol/water : Pow: 0.68

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Regulation 40 CFR Protection of Environment; Part 82 Protection of Stratospheric Ozone - CAA Section 602 Class I Substances

Remarks This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

Additional ecological information : No data available

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

SECTION 13. DISPOSAL CONSIDERATIONS**Disposal methods**

- Waste from residues : Do not dispose of waste into sewer.
Do not contaminate ponds, waterways or ditches with chemical or used container.
Dispose of in accordance with local regulations.
- Contaminated packaging : Empty remaining contents.
Dispose of as unused product.
Do not re-use empty containers.
The vapors of this product will form a flammable mixture in a narrow concentration range of 4.6 % to 8.5 % by volume in air based on n-propyl bromide. Do not weld or cut any drum with a torch that contains this product because residual vapors in the drum could be in the flammable range and an explosion could occur.

SECTION 14. TRANSPORT INFORMATION

Transportation Regulation: 49 CFR (USA):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

Transportation Regulation: IMDG (Vessel):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

Transportation Regulation: IATA (Cargo Air):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

Transportation Regulation: IATA (Passenger Air):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

Transportation Regulation: TDG (Canada):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

Transportation Notes

This product does not have a flashpoint that can be measured, therefore this product does not meet the criteria as a flammable liquid under the regulations of the US DOT special provisions (CFR 172.101 (c)(12)(iv)) and Canadian TDG (SOR/2017-137, 2.18 (1)(a)), and does not meet the definition of any other hazard class. Based on this information and conventions used by our supplier(s), this product is not regulated for transport in the United States and Canada. As noted above, a transport classification of UN2344 - Bromopropanes, should be used for shipments by air (IATA) or by sea (IMDG).

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

The product as delivered to the customer conforms to packaging requirements for shipment by road under US Department of Transportation (DOT) regulations. Additional transportation classifications noted above are for reference only, and not a certification or warranty of the suitability of the packaging for shipment under these alternative transport regulations.

SECTION 15. REGULATORY INFORMATION

TSCA list : No substances are subject to a Significant New Use Rule.

No substances are subject to TSCA 12(b) export notification requirements.

EPCRA - Emergency Planning and Community Right-to-Know Act
CERCLA Reportable Quantity

| Components | CAS-No. | Component RQ (lbs) | Calculated product RQ (lbs) |
|-----------------|----------|-----------------------|--------------------------------|
| 1,2-epoxybutane | 106-88-7 | 100 | * |

*: Calculated RQ exceeds reasonably attainable upper limit.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Skin corrosion or irritation
 Serious eye damage or eye irritation
 Carcinogenicity
 Reproductive toxicity
 Specific target organ toxicity (single or repeated exposure)

SARA 302 : No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 : The following components are subject to reporting levels established by SARA Title III, Section 313:

| | | |
|-----------------|----------|-----|
| 1,2-epoxybutane | 106-88-7 | 1 % |
|-----------------|----------|-----|

California Prop. 65


WARNING: This product can expose you to chemicals including 1-bromopropane, which is/are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

The components of this product are reported in the following inventories:

TSCA On TSCA Inventory

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

DSL All components of this product are on the Canadian DSL

For information on the country notification status for other regions please contact the manufacturer's regulatory group.


Inventory Acronym and Validity Area Legend:

TSCA (USA), DSL (Canada), NDSL (Canada)

SECTION 16. OTHER INFORMATION

Further information

NFPA:



HMIS III:

| | |
|------------------------|-----------|
| HEALTH | 2* |
| FLAMMABILITY | 0 |
| PHYSICAL HAZARD | 0 |

0 = not significant, 1 = Slight,
2 = Moderate, 3 = High
4 = Extreme, * = Chronic

OSHA - GHS Label Information:

Hazard pictograms



Signal word

: **Danger:**

Hazard statements

: Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. Suspected of causing cancer. May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure if inhaled.

Precautionary statements

: **Prevention:** Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not breathe dust/ fume/ gas/ mist/ vapours/ spray. Wash skin thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/ protective clothing/ eye protection/ face protection.
Response: IF ON SKIN: Wash with plenty of soap and water. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. IF exposed or concerned: Get medical advice/ attention. If skin irritation occurs: Get medical advice/ attention. If eye irritation persists: Get medical advice/ attention. Take off contaminated clothing and wash before reuse.
Storage: Store in a well-ventilated place. Keep container tightly closed.
Disposal: Dispose of contents/container in accordance with local regulation.

| | |
|----------|-----|
| Version: | 3.1 |
|----------|-----|

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 07/17/2021

| | |
|----------------|------------|
| Revision Date: | 03/29/2018 |
| Print Date: | 07/17/2021 |

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. Users should make their own investigations to determine the suitability and applicability of the information for their particular purposes. This SDS has been prepared by the Compliance Services organization supporting this manufacturer, supplier or distributor.

Zep Inc. markets products under well recognized and established brand names such as Zep®, Zep Commercial®, Zep Professional®, Enforcer®, National Chemical™, Selig™, Misty®, Next Dimension™, Petro®, i-Chem®, TimeMist®, TimeWick™, MicrobeMax®, Country Vet®, Konk®, Original Bike Spirits®, Blue Coral®, Black Magic®, Rain-X®, Niagara National™, FC Forward Chemicals®, Rexodan®, Mykal™, and a number of private labeled brands.



GHS SAFETY DATA SHEET

WELD-ON® 717™ Low VOC Cements for PVC Plastic Pipe

Date Revised: JUN 2018

Supersedes: NOV 2017

SECTION I - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 717™ Low VOC Cements for PVC Plastic Pipe**PRODUCT USE:** Low VOC Solvent Cement for PVC Plastic Pipe**SUPPLIER:****MANUFACTURER:** IPS Corporation

17109 South Main Street, Gardena, CA 90248-3127

P.O. Box 379, Gardena, CA 90247-0379

Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)**Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|-----------------------------|------------------------------|-----------------------------|
| Acute Toxicity: Category 4 | Acute Toxicity: None Known | Flammable Liquid Category 2 |
| Skin Irritation: Category 3 | Chronic Toxicity: None Known | |
| Skin Sensitization: NO | | |
| Eye: Category 2 | | |

GHS LABEL:**Signal Word:**

Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2

CLASS D, DIVISION 1B

Hazard Statements

H225: Highly flammable liquid and vapor

H319: Causes serious eye irritation

H332: Harmful if inhaled

H335: May cause respiratory irritation

H336: May cause drowsiness or dizziness

H351: Suspected of causing cancer

EUH019: May form explosive peroxides

Precautionary Statements

P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking

P261: Avoid breathing dust/fume/gas/mist/vapors/spray

P280: Wear protective gloves/protective clothing/eye protection/face protection

P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

P403+P233: Store in a well ventilated place. Keep container tightly closed

P501: Dispose of contents/container in accordance with local regulation

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH | CONCENTRATION |
|---------------------------|----------|-----------|-------------------------|---------------|
| | | | Pre-registration Number | % by Weight |
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 25 - 70 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 5 - 36 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 05-2116297718-25-0000 | 10 - 25 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.

* Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).

Indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.**Skin contact:** Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.**Inhalation:** Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.**Ingestion:** Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.**Likely Routes of Exposure:** Inhalation, Eye and Skin Contact**Acute symptoms and effects:****Inhalation:** Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.**Eye Contact:** Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.**Skin Contact:** Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.**Ingestion:** May cause nausea, vomiting, diarrhea and mental sluggishness.**Chronic (long-term) effects:** Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

| | | | | |
|--|--|--------------|------|--------------|
| Suitable Extinguishing Media: | Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. | HMIS | NFPA | 0-Minimal |
| Unsuitable Extinguishing Media: | Water spray or stream. | Health | 2 | 2 1-Slight |
| Exposure Hazards: | Inhalation and dermal contact | Flammability | 3 | 3 2-Moderate |
| Combustion Products: | Oxides of carbon, hydrogen chloride and smoke | Reactivity | 0 | 0 3-Serious |
| | | PPE | B | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame. Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment. Prevent contact with skin or eyes (see section 8).**Environmental Precautions:** Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.**Methods for Cleaning up:** Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.**Materials not to be used for clean up:** Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.

Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.

Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.

Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.

Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL | OSHA PEL-Ceiling | CAL/OSHA PEL | CAL/OSHA Ceiling | CAL/OSHA STEL |
|------------------|---------------------------|-----------|------------|----------|-----------|------------------|--------------|------------------|---------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.**Monitoring:** Maintain breathing zone airborne concentrations below exposure limits.**Personal Protective Equipment (PPE):****Eye Protection:** Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.**Skin Protection:** Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion. Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.**Respiratory Protection:** Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above. With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® 717™ Low VOC Cements for PVC Plastic Pipe

Date Revised: JUN 2018

Supersedes: NOV 2017

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Gray or clear, heavy syrupy liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 66°C (151°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 66°C (151°F) Based on first boiling component: THF | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 11.8% based on THF |
| Flash Point: | -20°C (-4°F) TCC based on THF | Vapor Pressure: | 129 mm Hg @ 20°C (68°F) based on THF |
| Specific Gravity: | 0.963 @23°C (73°F) | Vapor Density: | >2 (Air = 1) |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Other Data: Viscosity: | Heavy bodied |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 510 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD50 | LC50 | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | |

| | | | | | |
|-----------------------------|-----------------------|---------------------|-----------------------|---------------------------------|-----------------------------|
| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 510 g/l. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

EXCEPTION for Ground Shipping

DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package.
Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D".

| TDG INFORMATION | |
|---------------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|--|--|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R20: Harmful by inhalation. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness | |
| Safety Phrases: | S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. S25: Avoid contact with eyes. | S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. S46: If swallowed, seek medical advise immediately and show this container or label. | |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 6/21/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for PVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

MATERIAL SAFETY DATA SHEET
SPOTCHECK[®] DEVELOPER SKD-S2

1. IDENTIFICATION

COMPANY : ITW INDIA PRIVATE LIMITED
 ADDRESS : PLOT NO 51, 52,207 & 208, PHASE – 2, IDA
 TSIIC, PASHAMMYLARAM,
 MEDAK – 502 307, TELANGANA
 INDIA.
 TELEPHONE : 91 – 8455 – 224710
 FAX : 91 – 8455 – 224709
 PRODUCT USE : Developer for dye penetrant inspection
 PACKAGES : Aerosol, 1 L, 5 L, 20 L & 205 L
 NFPA Rating : Health 1, Flammability 3(Aerosol Flammability 4), Reactivity 0.
 Revision Date : May 30, 2015.

2. HAZARDOUS INGREDIENTS

| Ingredient | Wt/wt% | CAS# | TLV | PEL | LD 50 | LC50 |
|--------------------------------------|--------|------------|---------|----------|-------------------------|------|
| Propan-2-ol | 40-70% | 67-63-0 | 400 ppm | 400 ppm | 3.6g/kg (oral/mouse) | NA |
| Propan-2-one | 10-30% | 67-64-1 | 750 ppm | 750 ppm | 6g/kg (oral/rat) | NA |
| Isobutane(propellant – aerosol only) | 30% | 75-28-5 | NA | 1000 ppm | NA | NA |
| Talc | 1-3% | 14807-96-6 | NA | 2mg/m3 | NA | NA |

3. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

Extremely flammable white liquid and aerosol. Fast evaporating vapors can reach hazardous levels quickly in unventilated spaces.

POTENTIAL HEALTH EFFECTS

Skin Contact : Can irritate by removing natural skin oils on long or repeated exposures
 Eyes : Irritating but doesnot damage eye tissue.
 Inhalation : Cause dizziness and nausea
 Ingestion : Not significant in small (mouthful) quantities
Medical conditions known to be aggravated by exposure to product: None

4. FIRST AID

Skin Contact : Wash off with soap water .Use soothing lotion
 Eyes : Rinse carefully under upper and lower eyelids using plenty of water
 Inhalation : Remove to fresh air if dizzy or nauseated
 Ingestion : Do not induce vomiting. Accidental ingestion of a small mouthful is not expected to cause significant harm
 NOTE: In all severe cases, contact physician immediately.

5. FIRE HAZARD

Conditions of flammability : Bulk & Aerosol : Ignition will occur if used near flames, arcs or any other ignition source
 Flash point : 2 deg F (-16 deg C) (PMCC)
 Flammable limits in air : 2 to 15%
 Extinguishing media : Carbon dioxide , Foam,Water
 Special fire fighting procedures : Keep containers cool with water spray.
 Hazardous combustion products : Smoke,soot,oxides or carbon
 Unusual fire hazards : Aerosol containers may burst at temperatures over 54 deg C and spray contents into a fire

6. ACCIDENTAL RELEASE MEASURES

Turn off or remove source of ignition. Mop up or sweep up with absorbent(For disposal , see Section 13)

7. HANDLING AND STORAGE

Store away from heat source. Avoid eye contact. Avoid repeated or prolonged skin contact.
 Avoid breathing spray mist.Donot spray around arcs or flames

MSDS/SKD S2/03 dated 07/2015

Page 1 of 3



ITW India Private Limited, Plot no:51, 52, 207 & 208, Phase -2, IDA, TSIIC, Pashammylaram, Medak Dist.-502307, Telangana State, India
 Telephone: +91 8455 224710. Facsimile: +91 8455 224709. E-mail : magnafluxinfo@magnafluxindia.com, Website: www.magnaflux.com

Regd. Office: ITW India Private Limited, Level 1, Lotus Plaza, 732/1, Mehrauli Gurgaon Road, Sector - 14, Gurgaon - 122 001, Haryana, India.
 Telephone : +91 - 124 - 4284381, Facsimile : +91 - 124 - 4284389, E-mail : infoindia@itw.com

Corporate Identity Number (CIN) : U32301HR1979PTC038643

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Controls : None, unless sprayed. Use where ventilation will carry spray mist away from occupied areas
 Personal protection : Wear safety glasses to protect eyes. Wear nitrile rubber gloves if hand exposure is unavoidable.
 Respirator with filter if sprayed in enclosed unventilated space.

9. PHYSICAL PROPERTIES

| | | | |
|--------------------------------|---------------------------|--------------------|---|
| Initial boiling point (bulk) : | Min 55 deg C | Vapor pressure : | Aerosol 65 psi@24degC, Bulk 150 mm@38degC |
| Percent volatile : | 90% | Vapor density : | 3 |
| Density/sp. gravity : | 0.8 | Evaporation rate : | 0.4 of ether |
| Water solubility : | 0 (emulsifies into water) | Appearance : | White liquid |
| pH : | Neutral | Odor : | Alcohol odour |

10. STABILITY AND REACTIVITY

Stability : Stable
 Incompatibility : None
 Hazardous decomposition products : Soot, oxides of carbon and nitrogen when burning
 Reactivity : None

11. TOXICOLOGICAL INFORMATION

Carcinogenicity : Contains no known or suspected carcinogens listed with OSHA, IARC, NTP or ACGIH
 Threshold limit value : 400 ppm
 WHMIS information (Canada) : According to available information, the ingredients have not been found to show reproductive toxicity, Teratogenicity, Mutagenicity, Skin sensitization, or Synergistic toxic effects with other material.

12. ECOLOGICAL INFORMATION

No data is available on SKD-S2

13. DISPOSAL

Send to a licensed waste facility for proper disposal.
 RCRA : Hazardous waste
 U.S EPA Waste Number : D001

14. TRANSPORTATION

U.S.DOT: 49 CFR 172.101 Hazardous Material Table

| | <u>Non-aerosol</u> | <u>Aerosol</u> |
|----------------------------|--|--------------------|
| Proper shipping name : | Flammable liquid, n.o.s (Isopropanol, acetone) | Consumer commodity |
| Hazard class or division : | 3 | ORM-D |
| Identification No. : | UN 1993 | None |
| Packing Group : | II | None |

IATA : List of Dangerous Goods

| | <u>Non-aerosol</u> | <u>Aerosol</u> |
|----------------------------|--|---------------------|
| Proper shipping name : | Flammable liquid, n.o.s (Isopropanol, acetone) | Aerosols, flammable |
| Hazard class or division : | 3 | 2.1 |
| Identification No. : | UN 1993 | UN 1950 |
| Packing Group : | II | - |

IMDG : General Index

| | <u>Non-aerosol</u> | <u>Aerosol</u> |
|----------------------------|--|----------------|
| Proper shipping name : | Flammable liquid, n.o.s (Isopropanol, acetone) | Aerosols |
| Hazard class or division : | 3 | 2.1 |
| Identification No. : | UN 1993 | UN 1950 |
| Packing Group : | II | - |

15. REGULATORY INFORMATION

| | |
|-----------------------------|---|
| TSCA | : All ingredients are listed in TSCA inventory. |
| CERCLA | : Reportable quantity (RQ) for Acetone = 5000 lbs. |
| SARA TITLE III, Section 313 | : Acetone |
| California Proposition 65 | : This product contains trace amount of chemicals known to the State of California to cause cancer and to cause birth defects or other reproductive harm. |
| WHMIS Class (Canada) | : Non-Aerosol : B-2, D2-B Aerosol : A,B-5,D2-B |

Note ; This MSDS has been prepared to meet WHMIS (Canada) requirements with the exception of using 16 headings.

16. OTHER INFORMATION

| | |
|--------------------|-----------------------------------|
| Revision Statement | : Correction of IMDG hazard class |
| Prepared by | : Sunil N S, Q.C Dept.. |



Safety Data Sheet

Dynaflux SDS CNF A 07/18/2018

Product: Crack Check CNF Cleaner (Aerosol)

Part 1: Product and Company Identification

Identification CNF A

Trade Name: Crack Check CNF Cleaner (Aerosol)

Product Use: Cleans hard surfaces before and after penetrant application.

Manufacturers Name: Dynaflux, Inc.

241 Brown Farm Rd.

Cartersville, GA 30120 U.S.A.

Emergency Telephone Number: For U.S.: 800-255-3924 International: 813-248-0585

Part 2: Hazardous IngredientsSignal Word: **WARNING****H229:** Pressurized container: may burst if heated**H351:** Suspected of causing cancer

| Hazardous Ingredients | CAS No. | SARA III List | PEL PPM | TLV PPM | Carcinogen Refer. Source |
|-----------------------|---------|---------------|---------|---------|--------------------------|
| Dichloromethane | 75-09-2 | Yes | 25 | 12.5 | IARC NTP |

Warning:

Contains gas under pressure. May explode if heated.

May cause allergy or asthma symptoms or breathing difficulties if inhaled.

May cause damage to organs.

May be harmful if swallowed.

Part 3: Hazard Rating**H.M.I.S.**

| | |
|--------------|---|
| Health | 2 |
| Flammability | 0 |
| Reactivity | 0 |
| Special | - |

N.F.P.A.

| | |
|---------------------|---|
| Health | 3 |
| Flammability | 0 |
| Reactivity | 0 |
| Personal Protection | b |

Part 4: First Aid MeasuresEye Contact: Flush with water for 15 minutes. If irritation persists call a physician. **GHS: Category 2A**Skin Contact: Flush with water. Wash with soap and water. Apply a lotion. **GHS: Category 2**

Inhalation: Move to fresh air.

Ingestion: Do not induce vomiting. Give several large glasses of water. Seek medical attention. **GHS: Category 4****Reproductive Toxicity: GHS Category 2****Carcinogenicity: GHS Category 2**

Part 5: Fire Fighting Measures

Flashpoint: Nonflammable Flame Projection Test

U.E.L.: None Established

L.E.L. : None Established

Auto Ignition Temperature: 662°C.

Combustion Products: Carbon dioxide, carbon monoxide, hydrogen chloride and small amounts of phosgene.

Extinguishing Media: Foam, CO₂, Dry chemical

Unusual Fire and Explosion Hazard: use a self contained breathing apparatus. Use water fog to cool containers to prevent rupturing.

Part 6: Accidental Release Measures

Small Spill: Soak up with absorbent material, i.e. kitty litter, clay or dirt. Sweep up and place in a labeled closed container.

Large Spill: Keep unauthorized people from the area. Use self contained breathing apparatus. Dike area and pump contents to a labeled, closed container. Absorb residue and sweep up. Place in a closed, labeled container.

Part 7: Handling and Storage

Leave in the shipping containers. Store in a cool dry place. Do not expose aerosols to temperatures above 120° F or the container may rupture.

Part 8: Exposure Control / Personal Protection

If vapor exceeds TLV use a approved respirator. Use mechanical ventilation in confined spaces. Wear safety glasses and protective gloves.

Part 9: Physical and Chemical Properties

Appearance: thin liquid

Odor: Chlorinated solvent

Odor threshold: Unknown

pH: NA

Melting/Freezing Point: Unknown

Initial boiling point/boiling range: 39.8°C

Flash Point: NA

Evaporation Rate: NA

Flammability: NA

UEL/LEL: Unknown

Vapor Pressure: 47.33 KPA

Vapor Density: Unknown

Solubility: Unknown

n-octynol/water coefficient: 1.25

Auto Ignition Temperature: Unknown

Decomposition Temperature: Unknown

Part 10: Stability and Reactivity

Stability- Product is stable

Hazardous Polymerization- will not occur.

Conditions to Avoid- Ignition sources, open flames, amines and strong bases.

Part 11: Toxicological Information

Ingestion: Rat LD₅₀ 1500-2500mg/kg

Inhalation: Rat LC₅₀ 10,000 ppm

Carcinogenicity Classification: N.T.P. Anticipated Carcinogen. IARC: Possible carcinogen; 2B

Reproductive Toxicity: animal studies- None

Genetic Toxicity-negative results from animal studies.

Part 12: Ecological Information

Potential for mobility in soil is high.
Octanol/Water partition coefficient: 1.25
Organic carbon/water partition coefficient: 24
Atmospheric half life: 79-110 days
Biodegradation 5-26% 28 days
LC50 bluegill: 224 mg/l
Aquatic Toxicity EC50 water flea. Immobilization: 480 mg/l

Part 13: Disposal Consideration

Do not dump into any sewers, on the ground or into any body of water. Send to a permitted recycler.

Part 14: Transportation Information**D.O.T.**

Consumer Commodity O.R.M.-D., 48580 Sub 3

IMDG- (Vessel)

Proper Shipping Name: Aerosols, (Dichloromethane), Limited Quantity
Hazard Class: Class 2.2, 6.1
Packing Group: III
UN Number: UN1950
Marine Pollutant – No

Part 15: Regulatory Information

Section 311 and 312
Immediate Health Hazard – Yes
Delayed Health Hazard- Yes
Fire Hazard – No
Reactive Hazard – No
Section 313- Dichloromethane
SARA 313 - Listed
TSCA – Listed
CEPA-(DSL) Listed
European Inventory – Listed
Canadian DSL- Listed
Australian AICA – Listed
Japanese ENCS-Listed

California Proposition 65 Statement:

WARNING: This product can expose you to Dichloromethane, a chemical known to the State of California to cause cancer. For more information, go to www.p65Warnings.ca.gov/product.

Continued

Part 16: Other Information

Dynaflux, Inc.
241 Brown Farm Rd.
Cartersville, GA 30120 U.S.A.
Completed by: Eugene Schaffstall

Disclaimer of Expressed and implied Warranties:

The information presented in this Safety Data Sheet is based on data believed to be accurate as of the date of the Safety Data sheet was prepared. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices as specified on the label copy.



Revision Number: 003.1

Issue date: 05/22/2018

1. PRODUCT AND COMPANY IDENTIFICATION

Product name: LePage PL400 Subfloor and Deck Adhesive
IDH number: 1654126
Product type: Assembly adhesive, solvent
Restriction of Use: None identified
Company address: Henkel Canada Corporation
 Meadowpine Boulevard 2515
 Mississauga, Ontario L5N 6C3
Region: Canada
Contact information:
 Telephone: +1 (905) 814-6511
 MEDICAL EMERGENCY Phone: Poison Control Center
 1-877-671-4608 (toll free) or 1-303-592-1711
 TRANSPORT EMERGENCY Phone: CHEMTREC
 1-800-424-9300 (toll free) or 1-703-527-3887
 Internet: www.henkelna.com

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

DANGER: HIGHLY FLAMMABLE LIQUID AND VAPOR.
 CAUSES SERIOUS EYE IRRITATION.

| HAZARD CLASS | HAZARD CATEGORY |
|------------------|-----------------|
| FLAMMABLE LIQUID | 2 |
| EYE IRRITATION | 2A |

PICTOGRAM(S)



Precautionary Statements

Prevention: Keep away from heat, sparks, open flames, hot surfaces - no smoking. Keep container tightly closed. No release into water. Use explosion-proof equipment. Use non-sparking tools. Take action to prevent static discharges. Wash affected area thoroughly after handling. Wear protective gloves, eye protection, and face protection.

Response: If on skin (or hair): Take off immediately all contaminated clothing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. In case of fire: Use foam, dry chemical or carbon dioxide to extinguish.

Storage: Store in a well-ventilated place. Keep cool.

Disposal: Dispose of contents and/or container according to Federal, State/Provincial and local governmental regulations.

Classification complies with Canadian Hazardous Products Regulations (WHMIS 2015) and is consistent with the provision of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

IDH number: 1654126

Product name: LePage PL400 Subfloor and Deck Adhesive

| Hazardous Component(s) | CAS Number | Weight %* |
|--|------------|-----------|
| Limestone | 1317-65-3 | 20 - 30 |
| Kaolin | 1332-58-7 | 10 - 20 |
| Acetone | 67-64-1 | 10 - 20 |
| Resin acids and Rosin acids, esters with pentaerythritol | 8050-26-8 | 1 - 5 |
| Methyl acetate | 79-20-9 | 1 - 5 |
| Titanium dioxide | 13463-67-7 | 0.1 - 1 |
| Quartz (SiO ₂), <1% respirable | 14808-60-7 | 0.1 - 1 |

* Exact percentages may vary or are trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

| | |
|----------------------|--|
| Inhalation: | If inhaled, immediately remove the affected person to fresh air. If breathing is difficult, give oxygen. If symptoms develop and persist, get medical attention. |
| Skin contact: | Immediately wash skin thoroughly with soap and water. If symptoms develop and persist, get medical attention. |
| Eye contact: | In case of contact with the eyes, rinse immediately with plenty of water for 15 minutes, and seek immediate medical attention. |
| Ingestion: | Do not induce vomiting, seek medical advice immediately. |
| Symptoms: | See Section 11. |

5. FIRE FIGHTING MEASURES

| | |
|---|--|
| Extinguishing media: | Foam, dry chemical or carbon dioxide. In case of fire, keep containers cool with water spray. |
| Special firefighting procedures: | Wear a self-contained breathing apparatus with a full face piece operated in pressure-demand or other positive pressure mode. Wear full protective clothing. |
| Unusual fire or explosion hazards: | Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors are heavier than air and may travel along floor to an ignition source. |
| Hazardous combustion products: | Upon decomposition, this product emits carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons. |

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

| | |
|-----------------------------------|---|
| Environmental precautions: | Eliminate all sources of ignition or flammables that may come into contact with a spill of this material. Ventilate area. Prevent further leakage or spillage if safe to do so. Wear appropriate protective equipment and clothing during clean-up. Do not allow product to enter sewer or waterways. |
| Clean-up methods: | Use noncombustible absorbent material such as sand. Use non-sparking tools for clean-up. Absorb spill with inert material. Shovel material into appropriate container for disposal. Dispose of according to Federal, State and local governmental regulations. |

7. HANDLING AND STORAGE

Handling: Do not pressurize, cut, heat or weld containers. Empty product containers may contain product residue. Do not reuse empty containers. Use only in well-ventilated areas. Keep out of the reach of children. Keep away from heat, spark and flame. Containers should be grounded and bonded to the receiving container.

Storage: For safe storage, store between -20 °C (-4°F) and 50 °C (122°F) Keep away from heat, spark and flame. Keep containers closed when not in use.

For information on product shelf life, please review labels on container or check the Technical Data Sheet.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

| Hazardous Component(s) | ACGIH TLV | OSHA PEL | AIHA WEEL | OTHER |
|--|---|---|-----------|-------|
| Limestone | 10 mg/m3 TWA Total dust. | 5 mg/m3 PEL Respirable fraction. 15 mg/m3 PEL Total dust. | None | None |
| Kaolin | 2 mg/m3 TWA Respirable fraction. | 5 mg/m3 PEL Respirable fraction. 15 mg/m3 PEL Total dust. 15 MPPCF TWA Respirable fraction. 50 MPPCF TWA Total dust. 5 mg/m3 TWA Respirable fraction. 15 mg/m3 TWA Total dust. | None | None |
| Acetone | 250 ppm TWA 500 ppm STEL | 1,000 ppm (2,400 mg/m3) PEL | None | None |
| Resin acids and Rosin acids, esters with pentaerythritol | None | None | None | None |
| Methyl acetate | 200 ppm TWA 250 ppm STEL | 200 ppm (610 mg/m3) PEL | None | None |
| Titanium dioxide | 10 mg/m3 TWA | 15 mg/m3 PEL Total dust. 15 MPPCF TWA Respirable fraction. 15 mg/m3 TWA Total dust. 50 MPPCF TWA Total dust. 5 mg/m3 TWA Respirable fraction. | None | None |
| Quartz (SiO ₂), <1% respirable | 0.025 mg/m3 TWA Respirable fraction. | 2.4 MPPCF TWA Respirable. 0.1 mg/m3 TWA Respirable. 0.05 mg/m3 TWA (Respirable dust.) (Respirable dust.) 0.025 mg/m3 OSHA_ACT (Respirable dust.) 0.05 mg/m3 PEL Respirable dust. | None | None |

| | |
|--------------------------------|---|
| Engineering controls: | Local exhaust ventilation is recommended when general ventilation is not sufficient to control airborne contamination below occupational exposure limits. |
| Respiratory protection: | Use a NIOSH approved air-purifying respirator if the potential to exceed established exposure limits exists. When workplace hazards warrant the use of a respirator, appropriate respirators must be used, and a program that follows 29 CFR 1910.134 must be followed. |
| Eye/face protection: | Safety goggles or safety glasses with side shields. |
| Skin protection: | Chemical resistant, impermeable gloves. |

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|---|
| Physical state: | Liquid |
| Color: | Beige |
| Odor: | Acetone-like |
| Odor threshold: | Not available. |
| pH: | 7 |
| Vapor pressure: | Not available. |
| Boiling point/range: | 56 - 57 °C (132.8 - 134.6 °F) |
| Melting point/ range: | < 0 °C (< 32°F) |
| Specific gravity: | 1.44 |
| Vapor density: | 2.0 |
| Flash point: | -17 °C (1.4 °F) |
| Flammable/Explosive limits - lower: | Not available. |
| Flammable/Explosive limits - upper: | Not available. |
| Autoignition temperature: | Not available. |
| Flammability: | Not applicable |
| Evaporation rate: | 14.4 |
| Solubility in water: | Slightly soluble |
| Partition coefficient (n-octanol/water): | Not available. |
| VOC content: | 0.22 %; 5.67 g/l (by weight, calculated using CARB method; g/L less water, less exempts calculated using SCAQMD method) |
| Viscosity: | 375,000 mPa.s |
| Decomposition temperature: | Not available. |

10. STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable under normal conditions of storage and use. |
| Hazardous reactions: | Will not occur. |
| Hazardous decomposition products: | Carbon dioxide, carbon monoxide and irritating and/or toxic gases and particulate may be generated by thermal decomposition or combustion. |
| Incompatible materials: | Strong oxidizing agents. |
| Reactivity: | Not available. |
| Conditions to avoid: | Heat, flames, sparks and other sources of ignition. |

11. TOXICOLOGICAL INFORMATION

| | |
|-------------------------------------|--------------------------|
| Relevant routes of exposure: | Inhalation, Skin contact |
|-------------------------------------|--------------------------|

Potential Health Effects/Symptoms

Inhalation: Irritates the nose, throat and respiratory system. Exposure to high doses may cause central nervous system depression. Such doses may also cause adverse effects in the liver, kidneys, and lungs. Abrasion of cured material such as by sanding or grinding could release respirable particles of silica quartz, a cancer hazard by inhalation. Normal use of this product causes no such release. Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal.

Skin contact: Prolonged and/or repeated skin contact with this product may cause irritation/dermatitis.

Eye contact: Contact with eyes can cause eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision.

Ingestion: Ingestion can cause gastrointestinal irritation, nausea, vomiting and diarrhea.

| Hazardous Component(s) | LD50s and LC50s | Immediate and Delayed Health Effects |
|--|--|---|
| Limestone | None | Nuisance dust |
| Kaolin | Oral LD50 (Rat) = > 5,000 mg/kg Dermal LD50 (Rat) = > 5,000 mg/kg | Nuisance dust |
| Acetone | Oral LD50 (Mouse) = 5.2 g/kg Oral LD50 (Mouse) = 3,000 mg/kg Oral LD50 (Rabbit) = 5,340 mg/kg Oral LD50 (Rat) = 5,800 mg/kg Oral LD50 (Rat) = 9,800 mg/kg Dermal LD50 (Rabbit) = 20,000 mg/kg Inhalation LC50 (Rat, 4 h) = 76 mg/l | Central nervous system, Irritant |
| Resin acids and Rosin acids, esters with pentaerythritol | None | Irritant |
| Methyl acetate | Oral LD50 (Rabbit) = 3.7 g/kg | Blood, Central nervous system, Eyes, Irritant |
| Titanium dioxide | None | Irritant, Respiratory, Some evidence of carcinogenicity |
| Quartz (SiO ₂), <1% respirable | None | Immune system, Lung, Some evidence of carcinogenicity |

| Hazardous Component(s) | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen (Specifically Regulated) |
|--|-------------------------------|-----------------|--|
| Limestone | No | No | No |
| Kaolin | No | No | No |
| Acetone | No | No | No |
| Resin acids and Rosin acids, esters with pentaerythritol | No | No | No |
| Methyl acetate | No | No | No |
| Titanium dioxide | No | Group 2B | No |
| Quartz (SiO ₂), <1% respirable | Known To Be Human Carcinogen. | Group 1 | Yes |

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Dispose of according to Federal, State and local governmental regulations.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any package/configuration.

Canada Transportation of Dangerous Goods - Ground

Proper shipping name: ADHESIVES
Hazard class or division: 3
Identification number: UN 1133
Packing group: II

International Air Transportation (ICAO/IATA)

Proper shipping name: Adhesives
Hazard class or division: 3
Identification number: UN 1133
Packing group: II

Water Transportation (IMO/IMDG)

Proper shipping name: ADHESIVES
Hazard class or division: 3
Identification number: UN 1133
Packing group: II

15. REGULATORY INFORMATION

Canada Regulatory Information

CEPA DSL/NDSL Status: All components are listed on or are exempt from listing on the Canadian Domestic Substances List.

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: This Safety Data Sheet contains changes from the previous version in Section(s): 2, 3, 16

Prepared by: Product Safety and Regulatory Affairs

Issue date: 05/22/2018

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.



Safety Data Sheet

SC-125

Issue Date: May, 2012

Revision Date: October, 2020

Version: 2

1. IDENTIFICATION

Product Identifier

Product Name SC-125

Other means of identification

SDS # 6120

UN/ID No UN1593

Recommended use of the chemical and restrictions on use

Recommended Use Adhesive.

Restrictions on Use

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal

Details of the supplier of the safety data sheet

Supplier Address

Caseway Industrial Products, Inc.
3487 Highland Drive
Bay City, MI 48706
Ph: 989-391-9992
Fax: 989-391-9994

Emergency Telephone Number

Emergency Telephone (24 hr) INFOTRAC 1-352-323-3500 (International)
1-800-535-5053 (North America) Contract # 106140
Contact manufacturer for all non-emergency calls

2. HAZARDS IDENTIFICATION

Appearance Clear colorless liquid

Physical State Liquid

Odor Ether-like

Classification GHS

| | |
|--|--------------------|
| Acute toxicity, oral | Category 4 [H302] |
| Skin corrosion/irritation | Category 2 [H315] |
| Serious eye damage/eye irritation | Category 2A [H319] |
| Carcinogenicity | Category 2 [H351] |
| Specific target organ toxicity (single exposure) | Category 1 [H370] |
| Specific target organ toxicity (repeated exposure) | Category 2 [H373] |
| Aspiration hazard | Category 2 [H305] |
| Hazardous to the aquatic life | Category 3 [H412] |

Hazards Not Otherwise Classified (HNOC)

- Methylene chloride can be metabolized to carbon monoxide (CO), which is then very tightly bound to hemoglobin. This complex is called carboxyhemoglobin (COHb) and results in a reduction in the oxygen carried in the blood. This product may be absorbed through the skin, causing systemic effects.
- Exposure in an enclosed or poorly-ventilated area may be harmful.
- This material may be absorbed across the skin causing systemic effects.
- ASPIRATION HAZARD IF SWALLOWED – CAN ENTER LUNGS AND CAUSE DAMAGE

Signal Word**Danger****Hazard Statements****H302:** Harmful if swallowed**H305:** May be harmful if swallowed and enters airways**H315:** Causes skin irritation**H319:** Causes serious eye irritation**H335:** May cause respiratory irritation.**H336:** May cause drowsiness or dizziness**H351:** Suspected of causing cancer**H370:** Causes damage to cardiovascular system including elevated carboxyhemoglobin levels**H373:** Causes damage to organs through prolonged or repeated exposure**H402:** Harmful to aquatic life**Precautionary Statements - Prevention****P201:** Obtain special instructions before use.**P202:** Do not handle until all safety precautions have been read and understood.**P260:** Do not breathe dust/fume/gas/mist/vapors/spray.**P264:** Wash hands, arms, and face thoroughly after handling.**P270:** Do not eat, drink, or smoke while using this product**P271:** Use only outdoors or in a well-ventilated area.**P280:** Wear protective gloves/protective clothing/eye protection/face protection.**Precautionary Statements - Response****P308+P313:** IF exposed or concerned: Get medical advice/attention.**P305+P351+P338:** IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do - continue rinsing.**P337+P313:** IF eye irritation persists: Get medical advice/attention.**P302+P352:** IF ON SKIN: wash with plenty of water.**P332+P313:** IF SKIN irritation occurs: Get medical advice/attention.**P362:** Take off contaminated clothing.**P304+P340:** IF INHALED: Remove person to fresh air and keep comfortable for breathing.**P304+P312:** IF INHALED: Call a POISON CENTER/doctor/... if you feel unwell.**P310:** IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.**P301+P330+P331:** IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.**Precautionary Statements - Storage****P403+P233:** Store in a well-ventilated place. Keep container tightly closed.**P405:** Store locked up.**Precautionary Statements - Disposal****P501:** Dispose of contents/container to an approved waste disposal plant.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% |
|-----------------|---------|----------|
| Dichloromethane | 75-09-2 | 60-100 |

If Chemical Name/CAS No is "proprietary" and/or Weight-% is listed as a range, the specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. FIRST-AID MEASURES

First Aid Measures

| | |
|-----------------------|---|
| General Advice | Provide this SDS to medical personnel for treatment. |
| Eye Contact | Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention. |
| Skin Contact | Wash off immediately with plenty of water while removing all contaminated clothes and shoes. If skin irritation persists, get medical advice/attention. Wash clothing after reuse. Treat any skin irritation symptomatically. |
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a physician or poison control center immediately. |
| Ingestion | Rinse mouth. Never give anything by mouth to an unconscious person. Do not induce vomiting without medical advice. Get medical attention immediately. |

Most important symptoms and effects

| | |
|-----------------|--|
| Symptoms | <p>Inhalation (breathing): Respiratory System Effects: Pulmonary irritation, cough, chest discomfort, shortness of breath, headache, euphoria, nausea, and vomiting, respiratory irritation. Changes in heart rate, paresthesias, sleepiness and seizures are described. Heavy exposure can result in muscle weakness or hypotonia, syncope, stupor followed by loss of consciousness. Complications include cardiac abnormalities and elevations of carboxyhemoglobin. Coma with respiratory depression may result in death.</p> <p>Skin: Skin Irritation. Skin exposure may cause intense burning sensation, mild redness and numbness. Severe burns may develop following prolonged exposures.</p> <p>Eye: Eye Irritation. Mild eye irritation may occur when exposed to vapor. Splash of liquid in the eye can cause conjunctival irritation and burning pain. Prolonged contact can cause severe corneal burns.</p> <p>Ingestion (swallowing): Ingesting this material may cause nausea, vomiting, mucosal irritation with burning sensation. System effects include central nervous system depression, headache, syncope, seizures, and coma. The minimum oral lethal dose is estimated at 0.5 to 5 ml/kg. Lesser amounts may cause significant toxicity.</p> <p>Delayed Symptoms/Effects: May cause cancer. Repeated or prolonged exposure may cause blood and liver damage.</p> <p>Protection of First-Aiders: Protect against vapor/gas exposure. Protect against liquid contamination. Most cases of serious toxicity or death have been associated with stripping operations and or use in enclosed spaces.</p> |
|-----------------|--|

Indication of any immediate medical attention and special treatment needed**Notes to Physician**

Treat symptomatically. Acute symptoms from low airborne levels are generally mild and self-limiting following removal from exposure, and should require no specific treatment. The primary exposure route is inhalation. Symptomatic exposure should be treated with oxygen. The primary toxicity is central nervous system depression. May cause cardiac arrhythmias. Treatment with non-catecholamine agent is theoretically preferred. Treat seizures with benzodiazepines. Methylene chloride is metabolized to carbon monoxide. Carbon monoxide levels may increase after exposure has ceased. Treat following carbon monoxide recommendations. For ingestion, protect the airway and do not administer fluids or attempt to decontaminate due to the risk of vomiting and aspiration. Protect the airway. May dissolve some medical grade plastics. Systemic toxicity from skin absorption is unlikely. There is no antidote

Interaction with Other Chemicals Which Enhance Toxicity
Medical Conditions Aggravated by Exposure

May potentiate other agents that cause central nervous system (CNS) and respiratory system depression, such as alcohol, opiates.
 May increase potential for cardiac arrhythmia. May increase carboxyhemoglobin levels.
 May worsen respiratory system disorders such as asthma and other breathing disorders.
 May worsen central nervous system disorders such as seizure disorders or impair central nervous system functions. May worsen ischemic heart disease.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Water fog or fine spray, carbon dioxide, dry chemical, foam.

Unsuitable Extinguishing Media Water jet.**Specific Hazards Arising from the Chemical**

Vapor concentrated in a confined or poorly ventilated area can be ignited upon contact with a high energy spark, flame, or high intensity heat source.

Hazardous Combustion Products: Hydrogen chloride, trace amounts of phosgene, chlorine, and carbon monoxide.

Component: Methylene Chloride (Dichloromethane) 75-09-2

Immediately Dangerous to Health/Life (IDLH): 2300 ppm IDLH

Lower Flammability Level (air): 12% @ 100°C

Upper Flammability Level (air): 19% @ 100°C

Auto Ignition Temperature: 1033°F (556.1°C)

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent). Concentrated vapors may be ignited by high intensity source. Move container from fire area if it can be done without risk. Cool containers with water spray until well after the fire is out. Flood with fine water spray. Do not scatter spilled material with high pressure water streams. Avoid inhalation of material or combustion by-products. Stay upwind and keep out of low areas. Keep water runoff out of water supplies and sewers. (see Section 6 of the SDS).

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures**Personal Precautions**

Most vapors are heavier than air and will spread along ground and collect in low or confined areas (drains, basements, tanks). Do not breath vapors, mist, or spray. Ventilate closed spaces before entering. Exposure in an enclosed or poorly-ventilated area may be very harmful. Keep unnecessary people away, isolate hazard, and deny entry. Evacuation of surrounding area may be necessary for large spills. Shut off ventilation system if needed. Do not get in eyes, on skin, or clothing. Wear protective clothing as described in Section 8 of this safety data sheet. Remove all sources of ignition. The wet contaminated surface may be slippery.

Environmental Precautions Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air). See Section 12 for additional Ecological Information.

Methods and material for containment and cleaning up

Methods for Containment Stop leak if possible, without personal risk. Ventilate closed spaces before entering. Completely contain spilled materials with sandbags, dikes, etc. Remove contaminated soil or collect with appropriate absorbent and place into suitable container. Contain and collect spillage with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite).

Methods for Clean-Up Sweep up absorbed material and shovel into suitable containers for disposal. Discard any product, residue, disposable container or liner in full compliance with federal, state, and local regulations. For waste disposal, see section 13 of the SDS. Wash spill area with a mild detergent.

7. HANDLING AND STORAGE

Precautions for safe handling

Advice on Safe Handling Handle in accordance with good industrial hygiene and safety practice. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear appropriate personal protective equipment. Wash face, hands, and any exposed skin thoroughly after handling. Keep away from heat/sparks/open flames/hot surfaces. — No smoking. Use only in well-ventilated areas. Keep containers closed when not in use. Do not breathe vapors or spray mist. Do not eat, drink or smoke when using this product.

Conditions for safe storage, including any incompatibilities

Storage Conditions Keep container tightly closed and store in a cool, dry and well-ventilated place. Store locked up. Protect from damp. Store away from heat and incompatible materials.

Incompatible Materials Oxidizing agents. Strong bases. Zinc powders. Aluminum powders. Magnesium powders. Potassium. Sodium.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|----------------------------|-------------|---|----------------|
| Dichloromethane 75-09-2 | TWA: 50 ppm | TWA: 25 ppm (vacated) TWA: 500 ppm (vacated) STEL: 2000 ppm 5 min in any 3 h (vacated) Ceiling: 1000 ppm STEL: 125 ppm see 29 CFR 1910.1052 | IDLH: 2300 ppm |

Appropriate engineering controls

Engineering Controls Provide local exhaust or process enclosure ventilated system, Ensure compliance with applicable exposure limits. Monitoring should be performed regularly in accordance with 29 CFR 1910.1052(d) to determine exposure level(s). Good ventilation is required. Maintain eye wash fountain and quick-drench shower facilities in work area.

Individual protection measures, such as personal protective equipment

| | |
|---------------------------------------|--|
| Eye/Face Protection | Splash goggles or full-face shield. |
| Skin and Body Protection | Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact. |
| Respiratory Protection | Ensure adequate ventilation, especially in confined areas. Use NIOSH approved air-purifying respirator if the potential to exceed established exposure limits exists. |
| General Hygiene Considerations | Avoid contact with skin, eyes and clothing. After handling this product, wash hands before eating, drinking, or smoking. If contact occurs, remove contaminated clothing. If needed, take first aid action shown on section 4 of this SDS. Launder contaminated clothing before reuse. |

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | | | |
|--------------------------------|------------------------|--------------------------------|--|
| Physical State | Liquid | Odor | Mildly sweet |
| Appearance | Clear colorless liquid | | Chloroform-like odor |
| Color | Clear Colorless | Odor Threshold | 200 – 300 ppm (causes olfactory fatigue) |
| <u>Property</u> | <u>Values</u> | <u>Remarks • Method</u> | |
| pH | Not determined | | |
| Melting Point/Freezing Point | -95 °C | | |
| Boiling Point/Boiling Range | 39.8 °C / 104 °F | | |
| Flash Point | None | | |
| Evaporation Rate | .07 (ether=1) | | |
| Flammability (Solid, Gas) | Not determined | | |
| Upper Flammability Limit (air) | 19% @ 100 °C | | |
| Lower Flammability Limit (air) | 12% @ 100 °C | | |
| Vapor Pressure | 350 mmHg @ 2 0°C | | |
| Vapor Pressure | 435 mmHg @ 25 °C | | |
| Vapor Density | 2.93 | (Air=1) | |
| Specific Gravity | 1.31 – 1.32 @ 25 °C | @ 25 °C (77 °F) | |
| Water Solubility | 1.32% @ 25 °C | Or 13,000 mg/l at 25 °C | |
| Solubility in other solvents | Not determined | | |
| Partition Coefficient | Not determined | | |
| Auto-ignition Temperature | 556.1 °C / 1033 °F | | |
| Decomposition Temperature | Not determined | | |
| Viscosity | - 0.41 (cps) @ 77 °F | | |
| Dynamic Viscosity | Not determined | | |
| Explosive Properties | Not determined | | |
| Oxidizing Properties | Not determined | | |

10. STABILITY AND REACTIVITY

Reactivity

Not reactive under normal conditions. Reacts violently with active metals.

Chemical Stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

Avoid heat, flames, and other sources of ignition. Containers may rupture or explode if exposed to heat. Reacts violently with active metals. Avoid contact with incompatible substances and conditions due to generation of phosgene and other toxic and irritating substances.

| | |
|---------------------------------|--|
| Hazardous Polymerization | Under normal conditions of storage and use, hazardous polymerization will not occur. |
|---------------------------------|--|

Conditions to Avoid

Heat, flames and sparks.

Incompatible Materials

Oxidizing agents. Strong bases. Zinc powders. Aluminum powders. Magnesium powders. Potassium. Sodium, Reactive metals, Alkali metals.

Hazardous Decomposition Products

Hydrogen chlorine, Chlorine, Phosgene, Oxides of Carbon

11. TOXICOLOGICAL INFORMATION**Information on likely routes of exposure****Product Information****Eye Contact**

Causes serious eye irritation. Vapors may cause eye irritation. Contact may cause tearing, redness, a stinging or burning feeling, swelling, and blurred vision.

Skin Contact

Causes skin irritation. May cause effects ranging from mild irritation to severe pain, and possibly burns, depending on the intensity of contact. Skin absorption may occur.

Inhalation

May cause upper respiratory tract irritation and central nervous system depression with symptoms such as confusion, lightheadedness, nausea, vomiting, headache, and fatigue. Causes formation of carbon monoxide in blood which may affect the cardiovascular system and central nervous system. Continued exposure may cause unconsciousness or even death.

Ingestion

Ingestion may cause nausea or vomiting. If vomiting results in aspiration, chemical pneumonia may occur. Absorption through the gastrointestinal tract may produce central nervous system depression.

Component Information

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|----------------------------|-------------------|----------------------|--|
| Dichloromethane 75-09-2 | 985 mg/kg (Rat) | >2,000 mg/kg (Rat) | = 76,000 mg/m ³ (Mouse) 4 h |

Interaction with Other Chemicals Which Enhance toxicity

May potentiate other agents that cause central nervous system (CNS) depression and respiratory system depression, such as alcohol, opiates.

Chronic Toxicity

Liver effects have not been reported in humans, but liver changes have been observed in several long-term studies with laboratory animals. Inhalation of 500 to 3,500 ppm methylene chloride for two years produced only minimal, nonproliferative changes in the liver of Sprague Dawley rats (the no-observed-effect level was equal to 200 ppm) and no liver effects in hamsters. Nonproliferative changes were noted in rats in another study after exposure to 1,000 to 4,000 ppm. Liver enlargement has been observed in mice exposed to 2,000 and 4,000 ppm of methylene chloride for 11 days.

Chronic Effects: May cause liver damage. May cause cancer based on animal data.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|----------------------------|-------|----------|------------------------|------|
| Dichloromethane 75-09-2 | A3 | Group 2B | Reasonably Anticipated | X |

Legend**ACGIH (American Conference of Governmental Industrial Hygienists)**

A3 - Animal Carcinogen

IARC (International Agency for Research on Cancer)

Group 2B - Possibly Carcinogenic to Humans

NTP (National Toxicology Program)

Reasonably Anticipated - Reasonably Anticipated to be a Human Carcinogen

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

| | |
|---------------------------------|--|
| STOT - single exposure | (Single Exposure): Category 1 - Causes damage to cardiovascular system including elevated carboxyhemoglobin levels, Category 3 - Narcotic Effects, Category 3 - Respiratory Tract Irritation |
| STOT - repeated exposure | Category 2 - Blood, Liver. |
| MUTAGENICITY | Company's GHS Self-Classification for mutagen category: Not classified as a mutagen. Positive results have been observed in the Ames test. In mammalian systems, responses have generally been negative. |
| DEVELOPMENTAL TOXICITY | Not classified as a developmental or reproductive toxin per GHS criteria. May cross the placenta. May be excreted in breast milk. No significant developmental effects were observed in female rats and mice exposed to 1,250 ppm during gestation. A similar result was observed in rats exposed to 4,500 ppm before and during gestation. A two-generation inhalation study showed no adverse reproductive effects in rats exposed to as much as 1,500 ppm for 14 weeks. |
| Other Adverse Effects | In confined or poorly ventilated areas, vapors can readily accumulate and can cause unconsciousness and death. Excessive exposure may cause irritation to upper respiratory tract (nose and throat). May cause carboxyhemoglobinemia, thereby impairing the blood's ability to transport oxygen. Minimal anesthetic or narcotic effects may be seen in the range of 500-1000 ppm methylene chloride. Higher levels over 1000 ppm can cause dizziness, drunkenness, and as low as 10,000 ppm, unconsciousness and death. These high levels may also cause cardiac arrhythmias (irregular heartbeats). |
| ASPIRATION HAZARD | Category 2 - May be harmful if swallowed and enters airways |
| GHS HEALTH HAZARDS | <p>GHS: CONTACT HAZARD - SKIN: Category 2 - Causes skin irritation</p> <p>GHS: CONTACT HAZARD - EYE: Category 2A - Causes serious eye irritation</p> <p>GHS: ACUTE TOXICITY - ORAL: Category 4 - Harmful if swallowed</p> <p>GHS: TARGET ORGAN TOXICITY (SINGLE EXPOSURE): Category 1 - Causes damage to cardiovascular system including elevated carboxyhemoglobin levels</p> <p>Category 3 - May cause drowsiness or dizziness</p> <p>Category 3 - May cause respiratory tract irritation</p> <p>GHS: TARGET ORGAN TOXICITY (REPEATED EXPOSURE): Category 2 - May cause damage to Blood and Hepatic System through prolonged or repeated exposures</p> <p>GHS: ASPIRATION HAZARD: Category 2 - May be harmful if swallowed and enters airways</p> <p>GHS: CARCINOGENICITY: Category 2 - Suspected of causing cancer</p> |
| IRRITATION DATA | Methylene Chloride: 810 mg/24 hour(s) skin-rabbit severe; 100 mg/24 hour(s) skin-rabbit moderate; 162 mg eyes-rabbit moderate; 10 mg eyes-rabbit mild; 500 mg/24 hour(s) eyes-rabbit mild Skin Absorbent / Dermal Route: Yes. |
| CARCINOGENICITY COMMENT | Methylene chloride is carcinogenic in experimental animals at a relatively high dose, by route(s) of administration, at site(s), of histologic type(s), or by mechanism(s) that are not considered relevant to worker exposure. Available epidemiological studies do not confirm an increased risk of cancer in humans. Available evidence suggests that this material is not likely to cause cancer in humans except under uncommon or unlikely routes or levels of exposure. |

Numerical measures of toxicity

Not determined

12. ECOLOGICAL INFORMATION

Ecotoxicity

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Component Information

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to microorganisms | Crustacea |
|----------------------------|---|---|---|---|
| Dichloromethane 75-09-2 | 500: 96 h Pseudokirchneriella subcapitata mg/L EC50 500: 72 h Pseudokirchneriella subcapitata mg/L EC50 | 140.8 - 277.8: 96 h Pimephales promelas mg/L LC50 flow-through 262 - 855: 96 h Pimephales promelas mg/L LC50 static 193: 96 h Lepomis macrochirus mg/L LC50 static 193: 96 h Lepomis macrochirus mg/L LC50 flow-through | EC50 = 1 mg/L 24 h EC50 = 2.88 mg/L 15 min | 1532 - 1847: 48 h Daphnia magna mg/L EC50 Static 190: 48 h Daphnia magna mg/L EC50 |

Component Ecotoxicity

96 Hr LC50 Pimephales promelas: 140.8 - 277.8 mg/L [flow-through]
 96 Hr LC50 Pimephales promelas: 262 - 855 mg/L [static]
 96 Hr LC50 Lepomis macrochirus: 193 mg/L [static]
 96 Hr LC50 Lepomis macrochirus: 193 mg/L [flow-through]
 48 Hr EC50 Daphnia magna: 190 mg/L
 48 Hr EC50 Daphnia magna: 1532 - 1847 mg/L
 96 Hr EC50 Pseudokirchneriella subcapitata: >500 mg/L
 72 Hr EC50 Pseudokirchneriella subcapitata: >500 mg/L
 48 Hr LC50 (filter paper) Eisenia foetida: 0.3 mg/cm²
 48 Hr LC50 (filter paper) Eisenia foetida: 304 mg/cm²
 96 Hr LC50 Fathead minnow: 310 mg/L (static)
 96 Hr LC50 Bluegill sunfish: 220 mg/L (static)
 96 Hr LC50 Mysid Shrimp: 256 mg/L
 48 Hr LC50 Daphnia magna: 224 mg/L

Persistence/Degradability

AIR: This material released to the atmosphere will degrade by reaction with hydroxyl radicals with a half-life of several months. It is not subject to direct photo oxidation. SOIL: On land is expected to evaporate rapidly into the atmosphere due to its high vapor pressure. It is poorly adsorbed to soil and can leach into the groundwater. Calculated Adsorption Coefficient (log KOC) is 1.

WATER: This material is subject to rapid evaporation, with estimated evaporative half-lives ranging from 3 to 5.6 hours under moderate mixing condition. This material has a negligible rate of hydrolysis.

Bioaccumulation

Bioconcentration potential in aquatic organisms is low with BCF of 2.

Mobility

| Chemical Name | Partition Coefficient |
|----------------------------|-----------------------|
| Dichloromethane 75-09-2 | 1.25 |

Other Adverse Effects

Not determined

13. DISPOSAL CONSIDERATIONS**Waste Treatment Methods****Disposal of Wastes**

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated Packaging

Disposal should be in accordance with applicable regional, national and local laws and regulations.

US EPA Waste Number

| Chemical Name | RCRA | RCRA - Basis for Listing | RCRA - D Series Wastes | RCRA - U Series Wastes |
|----------------------------|------|--|------------------------|------------------------|
| Dichloromethane 75-09-2 | U080 | Included in waste streams: F001, F002, F024, F025, F039, K009, K010, K156, K157, K158 | | U080 |

| Chemical Name | RCRA - Halogenated Organic Compounds | RCRA - P Series Wastes | RCRA - F Series Wastes | RCRA - K Series Wastes |
|----------------------------|--------------------------------------|------------------------|--|------------------------|
| Dichloromethane 75-09-2 | Category I - Volatiles | | Toxic waste waste number F025 Waste description: Condensed light ends, spent filters and filter aids, and spent desiccant wastes from the production of certain chlorinated aliphatic hydrocarbons, by free radical catalyzed processes. These chlorinated aliphatic hydrocarbons are those having carbon chain lengths ranging from one to and including five, with varying amounts and positions of chlorine substitution. | |

California Hazardous Waste Status

| Chemical Name | California Hazardous Waste Status |
|----------------------------|-----------------------------------|
| Dichloromethane 75-09-2 | Toxic |

14. TRANSPORT INFORMATION**Note**

Please see current shipping paper for most up to date shipping information, including exemptions and special circumstances.

DOT

UN/ID No UN1593
 Proper Shipping Name Dichloromethane mixture
 Hazard Class 6.1
 Packing Group III
 Reportable Quantity (RQ) 1000 lbs for Dichloromethane

IATA

UN/ID No UN1593
 Proper Shipping Name Dichloromethane mixture
 Hazard Class 6.1
 Packing Group III

IMDG

UN/ID No UN1593
 Proper Shipping Name Dichloromethane mixture
 Hazard Class 6.1
 Packing Group III

15. REGULATORY INFORMATION

International Inventories

| Chemical Name | TSCA | DSL | NDSL | EINECS | ELINCS | ENCS | IECSC | KECL | PICCS | AICS |
|-----------------|---------|-----|------|---------|--------|---------|-------|---------|-------|------|
| Dichloromethane | Present | X | | Present | | Present | X | Present | X | X |

Legend:

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory

DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances

ENCS - Japan Existing and New Chemical Substances

IECSC - China Inventory of Existing Chemical Substances

KECL - Korean Existing and Evaluated Chemical Substances

PICCS - Philippines Inventory of Chemicals and Chemical Substances

AICS - Australian Inventory of Chemical Substances

TSCA 12(b):

Methylene Chloride is subject to TSCA 12(b) annual reporting requirements (per country) De minimis reporting level: 0.1%
TSCA Section(s): 6(a).

TSCA (Toxic Substance Control Act)

TSCA section 6(a). March 27, 2019 Final Rule published for 40 CFR part 751.

Effective May 28, 2019.

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal

CERCLA

| Chemical Name | Hazardous Substances RQs | CERCLA/SARA RQ | Reportable Quantity (RQ) |
|----------------------------|--------------------------|----------------|--|
| Dichloromethane 75-09-2 | 1000 lb 1 lb | | RQ 1000 lb final RQ RQ 454 kg final RQ RQ 1 lb final RQ RQ 0.454 kg final RQ |

SARA 311/312 Hazard Categories

| | |
|-----------------------------------|-----|
| Acute Health Hazard | Yes |
| Chronic Health Hazard | Yes |
| Fire Hazard | No |
| Sudden Release of Pressure Hazard | No |
| Reactive Hazard | No |

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

| Chemical Name | CAS No | Weight-% | SARA 313 - Threshold Values % |
|---------------------------|---------|----------|-------------------------------|
| Dichloromethane - 75-09-2 | 75-09-2 | 60-100 | 0.1 |

CWA (Clean Water Act)

| Chemical Name | CWA - Reportable Quantities | CWA - Toxic Pollutants | CWA - Priority Pollutants | CWA - Hazardous Substances |
|-----------------|-----------------------------|------------------------|---------------------------|----------------------------|
| Dichloromethane | | X | X | |

US State Regulations**California Proposition 65**

This product contains the following Proposition 65 chemicals.

| Chemical Name | California Proposition 65 |
|---------------------------|---------------------------|
| Dichloromethane - 75-09-2 | Carcinogen |

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania |
|----------------------------|------------|---------------|--------------|
| Dichloromethane 75-09-2 | X | X | X |

| |
|------------------------------|
| 16. OTHER INFORMATION |
|------------------------------|

| | | | | |
|--------------------|-----------------------|---------------------|-------------------------|----------------------------|
| <u>NFPA</u> | Health Hazards | Flammability | Instability | Special Hazards |
| | 2 | 1 | 0 | Not determined |
| <u>HMIS</u> | Health Hazards | Flammability | Physical Hazards | Personal Protection |
| | 2 | 1 | 0 | Not determined |

Issue Date: 15-May-2012
Revision Date: October 8th, 2020
Revision Note: Added GHS codes, additional information in each section.

Disclaimer

The supplier disclaims all expressed or implied warranties of merchantability or fitness for a specific use, with respect to the product or the information provided herein, except for conformation to contracted specifications. All information appearing herein is based upon data obtained from manufacturers and/or recognized technical sources. While the information is believed to be accurate, we make no representations as to its accuracy or sufficiency. Conditions of use are beyond our control, and therefore users are responsible for verifying the data under their own operating conditions to determine whether the product is suitable for their particular purposes and they assume all risks of their handling and disposal of the product. Users also assume all risks in regards to the publication or use of, or reliance upon information contained herein. This information relates only to the product designated herein, and does not relate to its use in combination with any other material or process.

End of Safety Data Sheet



SAFETY DATA SHEET

1. Identification

| | |
|---|---|
| Product identifier | Honing & Cutting Oil |
| Other means of identification | |
| Product code | SL2523 |
| Recommended use | Honing and cutting oil |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Manufactured or sold by: | |
| Company name | CRC Industries, Inc. |
| Address | 885 Louis Dr. Warminster, PA 18974 US |
| Telephone | |
| General Information | 215-674-4300 |
| Technical Assistance | 800-521-3168 |
| Customer Service | 800-272-4620 |
| 24-Hour Emergency (CHEMTREC) | 800-424-9300 (US) 703-527-3887 (International) |
| Website | www.crcindustries.com |

2. Hazard(s) identification

| | | |
|------------------------------|---------------------|------------|
| Physical hazards | Not classified. | |
| Health hazards | Sensitization, skin | Category 1 |
| Environmental hazards | Not classified. | |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--|---|
| Signal word | Warning |
| Hazard statement | May cause an allergic skin reaction. |
| Precautionary statement | |
| Prevention | Avoid breathing vapors. Contaminated work clothing must not be allowed out of the workplace. Wear protective gloves. |
| Response | If on skin: Wash with plenty of water. If skin irritation or rash occurs: Get medical attention. Wash contaminated clothing before reuse. |
| Storage | Store away from incompatible materials. |
| Disposal | Dispose of contents/container in accordance with local/regional/national regulations. |
| Hazard(s) not otherwise classified (HNOC) | None known. |

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|---------------------------------|-------------------|----------|
| Distillates (petroleum), hydrotreated heavy paraffinic | | 64742-54-7 | 80 - 90 |

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|-------|
| Sulfonic acids, petroleum, calcium salts | | 61789-86-4 | 1 - 5 |

Specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. If breathing is difficult, trained personnel should give oxygen. Do not use mouth-to-mouth method if victim inhaled the substance. Call a physician if symptoms develop or persist. |
| Skin contact | Remove contaminated clothing immediately and wash skin with soap and water. In case of eczema or other skin disorders: Seek medical attention and take along these instructions. Wash contaminated clothing before reuse. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Continue rinsing. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth. Drink 1 or 2 glasses of water. Never give anything by mouth to a victim who is unconscious or is having convulsions. Do not induce vomiting without advice from poison control center. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. If ingestion of a large amount does occur, call a poison control center immediately. |
| Most important symptoms/effects, acute and delayed | Irritation of eyes and mucous membranes. May cause an allergic skin reaction. Rash. Skin irritation. Dermatitis. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Use fire-extinguishing media appropriate for surrounding materials. |
| Unsuitable extinguishing media | None known. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | The product is immiscible with water and will spread on the water surface. Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Prevent entry into waterways, sewer, basements or confined areas. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Avoid contact with eyes, skin, and clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Avoid release to the environment. Observe good industrial hygiene practices. Use care in handling/storage. For product usage instructions, please see the product label. |
| Conditions for safe storage, including any incompatibilities | Keep container tightly closed. Store away from incompatible materials (see Section 10 of the SDS). Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. |

8. Exposure controls/personal protection

Occupational exposure limits

U.S. - OSHA

Components

Type

Value

Distillates (petroleum),
hydrotreated heavy
paraffinic (CAS 64742-54-7)

TWA

5 mg/m³

ACGIH

Components

Type

Value

Form

Distillates (petroleum),
hydrotreated heavy
paraffinic (CAS 64742-54-7)

TWA

5 mg/m³

Inhalable fraction

US. ACGIH Threshold Limit Values

Components

Type

Value

Form

Distillates (petroleum),
hydrotreated heavy
paraffinic (CAS 64742-54-7)

TWA

5 mg/m³

Inhalable fraction.

U.S. - NIOSH

Components

Type

Value

Form

Distillates (petroleum),
hydrotreated heavy
paraffinic (CAS 64742-54-7)

STEL

10 mg/m³

Mist

TWA

5 mg/m³

Mist

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear protective gloves such as: Nitrile. Rubber.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If engineering controls are not feasible or if exposure exceeds the applicable exposure limits, use a NIOSH-approved cartridge respirator with an organic vapor cartridge. Use a self-contained breathing apparatus in confined spaces and for emergencies. Air monitoring is needed to determine actual employee exposure levels.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Contaminated work clothing should not be allowed out of the workplace.

9. Physical and chemical properties

Appearance

Physical state

Liquid.

Form

Grease.

Color

Red.

Odor

Sulphurous. Mild petroleum.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

Not available.

Initial boiling point and boiling range

599 °F (315 °C)

Flash point

378 °F (192.2 °C) Pensky-Martens Closed Cup

| | |
|---|-------------------------|
| Evaporation rate | Slow. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Relative density | 0.89 |
| Solubility (water) | Insoluble. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity (kinematic) | 26.7 mm ² /s |
| Viscosity temperature | 104 °F (40 °C) |
| Percent volatile | 85 % estimated |

10. Stability and reactivity

| | |
|------------------------------------|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | Carbon oxides. Metal oxides. |

11. Toxicological information

Information on likely routes of exposure

| | |
|--------------|---|
| Inhalation | Health injuries are not known or expected under normal use. |
| Skin contact | May cause an allergic skin reaction. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics Rash. Irritation of eyes and mucous membranes. Skin irritation. May cause an allergic skin reaction. Dermatitis.

Information on toxicological effects

Acute toxicity May cause an allergic skin reaction.

| Product | Species | Test Results |
|----------------------|---------|-----------------------|
| Honing & Cutting Oil | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | 5882 mg/kg estimated |
| Oral | | |
| LD50 | Rat | 17647 mg/kg estimated |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--|
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. |
| Serious eye damage/eye irritation | Direct contact with eyes may cause temporary irritation. |
| Respiratory sensitization | Not a respiratory sensitizer. |

| | |
|--|--|
| Skin sensitization | May cause an allergic skin reaction. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| Not available. | |
| US. National Toxicology Program (NTP) Report on Carcinogens | |
| Not available. | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not classified. |
| Chronic effects | Prolonged exposure may cause chronic effects. |

12. Ecological information

| | |
|--------------------------------------|---|
| Ecotoxicity | There is insufficient information to determine the scope of the environmental effects this material may cause. |
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | No data available. |
| Mobility in soil | No data available. |
| Other adverse effects | No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component. |

13. Disposal considerations

| | |
|--|---|
| Disposal of waste from residues / unused products | This product is not a RCRA hazardous waste (See 40 CFR Part 261.20 – 261.33). Empty containers may be recycled. Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose in accordance with all applicable regulations. |
| Hazardous waste code | Not regulated. |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

| | |
|-------------|-----------------------------------|
| DOT | Not regulated as dangerous goods. |
| IATA | Not regulated as dangerous goods. |
| IMDG | Not regulated as dangerous goods. |

15. Regulatory information

| | |
|---|---|
| US federal regulations | This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200. All components are on the U.S. EPA TSCA Inventory List. |
| TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D) | |
| Not regulated. | |
| US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| Not listed. | |
| SARA 304 Emergency release notification | |
| Not regulated. | |
| US EPCRA (SARA Title III) Section 313 - Toxic Chemical: Listed substance | |
| Not listed. | |

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

CERCLA Hazardous Substances: Reportable quantity

Not listed.

Spills or releases resulting in the loss of any ingredient at or above its RQ require immediate notification to the National Response Center (800-424-8802) and to your Local Emergency Planning Committee.

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.**Food and Drug Administration (FDA)** Not regulated.**Superfund Amendments and Reauthorization Act of 1986 (SARA)**

| | |
|--------------------------|------------------------|
| Section 311/312 | Immediate Hazard - Yes |
| Hazard categories | Delayed Hazard - No |
| | Fire Hazard - No |
| | Pressure Hazard - No |
| | Reactivity Hazard - No |

| | |
|---|----|
| SARA 302 Extremely hazardous substance | No |
|---|----|

US state regulations**US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))**

Distillates (petroleum), hydrotreated heavy paraffinic (CAS 64742-54-7)

US. Massachusetts RTK - Substance List

None.

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. Rhode Island RTK

None.

US. New Jersey Worker and Community Right-to-Know Act

Not listed.

US. Pennsylvania Worker and Community Right-to-Know Law

Not listed.

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

Volatile organic compounds (VOC) regulations**EPA**

| | |
|---------------------------------------|----------------|
| VOC content (40 CFR 51.100(s)) | Not determined |
|---------------------------------------|----------------|

| | |
|--|---------------|
| Consumer products (40 CFR 59, Subpt. C) | Not regulated |
|--|---------------|

State

| | |
|--------------------------|---|
| Consumer products | This product is regulated as a Cutting or Tapping Oil (non-aerosol). This product is compliant for use in all 50 states. Local restriction: This product cannot be used in the South Coast Air Quality Management District of California. |
|--------------------------|---|

| | |
|-------------------------|-------|
| VOC content (CA) | 2.9 % |
|-------------------------|-------|

| | |
|--------------------------|-------|
| VOC content (OTC) | 2.9 % |
|--------------------------|-------|

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------------|--|
| Issue date | 10-28-2015 |
| Revision date | 01-27-2016 |
| Prepared by | Allison Cho |
| Version # | 02 |
| Further information | Not available. |
| HMIS® ratings | Health: 1 Flammability: 1 Physical hazard: 0 Personal protection: B |
| NFPA ratings | Health: 1 Flammability: 1 Instability: 0 |

NFPA ratings



Disclaimer

The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. This information is accurate to the best of CRC Industries' knowledge or obtained from sources believed by CRC to be accurate. Before using any product, read all warnings and directions on the label. For further clarification of any information contained on this (M)SDS consult your supervisor, a health & safety professional, or CRC Industries.

Safety Data Sheet

Anchorlube G-771

8/26/2018

SECTION 1: IDENTIFICATION

Product Name: ANCHORLUBE G-771

Manufacturer: Anchor Chemical Company
777 Canterbury Road
Westlake, OH 44145

Information Phone Number: (440) 871-1660

Fax: (440) 871-0665

Emergency Phone Number: (440) 871-1660

Product Use: Metalworking lubricant/coolant for cutting metals

Restriction on Use: None known

SDS Date of Preparation: 8/26/2018

SECTION 2: HAZARDS IDENTIFICATION

GHS Classification (Hazcom-2012):

| Physical | Health |
|---------------|---------------|
| Not Hazardous | Not Hazardous |

Labeling Elements:

None required

Hazard statement(s)
None

Precautionary statement(s)
None

Other Hazards: None

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS# | % |
|---------------------------|-------------|------|
| Non-hazardous Ingredients | Proprietary | 100% |

The specific identity and/or exact percentage of composition has been withheld as a trade secret.

SECTION 4: FIRST AID MEASURES

Eye: Flush eyes with water, holding the eyelids apart. Get medical attention if irritation develops or persists.

Skin: Wash thoroughly with plenty of water. Get medical attention if irritation persists.

Inhalation: Remove to fresh air and keep comfortable for breathing. If irritation occurs, get medical attention.

Ingestion: If large amounts ingested, seek medical attention.

Safety Data Sheet

Anchorlube G-771

8/26/2018

Most Important symptoms and effects, both acute and delayed: May cause slight eye and skin irritation. Inhalation of vapors or mist may cause respiratory irritation.

Indication of any immediate medical attention and special treatment needed: Immediate medical attention generally not required.

SECTION 5: FIRE-FIGHTING MEASURES

Suitable and Unsuitable Extinguishing Media: Use media that is suitable for the surrounding fire.

Special Hazards Arising from the Chemical: This product is not classified as combustible. Thermal decomposition may yield oxides of carbon and unidentified compounds.

Special Equipment and Precautions for Fire-Fighters: Wear NIOSH approved positive pressure, self-contained breathing apparatus and full protective clothing. Cool fire exposed containers with water.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures: Wear appropriate personal protective equipment. Use caution: slip hazard.

Environmental Hazards: Report spills and releases as required to appropriate authorities.

Methods and Material for Containment and Cleaning Up: Because of its viscous nature, this product is not expected to leak or spill. Collect liquid spill with an inert absorbent material and place into a suitable container for disposal. Clean area thoroughly.

SECTION 7: HANDLING AND STORAGE

Precautions for Safe Handling: Avoid contact with eyes. Avoid prolonged skin contact. Avoid inhalation of vapor or mist. Do not transfer to unlabeled containers.

Conditions for Safe Storage, Including any Incompatibilities: Store at room temperature away from extreme heat and open flames.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

| Chemical Name | Exposure Limits |
|---------------------------|------------------|
| Non-hazardous Ingredients | None Established |

Appropriate Engineering Controls: Use with adequate general or local exhaust ventilation to minimize exposure levels. If the product is used at high temperatures, local exhaust ventilation may be required.

Individual Protection Measures:

Respiratory Protection: In operations where exposures are excessive, a NIOSH approved respirator with organic vapor/particulate cartridges or supplied air respirator appropriate for the form and concentration of the contaminants should be used. Selection and use of respiratory equipment must be in accordance with OSHA 1910.134 and good industrial hygiene practice.

Skin Protection: If skin irritation occurs, impervious gloves such as rubber or nitrile recommended where needed to avoid skin contact

Eye Protection: Safety glasses or goggles recommended where needed to avoid eye contact.

Safety Data Sheet

Anchorlube G-771

8/26/2018

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

| | |
|--|---|
| Appearance: Green semi paste | Vapor Density (air = 1): Not available |
| Odor: Slight almond odor | Specific Gravity: 1.0365 |
| Odor Threshold: Not established | Water Solubility: Dispersable |
| pH: 6.0-6.5 | Octanol/Water Partition Coefficient: Not available |
| Melting Point/Freezing Point: 0°C (32°F) | Autoignition Temperature: N/A |
| Boiling Point: 107.22° (225°F) | Decomposition Temperature: Not available |
| Flash Point: N/A | Viscosity: Not available |
| Evaporation Rate: Not available | Explosion Properties: Not explosive |
| Flammable Limits: LEL: Not established UEL: Not established | Oxidizing Properties: Not oxidizing |
| Vapor Pressure: Not established | Flammability (solid, gas): N/A |

SECTION 10: STABILITY AND REACTIVITY

Reactivity: Not reactive under normal conditions of use.

Chemical Stability: Stable under normal storage and handling conditions.

Possibility of Hazardous Reactions: None known

Conditions to Avoid: Extreme heat and freezing.

Incompatible Materials: Avoid magnesium as this product is water based.

Hazardous Decomposition Products: Thermal decomposition may yield oxides of carbon and other unidentified compounds.

SECTION 11: TOXICOLOGICAL INFORMATION

Potential Health Effects:

Eye: May cause mild irritation.

Skin: Prolonged contact may cause irritation and drying of the skin.

Inhalation: No adverse effects expected at ambient temperatures. Inhalation of vapors and fumes from thermal decomposition may cause respiratory irritation.

Ingestion: Swallowing may cause gastrointestinal irritation, nausea, vomiting, diarrhea.

Chronic Hazards: Prolonged skin contact may cause an allergic reaction.

Carcinogen Status: None of the other components of this product are listed as carcinogens by OSHA, IARC, NTP, or the EU CLP.

Acute Toxicity Values:

No data available. Components are not acutely toxic.

Safety Data Sheet

Anchorlube G-771

8/26/2018

SECTION 12: ECOLOGICAL INFORMATION

Ecotoxicity:

No data available. This product is not expected to be harmful to the environment

Persistence and Degradability: Product is degradable. Unsealed will begin to degrade rapidly. Shelf life is three years if stored capped at room temperature.

Bioaccumulative Potential: No data available

Mobility in Soil: No data available

Other Adverse Effects: None known

SECTION 13: DISPOSAL CONSIDERATIONS

Dispose in accordance with all local, regional and national regulations.

SECTION 14: TRANSPORT INFORMATION

DOT Proper Shipping Name: Not regulated

DOT Technical Name: None

DOT Hazard Class: None

UN Number: None

DOT Labels Required (49CFR172.101): None

IMDG Shipping Description: Not regulated

ID Number: None

Hazard Class: None

Packing Group: None

Labels Required: None

Marking Required: None

Placards Required: None

SECTION 15: REGULATORY INFORMATION

Safety, health, and environmental regulations specific for the product in question.

CERCLA Hazardous Substances (Section 103)/RQ: This product is not subject to CERCLA reporting requirements. Many states have more stringent release reporting requirements. Report spills required under federal, state and local regulations.

SARA Hazard Category (311/312): Not hazardous

SARA 313: This product contains the following chemicals regulated under SARA Title III, section 313: None.

EPA TSCA Inventory: All of the components of this product are listed on the TSCA inventory.

CALIFORNIA PROPOSITION 65: No listed chemicals.

This product is not hazardous in accordance with OSHA HAZCOM 2012, GHS and WHMIS 2015.

Safety Data Sheet

Anchorlube G-771

8/26/2018

| |
|--------------------------------------|
| SECTION 16: OTHER INFORMATION |
|--------------------------------------|

Revision Summary: New format to comply with OSHA Hazcom 2012

SDS Date of Preparation/Revision: 5/6/2015

Disclaimer: Information contained herein is presented in good faith and is based on data believed to be accurate. However no warranty is expressed or implied regarding this information or the results obtained from the use of this Safety Data Sheet, whether it originates with Anchor Chemical name or others. This Safety Data Sheet relates only to the specific material designated herein. It does not relate to use with other material or processes. This information is supplied with the condition that the user will make appropriate determination as to its suitability for their purpose prior to using it.

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® P-70™ Low VOC Primer for PVC and CPVC Plastic Pipe
PRODUCT USE: Low VOC Primer for PVC and CPVC Plastic Pipe
SUPPLIER:

MANUFACTURER: IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | | Environmental | | Physical | |
|----------------------|------------|-------------------|------------|------------------|------------|
| Acute Oral Toxicity: | Category 4 | Acute Toxicity: | None Known | Flammable Liquid | Category 2 |
| Skin Irritation: | Category 3 | Chronic Toxicity: | None Known | | |
| Skin Sensitization: | NO | | | | |
| Carcinogenicity: | Category 2 | | | | |
| Eye: | Category 2 | | | | |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 2B

| Hazard Statements | Precautionary Statements |
|--|---|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H332: Harmful if inhaled H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer EUH019: May form explosive peroxides | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------------------|----------|-----------|------------------------------|------------------------------|
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 01-2119444314-46-0000 | 45 - 59 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 01-2119457290-43-0000 | 19 - 29 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 5 - 15 |
| Acetone | 67-64-1 | 200-662-2 | 01-2119471330-49-0000 | 5 - 20 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.
Likely Routes of Exposure: Inhalation, Eye and Skin Contact
Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.
Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

| | | | | |
|--|--|--------------|------|------------|
| Suitable Extinguishing Media: | Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. | HMIS | NFPA | 0-Minimal |
| Unsuitable Extinguishing Media: | Water spray or stream. | Health | 2 | 1-Slight |
| Exposure Hazards: | Inhalation and dermal contact | Flammability | 3 | 2-Moderate |
| Combustion Products: | Oxides of carbon and smoke | Reactivity | 0 | 3-Serious |
| | | PPE | B | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH 8 hour TLV | ACGIH 15 min STEL | OSHA 8 hour PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8 hour PEL | CAL/OSHA Ceiling | CAL/OSHA 15 min STEL |
|------------------|---------------------------|---------------------|----------------------|--------------------|---------------------|---------------------|------------------------|---------------------|-------------------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |
| | Acetone | 250 ppm | 500 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® P-70™ Low VOC Primer for PVC and CPVC Plastic Pipe

Date Revised: JAN 2019
Supersedes: DEC 2018

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Clear or purple, thin liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ethereal | Boiling Range: | 56°C (133°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 56°C (133°F) Based on first boiling component: Acetone | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 12.8% based on Acetone |
| Flash Point: | -20°C (-4°F) TCC based on Acetone | Vapor Pressure: | 190 mm Hg @ 20°C (68°F) Acetone |
| Specific Gravity: | 0.858 @ 23°C (73°F) | Vapor Density: | >2.0 (Air = 1) |
| Solubility: | Solvent portion soluble in water. | Other Data: Viscosity: | Water-thin |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 550 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

Stability: Stable

Hazardous decomposition products: None in normal use. When forced to burn, this product gives off oxides of carbon and smoke.

Conditions to avoid: Keep away from heat, sparks, open flame and other ignition sources.

Incompatible Materials: Oxidizers, strong acids and bases, amines, ammonia

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | | |
|---------------------------|---|--|-------------|----------------------|
| Toxicity: | | LD50 | LC50 | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | | |
| Acetone | Oral: 5800 mg/kg (rat) | Inhalation 50,100 mg/m ³ (rat) | | STOT SE3 |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity: None Known

Mobility in Soil: If released into the environment, this product can move rapidly through the soil.

Degradability: Not available

Bioaccumulation: Minimal to none.

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|---|
| Proper Shipping Name: | Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1993 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

| EXCEPTION for Ground Shipping |
|---|
| DOT Limited Quantity: Up to 1L per inner packaging, 30 kg gross weight per package. Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D". |

| TDG INFORMATION |
|--|
| TDG CLASS: FLAMMABLE LIQUID 3 SHIPPING NAME: Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) UN NUMBER/PACKING GROUP: UN 1993, PG II |

SECTION 15 - REGULATORY INFORMATION

Precautionary Label Information: Highly Flammable, Irritant, (Carc.-THF) Cat. 2
Symbols: F, Xi
Risk Phrases: R11: Highly flammable.
R20: Harmful by inhalation.
R36/37: Irritating to eyes and respiratory system.
Safety Phrases: S9: Keep container in a well-ventilated place.
S16: Keep away from sources of ignition - No smoking.
S25: Avoid contact with eyes.
Ingredient Listings: USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS)
R66: Repeated exposure may cause skin dryness or cracking
R67: Vapors may cause drowsiness and dizziness
S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
S33: Take precautionary measures against static discharges.
S46: If swallowed, seek medical advice immediately and show this container or label.

Compliance Statement: This SDS was prepared to be in accordance with:
US OSHA Hazard Communication Standard 29 CFR 1910.1200 (Rev 2012)
European Regulation (EC) No (EU) 2015/830 on classification, labelling and packaging of substances and mixtures

SECTION 16 - OTHER INFORMATION

Specification information:

Department issuing data sheet: IPS, Safety Health & Environmental Affairs

E-mail address: <EHSinfo@ipscorp.com>

Training necessary: Yes, training in practices and procedures contained in product literature.

Reissue date / reason for reissue: 1/11/2019 / Updated GHS Standard Format

Intended Use of Product: Primer for PVC and CPVC Plastic Pipe

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

SAFETY DATA SHEET

Section 1. IDENTIFICATION

Product Identifier

Product Name GASOILA® SOFT SET.

Other means of Identification

Product Code SS01, SS02, SS04, SS08, SS16, SS32, SB32, SS28..

Recommended Use Pipe Thread Sealant.

Recommended Restrictions None Known.

Manufacturer

Company Name Federal Process Corporation
Address 4520 Richmond Road
Cleveland OH 44128
Telephone 1-800-846-7325

Emergency Telephone Number: Call Chemtrec at 1-800-424-9300

Section 2. HAZARDS IDENTIFICATION

PHYSICAL STATE: Liquid

Classification:

| | |
|-----------------------------------|------------|
| Flammable | Category 3 |
| Serious eye damage/eye irritation | Category 2 |
| Skin sensitization | Category 1 |

Signal Word:

Warning



Hazard Statements:

H226 - Flammable liquid and vapor.
H302 – Harmful if swallowed.
H319 – Causes serious eye irritation.
H317 – May cause an allergic skin reaction

Revised: 26th March, 2018
Page 1 of 8

Precautionary Statements:

GASOILA®SOFT SET

Prevention: P210 – Keep away heat, sparks, open flames, and hot surfaces. No smoking.
P261 – Avoid breathing dust/fume/gas/mist/vapors/spray.
P272 – Contaminated clothing should not be allowed out of the workplace.

Response: P305 + P351 + P338 – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P301 + P331 + P310 – IF SWALLOWED: Do NOT induce vomiting. Immediately call POISON CENTER or doctor/physician.
P337 + P313 – If eye irritation persists: Get medical advice/attention.
P332 + P313 – If skin irritation or rash occurs: Get medical advice/attention.

Disposal: P501- Dispose of contents/container to an approved waste disposal plant.

Other Hazards: Toxic to aquatic life with long lasting effects.

Unknown Acute Toxicity: 2% of the mixture consists of ingredient(s) of unknown toxicity.

Section 3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS Number | Weight % |
|-------------------|------------|----------|
| Isopropyl alcohol | 67-63-0 | <8.0 |
| 2 butoxyethanol | 111-76-2 | <5.0 |

Section 4. FIRST AID MEASURES

First Aid Measures:

Eye Contact Rinse thoroughly with plenty of water, for 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical advice/attention.

Skin Contact If skin irritation occurs, rinse affected area with water. If skin irritation or rash occurs: Get medical advice/attention.

Inhalation Remove to fresh air. If signs/symptoms continue, get medical attention. Give oxygen or artificial respiration as needed.

Revised: 26th March, 2018
Page 2 of 8

Ingestion Do NOT induce vomiting Get medical attention immediately. Rinse mouth with water. Never give anything by mouth to an unconscious individual.

Most Important Symptoms and effects:

Symptoms Direct contact with eyes may cause temporary irritation.
Do NOT ingest.

Section 5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media: Use foam, dry chemical, carbon dioxide or water fog.

Unsuitable Extinguishing Media: Not determined.

Specific Hazards Arising from the Chemical:

Carbon oxides expected to be the primary hazardous combustion product.

Protective Equipment and Precautions for Firefighters:

As in any fire, wear self-contained breathing apparatus and other protective clothing. (approved or equivalent) and full protective gear.

Section 6. ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures:

Personal Precautions: Use personal protective equipment as required. Keep unnecessary personnel away.

Methods and Material for Containment and Cleaning Up:

Methods for Containment: Prevent further leakage or spillage if safe to do so.

Methods for Clean-Up: Keep in suitable, closed containers for disposal.

Section 7. HANDLING AND STORAGE

Precautions for Safe Handling:

Advice on Safe Handling: Avoid breathing vapors or mists. Contaminated work-clothing should not be allowed out of the workplace.

Conditions for Safe Storage, including
Any Incompatibilities:

Storage Conditions: Keep containers tightly closed in a dry, cool and well-ventilated place.
Do not store near heat, sparks, or open flames.
KEEP OUT OF REACH OF CHILDREN.

Incompatible Materials: None known based on information supplied.

Section 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines:

| Chemical Name | ACGIH TWA | ACGIH STEL | OSHA TWA |
|------------------------------------|-----------|------------|----------|
| Isopropyl alcohol (CAS 67-63-0) | 200 ppm | 400 ppm | 400 ppm |
| 2 butoxyethanol (CAS 111-76-2) | 20 ppm | 200 mg/g | x |

Appropriate Engineering Controls:

Engineering Controls: Apply technical measures to comply with the occupational exposure limits.

Individual Protection Measures, such as
Personal Protective Equipment:

Eye/Face Protection: Avoid contact with eyes.

Skin and Body Protection: No protective equipment is needed under normal use conditions.

Respiratory Protection: Ensure adequate ventilation, especially in confined areas. If confined in poorly ventilated areas use NIOSH/MSHA

General Hygiene Considerations: Handle in accordance with good industrial hygiene and safety practice. Wash exposed areas thoroughly before eating, drinking, smoking or leaving work area. Launder contaminated clothing before reusing.

Section 9. PHYSICAL AND CHEMICAL PROPERTIES

Information on Basic Physical and Chemical Properties

Physical State: Liquid. Odor: Mild alcoholic.
Appearance: Viscous liquid. Odor Threshold: Not available.
Color: Blue green.

| <u>Property</u> | <u>Values</u> |
|------------------------------|-----------------|
| pH | N/A |
| Melting Point/Freezing Point | Not determined. |
| Boiling Point/Boiling Range | Not determined. |

| | |
|--|-----------------------|
| Flash Point | 98F (37C) Closed Cup. |
| Evaporation Rate | Not determined. |
| Flammability (Solid, Gas) | n/a-liquid |
| Upper Flammability Limit | Not determined. |
| Lower Flammability Limit | Not determined. |
| Vapor Pressure | Not determined. |
| Vapor Density | Not determined. |
| Specific Gravity | 1.44 |
| Water Solubility | None. |
| Solubility in other Solvents | Not determined. |
| Partition Coefficient (n-octanol/water) | Not determined. |
| Auto-ignition Temperature | Not determined. |
| Decomposition Temperature | Not determined. |
| Kinematic Viscosity | Not determined. |
| Explosive Properties | Not determined. |
| Oxidizing Properties | Not determined. |

Section 10. STABILITY AND REACTIVITY

| | |
|--|--|
| <u>Reactivity:</u> | Not reactive under normal conditions. |
| <u>Chemical Stability:</u> | Stable under recommended storage conditions. |
| <u>Possibility of Hazardous Reactions:</u> | None under normal processing. |
| <u>Conditions to Avoid:</u> | Keep out of reach of children. |
| <u>Incompatible Materials:</u> | None known. |
| <u>Hazardous Decomposition Products:</u> | Oxides of carbon. |

Section 11. TOXICOLOGICAL INFORMATION

Information on Likely Routes of Exposure:

| | |
|---------------|--------------------------------------|
| Eye Contact: | Causes serious eye irritation. |
| Skin Contact: | May cause an allergic skin reaction. |

Inhalation: Avoid breathing vapors or mists.

Ingestion: Do not taste or swallow.

Component Information:

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|--------------------------------|--|---|--|
| Isopropyl alcohol (67-63-0) | 4,396 mg/kg (Rat) 3,600 mg/kg (Mouse) | 12,870 mg/kg (Rabbit) | 19,600 ppm (Rat) |
| 2 butoxyethanol (111-76-2) | 1,300mg/g (Rat) 1,400 mg/g (Guinea Pig) | >2,000 mg/g (Rat) >2,000 mg/g (Guinea Pig) | >4.9 mg/L (Rat 3 h) >3.4 mg/L (Guinea Pig 1h) |

Information on physical, chemical and toxicological effects:

Symptoms: Please section 4 of this SDS for symptoms.

Delayed and Immediate Effects as Well as Chronic Effects From Short and Long Term Exposure:

Sensitization: May cause an allergic skin reaction.

Carcinogenicity: Not classifiable as a human carcinogen.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|--------------------------------|-------|------|-----|------|
| Isopropyl alcohol (67-63-0) | NO | NO | NO | NO |
| 2 butoxyethanol (111-76-2) | NO | NO | NO | NO |

Legend

IARC (International Agency for Research on Cancer).

Group3 IARC components are "not classifiable as human carcinogens".

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

Numerical Measures of Toxicity:

Not Determined.

Section 12. ECOLOGICAL INFORMATION

Ecotoxicity:

Toxic to aquatic life with lasting effects.

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to Microorganisms | Crustacea |
|--------------------------------|--|---|--|-----------|
| Isopropyl alcohol (67-63-0) | EC50/72 hours Scenedesmus subspicatus >1,000 mg/L | LC50/96 hours Pimephales promelas: 9,640 mg/L | EC50/3 hours Activated sludge >1,000 mg/L | N/A |
| 2 butoxyethanol (111-76-2) | EC50 Algae (Pseudokircheriella subcapitata, 72h) 1,840 mg/L | LC50/96 hours Oncorhynchus mykiss, 1,474 mg/L | | |

Persistence/Degradability: Not determined.

Bioaccumulation: Not determined.

Mobility: Not determined.

Other Adverse Effects: Not determined.

Section 13. DISPOSAL CONSIDERATIONS

Waste Treatment Method:

Disposal of Wastes: Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated Packaging: Disposal should be in accordance with applicable regional, national and local laws and regulations.

Section 14. TRANSPORT INFORMATION

DOT: Consumer Commodity ORM-D.

PROPER SHIPPING NAME: Consumer Commodity ORM-D.

IATA: ID8000 Consumer Commodity.

IMDG: FLAMMABLE LIQUID N.O.S. (contains Alcohol) 3
IDENTIFICATION NUMBER: UN1993, III

Section 15. REGULATORY INFORMATION

International Inventories: Not determined.

U.S. Federal Regulations: Not determined.

SARA Title 313: Not determined.

U.S. State Regulations:

U.S Right-to-Know Regulations: Not determined.

GASOILA®SOFT SET

Section 16. OTHER INFORMATION

| | | | | |
|-------|---------------------|-------------------|------------------|-----------------------------------|
| NFPA: | Health Hazards 1 | Flammability 2 | Instability 0 | Special Hazards Not determined |
| HMIS | Health Hazards 1 | Flammability 2 | Instability 0 | Special Hazards Not determined |

Issue Date: 1st March 2014

Revision Date: 26th March 2018

DISCLAIMER:

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

Revised: 26th March, 2018
Page 8 of 8

1. Identification

| | | |
|--------------------------------------|---|--|
| Product identifier | Oatey No. 95 Tinning Flux | |
| Other means of identification | | |
| SDS number | 1611E | |
| Synonyms | Part Numbers: 30372, 30373, 30374, 30375, 53201, 48356, 48430, 48432, 48433 | |
| Recommended use | Joining Copper Pipes. Joining Copper Tubing. | |
| Recommended restrictions | None known. | |
| Company Name | Manufacturer | Distributor |
| Address | Oatey Co. 4700 West 160th St. Cleveland, OH 44135 | Oatey Canada Supply Chain Services Co. 145 Walker Drive Brampton, ON L6T 5P5, Canada |
| Telephone | 216-267-7100 | |
| E-mail | info@oatey.com | |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) | |
| Emergency First Aid | 1-877-740-5015 | |
| Contact person | MSDS Coordinator | |

2. Hazard(s) identification

| | | |
|------------------------------|-----------------------------------|-------------|
| Physical hazards | Not classified. | |
| Health hazards | Skin corrosion/irritation | Category 1B |
| | Serious eye damage/eye irritation | Category 1 |
| Environmental hazards | Not classified. | |
| Label elements | | |



| | | |
|---------------------------------|---|--|
| Signal word | Danger | |
| Hazard statement | Causes severe skin burns and eye damage. | |
| Precautionary statement | | |
| Prevention | Do not breathe dusts or mists. Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. | |
| Response | IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor. | |
| Storage | Store locked up. | |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. | |
| Other hazards | None known. | |
| Supplemental information | None. | |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|----------------------|-------------------|----------|
| Petrolatum | 8009-03-8 | 60-70 |

| | | |
|-------------------|------------|-------|
| Zinc chloride | 7646-85-7 | 10-30 |
| Tin | 7440-31-5 | 4-8 |
| Ammonium chloride | 12125-02-9 | 1-5 |
| Bismuth | 7440-69-9 | 0-1 |
| Copper | 7440-50-8 | 0-1 |

All concentrations are in percent by weight (kg) unless ingredient is a gas. Gas concentrations are in percent by volume (l).

4. First-aid measures

| | |
|---|--|
| Inhalation | If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Get medical attention immediately. |
| Skin contact | Take off immediately all contaminated clothing. Rinse skin with water/shower. Call a physician or poison control center immediately. Chemical burns must be treated by a physician. Wash contaminated clothing before reuse. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Continue rinsing. Call a physician or poison control center immediately. Remove contact lenses, if present and easy to do. |
| Ingestion | Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. |
| Most important symptoms/effects, acute and delayed | Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Water spray. Water fog. Foam. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Use water spray to cool unopened containers. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. Do not breathe vapor. |
| Methods and materials for containment and cleaning up | Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Avoid dispersal of dust in the air (i.e., clearing dust surfaces with compressed air). |
| Environmental precautions | Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Store locked up. Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

Occupational exposure limits

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|---------------------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | TWA | 5 mg/m ³ | Inhalable fraction. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |
| | TWA | 1 mg/m ³ | Fume. |

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|-------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | STEL | 10 mg/m ³ | Mist. |
| | TWA | 5 mg/m ³ | Mist. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |
| | TWA | 1 mg/m ³ | Fume. |

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|-------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |
| | TWA | 1 mg/m ³ | Fume. |

Canada. Manitoba OELs (Reg. 217/2006, The Workplace Safety And Health Act)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|---------------------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | TWA | 5 mg/m ³ | Inhalable fraction. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |
| | TWA | 1 mg/m ³ | Fume. |

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|-------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | STEL | 10 mg/m ³ | Mist. |
| | TWA | 5 mg/m ³ | Mist. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

| Components | Type | Value | Form |
|------------|------|---------------------|-------|
| | TWA | 1 mg/m ³ | Fume. |

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|-------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | STEL | 10 mg/m ³ | Mist. |
| | TWA | 5 mg/m ³ | Mist. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | TWA | 1 mg/m ³ | Fume. |

| | |
|--|---|
| Biological limit values | No biological exposure limits noted for the ingredient(s). |
| Exposure guidelines | Occupational Exposure Limits are not relevant to the current physical form of the product. |
| Appropriate engineering controls | Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Ensure adequate ventilation, especially in confined areas. Eye wash facilities and emergency shower must be available when handling this product. |
| Individual protection measures, such as personal protective equipment | |
| Eye/face protection | Wear safety glasses with side shields (or goggles) and a face shield. |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | In case of insufficient ventilation, wear suitable respiratory equipment. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties**Appearance**

| | |
|---|---------------------|
| Physical state | Solid. |
| Form | Paste. |
| Color | Yellow. |
| Odor | Slight. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 638.6 °F (337 °C) |
| Flash point | 539.6 °F (282.0 °C) |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |

| | |
|---|----------------|
| Vapor pressure | Not available. |
| Vapor density | > 1 |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Oxidizing properties | Not oxidizing. |
| Specific gravity | 1.1 @20°C |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Chlorine. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | Prolonged inhalation may be harmful. May cause irritation to the respiratory system. |
| Skin contact | Causes severe skin burns. |
| Eye contact | Causes serious eye damage. |
| Ingestion | Causes digestive tract burns. |

Symptoms related to the physical, chemical and toxicological characteristics Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|------------------------------------|---------|--------------|
| Ammonium chloride (CAS 12125-02-9) | | |
| Acute | | |
| <i>Oral</i> | | |
| LD50 | Rat | 1650 mg/kg |
| Zinc chloride (CAS 7646-85-7) | | |
| Acute | | |
| <i>Oral</i> | | |
| LD50 | Mouse | 350 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes severe skin burns and eye damage.

Serious eye damage/eye irritation Causes serious eye damage.

Respiratory or skin sensitization

Canada - Alberta OELs: Irritant

Ammonium chloride (CAS 12125-02-9) Irritant

Zinc chloride (CAS 7646-85-7)

Irritant

| | |
|--|--|
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | None known. |
| ACGIH Carcinogens | |
| Petrolatum (CAS 8009-03-8) | A4 Not classifiable as a human carcinogen. |
| Canada - Manitoba OELs: carcinogenicity | |
| MINERAL OIL, EXCLUDING METAL WORKING FLUIDS, PURE, HIGHLY AND SEVERELY REFINED, INHALABLE FRACTION (CAS 8009-03-8) | Not classifiable as a human carcinogen. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| Petrolatum (CAS 8009-03-8) | 3 Not classifiable as to carcinogenicity to humans. |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not an aspiration hazard. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|-------------------------------|---------|--|
| Zinc chloride (CAS 7646-85-7) | | |
| Aquatic | | |
| Crustacea | EC50 | American or virginia oyster (Crassostrea virginica) 0.1511 - 0.2782 mg/l, 48 hours |
| Fish | LC50 | Rainbow trout,donaldson trout (Oncorhynchus mykiss) 0.101 - 0.197 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

| | |
|--------------------------------------|---|
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | No data available. |
| Mobility in soil | No data available. |
| Other adverse effects | No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component. |

13. Disposal considerations

| | |
|--|--|
| Disposal instructions | Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

TDG

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

15. Regulatory information

Canadian regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

Controlled Drugs and Substances Act

Not regulated.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Not regulated.

International regulations

Stockholm Convention

Not applicable.

Rotterdam Convention

Not applicable.

Kyoto protocol

Not applicable.

Montreal Protocol

Not applicable.

Basel Convention

Not applicable.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|-------------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other Information

Issue date 10-December-2015

Revision date -

Version #

01

References

ACGIH
ACGIH Documentation of the Threshold Limit Values and Biological Exposure Indices
EPA: AQUIRE database
GOST 30333-2007 - Chemical production safety passport. General requirements
HSDB® - Hazardous Substances Data Bank
IARC Monographs. Overall Evaluation of Carcinogenicity
National Toxicology Program (NTP) Report on Carcinogens
NLM: Hazardous Substances Data Base
US. IARC Monographs on Occupational Exposures to Chemical Agents
Korea. Accidental Release Prevention Substances (Presidential Decree of Toxic Chemical Control Law, Executive Order No. 19203)
Korea. Dangerous Substances Threshold Quantity (Presidential Decree of Dangerous Substances Safety Management Act No. 18406, Schedule 1)
Korea. Harmful Substances Prohibited from Manufacturing (Presidential Decree on the Industrial Safety and Health Act (No. 13053), Article 29)
Korea. Harmful Substances Requiring Permission for Manufacture or Use (Presidential Decree on the Industrial Safety and Health Act (No. 13053), Article 30)
Korea. Non-Toxic Chemicals List (National Institute of Environment Research (NIER) Public Notice No. 1997-10, as amended)
Korea. Observational Chemicals (Ministerial Decree of TCCL Article 6)
Korea. OELs. Regulation for Permitted Concentration of Hazardous Substances (Ministry of Labor (MOL) Public Notice No. 1986-45, as amended)
Korea. Prohibited Chemical Substances (TCCL Article 11)
Korea. Regulated volatile organic compounds (VOCs) (MOE Notice No. 2001-36, March 8, 2001, as amended)
Korea. Restricted Chemical Substances (TCCL Article 11)
Korea. Toxic Chemical Control Law (TCCL), Existing Chemicals Inventory (KECI)
Korea. Toxic Chemical Control Law (TCCL), pre-1997 List
Korea. Toxic Chemicals (TCCL Article 10)
Korea. Toxic Release Inventory (TRI) Chemicals (TCCL Article 14)
Taiwan. Dangerous Materials (Rules on Hazard Communication of Dangerous Materials and Toxic Materials)
Taiwan. Industrial Precursor Chemicals (Categories and Regulations Governing Inspection and Declaration of Industrial Precursor Chemicals, MOEA Decree No. 87, as amended)
Taiwan. OELs. (Standards on Workplace Atmosphere of Dangerous and Hazardous Materials)
Taiwan. Toxic Chemical Substances (TCS) (List of Toxic Chemical Substances announced by the Environmental Protection Administration)
Taiwan. Toxic Materials (Rules on Hazard Communication of Dangerous Materials and Toxic Materials)
Japan Society for Occupational Health, Recommendation of Occupational Exposure Limits
Japan Chemical Industry Association (JCIA) GHS Guideline, June 2012
JIS Z 7253:2012 Hazard communication of chemicals based on GHS – Labelling and Safety Data Sheet (SDS)
JIS Z 7252:2009 Classification of chemicals based on "Globally Harmonized System of Classification and Labelling of Chemicals (GHS)"

Disclaimer

Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.

SECTION I - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 724™ Low VOC Cement for CPVC Plastic Pipe
PRODUCT USE: Low VOC Solvent Cement for CPVC Plastic Pipe
SUPPLIER: **MANUFACTURER:** IPS Corporation
17109 South Main Street, Gardena, CA 90248-3127
P.O. Box 379, Gardena, CA 90247-0379
Tel. 1-310-898-3300
EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|--|--|-----------------------------|
| Acute Toxicity: Category 4 Skin Irritation: Category 3 Skin Sensitization: NO Eye: Category 2 | Acute Toxicity: None Known Chronic Toxicity: None Known | Flammable Liquid Category 2 |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 2B

Hazard Statements

H225: Highly flammable liquid and vapor
 H319: Causes serious eye irritation
 H335: May cause respiratory irritation
 H336: May cause drowsiness or dizziness
 H351: Suspected of causing cancer
 EUH019: May form explosive peroxides
 EUH066: Repeated exposure may cause skin dryness or cracking

Precautionary Statements

P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking
 P261: Avoid breathing dust/fume/gas/mist/vapors/spray
 P280: Wear protective gloves/protective clothing/eye protection/face protection
 P337+P313: Get medical advice/attention
 P403+P233: Store in a well ventilated place. Keep container tightly closed
 P501: Dispose of contents/container in accordance with local regulation

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------------------|----------|-----------|------------------------------|------------------------------|
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 01-2119444314-46-0000 | 40 - 70 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 01-2119457290-43-0000 | 2 - 15 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 5 - 20 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.
Likely Routes of Exposure: Inhalation, Eye and Skin Contact
Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.
Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

| | | | |
|---|--------------|------|------------|
| Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. | HMIS | NFPA | 0-Minimal |
| Unsuitable Extinguishing Media: Water spray or stream. | Health | 2 | 1-Slight |
| Exposure Hazards: Inhalation and dermal contact | Flammability | 3 | 2-Moderate |
| Combustion Products: Oxides of carbon, hydrogen chloride and smoke | Reactivity | 0 | 3-Serious |
| | PPE | B | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 33°C (90°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH 8-hr TLV | ACGIH 15-min STEL | OSHA 8-hr PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8-hr PEL | CAL/OSHA Ceiling | CAL/OSHA 15-min STEL |
|------------------|---------------------------|-------------------|----------------------|------------------|---------------------|---------------------|----------------------|---------------------|-------------------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® 724™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: JAN 2019

Supersedes: DEC 2018

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Gray or orange, heavy syrupy liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 66°C (151°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 66°C (151°F) Based on first boiling component: THF | Flammability Limits: | LEL: 1.1% based on Cyclohexanone |
| Flash Point: | -20°C (-4°F) TCC based on THF | | UEL: 11.8% based on THF |
| Specific Gravity: | 0.984 @23°C (73°F) | Vapor Pressure: | 129 mm Hg @ 20°C (68°F)based on THF |
| Solubility: | Solvent portion soluble in water. | Vapor Density: | >2 (Air = 1) |
| Partition Coefficient n-octanol/water: | Not Available | Other Data: Viscosity: | Heavy bodied |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 490 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| Toxicity: | LD50 | LC50 | Target Organs |
|---------------------------|---|--|-----------------|
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | Not Established |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|--------------------------|---|
| Ecotoxicity: | None Known |
| Mobility in Soil: | If released into the environment, this product can move rapidly through the soil. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

| EXCEPTION for Ground Shipping |
|--|
| DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package. |
| Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" . |

| TDG INFORMATION | |
|--------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|---|--|--|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness | |
| Safety Phrases: | S2: Keep out of the reach of children S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. | S25: Avoid contact with eyes. S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. | |
| Compliance Statement: | This SDS was prepared to be in accordance with: US OSHA Hazard Communication Standard 29 CFR 1910.1200 (Rev 2012) European Regulation (EC) No (EU) 2015/830 on classification, labelling and packaging of substances and mixtures | | |

SECTION 16 - OTHER INFORMATION

| | |
|---|--|
| Specification Information: | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs |
| E-mail address: | <EHSinfo@ipscorp.com> |
| Training necessary: | Yes, training in practices and procedures contained in product literature. |
| Reissue date / reason for reissue: | 1/11/2019 / Updated GHS Standard Format |
| Intended Use of Product: | Solvent Cement for CPVC Plastic Pipe |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.



Safety Data Sheet

Copyright,2018,3M Company.

All rights reserved. Copying and/or downloading of this information for the purpose of properly utilizing 3M products is allowed provided that: (1) the information is copied in full with no changes unless prior written agreement is obtained from 3M, and (2) neither the copy nor the original is resold or otherwise distributed with the intention of earning a profit thereon.

| | | | |
|------------------------|-----------|-------------------------|----------|
| Document Group: | 16-3472-4 | Version Number: | 40.00 |
| Issue Date: | 05/21/18 | Supersedes Date: | 03/31/17 |

SECTION 1: Identification

1.1. Product identifier

3M(TM) Super 77(TM) Multipurpose Adhesive (Aerosol)

Product Identification Numbers

62-4977-2924-4, 62-4977-2928-5, 62-4977-4730-3, 62-4977-4922-6, 62-4977-4923-4, 62-4977-4925-9, 62-4977-4929-1, 62-4977-4930-9, 62-4977-4935-8

1.2. Recommended use and restrictions on use

Recommended use

Adhesive aerosol, General Purpose Aerosol adhesive

1.3. Supplier's details

| | |
|----------------------|---|
| MANUFACTURER: | 3M |
| DIVISION: | Industrial Adhesives and Tapes Division |
| ADDRESS: | 3M Center, St. Paul, MN 55144-1000, USA |
| Telephone: | 1-888-3M HELPS (1-888-364-3577) |

1.4. Emergency telephone number

1-800-364-3577 or (651) 737-6501 (24 hours)

SECTION 2: Hazard identification

2.1. Hazard classification

Flammable Aerosol: Category 1.
Gas Under Pressure: Liquefied gas.
Serious Eye Damage/Irritation: Category 2A.
Reproductive Toxicity: Category 2.
Simple Asphyxiant.
Specific Target Organ Toxicity (single exposure): Category 1.
Specific Target Organ Toxicity (single exposure): Category 3.

2.2. Label elements

Signal word

Danger

Symbols

Flame | Gas cylinder | Exclamation mark | Health Hazard |

Pictograms**Hazard Statements**

Extremely flammable aerosol.

Contains gas under pressure; may explode if heated.

Causes serious eye irritation.

May cause drowsiness or dizziness.

Suspected of damaging fertility or the unborn child.

May displace oxygen and cause rapid suffocation.

Causes damage to organs:
cardiovascular system |**Precautionary Statements****General:**

Keep out of reach of children.

Prevention:

Obtain special instructions before use.

Do not handle until all safety precautions have been read and understood.

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

Do not spray on an open flame or other ignition source.

Pressurized container: Do not pierce or burn, even after use.

Do not breathe dust/fume/gas/mist/vapors/spray.

Use only outdoors or in a well-ventilated area.

Wear protective gloves and eye/face protection.

Do not eat, drink or smoke when using this product.

Wash thoroughly after handling.

Response:

IF INHALED: Remove person to fresh air and keep comfortable for breathing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing.

If eye irritation persists: Get medical advice/attention.

IF exposed or concerned: Get medical advice/attention.

Specific treatment (see Notes to Physician on this label).

Storage:

Protect from sunlight. Do not expose to temperatures exceeding 50C/122F.

Keep container tightly closed.

Store locked up in a well-ventilated place.

Disposal:

Dispose of contents/container in accordance with applicable local/regional/national/international regulations.

Notes to Physician:

Exposure may increase myocardial irritability. Do not administer sympathomimetic drugs unless absolutely necessary.

SECTION 3: Composition/information on ingredients

| Ingredient | C.A.S. No. | % by Wt |
|--|---------------|------------------------|
| Acetone | 67-64-1 | 20 - 30 Trade Secret * |
| Non-volatile components (N.J.T.S. Registry No. 04499600-6433P) | Trade Secret* | 20 - 30 Trade Secret * |
| Propane | 74-98-6 | 15 - 25 Trade Secret * |
| Cyclohexane | 110-82-7 | 10 - 20 Trade Secret * |
| Petroleum distillates | 64742-49-0 | 10 - 20 Trade Secret * |
| Hexane | 110-54-3 | < 0.5 Trade Secret * |

*The specific chemical identity and/or exact percentage (concentration) of this composition has been withheld as a trade secret.

SECTION 4: First aid measures

4.1. Description of first aid measures

Inhalation:

Remove person to fresh air. Get medical attention.

Skin Contact:

Wash with soap and water. If signs/symptoms develop, get medical attention.

Eye Contact:

Immediately flush with large amounts of water. Remove contact lenses if easy to do. Continue rinsing. Get medical attention.

If Swallowed:

Rinse mouth. If you feel unwell, get medical attention.

4.2. Most important symptoms and effects, both acute and delayed

See Section 11.1. Information on toxicological effects.

4.3. Indication of any immediate medical attention and special treatment required

Exposure may increase myocardial irritability. Do not administer sympathomimetic drugs unless absolutely necessary.

SECTION 5: Fire-fighting measures

5.1. Suitable extinguishing media

Use a fire fighting agent suitable for the surrounding fire.

5.2. Special hazards arising from the substance or mixture

Closed containers exposed to heat from fire may build pressure and explode.

Hazardous Decomposition or By-Products

Substance

Aldehydes
Carbon monoxide
Carbon dioxide

Condition

During Combustion
During Combustion
During Combustion

5.3. Special protective actions for fire-fighters

Water may not effectively extinguish fire; however, it should be used to keep fire-exposed containers and surfaces cool and prevent explosive rupture.

SECTION 6: Accidental release measures**6.1. Personal precautions, protective equipment and emergency procedures**

Evacuate area. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only non-sparking tools. Ventilate the area with fresh air. For large spill, or spills in confined spaces, provide mechanical ventilation to disperse or exhaust vapors, in accordance with good industrial hygiene practice. Warning! A motor could be an ignition source and could cause flammable gases or vapors in the spill area to burn or explode. Refer to other sections of this SDS for information regarding physical and health hazards, respiratory protection, ventilation, and personal protective equipment.

6.2. Environmental precautions

Avoid release to the environment.

6.3. Methods and material for containment and cleaning up

If possible, seal leaking container. Place leaking containers in a well-ventilated area, preferably an operating exhaust hood, or if necessary outdoors on an impermeable surface until appropriate packaging for the leaking container or its contents is available. Contain spill. Cover spill area with a fire-extinguishing foam. An appropriate aqueous film forming foam (AFFF) is recommended. Working from around the edges of the spill inward, cover with bentonite, vermiculite, or commercially available inorganic absorbent material. Mix in sufficient absorbent until it appears dry. Remember, adding an absorbent material does not remove a physical, health, or environmental hazard. Collect as much of the spilled material as possible using non-sparking tools. Place in a metal container approved for transportation by appropriate authorities. Clean up residue with an appropriate solvent selected by a qualified and authorized person. Ventilate the area with fresh air. Read and follow safety precautions on the solvent label and SDS. Seal the container. Dispose of collected material as soon as possible in accordance with applicable local/regional/national/international regulations.

SECTION 7: Handling and storage**7.1. Precautions for safe handling**

Keep out of reach of children. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Do not breathe dust/fume/gas/mist/vapors/spray. Do not get in eyes, on skin, or on clothing. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Avoid contact with oxidizing agents (eg. chlorine, chromic acid etc.) Use personal protective equipment (gloves, respirators, etc.) as required.

7.2. Conditions for safe storage including any incompatibilities

Store in a well-ventilated place. Keep container tightly closed. Protect from sunlight. Do not expose to temperatures exceeding 50C/122F. Store away from heat. Store away from acids. Store away from oxidizing agents.

SECTION 8: Exposure controls/personal protection**8.1. Control parameters****Occupational exposure limits**

If a component is disclosed in section 3 but does not appear in the table below, an occupational exposure limit is not available for the component.

| Ingredient | C.A.S. No. | Agency | Limit type | Additional Comments |
|-------------|------------|--------|-------------------------|---------------------|
| Hexane | 110-54-3 | ACGIH | TWA:50 ppm | SKIN |
| Hexane | 110-54-3 | OSHA | TWA:1800 mg/m3(500 ppm) | |
| Cyclohexane | 110-82-7 | ACGIH | TWA:100 ppm | |
| Cyclohexane | 110-82-7 | OSHA | TWA:1050 mg/m3(300 ppm) | |

| | | | | |
|---------|---------|-------|------------------------------|--------------------------------|
| Acetone | 67-64-1 | ACGIH | TWA:250 ppm;STEL:500 ppm | A4: Not class. as human carcin |
| Acetone | 67-64-1 | OSHA | TWA:2400 mg/m3(1000 ppm) | |
| Propane | 74-98-6 | ACGIH | Limit value not established: | simple asphyxiant |
| Propane | 74-98-6 | OSHA | TWA:1800 mg/m3(1000 ppm) | |

ACGIH : American Conference of Governmental Industrial Hygienists
 AIHA : American Industrial Hygiene Association
 CMRG : Chemical Manufacturer's Recommended Guidelines
 OSHA : United States Department of Labor - Occupational Safety and Health Administration
 TWA: Time-Weighted-Average
 STEL: Short Term Exposure Limit
 CEIL: Ceiling

8.2. Exposure controls

8.2.1. Engineering controls

Do not remain in area where available oxygen may be reduced. Use general dilution ventilation and/or local exhaust ventilation to control airborne exposures to below relevant Exposure Limits and/or control dust/fume/gas/mist/vapors/spray. If ventilation is not adequate, use respiratory protection equipment.

8.2.2. Personal protective equipment (PPE)

Eye/face protection

Select and use eye/face protection to prevent contact based on the results of an exposure assessment. The following eye/face protection(s) are recommended:
 Indirect Vented Goggles

Skin/hand protection

Select and use gloves and/or protective clothing approved to relevant local standards to prevent skin contact based on the results of an exposure assessment. Selection should be based on use factors such as exposure levels, concentration of the substance or mixture, frequency and duration, physical challenges such as temperature extremes, and other use conditions. Consult with your glove and/or protective clothing manufacturer for selection of appropriate compatible gloves/protective clothing.
 Gloves made from the following material(s) are recommended: Butyl Rubber
 Nitrile Rubber

Respiratory protection

An exposure assessment may be needed to decide if a respirator is required. If a respirator is needed, use respirators as part of a full respiratory protection program. Based on the results of the exposure assessment, select from the following respirator type(s) to reduce inhalation exposure:
 Half facepiece or full facepiece supplied-air respirator

For questions about suitability for a specific application, consult with your respirator manufacturer.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--------------------------------|---------------------------|
| General Physical Form: | Liquid aerosol |
| Specific Physical Form: | Aerosol |
| Odor, Color, Grade: | Clear, sweet, fruity odor |
| Odor threshold | <i>No Data Available</i> |
| pH | <i>No Data Available</i> |
| Melting point | <i>No Data Available</i> |
| Boiling Point | <i>Not Applicable</i> |

| | |
|---|--|
| Flash Point | -42.00 °F [<i>Test Method</i> : Tagliabue Closed Cup] |
| Evaporation rate | 1.9 [<i>Ref Std</i> : ETHER=1] |
| Flammability (solid, gas) | Not Applicable |
| Flammable Limits(LEL) | <i>No Data Available</i> |
| Flammable Limits(UEL) | <i>No Data Available</i> |
| Vapor Pressure | [<i>Details</i> : Compressed gas] <i>Not Applicable</i> |
| Vapor Density | 2.97 [<i>Ref Std</i> : AIR=1] |
| Density | 0.726 g/ml |
| Specific Gravity | 0.726 [<i>Ref Std</i> : WATER=1] |
| Solubility in Water | Nil |
| Solubility- non-water | <i>No Data Available</i> |
| Partition coefficient: n-octanol/ water | <i>No Data Available</i> |
| Autoignition temperature | <i>No Data Available</i> |
| Decomposition temperature | <i>Not Applicable</i> |
| Viscosity | <i>Not Applicable</i> |
| Hazardous Air Pollutants | <=0.4 % weight [<i>Test Method</i> : Calculated] |
| VOC Less H2O & Exempt Solvents | <=51 % [<i>Test Method</i> : calculated per CARB title 2] |
| Solids Content | >=22.4 % |

SECTION 10: Stability and reactivity

10.1. Reactivity

This material may be reactive with certain agents under certain conditions - see the remaining headings in this section.

10.2. Chemical stability

Stable.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Heat

10.5. Incompatible materials

Strong oxidizing agents

10.6. Hazardous decomposition products

| <u>Substance</u> | <u>Condition</u> |
|------------------|------------------|
| None known. | |

Refer to section 5.2 for hazardous decomposition products during combustion.

SECTION 11: Toxicological information

The information below may not be consistent with the material classification in Section 2 if specific ingredient classifications are mandated by a competent authority. In addition, toxicological data on ingredients may not be reflected in the material classification and/or the signs and symptoms of exposure, because an ingredient may be present below the threshold for labeling, an ingredient may not be available for exposure, or the data may not be relevant to the material as a whole.

11.1. Information on Toxicological effects

Signs and Symptoms of Exposure

Based on test data and/or information on the components, this material may produce the following health effects:

Inhalation:

Intentional concentration and inhalation may be harmful or fatal.

Simple Asphyxiation: Signs/symptoms may include increased heart rate, rapid respirations, drowsiness, headache, incoordination, altered judgement, nausea, vomiting, lethargy, seizures, coma, and may be fatal.

Respiratory Tract Irritation: Signs/symptoms may include cough, sneezing, nasal discharge, headache, hoarseness, and nose and throat pain.

May cause additional health effects (see below).

Skin Contact:

Dermal Defatting: Signs/symptoms may include localized redness, itching, drying and cracking of skin.

Eye Contact:

Severe Eye Irritation: Signs/symptoms may include significant redness, swelling, pain, tearing, cloudy appearance of the cornea, and impaired vision.

Ingestion:

Gastrointestinal Irritation: Signs/symptoms may include abdominal pain, stomach upset, nausea, vomiting and diarrhea.

May cause additional health effects (see below).

Additional Health Effects:

Single exposure may cause target organ effects:

Central Nervous System (CNS) Depression: Signs/symptoms may include headache, dizziness, drowsiness, incoordination, nausea, slowed reaction time, slurred speech, giddiness, and unconsciousness.

Single exposure, above recommended guidelines, may cause:

Cardiac Sensitization: Signs/symptoms may include irregular heartbeat (arrhythmia), faintness, chest pain, and may be fatal.

Reproductive/Developmental Toxicity:

Contains a chemical or chemicals which can cause birth defects or other reproductive harm.

Toxicological Data

If a component is disclosed in section 3 but does not appear in a table below, either no data are available for that endpoint or the data are not sufficient for classification.

Acute Toxicity

| Name | Route | Species | Value |
|-----------------|----------------------------|---------|--|
| Overall product | Dermal | | No data available; calculated ATE >5,000 mg/kg |
| Overall product | Inhalation-Vapor(4 hr) | | No data available; calculated ATE >50 mg/l |
| Overall product | Ingestion | | No data available; calculated ATE >5,000 mg/kg |
| Propane | Inhalation-Gas (4 hours) | Rat | LC50 > 200,000 ppm |
| Acetone | Dermal | Rabbit | LD50 > 15,688 mg/kg |
| Acetone | Inhalation-Vapor (4 hours) | Rat | LC50 76 mg/l |

| | | | |
|--|----------------------------|--------|--|
| Acetone | Ingestion | Rat | LD50 5,800 mg/kg |
| Cyclohexane | Dermal | Rat | LD50 > 2,000 mg/kg |
| Cyclohexane | Inhalation-Vapor (4 hours) | Rat | LC50 > 32.9 mg/l |
| Cyclohexane | Ingestion | Rat | LD50 6,200 mg/kg |
| Petroleum distillates | Dermal | Rabbit | LD50 > 3,160 mg/kg |
| Petroleum distillates | Inhalation-Vapor (4 hours) | Rat | LC50 > 14.7 mg/l |
| Petroleum distillates | Ingestion | Rat | LD50 > 5,000 mg/kg |
| Non-volatile components (N.J.T.S. Registry No. 04499600-6433P) | Dermal | | LD50 estimated to be > 5,000 mg/kg |
| Non-volatile components (N.J.T.S. Registry No. 04499600-6433P) | Ingestion | | LD50 estimated to be 2,000 - 5,000 mg/kg |
| Hexane | Dermal | Rabbit | LD50 > 2,000 mg/kg |
| Hexane | Inhalation-Vapor (4 hours) | Rat | LC50 170 mg/l |
| Hexane | Ingestion | Rat | LD50 > 28,700 mg/kg |

ATE = acute toxicity estimate

Skin Corrosion/Irritation

| Name | Species | Value |
|--|------------------------|--------------------|
| Propane | Rabbit | Minimal irritation |
| Acetone | Mouse | Minimal irritation |
| Cyclohexane | Rabbit | Mild irritant |
| Petroleum distillates | Rabbit | Irritant |
| Non-volatile components (N.J.T.S. Registry No. 04499600-6433P) | Professional judgement | Minimal irritation |
| Hexane | Human and animal | Mild irritant |

Serious Eye Damage/Irritation

| Name | Species | Value |
|-----------------------|---------|-----------------|
| Propane | Rabbit | Mild irritant |
| Acetone | Rabbit | Severe irritant |
| Cyclohexane | Rabbit | Mild irritant |
| Petroleum distillates | Rabbit | Mild irritant |
| Hexane | Rabbit | Mild irritant |

Skin Sensitization

| Name | Species | Value |
|-----------------------|------------|----------------|
| Petroleum distillates | Guinea pig | Not classified |
| Hexane | Human | Not classified |

Respiratory Sensitization

For the component/components, either no data are currently available or the data are not sufficient for classification.

Germ Cell Mutagenicity

| Name | Route | Value |
|-------------|----------|--|
| Propane | In Vitro | Not mutagenic |
| Acetone | In vivo | Not mutagenic |
| Acetone | In Vitro | Some positive data exist, but the data are not sufficient for classification |
| Cyclohexane | In Vitro | Not mutagenic |

| | | |
|-----------------------|----------|--|
| Cyclohexane | In vivo | Some positive data exist, but the data are not sufficient for classification |
| Petroleum distillates | In Vitro | Not mutagenic |
| Hexane | In Vitro | Not mutagenic |
| Hexane | In vivo | Not mutagenic |

Carcinogenicity

| Name | Route | Species | Value |
|-----------------------|---------------|-------------------------|--|
| Acetone | Not Specified | Multiple animal species | Not carcinogenic |
| Petroleum distillates | Inhalation | Mouse | Some positive data exist, but the data are not sufficient for classification |
| Hexane | Dermal | Mouse | Not carcinogenic |
| Hexane | Inhalation | Mouse | Some positive data exist, but the data are not sufficient for classification |

Reproductive Toxicity

Reproductive and/or Developmental Effects

| Name | Route | Value | Species | Test Result | Exposure Duration |
|-------------|------------|--|---------|-----------------------|----------------------|
| Acetone | Ingestion | Not classified for male reproduction | Rat | NOAEL 1,700 mg/kg/day | 13 weeks |
| Acetone | Inhalation | Not classified for development | Rat | NOAEL 5.2 mg/l | during organogenesis |
| Cyclohexane | Inhalation | Not classified for female reproduction | Rat | NOAEL 24 mg/l | 2 generation |
| Cyclohexane | Inhalation | Not classified for male reproduction | Rat | NOAEL 24 mg/l | 2 generation |
| Cyclohexane | Inhalation | Not classified for development | Rat | NOAEL 6.9 mg/l | 2 generation |
| Hexane | Ingestion | Not classified for development | Mouse | NOAEL 2,200 mg/kg/day | during organogenesis |
| Hexane | Inhalation | Not classified for development | Rat | NOAEL 0.7 mg/l | during gestation |
| Hexane | Ingestion | Toxic to male reproduction | Rat | NOAEL 1,140 mg/kg/day | 90 days |
| Hexane | Inhalation | Toxic to male reproduction | Rat | LOAEL 3.52 mg/l | 28 days |

Target Organ(s)

Specific Target Organ Toxicity - single exposure

| Name | Route | Target Organ(s) | Value | Species | Test Result | Exposure Duration |
|---------|------------|-----------------------------------|--|------------|---------------------|-------------------|
| Propane | Inhalation | cardiac sensitization | Causes damage to organs | Human | NOAEL Not available | |
| Propane | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | |
| Propane | Inhalation | respiratory irritation | Not classified | Human | NOAEL Not available | |
| Acetone | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | |
| Acetone | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Human | NOAEL Not available | |
| Acetone | Inhalation | immune system | Not classified | Human | NOAEL 1.19 mg/l | 6 hours |
| Acetone | Inhalation | liver | Not classified | Guinea pig | NOAEL Not available | |
| Acetone | Ingestion | central nervous | May cause drowsiness or | Human | NOAEL Not | poisoning |

| | | | | | | |
|-----------------------|------------|-----------------------------------|--|------------------------|---------------------|---------------|
| | | system depression | dizziness | | available | and/or abuse |
| Cyclohexane | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human and animal | NOAEL Not available | |
| Cyclohexane | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Human and animal | NOAEL Not available | |
| Cyclohexane | Ingestion | central nervous system depression | May cause drowsiness or dizziness | Professional judgement | NOAEL Not available | |
| Petroleum distillates | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human and animal | NOAEL Not available | |
| Petroleum distillates | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | | NOAEL Not available | |
| Petroleum distillates | Ingestion | central nervous system depression | May cause drowsiness or dizziness | Professional judgement | NOAEL Not available | |
| Hexane | Inhalation | central nervous system depression | May cause drowsiness or dizziness | Human | NOAEL Not available | not available |
| Hexane | Inhalation | respiratory irritation | Some positive data exist, but the data are not sufficient for classification | Rabbit | NOAEL Not available | 8 hours |
| Hexane | Inhalation | respiratory system | Not classified | Rat | NOAEL 24.6 mg/l | 8 hours |

Specific Target Organ Toxicity - repeated exposure

| Name | Route | Target Organ(s) | Value | Species | Test Result | Exposure Duration |
|-------------|------------|--|----------------|------------|------------------------|-------------------|
| Acetone | Dermal | eyes | Not classified | Guinea pig | NOAEL Not available | 3 weeks |
| Acetone | Inhalation | hematopoietic system | Not classified | Human | NOAEL 3 mg/l | 6 weeks |
| Acetone | Inhalation | immune system | Not classified | Human | NOAEL 1.19 mg/l | 6 days |
| Acetone | Inhalation | kidney and/or bladder | Not classified | Guinea pig | NOAEL 119 mg/l | not available |
| Acetone | Inhalation | heart liver | Not classified | Rat | NOAEL 45 mg/l | 8 weeks |
| Acetone | Ingestion | kidney and/or bladder | Not classified | Rat | NOAEL 900 mg/kg/day | 13 weeks |
| Acetone | Ingestion | heart | Not classified | Rat | NOAEL 2,500 mg/kg/day | 13 weeks |
| Acetone | Ingestion | hematopoietic system | Not classified | Rat | NOAEL 200 mg/kg/day | 13 weeks |
| Acetone | Ingestion | liver | Not classified | Mouse | NOAEL 3,896 mg/kg/day | 14 days |
| Acetone | Ingestion | eyes | Not classified | Rat | NOAEL 3,400 mg/kg/day | 13 weeks |
| Acetone | Ingestion | respiratory system | Not classified | Rat | NOAEL 2,500 mg/kg/day | 13 weeks |
| Acetone | Ingestion | muscles | Not classified | Rat | NOAEL 2,500 mg/kg | 13 weeks |
| Acetone | Ingestion | skin bone, teeth, nails, and/or hair | Not classified | Mouse | NOAEL 11,298 mg/kg/day | 13 weeks |
| Cyclohexane | Inhalation | liver | Not classified | Rat | NOAEL 24 mg/l | 90 days |
| Cyclohexane | Inhalation | auditory system | Not classified | Rat | NOAEL 1.7 mg/l | 90 days |

| | | | | | | |
|-------------|------------|---|--|--------|-----------------------|-----------------------|
| Cyclohexane | Inhalation | kidney and/or bladder | Not classified | Rabbit | NOAEL 2.7 mg/l | 10 weeks |
| Cyclohexane | Inhalation | hematopoietic system | Not classified | Mouse | NOAEL 24 mg/l | 14 weeks |
| Cyclohexane | Inhalation | peripheral nervous system | Not classified | Rat | NOAEL 8.6 mg/l | 30 weeks |
| Hexane | Inhalation | peripheral nervous system | Causes damage to organs through prolonged or repeated exposure | Human | NOAEL Not available | occupational exposure |
| Hexane | Inhalation | respiratory system | Some positive data exist, but the data are not sufficient for classification | Mouse | LOAEL 1.76 mg/l | 13 weeks |
| Hexane | Inhalation | liver | Not classified | Rat | NOAEL Not available | 6 months |
| Hexane | Inhalation | kidney and/or bladder | Not classified | Rat | LOAEL 1.76 mg/l | 6 months |
| Hexane | Inhalation | hematopoietic system | Not classified | Mouse | NOAEL 35.2 mg/l | 13 weeks |
| Hexane | Inhalation | auditory system immune system eyes | Not classified | Human | NOAEL Not available | occupational exposure |
| Hexane | Inhalation | heart skin endocrine system | Not classified | Rat | NOAEL 1.76 mg/l | 6 months |
| Hexane | Ingestion | peripheral nervous system | Some positive data exist, but the data are not sufficient for classification | Rat | NOAEL 1,140 mg/kg/day | 90 days |
| Hexane | Ingestion | endocrine system hematopoietic system liver immune system kidney and/or bladder | Not classified | Rat | NOAEL Not available | 13 weeks |

Aspiration Hazard

| Name | Value |
|-----------------------|-------------------|
| Cyclohexane | Aspiration hazard |
| Petroleum distillates | Aspiration hazard |
| Hexane | Aspiration hazard |

Please contact the address or phone number listed on the first page of the SDS for additional toxicological information on this material and/or its components.

SECTION 12: Ecological information

Ecotoxicological information

Please contact the address or phone number listed on the first page of the SDS for additional ecotoxicological information on this material and/or its components.

Chemical fate information

Please contact the address or phone number listed on the first page of the SDS for additional chemical fate information on this material and/or its components.

SECTION 13: Disposal considerations

13.1. Disposal methods

Dispose of contents/ container in accordance with the local/regional/national/international regulations.

Dispose of waste product in a permitted industrial waste facility. Facility must be capable of handling aerosol cans.

EPA Hazardous Waste Number (RCRA): D001 (Ignitable)

SECTION 14: Transport Information

For Transport Information, please visit <http://3M.com/Transportinfo> or call 1-800-364-3577 or 651-737-6501.

SECTION 15: Regulatory information

15.1. US Federal Regulations

Contact 3M for more information.

EPCRA 311/312 Hazard Classifications:

Physical Hazards

Flammable (gases, aerosols, liquids, or solids)

Gas under pressure

Health Hazards

Reproductive toxicity

Serious eye damage or eye irritation

Simple Asphyxiant

Specific target organ toxicity (single or repeated exposure)

Section 313 Toxic Chemicals subject to the reporting requirements of that section and 40 CFR part 372 (EPCRA):

| <u>Ingredient</u> | <u>C.A.S. No</u> | <u>% by Wt</u> |
|-------------------|------------------|----------------------|
| Cyclohexane | 110-82-7 | Trade Secret 10 - 20 |

15.2. State Regulations

Contact 3M for more information.

15.3. Chemical Inventories

The components of this product are in compliance with the chemical notification requirements of TSCA. All required components of this product are listed on the active portion of the TSCA Inventory.

Contact 3M for more information.

15.4. International Regulations

Contact 3M for more information.

This SDS has been prepared to meet the U.S. OSHA Hazard Communication Standard, 29 CFR 1910.1200.

SECTION 16: Other information

NFPA Hazard Classification

Health: 2 Flammability: 4 Instability: 0 Special Hazards: None
Aerosol Storage Code: 3

National Fire Protection Association (NFPA) hazard ratings are designed for use by emergency response personnel to address the hazards that are presented by short-term, acute exposure to a material under conditions of fire, spill, or similar emergencies. Hazard ratings are primarily based on the inherent physical and toxic properties of the material but also include the toxic properties of combustion or decomposition products that are known to be generated in significant quantities.

HMIS Hazard Classification**Health: *2 Flammability: 4 Physical Hazard: 0 Personal Protection: X** - See PPE section.

Hazardous Material Identification System (HMIS® IV) hazard ratings are designed to inform employees of chemical hazards in the workplace. These ratings are based on the inherent properties of the material under expected conditions of normal use and are not intended for use in emergency situations. HMIS® IV ratings are to be used with a fully implemented HMIS® IV program. HMIS® is a registered mark of the American Coatings Association (ACA).

| | | | |
|------------------------|-----------|-------------------------|----------|
| Document Group: | 16-3472-4 | Version Number: | 40.00 |
| Issue Date: | 05/21/18 | Supersedes Date: | 03/31/17 |

DISCLAIMER: The information in this Safety Data Sheet (SDS) is believed to be correct as of the date issued. 3M MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's method of use or application. Given the variety of factors that can affect the use and application of a 3M product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for user's method of use or application.

3M provides information in electronic form as a service to its customers. Due to the remote possibility that electronic transfer may have resulted in errors, omissions or alterations in this information, 3M makes no representations as to its completeness or accuracy. In addition, information obtained from a database may not be as current as the information in the SDS available directly from 3M.

3M USA SDSs are available at www.3M.com

1. Identification

| | |
|---|---|
| Product identifier | LPS® 2 (Aerosol) |
| Other means of identification | |
| Part Number | 00216 |
| Recommended use | An industrial lubricant designed to displace moisture from equipment, provide heavy-duty lubrication and rust prevention. |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Manufacturer | |
| Manufacturer | |
| Company name | ITW Pro Brands |
| Address | 4647 Hugh Howell Rd. Tucker, GA 30084 |
| Country | (U.S.A.) Tel: +1 770-243-8800 |
| In Case of Emergency | 1-800-424-9300 (inside U.S.) +001 703-527-3887 (outside U.S.) |
| Website | www.lpslabs.com |
| E-mail | lpssds@itwprobrands.com |

2. Hazard(s) identification

| | | |
|------------------------------|----------------------|----------------|
| Physical hazards | Flammable aerosols | Category 1 |
| | Gases under pressure | Compressed gas |
| Health hazards | Not classified. | |
| Environmental hazards | Not classified. | |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--|--|
| Signal word | Danger |
| Hazard statement | Extremely flammable aerosol. Contains gas under pressure; may explode if heated. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. |
| Response | Wash hands after handling. |
| Storage | Protect from sunlight. Store in a well-ventilated place. Do not expose to temperatures exceeding 50°C/122°F. |
| Disposal | Dispose of waste and residues in accordance with local authority requirements. |
| Hazard(s) not otherwise classified (HNOC) | Combustible. |
| Supplemental information | None known. |

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|---------|
| Distillates Petroleum Hydrotreated Light | | 64742-47-8 | 70 - 80 |
| Petroleum Oil | | 64742-52-5 | 10 - 20 |
| Carbon Dioxide | | 124-38-9 | 1 - 5 |

4. First-aid measures

| | |
|---|--|
| Inhalation | Move to fresh air. Call a physician if symptoms develop or persist. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | No specific first aid measures noted. |
| Ingestion | Not likely, due to the form of the product. |
| Most important symptoms/effects, acute and delayed | Direct contact with eyes may cause temporary irritation. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Water fog. Alcohol resistant foam. Dry chemical powder. Dry chemicals. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire fighting equipment/instructions | In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Cool containers exposed to heat with water spray and remove container, if no risk is involved. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes. |
| General fire hazards | Extremely flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame. Combustible. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. |
| Methods and materials for containment and cleaning up | Refer to attached safety data sheets and/or instructions for use. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Use water spray to reduce vapors or divert vapor cloud drift. Isolate area until gas has dispersed. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. |
| Environmental precautions | Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

Precautions for safe handling

Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Close valve after each use and when empty. Protect containers from physical damage; do not drag, roll, slide, or drop. When moving containers, even for short distances, use a cart (trolley, hand truck, etc.) designed to transport containers. Suck back of water into the container must be prevented. Do not allow backfeed into the container. Purge air from system before introducing gas. Use only properly specified equipment which is suitable for this product, its supply pressure and temperature. Contact your gas supplier if in doubt. Do not re-use empty containers. Avoid prolonged or repeated contact with skin. Avoid prolonged exposure. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 3 Aerosol.

Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store in a well-ventilated place. Stored containers should be periodically checked for general condition and leakage. Level 3 Aerosol.

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

U.S. - OSHA

| Components | Type | Value | Form |
|---|------|---------|-----------|
| Distillates Petroleum Hydrotreated Light (CAS 64742-47-8) | PEL | 5 mg/m3 | Oil mist |
| Petroleum Oil (CAS 64742-52-5) | PEL | 5 mg/m3 | Oil mist |
| White Mineral Oil (CAS 8042-47-5) | TWA | 5 mg/m3 | Oil mist. |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-------------------------------|------|------------------------|
| Carbon Dioxide (CAS 124-38-9) | PEL | 9000 mg/m3 5000 ppm |

ACGIH

| Components | Type | Value | Form |
|---|------|---------|----------------------|
| Distillates Petroleum Hydrotreated Light (CAS 64742-47-8) | TWA | 5 mg/m3 | Oil mist |
| Petroleum Oil (CAS 64742-52-5) | TWA | 5 mg/m3 | Oil mist |
| White Mineral Oil (CAS 8042-47-5) | TWA | 5 mg/m3 | Respirable fraction. |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|---------------------------------------|------|-----------|
| 2-Methyl Butyl Acetate (CAS 624-41-9) | STEL | 100 ppm |
| | TWA | 50 ppm |
| Carbon Dioxide (CAS 124-38-9) | STEL | 30000 ppm |
| | TWA | 5000 ppm |

| U.S. - NIOSH Components | Type | Value | Form |
|--|------|-------------|-------|
| White Mineral Oil (CAS 8042-47-5) | TWA | 5 mg/m3 | Mist. |
| US. NIOSH: Pocket Guide to Chemical Hazards Components | Type | Value | |
| Carbon Dioxide (CAS 124-38-9) | STEL | 54000 mg/m3 | |
| | | 30000 ppm | |
| | TWA | 9000 mg/m3 | |
| | | 5000 ppm | |

Biological limit values No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear suitable protective clothing.

Respiratory protection If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Gas.

Form Aerosol.

Color Brown.

Odor Slight petroleum odor. Cherry.

Odor threshold Not established

pH Not applicable

Melting point/freezing point < -58 °F (< -50 °C)

Initial boiling point and boiling range 383 °F (195 °C) @ 101 kPa

Flash point 174.2 °F (79.0 °C) Tag Closed Cup (dispensed liquid)

Evaporation rate < 0.1 BuAc

Flammability (solid, gas) Flammable gas.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) 0.6 %

Flammability limit - upper (%) 7 %

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure < 0.05 mm Hg @ 20°C (dispensed liquid)

Vapor density 4.7 (air = 1)

Relative density Not available.

| | |
|--|-----------------------|
| Solubility(ies) | |
| Solubility (water) | < 3 % |
| Partition coefficient (n-octanol/water) | < 1 |
| Auto-ignition temperature | > 442.4 °F (> 228 °C) |
| Decomposition temperature | Not established |
| Viscosity | < 7 cSt |
| Viscosity temperature | 77 °F (25 °C) |
| Other information | |
| Explosive properties | Not explosive. |
| Heat of combustion | > 30 kJ/g |
| Oxidizing properties | Not oxidizing. |
| Percent volatile | 92 - 95 % |
| Specific gravity | 0.82 - 0.86 @ 20°C |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |
| Conditions to avoid | Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | Carbon oxides. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | Prolonged inhalation may be harmful. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |
| Ingestion | Expected to be a low ingestion hazard. |

Symptoms related to the physical, chemical and toxicological characteristics
Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity Not expected to be acutely toxic.

| Components | Species | Test Results |
|---|---------|--|
| Distillates Petroleum Hydrotreated Light (CAS 64742-47-8) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg |
| Inhalation | | |
| <i>Vapor</i> | | |
| LC50 | Rat | > 4.5 mg/l, 4 Hours > 0.1 mg/l, 8 Hours |
| Oral | | |
| LD50 | Rat | > 5000 mg/kg |
| Petroleum Oil (CAS 64742-52-5) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg |

| Components | Species | Test Results |
|---|--|------------------------|
| Inhalation | | |
| LC50 | Rat | > 3.9 mg/l, 4 Hours |
| Oral | | |
| LD50 | Rat | > 2000 mg/kg |
| White Mineral Oil (CAS 8042-47-5) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg, 24 Hours |
| Inhalation | | |
| LC50 | Rat | 2.2 mg/l, 4 Hours |
| Oral | | |
| LD50 | Rat | > 5000 mg/kg |
| Skin corrosion/irritation | Prolonged skin contact may cause temporary irritation. | |
| Serious eye damage/eye irritation | Direct contact with eyes may cause temporary irritation. | |
| Respiratory or skin sensitization | | |
| Respiratory sensitization | Not a respiratory sensitizer. | |
| Skin sensitization | This product is not expected to cause skin sensitization. | |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. | |
| Carcinogenicity | This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. | |
| IARC Monographs. Overall Evaluation of Carcinogenicity | | |
| Not listed. | | |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1052) | | |
| Not regulated. | | |
| US. National Toxicology Program (NTP) Report on Carcinogens | | |
| Not listed. | | |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. | |
| Specific target organ toxicity - single exposure | Not classified. | |
| Specific target organ toxicity - repeated exposure | Not classified. | |
| Aspiration hazard | Not likely, due to the form of the product. | |
| Chronic effects | Prolonged inhalation may be harmful. | |
| Further information | None known. | |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|---|---------|--|
| Distillates Petroleum Hydrotreated Light (CAS 64742-47-8) | | |
| Aquatic | | |
| Fish | LC50 | Rainbow trout, donaldson trout (Oncorhynchus mykiss) |
| | | 2.9 mg/l, 96 hours |

Persistence and degradability

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

LPS® 2 (Aerosol) < 1

Mobility in soil No data available.

Other adverse effects None known.

13. Disposal considerations

| | |
|--|---|
| Disposal instructions | Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. D003: Waste Reactive material |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers. |

14. Transport information

DOT

| | |
|-------------------------------------|---------------------|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not available. |
| Environmental hazards | |
| Marine pollutant | No |
| Special precautions for user | Not available. |
| Packaging exceptions | 306 |
| Packaging non bulk | None |
| Packaging bulk | None |

IATA

| | |
|-------------------------------------|----------------------------|
| UN number | UN1950 |
| UN proper shipping name | Aerosols, flammable |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not available. |
| Environmental hazards | No. |
| ERG Code | 10L |
| Special precautions for user | Not available. |
| Other information | |
| Passenger and cargo aircraft | Allowed with restrictions. |
| Cargo aircraft only | Allowed with restrictions. |

IMDG

| | |
|---|---------------------|
| UN number | UN1950 |
| UN proper shipping name | AEROSOLS, flammable |
| Transport hazard class(es) | |
| Class | 2.1 |
| Subsidiary risk | - |
| Label(s) | 2.1 |
| Packing group | Not available. |
| Environmental hazards | |
| Marine pollutant | No |
| EmS | Not available. |
| Special precautions for user | Not available. |
| Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code | Not applicable. |

DOT



IATA; IMDG



General information

Avoid transport on vehicles where the load space is not separated from the driver's compartment. Ensure vehicle driver is aware of the potential hazards of the load and knows what to do in the event of an accident or an emergency. Before transporting product containers: Ensure that containers are firmly secured. Ensure cylinder valve is closed and not leaking. Ensure valve outlet cap nut or plug (where provided) is correctly fitted. Ensure valve protection device (where provided) is correctly fitted. Ensure adequate ventilation. Ensure compliance with applicable regulations.

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1052)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical

Yes

Classified hazard categories

Flammable (gases, aerosols, liquids, or solids)
Gas under pressure

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA)

Not regulated.

US state regulations

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

US. New Jersey Worker and Community Right-to-Know Act

Carbon Dioxide (CAS 124-38-9)

California Proposition 65

For more information go to www.P65Warnings.ca.gov.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Petroleum Oil (CAS 64742-52-5)

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | No |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| Taiwan | Taiwan Chemical Substance Inventory (TCSI) | No |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------|------------|
| Issue date | 11-01-2016 |
| Revision date | 08-30-2018 |
| Version # | 04 |

Disclaimer ITW Pro Brands cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Revision information Regulatory information: US state regulations



CIP 200[®] Acid-Based Process and Research

Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

Date of issue: 09/26/2018

Version: 1.0

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product form : Mixture
Trade name : CIP 200[®] Acid-Based Process and Research Cleaner
Product code : 1D20

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Acid-Based Process and Research Cleaner

1.3. Details of the supplier of the safety data sheet

STERIS Corporation
P. O. Box 147, St. Louis, MO 63166, US
Telephone Number for Information: 1-800-444-9009 (Customer Service-Scientific Products)

1.4. Emergency telephone number

Emergency number : US Emergency Telephone No.1-314-535-1395 (STERIS); 1-800-424-9300 (CHEMTREC)

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

| | |
|-------------------------------------|------|
| Met. Corr. 1 | H290 |
| Acute Tox. 4 (Oral) | H302 |
| Acute Tox. 4 (Inhalation:dust,mist) | H332 |
| Skin Corr. 1B | H314 |
| Eye Dam. 1 | H318 |

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US) :



GHS05

GHS07

Signal word (GHS-US) : Danger

Hazard statements (GHS-US) : H290 - May be corrosive to metals
H302+H332 - Harmful if swallowed or if inhaled
H314 - Causes severe skin burns and eye damage

Precautionary statements (GHS-US) : P234 - Keep only in original container
P260 - Do not breathe mist, spray, vapors
P261 - Avoid breathing mist, spray, vapors
P264 - Wash hands thoroughly after handling
P270 - Do not eat, drink or smoke when using this product
P280 - Wear protective gloves/protective clothing and eye/face protection
P301+P312 - IF SWALLOWED: Call a doctor if you feel unwell
P301+P330+P331 - IF SWALLOWED: Rinse mouth. Do NOT induce vomiting
P303+P361+P353 - IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower
P304+P340 - IF INHALED: Remove person to fresh air and keep comfortable for breathing
P305+P351+P338 - IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
P406 - Store in corrosive resistant container with a resistant inner liner
P501 - Dispose of contents/container to comply with applicable local, national and international regulation.

2.3. Other hazards

No additional information available.

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable.

Full text of H-phrases: see section 16.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

3.2. Mixture

| Name | Product identifier | % | GHS-US classification |
|-----------------|--|---------|--|
| Phosphoric acid | (CAS No) 7664-38-2 (REACH No) 01-2119485924-24-0098 | 30 - 60 | Met. Corr. 1, H290 Acute Tox. 4 (Oral), H302 Acute Tox. 3 (Inhalation:dust,mist), H331 Skin Corr. 1B, H314 |
| Citric acid | (CAS No) 77-92-9 (REACH No) 01-2119457026-42-0067 | 3 - 7 | Eye Irrit. 2A, H319 |

SECTION 4: First aid measures

4.1. Description of first aid measures

| | |
|---------------------------------------|---|
| First-aid measures general | : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible). |
| First-aid measures after inhalation | : Remove to fresh air and keep at rest in a position comfortable for breathing. If not breathing, give artificial respiration. Get medical attention. |
| First-aid measures after skin contact | : Immediately flush skin with plenty of water for at least 15 minutes. Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. Get medical advice/attention. |
| First-aid measures after eye contact | : In case of contact with eyes flush immediately with plenty of flowing water for 10 to 15 minutes holding eyelids apart and consult an ophthalmologist. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately get medical attention. |
| First-aid measures after ingestion | : If victim completely conscious/alert. Rinse mouth. Do NOT induce vomiting. Immediately call a POISON CENTER or doctor/physician. Give water or milk if the person is fully conscious. |

4.2. Most important symptoms and effects, both acute and delayed

| | |
|--------------------------------------|---|
| Symptoms/injuries | : Symptoms may be delayed. Corrosive to eyes and skin. Causes severe skin burns and eye damage. |
| Symptoms/injuries after inhalation | : Toxic if inhaled. |
| Symptoms/injuries after skin contact | : Corrosive to eyes and skin. |
| Symptoms/injuries after eye contact | : Causes serious eye damage. |
| Symptoms/injuries after ingestion | : Swallowing a small quantity of this material will result in serious health hazard. Irritating to the respiratory system, may cause throat pain and cough. |

4.3. Indication of any immediate medical attention and special treatment needed

No additional information available.

SECTION 5: Firefighting measures

5.1. Extinguishing media

| | |
|--------------------------------|---|
| Suitable extinguishing media | : Use extinguishing media appropriate for surrounding fire. Foam. Dry powder. Carbon dioxide. Sand. |
| Unsuitable extinguishing media | : Do not use a heavy water stream. |

5.2. Special hazards arising from the substance or mixture

| | |
|--|---|
| Hazardous decomposition products in case of fire | : Thermal decomposition generates: Fume. Carbon monoxide. Carbon dioxide. Phosphorous oxide |
|--|---|

5.3. Advice for firefighters

| | |
|---------------------------------------|---|
| Firefighting instructions | : Exercise caution when fighting any chemical fire. Prevent fire-fighting water from entering environment. |
| Protective equipment for firefighters | : Use self-contained breathing apparatus. Do not enter fire area without proper protective equipment, including respiratory protection. |
| Other information | : Very flammable gas (hydrogen) may be formed on contact with metals. |

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

| | |
|------------------|--|
| General measures | : Do not breathe fumes, vapors. Avoid contact with skin, eyes and clothes. |
|------------------|--|

6.1.1. For non-emergency personnel

| | |
|----------------------|--|
| Protective equipment | : Wear protective gloves and eye/face protection. For further information refer to Section 8: Exposure-controls/personal protection. |
| Emergency procedures | : Stop leak if safe to do so. Evacuate unnecessary personnel. |

6.1.2. For emergency responders

| | |
|----------------------|--|
| Protective equipment | : Equip cleanup crew with proper protection. |
|----------------------|--|

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

Emergency procedures : Ventilate area.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams. Leftovers: Neutralize with sodium bicarbonate. Neutralize with dry sodium carbonate. Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Absorb spillage to prevent material damage. Collect spillage. Store away from other materials. Comply with applicable local, national and international regulation.

6.4. Reference to other sections

See Heading 8. Exposure controls and personal protection.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Additional hazards when processed : May be corrosive to metals.
Precautions for safe handling : Product for industrial use only. Read label before use. Provide good ventilation in process area to prevent formation of vapor. Avoid all eye and skin contact and do not breathe vapor and mist. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.
Hygiene measures : Take care for general good hygiene and housekeeping. Wash hands thoroughly after handling. Do not eat, drink or smoke when using this product.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Provide adequate ventilation. A washing facility/water for eye and skin cleaning purposes should be present.
Storage conditions : Keep only in the original container in a cool, well ventilated place. Keep container closed when not in use.
Incompatible materials : Strong oxidizing agents. Strong bases. Aluminium.
Storage area : Store in dry, cool, well-ventilated area.
Special rules on packaging : Correctly labelled.
Packaging materials : Keep only in the original container. Store in corrosive resistant container with a resistant inner liner.

7.3. Specific end use(s)

No additional information available.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Phosphoric acid (7664-38-2) | | |
|-----------------------------|-------------------------------------|---------------------|
| USA ACGIH | ACGIH TWA (mg/m ³) | 1 mg/m ³ |
| USA ACGIH | ACGIH STEL (mg/m ³) | 3 mg/m ³ |
| USA OSHA | OSHA PEL (TWA) (mg/m ³) | 1 mg/m ³ |

8.2. Exposure controls

Appropriate engineering controls : Ensure adequate ventilation. Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure.
Personal protective equipment : Avoid all unnecessary exposure. Personal protective equipment should be selected based upon the conditions under which this product is handled or used. Protective clothing. Gloves. Protective goggles.



Hand protection : Wear rubber gloves of suitable material, such as butyl, natural, neoprene, nitrile, polyethylene, polyvinyl chloride
Eye protection : Wear chemical splash goggle.
Skin and body protection : Wear suitable protective clothing. Wear long sleeves. Boots.
Respiratory protection : Work in well-ventilated zones or use proper respiratory protection. Wear appropriate mask.
Other information : Do not eat, drink or smoke during use.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|----------------------------------|
| Physical state | : Liquid |
| Appearance | : Clear to hazy |
| Color | : Colorless |
| Odor | : Mild odor, characteristic |
| Odor threshold | : No data available |
| pH | : No data available |
| pH solution | : Approximately 2 (1% solution) |
| Relative evaporation rate (butylacetate=1) | : No data available |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : No data available |
| Flash point | : >198°F (92.2°C) |
| Self ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Flammability (solid, gas) | : No data available |
| Vapor pressure | : No data available |
| Relative vapor density at 20 °C | : No data available |
| Relative density | : No data available |
| Density | : ca. 1.34 g/ml Specific Gravity |
| Solubility | : Water: Completely soluble |
| Log Pow | : No data available |
| Log Kow | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |
| Explosive properties | : No data available |
| Oxidising properties | : No data available |
| Explosive limits | : No data available. |

9.2. Other information

No additional information available.

SECTION 10: Stability and reactivity

10.1. Reactivity

No additional information available.

10.2. Chemical stability

Stable under normal conditions of use.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Extremely high or low temperatures.

10.5. Incompatible materials

Strong oxidizers. Strong bases. Aluminium.

10.6. Hazardous decomposition products

Thermal decomposition generates: Corrosive vapors. Phosphorous oxide. Fume. Carbon monoxide. Carbon dioxide.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Harmful if swallowed. Harmful if inhaled.

| CIP 200 [®] Acid-Based Process and Research Cleaner | |
|--|---------------|
| LD50 oral rat | > 1000 mg/kg |
| ATE (dust,mist) | 1.500 mg/l/4h |

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

| Phosphoric acid (7664-38-2) | |
|-----------------------------|----------------------------------|
| LD50 oral rat | 1530 mg/kg |
| LD50 dermal rabbit | 2730 mg/kg |
| LC50 inhalation rat (mg/l) | > 0.85 mg/l (Exposure time: 1 h) |
| ATE (oral) | 1530.000 mg/kg bodyweight |
| ATE (dermal) | 2730.000 mg/kg bodyweight |
| ATE (dust,mist) | 0.850 mg/l/4h |

| | |
|--|--|
| Skin corrosion/irritation | : Causes severe skin burns and eye damage pH: 2 |
| Serious eye damage/irritation | : Causes serious eye damage pH: 2 |
| Respiratory or skin sensitisation | : Not classified Based on available data, the classification criteria are not met |
| Germ cell mutagenicity | : Not classified Based on available data, the classification criteria are not met |
| Carcinogenicity | : Not classified Based on available data, the classification criteria are not met |
| Reproductive toxicity | : Not classified Based on available data, the classification criteria are not met |
| Specific target organ toxicity (single exposure) | : Not classified Based on available data, the classification criteria are not met |
| Specific target organ toxicity (repeated exposure) | : Not classified Based on available data, the classification criteria are not met |
| Aspiration hazard | : Not classified Based on available data, the classification criteria are not met |
| Potential Adverse human effects and symptoms | : Harmful if swallowed. |

SECTION 12: Ecological information

12.1. Toxicity

| Citric acid (77-92-9) | |
|-----------------------------|---|
| LC50 fishes 1 | 1516 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [Static]) |
| EC50 Daphnia 1 | 120 mg/l (Exposure time: 72 h - Species: Daphnia magna) |
| Phosphoric acid (7664-38-2) | |
| LC50 fishes 1 | 3 - 3.5 mg/l (Exposure time: 96 h - Species: Gambusia affinis) |
| EC50 Daphnia 1 | 4.6 mg/l (Exposure time: 12 h - Species: Daphnia magna) |

12.2. Persistence and degradability

| CIP 200 [®] Acid-Based Process and Research Cleaner | |
|--|--|
| Persistence and degradability | The surfactant(s) contained in this preparation complies(comply) with the biodegradability criteria as laid down in Regulation (EC) No. 648/2004 on detergents. Data to support this assertion are held at the disposal of the competent authorities of the Member States and will be made available to them, at their direct request or at the request of a detergent manufacturer. |

12.3. Bioaccumulative potential

| CIP 200 [®] Acid-Based Process and Research Cleaner | |
|--|------------------|
| Bioaccumulative potential | Not established |
| Citric acid (77-92-9) | |
| Log Pow | -1.72 (at 20 °C) |

12.4. Mobility in soil

No additional information available.

12.5. Other adverse effects

Other information : Avoid release to the environment.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

SECTION 13: Disposal considerations

13.1. Waste treatment methods

| | |
|--------------------------------|---|
| Waste disposal recommendations | : Dispose in a safe manner in accordance with local/national regulations. |
| Additional information | : Unused product : Hazardous waste (corrosive) based on pH. |
| Ecology - waste materials | : Avoid release to the environment. |

SECTION 14: Transport information

In accordance with DOT /ADR / RID / IMDG / IATA / ADN

14.1. UN number

| | |
|---------------|--------|
| UN-No | : 1805 |
| UN-No.(IATA) | : 1805 |
| UN-No. (IMDG) | : 1805 |

14.2. UN proper shipping name

| | |
|--------------------------------|---|
| Proper Shipping Name | : PHOSPHORIC ACID, LIQUID |
| Transport document description | : UN 1805 PHOSPHORIC ACID, LIQUID, 8, III |

14.3. Transport hazard class(es)

| | |
|--------------------|-----|
| Class (UN) | : 8 |
| Class (IMDG) | : 8 |
| Hazard labels (UN) | : 8 |



14.4. Packing group

| | |
|--------------------|-------|
| Packing group (UN) | : III |
|--------------------|-------|

14.5. Environmental hazards

| | |
|-------------------|--------------|
| Other information | : Corrosive. |
|-------------------|--------------|

14.6. Special precautions for user

| | |
|-------------------------------|--|
| Special transport precautions | : 4 x 1 gal package not approved for air shipment. |
|-------------------------------|--|

14.6.1. Overland transport

| | |
|---|------|
| Hazard identification number (Kemler No.) | : 80 |
| Classification code (UN) | : C1 |
| Orange plates | : |



| | |
|---------------------------|------|
| Transport category (ADR) | : 3 |
| Tunnel restriction code | : E |
| Limited quantities (ADR) | : 5L |
| Excepted quantities (ADR) | : E1 |
| EAC code | : 2R |

14.6.2. Transport by sea

No additional information available.

14.6.3. Air transport

No additional information available.

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

SECTION 15: Regulatory information

15.1. US Federal regulations

Citric acid (77-92-9)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Phosphoric acid (7664-38-2)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

15.2. US State regulations

Not applicable.

SECTION 16: Other information

Revision Date : 09/26/2018

Full text of H-phrases:

| | |
|-------------------------------------|---|
| Acute Tox. 3 (Inhalation:dust,mist) | Acute toxicity (inhalation:dust,mist), Category 3 |
| Acute Tox. 4 (Inhalation:dust,mist) | Acute toxicity (inhalation:dust,mist), Category 4 |
| Acute Tox. 4 (Oral) | Acute toxicity (oral), Category 4 |
| Eye Dam. 1 | Serious eye damage/eye irritation, Category 1 |
| Eye Irrit. 2 | Serious eye damage/eye irritation, Category 2 |
| Met. Corr. 1 | Corrosive to metals, Category 1 |
| Skin Corr. 1B | Skin corrosion/irritation, Category 1A |
| H290 | May be corrosive to metals |
| H302 | Harmful if swallowed |
| H314 | Causes severe skin burns and eye damage |
| H318 | Causes serious eye damage |
| H319 | Causes serious eye irritation |
| H331 | Toxic if inhaled |
| H332 | Harmful if inhaled |

NFPA health hazard


: 2 - Intense or continued exposure could cause temporary incapacitation or possible residual injury unless prompt medical attention is given

NFPA fire hazard

: 0 - Materials that will not burn.

NFPA reactivity

: 1 - Normally stable, but can become unstable at elevated temperatures and pressures or may react with water with some release of energy, but not violently



SDS US (GHS HazCom 2012)

The information on this sheet is not a specification and does not guarantee specific properties. The information is intended to provide general knowledge as to health and safety based upon our knowledge of the handling, storage and use of the product. It is not applicable to unusual or non-standard uses of the product or where instruction or recommendations are not followed.

1. Identification

| | |
|---|---|
| Product identifier | Oatey PVC Heavy Duty Clear or Gray Cement |
| Other means of identification | |
| SDS number | 1102E |
| Synonyms | Part Numbers: Clear 30850, 30863, 30876(TV), 30882, 31008(TV), 31011, 31950, 31951, 31952, 31953 Gray 30349, 31093, 31094, 31095, 31105, 31118, 31978, 31979, 31980, 31981, 32050, 32051, 32052, 32210, 32211 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | Oatey Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only outdoors or in a well-ventilated area. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |

Hazard(s) not otherwise classified (HNOC)

Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen.

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 30-60 |
| 2-Propanone | 67-64-1 | 10-30 |
| Cyclohexanone | 108-94-1 | 10-30 |
| Polyvinyl chloride | 9002-86-2 | 10-30 |
| Methyl ethyl ketone | 78-93-3 | 5-10 |
| Colloidal silicon dioxide | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation

Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

Skin contact

Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse.

Eye contact

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Ingestion

Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis.

Most important symptoms/effects, acute and delayed

Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. May cause redness and pain.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information

Take off all contaminated clothing immediately. IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media

Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Unsuitable extinguishing media

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards

Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid inhalation of vapors or mists. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Use water spray to reduce vapors or divert vapor cloud drift. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not taste or swallow. Avoid breathing mist or vapor. Avoid contact with skin. Avoid contact with eyes. Avoid prolonged exposure. Avoid contact with clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). Keep in an area equipped with sprinklers.

8. Exposure controls/personal protection

Occupational exposure limits

U.S. - OSHA

| Components | Type | Value | Form |
|---|------|-----------------------|--------------|
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 0.8 mg/m ³ | Unspecified. |
| | | 20 mppcf | Unspecified. |

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|-----------------------------------|------|------------------------------------|------|
| 2-Propanone (CAS 67-64-1) | PEL | 2400 mg/m ³ 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m ³ 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m ³ 200 ppm | |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|-----------------------|----------------------|
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m ³ | |
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 200 ppm | Respirable fraction. |
| | | 5 mg/m ³ | |
| | | 15 mg/m ³ | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|---|------|-----------------------|
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 0.8 mg/m ³ |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------------------|----------------------|
| 2-Propanone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm | |
| | TWA | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m ³ | Respirable fraction. |
| | TWA | | |

U.S. - NIOSH

| Components | Type | Value | Form |
|---|------|---------------------|--------------|
| Colloidal silicon dioxide (CAS 112945-52-5) | REL | 6 mg/m ³ | Unspecified. |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---|------|-----------------------|
| 2-Propanone (CAS 67-64-1) | TWA | 590 mg/m ³ |
| | | 250 ppm |
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 6 mg/m ³ |
| | | |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m ³ |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m ³ |
| | | 250 ppm |
| | TWA | 590 mg/m ³ |
| | | 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 885 mg/m ³ |
| | | 300 ppm |
| | TWA | 590 mg/m ³ |
| | | 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| 2-Propanone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Wash hands after handling and before eating.

9. Physical and chemical properties

Appearance

Opaque or Translucent.

Physical state

Liquid.

Form

Liquid.

Color

Gray or Clear.

Odor

Solvent.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

Not available.

Initial boiling point and boiling range

151 °F (66.11 °C)

Flash point

14.0 - 23.0 °F (-10.0 - -5.0 °C)

Evaporation rate

5.5 - 8

| | |
|---|----------------------------|
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.88 - 0.92 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 1200 - 2500 cP |
| Other information | |
| Bulk density | 7.5 lb/gal |
| VOC (Weight %) | <510 g/l SQACMD 1168/M316A |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. May cause irritation to the respiratory system. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. |

Symptoms related to the physical, chemical and toxicological characteristics Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |

| Components | Species | Test Results |
|--------------|---------|--------------|
| Oral LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | Suspected of causing cancer. In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure. This product contains polyvinyl chloride (PVC) that is not a fabricated product, and is therefore, defined and regulated as a toxic and hazardous substance under 29 C.F.R. § 1910.1017 due to the presumed presence of residual vinyl chloride monomer. The concentrations of residual vinyl chloride calculated to be contained in this product are well below the threshold for classification in accordance with 29 C.F.R. § 1910.1200. |

IARC Monographs. Overall Evaluation of Carcinogenicity

| | |
|---|---|
| Colloidal silicon dioxide (CAS 112945-52-5) | 3 Not classifiable as to carcinogenicity to humans. |
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| Polyvinyl chloride (CAS 9002-86-2) | 3 Not classifiable as to carcinogenicity to humans. |

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
|------------------------------------|--------|

| | |
|---|--|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Respiratory tract irritation. Narcotic effects. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

| | |
|--------------------|--|
| Ecotoxicity | The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment. |
|--------------------|--|

| Components | Species | Test Results |
|------------------------------|---------|---|
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--|
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | No data available. |
| Partition coefficient n-octanol / water (log Kow) | |
| 2-Propanone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

| | |
|-------------------------|--------------------|
| Mobility in soil | No data available. |
|-------------------------|--------------------|

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

UN number UN1133
UN proper shipping name Adhesives
Transport hazard class(es)
Class 3
Subsidiary risk -
Label(s) 3
Packing group II
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions T11, TP1, TP8, TP27
Packaging exceptions 150
Packaging non bulk 201
Packaging bulk 243

IATA

UN number UN1133
UN proper shipping name Adhesives
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3L
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1133
UN proper shipping name ADHESIVES
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards
Marine pollutant No.
EmS F-E, S-D
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer Central nervous system Liver Blood Flammability |
|------------------------------------|--|

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| 2-Propanone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|--|
| Hazard categories | Immediate Hazard - Yes Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No |
|--------------------------|--|

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| 2-Propanone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| 2-Propanone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| 2-Propanone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations

US. Massachusetts RTK - Substance List

2-Propanone (CAS 67-64-1)
Colloidal silicon dioxide (CAS 112945-52-5)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

2-Propanone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

2-Propanone (CAS 67-64-1)

Colloidal silicon dioxide (CAS 112945-52-5)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

2-Propanone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. This product contains trace amounts of chemicals known to the state of California to cause cancer. Under normal use conditions, exposure to these chemicals at levels above the State of California "No significant Risk Level" (NSRL) are unlikely. The use of proper personal protective equipment (PPE) and ventilation guidelines noted in Section 8 will minimize exposure levels to these chemicals.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------|--|
| Issue date | 04-August-2014 |
| Revision date | 15-December-2014 |
| Version # | 02 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |
| Disclaimer | The information in the sheet was written based on the best knowledge and experience currently available. |

1. Identification

| | |
|---|---|
| Product identifier | PVC All Weather Clear Cement |
| Other means of identification | |
| Product code | 1105E |
| Synonyms | Part Numbers: 31132, 31133, 31135, 31136, 31137 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | Oatey Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |

| | |
|--|--|
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|--------------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 35-55 |
| Acetone | 67-64-1 | 10-25 |
| Polyvinyl chloride | 9002-86-2 | 12-20 |
| Cyclohexanone | 108-94-1 | 10-20 |
| Silica, amorphous, fumed | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|------------|----------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 | |
| | | 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 | |
| | | 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 | |
| | | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 5 mg/m3 | Respirable fraction. |
| | | 15 mg/m3 | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|--|------|-----------|
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 0.8 mg/m3 |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------|----------------------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m3 | Respirable fraction. |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|--|------|-----------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | | 250 ppm |
| | TWA | 590 mg/m3 |
| | | 200 ppm |
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 6 mg/m3 |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9) Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Face shield is recommended. Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing.

Respiratory protection If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid.

Form Translucent liquid.

Color Gray.

Odor Solvent.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

Initial boiling point and boiling range 151 °F (66.11 °C)

Flash point -4.0 °F (-20.0 °C)

Evaporation rate 5.5 - 8

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) 1.8

Flammability limit - upper (%) 11.8

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure 145 mm Hg @ 20 C

Vapor density 2.5

Relative density 0.95 +/- 0.02

Solubility(ies)

Solubility (water) Negligible

Partition coefficient (n-octanol/water) Not available.

Auto-ignition temperature Not available.

Decomposition temperature Not available.

Viscosity 600 - 1500 cP

Other information

VOC (Weight %) < 510 g/l SCAQMD 1168/M316A

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia. |

Symptoms related to the physical, chemical and toxicological characteristics Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|----------------|---------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

| | |
|--|---|
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| Polyvinyl chloride (CAS 9002-86-2) | 3 Not classifiable as to carcinogenicity to humans. |
| Silica, amorphous, fumed (CAS 112945-52-5) | 3 Not classifiable as to carcinogenicity to humans. |

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
|------------------------------------|--------|

| | |
|---|---|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T11, TP1, TP8, TP27 |
| Packaging exceptions | 150 |
| Packaging non bulk | 201 |
| Packaging bulk | 243 |

IATA

| | |
|------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | ADHESIVES |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|------------------------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
| | Central nervous system |
| | Liver |
| | Blood |
| | Flammability |

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Silica, amorphous, fumed (CAS 112945-52-5)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Silica, amorphous, fumed (CAS 112945-52-5)

US. Rhode Island RTK

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | No |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 27-May-2015
Revision date -
Version # 01
HMIS® ratings Health: 2
Flammability: 3
Physical hazard: 0

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product form : Mixture
Product name : Snoop

1.2. Relevant identified uses of the substance or mixture and uses advised against

1.2.1. Relevant identified uses

Industrial/Professional use spec : Industrial
For professional use only
Use of the substance/mixture : Snoop® is a proprietary blend of water, non-ionic surfactants, and a bactericide.

1.2.2. Uses advised against

No additional information available

1.3. Details of the supplier of the safety data sheet

Swagelok
29495 F.A. Lennon Drive
44139 Solon, OH - United States
T 440-349-5600 - F 440-519-3304
www.swagelok.com

Supplier:
[Distributor, add your contact information](#)

1.4. Emergency telephone number

Emergency number : **Infotrac:** North America: 1-800-535-5053 International: 1-352-323-3500

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

Classification according to Regulation (EC) No. 1272/2008 [CLP]

Not classified- Non Hazardous

Adverse physicochemical, human health and environmental effects

No additional information available

2.2. Label elements

Labeling according to Regulation (EC) No. 1272/2008 [CLP]

No labeling applicable

2.3. Other hazards

Other hazards not contributing to the classification : Exposure may aggravate pre-existing eye, skin, or respiratory conditions.

SECTION 3: Composition/Information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

This mixture does not contain any substances to be mentioned according to the criteria of section 3.2 of REACH annex II

SECTION 4: First aid measures

4.1. Description of first aid measures

First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).
First-aid measures after inhalation : Allow affected person to breathe fresh air. Allow the victim to rest.
First-aid measures after skin contact : Remove affected clothing and wash all exposed skin area with mild soap and water, followed by warm water rinse.
First-aid measures after eye contact : Rinse immediately with plenty of water. Obtain medical attention if pain, blinking or redness persists.
First-aid measures after ingestion : Rinse mouth. Do NOT induce vomiting. Obtain emergency medical attention.

Snoop

Safety Data Sheet

according to Regulation (EC) No. 1907/2006 (REACH) with its amendment Regulation (EU) 2015/830

4.2. Most important symptoms and effects, both acute and delayed

| | |
|-------------------------------------|--|
| Symptoms/effects | : Not expected to present a significant hazard under anticipated conditions of normal use. |
| Symptoms/effects after inhalation | : Prolonged exposure may cause irritation. |
| Symptoms/effects after skin contact | : Prolonged exposure may cause skin irritation. |
| Symptoms/effects after eye contact | : May cause slight irritation. |
| Symptoms/effects after ingestion | : Ingestion may cause adverse effects. |

4.3. Indication of any immediate medical attention and special treatment needed

If exposed or concerned, get medical advice and attention. If medical advice is needed, have product container and SDS at hand.

SECTION 5: Firefighting measures

5.1. Extinguishing media

| | |
|--------------------------------|--|
| Suitable extinguishing media | : Foam. Dry powder. Carbon dioxide. Water spray. Sand. |
| Unsuitable extinguishing media | : Do not use a heavy water stream. |

5.2. Special hazards arising from the substance or mixture

| | |
|------------------|---|
| Fire hazard | : Not considered flammable but may burn at high temperatures. |
| Explosion hazard | : Product is not explosive. |

5.3. Advice for firefighters

| | |
|--------------------------------|---|
| Firefighting instructions | : Use water spray or fog for cooling exposed containers. Exercise caution when fighting any chemical fire. Prevent fire-fighting water from entering environment. |
| Protection during firefighting | : Do not enter fire area without proper protective equipment, including respiratory protection. |
| Other information | : Oxides of carbon and sulfur formed if burned. |

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

| | |
|------------------|--|
| General measures | : Use appropriate personal protection equipment (PPE). |
|------------------|--|

6.1.1. For non-emergency personnel

| | |
|----------------------|-----------------------------------|
| Emergency procedures | : Evacuate unnecessary personnel. |
|----------------------|-----------------------------------|

6.1.2. For emergency responders

| | |
|----------------------|--|
| Protective equipment | : Equip cleanup crew with proper protection. |
| Emergency procedures | : Ventilate area. |

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

| | |
|-------------------------|---|
| For containment | : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams. |
| Methods for cleaning up | : Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Collect spillage. Store away from other materials. |
| Other information | : Clean up spills immediately and dispose of waste safely. Transfer spilled material to a suitable container for disposal. Contact competent authorities after a spill. |

6.4. Reference to other sections

See Heading 8. Exposure controls and personal protection.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

| | |
|-----------------------------------|---|
| Additional hazards when processed | : Handle in accordance with standard industrial practices and ensure appropriate usage. Practice good housekeeping - spillage can be slippery on smooth surface either wet or dry. |
| Precautions for safe handling | : Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work. Provide good ventilation in process area to prevent formation of vapor. |
| Hygiene measures | : Do not eat, drink or smoke when using this product. |

7.2. Conditions for safe storage, including any incompatibilities

| | |
|------------------------|---|
| Storage conditions | : Keep only in the original container in a cool, well ventilated place away from : children. Keep container closed when not in use. |
| Incompatible products | : Strong acids, strong bases, strong oxidizers, water-reactive materials. |
| Incompatible materials | : Sources of ignition. Direct sunlight. |
| Storage area | : Keep from freezing and extreme heat to protect quality of the product. Store in a dry, cool and well-ventilated place. |

Snoop

Safety Data Sheet

according to Regulation (EC) No. 1907/2006 (REACH) with its amendment Regulation (EU) 2015/830

7.3. Specific end use(s)

No additional information available

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

No additional information available

8.2. Exposure controls

Appropriate engineering controls:

Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure. Ensure good ventilation of the workstation. General industrial hygiene practice.

Personal protective equipment:

Avoid all unnecessary exposure.

Hand protection:

Wear protective gloves.

Eye protection:

Chemical goggles or safety glasses

Skin and body protection:

Chemical resistant safety shoes. Impervious clothing

Respiratory protection:

If exposure limits are exceeded or irritation is experienced, approved respiratory protection should be worn. In case of inadequate ventilation, oxygen deficient atmosphere, or where exposure levels are not known wear approved respiratory protection.

Environmental exposure controls:

Avoid release to the environment.

Other information:

Do not eat, drink or smoke during use.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|---|---------------------|
| Physical state | : Liquid |
| Color | : No data available |
| Odor | : Characteristic. |
| Odor threshold | : No data available |
| pH | : No data available |
| Relative evaporation rate (butyl acetate=1) | : No data available |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : No data available |
| Flash point | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Flammability (solid, gas) | : Non flammable |
| Vapor pressure | : No data available |
| Relative vapor density at 20 °C | : No data available |
| Relative density | : No data available |
| Solubility | : No data available |
| Log Pow | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |
| Explosive properties | : No data available |
| Oxidizing properties | : No data available |
| Explosion limits | : No data available |

Snoop

Safety Data Sheet

according to Regulation (EC) No. 1907/2006 (REACH) with its amendment Regulation (EU) 2015/830

9.2. Other information

No additional information available

SECTION 10: Stability and reactivity

10.1. Reactivity

Hazardous reactions will not occur under normal conditions.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids, strong bases, strong oxidizers, water-reactive materials.

10.6. Hazardous decomposition products

Hazardous fumes. Carbon monoxide. Carbon dioxide.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity (oral) : Not classified

Acute toxicity (dermal) : Not classified

Acute toxicity (inhalation) : Not classified

Skin corrosion/irritation : Not classified

Serious eye damage/irritation : Not classified

Respiratory or skin sensitization : Not classified

Germ cell mutagenicity : Not classified

Carcinogenicity : Not classified

Reproductive toxicity : Not classified

Specific target organ toxicity – single exposure : Not classified

Specific target organ toxicity – repeated exposure : Not classified

Aspiration hazard : Not classified

Potential Adverse human health effects and symptoms : Based on available data, the classification criteria are not met.

SECTION 12: Ecological information

12.1. Toxicity

Aquatic acute : Not classified

Aquatic chronic : Not classified

12.2. Persistence and degradability

| Snoop | |
|-------------------------------|------------------|
| Persistence and degradability | Not established. |

12.3. Bioaccumulative potential

| Snoop | |
|---------------------------|------------------|
| Bioaccumulative potential | Not established. |

12.4. Mobility in soil

No additional information available

12.5. Results of PBT and vPvB assessment

No additional information available

12.6. Other adverse effects

Additional information : Avoid release to the environment.

Snoop

Safety Data Sheet

according to Regulation (EC) No. 1907/2006 (REACH) with its amendment Regulation (EU) 2015/830

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Product/Packaging disposal recommendations : Dispose in a safe manner in accordance with local/national regulations.
Ecology - waste materials : Avoid release to the environment.

SECTION 14: Transport information

In accordance with ADR / RID / IMDG / IATA / ADN

14.1. UN number

UN-No. (ADR) : Not applicable
UN-No. (IMDG) : Not applicable
UN-No. (IATA) : Not applicable
UN-No. (ADN) : Not applicable
UN-No. (RID) : Not applicable

14.2. UN proper shipping name

Proper Shipping Name (ADR) : Not applicable
Proper Shipping Name (IMDG) : Not applicable
Proper Shipping Name (IATA) : Not applicable
Proper Shipping Name (ADN) : Not applicable
Proper Shipping Name (RID) : Not applicable

14.3. Transport hazard class(es)

ADR

Transport hazard class(es) (ADR) : Not applicable

IMDG

Transport hazard class(es) (IMDG) : Not applicable

IATA

Transport hazard class(es) (IATA) : Not applicable

ADN

Transport hazard class(es) (ADN) : Not applicable

RID

Transport hazard class(es) (RID) : Not applicable

14.4. Packing group

Packing group (ADR) : Not applicable
Packing group (IMDG) : Not applicable
Packing group (IATA) : Not applicable
Packing group (ADN) : Not applicable
Packing group (RID) : Not applicable

14.5. Environmental hazards

Dangerous for the environment : No
Marine pollutant : No
Other information : No supplementary information available

14.6. Special precautions for user

- Overland transport

Not applicable

- Transport by sea

Not applicable

- Air transport

Not applicable

Snoop

Safety Data Sheet

according to Regulation (EC) No. 1907/2006 (REACH) with its amendment Regulation (EU) 2015/830

- Inland waterway transport

Not applicable

- Rail transport

Not applicable

14.7. Transport in bulk according to Annex II of Marpol and the IBC Code

Not applicable

SECTION 15: Regulatory information

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

15.1.1. EU-Regulations

Contains no REACH substances with Annex XVII restrictions

Contains no REACH candidate substance

Contains no REACH Annex XIV substances.

15.1.2. National regulations

No additional information available

15.2. Chemical safety assessment

No chemical safety assessment has been carried out

SECTION 16: Other information

Other information : None.

SDS EU (REACH Annex II)

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.



Revision Date: 07/31/2003

Print date: 07/31/2003

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product name: Loctite® Maxi-Coat Heavy Duty Rustproofing
Product type: Coating
Company address: Henkel Loctite Corporation
Item number: 51211
Region: United States
Contact Information: Telephone: 860.571.5100

2. COMPOSITION/INFORMATION ON INGREDIENTS

Table with 5 columns: Hazardous components, %, ACGIH TLV, OSHA PEL, OTHER. Lists ingredients like Stoddard solvent, Propane, Residual oils, n-Heptane, and n-Hexane with their respective exposure limits.

3. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW
HMIS:
Physical state: Liquid Aerosol
Color: Brown
Odor: Solvent
HEALTH: 1
FLAMMABILITY: 4
PHYSICAL HAZARD: Not available
Personal Protection: See Section 8
DANGER: EXTREMELY FLAMMABLE. CONTENTS UNDER PRESSURE. MAY CAUSE EYE, SKIN AND RESPIRATORY TRACT IRRITATION.

Relevant routes of exposure: Eye contact, Skin contact, Inhalation

Potential Health Effects

Inhalation: Moderate respiratory tract irritation. Headache, dizziness, nausea, and loss of coordination are indications of excessive exposure to vapors or spray mists.
Skin contact: Contact may dry the skin; prolonged contact may cause moderate irritation. Solvent action can dry and defat the skin, causing the skin to crack, leading to dermatitis.
Eye contact: Liquid or vapor can cause moderate to severe irritation.
Ingestion: Not a relevant route of exposure.

Item number: 51211

Product name: Loctite® Maxi-Coat Heavy Duty Rustproofing

Existing conditions aggravated by exposure: None known

See Section 11 for additional toxicological information.

4. FIRST AID MEASURES

Inhalation: Remove to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. If symptoms develop and persist, get medical attention.

Skin contact: Immediately flush skin with plenty of water (using soap, if available). If skin irritation persists, call a physician.

Eye contact: Immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention.

Ingestion: Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention if symptoms develop and persist.

5. FIRE-FIGHTING MEASURES

Flash point: Not applicable to aerosols. This product exhibits flashback when tested for flame extension.

Autoignition temperature: Not available

Flammable/Explosive limits-lower %: 0.7 %

Flammable/Explosive limits-upper %: 9.5 %

Extinguishing media: Foam. Carbon dioxide. Dry chemical. Water fog.

Special fire fighting procedures: Water spray may be ineffective. Water should be used to cool closed containers to prevent pressure build-up and possible autoignition or explosion when exposed to extreme heat. If water is used, fog nozzles are preferable. Wear self-contained breathing apparatus and full protective clothing, such as turn-out gear.

Unusual fire or explosion hazards: Closed containers may rupture (due to build up of pressure) when exposed to extreme heat. Vapor accumulation can flash or explode if ignited. Overexposure to decomposition products may cause a health hazard. Symptoms may not be readily apparent. Obtain medical attention.

Hazardous combustion products: Oxides of carbon. Irritating organic vapors.

6. ACCIDENTAL RELEASE MEASURES

Environmental precautions: None known

Clean-up methods: Ventilate area. Soak up with inert absorbent. Store in a closed container until ready for disposal.

7. HANDLING AND STORAGE

| | |
|-------------------------------|---|
| Handling: | Avoid contact with eyes, skin and clothing. Avoid breathing vapor and mist. Wash thoroughly after handling. |
| Storage: | Keep in a cool, well ventilated area. Do not puncture, incinerate, or expose to temperatures above 48.9 °C (120 °F). Keep away from heat, sparks and flame. |
| Incompatible products: | Oxidizing agents. |

For information on product shelf life contact Henkel Loctite Customer Service at (800) 243-4874.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

| | |
|--------------------------------|--|
| Engineering controls: | Local exhaust ventilation is recommended when general ventilation is not sufficient to control airborne contamination below occupational exposure limits. |
| Respiratory protection: | If personal exposure cannot be controlled below applicable limits by ventilation, wear a properly fitted organic vapor/particulate respirator approved by NIOSH for protection against materials in Section 2. |
| Skin protection: | Chemical resistant, impermeable gloves. |
| Eye/face protection: | Safety goggles or safety glasses with side shields. |

See Section 2 for exposure limits.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|---------------------------|
| Physical state: | Liquid Aerosol |
| Color: | Brown |
| Odor: | Solvent |
| Vapor pressure: | Not available |
| pH: | Not available |
| Boiling point/range: | -42.2-154.4°C (-44-310°F) |
| Melting point/range: | Not available |
| Specific gravity: | 0.73 |
| Vapor density: | Greater than 1 |
| Evaporation rate: | less than 1 |
| Solubility in water: | Nil |
| Partition coefficient (n-octanol/water): | Not available |
| VOC content: | 69.6% |

10. STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable. |
| Hazardous polymerization: | Will not occur. |
| Hazardous decomposition products: | May produce fumes when heated to decomposition. Fumes may contain carbon monoxide and other toxic fumes. |
| Incompatibility: | Oxidizing agents. |
| Conditions to avoid: | Heat, flames and sparks. Do not expose to temperatures above 48.9°C (120°F). |

11. TOXICOLOGICAL INFORMATION

Carcinogen Status

Item number: 51211

Product name: Loctite® Maxi-Coat Heavy Duty Rustproofing

| Hazardous components | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen |
|---|----------------|-----------------|-----------------|
| Stoddard solvent | No | No | No |
| Propane | No | No | No |
| Residual oils, petroleum, solvent deasphalted | No | No | No |
| n-Heptane | No | No | No |
| n-Hexane | No | No | No |

Literature Referenced Target Organ & Other Health Effects

| Hazardous components | Health Effects/Target Organs |
|---|---|
| Stoddard solvent | Central nervous system, Irritant |
| Propane | Cardiac, Central nervous system, Irritant |
| Residual oils, petroleum, solvent deasphalted | Irritant |
| n-Heptane | Central nervous system, Irritant |
| n-Hexane | Developmental, Irritant, Lung, Nervous System, Reproductive |

12. ECOLOGICAL INFORMATION

Ecological information: Not applicable

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Dispose of according to Federal, State and local governmental regulations.

EPA hazardous waste number: D001: Ignitable.

14. TRANSPORT INFORMATION

The shipping classifications in this section are for non-bulk packaging only (unless otherwise specified). Shipping classification may be different for bulk packaging.

U.S. Department of Transportation Ground (49 CFR):

Proper shipping name: Aerosols, flammable
Hazard class or division: 2.1
Identification number: UN 1950
Packing group: None
Exceptions: (Not more than 1 L) Consumer Commodity ORM-D
Marine pollutant: None

International Air Transportation (ICAO/IATA):

Proper shipping name: Aerosols, flammable
Hazard class or division: 2.1
Identification number: UN 1950
Packing group: None
Exceptions: (Not more than 500 ml) Consumer Commodity ID8000

Water Transportation (IMO/MDG):

Proper shipping name: Aerosols, flammable
Hazard class or division: 2.1
Identification number: UN 1950
Packing group: None
Marine pollutant: None

15. REGULATORY INFORMATION

United States Regulatory Information

| | |
|---|--|
| TSCA 8 (b) Inventory Status: | All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory. |
| TSCA 12 (b) Export Notification: | None. |
| CERCLA/SARA Section 302 EHS: | None. |
| CERCLA/SARA Section 311/312: | Immediate Health Hazard, Delayed Health Hazard, Fire, Sudden Release |
| CERCLA/SARA 313: | This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act of 1986 (40 CFR 372). n-Hexane (CAS# 110-54-3). |
| California Proposition 65: | No California Proposition 65 listed chemicals are known to be present. |

Canada Regulatory Information

| | |
|------------------------------|--|
| CEPA DSL/NDSL Status: | All components are listed on or are exempt from listing on the Domestic Substances List. |
| WHMIS hazard class: | A, B.5, D.2.A, D.2.B |

16. OTHER INFORMATION

This material safety data sheet contains changes from the previous version in sections:
New Material Safety Data Sheet format.

Prepared by: Rajal Dhruva, Health and Regulatory Affairs Specialist

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Loctite Corporation does not assume responsibility for any results obtained by persons over whose methods Henkel Loctite Corporation has no control. It is the user's responsibility to determine the suitability of Henkel Loctite's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any of Henkel Loctite Corporation's products. In light of the foregoing, Henkel Loctite Corporation specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel Loctite Corporation's products. Henkel Loctite Corporation further disclaims any liability for consequential or incidental damages of any kind, including lost profits.

SAFETY DATA SHEET

Lucas SAE 80W-90 Gear Oil



Section 1. Identification

GHS product identifier : Lucas SAE 80W-90 Gear Oil
Other means of identification : Not available.
Product number : 10043, 10046, 10066, 10067, 10069

Relevant identified uses of the substance or mixture and uses advised against

Lubricating oil.

Supplier's details : Lucas Oil Products, Inc
302 North Sheridan Street
Corona, California 92880-2067
Toll Free: (800) 342-2512
Tel: (951) 270-0154
Fax: (951) 270-1902
Website: www.LucasOil.com

Emergency telephone number (with hours of operation) : (951) 493-1149
(951) 847-5949
Markn@lucasoil.com

7:00A.M. to 5:00P.M. Monday thru Friday

Section 2. Hazards identification

OSHA/HCS status : While this material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200), this SDS contains valuable information critical to the safe handling and proper use of the product. This SDS should be retained and available for employees and other users of this product.

Classification of the substance or mixture : Not classified.

GHS label elements

Signal word : No signal word.

Hazard statements : No known significant effects or critical hazards.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Not applicable.

Response : Not applicable.

Storage : Not applicable.

Disposal : Not applicable.

Hazards not otherwise classified : None known.





Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Other means of identification : Not available.

CAS number/other identifiers

CAS number : Not applicable.
Product code : Not available.

| Ingredient name | % | CAS number |
|--|--------------------|--------------------------|
| Lubricating oils, petroleum, c>25, hydrotreated bright stock-based Dec-1-ene, oligomers, hydrogenated | 30 - 60 10 - 30 | 72623-83-7 68037-01-4 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Get medical attention if irritation occurs.

Inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if symptoms occur. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.

Skin contact : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur.

Ingestion : Wash out mouth with water. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Do not induce vomiting unless directed to do so by medical personnel. Get medical attention if symptoms occur.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Inhalation : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Over-exposure signs/symptoms

Eye contact : No known significant effects or critical hazards.

Inhalation : No known significant effects or critical hazards.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.

Specific treatments : No specific treatment.

Protection of first-aiders : No action shall be taken involving any personal risk or without suitable training.

See toxicological information (Section 11)



Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media : None known.

Specific hazards arising from the chemical : No specific fire or explosion hazard.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
nitrogen oxides
sulfur oxides
metal oxide/oxides

Special protective actions for fire-fighters : No special precaution is required.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Put on appropriate personal protective equipment.

For emergency responders : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill : Stop leak if without risk. Move containers from spill area. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8).

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.



Section 7. Handling and storage

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|--|--|
| Lubricating oils, petroleum, c>25, hydrotreated bright stock-based | ACGIH TLV (United States, 3/2012). TWA: 5 mg/m ³ 8 hours. Form: Inhalable fraction NIOSH REL (United States, 6/2009). TWA: 5 mg/m ³ 10 hours. Form: Mist STEL: 10 mg/m ³ 15 minutes. Form: Mist OSHA PEL (United States, 6/2010). TWA: 5 mg/m ³ 8 hours. |

Appropriate engineering controls : No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne contaminants. If this product contains ingredients with exposure limits, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure below any recommended or statutory limits.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Use a properly fitted, air-purifying or supplied air respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.



Section 9. Physical and chemical properties

Appearance

| | |
|--|---|
| Physical state | : Liquid. [Clear.] |
| Color | : Amber. |
| Odor | : Petroleum. Sulfur. |
| Odor threshold | : Not available. |
| pH | : Not available. |
| Melting point | : Not available. |
| Boiling point | : >260°C (>500°F) |
| Flash point | : Closed cup: 212.77°C (415°F) |
| Burning time | : Not applicable. |
| Burning rate | : Not applicable. |
| Evaporation rate | : Not available. |
| Flammability (solid, gas) | : Not available. |
| Lower and upper explosive (flammable) limits | : Not available. |
| Vapor pressure | : Not available. |
| Vapor density | : Not available. |
| Relative density | : 0.9042 |
| Solubility | : Negligible at 25°C |
| Solubility in water | : Not available. |
| Partition coefficient: n-octanol/water | : Not available. |
| Auto-ignition temperature | : Not available. |
| Decomposition temperature | : Not available. |
| SADT | : Not available. |
| Viscosity | : Kinematic (100°C (212°F)): 0.15 cm ² /s (15 cSt) |

Section 10. Stability and reactivity

| | |
|------------------------------------|--|
| Reactivity | : No specific test data related to reactivity available for this product or its ingredients. |
| Chemical stability | : The product is stable. |
| Possibility of hazardous reactions | : Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | : No specific data. |
| Incompatible materials | : Reactive or incompatible with the following materials: oxidizing materials. |
| Hazardous decomposition products | : Under normal conditions of storage and use, hazardous decomposition products should not be produced. |

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

There is no data available.

Irritation/Corrosion

Skin : There is no data available.

Section 11. Toxicological information

Eyes : There is no data available.

Respiratory : There is no data available.

Sensitization

Skin : There is no data available.

Respiratory : There is no data available.

Mutagenicity

There is no data available.

Carcinogenicity

There is no data available.

Reproductive toxicity

There is no data available.

Teratogenicity

There is no data available.

Specific target organ toxicity (single exposure)

There is no data available. Specific target organ

toxicity (repeated exposure) There is no data available.

Aspiration hazard

| Name | Result |
|---|--|
| Lubricating oils, petroleum, c>25, hydrotreated bright stock-based Dec-1-ene, oligomers, hydrogenated | ASPIRATION HAZARD - Category 1 ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Inhalation : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No known significant effects or critical hazards.

Inhalation : No known significant effects or critical hazards.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : No known significant effects or critical hazards.

Potential delayed effects : No known significant effects or critical hazards.

Long term exposure

Potential immediate effects : No known significant effects or critical hazards.

Potential delayed effects : No known significant effects or critical hazards.

Potential chronic health effects

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.



Section 11. Toxicological information

- Mutagenicity** : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

There is no data available.

Section 12. Ecological information

Toxicity

There is no data available.

Persistence and degradability

There is no data available.

Bioaccumulative potential

There is no data available.

Mobility in soil

- Soil/water partition coefficient (K_{oc})** : There is no data available.

- Other adverse effects** : No known significant effects or critical hazards.

Section 13. Disposal considerations

- Disposal methods** : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | IMDG | IATA |
|----------------------------|--------------------|----------------|----------------|
| UN number | Not regulated. | Not regulated. | Not regulated. |
| UN proper shipping name | - | - | - |
| Transport hazard class(es) | - | - | - |
| Packing group | - | - | - |





Section 14. Transport information

| | | | |
|------------------------|-----|-----|-----|
| Environmental hazards | No. | No. | No. |
| Additional information | - | - | - |

Special precautions for user : Transport within user's premises: always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) CDR Exempt/Partial exemption: Not determined
 United States inventory (TSCA 8b): All components are listed or exempted.
 Clean Water Act (CWA) 307: Antimony, dialkyl dithiocarbamate

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Not applicable.

Composition/information on ingredients

No products were found.

SARA 313

| | Product name | CAS number | % |
|---------------------------------|-----------------------------------|------------|-------|
| Form R - Reporting requirements | Antimony, dialkyl dithiocarbamate | 15890-25-2 | 1 - 5 |
| Supplier notification | Antimony, dialkyl dithiocarbamate | 15890-25-2 | 1 - 5 |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : None of the components are listed.

New York : None of the components are listed.





Section 15. Regulatory information

- [New Jersey](#) : The following components are listed: Lubricating oils, petroleum, c>25, hydrotreated bright stock-based; Distillates (petroleum), hydrotreated heavy paraffinic; Distillates (petroleum), hydrotreated heavy naphthenic; Antimony, dialkyl dithiocarbamate
- [Pennsylvania](#) : The following components are listed: Antimony, dialkyl dithiocarbamate
- [California Prop. 65](#)
No products were found.
- [International regulations](#)
- [International lists](#) : Australia inventory (AICS): All components are listed or exempted.
China inventory (IECSC): All components are listed or exempted.
Japan inventory: Not determined.
Korea inventory: All components are listed or exempted.
Malaysia Inventory (EHS Register): Not determined.
New Zealand Inventory of Chemicals (NZIoC): All components are listed or exempted.
Philippines inventory (PICCS): All components are listed or exempted.
Taiwan inventory (CSNN): Not determined.
- [Chemical Weapons Convention List Schedule I Chemicals](#) : Not listed
- [Chemical Weapons Convention List Schedule II Chemicals](#) : Not listed
- [Chemical Weapons Convention List Schedule III Chemicals](#) : Not listed

Section 16. Other information

[Hazardous Material Information System \(U.S.A.\)](#)

Health : 0 Flammability : 1 Physical hazards : 0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

[National Fire Protection Association \(U.S.A.\)](#)

Health : 0 Flammability : 1 Instability : 0

Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

[History](#)

- [Date of issue mm/dd/yyyy](#) : 12/30/2012
- [Version](#) : 1
- [Revised Section\(s\)](#) : Not applicable.
- [Prepared by](#) : KMK Regulatory Services Inc.



Section 16. Other information

Key to abbreviations

- : ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 1 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

29 CFR 1910.1200 (OSHA HazCom 2012)

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : MAC'S PREMIUM STARTING FLUID

Recommended use of the chemical and restrictions on use

| | |
|--|---|
| Details of the supplier of the safety data sheet Ashland P.O. Box 2219 Columbus, OH 43216 United States of America EHS Customer Requests@ashland.com | Emergency telephone number 1-800-ASHLAND (1-800-274-5263) Regulatory Information Number 1-800-325-3751 Product Information 614-790-3333 |
|--|---|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Flammable aerosols : Category 1
 Acute toxicity (Oral) : Category 4
 Carcinogenicity : Category 2
 Reproductive toxicity : Category 2
 Specific target organ systemic toxicity - single exposure : Category 3 (Central nervous system)
 Aspiration hazard : Category 1

GHS Label element

Hazard pictograms : 

Signal Word : Danger

Hazard Statements : Extremely flammable aerosol.
 Harmful if swallowed.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND | | Page: 2 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

May be fatal if swallowed and enters airways.
 May cause drowsiness or dizziness.
 Suspected of causing cancer.
 Suspected of damaging fertility or the unborn child.

Precautionary Statements

Prevention:

Obtain special instructions before use.
 Do not handle until all safety precautions have been read and understood.
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not spray on an open flame or other ignition source.
 Pressurized container: Do not pierce or burn, even after use.
 Avoid breathing dust/ fume/ gas/ mist/ vapors/ spray.
 Wash skin thoroughly after handling.
 Do not eat, drink or smoke when using this product.
 Use only outdoors or in a well-ventilated area.
 Wear protective gloves/ protective clothing/ eye protection/ face protection.

Response:

IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
 IF exposed or concerned: Get medical advice/ attention.
 Do NOT induce vomiting.

Storage:

Store in a well-ventilated place. Keep container tightly closed.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50 °C/ 122 °F.

Disposal:

Dispose of contents/ container to an approved waste disposal plant.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture
 Chemical nature : Static Accumulator
 Chemical nature : Defatter

Hazardous components

| Chemical Name | CAS-No. | Classification | Concentration (%) |
|------------------------------------|------------|--------------------|-------------------|
| SOLVENT NAPHTHA (PETROLEUM), LIGHT | 64742-89-8 | Flam. Liq. 2; H225 | 67.75 |

SAFETY DATA SHEET

Revision Date: 05/23/2015

Print Date: 6/1/2015

SDS Number: R0340955

MAC'S PREMIUM STARTING FLUID

Version: 1.0

NM7216

| | | | |
|----------------|----------|---|-------|
| ALIPHATIC | | STOT SE 3; H336 Asp. Tox. 1; H304 Aquatic Acute 2; H401 Aquatic Chronic 2; H411 | |
| ETHYL ETHER | 60-29-7 | Flam. Liq. 1; H224 Acute Tox. 4; H302 STOT SE 3; H336 | 29.33 |
| n-HEPTANE | 142-82-5 | Flam. Liq. 2; H225 Skin Irrit. 2; H315 STOT SE 3; H336 Asp. Tox. 1; H304 | 2.71 |
| CARBON DIOXIDE | 124-38-9 | Press. Gas Liquefied gas; H280 | 2.01 |
| ETHANOL | 64-17-5 | Flam. Liq. 2; H225 Eye Irrit. 2A; H319 STOT SE 3; H336 | 1.75 |
| ETHYL CHLORIDE | 75-00-3 | Flam. Gas 1; H220 Carc. 2; H351 | 0.43 |
| TOLUENE | 108-88-3 | Flam. Liq. 2; H225 Skin Irrit. 2; H315 Eye Irrit. 2A; H319 | 0.18 |

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 4 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

| | | | |
|--|--|-------------------|--|
| | | Repr. 2; H361 | |
| | | STOT SE 3; H336 | |
| | | STOT RE 2; H373 | |
| | | Asp. Tox. 1; H304 | |

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Call a POISON CENTRE or doctor/physician if exposed or you feel unwell.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : Move to fresh air.
If unconscious place in recovery position and seek medical advice.
Consult a physician after significant exposure.
- In case of skin contact : Remove contaminated clothing. If irritation develops, get medical attention.
If on skin, rinse well with water.
Wash contaminated clothing before re-use.
- In case of eye contact : Flush eyes with water as a precaution.
Remove contact lenses.
Protect unharmed eye.
If eye irritation persists, consult a specialist.
- If swallowed : Obtain medical attention.
Rinse mouth with water.
Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
- Most important symptoms and effects, both acute and delayed : Inhalation of high concentrations of this material, as could occur in enclosed spaces or during deliberate abuse, may be associated with cardiac arrhythmias. Sympathomimetic drugs may initiate cardiac arrhythmias in persons exposed to this material.
- Harmful if swallowed.
May be fatal if swallowed and enters airways.
May cause drowsiness or dizziness.
Suspected of causing cancer.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND | | Page: 5 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

Suspected of damaging fertility or the unborn child.
 Signs and symptoms of exposure to this material through breathing, swallowing, and/or passage of the material through the skin may include:
 stomach or intestinal upset (nausea, vomiting, diarrhea)
 irritation (nose, throat, airways)
 Cough
 loss of appetite
 confusion
 irregular heartbeat
 respiratory failure

Notes to physician : No hazards which require special first aid measures.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
 Water spray
 Foam
 Alcohol-resistant foam
 Carbon dioxide (CO₂)
 Dry chemical
- Unsuitable extinguishing media : High volume water jet
- Specific hazards during firefighting : Never use welding or cutting torch on or near drum (even empty) because product (even just residue) can ignite explosively.
 Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
 Do not allow run-off from fire fighting to enter drains or water courses.
- Hazardous combustion products : Aldehydes
 carbon dioxide and carbon monoxide
 organic compounds
 Hydrocarbons
 formaldehyde-like
- Specific extinguishing methods :

 Product is compatible with standard fire-fighting agents.
- Further information : Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations.
 Use a water spray to cool fully closed containers.
- Special protective equipment for firefighters : In the event of fire, wear self-contained breathing apparatus.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 6 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, protective equipment and emergency procedures : Evacuate personnel to safe areas.
Remove all sources of ignition.
Use personal protective equipment.
Ensure adequate ventilation.
Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed.
- Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
If the product contaminates rivers and lakes or drains inform respective authorities.
- Other information : Comply with all applicable federal, state, and local regulations.
Suppress (knock down) gases/vapours/mists with a water spray jet.

SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Open drum carefully as content may be under pressure.
Provide sufficient air exchange and/or exhaust in work rooms.
Do not breathe vapours/dust.
Do not smoke.
Container hazardous when empty.
Take precautionary measures against static discharges.
Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
Smoking, eating and drinking should be prohibited in the application area.
For personal protection see section 8.
Dispose of rinse water in accordance with local and national regulations.
Container may be opened only under exhaust ventilation hood.
- Conditions for safe storage : BEWARE: Aerosol is pressurized. Keep away from direct sun exposure and temperatures over 50 °C. Do not open by force or throw into fire even after use. Do not spray on flames or red-hot objects.
Keep container tightly closed in a dry and well-ventilated place.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Observe label precautions.
No smoking.
Electrical installations / working materials must comply with

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 7 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

the technological safety standards.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|--|------------|----------------------------------|---|-------------|
| SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC | 64742-89-8 | TWA | 500 ppm | OSHA_TRANS |
| | | TWA | 300 ppm | ACGIH |
| | | TWA | 2,000 mg/m3 | OSHA_TRANS |
| | | TWA | 1,370 mg/m3 | ACGIH |
| ETHYL ETHER | 60-29-7 | TWA | 400 ppm | ACGIH |
| | | STEL | 500 ppm | ACGIH |
| | | PEL | 400 ppm 1,200 mg/m3 | OSHA_TRANS |
| | | TWA | 400 ppm 1,200 mg/m3 | TN OEL |
| | | STEL | 500 ppm 1,500 mg/m3 | TN OEL |
| | | REL | 85 ppm 350 mg/m3 | NIOSH/GUIDE |
| n-HEPTANE | 142-82-5 | Ceil_Time | 440 ppm 1,800 mg/m3 | NIOSH/GUIDE |
| | | PEL | 500 ppm 2,000 mg/m3 | OSHA_TRANS |
| | | TWA | 400 ppm | ACGIH |
| | | STEL | 500 ppm | ACGIH |
| | | TWA | 5,000 ppm | ACGIH |
| | | STEL | 30,000 ppm | ACGIH |
| CARBON DIOXIDE | 124-38-9 | REL | 5,000 ppm 9,000 mg/m3 | NIOSH/GUIDE |
| | | STEL | 30,000 ppm 54,000 mg/m3 | NIOSH/GUIDE |
| | | PEL | 5,000 ppm 9,000 mg/m3 | OSHA_TRANS |
| | | REL | 1,000 ppm 1,900 mg/m3 | NIOSH/GUIDE |
| | | PEL | 1,000 ppm 1,900 mg/m3 | OSHA_TRANS |
| | | STEL | 1,000 ppm | ACGIH |
| ETHANOL | 64-17-5 | TWA | 1,000 ppm 1,900 mg/m3 | Z1A |
| | | PEL | 500 ppm 2,000 mg/m3 | OSHA_TRANS |
| | | REL | 500 ppm 2,000 mg/m3 | OSHA_TRANS |
| | | PEL | 500 ppm 2,000 mg/m3 | OSHA_TRANS |
| DISTILLATES (PETROLEUM), HYDROTREATED LIGHT | 64742-53-6 | PEL | 500 ppm 2,000 mg/m3 | OSHA_TRANS |
| | | PEL | 500 ppm 2,000 mg/m3 | OSHA_TRANS |

SAFETY DATA SHEET

Revision Date: 05/23/2015

Print Date: 6/1/2015

SDS Number: R0340955

MAC'S PREMIUM STARTING FLUID

Version: 1.0

NM7216

| | | | | |
|----------------|----------|-----------|--------------------------|-----------------|
| NAPHTHENIC | | REL | 5 mg/m3 Mist. | NIOSH/GUID E |
| | | STEL | 10 mg/m3 Mist. | NIOSH/GUID E |
| | | PEL | 5 mg/m3 Mist. | OSHA_TRA NS |
| ETHYL CHLORIDE | 75-00-3 | TWA | 100 ppm | ACGIH |
| | | PEL | 1,000 ppm 2,600 mg/m3 | OSHA_TRA NS |
| | | TWA | 1,000 ppm 2,600 mg/m3 | Z1A |
| TOLUENE | 108-88-3 | TWA | 20 ppm | ACGIH |
| | | REL | 100 ppm 375 mg/m3 | NIOSH/GUID E |
| | | STEL | 150 ppm 560 mg/m3 | NIOSH/GUID E |
| | | TWA | 200 ppm | OSHA/Z2 |
| | | Ceiling | 300 ppm | OSHA/Z2 |
| | | MAX. CONC | 500 ppm | OSHA/Z2 |

Biological occupational exposure limits

| Components | CAS-No. | Control parameters | Biological specimen | Sampling time | Permissible concentration | Basis |
|------------|------------|---------------------------|---------------------|--|---------------------------|-------|
| TOLUENE | 108-88-3 | o-Cresol, with hydrolysis | Creatinine in urine | Sampling time: End of shift. | 0.3 mg/g | |
| Remarks: | Background | | | | | |
| | | toluene | Urine | Sampling time: End of shift. | 0.03 mg/l | |
| | | toluene | Blood | Sampling time: Prior to last shift of work week. | 0.02 mg/l | |

Engineering measures : Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Personal protective equipment

Respiratory protection : In the case of vapour formation use a respirator with an approved filter.
In the case of dust or aerosol formation use respirator with an approved filter.

A NIOSH-approved air-purifying respirator with an appropriate

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 9 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

cartridge and/or filter may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits (if applicable) or if overexposure has otherwise been determined. Protection provided by air-purifying respirators is limited. Use a positive pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are not known or any other circumstances where an air-purifying respirator may not provide adequate protection.

- Hand protection
Material : Nitrile rubber
- Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.
- Eye protection : Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.
- Skin and body protection : Wear as appropriate:
impervious clothing
Safety shoes
Flame-resistant clothing
Choose body protection according to the amount and concentration of the dangerous substance at the work place.
Wear resistant gloves (consult your safety equipment supplier).
- Hygiene measures : Wash hands before breaks and at the end of workday.
When using do not eat or drink.
When using do not smoke.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Physical state : aerosol
- Colour : colourless
- Odour : ether-like
- Odour Threshold : No data available
- pH : No data available
- : No data available
- Boiling point/boiling range : 94.3 °F / 34.6 °C
(1,013.232 hPa)
Calculated Phase Transition Liquid/Gas
- Flash point : -49 °F / -45 °C
Calculated Flash Point
- Evaporation rate : No data available

SAFETY DATA SHEET

Revision Date: 05/23/2015

Print Date: 6/1/2015

SDS Number: R0340955

MAC'S PREMIUM STARTING FLUID

Version: 1.0

NM7216

Flammability (solid, gas) : No data available

Upper explosion limit : 36.5 %(V)
Calculated Explosive Limit

Lower explosion limit : 1.05 %(V)
Calculated Explosive Limit

Vapour pressure : 717.2616 hPa (25 °C)
Calculated Vapor Pressure

Relative vapour density : No data available

Relative density : No data available

Density : 0.706 g/cm³ (15.56 °C)

Solubility(ies)

Water solubility : No data available

Solubility in other solvents : No data available

Partition coefficient: n-octanol/water : No data available

Thermal decomposition : No data available

Viscosity

Viscosity, dynamic : No data available

Viscosity, kinematic : No data available

Oxidizing properties : No data available

SECTION 10. STABILITY AND REACTIVITY

Reactivity : No decomposition if stored and applied as directed.

Chemical stability : Stable under recommended storage conditions.

Possibility of hazardous reactions : Vapours may form explosive mixture with air.

Conditions to avoid : Heat, flames and sparks.
excessive heat

Incompatible materials : Acids
Alkali metals
Ammonia
Bases
halogens

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 11 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

inorganic materials
Oxidizing agents
sodium
Sulphur compounds

Hazardous decomposition
products

Aldehydes
carbon dioxide and carbon monoxide
formaldehyde-like
Hydrocarbons
organic compounds

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure : Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Harmful if swallowed.

Components:

SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC:

Acute oral toxicity : LD 50 (Rat): > 8,000 mg/kg

Acute inhalation toxicity : LC 50 (Rat): 3400 ppm
Exposure time: 4 h
Test atmosphere: vapour

Acute dermal toxicity : LD 50 (Rat): > 4,000 mg/kg

ETHYL ETHER:

Acute oral toxicity : LD50 (Rat): 1,200 - 1,700 mg/kg

Acute inhalation toxicity : LC 50 (Rat): 32,000 mg/l
Exposure time: 4 h

n-HEPTANE:

Acute oral toxicity : LD 50 (Rat): Expected > 5,000 mg/kg
Remarks: Information given is based on data obtained from similar substances.

Acute inhalation toxicity : LC 50 (Rat, male and female): > 29.29 mg/l
Exposure time: 4 h
Test atmosphere: vapour
Method: OECD Test Guideline 403
Assessment: No adverse effect has been observed in acute inhalation toxicity tests.

Acute dermal toxicity : LD 50 (Rabbit): Expected > 2,000 mg/kg
Assessment: Not classified as acutely toxic by dermal absorption under GHS.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 12 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

Remarks: Information given is based on data obtained from similar substances.

ETHANOL:

Acute oral toxicity : LD 50 (Rat): 7,060 mg/kg

Acute inhalation toxicity : LC 50 (Rat): 117 - 125 mg/l
Exposure time: 4 h

LC 50 (Mouse): 39 mg/l
Exposure time: 4 h

Acute dermal toxicity : LD Lo (Rabbit): 20 g/kg

ETHYL CHLORIDE:

Acute inhalation toxicity : LC 50 (Rat): > 19000 ppm
Exposure time: 4 h
Test atmosphere: vapour
Method: OECD Test Guideline 403

TOLUENE:

Acute oral toxicity : LD 50 (Rat): > 5,000 mg/kg

Acute inhalation toxicity : LC 50 (Rat): 8000 ppm
Exposure time: 4 h

Acute dermal toxicity : LD 50 (Rabbit): 12,124 mg/kg

Skin corrosion/irritation

Not classified based on available information.

Product:

Result: Repeated exposure may cause skin dryness or cracking.

Components:

SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC:

Result: Mildly irritating to skin

ETHYL ETHER:

Result: Irritating to skin

n-HEPTANE:

Result: Irritating to skin

CARBON DIOXIDE:

Result: Not irritating to skin

ETHANOL:

Result: Slightly irritating to skin

ETHYL CHLORIDE:

Result: Mildly irritating to skin

TOLUENE:

| | | |
|--|--|---------------------------|
| ASHLAND® | | Page: 13 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID NM7216 | | Version: 1.0 |

Result: Irritating to skin

Serious eye damage/eye irritation

Not classified based on available information.

Product:

Remarks: Vapours may cause irritation to the eyes, respiratory system and the skin.

Components:

SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC:

Result: Mildly irritating to eyes

ETHYL ETHER:

Result: Severely irritating to eyes

n-HEPTANE:

Result: Mildly irritating to eyes

CARBON DIOXIDE:

Result: Not irritating to eyes

ETHANOL:

Result: Irritating to eyes

ETHYL CHLORIDE:

Result: Mildly irritating to eyes

TOLUENE:

Result: Irritating to eyes

Respiratory or skin sensitisation

Skin sensitisation: Not classified based on available information.

Respiratory sensitisation: Not classified based on available information.

Components:

n-HEPTANE:

Test Type: Maximisation Test (GPMT)

Species: Guinea pig

Result: Did not cause sensitisation on laboratory animals.

Germ cell mutagenicity

Not classified based on available information.

Components:

n-HEPTANE:

Genotoxicity in vitro

: Test Type: Chromosome aberration test in vitro
Test species: rat hepatocytes
Method: OECD Test Guideline 473
Result: negative

: Test Type: Ames test
Method: OECD Test Guideline 471
Result: negative

Carcinogenicity

Suspected of causing cancer.

Components:

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 14 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

ETHYL CHLORIDE:

Carcinogenicity - Assessment : Limited evidence of carcinogenicity in animal studies

Reproductive toxicity

Suspected of damaging fertility or the unborn child.

Components:

TOLUENE:

Reproductive toxicity - Assessment : Some evidence of adverse effects on sexual function and fertility, and/or on development, based on animal experiments.

STOT - single exposure

May cause drowsiness or dizziness.

Components:

ETHYL ETHER:

Assessment: May cause drowsiness or dizziness.

n-HEPTANE:

Assessment: May cause drowsiness or dizziness.

ETHANOL:

Assessment: May cause drowsiness or dizziness.

TOLUENE:

Exposure routes: Inhalation

Target Organs: Central nervous system

Assessment: May cause drowsiness or dizziness.

STOT - repeated exposure

Not classified based on available information.

Components:

TOLUENE:

Exposure routes: Inhalation

Target Organs: Neurologic: other (neuropsychological effects, auditory dysfunction and effects on colour vision)

Assessment: May cause damage to organs through prolonged or repeated exposure.

Aspiration toxicity

May be fatal if swallowed and enters airways.

Components:

SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC:

May be fatal if swallowed and enters airways.

n-HEPTANE:

May be fatal if swallowed and enters airways.

TOLUENE:

May be fatal if swallowed and enters airways.

Further information

Product:

Remarks: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting., Concentrations substantially above the TLV value may cause narcotic effects., Solvents may degrease the skin.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 15 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

Components:

ETHYL CHLORIDE:

Remarks: Liver

Remarks: Central nervous system

Carcinogenicity:

IARC

Group 1: Carcinogenic to humans

DISTILLATES 64742-53-6
(PETROLEUM),
HYDROTREATED LIGHT
NAPHTHENIC

OSHA

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

NTP

Known to be human carcinogen

DISTILLATES 64742-53-6
(PETROLEUM),
HYDROTREATED LIGHT
NAPHTHENIC

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

n-HEPTANE:

Toxicity to daphnia and other aquatic invertebrates : EC 50 (Water flea (Daphnia magna)): 1.5 mg/l
Exposure time: 48 h
Test Type: static test

LC 50 (Mysidopsis bahia (opossum shrimp)): 0.1 mg/l
Exposure time: 96 h
Test Type: semi-static test

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOELR (Water flea (Daphnia magna)): 1 mg/l
Exposure time: 21 d
Test Type: static test
Test substance: WAF
Method: OECD Test Guideline 211
Remarks: Information given is based on data obtained from similar substances.

Ecotoxicology Assessment
Acute aquatic toxicity : Very toxic to aquatic life.

Chronic aquatic toxicity : Very toxic to aquatic life with long lasting effects.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 16 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

ETHANOL:

Toxicity to fish : LC 50 (Rainbow trout,donaldson trout (Oncorhynchus mykiss)): 12,000 - 16,000 mg/l
Exposure time: 96 h
Test Type: static test

Toxicity to daphnia and other aquatic invertebrates : EC 50 (Water flea (Daphnia magna)): > 10,000 mg/l
Exposure time: 48 h
Test Type: static test

ETHYL CHLORIDE:

Toxicity to daphnia and other aquatic invertebrates : EC50 (Water flea (Daphnia magna)): 58 mg/l
Exposure time: 48 h
Test Type: static test
Method: Directive 67/548/EEC, Annex V, C.2.

Toxicity to algae : EC50 (Desmodesmus subspicatus (green algae)): 118 mg/l
End point: Growth inhibition
Exposure time: 72 h
Test Type: static test
Method: Directive 67/548/EEC, Annex V, C.3.

TOLUENE:

Toxicity to fish : LC50 (Oncorhynchus kisutch (coho salmon)): 5.5 mg/l
Exposure time: 96 h
Test Type: flow-through test

Toxicity to daphnia and other aquatic invertebrates : EC50 (Water flea (Ceriodaphnia dubia)): 3.78 mg/l
Exposure time: 48 h
Remarks: Mortality

Toxicity to algae : EC50 (Pseudokirchneriella subcapitata (microalgae)): > 433 mg/l
End point: Growth inhibition
Exposure time: 96 h

NOEC (Scenedesmus quadricauda (Green algae)): > 400 mg/l
End point: Growth inhibition
Exposure time: 7 d

Toxicity to fish (Chronic toxicity) : NOEC (Oncorhynchus mykiss (rainbow trout)): 1.39 mg/l
Exposure time: 40 d
Test Type: flow-through test

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Water flea (Ceriodaphnia dubia)): 0.74 mg/l
Exposure time: 7 d

Persistence and degradability

n-HEPTANE:

Biodegradability : Result: Readily biodegradable

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 17 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

ETHYL CHLORIDE:

Biodegradability : Inoculum: activated sludge
 Result: Not readily biodegradable.
 Biodegradation: 0 %
 Exposure time: 28 d
 Method: Directive 67/548/EEC Annex V, C.4.E.

TOLUENE:

Biodegradability : Result: Readily biodegradable

Bioaccumulative potential

ETHYL ETHER:

Partition coefficient: n-octanol/water : log Pow: 0.89

n-HEPTANE:

Partition coefficient: n-octanol/water : log Pow: 4.66

ETHANOL:

Partition coefficient: n-octanol/water : log Pow: -0.31

ETHYL CHLORIDE:

Partition coefficient: n-octanol/water : log Pow: 1.43

TOLUENE:

Bioaccumulation : Species: Ide, silver or golden orfe (Leuciscus idus)
 Bioconcentration factor (BCF): 94
 Exposure time: 3 d
 Concentration: 0.05 mg/l
 Method: Not reported

Partition coefficient: n-octanol/water : log Pow: 2.73

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Additional ecological information : An environmental hazard cannot be excluded in the event of unprofessional handling or disposal., Toxic to aquatic life with long lasting effects.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 18 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

General advice : The product should not be allowed to enter drains, water courses or the soil.
Do not contaminate ponds, waterways or ditches with chemical or used container.
Send to a licensed waste management company.

Dispose of in accordance with all applicable local, state and federal regulations.

Contaminated packaging : Empty remaining contents.
Empty containers should be taken to an approved waste handling site for recycling or disposal.
Do not re-use empty containers.
Do not burn, or use a cutting torch on, the empty drum.

SECTION 14. TRANSPORT INFORMATION

International transport regulations

REGULATION

| ID NUMBER | PROPER SHIPPING NAME | *HAZARD CLASS | SUBSIDIARY HAZARDS | PACKING GROUP | MARINE POLLUTANT / LTD. QTY. |
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|
| | | | | | |

MEXICAN REGULATION FOR THE LAND TRANSPORT OF HAZARDOUS MATERIALS AND WASTES

| | | | | | |
|----|------|---------------------------|---|--|--|
| UN | 1950 | ORM-D, CONSUMER COMMODITY | 2 | | |
| | | | | | |

INTERNATIONAL AIR TRANSPORT ASSOCIATION - PASSENGER

| | | | | | |
|----|------|---------------------------|-----|--|--|
| UN | 1950 | ORM-D, CONSUMER COMMODITY | 2.1 | | |
| | | | | | |

INTERNATIONAL AIR TRANSPORT ASSOCIATION - CARGO

| | | | | | |
|----|------|---------------------------|-----|--|--|
| UN | 1950 | ORM-D, CONSUMER COMMODITY | 2.1 | | |
| | | | | | |

INTERNATIONAL MARITIME DANGEROUS GOODS

| | | | | | |
|----|------|----------|-----|--|--|
| UN | 1950 | AEROSOLS | 2.1 | | |
| | | | | | |

TRANSPORT CANADA - INLAND WATERWAYS

| | | | | | |
|----|------|----------|-----|--|--|
| UN | 1950 | AEROSOLS | 2.1 | | |
| | | | | | |

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 19 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

TRANSPORT CANADA - RAIL

| | | | |
|----|------|----------|-----|
| UN | 1950 | AEROSOLS | 2.1 |
|----|------|----------|-----|

TRANSPORT CANADA - ROAD

| | | | | |
|----|------|----------|-----|--|
| UN | 1950 | AEROSOLS | 2.1 | MARINE POLLUTANT:(ALIPHATIC PETROLEUM NAPHTHA) |
|----|------|----------|-----|--|

U.S. DOT - INLAND WATERWAYS

| | | |
|--|---|-----|
| | Aerosols, flammable (engine starting fluid) | ORM |
|--|---|-----|

U.S. DOT - RAIL

| | | |
|--|---|-----|
| | Aerosols, flammable (engine starting fluid) | ORM |
|--|---|-----|

U.S. DOT - ROAD

| | | |
|--|----------|-----|
| | AEROSOLS | ORM |
|--|----------|-----|

*ORM = ORM-D, CBL = COMBUSTIBLE LIQUID

| | |
|------------------|-----|
| Marine pollutant | yes |
|------------------|-----|

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

| Components | CAS-No. | Component RQ (lbs) | Calculated product RQ (lbs) |
|-------------|---------|--------------------|-----------------------------|
| ETHYL ETHER | 60-29-7 | 100 | 340.921101 |

SARA 311/312 Hazards : Fire Hazard
Chronic Health Hazard
Acute Health Hazard

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 20 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

SARA 313 Component(s) : This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Pennsylvania Right To Know

| | | |
|---|------------|-----------------|
| SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC | 64742-89-8 | 50.00 - 70.00 % |
| ETHYL ETHER | 60-29-7 | 20.00 - 30.00 % |
| n-HEPTANE | 142-82-5 | 1.00 - 5.00 % |
| CARBON DIOXIDE | 124-38-9 | 1.00 - 5.00 % |
| ETHANOL | 64-17-5 | 1.00 - 5.00 % |

New Jersey Right To Know

| | | |
|---|------------|-----------------|
| SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC | 64742-89-8 | 50.00 - 70.00 % |
| ETHYL ETHER | 60-29-7 | 20.00 - 30.00 % |
| n-HEPTANE | 142-82-5 | 1.00 - 5.00 % |
| CARBON DIOXIDE | 124-38-9 | 1.00 - 5.00 % |
| ETHANOL | 64-17-5 | 1.00 - 5.00 % |
| DISTILLATES (PETROLEUM), HYDROTREATED LIGHT NAPHTHENIC | 64742-53-6 | 0.10 - 1.00 % |
| TOLUENE | 108-88-3 | 0.10 - 1.00 % |

California Prop 65 Proposition 65 warnings are not required for this product based on the results of a risk assessment.

The components of this product are reported in the following inventories:

- TSCA : On TSCA Inventory
- DSL : All components of this product are on the Canadian DSL.
- AUSTR : On the inventory, or in compliance with the inventory
- NZIOC : On the inventory, or in compliance with the inventory
- ENCS : Not in compliance with the inventory
- KECL : On the inventory, or in compliance with the inventory
- PICCS : On the inventory, or in compliance with the inventory
- IECSC : On the inventory, or in compliance with the inventory

Inventories

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 21 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

AICS (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIoC (New Zealand), PICCS (Philippines), TSCA (USA)

SECTION 16. OTHER INFORMATION

Further information

Revision Date: 05/23/2015

| | | | | | | | |
|---|--|---------------|----------|---------------------|----------|------------------------|----------|
| NFPA: | HMIS III: | | | | | | |
| <p>Flammability</p> <p>Health</p> <p>Instability</p> <p>Special hazard.</p> | <table border="1"> <tr> <td>HEALTH</td> <td>2</td> </tr> <tr> <td>FLAMMABILITY</td> <td>4</td> </tr> <tr> <td>PHYSICAL HAZARD</td> <td>0</td> </tr> </table> <p>0 = not significant, 1 = Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 2 | FLAMMABILITY | 4 | PHYSICAL HAZARD | 0 |
| HEALTH | 2 | | | | | | |
| FLAMMABILITY | 4 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Not applicable

Full text of H-Statements referred to under sections 2 and 3.

| | |
|------|---|
| H220 | Extremely flammable gas. |
| H224 | Extremely flammable liquid and vapor. |
| H225 | Highly flammable liquid and vapor. |
| H280 | Contains gas under pressure; may explode if heated. |
| H302 | Harmful if swallowed. |
| H304 | May be fatal if swallowed and enters airways. |
| H315 | Causes skin irritation. |
| H319 | Causes serious eye irritation. |
| H336 | May cause drowsiness or dizziness. |
| H351 | Suspected of causing cancer. |
| H361 | Suspected of damaging fertility or the unborn child. |
| H373 | May cause damage to organs through prolonged or repeated exposure if inhaled. |
| H401 | Toxic to aquatic life. |
| H411 | Toxic to aquatic life with long lasting effects. |

Sources of key data used to compile the Safety Data Sheet

Ashland internal data including own and sponsored test reports

The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 22 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Ashland's Environmental Health and Safety Department (1-800-325-3751).

List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists
 BEI : Biological Exposure Index
 CAS : Chemical Abstracts Service (Division of the American Chemical Society).
 CMR : Carcinogenic, Mutagenic or Toxic for Reproduction
 FG : Food grade
 GHS : Globally Harmonized System of Classification and Labeling of Chemicals.
 H-statement : Hazard Statement
 IATA : International Air Transport Association.
 IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization
 ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"
 IMDG : International Maritime Code for Dangerous Goods
 ISO : International Organization for Standardization
 logPow : octanol-water partition coefficient
 LCxx : Lethal Concentration, for xx percent of test population
 LDxx : Lethal Dose, for xx percent of test population.
 ICxx : Inhibitory Concentration for xx of a substance
 Ecxx : Effective Concentration of xx
 N.O.S.: Not Otherwise Specified
 OECD : Organization for Economic Co-operation and Development
 OEL : Occupational Exposure Limit
 P-Statement : Precautionary Statement
 PBT : Persistent , Bioaccumulative and Toxic
 PPE : Personal Protective Equipment
 STEL : Short-term exposure limit
 STOT : Specific Target Organ Toxicity
 TLV : Threshold Limit Value
 TWA : Time-weighted average
 vPvB : Very Persistent and Very Bioaccumulative
 WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act
 DOT : Department of Transportation
 FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act
 HMIRC : Hazardous Materials Information Review Commission
 HMIS : Hazardous Materials Identification System
 NFPA : National Fire Protection Association
 NIOSH : National Institute for Occupational Safety and Health
 OSHA : Occupational Safety and Health Administration
 PMRA : Health Canada Pest Management Regulatory Agency
 RTK : Right to Know
 WHMIS : Workplace Hazardous Materials Information System

SAFETY DATA SHEET

Section 1. IDENTIFICATION

Product Identifier

Product Name GASOILA® HARD SET.

Other means of Identification

Product Code BT04, BT08, BT16, FT32, FT28.

Recommended Use Pipe Thread Sealant.

Recommended Restrictions None Known.

Manufacturer

Company Name Federal Process Corporation
Address 4520 Richmond Road
Cleveland OH 44128
Telephone 1-800-846-7325

Emergency Telephone Number: Call Chemtrec at 1-800-424-9300

Section 2. HAZARDS IDENTIFICATION

PHYSICAL STATE: Liquid

Classification:

| | |
|-----------------------------------|------------|
| Flammable | Category 3 |
| Serious eye damage/eye irritation | Category 2 |
| Skin sensitization | Category 1 |

Signal Word:

Warning



Hazard Statements:

H226 - Flammable liquid and vapor.
H301 - Toxic if swallowed.
H370 - Causes damage to organs
H319 - Causes serious eye irritation.

Revised: 23rd March, 2018
Page 1 of 8

Precautionary Statements:

GASOILA®HARD SET

Prevention: P210 – Keep away heat, sparks, open flames, and hot surfaces. No smoking.
P261 – Avoid breathing dust/fume/gas/mist/vapors/spray.
P264 – Wash skin thoroughly after using.
P270 – Do not eat, drink or smoke when using this product.
P272 – Contaminated clothing should not be allowed out of the workplace.

Response: P305 + P351 + P338 – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P301 + P310 + P330 – IF SWALLOWED: Immediately call POISON CENTER or doctor/physician. Rinse mouth.
P337 + P313–If eye irritation persists: Get medical advice/attention.
P332 + P313 – If skin irritation or rash occurs: Get medical advice/attention.

Disposal: P 501 - Dispose of contents/container to an approved waste disposal plant.

Other Hazards: Toxic to aquatic life with long lasting effects.

Unknown Acute Toxicity: 2% of the mixture consists of ingredient(s) of unknown toxicity.

Section 3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS Number | Weight % |
|----------------|------------|-------------|
| Methyl alcohol | 67-56-1 | 25.0 – 35.0 |
| Resin | 9000-59-3 | 22.0 – 30.0 |

Section 4. FIRST AID MEASURES

First Aid Measures:

Eye Contact Rinse thoroughly with plenty of water, for 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical advice/attention.

Skin Contact If skin irritation occurs, rinse affected area with water. If skin irritation or rash occurs: Get medical advice/attention.

Inhalation Remove to fresh air. If signs/symptoms continue, get medical attention. Give oxygen or artificial respiration as needed.

Ingestion Do NOT induce vomiting Get medical attention immediately. Rinse mouth with water. Never give anything by mouth to an unconscious individual.

Most Important Symptoms and effects:

Symptoms Direct contact with eyes may cause temporary irritation.
Do NOT ingest.

Section 5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media: Use foam, dry chemical, carbon dioxide or water fog.

Unsuitable Extinguishing Media: Not determined.

Specific Hazards Arising from the Chemical:

Carbon oxides expected to be the primary hazardous combustion product.

Protective Equipment and Precautions for Firefighters:

As in any fire, wear self-contained breathing apparatus and other protective clothing. (approved or equivalent) and full protective gear.

Section 6. ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures:

Personal Precautions: Use personal protective equipment as required. Keep unnecessary personnel away.

Methods and Material for Containment and Cleaning Up:

Methods for Containment: Prevent further leakage or spillage if safe to do so.

Methods for Clean-Up: Keep in suitable, closed containers for disposal.

Section 7. HANDLING AND STORAGE

Precautions for Safe Handling:

Advice on Safe Handling: Avoid breathing vapors or mists. Contaminated work-clothing should not be allowed out of the workplace.

Conditions for Safe Storage, including Any Incompatibilities:

Storage Conditions: Keep containers tightly closed in a dry, cool and well-ventilated place. Do not store near heat, sparks, or open flames. KEEP OUT OF REACH OF CHILDREN.

Incompatible Materials: None known based on information supplied.

Section 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines:

| Chemical Name | ACGIH TWA | ACGIH STEL | OSHA TWA |
|---------------------------------|-----------|------------|----------------------------------|
| Methyl alcohol (CAS 67-56-1) | 200 ppm | 250 ppm | 200 ppm 260 mg/m ³ |
| Resin (CAS 9000-59-3) | N/A | N/A | N/A |

Appropriate Engineering Controls:

Engineering Controls: Apply technical measures to comply with the occupational exposure limits.

Individual Protection Measures, such as Personal Protective Equipment:

Eye/Face Protection: Avoid contact with eyes.

Skin and Body Protection: No protective equipment is needed under normal use conditions.

Respiratory Protection: Ensure adequate ventilation, especially in confined areas. If confined in poorly ventilated areas use NIOSH/MSHA

General Hygiene Considerations: Handle in accordance with good industrial hygiene and safety practice. Wash exposed areas thoroughly before eating, drinking, smoking or leaving work area. Launder contaminated clothing before reusing.

Section 9. PHYSICAL AND CHEMICAL PROPERTIES

Information on Basic Physical and Chemical Properties

| | | | |
|-----------------|-----------------|-----------------|----------------|
| Physical State: | Liquid. | Odor: | Mild. |
| Appearance: | Viscous liquid. | Odor Threshold: | Not available. |
| Color: | Red paste. | | |

| <u>Property</u> | <u>Values</u> |
|------------------------------|-----------------|
| pH | N/A |
| Melting Point/Freezing Point | Not determined. |
| Boiling Point/Boiling Range | Not determined. |

GASOILA®HARD SET

| | |
|--|-----------------------|
| Flash Point | 88F (31C) Closed Cup. |
| Evaporation Rate | Not determined. |
| Flammability (Solid, Gas) | n/a-liquid |
| Upper Flammability Limit | Not determined. |
| Lower Flammability Limit | Not determined. |
| Vapor Pressure | Not determined. |
| Vapor Density | Not determined. |
| Specific Gravity | 1.105 |
| Water Solubility | Slight. |
| Solubility in other Solvents | Not determined. |
| Partition Coefficient (n-octanol/water) | Not determined. |
| Auto-ignition Temperature | Not determined. |
| Decomposition Temperature | Not determined. |
| Kinematic Viscosity | Not determined. |
| Explosive Properties | Not determined. |
| Oxidizing Properties | Not determined. |

Section 10. STABILITY AND REACTIVITY

| | |
|--|--|
| <u>Reactivity:</u> | Not reactive under normal conditions. |
| <u>Chemical Stability:</u> | Stable under recommended storage conditions. |
| <u>Possibility of Hazardous Reactions:</u> | None under normal processing. |
| <u>Conditions to Avoid:</u> | Keep out of reach of children. |
| <u>Incompatible Materials:</u> | None known. |
| <u>Hazardous Decomposition Products:</u> | Oxides of carbon. |

Section 11. TOXICOLOGICAL INFORMATION

Revised: 23rd March, 2018
Page 5 of 8

Information on Likely Routes of Exposure:

Eye Contact: Causes serious eye irritation.
Skin Contact: May cause an allergic skin reaction.

GASOILA®HARD SET

Inhalation: Avoid breathing vapors or mists.

Ingestion: Do not taste or swallow.

Component Information:

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|-----------------------------|--|--------------------------|---------------------|
| Methyl alcohol (67-56-1) | 2,769 mg/kg (Rat) 3,600 mg/kg (Mouse) | 17,100 mg/kg (Rabbit) | 128.2 mg/L (Rat) |
| Resin (9000-59-3) | N/D | N/D | N/D |

Information on physical, chemical and toxicological effects:

Symptoms: Please section 4 of this SDS for symptoms.

Delayed and Immediate Effects as Well as Chronic Effects From Short and Long Term Exposure:

Sensitization: May cause an allergic skin reaction.

Carcinogenicity: Not classifiable as a human carcinogen.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|------------------------------|-------|------|-----|------|
| Methyl/ alcohol (67-56-1) | NO | NO | NO | NO |
| Resin (9000-59-3) | NO | NO | NO | NO |

Legend

IARC (International Agency for Research on Cancer).

Group3 IARC components are "not classifiable as human carcinogens".

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

Numerical Measures of Toxicity:

Not Determined.

Section 12. ECOLOGICAL INFORMATION

Ecotoxicity:

Toxic to aquatic life with lasting effects.

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to Microorganisms | Crustacea |
|-----------------------------|--|--|----------------------------|-----------|
| Methyl alcohol (67-56-1) | EC50/96 hours Scenedesmus subspicatus 22,000 mg/L | LC50/96 hours Blue gill; 15,4000 mg/l | N/D | N/D |
| Resin (9000-59-3) | N/D | N/D | N/D | N/D |

Persistence/Degradability: Not determined.

Bioaccumulation: Not determined.

Mobility: Not determined.

Other Adverse Effects: Not determined.

Section 13. DISPOSAL CONSIDERATIONS

Waste Treatment Method:

Disposal of Wastes: Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated Packaging: Disposal should be in accordance with applicable regional, national and local laws and regulations.

Section 14. TRANSPORT INFORMATION

DOT: Consumer Commodity ORM-D.

PROPER SHIPPING NAME: Consumer Commodity ORM-D.

IATA: ID8000 Consumer Commodity

IMDG: FLAMMABLE LIQUID N.O.S. (contains Methanol)
IDENTIFICATION NUMBER: UN1993, III

Section 15. REGULATORY INFORMATION

| | |
|---------------------------------------|-----------------|
| <u>International Inventories:</u> | Not determined. |
| <u>U.S. Federal Regulations:</u> | Not determined. |
| <u>SARA Title 313:</u> | Not determined. |
| <u>U.S. State Regulations:</u> | |
| <u>U.S Right-to-Know Regulations:</u> | Not determined. |

Section 16. OTHER INFORMATION

| | | | | |
|-------|---------------------|-------------------|------------------|-----------------------------------|
| NFPA: | Health Hazards 2 | Flammability 2 | Instability 0 | Special Hazards Not determined |
| HMS | Health Hazards 2 | Flammability 2 | Instability 0 | Special Hazards Not determined |

Issue Date: 1st March 2014

Revision Date: 23rd March 2018

DISCLAIMER:

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/2014 Version no.: 01 Supersedes: (-)

1. Identification of the Mixture and of the Company

Product identifier: **Crown Sprâ Tool (Replacement Power Pak) - Aerosol**

Product name:

Sprâ Tool (Replacement Power Pak 8211)

Relevant identified uses of the substance: Use to coat metal, wood, fiberglass, plastics and rubber. The Sprâ-Tool®Power -Pak is a hydrocarbon blended propellant that optimizes atomization and spray pressure. Clean and/or lubricate de-energized power equipment, hinges, rollers, tools, gears, pulleys and more!

Uses advised against: Poorly ventilated areas

| | |
|-----------------------------|--|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 001 (0) 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe Industries Incorporated |
| For Product Information: | 001 (0) 1-800-227-0196 |
| Emergency telephone number: | 001 (0) 1-800-424-9300 (CHEMTREC – 24 hrs) English Language Service |

2. Hazards identification

Classifications

Physical Hazards:

Press. Gas
Flam. Gas. 1

Health Hazards:

Carc. 1B
Muta. 1B

Environmental Hazards: N/AV

Labeling

Signal Word: Danger



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/2014 Version no.: 01 Supersedes: (-)

Hazard Statements: H220 – Extremely flammable gas.
 H280 – Contains gas under pressure; may explode if heated
 H340 – May cause genetic defects
 H350 – May cause cancer

Precautionary Statements: P101 - If medical advice is needed, have product container or label at hand
 P102 - Keep out of reach of children
 P103 - Read label before use
 P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking
 P211 - Do not spray on an open flame or other ignition source
 P251 - Pressurized container: Do not pierce or burn, even after use
 P261 - Avoid breathing dust/fume/gas/mist/vapours/spray
 P262 - Do not get in eyes, on skin, or on clothing
 P264 - Wash ... thoroughly after handling
 P280 - Wear protective gloves/eye protection/face protection

P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.
 P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F
 P501 - Dispose of contents/container in accordance with local/regional/national/international regulation
 P251 - Pressurized container: Do not pierce or burn, even after use



Symbols/Pictograms:

3. Composition / Information on Ingredients

Composition

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|------------------------|----------|------------|---------------|----------------|---|----------------------|
| Hydrocarbon Propellant | LPG | 68476-86-8 | 270-705-8 | 60-100% | Press. Gas Flam. Gas 1 Carc. 1B Muta. 1B | H220 H350 H340 |

Other Product Information



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/2014 Version no.: 01 Supersedes: (-)

Chemical Identity: Mixture

4.) First Aid Measures

| | |
|---|---|
| General Advice: | If symptoms persist, always call a doctor. |
| Inhalation First Aid: | Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately. |
| Skin Contact First Aid: | Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. |
| Eye Contact First Aid: | If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately. |
| Ingestion First Aid: | If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |
| Most Important Symptoms/Effects: | Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects. |

5. Fire Fighting Measures

| | |
|--|---|
| Flammable Properties: | Compressed gas |
| Auto Ignition Temperature: | Not Available |
| Suitable extinguishing media: | Carbon dioxide, dry chemical, water spray. |
| Unsuitable extinguishing media: | None known |
| Special hazards arising from the substance or mixture: | None known |
| Hazardous combustion products: | Carbon dioxide, Carbon monoxide |
| Fire & Explosion Hazards: | Closed Containers may rupture due to the buildup of pressure from extreme temperatures. |
| Precautions for fire-fighters: | Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode. |

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.
- 2) Maintain adequate ventilation.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/2014 Version no.: 01 Supersedes: (-)

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling:

Flammable compressed gas, use in a well ventilated area.
 Do not use near sources of ignition.
 Do not to eat, drink and smoke while working with this material.
 Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
 Storage Temperature: 32° to 120°F (0° to 49°C).
 No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
 Keep away from sources of ignition.
 Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|------------------------|------------|-----------------|------------------|----------------|-----------------|
| Hydrocarbon Propellant | 68476-86- | N/AV | N/AV | N/AV | N/AV |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/2014 Version no.: 01 Supersedes: (-)

| | | | | | |
|--|---|--|--|--|--|
| | 8 | | | | |
|--|---|--|--|--|--|

***Values are based on the 2014 Guide to Occupational Exposure Values by ACGIH**

9. Information on Basic Physical and Chemical Properties

| | |
|--|---|
| Appearance: Clear, colorless | Odor: Odorless |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: <0° F (-18° C) | Evaporation Rate: Faster than n-Butyl Acetate |
| Flammability Solid/Gas: Flammable gas | LEL: 0.6% UEL: 9.5% |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions
 Chemical stability: Stable under normal conditions
 Conditions to avoid: Heat and ignition sources
 Incompatible materials: Strong Oxidizing Agents
 Hazardous decomposition products: Will not occur

11. Toxicological Information

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: N/AV

Eye irritation data: N/AV

Skin irritation/sensitization/absorption data: N/AV

Reproductive toxicity data: N/AV



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/2014 Version no.: 01 Supersedes: (-)

Mutagenicity data: Muta. 1B

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure: Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV
IARC: N/AV
OSHA: N/AV

* Petroleum distillates may contain chemical carcinogens in limited quantities (< 0.01%). These quantities are determined by the supplier/fraction/purity of the distillate during the manufacturing process. Chemicals that may be present within distillates are listed on California's prop 65 list such as ETHYLBENZENE, BENZENE, and TOLUENE.

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.
Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|---------------|------------------|--------------------|
| | | | | | |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/2014 Version no.: 01 Supersedes: (-)

| | | | | | |
|--------|---|-----|----------------|----------------|--------------------------|
| UN1965 | HYDROCARBON GAS MIXTURE, LIQUIFIED, N.O.S. (HYDROCARBON PROPELLANT) | 2.1 | Not Applicable | Not Applicable | Reference 49 CFR 172.101 |
|--------|---|-----|----------------|----------------|--------------------------|

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|---|--------------|----------------|------------------|----------------------------|
| UN1965 | HYDROCARBON GAS MIXTURE, LIQUIFIED, N.O.S. (HYDROCARBON PROPELLANT) | 2.1 | Not Applicable | Not Applicable | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|---|--------------|----------------|------------------|---|
| UN1965 | HYDROCARBON GAS MIXTURE, LIQUIFIED, N.O.S. (HYDROCARBON PROPELLANT) | 2.1 | Not Applicable | Not Applicable | Reference IATA Dangerous Goods Regulation |

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

PROP 65 (CA): WARNING: This product may contain chemicals know to the state of California to cause cancer, birth defects or other reproductive harm.

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/2014 Version no.: 01 Supersedes: (-)

Date of Preparation/Revision: 12/4/2014

Supersedes: (-)

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.



SAFETY DATA SHEET

1. Identification

| | |
|---|---|
| Product identifier | HERCULES PVC CEMENT HEAVY BODY, SLOW SET CLEAR AND GRAY |
| Other means of identification | |
| SDS number | 7102E |
| Synonyms | Part Numbers: CLEAR – 60155, 60160, 60165 GRAY – 60210, 60215, 60220, 60225 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | HCC Holdings, Inc. an Oatey Affiliate |
| Address | 4700 West 160th Street Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only outdoors or in a well-ventilated area. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 30-60 |
| 2-Propanone | 67-64-1 | 10-30 |
| Cyclohexanone | 108-94-1 | 10-30 |
| Polyvinyl chloride | 9002-86-2 | 10-30 |
| Methyl ethyl ketone | 78-93-3 | 5-10 |
| Colloidal silicon dioxide | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid inhalation of vapors or mists. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
|--|---|

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Use water spray to reduce vapors or divert vapor cloud drift. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions**7. Handling and storage****Precautions for safe handling**

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not taste or swallow. Avoid breathing mist or vapor. Avoid contact with skin. Avoid contact with eyes. Avoid prolonged exposure. Avoid contact with clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). Keep in an area equipped with sprinklers.

8. Exposure controls/personal protection**Occupational exposure limits****U.S. - OSHA**

| Components | Type | Value | Form |
|---|------|-----------|--------------|
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 0.8 mg/m3 | Unspecified. |
| | | 20 mppcf | Unspecified. |

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|------------|----------------------|
| 2-Propanone (CAS 67-64-1) | PEL | 2400 mg/m3 | |
| | | 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 | |
| | | 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 | |
| | | 200 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 | |
| | | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 5 mg/m3 | Respirable fraction. |
| | | 15 mg/m3 | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|---|------|-----------|
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 0.8 mg/m3 |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------|----------------------|
| 2-Propanone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm | |
| | TWA | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m3 | Respirable fraction. |

U.S. - NIOSH

| Components | Type | Value | Form |
|---|------|---------|--------------|
| Colloidal silicon dioxide (CAS 112945-52-5) | REL | 6 mg/m3 | Unspecified. |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---|------|---------------------------------|
| 2-Propanone (CAS 67-64-1) | TWA | 590 mg/m3 250 ppm |
| Colloidal silicon dioxide (CAS 112945-52-5) | TWA | 6 mg/m3 |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | TWA | 250 ppm 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 885 mg/m3 |
| | TWA | 300 ppm 590 mg/m3 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| 2-Propanone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|--------|-------------|----------|---------------|
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9) Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing.

Respiratory protection If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Wash hands after handling and before eating.

9. Physical and chemical properties

Appearance Opaque.or Translucent.

Physical state Liquid.

Form Liquid.

Color Gray or Clear.

Odor Solvent.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

Initial boiling point and boiling range 151 °F (66.11 °C)

Flash point 14.0 - 23.0 °F (-10.0 - -5.0 °C)

Evaporation rate 5.5 - 8

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) Not available.

Flammability limit - upper (%) Not available.

| | |
|--|-----------------------------|
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.88 - 0.92 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 1200 - 2500 cP |
| Other information | |
| Bulk density | 7.5 lb/gal |
| VOC (Weight %) | < 510 g/l SQACMD Method 304 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. May cause irritation to the respiratory system. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. |

Symptoms related to the physical, chemical and toxicological characteristics Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--------------------------------|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer. In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure. This product contains polyvinyl chloride (PVC) that is not a fabricated product, and is therefore, defined and regulated as a toxic and hazardous substance under 29 C.F.R. § 1910.1017 due to the presumed presence of residual vinyl chloride monomer. The concentrations of residual vinyl chloride calculated to be contained in this product are well below the threshold for classification in accordance with 29 C.F.R. § 1910.1200.

IARC Monographs. Overall Evaluation of Carcinogenicity

Colloidal silicon dioxide (CAS 112945-52-5) 3 Not classifiable as to carcinogenicity to humans.

Cyclohexanone (CAS 108-94-1) 3 Not classifiable as to carcinogenicity to humans.

Polyvinyl chloride (CAS 9002-86-2) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Polyvinyl chloride (CAS 9002-86-2) Cancer

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Respiratory tract irritation. Narcotic effects.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

2-Propanone (CAS 67-64-1) -0.24

Cyclohexanone (CAS 108-94-1) 0.81

Furan, Tetrahydro- (CAS 109-99-9) 0.46

Methyl ethyl ketone (CAS 78-93-3) 0.29

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

| | |
|--|--|
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T11, TP1, TP8, TP27 |
| Packaging exceptions | 150 |
| Packaging non bulk | 201 |
| Packaging bulk | 243 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | ADHESIVES |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|------------------------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
| | Central nervous system |
| | Liver |
| | Blood |
| | Flammability |

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| 2-Propanone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|------------------------|
| Hazard categories | Immediate Hazard - Yes |
| | Delayed Hazard - No |
| | Fire Hazard - Yes |
| | Pressure Hazard - No |
| | Reactivity Hazard - No |

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| 2-Propanone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| 2-Propanone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| 2-Propanone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations**US. Massachusetts RTK - Substance List**

2-Propanone (CAS 67-64-1)
Colloidal silicon dioxide (CAS 112945-52-5)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

2-Propanone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

2-Propanone (CAS 67-64-1)
Colloidal silicon dioxide (CAS 112945-52-5)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

2-Propanone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. This product contains trace amounts of chemicals known to the state of California to cause cancer. Under normal use conditions, exposure to these chemicals at levels above the State of California "No significant Risk Level" (NSRL) are unlikely. The use of proper personal protective equipment (PPE) and ventilation guidelines noted in Section 8 will minimize exposure levels to these chemicals.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|----------------------|--|
| Issue date | 04-August-2014 |
| Revision date | 15-December-2014 |
| Version # | 02 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |
| Disclaimer | The information in the sheet was written based on the best knowledge and experience currently available. |



PROPANE

Safety Data Sheet

1. IDENTIFICATION

Product identifier

Product Name PROPANE

Other means of identification

Safety data sheet number IOC-P105 UN1978
UN/ID no. Dimethylmethane
Synonyms

Recommended use of the chemical and restrictions on use

Recommended Use Industrial and professional use.
Uses advised against Consumer use

Details of the supplier of the safety data sheet

Indiana Oxygen Company
6099 W. Corporate Way
Indianapolis, IN 46278
Phone: 317-290-0003
www.indianaoxygen.com

* May include subsidiaries or affiliate companies/divisions.

For additional product information contact your local customer service.

Emergency telephone number

Company Phone Number 1-800-535-5053 (Infotrak)

2. HAZARDS IDENTIFICATION

Classification

OSHA Regulatory Status

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200).

| | |
|----------------------|---------------|
| Flammable gases | Category 1 |
| Gases under pressure | Liquefied gas |
| Simple asphyxiants | Yes |

Label elements

Signal word

Danger

Hazard Statements

Extremely flammable gas

Contains gas under pressure; may explode if heated

May displace oxygen and cause rapid suffocation

May form explosive mixtures with air

May cause frostbite

Precautionary Statements - Prevention

Do not handle until all safety precautions have been read and understood

Keep away from heat/sparks/open flames/hot surfaces. — No smoking

Use and store only outdoors or in a well ventilated place

Use backflow preventive device in piping

Do not open valve until connected to equipment prepared for use

Close valve after each use and when empty

Never put cylinders into unventilated areas of passenger vehicles

Precautionary Statements - Response

IF INHALED: Remove person to fresh air and keep comfortable for breathing. Get medical attention/advice.

IF ON SKIN: Thaw frosted parts with lukewarm water. Do not rub affected area. Get immediate medical advice/attention.

Leaking gas fire: do not extinguish, unless leak can be stopped safely

Eliminate all ignition sources if safe to do so

Precautionary Statements - Storage

Protect from sunlight when ambient temperature exceeds 52°C/125°F

Hazards not otherwise classified (HNOC)

Not applicable

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No. | Volume % | Chemical Formula |
|---------------|---------|----------|-------------------------------|
| Propane | 74-98-6 | 100 | C ₃ H ₈ |

4. FIRST AID MEASURES

Description of first aid measures

| | |
|------------------------------------|--|
| General advice | Show this safety data sheet to the doctor in attendance. |
| Inhalation | Remove to fresh air and keep comfortable for breathing. If breathing is difficult, give oxygen. If breathing has stopped, give artificial respiration. Get medical attention immediately. |
| Skin contact | For dermal contact or suspected frostbite, remove contaminated clothing and flush affected areas with lukewarm water. DO NOT USE HOT WATER. A physician should see the patient promptly if contact with the product has resulted in blistering of the dermal surface or in deep tissue freezing. |
| Eye contact | If frostbite is suspected, flush eyes with cool water for 15 minutes and obtain immediate medical attention. |
| Ingestion | Not an expected route of exposure. |
| Self-protection of the first aider | RESCUE PERSONNEL SHOULD BE EQUIPPED WITH SELF-CONTAINED BREATHING APPARATUS. Remove all sources of ignition. |

Most important symptoms and effects, both acute and delayed

| | |
|----------|---|
| Symptoms | High concentrations may cause asphyxia from lack of oxygen or act as a narcotic causing central nervous system depression. May cause nausea, dizziness, headaches, shortness of breath, lethargy, narcosis, unconsciousness and possibly cardiac arrhythmias. Contact with liquid may cause cold burns/frostbite. |
|----------|---|

Indication of any immediate medical attention and special treatment needed

| | |
|--------------------|--|
| Note to physicians | A patient adversely affected by exposure to this product should not be given adrenaline (epinephrine) or similar heart stimulant since these would increase the risk of cardiac arrhythmias. |
|--------------------|--|

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

Dry chemical or CO₂. Water spray (fog). DO NOT EXTINGUISH A LEAKING GAS FIRE UNLESS LEAK CAN BE STOPPED.

Specific extinguishing methods

If possible, stop the flow of gas. Do not extinguish the fire until supply is shut off as otherwise an explosive-ignition may occur. If the fire is extinguished and the flow of gas continues, use increased ventilation to prevent build-up of explosive atmosphere. Ventilation fans must be explosion proof. Use non-sparking tools to close container valves.

Use water spray to cool surrounding containers. Be cautious of a Boiling Liquid Evaporating Vapor Explosion, BLEVE, if flame is impinging on surrounding containers. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Damaged cylinders should be handled only by specialists.

Specific hazards arising from the chemical

Extremely flammable gas. May form explosive mixtures with air. Will be easily ignited by heat, sparks or flames. Vapors may travel to source of ignition and flash back. Vapors from liquefied gas are initially heavier than air and spread along ground. Vapors may accumulate in confined areas (basement, tanks, hopper/tank cars, etc.). Cylinders may rupture under extreme heat.

Hazardous combustion products Carbon monoxide. Carbon dioxide (CO₂).

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal precautions ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Evacuate personnel to safe areas. Ensure adequate ventilation, especially in confined areas. Consider the risk of potentially explosive atmospheres. Monitor oxygen level. All equipment used when handling the product must be grounded. Use non-sparking tools and equipment. Wear self-contained breathing apparatus when entering area unless atmosphere is proved to be safe.

Other Information Gas/vapor is heavier than air. Prevent from entering sewers, basements and workpits, or any place where accumulation may be dangerous.

Environmental precautions

Environmental precautions Prevent spreading of vapors through sewers, ventilation systems and confined areas.

Methods and material for containment and cleaning up

Methods for containment Stop the flow of gas or remove cylinder to outdoor location if this can be done without risk. If leak is in container or container valve, contact the appropriate emergency telephone number in Section 1 or call your closest Indiana Oxygen location.

Methods for cleaning up Do not direct water at spill or source of leak. Return cylinder to Indiana Oxygen Company or an authorized distributor.

7. HANDLING AND STORAGE

Precautions for safe handling

Advice on safe handling Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Ground and bond all lines and equipment associated with product system. All equipment should be non-sparking and explosion proof. Separate flammable gas cylinders from oxygen and other oxidizers by a minimum distance of 20 ft. or by a 5 ft. high barrier with a minimum fire resistance rating of a half an hour. NO SMOKING" signs should be posted in storage and use areas.

Protect cylinders from physical damage; do not drag, roll, slide or drop. When moving cylinders, even for short distance, use a cart designed to transport cylinders. Never attempt to lift a cylinder by its valve protection cap. Never insert an object (e.g. wrench, screwdriver, pry bar, etc.) into valve cap openings. Doing so may damage valve, causing leak to occur. Use an adjustable strap wrench to remove over-tight or rusted caps. Use only with adequate ventilation. Use backflow preventive device in piping. Use only with equipment rated for cylinder pressure. Close valve after each use and when empty. If user experiences any difficulty operating cylinder valve discontinue use and contact supplier. Ensure the complete gas system has been checked for leaks before use.

Never put cylinders into trunks of cars or unventilated areas of passenger vehicles. Never attempt to refill a compressed gas cylinder without the owner's written consent. Never strike an arc on a compressed gas cylinder or make a cylinder a part of an electrical circuit.

Only experienced and properly instructed persons should handle gases under pressure. Always store and handle compressed gas cylinders in accordance with Compressed Gas Association, pamphlet CGA-P1, Safe Handling of Compressed Gases in Containers.

Conditions for safe storage, including any incompatibilities

| | |
|------------------------|--|
| Storage Conditions | Store in cool, dry, well-ventilated area of non-combustible construction away from heavily trafficked areas and emergency exits. Keep at temperatures below 52°C / 125°F. Cylinders should be stored upright with valve protection cap in place and firmly secured to prevent falling. Full and empty cylinders should be segregated. Use a "first in-first out" inventory system to prevent full cylinders from being stored for excessive periods of time. Stored containers should be periodically checked for general condition and leakage. Outside or detached storage is preferred. |
| Incompatible materials | Oxidizing agents. |

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure Guidelines

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|--------------------|---------------|--|--|
| Propane 74-98-6 | TWA: 1000 ppm | TWA: 1000 ppm TWA: 1800 mg/m ³ | IDLH: 2100 ppm TWA: 1000 ppm TWA: 1800 mg/m ³ |

ACGIH TLV: American Conference of Governmental Industrial Hygienists - Threshold Limit Value. OSHA PEL: Occupational Safety and Health Administration - Permissible Exposure Limits. NIOSH IDLH: Immediately Dangerous to Life or Health.

| | |
|-------------------|---|
| Other Information | Vacated limits revoked by the Court of Appeals decision in AFL-CIO v. OSHA, 965 F.2d 962 (11th Cir., 1992). |
|-------------------|---|

Appropriate engineering controls

| | |
|----------------------|---|
| Engineering Controls | Local exhaust ventilation to prevent accumulation of high concentrations and maintain air-oxygen levels at or above 19.5%. Explosion proof ventilation systems. Oxygen detectors should be used when asphyxiating gases may be released. Consider installation of leak detection systems in areas of use and storage. Systems under pressure should be regularly checked for leakages. Showers. Eyewash stations. |
|----------------------|---|

Individual protection measures, such as personal protective equipment

| | |
|--------------------------------|---|
| Eye/face protection | Wear safety glasses with side shields (or goggles). If splashes are likely to occur, wear: Goggles. Face-shield. |
| Skin and body protection | Work gloves and safety shoes are recommended when handling cylinders. Wear cold insulating gloves when handling liquid. Wear fire/flame resistant/retardant clothing. Take precautionary measures against static discharge. |
| Respiratory protection | If exposure limits are exceeded or irritation is experienced, NIOSH/MSHA approved respiratory protection should be worn. Positive-pressure supplied air respirators may be required for high airborne contaminant concentrations. Respiratory protection must be provided in accordance with current local regulations. |
| General Hygiene Considerations | Handle in accordance with good industrial hygiene and safety practice. Do not get in eyes, on skin, or on clothing. |

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | |
|----------------|--------------------------|
| Physical state | Compressed gas |
| Appearance | Colorless. |
| Odor | Odorless. |
| Odor threshold | No information available |
| pH | No data available |
| Melting point | No data available |

| | |
|---------------------------|-------------------|
| Evaporation rate | Not applicable |
| Fire Hazard | Yes |
| Lower flammability limit: | 2.2% |
| Upper flammability limit: | 9.5% |
| Flash point | -104 °C / -156 °F |
| Autoignition temperature | 450 °C / 842 °F |
| Decomposition temperature | No data available |
| Water solubility | Negligible |
| Partition coefficient | 2.3 |
| Kinematic viscosity | Not applicable |

| Chemical Name | Molecular weight | Boiling point | Vapor Pressure | Vapor density (air =1) | Gas Density Kg/m ³ @20°C | Critical Temperature |
|---------------|------------------|---------------|------------------|------------------------|-------------------------------------|----------------------|
| Propane | 44.09 | -42.04 °C | 8.39 bar @ 20 °C | 1.55 | 1.858 | 96.67 °C |

10. STABILITY AND REACTIVITY

Reactivity

Not reactive under normal conditions.

Chemical stability

Stable under normal conditions.

Explosion data

| | |
|----------------------------------|-------|
| Sensitivity to Mechanical Impact | None. |
| Sensitivity to Static Discharge | Yes. |

Possibility of Hazardous Reactions

May form explosive mixtures with air.

Conditions to avoid

Heat, flames and sparks.

Incompatible materials

Oxidizing agents.

Hazardous Decomposition Products

Carbon monoxide. Carbon dioxide (CO₂).

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

| | |
|--------------|--|
| Inhalation | High concentrations of aliphatic hydrocarbon gases may cause CNS depression. Recent information suggest that C1-C4 aliphatic (alkane) hydrocarbon gases can cause potentially fatal cardiac arrhythmias. Cardiac sensitization to adrenalin in dogs has been noted following inhalation. In dogs, the heart is more sensitive to epinephrine induced ventricular fibrillations following exposure to 15-90% propane for 10 minutes. Ventricular fibrillations have been reported in humans following inhalation of n-butane. |
| Skin contact | Contact with liquid may cause cold burns/frostbite. |
| Eye contact | Contact with liquid may cause cold burns/frostbite. |
| Ingestion | Not an expected route of exposure. |

Information on toxicological effects

Symptoms High concentrations may cause asphyxia from lack of oxygen or act as a narcotic causing central nervous system depression. Symptoms of overexposure are dizziness, headache, tiredness, nausea, unconsciousness, cessation of breathing.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Not classified.
 Sensitization Not classified.
 Germ cell mutagenicity Not classified.
 Carcinogenicity This product does not contain any carcinogens or potential carcinogens listed by OSHA, IARC or NTP.
 Reproductive toxicity Not classified.
 STOT - single exposure Not classified.
 STOT - repeated exposure Not classified.
 Chronic toxicity None known.
 Target Organ Effects Central nervous system (CNS).
 Aspiration hazard Not applicable.

Numerical measures of toxicity

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 | Inhalation LC50 (CGA P-20) |
|--------------------|-----------|-------------|----------------------|----------------------------|
| Propane 74-98-6 | - | - | = 658 mg/L (Rat) 4 h | - |

Product Information

Oral LD50 No information available.
 Dermal LD50 No information available.
 Inhalation LC50 No information available
 Inhalation LC50

12. ECOLOGICAL INFORMATION

Ecotoxicity

No known acute aquatic toxicity.

Persistence and degradability

No information available.

Bioaccumulation

Will not bioconcentrate.

| Chemical Name | Partition coefficient |
|--------------------|-----------------------|
| Propane 74-98-6 | 2.3 |

13. DISPOSAL CONSIDERATIONS

Waste treatment methods

Disposal of wastes Do not attempt to dispose of residual waste or unused quantities. Return in the shipping container PROPERLY LABELED WITH ANY VALVE OUTLET PLUGS OR CAPS SECURED AND VALVE PROTECTION CAP IN PLACE to Indiana Oxygen for proper disposal.

14. TRANSPORT INFORMATION

Note: In US and Canada, Petroleum gases, liquefied (UN1075), or Liquefied petroleum gas (UN1075) is also acceptable. Identification number used must be consistent on package markings, shipping papers and emergency response information.

DOT

| | |
|---------------------------------|----------------------|
| UN/ID no. | UN1978 |
| Proper shipping name | Propane |
| Hazard Class | 2.1 |
| Special Provisions | 19, T50 |
| Description | UN1978, Propane, 2.1 |
| Emergency Response Guide Number | 115 |

TDG

| | |
|----------------------|----------------------|
| UN/ID no. | UN1978 |
| Proper shipping name | Propane |
| Hazard Class | 2.1 |
| Description | UN1978, Propane, 2.1 |

MEX

| | |
|----------------------|----------------------|
| UN/ID no. | UN1978 |
| Proper shipping name | Propane |
| Hazard Class | 2.1 |
| Description | UN1978, Propane, 2.1 |

IATA

| | |
|----------------------|----------------------|
| UN/ID no. | UN1978 |
| Proper shipping name | Propane |
| Hazard Class | 2.1 |
| ERG Code | 10L |
| Special Provisions | A1 |
| Description | UN1978, Propane, 2.1 |

IMDG

| | |
|----------------------|----------------------|
| UN/ID no. | UN1978 |
| Proper shipping name | Propane |
| Hazard Class | 2.1 |
| EmS-No. | F-D, S-U |
| Description | UN1978, Propane, 2.1 |

ADR

| | |
|-------------------------|-----------------------------|
| UN/ID no. | UN1978 |
| Proper shipping name | Propane |
| Hazard Class | 2.1 |
| Classification code | 2F |
| Tunnel restriction code | (B/D) |
| Special Provisions | 652, 657, 660 |
| Description | UN1978, Propane, 2.1, (B/D) |

| |
|-----------------------------------|
| 15. REGULATORY INFORMATION |
|-----------------------------------|

International Inventories

| | |
|---------------|----------|
| TSCA | Complies |
| DSL | Complies |
| EINECS/ELINCS | Complies |

Legend:

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory

DSL/NDL - Canadian Domestic Substances List/Non-Domestic Substances List

EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances

US Federal Regulations

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

SARA 311/312 Hazard Categories

| | |
|-----------------------------------|-----|
| Acute Health Hazard | Yes |
| Chronic Health Hazard | No |
| Fire Hazard | Yes |
| Sudden release of pressure hazard | Yes |
| Reactive Hazard | No |

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level pertaining to releases of this material.

Clean Air Act, Section 112 Hazardous Air Pollutants (HAPs) (see 40 CFR 61)

This product does not contain any substances regulated as hazardous air pollutants (HAPS) under Section 112 of the Clean Air Act Amendments of 1990.

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

Risk and Process Safety Management Programs

This material, as supplied, contains one or more regulated substances with specified thresholds under 40 CFR Part 68 or regulated as a highly hazardous chemical pursuant to the 29 CFR Part 1910.110 with specified thresholds:

| Chemical Name | U.S. - CAA (Clean Air Act) - Accidental Release Prevention - Toxic Substances | U.S. - CAA (Clean Air Act) - Accidental Release Prevention - Flammable Substances | U.S. - OSHA - Process Safety Management - Highly Hazardous Chemicals |
|---------------|---|---|--|
| Propane | | 10000 lb | |

US State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania |
|--------------------|------------|---------------|--------------|
| Propane 74-98-6 | X | X | X |

International Regulations

16. OTHER INFORMATION

NFPA Health hazards 2 Flammability 4 Instability 0 Physical and Chemical Properties -

Note: Ratings were assigned in accordance with Compressed Gas Association (CGA) guidelines as published in CGA Pamphlet P-19-2009, CGA Recommended Hazard Ratings for Compressed Gases, 3rd Edition.

| | |
|---------------|------------------|
| Issue Date | 23-Feb-2015 |
| Revision Date | 28-Jul-2015 |
| Revision Note | Initial Release. |

General Disclaimer

For terms and conditions, including limitation of liability, please refer to the purchase agreement in effect between Indiana Oxygen Company (or any of their affiliates and subsidiaries) and the purchaser.

DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES

Although reasonable care has been taken in the preparation of this document, we extend no warranties and make no representations as to the accuracy or completeness of the information contained herein, and assume no responsibility regarding the suitability of this information for the user's intended purposes or for the consequences of its use. Each individual should make a determination as to the suitability of the information for their particular purpose(s).

End of Safety Data Sheet

Safety Data Sheet

Printing date 01/10/2020

Revised On 01/02/2020

1 Identification of the substance and manufacturer

Trade name: ALUMINUM (MRO) GALLONS
Product code: 0000011411
Recommended use: Paint and coatings application.
Uses advised against: Any that differs from the recommended use.
Manufacturer/Supplier: Seymour of Sycamore
 917 Crosby Avenue
 Sycamore, IL 60178 USA
 phone: 815-895-9101
 www.seymourpaint.com

Emergency telephone number: 1-800-255-3924

Seymour of Sycamore
 3041 Dougall Avenue, Suite 503
 Windsor, ONT N9E 1S3 CANADA
 phone: 800-435-4482
 www.seymourpaint.com

2 Hazard(s) identification

Classification of the substance or mixture

Flam. Liq. 2 H225 Highly flammable liquid and vapor.
 Eye Irrit. 2A H319 Causes serious eye irritation.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

GHS Hazard pictograms



GHS02 GHS07 GHS08

Signal word

Danger

Hazard statements

Highly flammable liquid and vapor.
 Causes serious eye irritation.

Precautionary statements

May cause damage to organs through prolonged or repeated exposure.
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 Wash hands thoroughly after handling.
 Wear protective gloves/protective clothing/eye protection/face protection.
 If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 If eye irritation persists: Get medical advice/attention.
 Store in a well-ventilated place.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients

Chemical characterization: Mixtures

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|---------------------------------|--------|
| 64742-47-8 | Mineral Spirits | 25-50% |
| 7429-90-5 | Aluminum flake | 5-10% |
| 64742-89-8 | VM&P Naphtha | 5-10% |
| 64742-95-6 | Solvent naphtha, light aromatic | 1-5% |

4 First-aid measures

After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water.
After swallowing: Rinse out mouth and then drink plenty of water.
 Rinse mouth with water. Do not induce vomiting.

Most important symptoms and effects:

No further relevant information available.

Indication of any immediate medical attention needed:

No further relevant information available.

5 Fire-fighting measures

Special hazards: No further relevant information available.
Protective equipment for firefighters: No special measures required.

6 Accidental release measures

Personal precautions, protective equipment and emergency procedures:
Methods and material for containment and cleaning up:

Wear protective equipment. Keep unprotected persons away.
 Ensure adequate ventilation.

(Contd. on page 2)

Safety Data Sheet

Printing date 01/10/2020

Revised On 01/02/2020

Trade name: ALUMINUM (MRO) GALLONS

Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust). (Contd. of page 1)

7 Handling and storage**Precautions for safe handling**

Use only in well ventilated areas.

Storage requirements:

Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up.

8 Exposure controls/personal protection**Components with limit values that require monitoring at the workplace:****7429-90-5 Aluminum flake**

| | |
|-----------|--|
| PEL (USA) | Long-term value: 15*; 5** mg/m ³ *Total dust; ** Respirable fraction |
| REL (USA) | Long-term value: 10* 5** mg/m ³ as Al*Total dust**Respirable/pyro powd./welding f. |
| TLV (USA) | Long-term value: 1* mg/m ³ as Al; *as respirable fraction |

Hygienic protection:

Keep away from foodstuffs and animal feed. Wash hands after use. Wash hands after use.

Breathing equipment:

Do not eat or drink while working.

Hand protection:Not required.
Nitrile gloves.**Eye protection:**The glove material must be impermeable and resistant to the substance.
Tightly sealed goggles**9 Physical and chemical properties**

| | |
|--|--|
| Appearance: | Liquid. |
| Odor threshold: | Not determined. |
| pH-value: | Not determined. |
| Melting point/Melting range | Undetermined. |
| Boiling point: | 85 °C (185 °F) |
| Flash point: | -19 °C (-66.2 °F) |
| Flammability (solid, gas): | Highly flammable. |
| Decomposition temperature: | Not determined. |
| Auto igniting: | Product is not self-igniting. |
| Danger of explosion: | In use, may form flammable/explosive vapour-air mixture. |
| Lower Explosion Limit: | 0.5 Vol % |
| Upper Explosion Limit: | 6.5 Vol % |
| Vapor pressure: | Not determined. |
| Vapor density | Not determined. |
| Evaporation rate | Not determined. |
| Partition coefficient: n-octanol/water: | Not determined. |
| Solubility: | Not determined. |
| Viscosity: | Not determined. |
| VOC content (less exempt solvents): | 34.2 % |

10 Stability and reactivity

| | |
|--|---|
| Conditions to avoid: | No decomposition if used according to specifications. |
| Possibility of hazardous reactions: | No dangerous reactions known. |
| Incompatible materials: | No further relevant information available. |
| Hazardous decomposition: | No dangerous decomposition products known. |

11 Toxicological information

| | |
|--|-------------------------------|
| Information on toxicological effects: | No data available. |
| Skin effects: | No irritant effect. |
| Eye effects: | No irritating effect. |
| Sensitization: | No sensitizing effects known. |

12 Ecological information

| | |
|---------------------------------------|--|
| Aquatic toxicity: | Hazardous for water, do not empty into drains. |
| Persistence and degradability: | The product is degradable after prolonged exposure to natural weathering processes. |
| Other information: | This product does not contain any chlorofluorocarbons (CFC's), hydrochlorofluorocarbons (HCFC's), perfluorocarbons (PFC's), heavy metals (chromium, lead, cadmium), or chlorinated solvents. |
| Bioaccumulative potential: | No further relevant information available. |

(Contd. on page 1892)

Safety Data Sheet

Printing date 01/10/2020

Revised On 01/02/2020

Trade name: ALUMINUM (MRO) GALLONS

Mobility in soil: No further relevant information available.
Other adverse effects: No further relevant information available.

(Contd. of page 2)

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.

Recommendation: Completely empty cans should be recycled.

14 Transport information

UN-Number UN1263
ADR 1263 Paint
Transport hazard class(es):
Class 3 Flammable liquids
Marine pollutant: No
Special precautions for user: Warning: Flammable liquids
EMS Number: F-E, S-E
UN "Model Regulation": UN1263, Paint, 3, II

15 Regulatory information**SARA Section 355 (extremely hazardous substances):**

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

7429-90-5 Aluminum flake

Toxic Substances Control Act

(TSCA): All hazardous ingredients are found on the inventory list of substances.

Canadian Domestic Substances List

(DSL): All ingredients are listed or exempted.

Consumer Product Safety

Comission (CPSC): This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.

California Proposition 65 chemicals known to cause cancer:

None of the ingredients in this product are listed.

Prop 65 chemicals known to cause birth defects or reproductive harm:

None of the ingredients is listed.

EPA:

None of the ingredients is listed.

16 Other information

Contact: Regulatory Affairs

Safety Data Sheet



1. Identification

Product Name: ROHPER LSPR 6PK FLAT GRAY PRIMER **Revision Date:** 8/15/2018
Product Identifier: V2182838 **Supersedes Date:** 8/6/2018
Recommended Use: Primer/Aerosols
Supplier: Rust-Oleum Corporation
 11 Hawthorn Parkway
 Vernon Hills, IL 60061
 USA
Manufacturer: Rust-Oleum Corporation
 11 Hawthorn Parkway
 Vernon Hills, IL 60061
 USA
 Rust-Oleum Canada (ROCA)
 200 Confederation Parkway
 Concord, ON L4K 4T8
 Canada
 Emergency Phone: 800-387-3625
Preparer: Regulatory Department
Emergency Telephone: 24 Hour Hotline: 847-367-7700

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

47% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|---|
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Germ Cell Mutagenicity, category 1B | H340 | May cause genetic defects. |
| Carcinogenicity, category 1B | H350 | May cause cancer. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |

Eye Irritation, category 2 H319 Causes serious eye irritation.

Skin Sensitizer, category 1 H317 May cause an allergic skin reaction.

GHS LABEL PRECAUTIONARY STATEMENTS

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

P211 Do not spray on an open flame or other ignition source.

P251 Do not pierce or burn, even after use.

P410+P412 Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F.

P410+P403 Protect from sunlight. Store in a well-ventilated place.

P201 Obtain special instructions before use.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

P308+P313 IF exposed or concerned: Get medical advice/attention.

P405 Store locked up.

P501 Dispose of contents/container in accordance with local, regional and national regulations.

P261 Avoid breathing dust/fume/gas/mist/vapors/spray.

P271 Use only outdoors or in a well-ventilated area.

P304+P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing.

P312 Call a POISON CENTER or doctor/physician if you feel unwell.

P403+P233 Store in a well-ventilated place. Keep container tightly closed.

P264 Wash hands thoroughly after handling.

P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P337+P313 If eye irritation persists: Get medical advice/attention.

P272 Contaminated work clothing should not be allowed out of the workplace.

P302+P352 IF ON SKIN: Wash with plenty of soap and water.

P333+P313

If skin irritation or rash occurs: Get medical advice/attention.

P321

For specific treatment see label

GHS SDS PRECAUTIONARY STATEMENTS

P363

Wash contaminated clothing before reuse.

3. Composition / Information On Ingredients**HAZARDOUS SUBSTANCES**

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.%</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|---------------------------------|-----------------------|--------------------|---------------------------|------------------------------|
| Propane | 74-98-6 | 15 | GHS04 | H280 |
| n-Butyl Acetate | 123-86-4 | 14 | GHS02-GHS07 | H226-336 |
| Acetone | 67-64-1 | 11 | GHS02-GHS07 | H225-319-332-336 |
| Dimethyl Carbonate | 616-38-6 | 8.8 | GHS02 | H225 |
| Hydrous Magnesium Silicate | 14807-96-6 | 8.3 | Not Available | Not Available |
| Titanium Dioxide | 13463-67-7 | 7.1 | Not Available | Not Available |
| n-Butane | 106-97-8 | 7.0 | GHS04 | H280 |
| Hydrotreated Light Distillate | 64742-47-8 | 4.6 | GHS08 | H304 |
| Solvent Naphtha, Light Aromatic | 64742-95-6 | 2.4 | GHS07-GHS08 | H304-332 |
| 1,2,4-Trimethylbenzene | 95-63-6 | 1.3 | GHS02-GHS07-GHS08 | H226-304-315-319-332-335 |
| Zinc Phosphate | 7779-90-0 | 1.3 | Not Available | Not Available |
| Solvent Naphtha, Light Aromatic | 64742-95-6 | 0.2 | GHS07-GHS08 | H304-332-340-350 |
| Methyl ethyl ketoxime | 96-29-7 | 0.2 | GHS05-GHS06-GHS08 | H302-312-317-318-331-351 |
| Ethylbenzene | 100-41-4 | 0.1 | GHS02-GHS07-GHS08 | H225-304-332-351-373 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted. Keep containers tightly closed.

SPECIAL FIREFIGHTING PROCEDURES: Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials. Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|---------------------------------|------------|-----------------------|----------------------|--------------------|----------------------|----------------------|
| Propane | 74-98-6 | 15.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 15.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| Acetone | 67-64-1 | 15.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Dimethyl Carbonate | 616-38-6 | 10.0 | N.E. | N.E. | N.E. | N.E. |
| Hydrous Magnesium Silicate | 14807-96-6 | 10.0 | 2 mg/m ³ | N.E. | N.E. | N.E. |
| Titanium Dioxide | 13463-67-7 | 10.0 | 10 mg/m ³ | N.E. | 15 mg/m ³ | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Hydrotreated Light Distillate | 64742-47-8 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Solvent Naphtha, Light Aromatic | 64742-95-6 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Zinc Phosphate | 7779-90-0 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Solvent Naphtha, Light Aromatic | 64742-95-6 | 1.0 | N.E. | N.E. | N.E. | N.E. |
| Methyl ethyl ketoxime | 96-29-7 | 1.0 | 10 ppm | N.E. | N.E. | N.E. |
| Ethylbenzene | 100-41-4 | 1.0 | 20 ppm | N.E. | 100 ppm | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Relative Density: | 0.910 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 0.9 - 13.0 |
| Boiling Range, °C: | -37 - 537 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalis.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: May cause skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: High gas, vapor, mist or dust concentrations may be harmful if inhaled. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010) May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage.

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|---------------------------------|------------------|---------------------|-------------------|
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 616-38-6 | Dimethyl Carbonate | 13000 mg/kg Rat | >5000 mg/kg Rabbit | 140 mg/L Rat |
| 14807-96-6 | Hydrous Magnesium Silicate | 6000 | N.E. | 30 |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 64742-47-8 | Hydrotreated Light Distillate | >5000 mg/kg Rat | >2000 mg/kg Rabbit | >5000 mg/L Rat |
| 64742-95-6 | Solvent Naphtha, Light Aromatic | 8400 mg/kg Rat | >2000 mg/kg Rabbit | N.E. |
| 95-63-6 | 1,2,4-Trimethylbenzene | 3280 mg/kg Rat | >3160 mg/kg Rabbit | 18 mg/L Rat |
| 7779-90-0 | Zinc Phosphate | >5000 mg/kg Rat | N.E. | N.E. |
| 64742-95-6 | Solvent Naphtha, Light Aromatic | 8400 mg/kg Rat | >2000 mg/kg Rabbit | N.E. |

96-29-7 Methyl ethyl ketoxime
100-41-4 Ethylbenzene

930 mg/kg Rat
3500 mg/kg Rat

1100 mg/kg Rabbit
15400 mg/kg Rabbit

>4.8 mg/L Rat
17.4 mg/L Rat

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|--------------------------------------|-----------------------------|-------------------|--------------------------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint Products in Limited Quantities | Aerosols | Aerosols | Paint Products in Limited Quantities |
| Hazard Class: | N.A. | 2.1 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Carcinogenicity, Respiratory or Skin Sensitization, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure), Germ cell mutagenicity

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------|----------------|
| 1,2,4-Trimethylbenzene | 95-63-6 |
| Zinc Phosphate | 7779-90-0 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

16. Other Information**HMIS RATINGS**

Health: 2* Flammability: 4 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: 2 Flammability: 4 Instability: 0


Maximum Incremental Reactivity 0.68

SDS REVISION DATE: 8/15/2018

REASON FOR REVISION: Substance and/or Product Properties Changed in Section(s):
01 - Identification
05 - Fire-fighting Measures

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

The manufacturer believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. The manufacturer makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.

| | | |
|---|--|---------------------------|
|  | | Page: 1 |
| SAFETY DATA SHEET | | Revision Date: 05/22/2017 |
| | | Print Date: 12/19/2019 |
| | | SDS Number: R0290463 |
| Valvoline™ CRIMSON #2 GREASE VV70120 | | Version: 1.3 |

29 CFR 1910.1200 (OSHA HazCom 2012)

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : Valvoline™ CRIMSON #2 GREASE


| | |
|--|--|
| <p>Details of the supplier of the safety data sheet Valvoline LLC 100 Valvoline Way Lexington, KY 40509 United States of America (USA) 1-800-TEAMVAL</p> | <p>Emergency telephone number 1-800-VALVOLINE (1-800-825-8654)</p> <p>Regulatory Information Number 1-800-TEAMVAL</p> <p>Product Information 1-800-TEAMVAL</p> |
|--|--|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Skin sensitization : Category 1

GHS label elements

Hazard pictograms : 

Signal Word : Warning

Hazard Statements : May cause an allergic skin reaction.

Precautionary Statements : **Prevention:**
Avoid breathing dust/ fume/ gas/ mist/ vapors/ spray.
Contaminated work clothing must not be allowed out of the workplace.
Wear protective gloves.
Response:
IF ON SKIN: Wash with plenty of soap and water.
If skin irritation or rash occurs: Get medical advice/ attention.
Wash contaminated clothing before reuse.
Disposal:
Dispose of contents/ container to an approved waste disposal plant.

SAFETY DATA SHEET

Revision Date: 05/22/2017

Print Date: 12/19/2019

SDS Number: R0290463

Valvoline™ CRIMSON #2 GREASE

Version: 1.3

VV70120

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Classification | Concentration (%) |
|---------------------------------|---------|--------------------|-------------------|
| PROPRIETARY CORROSION INHIBITOR | | Skin Sens. 1; H317 | 1.00 |

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : If breathed in, move person into fresh air.
If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : Remove contaminated clothing. If irritation develops, get medical attention.
If on skin, rinse well with water.
First aid is not normally required. However, it is recommended that exposed areas be cleaned by washing with soap and water.
Wash contaminated clothing before re-use.
- In case of eye contact : Flush eyes with water as a precaution.
Remove contact lenses.
Protect unharmed eye.
If eye irritation persists, consult a specialist.
- If swallowed : Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
- Most important symptoms and effects, both acute and delayed : No symptoms known or expected.
May cause an allergic skin reaction.
- Notes to physician : No hazards which require special first aid measures.

**SAFETY DATA SHEET**

Revision Date: 05/22/2017

Print Date: 12/19/2019

SDS Number: R0290463

Valvoline™ CRIMSON #2 GREASE

Version: 1.3

VV70120

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Water spray
Foam
Carbon dioxide (CO₂)
Dry chemical
- Unsuitable extinguishing media : High volume water jet
- Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.
- Hazardous combustion products : No hazardous combustion products are known
- Specific extinguishing methods :


Product is compatible with standard fire-fighting agents.
- Further information : Standard procedure for chemical fires.
- Special protective equipment for firefighters : In the event of fire, wear self-contained breathing apparatus.

SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.
Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed.
- Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
- Methods and materials for containment and cleaning up : Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust).
Keep in suitable, closed containers for disposal.
- Other information : Comply with all applicable federal, state, and local regulations.

SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Do not breathe vapours/dust.

| | | |
|---|--|---------------------------|
|  | | Page: 4 |
| SAFETY DATA SHEET | | Revision Date: 05/22/2017 |
| | | Print Date: 12/19/2019 |
| | | SDS Number: R0290463 |
| Valvoline™ CRIMSON #2 GREASE VV70120 | | Version: 1.3 |

Do not smoke.
 Persons susceptible to skin sensitisation problems or asthma, allergies, chronic or recurrent respiratory disease should not be employed in any process in which this mixture is being used.
 Container hazardous when empty.
 Avoid exposure - obtain special instructions before use.
 Avoid contact with skin and eyes.
 Smoking, eating and drinking should be prohibited in the application area.
 For personal protection see section 8.
 Dispose of rinse water in accordance with local and national regulations.

Conditions for safe storage : Keep container tightly closed in a dry and well-ventilated place.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

| Components | CAS-No. |
|---------------------------------|---------|
| PROPRIETARY CORROSION INHIBITOR | |

Engineering measures : Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Personal protective equipment

Respiratory protection : Respiratory protection is not required under normal conditions of use.

Hand protection
 Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.

Eye protection : Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.

Skin and body protection : Wear as appropriate:
 Impervious clothing
 Safety shoes
 Choose body protection according to the amount and concentration of the dangerous substance at the work place.

**SAFETY DATA SHEET**

Revision Date: 05/22/2017

Print Date: 12/19/2019

SDS Number: R0290463

Valvoline™ CRIMSON #2 GREASE

Version: 1.3

VV70120

Discard gloves that show tears, pinholes, or signs of wear.
Wear resistant gloves (consult your safety equipment supplier).

Hygiene measures : Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|------------------------------|---------------------------------|
| Appearance | : paste |
| Physical state | : liquid |
| Colour | : red |
| Odour | : hydrocarbon-like |
| Odour Threshold | : No data available |
| pH | : No data available |
| Melting point/freezing point | : No data available |
| Boiling point/boiling range | : > 700 °F / > 371 °C |
| Flash point | : > 399 °F / > 204 °C |
| Evaporation rate | : < 0.01 |
| Flammability (solid, gas) | : No data available |
| Upper explosion limit | : No data available |
| Lower explosion limit | : No data available |
| Vapour pressure | : < 0.1 mmHg (20 °C) |
| Relative density | : 0.9 (15.6 °C) |
| Density | : 0.9 g/cm ³ (20 °C) |
| Solubility(ies) | |
| Water solubility | : No data available |
| Solubility in other solvents | : No data available |

**SAFETY DATA SHEET**

Revision Date: 05/22/2017

Print Date: 12/19/2019

SDS Number: R0290463

Valvoline™ CRIMSON #2 GREASE

Version: 1.3

VV70120

Partition coefficient: n-octanol/water : No data available

Thermal decomposition : No data available

Viscosity

Viscosity, dynamic : No data available

Viscosity, kinematic : > 1000 mm²/s (40 °C)

Oxidizing properties : No data available

SECTION 10. STABILITY AND REACTIVITY

Reactivity : No decomposition if stored and applied as directed.

Chemical stability : Stable under recommended storage conditions.

Possibility of hazardous reactions : Product will not undergo hazardous polymerization.

Conditions to avoid : None known.

Incompatible materials : None known.

Hazardous decomposition products : No hazardous decomposition products are known.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure : Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Not classified based on available information.

Skin corrosion/irritation

Not classified based on available information.

Product:


Remarks: May cause skin irritation in susceptible persons.

Serious eye damage/eye irritation

Not classified based on available information.

Product:

Remarks: Unlikely to cause eye irritation or injury.

| | | |
|---|--|---------------------------|
|  | | Page: 7 |
| SAFETY DATA SHEET | | Revision Date: 05/22/2017 |
| | | Print Date: 12/19/2019 |
| | | SDS Number: R0290463 |
| Valvoline™ CRIMSON #2 GREASE VV70120 | | Version: 1.3 |

Respiratory or skin sensitisation

Skin sensitisation: May cause an allergic skin reaction.

Respiratory sensitisation: Not classified based on available information.

Components:

PROPRIETARY CORROSION INHIBITOR:

Assessment: May cause sensitisation by skin contact.

Germ cell mutagenicity

Not classified based on available information.

Carcinogenicity

Not classified based on available information.

Reproductive toxicity

Not classified based on available information.

STOT - single exposure

Not classified based on available information.

STOT - repeated exposure

Not classified based on available information.

Aspiration toxicity

Not classified based on available information.

Product:

No aspiration toxicity classification

Further information

Product:

Remarks: No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Ecotoxicology Assessment

Acute aquatic toxicity : Not classified based on available information.

Chronic aquatic toxicity : Not classified based on available information.

Persistence and degradability

No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Additional ecological information : No data available

SECTION 13. DISPOSAL CONSIDERATIONS



| | |
|---|---------------------------|
| SAFETY DATA SHEET | Revision Date: 05/22/2017 |
| | Print Date: 12/19/2019 |
| | SDS Number: R0290463 |
| Valvoline™ CRIMSON #2 GREASE VV70120 | Version: 1.3 |

Disposal methods

- General advice : Do not dispose of waste into sewer.
Do not contaminate ponds, waterways or ditches with chemical or used container.
Send to a licensed waste management company.
- Dispose of in accordance with all applicable local, state and federal regulations.
- Contaminated packaging : Empty remaining contents.
Dispose of as unused product.
Empty containers should be taken to an approved waste handling site for recycling or disposal.
Do not re-use empty containers.

SECTION 14. TRANSPORT INFORMATION

International transport regulations

REGULATION

| ID NUMBER | PROPER SHIPPING NAME | *HAZARD CLASS | SUBSIDIARY HAZARDS | PACKING GROUP | MARINE POLLUTANT / LTD. QTY. |
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|

U.S. DOT - ROAD

| |
|---------------------|
| Not dangerous goods |
|---------------------|

CFR_RAIL_C

| |
|---------------------|
| Not dangerous goods |
|---------------------|

U.S. DOT - INLAND WATERWAYS

| |
|---------------------|
| Not dangerous goods |
|---------------------|

TDG_ROAD_C

| |
|---------------------|
| Not dangerous goods |
|---------------------|

TDG_RAIL_C

| |
|---------------------|
| Not dangerous goods |
|---------------------|

TDG_INWT_C

| |
|---------------------|
| Not dangerous goods |
|---------------------|

INTERNATIONAL MARITIME DANGEROUS GOODS



SAFETY DATA SHEET

Revision Date: 05/22/2017

Print Date: 12/19/2019

SDS Number: R0290463

Valvoline™ CRIMSON #2 GREASE

Version: 1.3

VV70120

Not dangerous goods

INTERNATIONAL AIR TRANSPORT ASSOCIATION - CARGO

Not dangerous goods

INTERNATIONAL AIR TRANSPORT ASSOCIATION - PASSENGER

Not dangerous goods

MX_DG

Not dangerous goods

***ORM = ORM-D, CBL = COMBUSTIBLE LIQUID**

| | |
|------------------|----|
| Marine pollutant | no |
|------------------|----|

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

**EPCRA - Emergency Planning and Community Right-to-Know Act
CERCLA Reportable Quantity**

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Acute Health Hazard

SARA 313 This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

California Prop 65 Proposition 65 warnings are not required for this product based on the results of a risk assessment.

The components of this product are reported in the following inventories:

DSL : This product contains one or several components that are not on the Canadian DSL and have annual quantity limits.

AICS : Not in compliance with the inventory

ENCS : Not in compliance with the inventory

KECI : Not in compliance with the inventory

SAFETY DATA SHEET

Revision Date: 05/22/2017

Print Date: 12/19/2019

SDS Number: R0290463

Valvoline™ CRIMSON #2 GREASE

Version: 1.3

VV70120

IECSC : On the inventory, or in compliance with the inventory

PICCS : Not in compliance with the inventory

TSCA : On TSCA Inventory


Inventories

AICS (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIoC (New Zealand), PICCS (Philippines), TCSI (Taiwan), TSCA (USA)

SECTION 16. OTHER INFORMATION

Further information

Revision Date: 05/22/2017
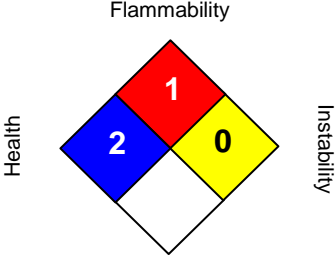
| | | | | | | | |
|--|--|---------------|----------|---------------------|----------|------------------------|----------|
| <p>NFPA:</p>  <p>Special hazard.</p> | <p>HMIS III:</p> <table border="1"> <tr> <td style="background-color: blue; color: white;">HEALTH</td> <td style="text-align: center;">2</td> </tr> <tr> <td style="background-color: red; color: white;">FLAMMABILITY</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="background-color: yellow; color: black;">PHYSICAL HAZARD</td> <td style="text-align: center;">0</td> </tr> </table> <p>0 = not significant, 1 =Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 2 | FLAMMABILITY | 1 | PHYSICAL HAZARD | 0 |
| HEALTH | 2 | | | | | | |
| FLAMMABILITY | 1 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Combustible Liquid Class IIIB


Full text of H-Statements

H317 May cause an allergic skin reaction.

Sources of key data used to compile the Safety Data Sheet

Valvoline internal data including own and sponsored test reports

The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

| | | |
|--|--|---------------------------|
|  | | Page: 11 |
| SAFETY DATA SHEET | | Revision Date: 05/22/2017 |
| | | Print Date: 12/19/2019 |
| | | SDS Number: R0290463 |
| Valvoline™ CRIMSON #2 GREASE | | Version: 1.3 |
| VV70120 | | |

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Valvoline's Environmental Health and Safety Department (1-800-VALVOLINE).

List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists
 BEI : Biological Exposure Index
 CAS : Chemical Abstracts Service (Division of the American Chemical Society).
 CMR : Carcinogenic, Mutagenic or Toxic for Reproduction
 FG : Food grade
 GHS : Globally Harmonized System of Classification and Labeling of Chemicals.
 H-statement : Hazard Statement
 IATA : International Air Transport Association.
 IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization
 ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"
 IMDG : International Maritime Code for Dangerous Goods
 ISO : International Organization for Standardization
 logPow : octanol-water partition coefficient
 LCxx : Lethal Concentration, for xx percent of test population
 LDxx : Lethal Dose, for xx percent of test population.
 ICxx : Inhibitory Concentration for xx of a substance
 Ecxx : Effective Concentration of xx
 N.O.S.: Not Otherwise Specified
 OECD : Organization for Economic Co-operation and Development
 OEL : Occupational Exposure Limit
 P-Statement : Precautionary Statement
 PBT : Persistent , Bioaccumulative and Toxic
 PPE : Personal Protective Equipment
 STEL : Short-term exposure limit
 STOT : Specific Target Organ Toxicity
 TLV : Threshold Limit Value
 TWA : Time-weighted average
 vPvB : Very Persistent and Very Bioaccumulative
 WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act
 DOT : Department of Transportation
 FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act
 HMIRC : Hazardous Materials Information Review Commission
 HMIS : Hazardous Materials Identification System
 NFPA : National Fire Protection Association
 NIOSH : National Institute for Occupational Safety and Health
 OSHA : Occupational Safety and Health Administration
 PMRA : Health Canada Pest Management Regulatory Agency
 RTK : Right to Know
 WHMIS : Workplace Hazardous Materials Information System



SAFETY DATA SHEET

Revision Date: 05/22/2017

Print Date: 12/19/2019

SDS Number: R0290463

Valvoline™ CRIMSON #2 GREASE

Version: 1.3

VV70120

SECTION 1: Identification

1.1. Product identifier

Product form : Substance
 Name : Acetylene
 CAS No : 74-86-2
 Formula : C₂H₂
 Other means of identification : Acetylene Dissolved, Acetylen, ethine, ethyne, narylene
 Product group : Core Products

1.2. Recommended use and restrictions on use

Recommended uses and restrictions : Industrial use
 Welding

1.3. Supplier

Praxair Canada inc.
 1200 – 1 City Centre Drive
 Mississauga - Canada L5B 1M2
 T 1-905-803-1600 - F 1-905-803-1682
www.praxair.ca

1.4. Emergency telephone number

Emergency number : 1-800-363-0042
 Call emergency number 24 hours a day only for spills, leaks, fire, exposure, or accidents involving this product.
 For routine information, contact your supplier or Praxair sales representative.

SECTION 2: Hazard identification

2.1. Classification of the substance or mixture

GHS-CA classification

Flam. Gas 1 H220
 Dissolved gas H280

2.2. GHS Label elements, including precautionary statements

GHS-CA labelling

Hazard pictograms :  
 GHS02 GHS04

Signal word : DANGER

Hazard statements : **EXTREMELY FLAMMABLE GAS**
 MAY REACT EXPLOSIVELY EVEN IN THE ABSENCE OF AIR AT ELEVATED PRESSURE AND/OR TEMPERATURE
 CONTAINS GAS UNDER PRESSURE; MAY EXPLODE IF HEATED
 MAY DISPLACE OXYGEN AND CAUSE RAPID SUFFOCATION
 MAY FORM EXPLOSIVE MIXTURES WITH AIR

Precautionary statements : Do not handle until all safety precautions have been read and understood
 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking
 Use and store only outdoors or in a well-ventilated area
 Leaking gas fire: Do not extinguish, unless leak can be stopped safely
 In case of leakage, eliminate all ignition sources



Acetylene

Safety Data Sheet E-4559

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-04-2016

Supersedes: 10-15-2013

Dispose of contents/container in accordance with container Supplier/owner instructions
Protect from sunlight when ambient temperature exceeds 52°C (125°F)
Use a back flow preventive device in the piping
Close valve after each use and when empty
Fusible plugs in the top, bottom, or valve melt at 98°C to 107°C (208°F to 224°F). Do not discharge at pressures above 15 psig (103 kPa)
Use only with equipment rated for cylinder pressure
Never put cylinders into unventilated areas of passenger vehicles

2.3. Other hazards

Other hazards not contributing to the classification : For safety reasons, the acetylene is dissolved in acetone (CAS no. 67-64-1; Flam. Liq. 2, Eye Irrit. 2, STOT SE 3) in the gas container. Vapour of the solvent is carried away as impurity when the acetylene is extracted from the gas container. The concentration of the solvent vapour in the gas is lower than the concentration limits to change the classification of the acetylene.

2.4. Unknown acute toxicity (GHS-CA)

No data available

SECTION 3: Composition/information on ingredients

3.1. Substances

| Name | CAS No. | % (Vol.) | Common Name (synonyms) |
|---------------------------------|------------------|----------|--|
| Acetylene (Main constituent) | (CAS No) 74-86-2 | 100 | Ethyne / Acetylene, dissolved / Acetylene (liquefied) / Ethine |

3.2. Mixtures

Not applicable

SECTION 4: First-aid measures

4.1. Description of first aid measures

First-aid measures after inhalation : Remove victim to uncontaminated area wearing self contained breathing apparatus. Keep victim warm and rested. Call a doctor. Apply artificial respiration if breathing stopped.

First-aid measures after skin contact : The liquid may cause frostbite. For exposure to liquid, immediately warm frostbite area with warm water not to exceed 105°F (41°C). Water temperature should be tolerable to normal skin. Maintain skin warming for at least 15 minutes or until normal coloring and sensation have returned to the affected area. In case of massive exposure, remove clothing while showering with warm water. Seek medical evaluation and treatment as soon as possible.

First-aid measures after eye contact : Immediately flush eyes thoroughly with water for at least 15 minutes. Hold the eyelids open and away from the eyeballs to ensure that all surfaces are flushed thoroughly. Contact an ophthalmologist immediately. Get immediate medical attention.

First-aid measures after ingestion : Ingestion is not considered a potential route of exposure.

4.2. Most important symptoms and effects (acute and delayed)

No additional information available

4.3. Immediate medical attention and special treatment, if necessary

Other medical advice or treatment : Obtain medical assistance.

SECTION 5: Fire-fighting measures

5.1. Suitable extinguishing media

Suitable extinguishing media : See below. See CGA Pamphlet SB-4, *Handling Acetylene Cylinders in Fire Situations*, for further information.

5.2. Unsuitable extinguishing media

No additional information available

5.3. Specific hazards arising from the hazardous product

Fire hazard : If venting or leaking gas catches fire, do not extinguish flames. Flammable vapors may spread from leak, creating an explosive reignition hazard. Vapors can be ignited by pilot lights, other flames, smoking, sparks, heaters, electrical equipment, static discharge, or other ignition sources at locations distant from product handling point. Explosive atmospheres may linger. Before entering an area, especially a confined area, check the atmosphere with an appropriate device.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.



Acetylene

Safety Data Sheet E-4559

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-04-2016

Supersedes: 10-15-2013

Reactivity : No reactivity hazard other than the effects described in sub-sections below.
Reactivity in case of fire : No reactivity hazard other than the effects described in sub-sections below.

5.4. Special protective equipment and precautions for fire-fighters

Firefighting instructions : Evacuate all personnel from the danger area. Use self-contained breathing apparatus (SCBA) and protective clothing. Immediately cool containers with water from maximum distance. Stop flow of gas if safe to do so, while continuing cooling water spray. Remove ignition sources if safe to do so. Remove containers from area of fire if safe to do so. On-site fire brigades must comply with their provincial and local fire code regulations.

Protection during firefighting : Compressed gas: asphyxiant. Suffocation hazard by lack of oxygen.

Special protective equipment for fire fighters : Standard protective clothing and equipment (Self Contained Breathing Apparatus) for fire fighters.

Specific methods : Use fire control measures appropriate for the surrounding fire. Exposure to fire and heat radiation may cause gas containers to rupture. Cool endangered containers with water spray jet from a protected position. Prevent water used in emergency cases from entering sewers and drainage systems

Stop flow of product if safe to do so

Use water spray or fog to knock down fire fumes if possible

Continue water spray from protected position until container stays cool.

Other information : Acetylene containers are provided with pressure relief devices designed to vent contents when exposed to elevated temperature.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : Wear self-contained breathing apparatus when entering area unless atmosphere is proven to be safe. Evacuate area. Ensure adequate ventilation. Stop leak if safe to do so.

6.2. Methods and materials for containment and cleaning up

For containment : Prevent runoff from contaminating the surrounding environment.

6.3. Reference to other sections

For further information refer to section 8: Exposure controls/personal protection

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Use only non-sparking tools. Use only explosion-proof equipment

Wear leather safety gloves and safety shoes when handling cylinders. Protect cylinders from physical damage; do not drag, roll, slide or drop. While moving cylinder, always keep in place removable valve cover. Never attempt to lift a cylinder by its cap; the cap is intended solely to protect the valve. When moving cylinders, even for short distances, use a cart (trolley, hand truck, etc.) designed to transport cylinders. Never insert an object (e.g. wrench, screwdriver, pry bar) into cap openings; doing so may damage the valve and cause a leak. Use an adjustable strap wrench to remove over-tight or rusted caps. Slowly open the valve. If the valve is hard to open, discontinue use and contact your supplier. Close the container valve after each use; keep closed even when empty. Never apply flame or localized heat directly to any part of the container. High temperatures may damage the container and could cause the pressure relief device to fail prematurely, venting the container contents. For other precautions in using this product, see section 16.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Store only where temperature will not exceed 125°F (52°C). Post "No Smoking" or "Open Flames" signs in storage and use areas. There must be no sources of ignition. Separate packages and protect against potential fire and/or explosion damage following appropriate codes and requirements (e.g. NFPA 30, NFPA 55, NFPA 70, and/or NFPA 221 in the U.S.) or according to requirements determined by the Authority Having Jurisdiction (AHJ). Always secure containers upright to keep them from falling or being knocked over. Install valve protection cap, if provided, firmly in place by hand when the container is not in use. Store full and empty containers separately. Use a first-in, first-out inventory system to prevent storing full containers for long periods. For other precautions in using this product, see section 16

OTHER PRECAUTIONS FOR HANDLING, STORAGE, AND USE: When handling product under pressure, use piping and equipment adequately designed to withstand the pressures to be encountered. Never work on a pressurized system. Use a back flow preventive device in the piping. Gases can cause rapid suffocation because of oxygen deficiency; store and use with adequate ventilation. If a leak occurs, close the container valve and blow down the system in a safe and environmentally correct manner in compliance with all international, federal/national, state/provincial, and local laws; then repair the leak. Never place a container where it may become part of an electrical circuit.

Storage area : Acetylene trailers are designed and intended for outdoor use. Acetylene storage in excess of 2,500 cu ft (70.79 cubic meters) is prohibited in buildings and other occupancies.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

No additional information available

8.2. Appropriate engineering controls

Appropriate engineering controls : An explosion-proof local exhaust system or a mechanical system is acceptable if it can prevent oxygen deficiency and keep hazardous fumes and gases below all applicable exposure limits in the worker's breathing area. During welding, ensure that there is adequate ventilation to keep worker exposure below applicable limits for fumes, gases, and other by-products of welding. Do not breathe fumes or gases. Short-term overexposure to fumes may cause dizziness, nausea, and dryness or irritation of the nose, throat, and eyes, or may cause other similar discomfort.

8.3. Individual protection measures/Personal protective equipment

Personal protective equipment : In case of splash hazard: safety glasses. Face shield. Gloves.



Hand protection : Wear work gloves when handling containers. Wear heavy rubber gloves where contact with product may occur.

Eye protection : Wear goggles and a face shield when transfilling or breaking transfer connections. Select in accordance with the current CSA standard Z94.3, "Industrial Eye and Face Protection", and any provincial regulations, local bylaws or guidelines.

Skin and body protection : As needed for welding, wear hand, head, and body protection to help prevent injury from radiation and sparks. (See ANSI Z49.1.) At a minimum, this includes welder's gloves and protective goggles, and may include arm protectors, aprons, hats, and shoulder protection as well as substantial clothing.

Respiratory protection : **Respiratory protection:** Use respirable fume respirator or air supplied respirator when working in confined space or where local exhaust or ventilation does not keep exposure below TLV. Select in accordance with provincial regulations, local bylaws or guidelines. Selection should be based on the current CSA standard Z94.4, "Selection, Care, and Use of Respirators." Respirators should also be approved by NIOSH and MSHA. For emergencies or instances with unknown exposure levels, use a self-contained breathing apparatus (SCBA).

Thermal hazard protection : Wear cold insulating gloves when transfilling or breaking transfer connections.

Environmental exposure controls : Refer to local regulations for restriction of emissions to the atmosphere. See section 13 for specific methods for waste gas treatment.



Acetylene

Safety Data Sheet E-4559

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-04-2016

Supersedes: 10-15-2013

Other information : **Other protection** : Safety shoes for general handling at customer sites. Metatarsal shoes and cuffless trousers for cylinder handling at packaging and filling plants. Select in accordance with the current CSA standard Z195, "Protective Foot Wear", and any provincial regulations, local bylaws or guidelines. For working with flammable and oxidizing materials, consider the use of flame resistant anti-static safety clothing.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|---|---|
| Physical state | : Gas |
| Appearance | : Colourless gas. |
| Molecular mass | : 26 g/mol |
| Colour | : Colourless. |
| Odour | : Garlic like. Poor warning properties at low concentrations. |
| Odour threshold | : No data available |
| pH | : Not applicable. |
| pH solution | : No data available |
| Relative evaporation rate (butylacetate=1) | : No data available |
| Relative evaporation rate (ether=1) | : Not applicable. |
| Melting point | : -80.8 °C |
| Freezing point | : No data available |
| Boiling point | : -84 °C |
| Flash point | : -17 °C |
| Critical temperature | : 36 °C |
| Auto-ignition temperature | : 305 °C |
| Decomposition temperature | : 635 °C |
| Vapour pressure | : 4400 kPa |
| Vapour pressure at 50 °C | : No data available |
| Critical pressure | : 6138 kPa |
| Relative vapour density at 20 °C | : 0.00117 (≥ 21.1) |
| Relative density | : Not applicable. |
| Relative density of saturated gas/air mixture | : No data available |
| Density | : 0.0012 g/cm ³ (at 0 °C) |
| Relative gas density | : 0.9 |
| Solubility | : Water: 1185 mg/l |
| Log Pow | : 0.37 |
| Log Kow | : Not applicable. |
| Viscosity, kinematic | : Not applicable. |
| Viscosity, dynamic | : Not applicable. |
| Viscosity, kinematic (calculated value) (40 °C) | : No data available |
| Explosive properties | : Not applicable. |
| Oxidizing properties | : None. |
| Flammability (solid, gas) | : 2.5 - 100 vol % |

9.2. Other information

| | |
|-------------------------|-----------------|
| Minimum ignition energy | : ≈ |
| Sublimation point | : -83.3 °C |
| Gas group | : Dissolved gas |

SECTION 10: Stability and reactivity

10.1. Reactivity

Reactivity : No reactivity hazard other than the effects described in sub-sections below.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.



Acetylene

Safety Data Sheet E-4559

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-04-2016

Supersedes: 10-15-2013

| | |
|------------------------------------|---|
| Chemical stability | : Dissolved in a solvent supported in a porous mass. Stable under recommended handling and storage conditions (see section 7). |
| Possibility of hazardous reactions | : May react explosively even in the absence of air. May decompose violently at high temperature and/or pressure or in the presence of a catalyst. Can form explosive mixture with air. May react violently with oxidants. |
| Conditions to avoid | : High temperature. High pressure. Keep away from heat/sparks/open flames/hot surfaces. – No smoking. |
| Incompatible materials | : Forms explosive acetylides with copper, silver and mercury. Do not use alloys containing more than 65% copper. Air, Oxidiser. Do not use alloys containing more than 43% silver. |
| Hazardous decomposition products | : Thermal decomposition or burning may produce carbon monoxide, carbon dioxide, and hydrogen. The welding and cutting process may form reaction products such as carbon monoxide and carbon dioxide. Other decomposition products of normal operation originate from the volatilization, reaction, or oxidation of the material being worked. |

SECTION 11: Toxicological information

11.1. Information on toxicological effects

| | |
|--|---|
| Acute toxicity (oral) | : Not classified |
| Acute toxicity (dermal) | : Not classified |
| Acute toxicity (inhalation) | : Not classified |
| Skin corrosion/irritation | : Not classified pH: Not applicable. |
| Serious eye damage/irritation | : Not classified pH: Not applicable. |
| Respiratory or skin sensitization | : Not classified |
| Germ cell mutagenicity | : Not classified |
| Carcinogenicity | : Not classified |
| Reproductive toxicity | : Not classified |
| Specific target organ toxicity (single exposure) | : Not classified |
| Specific target organ toxicity (repeated exposure) | : Not classified |
| Aspiration hazard | : Not classified |

Acetylene (74-86-2)

| | |
|-------------|-----|
| Hydrocarbon | Yes |
|-------------|-----|

SECTION 12: Ecological information

12.1. Toxicity

| | |
|-------------------|--|
| Ecology - general | : No known ecological damage caused by this product. |
|-------------------|--|

12.2. Persistence and degradability

Acetylene (74-86-2)

| | |
|-------------------------------|--|
| Persistence and degradability | Will rapidly degrade by indirect photolysis in air. Will not undergo hydrolysis. |
|-------------------------------|--|

12.3. Bioaccumulative potential

Acetylene (74-86-2)

| | |
|---------------------------|---|
| Log Pow | 0.37 |
| Log Kow | Not applicable. |
| Bioaccumulative potential | Not expected to bioaccumulate due to the low log Kow (log Kow < 4). Refer to section 9. |

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.



Acetylene

Safety Data Sheet E-4559

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-04-2016

Supersedes: 10-15-2013

12.4. Mobility in soil

| Acetylene (74-86-2) | |
|---------------------|---|
| Mobility in soil | No data available. |
| Log Pow | 0.37 |
| Log Kow | Not applicable. |
| Ecology - soil | Because of its high volatility, the product is unlikely to cause ground or water pollution. |

12.5. Other adverse effects

Effect on the ozone layer : No known effects from this product
Effect on global warming : No known effects from this product

SECTION 13: Disposal considerations

13.1. Disposal methods

Waste disposal recommendations : Dispose of contents/container in accordance with local/regional/national/international regulations. Contact supplier for any special requirements.

SECTION 14: Transport information

14.1. Basic shipping description

In accordance with TDG

TDG

UN-No. (TDG) : UN1001
TDG Primary Hazard Classes : 2.1 - Class 2.1 - Flammable Gas.
Proper shipping name : ACETYLENE, DISSOLVED

Explosive Limit and Limited Quantity Index : 0
Passenger Carrying Ship Index : 75 kg
Passenger Carrying Road Vehicle or Passenger Carrying Railway Vehicle Index : Forbidden

14.3. Air and sea transport

IMDG

UN-No. (IMDG) : 1001
Proper Shipping Name (IMDG) : ACETYLENE, DISSOLVED
Class (IMDG) : 2 - Gases
MFAG-No : 116

IATA

UN-No. (IATA) : 1001
Proper Shipping Name (IATA) : Acetylene, dissolved
Class (IATA) : 2

SECTION 15: Regulatory information

15.1. National regulations

| Acetylene (74-86-2) |
|---|
| Listed on the Canadian DSL (Domestic Substances List) |

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.



Acetylene

Safety Data Sheet E-4559

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-04-2016

Supersedes: 10-15-2013

15.2. International regulations

Acetylene (74-86-2)

Listed on the AICS (Australian Inventory of Chemical Substances)
Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances)
Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
Listed on the Korean ECL (Existing Chemicals List)
Listed on NZIoC (New Zealand Inventory of Chemicals)
Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
Listed on the United States TSCA (Toxic Substances Control Act) inventory
Listed on INSQ (Mexican national Inventory of Chemical Substances)
Listed on CICR (Turkish Inventory and Control of Chemicals)

SECTION 16: Other information

Date of issue : 15/10/1979
Revision date : 04/08/2016
Supersedes : 15/10/2013

Indication of changes:

Training advice : Ensure operators understand the flammability hazard.

Other information

: When using this product in welding and cutting, read and understand the manufacturer's instructions and the precautionary label on the product. Ask your welding products supplier for a copy of Praxair's free safety booklet, P-2035, Precautions and Safe Practices for Gas Welding, Cutting, and Heating, and for other manufacturers' safety publications. For a detailed treatment, get ANSI Z49.1, Safety in Welding, Cutting, and Allied Processes, published by the American Welding Society (AWS), www.aws.org. Order AWS documents from Global Engineering Documents, global.ihs.com. Arcs and sparks can ignite combustible materials. Prevent fires. Refer to NFPA 51B, Standard for Fire Prevention During Welding, Cutting, and Other Hotwork. Do not strike an arc on the container. The defect produced by an arc burn may lead to container rupture

Fumes and gases produced during welding and cutting processes can be dangerous to your health and may cause serious lung disease. KEEP YOUR HEAD OUT OF FUMES. DO NOT BREATHE FUMES AND GASES. Use enough ventilation, local exhaust, or both to keep fumes and gases from your breathing zone and the general area. Short-term overexposure to fumes may cause dizziness, nausea, and dryness or irritation of the nose, throat, and eyes; or may cause other similar discomfort. Contaminants in the air may add to the hazard of fumes and gases

When you mix two or more chemicals, you can create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an industrial hygienist or other trained person when you evaluate the end product. Before using any plastics, confirm their compatibility with this product

Praxair asks users of this product to study this SDS and become aware of the product hazards and safety information. To promote safe use of this product, a user should (1) notify employees, agents, and contractors of the information in this SDS and of any other known product hazards and safety information, (2) furnish this information to each purchaser of the product, and (3) ask each purchaser to notify its employees and customers of the product hazards and safety information

The opinions expressed herein are those of qualified experts within Praxair Canada Inc. We believe that the information contained herein is current as of the date of this Safety Data Sheet. Since the use of this information and the conditions of use are not within the control of Praxair Canada Inc, it is the user's obligation to determine the conditions of safe use of the product. Praxair Canada Inc, SDSs are furnished on sale or delivery by Praxair Canada Inc, or the independent distributors and suppliers who package and sell our products. To obtain current SDSs for these products, contact your Praxair sales representative, local distributor, or supplier, or download from www.praxair.ca. If you have questions regarding Praxair SDSs, would like the document number and date of the latest SDS, or would like the names of the Praxair suppliers in your area, phone or write Praxair Canada Inc, (Phone: 1-888-257-5149; Address: Praxair Canada Inc, 1 City Centre Drive, Suite 1200, Mississauga, Ontario, L5B 1M2).

PRAXAIR and the Flowing Airstream design are trademarks or registered trademarks of Praxair Technology, Inc. in the United States and/or other countries.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

Acetylene

Safety Data Sheet E-4559

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-04-2016

Supersedes: 10-15-2013

NFPA health hazard


: 0 - Exposure under fire conditions would offer no hazard beyond that of ordinary combustible materials.

NFPA fire hazard

: 4 - Will rapidly or completely vaporize at normal pressure and temperature, or is readily dispersed in air and will burn readily.

NFPA reactivity

: 2 - Normally unstable and readily undergo violent decomposition but do not detonate. Also: may react violently with water or may form potentially explosive mixtures with water.



HMIS III Rating

Health

: 2 Moderate Hazard - Temporary or minor injury may occur

Flammability

: 4 Severe Hazard - Flammable gases, or very volatile flammable liquids with flash points below 73 F, and boiling points below 100 F. Materials may ignite spontaneously with air. (Class IA)

Physical

: 2 Moderate Hazard - Materials that are unstable and may undergo violent chemical changes at normal temperature and pressure with low risk for explosion. Materials may react violently with water or form peroxides upon exposure to air.

SDS Canada (GHS) - Praxair

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

SAFETY DATA SHEET

4444

Section 1. Identification

Product name : MINWAX® POLYCRYLIC® Water-Based Protective Finish
Clear Semi-Gloss

Product code : 4444

Other means of identification : Not available.

Product type : Liquid.

Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : MINWAX Company
10 Mountainview Road
Upper Saddle River, NJ 07458

Emergency telephone number of the company : US/Canada: (216) 566-2917
Mexico: CHEMTREC México 01-800-681-9531. Available 24 hours and 365 days per year

Product Information Telephone Number : US/Canada: (800) 523-9299
Mexico: 01-800-71-73-123 / (52) 53-33-15-01

Regulatory Information Telephone Number : US / Canada: (216) 566-2902
Mexico: 01-800-71-73-123 / (52) 53-33-15-01

Transportation Emergency Telephone Number : US / Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : TOXIC TO REPRODUCTION (Unborn child) - Category 1B
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
Percentage of the mixture consisting of ingredient(s) of unknown oral toxicity: 5.2%
Percentage of the mixture consisting of ingredient(s) of unknown dermal toxicity: 4.6%
Percentage of the mixture consisting of ingredient(s) of unknown inhalation toxicity: 9.3%

GHS label elements

Hazard pictograms :



Signal word : Danger

Hazard statements : May damage the unborn child.
May cause damage to organs through prolonged or repeated exposure.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Do not breathe vapor.

Response : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention.

Storage : Store locked up.

Date of issue/Date of revision : 3/25/2019 **Date of previous issue** : 1/21/2019 **Version** : 11.02 1/13
4444 MINWAX® POLYCRYLIC® Water-Based Protective Finish Clear Semi-Gloss **SHW-85-NA-GHS-US**

Section 2. Hazards identification

- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Supplemental label elements** DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. **WARNING:** This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
Please refer to the SDS for additional information. Keep out of reach of children. Do not transfer contents to other containers for storage.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.
- CAS number/other identifiers**

| Ingredient name | % by weight | CAS number |
|-------------------------------|-------------|------------|
| Butoxypropanol | ≤3.2 | 5131-66-8 |
| Ethylene Glycol | ≤2.5 | 107-21-1 |
| 1-Methyl-2-Pyrrolidone | ≤1.8 | 872-50-4 |
| Decylpoly(ethyleneoxy)ethanol | ≤1.3 | 9014-85-1 |
| Polypropylene | ≤3 | - |
| 2-Methoxymethylethoxypropanol | ≤1 | 34590-94-8 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention following exposure or if feeling unwell.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Section 4. First aid measures

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : No known significant effects or critical hazards.
Inhalation : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : No specific data.
Inhalation : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
Skin contact : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
Ingestion : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
Specific treatments : No specific treatment.
Protection of first-aiders : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
Unsuitable extinguishing media : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
nitrogen oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | Exposure limits |
|---|--|
| Butoxypropanol Ethylene Glycol | None. ACGIH TLV (United States, 3/2018). STEL: 10 mg/m ³ 15 minutes. Form: Inhalable fraction. Aerosol only. STEL: 50 ppm 15 minutes. Form: Vapor fraction TWA: 25 ppm 8 hours. Form: Vapor fraction |
| 1-Methyl-2-Pyrrolidone | AIHA WEEL (United States, 7/2018). Absorbed through skin. TWA: 10 ppm 8 hours. |
| Decylpoly(ethyleneoxy)ethanol Polypropylene 2-Methoxymethylethoxypropanol | None. None. ACGIH TLV (United States, 3/2018). Absorbed through skin. TWA: 100 ppm 8 hours. TWA: 606 mg/m ³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 909 mg/m ³ 15 minutes. NIOSH REL (United States, 10/2016). Absorbed through skin. TWA: 100 ppm 10 hours. TWA: 600 mg/m ³ 10 hours. STEL: 150 ppm 15 minutes. STEL: 900 mg/m ³ 15 minutes. OSHA PEL (United States, 5/2018). Absorbed through skin. TWA: 100 ppm 8 hours. TWA: 600 mg/m ³ 8 hours. |

Occupational exposure limits (Canada)

| Ingredient name | Exposure limits |
|-------------------------------------|---|
| Ethylene glycol | CA British Columbia Provincial (Canada, 7/2018). C: 100 mg/m ³ Form: Aerosol TWA: 10 mg/m ³ 8 hours. Form: Particulate STEL: 20 mg/m ³ 15 minutes. Form: Particulate C: 50 ppm Form: Vapour CA Ontario Provincial (Canada, 1/2018). C: 100 mg/m ³ Form: Aerosol only. CA Saskatchewan Provincial (Canada, 7/2013). CEIL: 100 mg/m ³ Form: aerosol CA Alberta Provincial (Canada, 6/2018). C: 100 mg/m ³ CA Quebec Provincial (Canada, 1/2014). STEV: 50 ppm 15 minutes. Form: vapour and mist STEV: 127 mg/m ³ 15 minutes. Form: vapour and mist |
| N-Methyl pyrrolidone | CA Ontario Provincial (Canada, 1/2018). TWA: 400 mg/m ³ 8 hours. |
| Dipropylene glycol monomethyl ether | CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 100 ppm 8 hours. |

Section 8. Exposure controls/personal protection

| | |
|--|---|
| | <p>15 min OEL: 909 mg/m³ 15 minutes. 8 hrs OEL: 606 mg/m³ 8 hours. 15 min OEL: 150 ppm 15 minutes. CA British Columbia Provincial (Canada, 7/2018). Absorbed through skin. TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes. CA Quebec Provincial (Canada, 1/2014). Absorbed through skin. TWAEV: 100 ppm 8 hours. TWAEV: 606 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 909 mg/m³ 15 minutes. CA Ontario Provincial (Canada, 1/2018). Absorbed through skin. STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). Absorbed through skin. STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
|--|---|

Occupational exposure limits (Mexico)

| Ingredient name | Exposure limits |
|-------------------------------|---|
| ethanediol | <p>NOM-010-STPS-2014 (Mexico, 4/2016). CEIL: 100 mg/m³ Form: Only AEROSOL NOM-010-STPS-2014 (Mexico, 4/2016). Absorbed through skin. TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes.</p> |
| 2-Methoxymethylethoxypropanol | |

- Appropriate engineering controls** : If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 8.5
- Melting point/freezing point** : Not available.
- Boiling point/boiling range** : 100°C (212°F)
- Flash point** : Closed cup: 100°C (212°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 0.8 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 0.6%
Upper: 20.4%
- Vapor pressure** : 2.3 kPa (17.5 mm Hg) [at 20°C]
- Vapor density** : 1 [Air = 1]
- Relative density** : 1.02
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): >0.205 cm²/s (>20.5 cSt)
- Molecular weight** : Not applicable.
- Aerosol product**
- Heat of combustion** : 4.018 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : No specific data.
- Incompatible materials** : No specific data.

Section 10. Stability and reactivity

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-------------|---------|------------|----------|
| Butoxypropanol | LD50 Dermal | Rabbit | 3100 mg/kg | - |
| Ethylene Glycol | LD50 Oral | Rat | 4700 mg/kg | - |
| 1-Methyl-2-Pyrrolidone | LD50 Dermal | Rabbit | 8 g/kg | - |
| | LD50 Oral | Rat | 3914 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------------|--------------------------|---------|-------|-------------------------|-------------|
| Ethylene Glycol | Eyes - Mild irritant | Rabbit | - | 24 hours 500 milligrams | - |
| | Eyes - Mild irritant | Rabbit | - | 1 hours 100 milligrams | - |
| | Eyes - Moderate irritant | Rabbit | - | 6 hours 1440 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 555 milligrams | - |
| 1-Methyl-2-Pyrrolidone | Eyes - Moderate irritant | Rabbit | - | 100 milligrams | - |
| 2-Methoxymethylethoxypropanol | Eyes - Mild irritant | Human | - | 8 milligrams | - |
| | Eyes - Mild irritant | Rabbit | - | 24 hours 500 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 500 milligrams | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|------------------------|------------|-------------------|---|
| Butoxypropanol | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| Ethylene Glycol | Category 3 | Not applicable. | Respiratory tract irritation and Narcotic effects |
| 1-Methyl-2-Pyrrolidone | Category 3 | Not applicable. | Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

Section 11. Toxicological information

| Name | Category | Route of exposure | Target organs |
|-----------------|------------|-------------------|----------------|
| Butoxypropanol | Category 2 | Not determined | Not determined |
| Ethylene Glycol | Category 2 | Not determined | Not determined |

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.
Inhalation : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.
Inhalation : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
Skin contact : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
Ingestion : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : May cause damage to organs through prolonged or repeated exposure.
Carcinogenicity : No known significant effects or critical hazards.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : May damage the unborn child.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|--------|----------------|
| Oral | 19616.1 mg/kg |
| Dermal | 102963.8 mg/kg |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|--------------------------------------|--|----------|
| Ethylene Glycol | Acute LC50 6900000 µg/l Fresh water | Crustaceans - Ceriodaphnia dubia - Neonate | 48 hours |
| | Acute LC50 41000000 µg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| 1-Methyl-2-Pyrrolidone | Acute LC50 8050000 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute LC50 1.23 ppm Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 832 ppm Fresh water | Fish - Lepomis macrochirus | 96 hours |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Ethylene Glycol | - | - | Readily |

Bioaccumulative potential

Not available.

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-------------------------|--------------------|--------------------|-----------------------|----------------|----------------|
| UN number | Not regulated. | Not regulated. | Not regulated. | Not regulated. | Not regulated. |
| UN proper shipping name | - | - | - | - | - |
| | | | | | |

Date of issue/Date of revision : 3/25/2019 Date of previous issue : 1/21/2019 Version : 11.02 10/13
 4444 MINWAX® POLYCRYLIC® Water-Based Protective Finish SHW-85-NA-GHS-US
 Clear Semi-Gloss

Section 14. Transport information

| | | | | | |
|----------------------------|-----|-----|-----|-----|-----|
| Transport hazard class(es) | - | - | - | - | - |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - | - | - | - | - |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Proper shipping name : Not available.
Ship type : Not available.
Pollution category : Not available.

Section 15. Regulatory information

TSCA 5(a)2 proposed significant new use rules: 1-Methyl-2-Pyrrolidone; 5-Chloro-2-methylisothiazolinone

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

International lists

Australia inventory (AICS): Not determined.
China inventory (IECSC): Not determined.
Japan inventory (ENCS): Not determined.
Japan inventory (ISHL): Not determined.
Korea inventory (KECI): Not determined.
Malaysia Inventory (EHS Register): Not determined.
New Zealand Inventory of Chemicals (NZIoC): Not determined.
Philippines inventory (PICCS): Not determined.
Taiwan Chemical Substances Inventory (TCSI): Not determined.
Thailand inventory: Not determined.
Turkey inventory: Not determined.
Vietnam inventory: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 0 |
| Physical hazards | | 0 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

[Procedure used to derive the classification](#)

| Classification | Justification |
|---|--------------------|
| TOXIC TO REPRODUCTION (Unborn child) - Category 1B | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 | Calculation method |

[History](#)

Date of printing : 3/25/2019

Date of issue/Date of revision : 3/25/2019

Date of previous issue : 1/21/2019

Version : 11.02

Key to abbreviations : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
UN = United Nations

▣ Indicates information that has changed from previously issued version.

[Notice to reader](#)

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

Safety Data Sheet

Printing date 01/26/2016

Revised On 01/26/2016

1 Identification of the substance and manufacturer

Trade name: MRO RED OXIDE PRIMER
Product code: 0006201407
Product category: PC9a Paints and coatings.
Manufacturer/Supplier: Seymour of Sycamore
 917 Crosby Avenue
 Sycamore, IL 60178
 Phone: 815-895-9101 www.seymourpaint.com
Emergency telephone number: CHEMTEL 1-800-255-3924, or 813-248-0585.

2 Hazard(s) identification

Classification of the substance or mixture

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 Skin Irrit. 2 H315 Causes skin irritation.
 Eye Irrit. 2A H319 Causes serious eye irritation.
 Repr. 2 H361 Suspected of damaging fertility or the unborn child.
 STOT SE 3 H336 May cause drowsiness or dizziness.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

GHS Hazard pictograms



GHS02 GHS04 GHS07 GHS08

Signal word

Hazard statements

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 Causes skin irritation.
 Causes serious eye irritation.
 Suspected of damaging fertility or the unborn child.
 May cause drowsiness or dizziness.
 May cause damage to organs through prolonged or repeated exposure.
 Obtain special instructions before use.
 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
 Do not spray on an open flame or other ignition source.
 Do not pierce or burn, even after use.
 Wash hands thoroughly after handling.
 Use only outdoors or in a well-ventilated area.
 Wear protective gloves/protective clothing/eye protection/face protection.
 Do not handle until all safety precautions have been read and understood.
 Wear protective gloves.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 Call a POISON CENTER/doctor if you feel unwell.
 If skin irritation occurs: Get medical advice/attention.
 IF ON SKIN: Wash with plenty of water.
 If eye irritation persists: Get medical advice/attention.
 Take off contaminated clothing and wash it before reuse.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Protect from sunlight. Store in a well-ventilated place.
 Store in a well-ventilated place. Keep container tightly closed.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

Precautionary statements

3 Composition/information on ingredients

Chemical characterization: Mixtures

Chemical Description:

This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|------------------------|--------|
| 67-64-1 | Acetone | 23.67% |
| 74-98-6 | propane | 12.6% |
| 108-88-3 | Toluene | 7.43% |
| 106-97-8 | n-butane | 7.4% |
| 64742-89-8 | VM&P Naphtha | 5.86% |
| 64-17-5 | ethyl alcohol | 3.89% |
| 1330-20-7 | xylene (mix) | 3.36% |
| 1309-37-1 | red iron oxide pigment | 3.22% |
| 14807-96-6 | Talc | 3.19% |
| 108-65-6 | PM acetate | 2.73% |
| 123-86-4 | n-butyl acetate | 2.72% |
| 64742-47-8 | Mineral Spirits | 2.06% |
| 110-19-0 | isobutyl acetate | 1.54% |
| 67-63-0 | isopropyl alcohol | 1.36% |

4 First-aid measures

After inhalation:

Supply fresh air; consult doctor in case of complaints.

(Contd. on page 2)

Safety Data Sheet

Printing date 01/26/2016

Revised On 01/26/2016

Trade name: MRO RED OXIDE PRIMER

(Contd. of page 1)

| | |
|--|--|
| After skin contact: | Remove contaminated clothing. Wash exposed area with soap and water. |
| After eye contact: | Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor. |
| After swallowing: | Rinse out mouth and then drink plenty of water. Rinse mouth with water. Do not induce vomiting. |
| Most important symptoms and effects: | Dizziness |
| Indication of any immediate medical attention needed: | No further relevant information available. |

5 Fire-fighting measures

| | |
|---|---|
| Extinguishing agents: | CO ₂ , extinguishing powder or water spray. Fight larger fires with water spray. |
| Special hazards: | Can form explosive gas-air mixtures. |
| Protective equipment for firefighters: | A respiratory protective device may be necessary. |

6 Accidental release measures

| | |
|---|--|
| Personal precautions, protective equipment and emergency procedures: | Wear protective equipment. Keep unprotected persons away. Use respiratory protective device against the effects of fumes/dust/aerosol. |
| Methods and material for containment and cleaning up: | Ensure adequate ventilation. Dispose contaminated material as waste according to section 13. |

7 Handling and storage

| | |
|--------------------------------------|--|
| Precautions for safe handling | Use only in well ventilated areas. |
| Storage requirements: | Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up. |

8 Exposure controls/personal protection**Components with limit values that require monitoring at the workplace:****67-64-1 Acetone**

| | |
|-----------|---|
| PEL (USA) | Long-term value: 2400 mg/m ³ , 1000 ppm |
| REL (USA) | Long-term value: 590 mg/m ³ , 250 ppm |
| TLV (USA) | Short-term value: 1187 mg/m ³ , 500 ppm Long-term value: 594 mg/m ³ , 250 ppm BEI |

74-98-6 propane

| | |
|-----------|--|
| PEL (USA) | Long-term value: 1800 mg/m ³ , 1000 ppm |
| REL (USA) | Long-term value: 1800 mg/m ³ , 1000 ppm |
| TLV (USA) | refer to Appendix F in TLVs and BEIs book |

108-88-3 Toluene

| | |
|-----------|---|
| PEL (USA) | Long-term value: 200 ppm Ceiling limit value: 300; 500* ppm *10-min peak per 8-hr shift |
| REL (USA) | Short-term value: 560 mg/m ³ , 150 ppm Long-term value: 375 mg/m ³ , 100 ppm |
| TLV (USA) | Long-term value: 75 mg/m ³ , 20 ppm BEI |

106-97-8 n-butane

| | |
|-----------|---|
| REL (USA) | Long-term value: 1900 mg/m ³ , 800 ppm |
| TLV (USA) | Short-term value: 2370 mg/m ³ , 1000 ppm |

64-17-5 ethyl alcohol

| | |
|-----------|---|
| PEL (USA) | Long-term value: 1900 mg/m ³ , 1000 ppm |
| REL (USA) | Long-term value: 1900 mg/m ³ , 1000 ppm |
| TLV (USA) | Short-term value: 1880 mg/m ³ , 1000 ppm |

1330-20-7 xylene (mix)

| | |
|-----------|--|
| PEL (USA) | Long-term value: 435 mg/m ³ , 100 ppm |
| REL (USA) | Short-term value: 655 mg/m ³ , 150 ppm Long-term value: 435 mg/m ³ , 100 ppm |
| TLV (USA) | Short-term value: 651 mg/m ³ , 150 ppm Long-term value: 434 mg/m ³ , 100 ppm BEI |

108-65-6 PM acetate

| | |
|------------|-------------------------|
| WEEL (USA) | Long-term value: 50 ppm |
|------------|-------------------------|

123-86-4 n-butyl acetate

| | |
|-----------|---|
| PEL (USA) | Long-term value: 710 mg/m ³ , 150 ppm |
| REL (USA) | Short-term value: 950 mg/m ³ , 200 ppm Long-term value: 710 mg/m ³ , 150 ppm |

(Contd. on page 3)

Safety Data Sheet

Printing date 01/26/2016

Revised On 01/26/2016

Trade name: MRO RED OXIDE PRIMER

(Contd. of page 2)

| | |
|-----------|--|
| TLV (USA) | Short-term value: (950) NIC-712 mg/m ³ , (200) NIC-150 ppm Long-term value: (713) NIC-238 mg/m ³ , (150) NIC-50 ppm |
|-----------|--|

110-19-0 isobutyl acetate

| | |
|-----------|--|
| PEL (USA) | Long-term value: 700 mg/m ³ , 150 ppm |
| REL (USA) | Long-term value: 700 mg/m ³ , 150 ppm |
| TLV (USA) | Short-term value: NIC-712 mg/m ³ , NIC-150 ppm Long-term value: (713) NIC-238 mg/m ³ , (150) NIC-50 ppm |

67-63-0 isopropyl alcohol

| | |
|-----------|--|
| PEL (USA) | Long-term value: 980 mg/m ³ , 400 ppm |
| REL (USA) | Short-term value: 1225 mg/m ³ , 500 ppm Long-term value: 980 mg/m ³ , 400 ppm |
| TLV (USA) | Short-term value: 984 mg/m ³ , 400 ppm Long-term value: 492 mg/m ³ , 200 ppm BEI |

Ingredients with biological limit values:**67-64-1 Acetone**

| | |
|-----------|--|
| BEI (USA) | 50 mg/L Medium: urine Time: end of shift Parameter: Acetone (nonspecific) |
|-----------|--|

108-88-3 Toluene

| | |
|-----------|--|
| BEI (USA) | 0.02 mg/L Medium: blood Time: prior to last shift of workweek Parameter: Toluene |
| | 0.03 mg/L Medium: urine Time: end of shift Parameter: Toluene |
| | 0.3 mg/g creatinine Medium: urine Time: end of shift Parameter: o-Cresol with hydrolysis (background) |

1330-20-7 xylene (mix)

| | |
|-----------|--|
| BEI (USA) | 1.5 g/g creatinine Medium: urine Time: end of shift Parameter: Methylhippuric acids |
|-----------|--|

67-63-0 isopropyl alcohol

| | |
|-----------|---|
| BEI (USA) | 40 mg/L Medium: urine Time: end of shift at end of workweek Parameter: Acetone (background, nonspecific) |
|-----------|---|

Hygienic protection: Keep away from foodstuffs and animal feed. Wash hands after use. Immediately remove all soiled and contaminated clothing. Wash hands after use. Avoid contact with the eyes and skin. Do not eat or drink while working.

Breathing equipment: A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene.

Hand protection: Nitrile gloves. Protective gloves. The glove material must be impermeable and resistant to the substance.

Eye protection: Tightly sealed goggles

9 Physical and chemical properties

| | |
|------------------------------------|--|
| Appearance: | Aerosol. |
| Odor: | Aromatic |
| Odor threshold: | Not determined. |
| pH-value: | Not determined. |
| Melting point/Melting range | Undetermined. |
| Boiling point: | -44 °C (-47 °F) |
| Flash point: | -19 °C (-2 °F) |
| Flammability (solid, gas): | Extremely flammable. |
| Decomposition temperature: | Not determined. |
| Auto igniting: | Product is not self-igniting. |
| Danger of explosion: | In use, may form flammable/explosive vapour-air mixture. |
| Lower Explosion Limit: | 1.7 Vol % |
| Upper Explosion Limit: | 10.9 Vol % |
| Vapor pressure: | Not determined. |
| Relative Density: | Between 0.77 and 0.85 (Water equals 1.00) |
| Vapour density | Not determined. |

(Contd. on page 4)

Safety Data Sheet

Printing date 01/26/2016

Revised On 01/26/2016

Trade name: MRO RED OXIDE PRIMER

(Contd. of page 3)

| | |
|--|------------------------|
| Evaporation rate | Not applicable. |
| Partition coefficient: n-octanol/water: | Not determined. |
| Solubility: | Not determined. |
| Viscosity: | Not determined. |
| VOC content: | 554.9 g/l / 4.63 lb/gl |
| VOC content (less exempt solvents): | 52.4 % |
| MIR Value: | 1.13 |
| Solids content: | 23.6 % |

10 Stability and reactivity

| | |
|--|--|
| Reactivity: | Stable at normal temperatures. |
| Conditions to avoid: | Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures. |
| Chemical stability: | Not fully evaluated. |
| Possibility of hazardous reactions: | No dangerous reactions known. |
| Incompatible materials: | No further relevant information available. |
| Hazardous decomposition: | No dangerous decomposition products known. |

11 Toxicological information**LD/LC50 values that are relevant for classification:****106-97-8 n-butane**

Inhalative LC50/4 h 658 mg/l (rat)

64-17-5 ethyl alcohol

Oral LD50 7060 mg/kg (rat)

Inhalative LC50/4 h 20000 mg/l (rat)

1330-20-7 xylene (mix)

Oral LD50 8700 mg/kg (rat)

Dermal LD50 2000 mg/kg (rft)

Inhalative LC50/4 h 6350 mg/l (rat)

1309-37-1 red iron oxide pigment

Oral LD50 >5000 mg/kg (rat)

108-65-6 PM acetate

Oral LD50 8500 mg/kg (rat)

Inhalative LC50/4 h 35.7 mg/l (rat)

123-86-4 n-butyl acetate

Oral LD50 14000 mg/kg (rat)

Inhalative LC50/4 h >21.0 mg/l (rat)

110-19-0 isobutyl acetate

Oral LD50 4763 mg/kg (rft)

67-63-0 isopropyl alcohol

Oral LD50 4570 mg/kg (rat)

Dermal LD50 13400 mg/kg (rab)

Inhalative LC50/4 h 30 mg/l (rat)

Information on toxicological effects: No data available.**Skin effects:** No irritant effect.**Eye effects:** Irritating effect.**Sensitization:** No sensitizing effects known.**Carcinogenic categories****IARC (International Agency for Research on Cancer)**

| | | |
|------------|------------------------|----|
| 108-88-3 | Toluene | 3 |
| 64-17-5 | ethyl alcohol | 1 |
| 1330-20-7 | xylene (mix) | 3 |
| 1309-37-1 | red iron oxide pigment | 3 |
| 14807-96-6 | Talc | 2B |
| 67-63-0 | isopropyl alcohol | 3 |

NTP (National Toxicology Program)

None of the ingredients is listed.

12 Ecological information

| | |
|---------------------------------------|---|
| Aquatic toxicity: | Hazardous for water, do not empty into drains. |
| Persistence and degradability: | The product is degradable after prolonged exposure to natural weathering processes. |
| Bioaccumulative potential: | No further relevant information available. |
| Mobility in soil: | No further relevant information available. |
| Other adverse effects: | No further relevant information available. |

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.

(Contd. on page 5)

Safety Data Sheet

Printing date 01/26/2016

Revised On 01/26/2016

Trade name: MRO RED OXIDE PRIMER

Recommendation: Completely empty cans should be recycled.

(Contd. of page 4)

14 Transport information

| | |
|-------------------------------|--------------------------|
| UN-Number | UN1950 |
| DOT | N/A |
| DOT | UN1950 |
| ADR | Consumer Commodity ORM-D |
| Transport hazard class(es): | Aerosols, flammable |
| Class | 1950 Aerosols |
| Marine pollutant: | 2.1 |
| Special precautions for user: | No |
| EMS Number: | Warning: Gases |
| Packaging Group: | F-D,S-U |
| UN "Model Regulation": | -- |
| | UN1950, Aerosols, 2.1 |

15 Regulatory information

SARA Section 355 (extremely hazardous substances):

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

| | |
|-----------|-------------------|
| 108-88-3 | Toluene |
| 1330-20-7 | xylene (mix) |
| 67-63-0 | isopropyl alcohol |

CPSC: This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.

California Proposition 65 chemicals known to cause cancer:

| | |
|------------|------------------------|
| 100-41-4 | ethyl benzene |
| 1333-86-4 | Carbon black |
| 13463-67-7 | titanium dioxide |
| 108-10-1 | methyl isobutyl ketone |

California Proposition 65 chemicals known to cause developmental toxicity:

108-88-3 Toluene
67-56-1 Methanol

CANADIAN ENVIRONMENTAL PROTECTION ACT:
WHMIS Symbols for Canada:

All hazardous ingredients for this product appear on the Canadian Domestic Substance List.
A - Compressed gas
D2A - Very toxic material causing other toxic effects



EPA:

| | | |
|-----------|------------------|----|
| 67-64-1 | Acetone | I |
| 108-88-3 | Toluene | II |
| 1330-20-7 | xylene (mix) | I |
| 110-19-0 | isobutyl acetate | D |

16 Other information

Contact: Regulatory Affairs
Date of preparation / last revision 01/26/2016 / -



MATERIAL SAFETY DATA SHEET

MSDS Number: 3402E

Section 1 PRODUCT AND COMPANY IDENTIFICATION

Trade Name: PURPLE or CLEAR PRIMER
Product Nos.: purple - 018255, 018256, 018267, 019002, 018003, 019038, 019041, 019044, 019045, 019046, 019048, 019049, 019050, 019051, 019052, 019053, 019054, 019055, 019056, 019057, 019060, 019062, 019063, 019064, 019065, 019066, 019067, 019068, 019069, 019070, 019071, 019072, 019073, 019074, 019075, 019076, 019077, 019078, 019079, 019080, 019081, 019082, 019083, 019084, 019085, 019086, 019087, 019089, 019090, 019091, 019092, 019093, 019094, 019095, 019097, 019098, 019099, 019157, 019171, 019172, 019173, 019190, 019200, 019201, 019202, 019205, 019205, 019505, 019511, 019716, 019717, 405163, 458457, 458465, B15944, B15944A, B15944D, B15944F, MVP9912, MVP9913, MVP9914, PV019038, PV019041, PV019205 clear - 019000, 019001, 019010, 019012, 019017, 019018, 019019, 019020, 019021, 019022, 019023, 019024, 019025, 019029, 019030, 019031, 019032, 019034, 019035, 019039, 019040, 019047, 019139, 019170, 019207

Product Use: Primer for PVC and CPVC Plastic Pipe
Formula: See section 2
Synonyms: Plastic Pipe Primer
Firm Name & Address: William H. Harvey Company 4334 South 67th Street, Omaha, NE 68117 www.wmharvey.com
Firm Phone No: (402) 331-1175
Emergency Phone Nos.: For Emergency First Aid call 1-877-740-5015. For chemical transportation emergencies ONLY, call Chemtrec at 1-800-424-9300. Outside the U.S. 1-703-527-3887.
Prepared by: Technical Department
Preparation Date: 11/01/2009

Section 2 HAZARDS IDENTIFICATION

Emergency Overview: Purple or Clear
liquid with an ether-like odor. Extremely flammable liquid and vapor. Vapors may cause flash fire. May cause eye and skin irritation. Inhalation of vapors or mist may cause respiratory irritation and central nervous system effects. Swallowing may cause irritation, nausea, vomiting, diarrhea and kidney or liver disorders. Aspiration hazard. May be fatal if swallowed. Symptoms may be delayed.

Section 3 COMPOSITION/INFORMATION ON INGREDIENTS

Table with 6 columns: INGREDIENTS, %wt/wt, CAS NUMBER, ACGIH TLV TWA, OSHA PEL TWA, OTHER. Rows include Tetrahydrofuran, Methyl Ethyl Ketone, Acetone, and Cyclohexanone.

OSHA Hazard Classification: Flammable, irritant, organ effects

Section 4 FIRST AID MEASURES

Skin: Remove contaminated clothing immediately. Wash all exposed areas with soap and water. Get medical attention if irritation develops. Remove dried cement with hand cleaner or baby oil.

Eyes: If material gets into eyes or if fumes cause irritation, immediately flush eyes with plenty of water until chemical is removed. If irritation persists, get medical attention immediately.

Inhalation: If symptoms of exposure develop, remove to fresh air. If breathing becomes difficult, administer oxygen. Administer artificial respiration if breathing has stopped. Seek immediate medical attention.

Ingestion: **DO NOT INDUCE VOMITING.** Rinse mouth with water. Never give anything by mouth to a person who is unconscious or drowsy. Get immediate medical attention by calling a Poison Control Center, or hospital emergency room. If medical advice cannot be obtained, then take the person and product to the nearest medical emergency treatment center or hospital.

Section 5 FIRE FIGHTING MEASURES

Flashpoint / Method: 14 - 23 Degrees F. (-10 to -5 Degrees C) / CCCFP

Flammability: LEL = 1.8 % Volume, UEL = 11.8 % Volume

Extinguishing Media: Use dry chemical, CO₂, or foam to extinguish fire. Cool fire exposed container with water. Water may be ineffective as an extinguishing agent.

Special Fire Fighting Procedure: Firefighters should wear positive pressure self-contained breathing apparatus and full protective clothing for fires in areas where chemicals are used or stored

Unusual Fire And Explosion Hazards: Extremely flammable liquid. Keep away from heat and all sources of ignition including sparks, flames, lighted cigarettes and pilot lights. Containers may rupture or explode in the heat of a fire. Vapors are heavier than air and may travel to a remote ignition source and flash back. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

Hazardous Decomposition Products: Combustion will produce toxic and irritating vapors including carbon monoxide, carbon dioxide and hydrogen chloride.

Section 6 ACCIDENTAL RELEASE MEASURES

Spill or Leak Procedures: Remove all sources of ignition and ventilate area. Stop leak if it can be done without risk. Personnel cleaning up the spill should wear appropriate personal protective equipment, including respirators if vapor concentrations are high. Soak up spill with an inert absorbent such as sand, earth or other non-combusting material. Put absorbent material in covered, labeled metal containers. Prevent liquid from entering watercourses, sewers and natural waterways. Report releases to authorities as required. See Section 13 for disposal information.

Section 7 HANDLING AND STORAGE

Handling: Avoid contact with eyes, skin and clothing. Avoid breathing vapors or mists. Use with adequate ventilation (equivalent to outdoors). Wash thoroughly after handling. Do not eat, drink or smoke in the work area. Keep product away from heat, sparks, flames and all other sources of ignition. No smoking in storage or use areas. Keep containers closed when not in use.

Storage: Store in a cool, dry, well-ventilated area away from incompatible materials. Keep containers closed when not in use.

Other: "Empty" containers retain product residue and can be hazardous. Follow all MSDS

precautions in handling empty containers. Do not cut or weld on or near empty or full containers.

Section 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

Ventilation: Open doors & windows. Provide ventilation capable of maintaining emissions at the point of use below recommended exposure limits. If used in enclosed area, use exhaust fans. Exhaust fans should be explosion-proof or set up in a way that flammable concentrations of solvent vapors are not exposed to electrical fixtures or hot surfaces.

Respiratory Protection: For operations where the exposure limit may be exceeded, a NIOSH approved organic vapor respirator or supplied air respirator is recommended. Equipment selection depends on contaminant type and concentration, select in accordance with 29 CFR 1910.134 and good industrial hygiene practice. For firefighting, use self-contained breathing apparatus.

Skin Protection: Rubber gloves are suitable for normal use of the product. For long exposures chemical resistant gloves may be required such as 4H(tm) or Silver Shield(tm) to avoid prolonged skin contact.

Eye Protection: Safety glasses with side shields or safety goggles.

Section 9 PHYSICAL AND CHEMICAL PROPERTIES

Boiling Point: 151 Degrees F / 66 Degrees C
Melting Point: Not applicable
Vapor Pressure: 145 mmHg @ 20 Degrees C
Vapor Density: (Air = 1) 2.5
Volatile Components: 99.96%
Solubility In Water: Negligible
pH: Not applicable
Specific Gravity: 0.84 +/- 0.02 @ 20 Degrees C
Evaporation Rate: (BUAC = 1) = 5.5 - 8.0
Appearance: Purple or Clear Liquid
Odor: Ether-Like
Will Dissolve In: Tetrahydrofuran
Material Is: Liquid

Section 10 STABILITY AND REACTIVITY

Stability: Stable.
Conditions To Avoid: Avoid heat, sparks, flames and other sources of ignition.
Hazardous Decomposition Products: Combustion will produce toxic and irritating vapors including carbon monoxide, carbon dioxide and hydrogen chloride.
Incompatibility/ Materials To Avoid: Oxidizing agents, alkalis, amines, ammonia, acids, chlorine compounds, chlorinated inorganics (potassium, calcium and sodium hypochlorite) and hydrogen peroxides. May attack plastic, resins and rubber.
Hazardous Polymerization: Will not occur.

Section 11 TOXICOLOGICAL INFORMATION

Inhalation: Vapors or mists may cause mucous membrane and respiratory irritation, coughing, headache, dizziness, dullness, nausea, shortness of breath and vomiting. High concentrations may cause central nervous system depression, narcosis and unconsciousness. May cause kidney, liver and lung damage.

Skin: May cause irritation with redness, itching and pain. Methyl ethyl ketone and cyclohexanone may be absorbed through the skin causing effects similar to those listed under inhalation.

Eye: Vapors may cause irritation. Direct contact may cause irritation with redness, stinging and tearing of the eyes. May cause eye damage.

Ingestion: Swallowing may cause abdominal pain, nausea, vomiting and diarrhea. Aspiration during swallowing or vomiting can cause chemical pneumonia and lung damage. May cause kidney and liver damage.

Chronic Toxicity: Prolonged or repeated overexposure cause dermatitis and damage to the kidney, liver, lungs and central nervous system.

Toxicity Data:

| | |
|----------------------|--|
| Acetone: | Oral rat LD50: 5,800 mg/kg |
| | Inhalation rat LC50: 50,100 mg/m ³ /8 hours |
| Cyclohexanone: | Oral rat LD50: 1,620 mg/kg |
| | Inhalation rat LC50: 8,000 ppm/4 hours |
| | Skin rabbit LD50: 1 mL/kg |
| Tetrahydrofuran: | Oral rat LD50: 1,650 mg/kg |
| | Inhalation rat LC50: 21,000 ppm/3 hours |
| Methyl Ethyl Ketone: | Oral rat LD50: 2,737 mg/kg |
| | Inhalation rat LC50: 23,500 mg/m ³ /8 hours |
| | Skin rabbit LD50: 6,480 mg/kg |

Sensitization: None of the components are known to cause sensitization.

Carcinogenicity: None of the components are listed as a carcinogen or suspect carcinogen by NTP, IARC or OSHA. The National Toxicology Program has reported that exposure of mice and rats to tetrahydrofuran (THF) vapor levels up to 1800 ppm 6 hr/day, 5 days/week for their lifetime caused an increased incidence of kidney tumors in male rats and liver tumors in female mice. The significance of these findings for human health is unclear at this time, and may be related to "species specific" effects. Elevated incidences of tumors in humans have not been reported for THF. ACGIH has classified cyclohexanone (CYH) and tetrahydrofuran as "A3," Confirmed Animal Carcinogens with Unknown Relevance to Humans.

Mutagenicity: Cyclohexanone has been positive in bacterial and mammalian assays. Acetone, methyl ethyl ketone and tetrahydrofuran are generally thought not to be mutagenic.

Reproductive Toxicity: Methyl ethyl ketone and cyclohexanone have been shown to cause embryofetal toxicity and birth defects in laboratory animals. Acetone and tetrahydrofuran has been found to cause adverse developmental effects only when exposure levels cause other toxic effects to the mother.

Medical Conditions Aggravated By Exposure: Persons with pre-existing skin, lung, kidney or liver disorders may be at increased risk from exposure to this product.

Section 12 ECOLOGICAL INFORMATION

This product is not expected to be toxic to aquatic organisms.

Cyclohexanone: 96 hour LC50 values for fish is over 100 mg/L.

Tetrahydrofuran: 96 hour LC50 fathead minnow: 2160 mg/L.

Acetone: 96 hour LC50 for fish is greater than 100 mg/L.

Methyl Ethyl Ketone: 96 hour LC50 for fish is greater than 100 mg/L.

VOC Information: This product emits VOC's (volatile organic compounds) in its use. Make sure that use of this product complies with local VOC emission regulations, where they exist.

VOC Level: Maximum 550 g/L per SCAQMD Test Method 316A.

Section 13 DISPOSAL CONSIDERATIONS

Waste Disposal: Dispose in accordance with current local, state and federal regulations.

RCRA Hazardous Waste Number: U002, U057, U159, U213

EPA Hazardous Waste ID Number: D001, D035, F003, F0005

EPA Hazard Waste Number: Ignitable Waste. Toxic Waste (Methyl Ethyl Ketone content)

Section 14 TRANSPORT INFORMATION

| | | |
|-----------------------|--|--|
| DOT | <u>Less than 1 Liter (0.3 gal)</u> | <u>Greater than 1 Liter (0.3 gal)</u> |
| UN/NA Number: | None | UN1993 |
| Proper Shipping Name: | Consumer Commodity | Flammable Liquid, NOS (Methyl Ethyl Ketone, Acetone) |
| Hazard Class: | ORM-D | 3 |
| Packing Group: | None | PGII |
| Hazard Labels: | None | Flammable Liquid |
| IMDG | | |
| UN Number: | UN1993 | UN1993 |
| Proper Shipping Name: | Flammable Liquid, NOS (Limited Quantity) | Flammable Liquid, NOS (Methyl Ethyl Ketone, Acetone) |
| Hazard Class: | 3 | 3 |
| Packing Group: | II | II |
| Label: | None (Limited Quantities are expected from labeling) | Class 3 (Flammable Liquid) |
| Flashpoint (deg C) | -10 to -5 Degrees C | -10 to -5 Degrees C |

2008 North American Emergency Response Guidebook Number: 127

Section 15 REGULATORY INFORMATION

Hazard Category for Section 311/312: Acute Health, Chronic Health, Flammable

Section 302 Extremely Hazardous Substances (TPQ): This product does not contain chemicals regulated under SARA Section 302.

Section 313 Toxic Chemicals: CERCLA 103 Reportable Quantity: This product does not contain chemicals subject to SARA Title III Section 313 Reporting requirements. Spills of this product over the RQ (reportable quantity) must be reported to the National Response Center. The RQ for the product, based on the RQ for Tetrahydrofuran (30% maximum) of 1,000 lbs, is 3,333 lbs. Many states have more stringent release reporting requirements. Report spills required under federal, state and local regulations.

California Proposition 65: This product does not contain any chemicals subject to California Proposition 65 regulations.

TSCA Inventory Canadian WHIMS Classification: All of the components of this product are listed on the TSCA inventory. Class B, Division 2; Class D, Division 2, Subdivision B; Class D, Division 2, Subdivision A. This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

Section 16 OTHER INFORMATION

NFPA and HMIS:
NFPA Hazard Signal: Health: 2 Flammability: 3 Reactivity: 1 Special: None
HMIS Hazard Signal: Health: 2* Flammability: 3 Reactivity: 1 PPE: G

Disclaimer:

The information herein has been compiled from sources believed to be reliable, up-to-date, and is accurate to the best of our knowledge. However, we cannot give any guarantees regarding information from other sources, and expressly do not make warranties, nor assume any liability for its use.

Template: tpl-us-e1

Safety Data Sheet



1. Identification

Product Name: PTOUCH 2X +SSPR 6PK SATIN HEIRLOOM WHITE
Revision Date: 4/29/2019

Product Identifier: 249076
Supercedes Date: 11/2/2018

Recommended Use: Topcoat/Aerosols

Supplier: Rust-Oleum Corporation
 11 Hawthorn Parkway
 Vernon Hills, IL 60061
 USA
Manufacturer: Rust-Oleum Corporation
 11 Hawthorn Parkway
 Vernon Hills, IL 60061
 USA

Preparer: Regulatory Department

Emergency Telephone: 24 Hour Hotline: 847-367-7700

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

38% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|--|
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Carcinogenicity, category 2 | H351 | Suspected of causing cancer. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |
| STOT, repeated exposure, category 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| Eye Irritation, category 2A | H319 | Causes serious eye irritation. |

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|-----------|--|
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P201 | Obtain special instructions before use. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P405 | Store locked up. |

| | |
|----------------|--|
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P260 | Do not breathe dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|--|----------------|-----------------------|-----------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| Titanium Dioxide | 13463-67-7 | 10-25 | Not Available | Not Available |
| n-Butane | 106-97-8 | 2.5-10 | GHS04 | H280 |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 2.5-10 | GHS02-GHS07 | H226-315-319-332 |
| n-Butyl Acetate | 123-86-4 | 2.5-10 | GHS02-GHS07 | H226-336 |
| Naphtha, Petroleum, Hydrotreated Light | 64742-49-0 | 2.5-10 | GHS08 | H304 |
| Hydrotreated Light Distillate | 64742-47-8 | 2.5-10 | GHS08 | H304 |
| Hydrous Magnesium Silicate | 14807-96-6 | 1.0-2.5 | Not Available | Not Available |
| Ethylbenzene | 100-41-4 | 1.0-2.5 | GHS02-GHS07- GHS08 | H225-304-332-351-373 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately. Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. Closed containers may explode when exposed to extreme heat due to buildup of steam. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Evacuate area and fight fire from a safe distance. Full protective equipment including self-contained breathing apparatus should be used. Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Use only in a well-ventilated area. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Avoid contact with eyes, skin and clothing.

STORAGE: Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Contents under pressure. Do not expose to heat or store above 120 ° F. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials. Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|---|------------|-----------------------|-------------------|--------------------|--------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 20.0 | N.E. | N.E. | 1000 ppm | N.E. |
| Titanium Dioxide | 13463-67-7 | 15.0 | 10 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 10.0 | 100 ppm | 150 ppm | 100 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 5.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| Naphtha, Petroleum, Hydrotreated Light | 64742-49-0 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Hydrotreated Light Distillate | 64742-47-8 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Hydrous Magnesium Silicate | 14807-96-6 | 5.0 | 2 mg/m3 | N.E. | N.E. | N.E. |
| Ethylbenzene | 100-41-4 | 5.0 | 20 ppm | N.E. | 100 ppm | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use impervious gloves to prevent skin contact and absorption of this material through the skin. Nitrile or Neoprene gloves may afford adequate skin protection. Use gloves to prevent prolonged skin contact.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application. Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Specific Gravity: | 0.820 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 0.9 - 13.0 |
| Boiling Range, °C: | -37 - 537 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: Substance may cause slight skin irritation. Prolonged or repeated contact may cause skin irritation. May cause skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010) May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage.

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|--|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 1330-20-7 | Xylenes (o-, m-, p- isomers) | 3500 mg/kg Rat | >4350 mg/kg Rabbit | 29.08 mg/L Rat |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 64742-49-0 | Naphtha, Petroleum, Hydrotreated Light | >5000 mg/kg Rat | >3160 mg/kg Rabbit | >4951 mg/L Rat |
| 64742-47-8 | Hydrotreated Light Distillate | >5000 mg/kg Rat | >2000 mg/kg Rabbit | >5000 mg/L Rat |
| 14807-96-6 | Hydrous Magnesium Silicate | 6000 | N.E. | 30 |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Dispose of material in accordance to local, state, and federal regulations and ordinances. Do not allow to enter waterways, wastewater, soil, storm drains or sewer systems. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation. Do not incinerate closed containers.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|---|-----------------------------|---------------------|---------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint and Related Spray Products in Ltd Qty | Aerosols | Aerosols, flammable | Aerosols |
| Hazard Class: | N.A. | 2 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Carcinogenicity, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure)

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------------|----------------|
| Xylenes (o-, m-, p- isomers) | 1330-20-7 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65:

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

16. Other Information**HMIS RATINGS**

Health: 2* Flammability: 4 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: 2 Flammability: 4 Instability: 0

Maximum Incremental Reactivity 0.95

SDS REVISION DATE: 4/29/2019

REASON FOR REVISION: Revision Description Changed
 Product Composition Changed
 Substance and/or Product Properties Changed in Section(s):
 01 - Identification
 02 - Hazard Identification
 16 - Other Information
 Revision Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.

HIT-RE 500 V3

Safety information for 2-Component-products

Issue date: 13/05/2020

Revision date: 13/05/2020

Supersedes: 25/02/2019

Version: 2.3

SECTION 1: Kit identification

1.1 Product identifier

Product name

HIT-RE 500 V3



Product code

BU Anchor

1.2 Details of the supplier of the Safety information for 2-Component-products

Hilti, Inc.
Legacy Tower, Suite 1000
7250 Dallas Parkway
TX 75024 Plano - USA
T +1 9724035800
1-800-879-8000 toll free - F +1 918 254 0522

SECTION 2: General information

Storage

Storage temperature : 5 - 25 °C

A SDS for each of these components is included. Please do not separate any component SDS from this cover page

This Kit should be handled in accordance with good laboratory practices and appropriate personal protective equipment should be used

SECTION 3: Kit contents

Classification of the Product

GHS-US classification

| | |
|---------------|--|
| Skin Corr. 1B | H314 - Causes severe skin burns and eye damage. |
| Skin Sens. 1 | H317 - May cause an allergic skin reaction. |
| Muta. 2 | H341 - Suspected of causing genetic defects. |
| Repr. 1B | H360 - May damage fertility or the unborn child. |
| STOT SE 3 | H335 - May cause respiratory irritation. |

Label elements

GHS US labelling

Hazard pictograms (GHS US)



GHS05

GHS07

GHS08

Signal word (GHS US)

Danger

Hazardous ingredients

Epoxy resin, Amines

Hazard statements (GHS US)

Causes severe skin burns and eye damage.
May cause an allergic skin reaction.
May cause respiratory irritation.
Suspected of causing genetic defects.
May damage fertility or the unborn child.

Precautionary statements (GHS US)

Wear eye protection, protective clothing, protective gloves.
Do not get in eyes, on skin, or on clothing.


HIT-RE 500 V3

Safety information for 2-Component-products

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 If skin irritation or rash occurs: Get medical advice/attention.
 If eye irritation persists: Get medical advice/attention.
 If on skin: Wash with plenty of water.

Additional information

2-component-foilpack, contains:
 Component A: Epoxy resin, Reactive diluent, inorganic filler
 Component B: Amine hardener, inorganic filler



| Name | General description | Quantity | Unit | GHS-US classification |
|------------------|---------------------|----------|--------------|--|
| HIT-RE 500 V3, B | | 1 | pcs (pieces) | Skin Corr. 1B, H314 Skin Sens. 1, H317 STOT SE 3, H335 |
| HIT-RE 500 V3, A | | 1 | pcs (pieces) | Skin Corr. 1C, H314 Skin Sens. 1, H317 Muta. 2, H341 Repr. 1B, H360 |

SECTION 4: General advice

General advice For professional users only

SECTION 5: Safe handling advice

| | |
|-------------------------------|---|
| General measures | Spilled material may present a slipping hazard |
| Environmental precautions | Prevent entry to sewers and public waters Notify authorities if liquid enters sewers or public waters Avoid release to the environment Full or only partially emptied cartridges must be disposed of as special waste in accordance with official regulations. After curing, the product can be disposed of with household waste. |
| Storage conditions | Protect from sunlight. Store in a well-ventilated place. |
| Technical measures | Comply with applicable regulations |
| Precautions for safe handling | Wear personal protective equipment Avoid contact with skin and eyes Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work Avoid contact during pregnancy/while nursing |
| Methods for cleaning up | This material and its container must be disposed of in a safe way, and as per local legislation Mechanically recover the product On land, sweep or shovel into suitable containers Store away from other materials. |
| For containment | Collect spillage. |
| Incompatible materials | Sources of ignition Direct sunlight |
| Incompatible products | Strong bases Strong acids |

SECTION 6: First aid measures

First-aid measures after eye contact Get immediate medical advice/attention.

HIT-RE 500 V3

Safety information for 2-Component-products

| | |
|---------------------------------------|--|
| First-aid measures after ingestion | Immediately rinse with water for a prolonged period while holding the eyelids wide open Remove contact lenses, if present and easy to do. Continue rinsing. Consult an eye specialist |
| First-aid measures after inhalation | Do not induce vomiting Rinse mouth Immediately call a POISON CENTER/doctor. |
| First-aid measures after skin contact | Remove person to fresh air and keep comfortable for breathing. Wash with plenty of water/... Take off immediately all contaminated clothing. Wash contaminated clothing before reuse. If skin irritation or rash occurs: Get immediate medical advice/attention. |
| First-aid measures general | Never give anything by mouth to an unconscious person If you feel unwell, seek medical advice (show the label where possible) |
| Symptoms/effects | Causes severe skin burns and eye damage. |
| Symptoms/effects after eye contact | Causes serious eye damage. |
| Symptoms/effects after inhalation | May cause an allergic skin reaction. |

SECTION 7: Fire fighting measures

| | |
|--|--|
| Firefighting instructions | Use water spray or fog for cooling exposed containers Exercise caution when fighting any chemical fire Prevent fire fighting water from entering the environment |
| Protection during firefighting | Self-contained breathing apparatus Do not enter fire area without proper protective equipment, including respiratory protection |
| Hazardous decomposition products in case of fire | Thermal decomposition generates : Carbon dioxide Carbon monoxide |

SECTION 8: Other information

No data available

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Issue date: 05/13/2020

Revision date: 05/13/2020

Supersedes: 02/25/2019

Version: 1.4

SECTION 1: Identification

1.1. Identification

| | |
|--------------|------------------|
| Product form | Mixture |
| Product name | HIT-RE 500 V3, B |
| Product code | BU Anchor |

1.2. Relevant identified uses of the substance or mixture and uses advised against

| | |
|------------------------------|---|
| Use of the substance/mixture | Composite mortar component for fasteners in the construction industry |
|------------------------------|---|

1.3. Details of the supplier of the safety data sheet

Supplier

Hilti, Inc.
Legacy Tower, Suite 1000
7250 Dallas Parkway
TX 75024 Plano - USA
T +1 9724035800
1-800-879-8000 toll free - F +1 918 254 0522

Department issuing data specification sheet

Hilti Entwicklungsgesellschaft mbH
Hiltistraße 6
86916 Kaufering - Deutschland
T +49 8191 906876
anchor.hse@hilti.com

1.4. Emergency telephone number

| | |
|------------------|---|
| Emergency number | Chem-Trec Tel.: 1 800 424 9300 (USA, PR, Virgin Islands, Canada) Tel.: 703 527 3887 (Other countries) +1 918 8723000 1-800-879-8000 toll free |
|------------------|---|

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

Skin Corr. 1B H314 - Causes severe skin burns and eye damage.
Skin Sens. 1 H317 - May cause an allergic skin reaction.
STOT SE 3 H335 - May cause respiratory irritation.

Full text of H statements : see section 16

2.2. Label elements

GHS US labelling

Hazard pictograms (GHS US)



Signal word (GHS US)

Danger

Hazard statements (GHS US)

H314 - Causes severe skin burns and eye damage.
H317 - May cause an allergic skin reaction.
H335 - May cause respiratory irritation.

Precautionary statements (GHS US)

P280 - Wear eye protection, protective clothing, protective gloves.
P262 - Do not get in eyes, on skin, or on clothing.
P305+P351+P338 - IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P333+P313 - If skin irritation or rash occurs: Get medical advice/attention.
P337+P313 - If eye irritation persists: Get medical advice/attention.

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

P302+P352 - If on skin: Wash with plenty of water.

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

| Name | Product identifier | % | GHS-US classification |
|---------------------------------------|----------------------|---------|---|
| 2-methyl-1,5-pentanediamine | (CAS-No.) 15520-10-2 | 25 - 35 | Flam. Liq. 4, H227 Acute Tox. 4 (Oral), H302 Acute Tox. 4 (Dermal), H312 Acute Tox. 4 (Inhalation:dust,mist), H332 Skin Corr. 1A, H314 Eye Dam. 1, H318 STOT SE 3, H335 |
| Quartz (SiO ₂) | | 10 - 25 | Carc. 1A, H350 |
| Phenol, styrenated | (CAS-No.) 61788-44-1 | 5 - 10 | Skin Irrit. 2, H315 Skin Sens. 1, H317 |
| m-Xylylenediamine | (CAS-No.) 1477-55-0 | 5 - <8 | Acute Tox. 4 (Oral), H302 Acute Tox. 4 (Inhalation:dust,mist), H332 Skin Corr. 1B, H314 Eye Dam. 1, H318 Skin Sens. 1B, H317 Aquatic Chronic 3, H412 |
| 2,4,6-tris(dimethylaminomethyl)phenol | (CAS-No.) 90-72-2 | 1 - 2,5 | Acute Tox. 4 (Oral), H302 Skin Irrit. 2, H315 Eye Irrit. 2, H319 |
| 3-Aminopropyltriethoxysilan | (CAS-No.) 919-30-2 | 1 - 2,5 | Acute Tox. 4 (Oral), H302 Skin Corr. 1B, H314 |

Full text of H-statements: see section 16

SECTION 4: First aid measures

4.1. Description of first aid measures

First-aid measures general

Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).

First-aid measures after inhalation

Remove person to fresh air and keep comfortable for breathing.

First-aid measures after skin contact

Wash with plenty of water/.... Take off immediately all contaminated clothing. Wash contaminated clothing before reuse. If skin irritation or rash occurs: Get immediate medical advice/attention.

First-aid measures after eye contact

Get immediate medical advice/attention. Immediately rinse with water for a prolonged period while holding the eyelids wide open. Remove contact lenses, if present and easy to do. Continue rinsing. Consult an eye specialist.

First-aid measures after ingestion

Do not induce vomiting. Rinse mouth. Immediately call a POISON CENTER/doctor.

4.2. Most important symptoms and effects (acute and delayed)

Potential adverse human health effects and symptoms

No additional information available.

Symptoms/effects

Causes severe skin burns and eye damage.

Symptoms/effects after inhalation

May cause an allergic skin reaction.

Symptoms/effects after eye contact

Causes serious eye damage.

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

4.3. Immediate medical attention and special treatment, if necessary

SECTION 5: Firefighting measures

5.1. Extinguishing media

| | |
|--------------------------------|--|
| Suitable extinguishing media | Foam. Dry powder. Carbon dioxide. Water spray. Sand. |
| Unsuitable extinguishing media | Do not use a heavy water stream. |

5.2. Special hazards arising from the substance or mixture

| | |
|------------|--------------------|
| Reactivity | Corrosive vapours. |
|------------|--------------------|

5.3. Advice for firefighters

| | |
|--------------------------------|---|
| Firefighting instructions | Use water spray or fog for cooling exposed containers. Exercise caution when fighting any chemical fire. Prevent fire fighting water from entering the environment. |
| Protection during firefighting | Self-contained breathing apparatus. Do not enter fire area without proper protective equipment, including respiratory protection. |

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

| | |
|------------------|---|
| General measures | Spilled material may present a slipping hazard. |
|------------------|---|

6.1.1. For non-emergency personnel

| | |
|----------------------|---------------------------------|
| Emergency procedures | Evacuate unnecessary personnel. |
|----------------------|---------------------------------|

6.1.2. For emergency responders

| | |
|----------------------|---|
| Protective equipment | Use personal protective equipment as required. Equip cleanup crew with proper protection. |
| Emergency procedures | Ventilate area. |

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters. Avoid release to the environment. Full or only partially emptied cartridges must be disposed of as special waste in accordance with official regulations. After curing, the product can be disposed of with household waste.

6.3. Methods and material for containment and cleaning up

| | |
|-------------------------|--|
| For containment | Collect spillage. |
| Methods for cleaning up | This material and its container must be disposed of in a safe way, and as per local legislation. Mechanically recover the product. On land, sweep or shovel into suitable containers. Store away from other materials. |
| Other information | Dispose of materials or solid residues at an authorized site. |

6.4. Reference to other sections

For further information refer to section 8: "Exposure controls/personal protection". For further information refer to section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

| | |
|-------------------------------|---|
| Precautions for safe handling | Wear personal protective equipment. Avoid contact with skin and eyes. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work. Avoid contact during pregnancy/while nursing. |
|-------------------------------|---|

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Hygiene measures

Do not eat, drink or smoke when using this product. Always wash hands after handling the product. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before reuse.

7.2. Conditions for safe storage, including any incompatibilities

| | |
|---------------------------|--|
| Technical measures | Comply with applicable regulations. |
| Storage conditions | Protect from sunlight. Store in a well-ventilated place. |
| Incompatible products | Strong bases. Strong acids. |
| Incompatible materials | Sources of ignition. Direct sunlight. |
| Storage temperature | 41 - 77 °F |
| Heat and ignition sources | Keep away from heat and direct sunlight. |

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| HIT-RE 500 V3, B | | |
|---|-------------------------------------|--|
| ACGIH | ACGIH TWA (mg/m ³) | 0.025 mg/m ³ (R - Respirable particulate matter) |
| ACGIH | Remark (ACGIH) | TLV® Basis: Pulm fibrosis; lung cancer. Notations: A2 (Suspected Human Carcinogen) |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 15 mg/m ³ (Total dust) 5 mg/m ³ (Respirable fraction) |
| 2-methyl-1,5-pentanediamine (15520-10-2) | | |
| Not applicable | | |
| Phenol, styrenated (61788-44-1) | | |
| Not applicable | | |
| m-Xylylenediamine (1477-55-0) | | |
| ACGIH | ACGIH Ceiling (ppm) | 0.018 ppm |
| ACGIH | Remark (ACGIH) | Eye, skin, & GI irr |
| 3-Aminopropyltriethoxysilan (919-30-2) | | |
| Not applicable | | |
| 2,4,6-tris(dimethylaminomethyl)phenol (90-72-2) | | |
| Not applicable | | |
| Quartz (SiO ₂) | | |
| ACGIH | ACGIH TWA (mg/m ³) | 0.025 mg/m ³ (Respirable fraction) |
| ACGIH | Remark (ACGIH) | TLV® Basis: Pulm fibrosis; lung cancer. Notations: A2 (Suspected Human Carcinogen) |
| OSHA | Remark (OSHA) | (3) See Table Z-3. |

Additional information

The product has a pasty consistency. Exposure limit values for respirable dusts are not relevant for this product.

8.2. Exposure controls

Appropriate engineering controls
Personal protective equipment

Ensure good ventilation of the work station.
Safety glasses. Gloves. Protective clothing. Avoid all unnecessary exposure.



Materials for protective clothing

Long sleeved protective clothing.

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|---------------------------------|---|
| Hand protection | Wear protective gloves. The permeation time is not the maximum wearing time! Generally speaking, it must be reduced. Contact with either mixtures of substances or different substances may shorten the protective function's effective duration. |
| Eye protection | Wear security glasses which protect from splashes. |
| Skin and body protection | Wear suitable protective clothing. |
| Environmental exposure controls | No specific measures are required provided the product is handled in accordance with the general rules of occupational hygiene and safety. |
| Consumer exposure controls | Avoid contact during pregnancy/while nursing. |
| Other information | Do not eat, drink or smoke during use. |

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|------------------------|
| Physical state | Solid |
| Appearance | Thixotropic paste. |
| Colour | red |
| Odour | Amine-like |
| Odour threshold | No data available |
| pH | 11.5 |
| Melting point | No data available |
| Freezing point | No data available |
| Boiling point | No data available |
| Flash point | No data available |
| Relative evaporation rate (butylacetate=1) | No data available |
| Flammability (solid, gas) | No data available |
| Explosive limits | No data available |
| Explosive properties | No data available |
| Oxidising properties | No data available |
| Vapour pressure | No data available |
| Relative density | No data available |
| Relative vapour density at 20 °C | No data available |
| Density | 1.31 g/cm ³ |
| Solubility | insoluble in water. |
| Log Pow | No data available |
| Auto-ignition temperature | No data available |
| Decomposition temperature | No data available |
| Viscosity | No data available |
| Viscosity, kinematic | No data available |
| Viscosity, dynamic | 50 - 70 Pa·s HN-0333 |

9.2. Other information

No additional information available

SECTION 10: Stability and reactivity

10.1. Reactivity

Corrosive vapours.

10.2. Chemical stability

Stable under normal conditions.

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

10.3. Possibility of hazardous reactions

No additional information available.

10.4. Conditions to avoid

Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids. Strong bases.

10.6. Hazardous decomposition products

Under normal conditions of storage and use, hazardous decomposition products should not be produced. Thermal decomposition generates : fume. Carbon monoxide. Carbon dioxide. Corrosive vapours.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity

Not classified

| 2-methyl-1,5-pentanediamine (15520-10-2) | |
|--|---|
| LD50 oral rat | 1690 mg/kg (Rat) |
| LD50 dermal rat | 1870 mg/kg |
| LC50 inhalation rat (mg/l) | 4.9 mg/l |
| ATE US (oral) | 1690 mg/kg bodyweight |
| ATE US (dermal) | 1870 mg/kg bodyweight |
| ATE US (vapours) | 4.9 mg/l/4h |
| ATE US (dust,mist) | 4.9 mg/l/4h |
| Phenol, styrenated (61788-44-1) | |
| LD50 oral rat | > 2500 mg/kg |
| LD50 dermal rat | > 2000 mg/kg |
| LC50 inhalation rat (mg/l) | 158.31 mg/l/4h |
| ATE US (vapours) | 158.31 mg/l/4h |
| ATE US (dust,mist) | 158.31 mg/l/4h |
| m-Xylylenediamine (1477-55-0) | |
| LD50 oral rat | 1090 mg/kg |
| LD50 dermal rat | > 3100 mg/kg |
| ATE US (oral) | 660 mg/kg bodyweight |
| ATE US (dust,mist) | 1.34 mg/l/4h |
| 3-Aminopropyltriethoxysilan (919-30-2) | |
| LD50 oral rat | 1.57 ml/kg |
| ATE US (oral) | 1570 mg/kg bodyweight |
| 2,4,6-tris(dimethylaminomethyl)phenol (90-72-2) | |
| LD50 oral rat | 2169 mg/kg (Rat; Equivalent or similar to OECD 401; Literature study; 2169 mg/kg bodyweight; Rat; Experimental value) |
| LD50 dermal rat | > 2000 mg/kg (Rat; Literature study; Other; >1 ml/kg; Rat; Experimental value) |
| ATE US (oral) | 500 mg/kg bodyweight |

Skin corrosion/irritation

Causes severe skin burns and eye damage.

pH: 11.5

Serious eye damage/irritation

Serious eye damage, category 1, implicit

pH: 11.5

Respiratory or skin sensitisation

May cause an allergic skin reaction.

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|------------------------|--|
| Germ cell mutagenicity | Not classified |
| | Based on available data, the classification criteria are not met |
| Carcinogenicity | Not classified |

| Quartz (SiO ₂) | |
|---|--|
| IARC group | 1 - Carcinogenic to humans |
| Reproductive toxicity | Not classified Based on available data, the classification criteria are not met |
| STOT-single exposure | May cause respiratory irritation. |
| STOT-repeated exposure | Not classified |
| Aspiration hazard | Not classified |
| Potential adverse human health effects and symptoms | No additional information available. |
| Symptoms/effects after inhalation | May cause an allergic skin reaction. |
| Symptoms/effects after eye contact | Causes serious eye damage. |

SECTION 12: Ecological information

12.1. Toxicity

Ecology - water Harmful to aquatic life with long lasting effects.

| 2-methyl-1,5-pentanediamine (15520-10-2) | |
|---|--|
| LC50 fish 1 | 130 mg/l (LC50; 48 h) |
| LOEC (acute) | 1800 mg/l |
| NOEC (acute) | 1000 mg/l |
| Phenol, styrenated (61788-44-1) | |
| LC50 fish 1 | 5.6 mg/l |
| LC50 other aquatic organisms 1 | 9.7 mg/l |
| EC50 Daphnia 1 | 1.44 mg/l |
| NOEC (acute) | 3.2 mg/l |
| Threshold limit algae 1 | 0.326 mg/l (72 h; Algae) |
| Threshold limit algae 2 | 0.14 mg/l (72 h; Algae) |
| m-Xylylenediamine (1477-55-0) | |
| LC50 fish 1 | 75 mg/l |
| LC50 other aquatic organisms 1 | 20.3 ppb |
| EC50 Daphnia 1 | 15 mg/l |
| LOEC (chronic) | 15 mg/l |
| NOEC (acute) | 10.5 mg/kg |
| NOEC (chronic) | 4.7 mg/l |
| NOEC chronic crustacea | 4.7 mg/l |
| 2,4,6-tris(dimethylaminomethyl)phenol (90-72-2) | |
| LC50 fish 1 | > 100 mg/l (96 h; Pisces; Nominal concentration) |
| EC50 Daphnia 1 | 10 - 100 mg/l (Invertebrata; Estimated value) |
| EC50 other aquatic organisms 1 | 84 mg/l (72 h; Desmodesmus subspicatus; growth rate; ECHA) |
| LC50 fish 2 | 70.9 mg/l (96 h; Pisces) |
| ErC50 (algae) | 84 mg/l (OECD 201: Alga, Growth Inhibition Test, 72 h, Desmodesmus subspicatus, Static system, Fresh water, Experimental value, GLP) |
| NOEC (chronic) | 2 mg/l (28 d; activated sludge, domestic; respiration rate; ECHA) |

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| 2,4,6-tris(dimethylaminomethyl)phenol (90-72-2) | |
|--|--|
| Threshold limit algae 1 | 10 - 100, Algae |
| Threshold limit algae 2 | 84 mg/l (72 h; Scenedesmus subspicatus; Growth rate) |

12.2. Persistence and degradability

| HIT-RE 500 V3, B | |
|-------------------------------|---|
| Persistence and degradability | May cause long-term adverse effects in the environment. |

| Phenol, styrenated (61788-44-1) | |
|--|--|
| Biochemical oxygen demand (BOD) | 0.000231 g O ₂ /g substance |
| Chemical oxygen demand (COD) | 0.004827 g O ₂ /g substance |

| Quartz (SiO₂) | |
|---------------------------------|-----------------------------------|
| Persistence and degradability | Biodegradability: not applicable. |
| Chemical oxygen demand (COD) | Not applicable (inorganic) |
| ThOD | Not applicable (inorganic) |

12.3. Bioaccumulative potential

| HIT-RE 500 V3, B | |
|---------------------------|------------------|
| Bioaccumulative potential | Not established. |

| 2-methyl-1,5-pentanediamine (15520-10-2) | |
|---|--|
| Log Pow | 0.27 (Estimated value) |
| Bioaccumulative potential | Low bioaccumulation potential (Log Kow < 4). |

| Phenol, styrenated (61788-44-1) | |
|--|---|
| BCF fish 2 | 3246 mg/l |
| Log Pow | 6.24 - 7.77 (Experimental value; OECD 123: Partition Coefficient (1-Octanol/Water): Slow-Stirring Method) |
| Bioaccumulative potential | Bioaccumulative potential. |

| 2,4,6-tris(dimethylaminomethyl)phenol (90-72-2) | |
|--|--|
| Log Pow | 0.77 (Literature; 0.219; Experimental value; Equivalent or similar to OECD 107; 21.5 °C) |
| Bioaccumulative potential | Low bioaccumulation potential (Log Kow < 4). |

| Quartz (SiO₂) | |
|---------------------------------|------------------------------------|
| Bioaccumulative potential | No bioaccumulation data available. |

12.4. Mobility in soil

| Phenol, styrenated (61788-44-1) | |
|--|--|
| Ecology - soil | No (test) data on mobility of the substance available. |

| 2,4,6-tris(dimethylaminomethyl)phenol (90-72-2) | |
|--|----------------------------------|
| Log Koc | 1.32 (log Koc, Calculated value) |
| Ecology - soil | Highly mobile in soil. |

| Quartz (SiO₂) | |
|---------------------------------|-------------------------------------|
| Ecology - soil | Low potential for mobility in soil. |

12.5. Other adverse effects

Other information Avoid release to the environment.

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations





SECTION 13: Disposal considerations

13.1. Waste treatment methods

| | |
|--|--|
| Regional legislation (waste) | Disposal must be done according to official regulations. |
| Product/Packaging disposal recommendations | After curing, the product can be disposed of with household waste. . Full or only partially emptied cartridges must be disposed of as special waste in accordance with official regulations. Packaging contaminated by the product : Dispose in a safe manner in accordance with local/national regulations. |
| Ecology - waste materials | Avoid release to the environment. |

SECTION 14: Transport information

In accordance with ADR / RID / IMDG / IATA / ADN

| ADR | IMDG | IATA | RID |
|---|--|--|--|
| 14.1. UN number | | | |
| 3259 | 3259 | 3259 | 3259 |
| 14.2. UN proper shipping name | | | |
| AMINES, SOLID, CORROSIVE, N.O.S. (2-methyl-1,5-pentanediamine, m-Xylylenediamine) | AMINES, SOLID, CORROSIVE, N.O.S. (2-methyl-1,5-pentanediamine, m-Xylylenediamine) | Amines, solid, corrosive, n.o.s. (2-methyl-1,5-pentanediamine, m-Xylylenediamine) | AMINES, SOLID, CORROSIVE, N.O.S. (2-methyl-1,5-pentanediamine, m-Xylylenediamine) |
| Transport document description | | | |
| UN 3259 AMINES, SOLID, CORROSIVE, N.O.S. (2-methyl-1,5-pentanediamine, m-Xylylenediamine), 8, II, (E) | UN 3259 AMINES, SOLID, CORROSIVE, N.O.S. (2-methyl-1,5-pentanediamine, m-Xylylenediamine), 8, II | UN 3259 Amines, solid, corrosive, n.o.s. (2-methyl-1,5-pentanediamine, m-Xylylenediamine), 8, II | UN 3259 AMINES, SOLID, CORROSIVE, N.O.S. (2-methyl-1,5-pentanediamine, m-Xylylenediamine), 8, II |
| 14.3. Transport hazard class(es) | | | |
| 8 | 8 | 8 | 8 |
|  |  |  |  |
| 14.4. Packing group | | | |
| II | II | II | II |
| 14.5. Environmental hazards | | | |
| Dangerous for the environment : No | Dangerous for the environment : No Marine pollutant : No | Dangerous for the environment : No | Dangerous for the environment : No |
| No supplementary information available | | | |

14.6. Special precautions for user

- Overland transport

| | |
|--------------------------------|-------------|
| Classification code (ADR) | C8 |
| Special provisions (ADR) | 274 |
| Limited quantities (ADR) | 1kg |
| Packing instructions (ADR) | P002, IBC08 |
| Mixed packing provisions (ADR) | MP10 |
| Transport category (ADR) | 2 |

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Orange plates



Tunnel restriction code (ADR)

E

- Transport by sea

| | |
|--------------------------------|-----------------------|
| Special provisions (IMDG) | 274 |
| Limited quantities (IMDG) | 1 kg |
| Packing instructions (IMDG) | P002 |
| EmS-No. (Fire) | F-A |
| EmS-No. (Spillage) | S-B |
| Stowage category (IMDG) | A |
| Stowage and segregation (IMDG) | Separated from acids. |
| MFAG-No | 154 |

- Air transport

| | |
|---------------------------------|------|
| PCA packing instructions (IATA) | 859 |
| PCA max net quantity (IATA) | 15kg |
| CAO packing instructions (IATA) | 863 |
| Special provisions (IATA) | A3 |

- Rail transport

| | |
|----------------------------|-------------|
| Special provisions (RID) | 274 |
| Limited quantities (RID) | 1kg |
| Packing instructions (RID) | P002, IBC08 |
| Carriage prohibited (RID) | No |

14.7. Transport in bulk according to Annex II of MARPOL and the IBC Code

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory

15.2. International regulations

CANADA

No additional information available

| |
|--|
| m-Xylylenediamine (1477-55-0) |
| Listed on the Canadian DSL (Domestic Substances List) |
| 2,4,6-tris(dimethylaminomethyl)phenol (90-72-2) |
| Listed on the Canadian DSL (Domestic Substances List) |
| Quartz (SiO2) |
| Listed on the Canadian DSL (Domestic Substances List) |

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

EU-Regulations

No additional information available

National regulations

| |
|--|
| Quartz (SiO₂) |
| Listed on IARC (International Agency for Research on Cancer) |

15.3. US State regulations

California Proposition 65 - This product does not contain any substances known to the state of California to cause cancer, developmental and/or reproductive harm

| Component | State or local regulations |
|---|----------------------------|
| 2-methyl-1,5-pentanediamine(15520-10-2) | |
| Phenol, styrenated(61788-44-1) | |
| m-Xylylenediamine(1477-55-0) | |
| 3-Aminopropyltriethoxysilan(919-30-2) | |
| 2,4,6-tris(dimethylaminomethyl)phenol (90-72-2) | |
| Quartz (SiO ₂)() | |

SECTION 16: Other information

| | |
|----------------------------|--|
| Revision date | 05/13/2020 |
| Abbreviations and acronyms | European Agreement concerning the International Carriage of Dangerous Goods by Inland Waterways. European Agreement concerning the International Carriage of Dangerous Goods by Road. Acute Toxicity Estimate. Bioconcentration factor. Classification Labelling Packaging Regulation; Regulation (EC) No 1272/2008. Derived Minimal Effect level. Derived-No Effect Level. International Air Transport Association. Median effective concentration. International Maritime Dangerous Goods. Median lethal concentration. Median lethal dose. Lowest Observed Adverse Effect Level. No-Observed Adverse Effect Concentration. No-Observed Adverse Effect Level. No-Observed Effect Concentration. Persistent Bioaccumulative Toxic. Predicted No-Effect Concentration. Registration, Evaluation, Authorisation and Restriction of Chemicals Regulation (EC) No 1907/2006. Regulations concerning the International Carriage of Dangerous Goods by Rail. Safety Data Sheet. Very Persistent and Very Bioaccumulative. |
| Other information | None. |

HIT-RE 500 V3, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Full text of H-statements:

| | |
|------|--|
| H227 | Combustible liquid |
| H302 | Harmful if swallowed. |
| H312 | Harmful in contact with skin. |
| H314 | Causes severe skin burns and eye damage. |
| H315 | Causes skin irritation. |
| H317 | May cause an allergic skin reaction. |
| H318 | Causes serious eye damage. |
| H319 | Causes serious eye irritation. |
| H332 | Harmful if inhaled. |
| H335 | May cause respiratory irritation. |
| H350 | May cause cancer. |
| H412 | Harmful to aquatic life with long lasting effects. |

NFPA health hazard


3 - Materials that, under emergency conditions, can cause serious or permanent injury.

NFPA fire hazard

1 - Materials that must be preheated before ignition can occur.

NFPA reactivity

0 - Material that in themselves are normally stable, even under fire conditions.



Hazard Rating

Health

3 Serious Hazard - Major injury likely unless prompt action is taken and medical treatment is given

Flammability

1 Slight Hazard - Materials that must be preheated before ignition will occur. Includes liquids, solids and semi solids having a flash point above 200 F. (Class IIIB)

Physical

0 Minimal Hazard - Materials that are normally stable, even under fire conditions, and will NOT react with water, polymerize, decompose, condense, or self-react. Non-Explosives.

Personal protection

B
B - Safety glasses, Gloves

Indication of changes:

| Section | Changed item | Change | Comments |
|---------|--|----------|----------|
| 2.1 | GHS-US classification | | |
| 3 | Composition/information on ingredients | Modified | |

SDS_US_Hilti

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Issue date: 05/13/2020

Revision date: 05/13/2020

Supersedes: 02/25/2019

Version: 2.3

SECTION 1: Identification

1.1. Identification

| | |
|--------------|------------------|
| Product form | Mixture |
| Product name | HIT-RE 500 V3, A |
| Product code | BU Anchor |

1.2. Relevant identified uses of the substance or mixture and uses advised against

| | |
|------------------------------|---|
| Use of the substance/mixture | Composite mortar component for fasteners in the construction industry |
|------------------------------|---|

1.3. Details of the supplier of the safety data sheet

Supplier

Hilti, Inc.
Legacy Tower, Suite 1000
7250 Dallas Parkway
TX 75024 Plano - USA
T +1 9724035800
1-800-879-8000 toll free - F +1 918 254 0522

Department issuing data specification sheet

Hilti Entwicklungsgesellschaft mbH
Hiltistraße 6
86916 Kaufering - Deutschland
T +49 8191 906876
anchor.hse@hilti.com

1.4. Emergency telephone number

| | |
|------------------|---|
| Emergency number | Chem-Trec Tel.: 1 800 424 9300 (USA, PR, Virgin Islands, Canada) Tel.: 703 527 3887 (Other countries) +1 918 8723000 1-800-879-8000 toll free |
|------------------|---|

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

| | |
|---------------|--|
| Skin Corr. 1C | H314 - Causes severe skin burns and eye damage. |
| Skin Sens. 1 | H317 - May cause an allergic skin reaction. |
| Muta. 2 | H341 - Suspected of causing genetic defects. |
| Repr. 1B | H360 - May damage fertility or the unborn child. |

Full text of H statements : see section 16

2.2. Label elements

GHS US labelling

Hazard pictograms (GHS US)



GHS05

GHS07

GHS08

Signal word (GHS US)

Danger

Hazard statements (GHS US)

H314 - Causes severe skin burns and eye damage.
H317 - May cause an allergic skin reaction.
H341 - Suspected of causing genetic defects.
H360 - May damage fertility or the unborn child.

Precautionary statements (GHS US)

P280 - Wear eye protection, protective clothing, protective gloves.
P262 - Do not get in eyes, on skin, or on clothing.
P305+P351+P338 - IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

P333+P313 - If skin irritation or rash occurs: Get medical advice/attention.
 P337+P313 - If eye irritation persists: Get medical advice/attention.
 P302+P352 - If on skin: Wash with plenty of water.

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

| Name | Product identifier | % | GHS-US classification |
|--|----------------------|---------|--|
| Quartz (SiO ₂) | | 25 - 40 | Carc. 1A, H350 |
| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane | (CAS-No.) 1675-54-3 | 25 - 40 | Skin Irrit. 2, H315 Eye Irrit. 2A, H319 Skin Sens. 1, H317 |
| Formaldehyde, oligomeric reaction products with 1-chloro-2,3-epoxypropane and phenol | (CAS-No.) 9003-36-5 | 10-20 | Skin Irrit. 2, H315 Eye Irrit. 2A, H319 Skin Sens. 1, H317 |
| butanedioldiglycidyl ether | (CAS-No.) 2425-79-8 | 5 - 10 | Acute Tox. 4 (Oral), H302 Acute Tox. 4 (Dermal), H312 Acute Tox. 4 (Inhalation), H332 Skin Irrit. 2, H315 Eye Dam. 1, H318 Skin Sens. 1, H317 |
| trimethylolpropane triglycidylether | (CAS-No.) 30499-70-8 | 5 - 10 | Skin Corr. 1C, H314 Eye Dam. 1, H318 Skin Sens. 1B, H317 Muta. 2, H341 Repr. 1B, H360 Aquatic Chronic 2, H411 |
| [3-(2,3-epoxypropoxy)propyl]trimethoxysilane | (CAS-No.) 2530-83-8 | 2.5 - 5 | Eye Dam. 1, H318 |

Full text of H-statements: see section 16

SECTION 4: First aid measures

4.1. Description of first aid measures

| | |
|---------------------------------------|---|
| First-aid measures general | Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible). |
| First-aid measures after inhalation | Remove person to fresh air and keep comfortable for breathing. Allow affected person to breathe fresh air. Allow the victim to rest. |
| First-aid measures after skin contact | Gently wash with plenty of soap and water. Wash contaminated clothing before reuse. If skin irritation occurs: Get immediate medical advice/attention. |
| First-aid measures after eye contact | Rinse immediately with plenty of water. Remove contact lenses, if present and easy to do. Continue rinsing. Obtain medical attention if pain, blinking or redness persists. |
| First-aid measures after ingestion | Rinse mouth. Get medical advice/attention. Do not induce vomiting. Obtain emergency medical attention. |

4.2. Most important symptoms and effects (acute and delayed)

| | |
|---|--------------------------------------|
| Potential adverse human health effects and symptoms | No additional information available. |
| Symptoms/effects after inhalation | May cause an allergic skin reaction. |
| Symptoms/effects after skin contact | Causes skin irritation. |
| Symptoms/effects after eye contact | Causes serious eye irritation. |

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

4.3. Immediate medical attention and special treatment, if necessary

SECTION 5: Firefighting measures

5.1. Extinguishing media

| | |
|--------------------------------|--|
| Suitable extinguishing media | Water spray. Carbon dioxide. Dry powder. Foam. Sand. |
| Unsuitable extinguishing media | Do not use a heavy water stream. |

5.2. Special hazards arising from the substance or mixture

No additional information available

5.3. Advice for firefighters

| | |
|--------------------------------|---|
| Firefighting instructions | Use water spray or fog for cooling exposed containers. Exercise caution when fighting any chemical fire. Prevent fire fighting water from entering the environment. |
| Protection during firefighting | Self-contained breathing apparatus. Do not enter fire area without proper protective equipment, including respiratory protection. |

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

| | |
|---|---|
| General measures | Spilled material may present a slipping hazard. |
| 6.1.1. For non-emergency personnel | |
| Emergency procedures | Evacuate unnecessary personnel. |
| 6.1.2. For emergency responders | |
| Protective equipment | Use personal protective equipment as required. Equip cleanup crew with proper protection. |
| Emergency procedures | Ventilate area. |

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters. Avoid release to the environment. Full or only partially emptied cartridges must be disposed of as special waste in accordance with official regulations. After curing, the product can be disposed of with household waste.

6.3. Methods and material for containment and cleaning up

| | |
|-------------------------|--|
| For containment | Collect spillage. |
| Methods for cleaning up | This material and its container must be disposed of in a safe way, and as per local legislation. Mechanically recover the product. On land, sweep or shovel into suitable containers. Store away from other materials. |
| Other information | Dispose of materials or solid residues at an authorized site. |

6.4. Reference to other sections

For further information refer to section 8: "Exposure controls/personal protection". For further information refer to section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

| | |
|-------------------------------|---|
| Precautions for safe handling | Wear personal protective equipment. Avoid contact with skin and eyes. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work. |
|-------------------------------|---|

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Hygiene measures

Do not eat, drink or smoke when using this product. Always wash hands after handling the product. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before reuse.

7.2. Conditions for safe storage, including any incompatibilities

| | |
|---------------------------|--|
| Storage conditions | Protect from sunlight. |
| Incompatible products | Strong bases. Strong acids. |
| Incompatible materials | Sources of ignition. Direct sunlight. |
| Storage temperature | 41 - 77 °F |
| Heat and ignition sources | Keep away from heat and direct sunlight. |

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| HIT-RE 500 V3, A | | |
|--|--------------------------------|--|
| ACGIH | ACGIH TWA (mg/m ³) | 0.025 mg/m ³ (R - Respirable particulate matter) |
| ACGIH | Remark (ACGIH) | TLV® Basis: Pulm fibrosis; lung cancer. Notations: A2 (Suspected Human Carcinogen) |
| Quartz (SiO ₂) | | |
| ACGIH | ACGIH TWA (mg/m ³) | 0.025 mg/m ³ (Respirable fraction) |
| ACGIH | Remark (ACGIH) | TLV® Basis: Pulm fibrosis; lung cancer. Notations: A2 (Suspected Human Carcinogen) |
| OSHA | Remark (OSHA) | (3) See Table Z-3. |
| Formaldehyde, oligomeric reaction products with 1-chloro-2,3-epoxypropane and phenol (9003-36-5) | | |
| Not applicable | | |
| butanedioldiglycidyl ether (2425-79-8) | | |
| Not applicable | | |
| [3-(2,3-epoxypropoxy)propyl]trimethoxysilane (2530-83-8) | | |
| Not applicable | | |
| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane (1675-54-3) | | |
| Not applicable | | |
| trimethylolpropane triglycidylether (30499-70-8) | | |
| Not applicable | | |

Additional information

The product has a pasty consistency. Exposure limit values for respirable dusts are not relevant for this product.

8.2. Exposure controls

Appropriate engineering controls
Personal protective equipment

No specific measures identified.
Safety glasses. Gloves. Protective clothing. Avoid all unnecessary exposure.



Materials for protective clothing
Hand protection

Long sleeved protective clothing.
Wear protective gloves. The permeation time is not the maximum wearing time! Generally speaking, it must be reduced. Contact with either mixtures of substances or different substances may shorten the protective function's effective duration.

Eye protection

Wear security glasses which protect from splashes.

Skin and body protection

Wear suitable protective clothing.

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|---------------------------------|--|
| Environmental exposure controls | No specific measures are required provided the product is handled in accordance with the general rules of occupational hygiene and safety. |
| Consumer exposure controls | Avoid contact during pregnancy/while nursing. |
| Other information | Do not eat, drink or smoke during use. |

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|------------------------|
| Physical state | Solid |
| Appearance | Thixotropic paste. |
| Colour | Light grey |
| Odour | characteristic |
| Odour threshold | No data available |
| pH | 6.6 |
| Melting point | No data available |
| Freezing point | No data available |
| Boiling point | No data available |
| Flash point | No data available |
| Relative evaporation rate (butylacetate=1) | No data available |
| Flammability (solid, gas) | No data available |
| Explosive limits | No data available |
| Explosive properties | No data available |
| Oxidising properties | No data available |
| Vapour pressure | No data available |
| Relative density | No data available |
| Relative vapour density at 20 °C | No data available |
| Density | 1.45 g/cm ³ |
| Solubility | insoluble in water. |
| Log Pow | No data available |
| Auto-ignition temperature | No data available |
| Decomposition temperature | No data available |
| Viscosity | No data available |
| Viscosity, kinematic | No data available |
| Viscosity, dynamic | 45 - 59 Pa·s 23 °C |

9.2. Other information

No additional information available

SECTION 10: Stability and reactivity

10.1. Reactivity

No additional information available

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

No additional information available.

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

10.4. Conditions to avoid

Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids. Strong bases.

10.6. Hazardous decomposition products

Under normal conditions of storage and use, hazardous decomposition products should not be produced. Thermal decomposition generates : fume. Carbon monoxide. Carbon dioxide.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity Not classified

| Formaldehyde, oligomeric reaction products with 1-chloro-2,3-epoxypropane and phenol (9003-36-5) | |
|---|---|
| LD50 oral rat | > 5000 mg/kg bodyweight (Rat; ECHA) |
| LD50 dermal rat | > 2000 mg/kg bodyweight (Rat; ECHA) |
| butanedioldiglycidyl ether (2425-79-8) | |
| LD50 oral rat | 2980 mg/kg (Rat) |
| LD50 dermal rabbit | 1130 mg/kg (Rabbit) |
| ATE US (oral) | 1163 mg/kg bodyweight |
| ATE US (dermal) | 1130 mg/kg bodyweight |
| ATE US (gases) | 4500 ppmv/4h |
| ATE US (vapours) | 11 mg/l/4h |
| ATE US (dust,mist) | 1.5 mg/l/4h |
| [3-(2,3-epoxypropoxy)propyl]trimethoxysilane (2530-83-8) | |
| LD50 oral rat | 8025 mg/kg bodyweight (Rat; Equivalent or similar to OECD 401; Experimental value) |
| LD50 dermal rabbit | 4250 mg/kg bodyweight (Rabbit; Experimental value; Equivalent or similar to OECD 402) |
| ATE US (oral) | 8025 mg/kg bodyweight |
| ATE US (dermal) | 4250 mg/kg bodyweight |
| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane (1675-54-3) | |
| LD50 dermal rat | > 2000 mg/kg (Rat; Experimental value; OECD 402: Acute Dermal Toxicity) |

| | |
|-----------------------------------|---|
| Skin corrosion/irritation | Causes severe skin burns and eye damage. pH: 6.6 |
| Serious eye damage/irritation | Serious eye damage, category 1, implicit pH: 6.6 |
| Respiratory or skin sensitisation | May cause an allergic skin reaction. |
| Germ cell mutagenicity | Suspected of causing genetic defects. |
| Carcinogenicity | Not classified |

| Quartz (SiO2) | |
|----------------------|----------------------------|
| IARC group | 1 - Carcinogenic to humans |

| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane (1675-54-3) | |
|--|----------------------|
| IARC group | 3 - Not classifiable |

| | |
|------------------------|---|
| Reproductive toxicity | May damage fertility or the unborn child. |
| STOT-single exposure | Not classified |
| STOT-repeated exposure | Not classified |

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|---|--------------------------------------|
| Aspiration hazard | Not classified |
| Potential adverse human health effects and symptoms | No additional information available. |
| Symptoms/effects after inhalation | May cause an allergic skin reaction. |
| Symptoms/effects after skin contact | Causes skin irritation. |
| Symptoms/effects after eye contact | Causes serious eye irritation. |

SECTION 12: Ecological information

12.1. Toxicity

Ecology - water Toxic to aquatic life with long lasting effects.

| butanedioldiglycidyl ether (2425-79-8) | |
|---|-----------------------------|
| LC50 fish 1 | 24 mg/l (96 h; Pisces) ECHA |
| LC50 other aquatic organisms 1 | > 160 mg/l |
| NOEC (acute) | 40 mg/l |
| Threshold limit algae 1 | 88930 mg/l (96 h; Algae) |

| [3-(2,3-epoxypropoxy)propyl]trimethoxysilane (2530-83-8) | |
|---|--|
| LC50 fish 1 | 55 mg/l (96 h; Cyprinus carpio; Young) |
| EC50 Daphnia 1 | 473 - 710 mg/l (48 h; Daphnia magna) |
| LC50 fish 2 | 237 mg/l 96 h; Salmo gairdneri (Oncorhynchus mykiss) |
| Threshold limit algae 1 | 119 mg/l (7 days; Anabaena flosaquae) |
| Threshold limit algae 2 | 250 mg/l (72 h; Selenastrum capricornutum) |

| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane (1675-54-3) | |
|--|---|
| LC50 fish 1 | 2.3 mg/l (OECD 203: Fish, Acute Toxicity Test, 96 h, Oncorhynchus mykiss, Semi-static system, Fresh water, Experimental value, Nominal concentration) |
| EC50 Daphnia 1 | 2 mg/l (OECD 202: Daphnia sp. Acute Immobilisation Test, 48 h, Daphnia magna, Static system, Fresh water, Experimental value) |
| LC50 fish 2 | 2.3 mg/l (96 h; Oncorhynchus mykiss; Nominal concentration) |
| Threshold limit algae 1 | > 11 mg/l (72 h; Scenedesmus sp.) |
| Threshold limit algae 2 | 4.2 mg/l (72 h; Scenedesmus sp.) |

12.2. Persistence and degradability

| HIT-RE 500 V3, A | |
|-------------------------------|---|
| Persistence and degradability | May cause long-term adverse effects in the environment. |

| Quartz (SiO₂) | |
|---------------------------------|-----------------------------------|
| Persistence and degradability | Biodegradability: not applicable. |
| Chemical oxygen demand (COD) | Not applicable (inorganic) |
| ThOD | Not applicable (inorganic) |

| butanedioldiglycidyl ether (2425-79-8) | |
|---|---------------------------------------|
| Biochemical oxygen demand (BOD) | 0.01982 g O ₂ /g substance |

| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane (1675-54-3) | |
|--|-------------------------------------|
| Persistence and degradability | Not readily biodegradable in water. |

12.3. Bioaccumulative potential

| HIT-RE 500 V3, A | |
|---------------------------|------------------|
| Bioaccumulative potential | Not established. |

| Quartz (SiO₂) | |
|---------------------------------|------------------------------------|
| Bioaccumulative potential | No bioaccumulation data available. |

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|--|--|
| butanedioldiglycidyl ether (2425-79-8) | |
| Log Pow | -0.15 |
| [3-(2,3-epoxypropoxy)propyl]trimethoxysilane (2530-83-8) | |
| Log Pow | -0.92 (Estimated value) |
| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane (1675-54-3) | |
| BCF other aquatic organisms 1 | 31 (Estimated value, Fresh weight) |
| Log Pow | 3 (Estimated value, 25 °C) |
| Bioaccumulative potential | Low potential for bioaccumulation (BCF < 500). |

12.4. Mobility in soil

| | |
|--|---|
| Quartz (SiO₂) | |
| Ecology - soil | Low potential for mobility in soil. |
| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane (1675-54-3) | |
| Surface tension | 59 mN/m (20 °C, 0.09 g/l) |
| Log Koc | 2.65 (log Koc, SRC PCKOCWIN v2.0, QSAR) |
| Ecology - soil | Low potential for adsorption in soil. |

12.5. Other adverse effects

Other information Avoid release to the environment.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

| | |
|--|--|
| Regional legislation (waste) | Disposal must be done according to official regulations. |
| Product/Packaging disposal recommendations | After curing, the product can be disposed of with household waste. . Full or only partially emptied cartridges must be disposed of as special waste in accordance with official regulations. Packaging contaminated by the product : Dispose in a safe manner in accordance with local/national regulations. |
| Ecology - waste materials | Avoid release to the environment. |

SECTION 14: Transport information

In accordance with ADR / RID / IMDG / IATA / ADN

| ADR | IMDG | IATA | RID |
|---|---|--|--|
| 14.1. UN number | | | |
| 1759 | 1759 | 1759 | 1759 |
| 14.2. UN proper shipping name | | | |
| CORROSIVE SOLID, N.O.S. (trimethylolpropane triglycidylether) | CORROSIVE SOLID, N.O.S. (trimethylolpropane triglycidylether) | Corrosive solid, n.o.s. (trimethylolpropane triglycidylether) | CORROSIVE SOLID, N.O.S. (trimethylolpropane triglycidylether) |
| Transport document description | | | |
| UN 1759 CORROSIVE SOLID, N.O.S. (trimethylolpropane triglycidylether), 8, III, (E), ENVIRONMENTALLY HAZARDOUS | UN 1759 CORROSIVE SOLID, N.O.S. (trimethylolpropane triglycidylether), 8, III, MARINE POLLUTANT/ENVIRONMENTALLY HAZARDOUS | UN 1759 Corrosive solid, n.o.s. (trimethylolpropane triglycidylether), 8, III, ENVIRONMENTALLY HAZARDOUS | UN 1759 CORROSIVE SOLID, N.O.S. (trimethylolpropane triglycidylether), 8, III, ENVIRONMENTALLY HAZARDOUS |

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| ADR | IMDG | IATA | RID |
|---|--|--|--|
| 14.3. Transport hazard class(es) | | | |
| 8 | 8 | 8 | 8 |
| | | | |
| 14.4. Packing group | | | |
| III | III | III | III |
| 14.5. Environmental hazards | | | |
| Dangerous for the environment : Yes | Dangerous for the environment : Yes Marine pollutant : Yes | Dangerous for the environment : Yes | Dangerous for the environment : Yes |
| No supplementary information available | | | |

14.6. Special precautions for user

- Overland transport

| | |
|--------------------------------|-------------------------|
| Classification code (ADR) | C10 |
| Special provisions (ADR) | 274 |
| Limited quantities (ADR) | 5kg |
| Packing instructions (ADR) | P002, IBC08, LP02, R001 |
| Mixed packing provisions (ADR) | MP10 |
| Transport category (ADR) | 3 |
| Orange plates | |

Tunnel restriction code (ADR)

E

- Transport by sea

| | |
|-----------------------------|------------|
| Special provisions (IMDG) | 223, 274 |
| Packing instructions (IMDG) | P002, LP02 |
| EmS-No. (Fire) | F-A |
| EmS-No. (Spillage) | S-B |
| Stowage category (IMDG) | A |

- Air transport

| | |
|---------------------------------|----------|
| PCA packing instructions (IATA) | 860 |
| PCA max net quantity (IATA) | 25kg |
| CAO packing instructions (IATA) | 864 |
| Special provisions (IATA) | A3, A803 |

- Rail transport

| | |
|----------------------------|-------------------------|
| Special provisions (RID) | 274 |
| Packing instructions (RID) | P002, IBC08, LP02, R001 |
| Carriage prohibited (RID) | No |

14.7. Transport in bulk according to Annex II of MARPOL and the IBC Code

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory

| Formaldehyde, oligomeric reaction products with 1-chloro-2,3-epoxypropane and phenol (9003-36-5) | |
|--|---|
| EPA TSCA Regulatory Flag | XU - XU - indicates a substance exempt from reporting under the Chemical Data Reporting Rule, (40 CFR 711). |
| butanedioldiglycidyl ether (2425-79-8) | |
| EPA TSCA Regulatory Flag | TP - TP - indicates a substance that is the subject of a proposed TSCA section 4 test rule. |
| trimethylolpropane triglycidylether (30499-70-8) | |
| EPA TSCA Regulatory Flag | XU - XU - indicates a substance exempt from reporting under the Chemical Data Reporting Rule, (40 CFR 711). |

15.2. International regulations

CANADA

| Quartz (SiO ₂) |
|--|
| Listed on the Canadian DSL (Domestic Substances List) |
| Formaldehyde, oligomeric reaction products with 1-chloro-2,3-epoxypropane and phenol (9003-36-5) |
| Listed on the Canadian DSL (Domestic Substances List) |
| butanedioldiglycidyl ether (2425-79-8) |
| Listed on the Canadian DSL (Domestic Substances List) |
| [3-(2,3-epoxypropoxy)propyl]trimethoxysilane (2530-83-8) |
| Listed on the Canadian DSL (Domestic Substances List) |
| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane (1675-54-3) |
| Listed on the Canadian DSL (Domestic Substances List) |

EU-Regulations

No additional information available

National regulations

| Quartz (SiO ₂) |
|--|
| Listed on IARC (International Agency for Research on Cancer) |

15.3. US State regulations

California Proposition 65 - This product does not contain any substances known to the state of California to cause cancer, developmental and/or reproductive harm

| Component | State or local regulations |
|--|----------------------------|
| Formaldehyde, oligomeric reaction products with 1-chloro-2,3-epoxypropane and phenol (9003-36-5) | |
| butanedioldiglycidyl ether (2425-79-8) | |

HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| Component | State or local regulations |
|--|----------------------------|
| 2,2'-[(1-methylethylidene)bis(4,1-phenyleneoxymethylene)]bisoxirane(1675-54-3) | |
| trimethylolpropane triglycidylether(30499-70-8) | |
| [3-(2,3-epoxypropoxy)propyl]trimethoxysilane(2530-83-8) | |
| Quartz (SiO2)(l) | |

SECTION 16: Other information

| | |
|----------------------------|--|
| Revision date | 05/13/2020 |
| Abbreviations and acronyms | European Agreement concerning the International Carriage of Dangerous Goods by Inland Waterways. European Agreement concerning the International Carriage of Dangerous Goods by Road. Acute Toxicity Estimate. Bioconcentration factor. Classification Labelling Packaging Regulation; Regulation (EC) No 1272/2008. Derived Minimal Effect level. Derived-No Effect Level. International Air Transport Association. Median effective concentration. International Maritime Dangerous Goods. Median lethal concentration. Median lethal dose. Lowest Observed Adverse Effect Level. No-Observed Adverse Effect Concentration. No-Observed Adverse Effect Level. No-Observed Effect Concentration. Persistent Bioaccumulative Toxic. Predicted No-Effect Concentration. Registration, Evaluation, Authorisation and Restriction of Chemicals Regulation (EC) No 1907/2006. Regulations concerning the International Carriage of Dangerous Goods by Rail. Safety Data Sheet. Very Persistent and Very Bioaccumulative. |
| Other information | None. |

Full text of H-statements:

| | |
|------|--|
| H302 | Harmful if swallowed. |
| H312 | Harmful in contact with skin. |
| H314 | Causes severe skin burns and eye damage. |
| H315 | Causes skin irritation. |
| H317 | May cause an allergic skin reaction. |
| H318 | Causes serious eye damage. |
| H319 | Causes serious eye irritation. |
| H332 | Harmful if inhaled. |
| H341 | Suspected of causing genetic defects. |
| H350 | May cause cancer. |
| H360 | May damage fertility or the unborn child. |
| H411 | Toxic to aquatic life with long lasting effects. |

NFPA health hazard


3 - Materials that, under emergency conditions, can cause serious or permanent injury.

NFPA fire hazard

1 - Materials that must be preheated before ignition can occur.

NFPA reactivity

0 - Material that in themselves are normally stable, even under fire conditions.





HIT-RE 500 V3, A

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Hazard Rating

Health 3 Serious Hazard - Major injury likely unless prompt action is taken and medical treatment is given

Flammability 1 Slight Hazard - Materials that must be preheated before ignition will occur. Includes liquids, solids and semi solids having a flash point above 200 F. (Class IIIB)

Physical 1 Slight Hazard - Materials that are normally stable but can become unstable (self-react) at high temperatures and pressures. Materials may react non-violently with water or undergo hazardous polymerization in the absence of inhibitors.

Personal protection
B
B - Safety glasses, Gloves

Indication of changes:

| Section | Changed item | Change | Comments |
|---------|----------------------------|----------|----------|
| 9 | pH | Added | |
| 14 | Transportation information | Modified | |
| 16 | Additional information | Added | |

SDS_US_Hilti

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

Safety Data Sheet



1. Identification

Product Name: PVTLBL SSPR 6PK QUICKC GLOSS WHITE **Revision Date:** 2/22/2018

Product Identifier: J2850830 **Supersedes Date:** 10/30/2015

Product Use/Class: Primer/Aerosol

Supplier: Rust-Oleum Corporation
11 Hawthorn Parkway
Vernon Hills, IL 60061
USA **Manufacturer:** Rust-Oleum Corporation
11 Hawthorn Parkway
Vernon Hills, IL 60061
USA

Preparer: Regulatory Department

Emergency Telephone: 24 Hour Hotline: 847-367-7700

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

34% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|---|
| Carcinogenicity, category 2 | H351 | Suspected of causing cancer. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Eye Irritation, category 2 | H319 | Causes serious eye irritation. |
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |

GHS LABEL PRECAUTIONARY STATEMENTS

P201 Obtain special instructions before use.

| | |
|----------------|--|
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P261 | Avoid breathing dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|-------------------------------|----------------|-----------------------|--------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| n-Butane | 106-97-8 | 10-25 | GHS04 | H280 |
| Hydrotreated Light Distillate | 64742-47-8 | 2.5-10 | GHS08 | H304 |
| Titanium Dioxide | 13463-67-7 | 2.5-10 | Not Available | Not Available |

| | | | | |
|--|------------|---------|-------------------|--------------------------|
| n-Butyl Acetate | 123-86-4 | 2.5-10 | GHS02-GHS07 | H226-336 |
| Naphtha, Petroleum, Hydrotreated Light | 64742-49-0 | 2.5-10 | GHS08 | H304 |
| Solvent Naphtha, Light Aromatic | 64742-95-6 | 2.5-10 | GHS07-GHS08 | H304-332 |
| 1,2,4-Trimethylbenzene | 95-63-6 | 1.0-2.5 | GHS02-GHS07-GHS08 | H226-304-315-319-332-335 |
| Naphtha (petroleum), heavy aromatic | 64742-94-5 | 0.1-1.0 | GHS07-GHS08 | H304-312 |
| Ethylbenzene | 100-41-4 | 0.1-1.0 | GHS02-GHS07-GHS08 | H225-304-332-351-373 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only in a well-ventilated area. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Keep away from heat, sparks, flame and sources of ignition. Contents under pressure. Do not expose to heat or store above 120 ° F. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL- TWA | OSHA PEL- CEILING |
|---|------------|-----------------------|-------------------|--------------------|------------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 25.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butane | 106-97-8 | 15.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Hydrotreated Light Distillate | 64742-47-8 | 10.0 | N.E. | N.E. | N.E. | N.E. |
| Titanium Dioxide | 13463-67-7 | 10.0 | 10 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| n-Butyl Acetate | 123-86-4 | 10.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| Naphtha, Petroleum, Hydrotreated Light | 64742-49-0 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Solvent Naphtha, Light Aromatic | 64742-95-6 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Naphtha (petroleum), heavy aromatic | 64742-94-5 | 1.0 | N.E. | N.E. | N.E. | N.E. |
| Ethylbenzene | 100-41-4 | 1.0 | 20 ppm | N.E. | 100 ppm | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Use impervious gloves to prevent skin contact and absorption of this material through the skin. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications. Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Relative Density: | 0.724 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n- octanol/water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 0.9 - 13.0 |
| Boiling Range, °C: | -37 - 204 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalis.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: Substance may cause slight skin irritation. May cause skin irritation. Allergic reactions are possible. Prolonged or repeated contact may cause skin irritation.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed. Aspiration hazard if swallowed; can enter lungs and cause damage.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010)

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|--|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 64742-47-8 | Hydrotreated Light Distillate | >5000 mg/kg Rat | >2000 mg/kg Rabbit | >5000 mg/L Rat |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 64742-49-0 | Naphtha, Petroleum, Hydrotreated Light | >5000 mg/kg Rat | >3160 mg/kg Rabbit | >4951 mg/L Rat |
| 64742-95-6 | Solvent Naphtha, Light Aromatic | 8400 mg/kg Rat | >2000 mg/kg Rabbit | N.E. |
| 95-63-6 | 1,2,4-Trimethylbenzene | 3280 mg/kg Rat | >3160 mg/kg Rabbit | 18 mg/L Rat |
| 64742-94-5 | Naphtha (petroleum), heavy aromatic | >5000 mg/kg Rat | >1795 mg/kg Rabbit | 36 mg/L Rat |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. Dispose of material in accordance to local, state, and federal regulations and ordinances. Do not allow to enter waterways, wastewater, soil, storm drains or sewer systems. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|--------------------------------------|-----------------------------|-------------------|--------------------------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint Products in Limited Quantities | Aerosols | Aerosols | Paint Products in Limited Quantities |
| Hazard Class: | N.A. | 2.1 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

No Information

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------|----------------|
| 1,2,4-Trimethylbenzene | 95-63-6 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

16. Other Information**HMIS RATINGS**

Health: 2* Flammability: 4 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: 2 Flammability: 4 Instability: 0

VOLATILE ORGANIC COMPOUNDS, g/L: 540

SDS REVISION DATE: 2/22/2018

REASON FOR REVISION: Regulatory Formula Source Changed
Product Composition Changed
Substance and/or Product Properties Changed in Section(s):
02 - Hazard Identification
09 - Physical & Chemical Properties
15 - Regulatory Information
16 - Other Information
Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.



Liquid BR5512-LAB Heavy Duty Liquid Alkaline Cleaner

Revision: 2020-09-06

Version: 01.0

1. IDENTIFICATION

Product name: Liquid BR5512-LAB
Heavy Duty Liquid Alkaline Cleaner

Product Code: 02857154, 02857471, 57833330

SDS #: MS0801144

Recommended use:

- Professional cleaning/maintenance product for food & beverage industries
- This product is intended to be diluted prior to use

Uses advised against: Uses other than those identified are not recommended

Manufacturer, importer, supplier:

| | |
|--|---|
| US Headquarters Diversey, Inc. 1300 Altura Rd., Suite 125 Fort Mill, SC 29708 Phone: 1-888-352-2249 SDS Internet Address: https://sds.diversey.com | Canadian Headquarters Diversey Canada, Inc. 6150 Kennedy Road Unit 3 Mississauga, Ontario L5T 2J4 Phone: 1-800-668-7171 |
|--|---|

Emergency telephone number: 1-800-851-7145; 1-651-917-6133 (Int'l)

2. HAZARDS IDENTIFICATION

Classification for the undiluted product

| | |
|--|-------------|
| Acute oral toxicity | Category 4 |
| Skin corrosion/irritation | Category 1A |
| Serious eye damage/eye irritation | Category 1 |
| Specific target organ toxicity (repeated exposure) | Category 2 |
| Metal Corrosion: | Category 1 |



Signal word:

Danger.

Hazard Statements

CAUSES SEVERE SKIN BURNS AND SERIOUS EYE DAMAGE. HARMFUL IF SWALLOWED. MAY CAUSE DAMAGE TO ORGANS THROUGH PROLONGED OR REPEATED EXPOSURE. MAY BE CORROSIVE TO METALS.

Precautionary Statements

Causes burns/ serious damage to mouth, throat and stomach. Keep container tightly closed. Keep only in original container. Do not breathe spray. Avoid contact with eyes, skin and clothing. Wash affected areas thoroughly after handling. Do not eat, drink or smoke when using this product. Wear chemical-splash goggles, chemical-resistant gloves and protective footwear. IF SWALLOWED: Rinse mouth. DO NOT induce vomiting unless directed to do so by medical personnel. Drink a cupful of milk or water. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water for at least 15 minutes. Wash contaminated clothing before reuse. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing for at least 15 minutes. Immediately call a Poison Center (1-800-851-7145) or physician. Absorb spillage to prevent material damage. Store in corrosive-resistant container with a resistant inner liner. Dispose of in accordance with all federal, state and local applicable regulations.

SUPPLEMENTAL INFORMATION: Mix only with water. DO NOT MIX WITH ANY OTHER PRODUCT OR CHEMICAL. Can react to release hazardous gases. May vigorously react with acids resulting in spattering and excessive heat.

Health hazards not otherwise classified (HHNOC) - Not applicable
Physical hazards not otherwise classified (PHNOC) - Not applicable

Classification for the diluted product @ 4.8% w/w

Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2A



Signal word: Warning.

Hazard and Precautionary Statements

CAUSES SKIN AND SERIOUS EYE IRRITATION.

Avoid contact with eyes, skin and clothing. Wash affected areas thoroughly after handling. May cause irritation to mouth, throat and stomach. Wear chemical-splash goggles and chemical-resistant gloves. IF SWALLOWED: Rinse mouth. Drink a cupful of milk or water. IF ON SKIN: Wash with plenty of soap and water. If skin irritation occurs: Get medical advice or attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing for at least 15 minutes. Dispose of in accordance with all federal, state and local applicable regulations. SUPPLEMENTAL INFORMATION: Mix only with water. May vigorously react with acids resulting in spattering and excessive heat.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Classified Ingredients

4. FIRST AID MEASURES

Undiluted Product:

Eyes: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing for at least 15 minutes.

Skin: IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water for at least 15 minutes.

Inhalation: IF INHALED: Remove person to fresh air and keep comfortable for breathing.

Ingestion: IF SWALLOWED: Rinse mouth. DO NOT induce vomiting unless directed to do so by medical personnel. Drink a cupful of milk or water.

Most Important Symptoms/Effects: No information available.

Immediate medical attention and special treatment needed Not applicable.

Aggravated Medical Conditions: Individuals with chronic respiratory disorders such as asthma, chronic bronchitis, emphysema, etc., may be more susceptible to irritating effects.

Diluted Product:

Eyes: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing for at least 15 minutes.

Skin: IF ON SKIN: Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention

Inhalation: No specific first aid measures are required

Ingestion: IF SWALLOWED: Rinse mouth. Drink a cupful of milk or water.

5. FIRE-FIGHTING MEASURES

Specific methods: No special methods required

Suitable extinguishing media: The product is not flammable. Extinguish fire using agent suitable for surrounding fire.

Specific hazards: Corrosive material (See sections 8 and 10).

Special protective equipment for firefighters: As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

Extinguishing media which must not be used for safety reasons: No information available.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions: Put on appropriate personal protective equipment (see Section 8.).
Environmental precautions and clean-up methods: Clean-up methods - large spillage. Absorb spill with inert material (e.g. dry sand or earth), then place in a chemical waste container. Use a water rinse for final clean-up.

7. HANDLING AND STORAGE

Handling: Avoid contact with skin, eyes and clothing. Do not taste or swallow. Avoid breathing vapors or mists. Use only with adequate ventilation. Remove and wash contaminated clothing and footwear before re-use. Wash thoroughly after handling. Mix only with water. May react to release hazardous gases. May vigorously react with acids resulting in spattering and excessive heat. Product residue may remain on/in empty containers. All precautions for handling the product must be used in handling the empty container and residue.

Storage: Protect from freezing. Keep tightly closed in a dry, cool and well-ventilated place. KEEP OUT OF REACH OF CHILDREN.

Aerosol Level (if applicable): Not applicable.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure Guidelines:

Undiluted Product:

Engineering measures to reduce exposure:

Good general ventilation should be sufficient to control airborne levels. Respiratory protection is not required if good ventilation is maintained.

Personal Protective Equipment

Eye protection: Chemical-splash goggles.
Hand protection: Chemical-resistant gloves.
Skin and body protection: Protective footwear. If major exposure is possible, wear suitable protective clothing and footwear.
Respiratory protection: In case of insufficient ventilation wear suitable respiratory equipment. A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use.
Hygiene measures: Handle in accordance with good industrial hygiene and safety practice.

Diluted Product:

Engineering measures to reduce exposure:

Good general ventilation should be sufficient to control airborne levels.

Personal Protective Equipment

Eye protection: Chemical-splash goggles.
Hand protection: Chemical-resistant gloves.
Skin and body protection: No personal protective equipment required under normal use conditions.
Respiratory protection: No personal protective equipment required under normal use conditions.
Hygiene measures: Handle in accordance with good industrial hygiene and safety practice.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State: Liquid

Evaporation Rate: No information available

Odor threshold: No information available.

Melting point/range: Not determined

Autoignition temperature: No information available

Solubility in other solvents: No information available

Density: Specific gravity: 1.29 Kg/L

Bulk density: No information available

Flash point (°F): > 200 °F > 93.4 °C

Viscosity: No information available

VOC: 0 %

Flammability (Solid or Gas): Not applicable

Sustained combustion: Not applicable

Explosion limits: - upper: Not determined - **lower:** Not determined

Color: Clear, Colorless

Odor: No Odor/Odorless

Boiling point/range: Not determined

Decomposition temperature: Not determined Not applicable

Solubility: Completely Soluble

Relative Density (relative to water): 1.29

Vapor density: No information available

Vapor pressure: No information available.

Partition coefficient (n-octanol/water): No information available

Elemental Phosphorus: 0 % by wt.

pH: 14.5

Corrosion to metals: Metal corrosive

> 200 °F > 93.4 °C

VOC % by wt. at use dilution: 0

* - Title 17, California Code of Regulations, Division 3, Chapter 1, Subchapter 8.5, Article 2, Consumer Products, Sections 94508

10. STABILITY AND REACTIVITY

| | |
|--|---|
| Reactivity: | Not Applicable |
| Stability: | The product is stable |
| Possibility of hazardous reactions: | May vigorously react with acids resulting in spattering and excessive heat. |
| Hazardous decomposition products: | None reasonably foreseeable. |
| Materials to avoid: | Acids. Strong oxidising agents. Do not mix with any other product or chemical unless specified in the use directions. |
| Conditions to avoid: | No information available. |

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure:

Eye contact, Skin contact, Inhalation, Ingestion

Delayed, immediate, or chronic effects and symptoms from short and long-term exposure

Skin contact: Corrosive. Causes severe burns. Symptoms may include burns, blisters, redness and pain (which may be delayed).

Eye contact: Corrosive. Causes serious eye damage. Symptoms may include pain, burning sensation, redness, watering, blurred vision or loss of vision.

Ingestion: Causes burns/ serious damage to mouth, throat and stomach. Symptoms may include stomach pain and nausea. Harmful if swallowed. Symptoms may include vomiting, nausea, and/or feeling of general unwellness.

Inhalation: May cause irritation and corrosive effects to nose, throat and respiratory tract. Symptoms may include coughing and difficulty breathing.

Sensitization: No known effects.

Target Organs (SE): None known

Target Organs (RE): No information available

Carcinogen Listings: None of the components in this product at $\geq 0.1\%$ are listed as a carcinogen by IARC, NTP or OSHA.

Numerical measures of toxicity

ATE - Oral (mg/kg): 950

ATE - Inhalatory, mists (mg/l): >20

12. ECOLOGICAL INFORMATION

Ecotoxicity: No information available.

Persistence and Degradability: No information available.

Bioaccumulation: No information available.

13. DISPOSAL CONSIDERATIONS

Waste from residues / unused products (undiluted product): This product, as sold, if discarded or disposed, is a hazardous waste according to Federal regulations (40 CFR 261.4 (b)(4)). Under RCRA, it is the responsibility of the user of the product to determine, at the time of disposal, whether the waste solution meets RCRA criteria for hazardous waste. Dispose in compliance with all Federal, state, provincial, and local laws and regulations.

Waste from residues / unused products (diluted product): This product, when diluted as stated on this SDS, is a hazardous waste according to Federal regulations (40 CFR 261.4 (b)(4)). Under RCRA, it is the responsibility of the user of the product to determine, at the time of disposal, whether the waste solution meets RCRA criteria for hazardous waste. Dispose in compliance with all Federal, state, provincial, and local laws and regulations.

RCRA Hazard Class (undiluted product): D002 Corrosive Waste

RCRA Hazard Class (diluted product): D002 Corrosive Waste

Contaminated Packaging: Do not re-use empty containers.

14. TRANSPORT INFORMATION

DOT (Ground) Bill of Lading Description: UN3266, CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S., (potassium hydroxide, sodium hydroxide), 8, II

IMDG (Ocean) Bill of Lading Description: UN3266, CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S., (potassium hydroxide, sodium hydroxide), 8, II

15. REGULATORY INFORMATION

International Inventories at CAS# Level

CERCLA/ SARA

| Ingredient(s) | CAS # | Weight % | CERCLA/SARA RQ (lbs) | Section 302 TPQ (lbs) | Section 313 |
|---------------------|-----------|------------|----------------------|-----------------------|-------------|
| Potassium hydroxide | 1310-58-3 | 10 - 30% | 1000 | | |
| Sodium hydroxide | 1310-73-2 | 0.5 - 1.5% | 1000 | | |

16. OTHER INFORMATION

NFPA (National Fire Protection Association)

Rating Scale: (Low Hazard) 0 - 4 (Extreme Hazard)

Health 3

Flammability 0

Instability 0

Special Hazards -

Diluted Product:

Revision: 2020-09-06

Version: 01.0

Reason for revision:

Not applicable

Prepared by:

North American Regulatory Affairs

Additional advice:

• Does not contain an added fragrance

Notice to Reader: This document has been prepared using data from sources considered technically reliable. It does not constitute a warranty, express or implied, as to the accuracy of the information contained within. Actual conditions of use and handling are beyond seller's control. User is responsible to evaluate all available information when using product for any particular use and to comply with all Federal, State, Provincial and Local laws and regulations.

SAFETY DATA SHEET

Section 1. IDENTIFICATION

Product Identifier

Product Name GASOILA® HARD SET.

Other means of Identification

Product Code BT04, BT08, BT16, FT32, FT28.

Recommended Use Pipe Thread Sealant.

Recommended Restrictions None Known.

Manufacturer

Company Name Federal Process Corporation
Address 4520 Richmond Road
Cleveland OH 44128
Telephone 1-800-846-7325

Emergency Telephone Number: Call Chemtrec at 1-800-424-9300

Section 2. HAZARDS IDENTIFICATION

PHYSICAL STATE: Liquid

Classification:

| | |
|-----------------------------------|------------|
| Flammable | Category 3 |
| Serious eye damage/eye irritation | Category 2 |
| Skin sensitization | Category 1 |

Signal Word:

Warning



Hazard Statements:

H226 - Flammable liquid and vapor.
H301 - Toxic if swallowed.
H370 - Causes damage to organs
H319 - Causes serious eye irritation.

Revised: 23rd March, 2018
Page 1 of 8

Precautionary Statements:

GASOILA®HARD SET

Prevention: P210 – Keep away heat, sparks, open flames, and hot surfaces. No smoking.
P261 – Avoid breathing dust/fume/gas/mist/vapors/spray.
P264 – Wash skin thoroughly after using.
P270 – Do not eat, drink or smoke when using this product.
P272 – Contaminated clothing should not be allowed out of the workplace.

Response: P305 + P351 + P338 – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P301 + P310 + P330 – IF SWALLOWED: Immediately call POISON CENTER or doctor/physician. Rinse mouth.
P337 + P313 – If eye irritation persists: Get medical advice/attention.
P332 + P313 – If skin irritation or rash occurs: Get medical advice/attention.

Disposal: P 501 - Dispose of contents/container to an approved waste disposal plant.

Other Hazards: Toxic to aquatic life with long lasting effects.

Unknown Acute Toxicity: 2% of the mixture consists of ingredient(s) of unknown toxicity.

Section 3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS Number | Weight % |
|----------------|------------|-------------|
| Methyl alcohol | 67-56-1 | 25.0 – 35.0 |
| Resin | 9000-59-3 | 22.0 – 30.0 |

Section 4. FIRST AID MEASURES

First Aid Measures:

Eye Contact Rinse thoroughly with plenty of water, for 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical advice/attention.

Skin Contact If skin irritation occurs, rinse affected area with water. If skin irritation or rash occurs: Get medical advice/attention.

Revised: 23rd March, 2018
Page 2 of 8

| | |
|------------|--|
| Inhalation | Remove to fresh air. If signs/symptoms continue, get medical attention. Give oxygen or artificial respiration as needed. |
| Ingestion | Do NOT induce vomiting Get medical attention immediately. Rinse mouth with water. Never give anything by mouth to an unconscious individual. |

Most Important Symptoms and effects:

| | |
|----------|--|
| Symptoms | Direct contact with eyes may cause temporary irritation. Do NOT ingest. |
|----------|--|

Section 5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media: Use foam, dry chemical, carbon dioxide or water fog.

Unsuitable Extinguishing Media: Not determined.

Specific Hazards Arising from the Chemical:

Carbon oxides expected to be the primary hazardous combustion product.

Protective Equipment and Precautions for Firefighters:

As in any fire, wear self-contained breathing apparatus and other protective clothing. (approved or equivalent) and full protective gear.

Section 6. ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures:

Personal Precautions: Use personal protective equipment as required. Keep unnecessary personnel away.

Methods and Material for Containment and Cleaning Up:

Methods for Containment: Prevent further leakage or spillage if safe to do so.

Methods for Clean-Up: Keep in suitable, closed containers for disposal.

Section 7. HANDLING AND STORAGE

Precautions for Safe Handling:

Advice on Safe Handling: Avoid breathing vapors or mists. Contaminated work-clothing should not be allowed out of the workplace.

Conditions for Safe Storage, including Any Incompatibilities:

Storage Conditions: Keep containers tightly closed in a dry, cool and well-ventilated place. Do not store near heat, sparks, or open flames. KEEP OUT OF REACH OF CHILDREN.

Incompatible Materials: None known based on information supplied.

Section 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines:

| Chemical Name | ACGIH TWA | ACGIH STEL | OSHA TWA |
|---------------------------------|-----------|------------|----------------------------------|
| Methyl alcohol (CAS 67-56-1) | 200 ppm | 250 ppm | 200 ppm 260 mg/m ³ |
| Resin (CAS 9000-59-3) | N/A | N/A | N/A |

Appropriate Engineering Controls:

Engineering Controls: Apply technical measures to comply with the occupational exposure limits.

Individual Protection Measures, such as Personal Protective Equipment:

Eye/Face Protection: Avoid contact with eyes.

Skin and Body Protection: No protective equipment is needed under normal use conditions.

Respiratory Protection: Ensure adequate ventilation, especially in confined areas. If confined in poorly ventilated areas use NIOSH/MSHA

General Hygiene Considerations: Handle in accordance with good industrial hygiene and safety practice. Wash exposed areas thoroughly before eating, drinking, smoking or leaving work area. Launder contaminated clothing before reusing.

Section 9. PHYSICAL AND CHEMICAL PROPERTIES

Information on Basic Physical and Chemical Properties

| | | | |
|-----------------|-----------------|-----------------|----------------|
| Physical State: | Liquid. | Odor: | Mild. |
| Appearance: | Viscous liquid. | Odor Threshold: | Not available. |
| Color: | Red paste. | | |

| <u>Property</u> | <u>Values</u> |
|------------------------------|-----------------|
| pH | N/A |
| Melting Point/Freezing Point | Not determined. |
| Boiling Point/Boiling Range | Not determined. |

GASOILA®HARD SET

| | |
|--|-----------------------|
| Flash Point | 88F (31C) Closed Cup. |
| Evaporation Rate | Not determined. |
| Flammability (Solid, Gas) | n/a-liquid |
| Upper Flammability Limit | Not determined. |
| Lower Flammability Limit | Not determined. |
| Vapor Pressure | Not determined. |
| Vapor Density | Not determined. |
| Specific Gravity | 1.105 |
| Water Solubility | Slight. |
| Solubility in other Solvents | Not determined. |
| Partition Coefficient (n-octanol/water) | Not determined. |
| Auto-ignition Temperature | Not determined. |
| Decomposition Temperature | Not determined. |
| Kinematic Viscosity | Not determined. |
| Explosive Properties | Not determined. |
| Oxidizing Properties | Not determined. |

Section 10. STABILITY AND REACTIVITY

| | |
|--|--|
| <u>Reactivity:</u> | Not reactive under normal conditions. |
| <u>Chemical Stability:</u> | Stable under recommended storage conditions. |
| <u>Possibility of Hazardous Reactions:</u> | None under normal processing. |
| <u>Conditions to Avoid:</u> | Keep out of reach of children. |
| <u>Incompatible Materials:</u> | None known. |
| <u>Hazardous Decomposition Products:</u> | Oxides of carbon. |

Section 11. TOXICOLOGICAL INFORMATION

Revised: 23rd March, 2018
Page 5 of 8

Information on Likely Routes of Exposure:

Eye Contact: Causes serious eye irritation.
Skin Contact: May cause an allergic skin reaction.

GASOILA@HARD SET

Inhalation: Avoid breathing vapors or mists.

Ingestion: Do not taste or swallow.

Component Information:

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|-----------------------------|--|--------------------------|---------------------|
| Methyl alcohol (67-56-1) | 2,769 mg/kg (Rat) 3,600 mg/kg (Mouse) | 17,100 mg/kg (Rabbit) | 128.2 mg/L (Rat) |
| Resin (9000-59-3) | N/D | N/D | N/D |

Information on physical, chemical and toxicological effects:

Symptoms: Please section 4 of this SDS for symptoms.

Delayed and Immediate Effects as Well as Chronic Effects From Short and Long Term Exposure:

Sensitization: May cause an allergic skin reaction.

Carcinogenicity: Not classifiable as a human carcinogen.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|------------------------------|-------|------|-----|------|
| Methyl/ alcohol (67-56-1) | NO | NO | NO | NO |
| Resin (9000-59-3) | NO | NO | NO | NO |

Legend

IARC (International Agency for Research on Cancer).

Group3 IARC components are "not classifiable as human carcinogens".

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

Numerical Measures of Toxicity:

Not Determined.

Section 12. ECOLOGICAL INFORMATION

Ecotoxicity:

Toxic to aquatic life with lasting effects.

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to Microorganisms | Crustacea |
|-----------------------------|--|--|----------------------------|-----------|
| Methyl alcohol (67-56-1) | EC50/96 hours Scenedesmus subspicatus 22,000 mg/L | LC50/96 hours Blue gill; 15,4000 mg/l | N/D | N/D |
| Resin (9000-59-3) | N/D | N/D | N/D | N/D |

Persistence/Degradability: Not determined.

Bioaccumulation: Not determined.

Mobility: Not determined.

Other Adverse Effects: Not determined.

Section 13. DISPOSAL CONSIDERATIONS

Waste Treatment Method:

Disposal of Wastes: Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated Packaging: Disposal should be in accordance with applicable regional, national and local laws and regulations.

Section 14. TRANSPORT INFORMATION

DOT: Consumer Commodity ORM-D.

PROPER SHIPPING NAME: Consumer Commodity ORM-D.

IATA: ID8000 Consumer Commodity

IMDG: FLAMMABLE LIQUID N.O.S. (contains Methanol)
IDENTIFICATION NUMBER: UN1993, III

Section 15. REGULATORY INFORMATION

| | |
|---------------------------------------|-----------------|
| <u>International Inventories:</u> | Not determined. |
| <u>U.S. Federal Regulations:</u> | Not determined. |
| <u>SARA Title 313:</u> | Not determined. |
| <u>U.S. State Regulations:</u> | |
| <u>U.S Right-to-Know Regulations:</u> | Not determined. |

Section 16. OTHER INFORMATION

| | | | | |
|-------|---------------------|-------------------|------------------|-----------------------------------|
| NFPA: | Health Hazards 2 | Flammability 2 | Instability 0 | Special Hazards Not determined |
| HMS | Health Hazards 2 | Flammability 2 | Instability 0 | Special Hazards Not determined |

Issue Date: 1st March 2014

Revision Date: 23rd March 2018

DISCLAIMER:

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet



GHS SAFETY DATA SHEET

WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: OCT 2013

Supersedes: DEC 2011

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe**PRODUCT USE:** Low VOC Solvent Cement for CPVC Plastic Pipe**SUPPLIER:****MANUFACTURER:**IPS Corporation
17109 South Main Street, Gardena, CA 90248-3127
P.O. Box 379, Gardena, CA 90247-0379
Tel. 1-310-898-3300**EMERGENCY:** Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)**Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|-----------------------------|------------------------------|-----------------------------|
| Acute Toxicity: Category 4 | Acute Toxicity: None Known | Flammable Liquid Category 2 |
| Skin Irritation: Category 3 | Chronic Toxicity: None Known | |
| Skin Sensitization: NO | | |
| Eye: Category 2B | | |

GHS LABEL:

OR

**Signal Word:**
Danger**WHMIS CLASSIFICATION:** CLASS B, DIVISION 2

Hazard Statements

H225: Highly flammable liquid and vapor
H319: Causes serious eye irritation
H332: Harmful if inhaled
H335: May cause respiratory irritation
H336: May cause drowsiness or dizziness
EUH019: May form explosive peroxides

Precautionary Statements

P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking
P261: Avoid breathing dust/fume/gas/mist/vapors/spray
P280: Wear protective gloves/protective clothing/eye protection/face protection
P337+P313: Get medical advice/attention
P403+P233: Store in a well ventilated place. Keep container tightly closed
P501: Dispose of contents/container in accordance with local regulation

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH | CONCENTRATION |
|---------------------------|----------|-----------|-------------------------|---------------|
| | | | Pre-registration Number | % by Weight |
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 30 - 60 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 5 - 25 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 05-2116297718-25-0000 | 5 - 20 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.

* Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).

indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.

Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.

Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.

Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

SECTION 5 - FIREFIGHTING MEASURES

| | | | | |
|--|--|--------------|------|------------|
| Suitable Extinguishing Media: | Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. | HMIS | NFPA | 0-Minimal |
| Unsuitable Extinguishing Media: | Water spray or stream. | Health | 2 | 1-Slight |
| Exposure Hazards: | Inhalation and dermal contact | Flammability | 3 | 2-Moderate |
| Combustion Products: | Oxides of carbon, hydrogen chloride and smoke | Reactivity | 0 | 3-Serious |
| | | PPE | B | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).

Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.

Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.

Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 33°C (90°F) and away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL: | OSHA | CAL/OSHA | CAL/OSHA | CAL/OSHA |
|------------------|---------------------------|-----------|------------|----------|------------|-------------|----------|----------|----------|
| | | | | | | PEL-Ceiling | PEL | Ceiling | STEL |
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.**Monitoring:** Maintain breathing zone airborne concentrations below exposure limits.**Personal Protective Equipment (PPE):****Eye Protection:** Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.**Skin Protection:** Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.**Respiratory Protection:** Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: **OCT 2013**Supersedes: **DEC 2011**

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Orange or gray, heavy syrupy liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 66°C (151°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 66°C (151°F) Based on first boiling component: THF | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 11.8% based on THF |
| Flash Point: | -20°C (-4°F) TCC based on THF | Vapor Pressure: | 129 mm Hg @ 20°C (68°F) based on THF |
| Specific Gravity: | 0.995 @23°C (73°F) | Vapor Density: | >2 (Air = 1) |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Other Data: Viscosity: | Heavy bodied |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 490 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

Likely Routes of Exposure: Inhalation, Eye and Skin Contact**Acute symptoms and effects:**

| | |
|----------------------|---|
| Inhalation: | Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages. |
| Eye Contact: | Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid. |
| Skin Contact: | Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact. |
| Ingestion: | May cause nausea, vomiting, diarrhea and mental sluggishness. |

Chronic (long-term) effects:

None known to humans

Toxicity:LD₅₀LC₅₀

| | | |
|---------------------------|---|--|
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 490 g/l. |
| Degradability: | Biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

EXCEPTION for Ground Shipping

DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package.
Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D".

TDG INFORMATION

| | |
|---------------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|--|--|
| Precautionary Label Information: | Highly Flammable, Irritant | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia |
| Symbols: | F, Xi | | AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Risk Phrases: | R11: Highly flammable. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness | |
| Safety Phrases: | S2: Keep out of the reach of children S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. | S25: Avoid contact with eyes. S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. | |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 10/15/2013 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for CPVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 1

Printed: 05/04/2015

Revision: 05/04/2015

Supersedes Revision: 11/05/2012

1. PRODUCT AND COMPANY IDENTIFICATION

Product Name: Goof Off Heavy Duty
Company Name: W. M. Barr
2105 Channel Avenue
Memphis, TN 38113
Phone Number: (901)775-0100

Web site address: www.wmbarr.com

Emergency Contact: 3E 24 Hour Emergency Contact (800)451-8346
Information: W.M. Barr Customer Service (800)398-3892

Intended Use: Mult-Purpose Remover for tar, ink, paint, adhesive, etc.

Synonyms: FG705

Additional Information This product is regulated by the United States Consumer Product Safety Commission and is subject to certain labeling requirements under the Federal Hazardous Substances Act. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS). The product label also includes other important information, including directions for use, and should always be read in its entirety prior to using the product.

2. HAZARDS IDENTIFICATION

Serious Eye Damage/Eye Irritation, Category 1

Skin Sensitization, Category 1



GHS Signal Word: Danger

GHS Hazard Phrases: H317: May cause an allergic skin reaction.
H318: Causes serious eye damage.


GHS Precaution Phrases: P261: Avoid breathing gas/mist/vapors/spray.
P272: Contaminated work clothing should not be allowed out of the workplace.
P280: Wear protective gloves/protective clothing/eye protection/face protection.

GHS Response Phrases: P302+352: IF ON SKIN: Wash with plenty of soap and water.
P305+351+338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P310: Immediately call a POISON CENTER or doctor/physician.
P321: Specific treatment see label.
P333+313: If skin irritation or rash occurs, seek medical advice/attention.
P363: Wash contaminated clothing before reuse.

GHS Storage and Disposal Phrases: P501: Dispose of contents/container according to local, state and federal regulations.

Hazard Rating System:

| | | |
|--------------|---|---|
| HEALTH | * | 1 |
| FLAMMABILITY | | 1 |
| PHYSICAL | | 0 |
| PPE | | X |



HMIS:

OSHA Regulatory Status: This material is classified as hazardous under OSHA regulations.

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 2

Printed: 05/04/2015

Revision: 05/04/2015

Supersedes Revision: 11/05/2012

Potential Health Effects (Acute and Chronic):

Eyes:

May cause severe irritation, experienced as discomfort or pain, excess blinking and tear production, marked excess redness and swelling of the conjunctiva, and chemical burns of the eye.

Skin:

May cause moderate skin irritation. Prolonged and/or repeated contact may cause defatting of the skin and dermatitis. Causes redness and pain. May be harmful if absorbed through the skin.

Inhalation:

When used as directed, the consumer is not expected to experience any exposure effects. Excessive exposure may cause irritation to the upper respiratory tract. Symptoms may include a headache, dizziness, or nausea.

Ingestion:

Harmful if swallowed. May cause severe gastrointestinal tract irritation with nausea, vomiting and possible burns. May produce signs of intoxication characterized by incoordination, dizziness, drowsiness, headache, nausea, mental confusion, possibly slurred speech, and stupor.

Chronic Health Effects:

Diethylene glycol monobutyl ether has caused red blood cell hemolysis in laboratory animals and secondary injury to the kidney and liver. However, humans appear to be resistant to this effect.

Prolonged skin contact may cause dermatitis.

Target Organs: Blood (Hemolysis), Kidneys, Liver, Central Nervous System.

Primary Routes of Entry: Inhalation, Ingestion

Medical Conditions Generally None known.

Aggravated By Exposure:

3. COMPOSITION/INFORMATION ON INGREDIENTS

| CAS # | Hazardous Components (Chemical Name) | Concentration | RTECS # |
|------------|---|---------------|-----------|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | <10.0 % | DN3150000 |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | <10.0 % | NA |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | <10.0 % | DB6820000 |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)}} | < 5.0 % | KJ9100000 |

Additional Chemical Information

Specific percentage of composition is being withheld as a trade secret.

4. FIRST AID MEASURES

| | |
|--|---|
| Emergency and First Aid Procedures: | <p>Skin: Remove contaminated clothing. Immediately wash skin thoroughly with large amounts of water and mild soap, if available. Seek medical attention if irritation develops or persists.</p> <p>Eyes: Immediately begin to flush eyes with water, remove any contact lens. Continue to flush the eyes for at least 15 minutes. Seek medical attention.</p> <p>Inhalation: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention.</p> <p>Ingestion: If swallowed, do NOT induce vomiting. Seek immediate medical attention. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person.</p> |
| Signs and Symptoms Of Exposure: | See Potential Health Effects. |
| Note to Physician: | Treatment of overexposure should be directed at the control of symptoms and the clinical condition of the patient. |

5. FIRE FIGHTING MEASURES

| | |
|--|---|
| Flash Pt: | No data. |
| Explosive Limits: | LEL: No data. UEL: No data. |
| Autoignition Pt: | No data. |
| Suitable Extinguishing Media: | Non-combustible liquid - use extinguishing media for underlying cause of fire. |
| Unsuitable Extinguishing Media: | None known. |
| Fire Fighting Instructions: | Self-contained respiratory protection should be provided for fire fighters fighting fires in buildings or confined areas. Storage containers exposed to fire should be kept cool with water spray to prevent pressure build-up. Stay away from heads of containers that have been exposed to intense heat or flame. |
| Flammable Properties and Hazards: | Flashpoint: No flash to boiling. This material does not exhibit a flashpoint per the Setaflash Closed Cup test method. |

6. ACCIDENTAL RELEASE MEASURES

| | |
|---|--|
| Steps To Be Taken In Case Material Is Released Or Spilled: | Prevent entry into waterways, sewers, or confined areas. Absorb or cover with dry earth, sand, or other non-combustible material and transfer to compatible containers for proper disposal. For large spills, dike ahead of the spill. |
|---|--|

7. HANDLING AND STORAGE

| | |
|---|---|
| Precautions To Be Taken in Handling: | Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. A source of clean water should be kept in the immediate work area for flushing of the eyes and skin. |
| | Follow all MSDS/label precautions even after container is emptied because they may retain product residues. |
| Precautions To Be Taken in Storing: | Keep containers closed when not in use. Store in a cool, dry place, out of direct sunlight. Protect from freezing. |

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

| CAS # | Partial Chemical Name | OSHA TWA | ACGIH TWA | Other Limits |
|------------|---|----------|-----------|--------------|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | No data. | No data. | No data. |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | No data. | No data. | No data. |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | No data. | No data. | No data. |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)} | No data. | No data. | No data. |

Respiratory Equipment (Specify Type): When used by the consumer following directions for use and with adequate ventilation, respiratory protection is not expected to be needed.

A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use.

If the work area is not properly ventilated to keep airborne levels below their exposure limits, you must use a properly fitted and maintained NIOSH approved respirator for organic vapors. A dust mask does not provide protection against vapors.

Eye Protection: Where contact with the eyes or face is likely from spraying or splashing, safety glasses, a faceshield or chemical goggles should be worn to prevent eye contact.

Protective Gloves: When used as directed, protective gloves should not be required. For prolonged or repeated contact, wear gloves with as much resistance to the chemical ingredients as possible. Glove materials such as natural rubber or nitrile rubber provide protection. Glove selection should be based on chemicals being used and conditions of use. Consult your glove supplier for additional information.

Other Protective Clothing: Various application methods can dictate use of additional protective safety equipment, such as impermeable aprons, etc., to minimize exposure.

Engineering Controls (Ventilation etc.): Ventilation is normally not required when handling or using this product to keep exposure to airborne contaminants below the exposure limit.

Good general ventilation should be sufficient to control airborne levels.

Work/Hygienic/Maintenance Practices: Wash hands thoroughly after use and before eating, drinking, smoking, or using the restroom.

Do not eat, drink, or smoke in the work area.

Discard any clothing or other protective equipment that cannot be decontaminated.

Facilities storing or handling this material should be equipped with an emergency eyewash and safety shower.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical States: [] Gas [X] Liquid [] Solid
Appearance and Odor: Clear, thin, colorless to light yellow liquid.
Melting Point: 32.00 F
Boiling Point: 212.00 F
Autoignition Pt: No data.
Flash Pt: No data.
Explosive Limits: LEL: No data. UEL: No data.
Specific Gravity (Water = 1): 1.0022
Density: 8.34 LB/GL
Vapor Pressure (vs. Air or mm Hg): No data.
Vapor Density (vs. Air = 1): > 1
Evaporation Rate: > 1
Solubility in Water: Complete
pH: 6.5 - 7.5
Percent Volatile: 92.0 % by weight.
VOC / Volume: 9.0000 % WT

10. STABILITY AND REACTIVITY

Stability: Unstable [] Stable [X]
Conditions To Avoid - Instability: None known.
Incompatibility - Materials To Avoid: Strong alkalies, acids, and oxidizers.
Hazardous Decomposition Or Byproducts: Carbon monoxide, carbon dioxide
Possibility of Hazardous Reactions: Will occur [] Will not occur [X]
Conditions To Avoid - Hazardous Reactions: None known.

SAFETY DATA SHEET
Goof Off Heavy Duty

11. TOXICOLOGICAL INFORMATION

Toxicological Information: Product has not been tested as a whole, Refer to section 2 for acute and chronic health effects.

CAS# 112-34-5:
Standard Draize Test, Eyes, Species: Rabbit, 20.00 MG, Severe.
Result:
Behavioral: Anticonvulsant.
- American Journal of Ophthalmology., Ophthalmic Pub. Co., 435 N. Michigan Ave., Suite 1415, Chicago, IL 60611, Vol/p/yr: 29,1363, 1946

| CAS # | Hazardous Components (Chemical Name) | NTP | IARC | ACGIH | OSHA |
|------------|--|------|------|-------|------|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | n.a. | n.a. | n.a. | n.a. |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | n.a. | n.a. | n.a. | n.a. |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | n.a. | n.a. | n.a. | n.a. |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)} | n.a. | n.a. | n.a. | n.a. |

12. ECOLOGICAL INFORMATION

General Ecological Information: Product has not been tested as a whole.

13. DISPOSAL CONSIDERATIONS

Waste Disposal Method: Dispose of in accordance with all applicable local, state, and federal regulations. Do not dump into sewers or allow to enter waterways.

14. TRANSPORT INFORMATION

LAND TRANSPORT (US DOT):

DOT Proper Shipping Name: Not regulated by D.O.T.
DOT Hazard Class:
UN/NA Number:

Additional Transport Information:

15. REGULATORY INFORMATION

EPA SARA (Superfund Amendments and Reauthorization Act of 1986) Lists

| CAS # | Hazardous Components (Chemical Name) | S. 302 (EHS) | S. 304 RQ | S. 313 (TRI) |
|------------|--|--------------|-----------|---------------|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | No | No | No |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | No | No | No |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | No | No | No |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)} | No | No | Yes-Cat. N230 |

This material meets the EPA 'Hazard Categories' defined for SARA Title III Sections 311/312 as indicated:

| | | |
|---|--|-----------------------------------|
| <input checked="" type="checkbox"/> Yes | <input type="checkbox"/> No | Acute (immediate) Health Hazard |
| <input checked="" type="checkbox"/> Yes | <input type="checkbox"/> No | Chronic (delayed) Health Hazard |
| <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No | Fire Hazard |
| <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No | Sudden Release of Pressure Hazard |
| <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No | Reactive Hazard |

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 7

Printed: 05/04/2015

Revision: 05/04/2015

Supersedes Revision: 11/05/2012

| CAS # | Hazardous Components (Chemical Name) | Other US EPA or State Lists |
|------------|--|--|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)} | CAA HAP,ODC: HAP; CWA NPDES: No; TSCA: Yes - Inventory, 4 Test; CA PROP.65: No |

Regulatory Information Statement: All components of this material are listed on the TSCA Inventory or are exempt.

16. OTHER INFORMATION

Revision Date: 05/04/2015
Preparer Name: W.M. Barr EHS Dept (901)775-0100
Additional Information About This Product: No data available.

Company Policy or Disclaimer: The information contained herein is presented in good faith and believed to be accurate as of the effective date shown above. This information is furnished without warranty of any kind. Employers should use this information only as a supplement to other information gathered by them and must make independent determination of suitability and completeness of information from all sources to assure proper use of these materials and the safety and health of employees. Any use of this data and information must be determined by the user to be in accordance with applicable federal, state and local laws and regulations.

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 1
 Printed: 05/04/2015
 Revision: 05/04/2015
 Supersedes Revision: 11/05/2012

1. PRODUCT AND COMPANY IDENTIFICATION

Product Name: Goof Off Heavy Duty
Company Name: W. M. Barr
 2105 Channel Avenue
 Memphis, TN 38113
Phone Number: (901)775-0100

Web site address: www.wmbarr.com

Emergency Contact: 3E 24 Hour Emergency Contact (800)451-8346
Information: W.M. Barr Customer Service (800)398-3892

Intended Use: Multi-Purpose Remover for tar, ink, paint, adhesive, etc.

Synonyms: FG705

Additional Information This product is regulated by the United States Consumer Product Safety Commission and is subject to certain labeling requirements under the Federal Hazardous Substances Act. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS). The product label also includes other important information, including directions for use, and should always be read in its entirety prior to using the product.

2. HAZARDS IDENTIFICATION

Serious Eye Damage/Eye Irritation, Category 1
Skin Sensitization, Category 1



GHS Signal Word: **Danger**

GHS Hazard Phrases: H317: May cause an allergic skin reaction.
 H318: Causes serious eye damage.

GHS Precaution Phrases: P261: Avoid breathing gas/mist/vapors/spray.
 P272: Contaminated work clothing should not be allowed out of the workplace.
 P280: Wear protective gloves/protective clothing/eye protection/face protection.


GHS Response Phrases: P302+352: IF ON SKIN: Wash with plenty of soap and water.
 P305+351+338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 P310: Immediately call a POISON CENTER or doctor/physician.
 P321: Specific treatment see label.
 P333+313: If skin irritation or rash occurs, seek medical advice/attention.
 P363: Wash contaminated clothing before reuse.

GHS Storage and Disposal Phrases: P501: Dispose of contents/container according to local, state and federal regulations.

Hazard Rating System:

| | | |
|--------------|---|---|
| HEALTH | * | 1 |
| FLAMMABILITY | | 1 |
| PHYSICAL | | 0 |
| PPE | | X |

HMIS:



OSHA Regulatory Status: This material is classified as hazardous under OSHA regulations.

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 2

Printed: 05/04/2015

Revision: 05/04/2015

Supersedes Revision: 11/05/2012

Potential Health Effects (Acute and Chronic):

Eyes:

May cause severe irritation, experienced as discomfort or pain, excess blinking and tear production, marked excess redness and swelling of the conjunctiva, and chemical burns of the eye.

Skin:

May cause moderate skin irritation. Prolonged and/or repeated contact may cause defatting of the skin and dermatitis. Causes redness and pain. May be harmful if absorbed through the skin.

Inhalation:

When used as directed, the consumer is not expected to experience any exposure effects. Excessive exposure may cause irritation to the upper respiratory tract.

Symptoms may include a headache, dizziness, or nausea.

Ingestion:

Harmful if swallowed. May cause severe gastrointestinal tract irritation with nausea, vomiting and possible burns. May produce signs of intoxication characterized by incoordination, dizziness, drowsiness, headache, nausea, mental confusion, possibly slurred speech, and stupor.

Chronic Health Effects:

Diethylene glycol monobutyl ether has caused red blood cell hemolysis in laboratory animals and secondary injury to the kidney and liver. However, humans appear to be resistant to this effect.

Prolonged skin contact may cause dermatitis.

Target Organs: Blood (Hemolysis), Kidneys, Liver, Central Nervous System.

Primary Routes of Entry: Inhalation, Ingestion

Medical Conditions Generally None known.

Aggravated By Exposure:

3. COMPOSITION/INFORMATION ON INGREDIENTS

| CAS # | Hazardous Components (Chemical Name) | Concentration | RTECS # |
|------------|--|---------------|-----------|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | <10.0 % | DN3150000 |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | <10.0 % | NA |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | <10.0 % | DB6820000 |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)} | < 5.0 % | KJ9100000 |

Additional Chemical Information

Specific percentage of composition is being withheld as a trade secret.

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 3
Printed: 05/04/2015
Revision: 05/04/2015
Supersedes Revision: 11/05/2012

4. FIRST AID MEASURES

| | |
|--|--|
| Emergency and First Aid Procedures: | Skin: Remove contaminated clothing. Immediately wash skin thoroughly with large amounts of water and mild soap, if available. Seek medical attention if irritation develops or persists. Eyes: Immediately begin to flush eyes with water, remove any contact lens. Continue to flush the eyes for at least 15 minutes. Seek medical attention. Inhalation: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Ingestion: If swallowed, do NOT induce vomiting. Seek immediate medical attention. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person. |
| Signs and Symptoms Of Exposure: | See Potential Health Effects. |
| Note to Physician: | Treatment of overexposure should be directed at the control of symptoms and the clinical condition of the patient. |

5. FIRE FIGHTING MEASURES

| | |
|--|---|
| Flash Pt: | No data. |
| Explosive Limits: | LEL: No data. UEL: No data. |
| Autoignition Pt: | No data. |
| Suitable Extinguishing Media: | Non-combustible liquid - use extinguishing media for underlying cause of fire. |
| Unsuitable Extinguishing Media: | None known. |
| Fire Fighting Instructions: | Self-contained respiratory protection should be provided for fire fighters fighting fires in buildings or confined areas. Storage containers exposed to fire should be kept cool with water spray to prevent pressure build-up. Stay away from heads of containers that have been exposed to intense heat or flame. |
| Flammable Properties and Hazards: | Flashpoint: No flash to boiling. This material does not exhibit a flashpoint per the Setafash Closed Cup test method. |

6. ACCIDENTAL RELEASE MEASURES

| | |
|---|--|
| Steps To Be Taken In Case Material Is Released Or Spilled: | Prevent entry into waterways, sewers, or confined areas. Absorb or cover with dry earth, sand, or other non-combustible material and transfer to compatible containers for proper disposal. For large spills, dike ahead of the spill. |
|---|--|

7. HANDLING AND STORAGE

| | |
|---|--|
| Precautions To Be Taken in Handling: | Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. A source of clean water should be kept in the immediate work area for flushing of the eyes and skin. Follow all MSDS/label precautions even after container is emptied because they may retain product residues. |
| Precautions To Be Taken in Storing: | Keep containers closed when not in use. Store in a cool, dry place, out of direct sunlight. Protect from freezing. |

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 4
 Printed: 05/04/2015
 Revision: 05/04/2015
 Supersedes Revision: 11/05/2012

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

| CAS # | Partial Chemical Name | OSHA TWA | ACGIH TWA | Other Limits |
|------------|--|----------|-----------|--------------|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | No data. | No data. | No data. |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | No data. | No data. | No data. |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | No data. | No data. | No data. |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)}} | No data. | No data. | No data. |

Respiratory Equipment (Specify Type): When used by the consumer following directions for use and with adequate ventilation, respiratory protection is not expected to be needed.

A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use.

If the work area is not properly ventilated to keep airborne levels below their exposure limits, you must use a properly fitted and maintained NIOSH approved respirator for organic vapors. A dust mask does not provide protection against vapors.

Eye Protection: Where contact with the eyes or face is likely from spraying or splashing, safety glasses, a faceshield or chemical goggles should be worn to prevent eye contact.

Protective Gloves: When used as directed, protective gloves should not be required. For prolonged or repeated contact, wear gloves with as much resistance to the chemical ingredients as possible. Glove materials such as natural rubber or nitrile rubber provide protection. Glove selection should be based on chemicals being used and conditions of use. Consult your glove supplier for additional information.

Other Protective Clothing: Various application methods can dictate use of additional protective safety equipment, such as impermeable aprons, etc., to minimize exposure.

Engineering Controls (Ventilation etc.): Ventilation is normally not required when handling or using this product to keep exposure to airborne contaminants below the exposure limit.

Good general ventilation should be sufficient to control airborne levels.

Work/Hygienic/Maintenance Practices: Wash hands thoroughly after use and before eating, drinking, smoking, or using the restroom.

Do not eat, drink, or smoke in the work area.

Discard any clothing or other protective equipment that cannot be decontaminated.

Facilities storing or handling this material should be equipped with an emergency eyewash and safety shower.

SAFETY DATA SHEET
Goof Off Heavy Duty

Page: 5
Printed: 05/04/2015
Revision: 05/04/2015
Supersedes Revision: 11/05/2012

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical States: [] Gas [X] Liquid [] Solid
Appearance and Odor: Clear, thin, colorless to light yellow liquid.
Melting Point: 32.00 F
Boiling Point: 212.00 F
Autoignition Pt: No data.
Flash Pt: No data.
Explosive Limits: LEL: No data. UEL: No data.
Specific Gravity (Water = 1): 1.0022
Density: 8.34 LB/GL
Vapor Pressure (vs. Air or mm Hg): No data.
Vapor Density (vs. Air = 1): > 1
Evaporation Rate: > 1
Solubility in Water: Complete
pH: 6.5 - 7.5
Percent Volatile: 92.0 % by weight.
VOC / Volume: 9.0000 % WT

10. STABILITY AND REACTIVITY

Stability: Unstable [] Stable [X]
Conditions To Avoid - Instability: None known.
Incompatibility - Materials To Avoid: Strong alkalies, acids, and oxidizers.
Hazardous Decomposition Or Byproducts: Carbon monoxide, carbon dioxide
Possibility of Hazardous Reactions: Will occur [] Will not occur [X]
Conditions To Avoid - Hazardous Reactions: None known.

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 6
 Printed: 05/04/2015
 Revision: 05/04/2015
 Supersedes Revision: 11/05/2012

11. TOXICOLOGICAL INFORMATION

Toxicological Information: Product has not been tested as a whole, Refer to section 2 for acute and chronic health effects.

CAS# 112-34-5:
 Standard Draize Test, Eyes, Species: Rabbit, 20.00 MG, Severe.
 Result:
 Behavioral: Anticonvulsant.
 - American Journal of Ophthalmology., Ophthalmic Pub. Co., 435 N. Michigan Ave.,
 Suite 1415, Chicago, IL 60611, Vol/p/yr: 29,1363, 1946

| CAS # | Hazardous Components (Chemical Name) | NTP | IARC | ACGIH | OSHA |
|------------|---|------|------|-------|------|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | n.a. | n.a. | n.a. | n.a. |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | n.a. | n.a. | n.a. | n.a. |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | n.a. | n.a. | n.a. | n.a. |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)}} | n.a. | n.a. | n.a. | n.a. |

12. ECOLOGICAL INFORMATION

General Ecological Information: Product has not been tested as a whole.

13. DISPOSAL CONSIDERATIONS

Waste Disposal Method: Dispose of in accordance with all applicable local, state, and federal regulations. Do not dump into sewers or allow to enter waterways.

14. TRANSPORT INFORMATION

LAND TRANSPORT (US DOT):

DOT Proper Shipping Name: Not regulated by D.O.T.
DOT Hazard Class:
UN/NA Number:

Additional Transport Information:

15. REGULATORY INFORMATION

EPA SARA (Superfund Amendments and Reauthorization Act of 1986) Lists

| CAS # | Hazardous Components (Chemical Name) | S. 302 (EHS) | S. 304 RQ | S. 313 (TRI) |
|------------|---|--------------|-----------|---------------|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | No | No | No |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | No | No | No |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | No | No | No |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)}} | No | No | Yes-Cat. N230 |

This material meets the EPA 'Hazard Categories' defined for SARA Title III Sections 311/312 as indicated:

| | | |
|---|--|-----------------------------------|
| <input checked="" type="checkbox"/> Yes | <input type="checkbox"/> No | Acute (immediate) Health Hazard |
| <input checked="" type="checkbox"/> Yes | <input type="checkbox"/> No | Chronic (delayed) Health Hazard |
| <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No | Fire Hazard |
| <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No | Sudden Release of Pressure Hazard |
| <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No | Reactive Hazard |

SAFETY DATA SHEET

Goof Off Heavy Duty

Page: 7

Printed: 05/04/2015

Revision: 05/04/2015

Supersedes Revision: 11/05/2012

| CAS # | Hazardous Components (Chemical Name) | Other US EPA or State Lists |
|------------|---|--|
| 100-51-6 | Benzenemethanol {Benzyl alcohol} | CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No |
| 2568-90-3 | 1,1'-[Methylenebis(oxy)]dibutane | CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No |
| 27177-77-1 | Benzenesulfonic acid, dodecyl-, potassium salt | CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No |
| 112-34-5 | Diethylene glycol monobutyl ether {2-(2-Butoxyethoxy)ethanol {(a glycol ether)}} | CAA HAP,ODC: HAP; CWA NPDES: No; TSCA: Yes - Inventory, 4 Test; CA PROP.65: No |

Regulatory Information Statement: All components of this material are listed on the TSCA Inventory or are exempt.

16. OTHER INFORMATION

Revision Date: 05/04/2015
Preparer Name: W.M. Barr EHS Dept (901)775-0100
Additional Information About This Product: No data available.

Company Policy or Disclaimer: The information contained herein is presented in good faith and believed to be accurate as of the effective date shown above. This information is furnished without warranty of any kind. Employers should use this information only as a supplement to other information gathered by them and must make independent determination of suitability and completeness of information from all sources to assure proper use of these materials and the safety and health of employees. Any use of this data and information must be determined by the user to be in accordance with applicable federal, state and local laws and regulations.

MSDS

1

DECON-AHOL®

Sterile

WFI FORMULA

70%

**Sterile Pharmaceutical Clean Room Formula
USP Isopropyl Alcohol with Water for Injection (WFI)**

MATERIAL SAFETY DATA SHEET

**COMPLIES WITH OSHA HAZARD COMMUNICATION STANDARD 29 CFR 1910.1200
(Complies with Commission Directive 91/155/EEC amended by 2001/58/EC)**



Veltek Associates, Inc.

15 Lee Boulevard Malvern, PA 19355-1234

Tel: (610) 644-8335 Fax: (610) 644-8336 www.sterile.com

DECON-AHOL[®] WFI 70%**MATERIAL SAFETY DATA SHEET**

COMPLIES WITH OSHA HAZARD COMMUNICATION STANDARD 29 CFR 1910.1200
(Complies with Commission Directive 91/155/EEC amended by 2001/58/EC)

I. Identification of Substance:

Product Name: DECON-AHOL[®] Sterile WFI Formula 70%

MSDS #: VEL-104

Description: 70% USP Isopropyl Alcohol with USP Water for Injection

| MSDS Information | Manufacturer Information | Emergency Telephone Information |
|-----------------------------------|---------------------------------|--|
| Date Prepared: November 6, 2002 | Veltek Associates, Inc. | Notify your Supervisor |
| Prepared by: | 15 Lee Boulevard | Emergencies Chemtrec (800) 424-9300 |
| Art Vellutato, Jr. | Malvern, PA 19355-1234 | 24-hour service |
| V.P. Technical Support Operations | TEL: (610) 644-8335 | |
| Reviewed by: | | Effective Date: November 6, 2002 |
| Art Vellutato, Sr. | | Date Supersedes: 03/26/98 |
| Technical Director | | |

II. Composition/Data on Components:

CHEMICAL OR COMMON NAME: ISOPROPYL ALCOHOL 70%

DATE ISSUED: 10/06/02

DATE SUPERSEDES: None

MSDS SECTION WITH CHANGES: None, New Issuance

| INGREDIENTS | WEIGHT % | EXPOSURE LIMIT | Special Issues |
|--|-----------------|---|-------------------------------|
| Isopropyl Alcohol (CAS# 63-67-0) | 70% | PEL/TWA: 400 PPM TLV/TWA: 400 PPM TLV/STEL: 500 PPM | |
| USP Water for Injection | 30% | NA | |
| * Nitrogen Propellant (CAS# 7727-37-9) | 90-130 psi | NA | * For aerosol containers only |

HAZARD RATING

HIMIS RATING HEALTH 1 REACTIVITY 0 FLAMMABILITY 3 PERSONAL B

HAZARD RATINGS: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Extreme A = Safety Glasses B = Safety Glasses & Gloves

Veltek Associates, Inc.

15 Lee Boulevard Malvern, PA 19355-1234

Tel: (610) 644-8335 Fax: (610) 644-8336 www.sterile.com

MSDS

3

III. Hazards Identification:

Aerosol Containers: 11-ounce aerosol (UN1950 aerosols, n.o.s., Flammable gas)

Bulk Containers: 8 oz., 16 oz., 1 Gallon and 5 Gallon (UN1219 Flammable Liquid)

PRODUCT CODES:

| <u>Part #</u> | <u>Description</u> | <u>Quan/cs.</u> |
|------------------|---|-----------------|
| DECWFI-SP-70 | 70% 11 oz. Aerosol Mist Spray Sterile | 24 |
| DECWFI-ST-70 | 70% 11 oz. Aerosol Stream Spray Sterile | 24 |
| DECWFI-SP-70-B | 70% 11 oz. InvertaSpray Aerosol Mist Spray Sterile | 24 |
| DECWFI-ST-70-NSP | 70% 8 oz. Non-Aerosol Mist Spray Sterile | 24 |
| DECWFI-SP-91 | 91% 11 oz. Aerosol Mist Spray Sterile | 24 |
| DECWFI-ST-91 | 91% 11 oz. Aerosol Stream Spray Sterile | 24 |
| DECWFI-B-60 | 60% 1 Gallon Sterile | 4 |
| DECWFI-B-70 | 70% 1 Gallon Sterile | 4 |
| DECWFI-B-91 | 91% 1 Gallon Sterile | 4 |
| DECWFI-TR-01 | 70% 16 oz. Trigger Spray Non-Sterile | 12 |
| DECWFI-TR-03 | 70% 16 oz. Trigger Spray Sterile | 12 |
| DECWFI-TR-04 | 70% 16 oz. Trig.Spray Sterile (Attached Sprayer) | 12 |
| DECWFI-TR-05 | 70% 32 oz. Trig.Spray Sterile (Attached Sprayer) | 12 |
| DECWFI-TR-07 | 70% 32 oz. Trig.Spray Non-Sterile (Attached Sprayer) | 12 |
| DECWFI-SQ-16Z | 70% 16 oz. Squeeze Bottle Sterile (Individual Double Bag) | 12 |
| DECWFI-16Z | 70% 16 oz. Squeeze Bottle Sterile (Single Double Bag) | 12 |
| DECWFI-SQ-03 | 70% 16 oz. Squeeze Bottle Sterile (Bulk Double Bag) | 12 |
| DECWFI-B-70-5G | 70% 5 Gallon Sterile | 1 |
| DECWFI-B-91-5G | 91% 5 Gallon Sterile | 1 |
| DECWFI-BAG-01 | 70% 32 OZ. Asepti-Cleanse Bags | 8 |

IV. First Aid Measures:

INHALATION: May cause mild irritation to nose, respiratory tract and may result in central nervous system (CNS) depression.

SKIN CONTACT: Mildly irritating to skin (Do not use on skin)

SKIN ABSORPTION: Mildly irritating to skin (Do not use on skin)

EYE CONTACT: Moderately irritating

INGESTION: Generally considered a low order of acute oral toxicity

ACUTE: Irritation as noted above. CNS depression may be evidenced by giddiness, headache, dizziness, and nausea.

CHRONIC: Pre-existing skin, eye, and respiratory disorders may be aggravated by exposure to IPA.

FIRST AID PROCEDURES:

EYES: Immediately flush with plenty of water for at least 15 minutes while holding eyelids open. Obtain immediate medical attention.

SKIN: Flush skin with plenty of water. If Irritation occurs seek medical attention.

INHALATION: Remove victim to fresh air and provide oxygen if breathing is difficult, obtain medical attention.

INGESTION: Do not induce vomiting if victim is unconscious or drowsy. Otherwise, if within the first 15 minutes give syrup of IPECAC, upon directions of physician or poison control center.

NOTES TO PHYSICIAN: Do not induce vomiting - FIRST contact poison control center, treatment depends on volume of substance, time elapsed, due to faster absorption.

Veltek Associates, Inc.

15 Lee Boulevard Malvern, PA 19355-1234

Tel: (610) 644-8335 Fax: (610) 644-8336 www.sterile.com

V. Firefighting Measures:

FLASH POINT (°F): 75°F

FLAMMABLE LIMITS: % Vol in Air LOWER-2% UPPER-12%

EXTINGUISHING MEDIA: Water Fog, Alcohol Foam, Dry Chemical, CO₂

SPECIAL FIRE FIGHTING PROCEDURES: Clear Fire area of unprotected personnel. Do not enter fire area without full bunker gear, helmet w/face shield, Bunker Coats, Gloves, Rubber Boots, Include a Positive pressure NIOSH Approved Self-Contained Breathing Apparatus, Cool fire exposed containers with water.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Containers exposed to intense heat should be cooled with water to prevent vapor build-up which could result in container rupture.

VI. Accidental Release Measures:

SPILL OR LEAK PROCEDURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED:

Spill or Leak Procedures: WARNING-FLAMMABLE. Eliminate all ignition sources. Equipment must be grounded to prevent sparking. Contain liquid with absorbent material and place in non-leaking container, seal tightly for disposal.

VII. Handling and Storage:

PRECAUTIONARY LABELING: See carton label for precautions

OTHER HANDLING AND STORAGE CONDITIONS: Do not Store above 120°F, Do not store in sunlight, spray in well ventilated area. Flammable Liquid. The contents are under pressure. Do not puncture, crush or incinerate the container in unapproved manner.

VIII. Exposure Control and Personal Protection:

SPECIAL PROTECTION INFORMATION

RESPIRATORY PROTECTION: If exposure may or does exceed occupation exposure limits (Sec V), use a NIOSH approved respirator to prevent overexposure. In accord with 29 CFR 1810.134 use either an atmosphere supplying respirator or an air purifying respirator for organic compounds.

VENTILATION: Use Explosion Proof Ventilation as required to control vapor concentrations.

PROTECTIVE GLOVES: Chemical Resistant Gloves

EYE PROTECTION: Avoid Contact. Wear Chemical Goggles

PROTECTIVE CLOTHING: Wear recommended clothing to reduce exposure

OTHER PROTECTIVE MEASURES: Do not contact skin, eyes, mouth or ingest. Eye wash fountains and showers should be available for emergency use.

Veltek Associates, Inc.

15 Lee Boulevard Malvern, PA 19355-1234

Tel: (610) 644-8335 Fax: (610) 644-8336 www.sterile.com

IX. Physical and Chemical Properties:

APPEARANCE/ODOR: Clear, Colorless Liquid

ODOR: Mild Alcohol Odor

VAPOR PRESSURE: 28 torr at 20°C

SOLUBILITY IN WATER: Complete

Physical and Chemical Properties (cont'):

FREEZING POINT: -10°C

PH: 7.0

VOC (as packaged, minus H₂O): 8.4 oz

SPECIFIC GRAVITY (H₂O=1): 0.872-883

PERCENTAGE VOLATILE BY VOLUME (%): 70%

VAPOR DENSITY (Air=1): 1.6

BOILING POINT (°F): 170°F

EVAPORATION RATE (Butyl Acetate-1): 1.7

THEORETICAL VOC (lb/gal): 7.34

X. Stability and Reactivity

STABILITY: Stable

STABILITY-CONDITIONS TO AVOID: Stable

INCOMPATIBILITY: see IPA requirements

HAZARDOUS DECOMPOSITION PRODUCTS: Carbon Monoxide and unidentified organic compounds may be formed during combustion.

HAZARDOUS POLYMERIZATION: Will not occur

HAZARDOUS POLYMERIZATION-COND. TO AVOID: Will not occur

XI. Toxicological Information:

POISON CRITERIA:

Oral
5840mg/kg/Rat

Dermal
1300mg/kg/Rabbit

Inhalation
1200mg/L/Rat

XII. Ecological Information:

Consult local authorities pertaining to the release of material to the environment.

XIII. Disposal Considerations:

WASTE DISPOSAL INFORMATION:

Disposal: Container disposal regulation may vary with amount of liquid content remaining in container. Refer to latest Federal and State Regulations regarding proper disposal of ALL containers. If needed, consult manufacturer for assistance to obtain proper disposal guidelines for your area.

Veltek Associates, Inc.

15 Lee Boulevard Malvern, PA 19355-1234

Tel: (610) 644-8335 Fax: (610) 644-8336 www.sterile.com

MSDS

6

XIV. Transport Information:

AEROSOL CONTAINERS

| Product | Description | Ground |
|----------------|---|---------------------------|
| DECWFI-SP-70 | 70% 11 oz. Aerosol Mist Spray Sterile | UN1950 Consumer Commodity |
| DECWFI-ST-70 | 70% 11 oz. Aerosol Stream Spray Sterile | UN1950 Consumer Commodity |
| DECWFI-SP-70-B | 70% 11 oz. Aerosol Stream Spray Sterile | UN1950 Consumer Commodity |
| DECWFI-SP-91 | 91% 11 oz. Aerosol Mist Spray Sterile | UN1950 Consumer Commodity |
| DECWFI-ST-91 | 91% 11 oz. Aerosol Stream Spray Sterile | UN1950 Consumer Commodity |

Transport Information (cont'):

| Product | Description | Air |
|----------------|---|----------------------|
| DECWFI-SP-70 | 70% 11 oz. Aerosol Mist Spray Sterile | UN1950 Flammable Gas |
| DECWFI-ST-70 | 70% 11 oz. Aerosol Stream Spray Sterile | UN1950 Flammable Gas |
| DECWFI-SP-70-B | 70% 11 oz. Aerosol Stream Spray Sterile | UN1950 Flammable Gas |
| DECWFI-SP-91 | 91% 11 oz. Aerosol Mist Spray Sterile | UN1950 Flammable Gas |
| DECWFI-ST-91 | 91% 11 oz. Aerosol Stream Spray Sterile | UN1950 Flammable Gas |

DOT SHIPPING NAME: AEROSOLS n.o.s. HAZARD CLASS: 2.1 ID NUMBER: UN1950

Shipping Instructions: UN1950:

Ground: Consumer Commodity

Ocean: Consumer Commodity

Air: 1950 n.o.s. Flammable Gas

BULK CONTAINERS

| Product | Description | Ground or Air |
|----------------|---|-------------------------|
| DECWFI-NSP-70 | 70% 11 oz. Non-Aerosol Spray Sterile | UN1219 Flammable Liquid |
| DECWFI-B-60 | 60% 1 Gallon Sterile | UN1219 Flammable Liquid |
| DECWFI-B-70 | 70% 1 Gallon Sterile | UN1219 Flammable Liquid |
| DECWFI-B-91 | 91% 1 Gallon Sterile | UN1219 Flammable Liquid |
| DECWFI-TR-01 | 70% 16 oz. Trigger Spray Non-Sterile | UN1219 Flammable Liquid |
| DECWFI-TR-03 | 70% 16 oz. Trigger Spray Sterile | UN1219 Flammable Liquid |
| DECWFI-TR-04 | 70% 16 oz. Trig. Spray Sterile (Attached Sprayer) | UN1219 Flammable Liquid |
| DECWFI-SQ-16Z | 70% 16 oz. Squeeze Bottle Sterile | UN1219 Flammable Liquid |
| DECWFI-B-70-5G | 70% 5 Gallon Sterile | UN1219 Flammable Liquid |
| DECWFI-B-91-5G | 91% 5 Gallon Sterile | UN1219 Flammable Liquid |
| DECWFI-SQ-03 | 70% 16 oz. Squeeze Bottle Sterile (Bulk) | UN1219 Flammable Liquid |
| DECWFI-BAG-01 | 70% 32 ounce Asepti-Cleanse Bag | UN1219 Flammable Liquid |

DOT SHIPPING NAME: Isopropanol HAZARD CLASS: 3 ID NUMBER: UN1219

Shipping Instructions:

UN1219:

Ground: Isopropanol, LTD. QTY. UN1219

Ocean: Isopropanol, 3.2, UN1219, LTD. QTY.

Air: Isopropanol, 3.0, UN1219, PG II

Veltek Associates, Inc.

15 Lee Boulevard Malvern, PA 19355-1234

Tel: (610) 644-8335 Fax: (610) 644-8336 www.sterile.com

MSDS

7

XV. Regulations:

PLEASE CONSULT YOUR STATE AND LOCAL AUTHORITY FOR INGREDIENTS LISTED AS PERTAINING TO REPORTING REQUIREMENTS FOR HAZARDOUS SUBSTANCE LIST.

No special regulation other than transportation and disposal (see section VII and section IX). Conform to Federal, State and Local Regulations for disposal. Follow usage instructions on container.

XVI. Other Information:

NA-Not Applicable, NE-Not Established, NSR-No Special Requirement, ND-Not determined for this product

The Information herein is given in good faith. No warranty, expressed or implied is made. Any use of these data and information must be determined by the user to be in accordance with applicable Federal, State and Local Laws and Regulations. The information contained in this form is confidential and is submitted solely for your organization's internal use.

Veltek Associates, Inc.

15 Lee Boulevard Malvern, PA 19355-1234

Tel: (610) 644-8335 Fax: (610) 644-8336 www.sterile.com

SAFETY DATA SHEET



Techspray Blue Shower® G3®

Section 1. Identification

GHS product identifier : Techspray Blue Shower® G3®
Product code : 1630-16S
Other means of identification : Not available. Aerosol.
Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Not applicable.

Supplier's details : Techspray
8125 Cobb Center Drive
Kennesaw, GA 30152
Tel: 678-819-1408
Toll free: 1-800-858-4043
Fax: 1 806-372-8750

Emergency telephone number (with hours of operation) : Chemtrec - 1-800-424-9300
CANUTEC (Canadian Transportation): (613) 996-6666
Emergency phone: (800) 858-4043
24/7

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : SKIN CORROSION/IRRITATION - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
GASES UNDER PRESSURE Compressed gas
Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 2%

GHS label elements

Hazard pictograms :



Signal word : Warning

Hazard statements : Causes serious eye irritation.
Causes skin irritation.
Contains gas under pressure; may explode if heated.

Precautionary statements

Prevention : Wear protective gloves. Wear eye or face protection. Wash hands thoroughly after handling.

Response : IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage : Protect from sunlight. Store in well-ventilated place.

Disposal : Not applicable.

Hazards not otherwise classified : None known.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Other means of identification : Not available. Aerosol.

| Ingredient name | % | CAS number |
|------------------------|-----------|------------|
| trans-dichloroethylene | ≥25 - ≤50 | 156-60-5 |
| ethanol | ≤5 | 64-17-5 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention if adverse health effects persist or are severe. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Causes skin irritation.
- Ingestion** : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing

Section 4. First aid measures

- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : Adverse symptoms may include the following:
Irritating to mouth, throat and stomach.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
halogenated compounds
carbonyl halides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Section 6. Accidental release measures

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Avoid breathing vapor or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Empty containers retain product residue and can be hazardous.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|------------------------|--|
| trans-dichloroethylene | ACGIH TLV (United States, 3/2015). TWA: 200 ppm 8 hours. TWA: 793 mg/m ³ 8 hours. |
| ethanol | ACGIH TLV (United States, 3/2015). STEL: 1000 ppm 15 minutes. NIOSH REL (United States, 10/2013). TWA: 1900 mg/m ³ 10 hours. TWA: 1000 ppm 10 hours. OSHA PEL (United States, 2/2013). TWA: 1900 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. OSHA PEL 1989 (United States, 3/1989). TWA: 1900 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. |

- Appropriate engineering controls** : Use only with adequate ventilation. If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.

Section 8. Exposure controls/personal protection

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid. [Aerosol.]
- Color** : Clear. Colorless.
- Odor** : Ethereal. [Slight]
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : Not available.
- Boiling point** : Not available.
- Flash point** : Not available.
- Evaporation rate** : >1 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : 122.7 kPa (920.45 mm Hg) [room temperature]
- Vapor density** : Not available.
- Relative density** : 1.229
- Solubility** : Not available.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : Not available.

Section 9. Physical and chemical properties

Auto-ignition temperature : Not available.
Decomposition temperature : Not available.
Viscosity : Not available.
Flow time (ISO 2431) : Not available.

Aerosol product

Type of aerosol : Spray
Heat of combustion : 0.84 kJ/g
Ignition distance : 0 cm
Enclosed space ignition - Time equivalent : 429 s/m³
Enclosed space ignition - Deflagration density : 1781 g/m³

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : No specific data.

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|---|-------------------|--|-------------------|
| trans-dichloroethylene | LC50 Inhalation Gas. LD50 Dermal | Rat Rabbit | 24100 ppm >5 g/kg | 4 hours - |
| ethanol | LD50 Oral LC50 Inhalation Vapor LD50 Oral | Rat Rat Rat | 1235 mg/kg 124700 mg/m ³ 7 g/kg | - 4 hours - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--|--|-----------------------|---|-----------------------|
| trans-dichloroethylene | Eyes - Moderate irritant Skin - Moderate irritant | Rabbit Rabbit | - - | 10 milligrams 24 hours 500 milligrams | - - |
| ethanol | Eyes - Mild irritant Eyes - Moderate irritant Eyes - Moderate irritant Eyes - Severe irritant Skin - Mild irritant | Rabbit Rabbit Rabbit Rabbit Rabbit | - - - - - | 24 hours 500 milligrams 0.06666667 minutes 100 milligrams 100 microliters 500 milligrams 400 milligrams | - - - - - |

Section 11. Toxicological information

| | | | | | |
|--|--------------------------|--------|---|------------------------|---|
| | Skin - Moderate irritant | Rabbit | - | 24 hours 20 milligrams | - |
|--|--------------------------|--------|---|------------------------|---|

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|-------|------|-----|
| ethanol | None. | - | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Causes skin irritation.
- Ingestion** : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : Adverse symptoms may include the following:
Irritating to mouth, throat and stomach.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Section 11. Toxicological information

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|-------|--------------|
| Oral | 2744.4 mg/kg |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------------------|---|---|----------|
| trans-dichloroethylene | Acute LC50 220000 to 290000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| ethanol | Acute EC50 17.921 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Acute EC50 2000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 25500 µg/l Marine water | Crustaceans - Artemia franciscana - Larvae | 48 hours |
| | Acute LC50 42000 µg/l Fresh water | Fish - Oncorhynchus mykiss | 4 days |
| | Chronic NOEC 4.995 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 100 µl/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| Chronic NOEC 0.375 µl/L Fresh water | Fish - Gambusia holbrooki - Larvae | 12 weeks | |

Persistence and degradability

Not available.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-----|-----------|
| trans-dichloroethylene | 2.09 | - | low |
| ethanol | -0.35 | - | low |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations




Disposal methods

: The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

United States - RCRA Toxic hazardous waste "U" List

| Ingredient | CAS # | Status | Reference number |
|---|----------|--------|------------------|
| 1,2-Dichloroethylene; Ethene, 1,2-dichloro-, (E)- | 156-60-5 | Listed | U079 |

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | ADR/RID | IMDG | IATA |
|----------------------------|---|---|-----------------------------|---|--|--|
| UN number | - | - | - | UN1950 | UN1950 | ID8000 |
| UN proper shipping name | Consumer commodity ORM-D | Consumer commodity ORM-D | Consumer commodity ORM-D | Aerosols, non-flammable | AEROSOLS IN LIMITED QUANTITIES OF CLASS 2 | Consumer commodity ID8000 |
| Transport hazard class(es) | ORM-D | ORM-D | ORM-D | 2  | 2.2  | 9  |
| Packing group | - | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. | No. |
| Additional information | Reportable quantity 2222.2 lbs / 1008.9 kg [216.86 gal / 820.9 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements. | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). | - | Tunnel code (E) | - | - |

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Section 14. Transport information

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 5(a)2 final significant new use rules:** Pentane, 1,1,1,2,2,3,4,5,5,5-decafluoro-
TSCA 8(a) CDR Exempt/Partial exemption: Not determined
TSCA 12(b) one-time export: Pentane, 1,1,1,2,2,3,4,5,5,5-decafluoro-
United States inventory (TSCA 8b): All components are listed or exempted.
Clean Water Act (CWA) 307: trans-dichloroethylene

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Immediate (acute) health hazard

Composition/information on ingredients

| Name | % | Fire hazard | Sudden release of pressure | Reactive | Immediate (acute) health hazard | Delayed (chronic) health hazard |
|------------------------|-----------|-------------|----------------------------|----------|---------------------------------|---------------------------------|
| trans-dichloroethylene | ≥25 - ≤50 | Yes. | No. | No. | Yes. | No. |
| ethanol | ≤5 | Yes. | No. | No. | Yes. | No. |

State regulations

Massachusetts : The following components are listed: DICHLOROETHYLENE-TRANS; ETHYL ALCOHOL; DENATURED ALCOHOL; CARBON DIOXIDE

New York : The following components are listed: Ethene, trans-1,2-dichloro-; Dichloroethylene

New Jersey : The following components are listed: ETHYL ALCOHOL; ALCOHOL; CARBON DIOXIDE; CARBONIC ACID GAS

Pennsylvania : The following components are listed: ETHENE, 1,2-DICHLORO-, (E)-; DENATURED ALCOHOL; ETHANOL; CARBON DIOXIDE

California Prop. 65

WARNING: This product contains less than 1% of a chemical known to the State of California to cause birth defects or other reproductive harm.

Section 15. Regulatory information

| Ingredient name | Cancer | Reproductive | No significant risk level | Maximum acceptable dosage level |
|---------------------|------------|--------------|---------------------------|--|
| ethanol methanol | No. No. | No. Yes. | Yes. No. | No. 23000 µg/day (ingestion) 47000 µg/day (inhalation) |

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

International lists

National inventory

- Australia** : All components are listed or exempted.
- Canada** : All components are listed or exempted.
- China** : All components are listed or exempted.
- Europe** : Not determined.
- Japan** : **Japan inventory (ENCS)**: All components are listed or exempted.
Japan inventory (ISHL): Not determined.
- Malaysia** : Not determined.
- New Zealand** : All components are listed or exempted.
- Philippines** : All components are listed or exempted.
- Republic of Korea** : All components are listed or exempted.
- Taiwan** : All components are listed or exempted.
- Turkey** : Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 2 |
| Flammability | | 2 |
| Physical hazards | | 0 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)

Section 16. Other information



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|--|--|
| SKIN IRRITATION - Category 2 EYE IRRITATION - Category 2A | Calculation method Calculation method |

History

Date of printing : 12/5/2018

Date of issue/Date of revision : 12/5/2018

Date of previous issue : No previous validation

Version : 1

Key to abbreviations

: ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 UN = United Nations

References : Not available.

☑ Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

82012

Section 1. Identification

Product name : Marking Paint
Fluorescent Orange

Product code : 82012

Other means of identification : Not available.

Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : Valspar
101 W. Prospect Avenue
Cleveland, OH 44115

Emergency telephone number of the company : (800) 424-9300

Product Information Telephone Number : 1-877-825-7727

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification


OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SKIN CORROSION/IRRITATION - Category 2
TOXIC TO REPRODUCTION - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
ASPIRATION HAZARD - Category 1

Percentage of the mixture consisting of ingredient(s) of unknown acute toxicity: 38.5% (oral), 38.5% (dermal), 41.8% (inhalation)

GHS label elements

Hazard pictograms

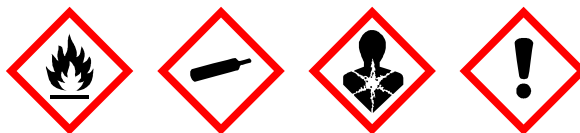

Signal word : Danger

Date of issue/Date of revision : 10/9/2020

Date of previous issue : 5/14/2020

Version : 7

1/16

82012 Marking Paint
Fluorescent Orange

SHW-85-NA-GHS-US

Section 2. Hazards identification

Hazard statements : Extremely flammable aerosol.
Contains gas under pressure; may explode if heated.
May be fatal if swallowed and enters airways.
Causes skin irritation.
May cause respiratory irritation.
May cause drowsiness or dizziness.
Suspected of damaging fertility or the unborn child.
May cause damage to organs through prolonged or repeated exposure.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves, protective clothing and eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Wash thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.

Response : IF exposed or concerned: Get medical advice or attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or doctor. Do NOT induce vomiting. Take off contaminated clothing and wash it before reuse. IF ON SKIN: Wash with plenty of water. If skin irritation occurs: Get medical advice or attention.

Storage : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Keep container tightly closed.

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Supplemental label elements DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Adequate ventilation required when sanding or abrading the dried film. If Adequate ventilation cannot be provided wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Abrading or sanding of the dry film may release Crystalline Silica which has been shown to cause lung damage and cancer under long term exposure.
Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.

Hazards not otherwise classified : DANGER: Rags, steel wool, other waste soaked with this product, and sanding residue may spontaneously catch fire if improperly discarded. Immediately place rags, steel wool, other waste soaked with this product, and sanding residue in a sealed, water-filled, metal container. Dispose of in accordance with local fire regulations.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture

Other means of identification : Not available.

CAS number/other identifiers

Section 3. Composition/information on ingredients

| Ingredient name | % by weight | CAS number |
|-------------------------------------|-------------|------------|
| Lt Aliphatic Hydrocarbon Solvent | ≥10 - ≤25 | 64742-89-8 |
| Propane | ≥10 - ≤25 | 74-98-6 |
| Calcium Carbonate | ≥10 - ≤25 | 1317-65-3 |
| Butane | ≤10 | 106-97-8 |
| Heavy Aliphatic Solvent | ≤5 | 64742-47-8 |
| Isobutyl Acetate | ≤5 | 110-19-0 |
| Light Aliphatic Hydrocarbon Solvent | <1 | 68410-97-9 |
| Xylene, mixed isomers | ≤0.3 | 1330-20-7 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : Causes skin irritation.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

Section 4. First aid measures

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting
reduced fetal weight
increase in fetal deaths
skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
metal oxide/oxides

Section 5. Fire-fighting measures

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flames, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

Section 7. Handling and storage

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|--|-------------------------|--|
| Lt Aliphatic Hydrocarbon Solvent Propane | 64742-89-8 74-98-6 | None. NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2020). Oxygen Depletion [Asphyxiant]. Explosive potential. |
| Calcium Carbonate | 1317-65-3 | OSHA PEL (United States, 5/2018). TWA: 5 mg/m ³ 8 hours. Form: Respirable fraction TWA: 15 mg/m ³ 8 hours. Form: Total dust NIOSH REL (United States, 10/2016). TWA: 5 mg/m ³ 10 hours. Form: Respirable fraction TWA: 10 mg/m ³ 10 hours. Form: Total |
| Butane | 106-97-8 | NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m ³ 10 hours. ACGIH TLV (United States, 3/2020). Explosive potential. STEL: 1000 ppm 15 minutes. |
| Heavy Aliphatic Solvent | 64742-47-8 | ACGIH TLV (United States, 3/2020). Absorbed through skin. TWA: 200 mg/m ³ , (as total hydrocarbon vapor) 8 hours. |
| Isobutyl Acetate | 110-19-0 | NIOSH REL (United States, 10/2016). TWA: 150 ppm 10 hours. TWA: 700 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 150 ppm 8 hours. TWA: 700 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2020). STEL: 150 ppm 15 minutes. TWA: 50 ppm 8 hours. |
| Light Aliphatic Hydrocarbon Solvent Xylene, mixed isomers | 68410-97-9 1330-20-7 | None. ACGIH TLV (United States, 3/2020). TWA: 100 ppm 8 hours. |

Section 8. Exposure controls/personal protection

| | | |
|--|--|---|
| | | <p>TWA: 434 mg/m³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
|--|--|---|

Occupational exposure limits (Canada)

| Ingredient name | CAS # | Exposure limits |
|---|--------------|--|
| Normal propane | 74-98-6 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 1000 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 1/2020). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> |
| Butane | 106-97-8 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours. CA Ontario Provincial (Canada, 6/2019). TWA: 800 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 1/2020). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |
| Petroleum refining, hydrotreated light distillate | 64742-47-8 | <p>CA British Columbia Provincial (Canada, 1/2020). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapour) 8 hours. CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 200 mg/m³, (as total hydrocarbon vapour) 8 hours. CA Ontario Provincial (Canada, 6/2019). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapour) 8 hours.</p> |
| Isobutyl acetate | 110-19-0 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 150 ppm 8 hours. 8 hrs OEL: 713 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 150 ppm 8 hours. CA Ontario Provincial (Canada, 6/2019).</p> |

Section 8. Exposure controls/personal protection

| | | |
|--------|-----------|--|
| Xylene | 1330-20-7 | <p>TWA: 150 ppm 8 hours. CA Quebec Provincial (Canada, 7/2019). TWAEV: 150 ppm 8 hours. TWAEV: 713 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 188 ppm 15 minutes. TWA: 150 ppm 8 hours. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 651 mg/m³ 15 minutes. 15 min OEL: 150 ppm 15 minutes. 8 hrs OEL: 434 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 1/2020). TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes. CA Quebec Provincial (Canada, 7/2019). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 651 mg/m³ 15 minutes. CA Ontario Provincial (Canada, 6/2019). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
|--------|-----------|--|

Occupational exposure limits (Mexico)

| | CAS # | Exposure limits |
|-------------------------|--------------|--|
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Heavy Aliphatic Solvent | 64742-47-8 | ACGIH TLV (United States, 3/2020). Absorbed through skin. TWA: 200 mg/m ³ , (as total hydrocarbon vapor) 8 hours. |
| Isobutyl Acetate | 110-19-0 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 150 ppm 8 hours. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Section 8. Exposure controls/personal protection

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

- Appearance**
- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 8
- Melting point/freezing point** : Not available.
- Boiling point/boiling range** : Not available.
- Flash point** : Closed cup: -19°C (-2.2°F) [Tagliabue Closed Cup]
- Evaporation rate** : 4.2 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 1%
Upper: 9.5%
- Vapor pressure** : 101.3 kPa (760 mm Hg) [at 20°C]
- Vapor density** : 1 [Air = 1]
- Relative density** : 0.82
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.

Section 9. Physical and chemical properties

Decomposition temperature : Not available.
Viscosity : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
Molecular weight : Not applicable.
Aerosol product
Type of aerosol : Spray
Heat of combustion : 21.972 kJ/g

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.
Chemical stability : The product is stable.
Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid : Avoid all possible sources of ignition (spark or flame).
Incompatible materials : No specific data.
Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|--|-----------------------|----------------------|--------------------------|----------|
| Butane Isobutyl Acetate | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| | LD50 Dermal | Rabbit | >17400 mg/kg | - |
| | LD50 Oral | Rat | 13400 mg/kg | - |
| Light Aliphatic Hydrocarbon Solvent | LD50 Oral | Rat | 5.17 g/kg | - |
| | Xylene, mixed isomers | LC50 Inhalation Gas. | Rat | 6700 ppm |
| LD50 Oral | | Rat | 4300 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-----------------|-------------|
| Isobutyl Acetate | Eyes - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 500 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| Xylene, mixed isomers | Eyes - Mild irritant | Rabbit | - | 87 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 5 mg | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 UI | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 100 % | - |
| | | | | | |

Sensitization

Not available.

Section 11. Toxicological information

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Xylene, mixed isomers | - | 3 | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|-------------------------------------|--------------------------|-------------------|--|
| Lt Aliphatic Hydrocarbon Solvent | Category 3 | - | Respiratory tract irritation |
| Propane | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| Butane | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| Heavy Aliphatic Solvent | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| Isobutyl Acetate | Category 3 | - | Narcotic effects |
| Light Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |
| Xylene, mixed isomers | Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|-------------------------------------|------------|-------------------|---------------|
| Lt Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Propane | Category 2 | - | - |
| Butane | Category 2 | - | - |
| Heavy Aliphatic Solvent | Category 2 | - | - |
| Light Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Xylene, mixed isomers | Category 2 | - | - |

Aspiration hazard

| Name | Result |
|-------------------------------------|--------------------------------|
| Lt Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Propane | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Heavy Aliphatic Solvent | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Xylene, mixed isomers | ASPIRATION HAZARD - Category 1 |

Section 11. Toxicological information

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : Causes skin irritation.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : Adverse symptoms may include the following:
pain or irritation
watering
redness

Inhalation : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations

Skin contact : Adverse symptoms may include the following:
irritation
redness
reduced fetal weight
increase in fetal deaths
skeletal malformations

Ingestion : Adverse symptoms may include the following:
nausea or vomiting
reduced fetal weight
increase in fetal deaths
skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : May cause damage to organs through prolonged or repeated exposure.

Carcinogenicity : No known significant effects or critical hazards.

Section 11. Toxicological information

- Mutagenicity** : No known significant effects or critical hazards.
- Teratogenicity** : Suspected of damaging the unborn child.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : Suspected of damaging fertility.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|----------------------------------|------------------------------------|----------------------------------|----------|
| Lt Aliphatic Hydrocarbon Solvent | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| Heavy Aliphatic Solvent | Acute LC50 2200 µg/l Fresh water | Fish - Lepomis macrochirus | 4 days |
| Xylene, mixed isomers | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Xylene, mixed isomers | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------------------|--------------------|-------------|-----------|
| Lt Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Light Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Xylene, mixed isomers | - | 8.1 to 25.9 | low |

Mobility in soil

- Soil/water partition coefficient (K_{oc})** : Not available.

- Other adverse effects** : No known significant effects or critical hazards.






Section 13. Disposal considerations

- Disposal methods** : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a

Section 13. Disposal considerations

safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|---|---|---|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | - ERG No. 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | - Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | Emergency schedules F-D, S-U Dependent upon container size, this product may ship under the Limited Quantity shipping exception. |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to IMO instruments : Not available.

Proper shipping name : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

International lists

- : **Australia inventory (AICS):** Not determined.
- : **China inventory (IECSC):** Not determined.
- : **Japan inventory (ENCS):** Not determined.
- : **Japan inventory (ISHL):** Not determined.
- : **Korea inventory (KECI):** Not determined.
- : **New Zealand Inventory of Chemicals (NZIoC):** Not determined.
- : **Philippines inventory (PICCS):** Not determined.
- : **Taiwan Chemical Substances Inventory (TCSI):** Not determined.
- : **Thailand inventory:** Not determined.
- : **Turkey inventory:** Not determined.
- : **Vietnam inventory:** Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| SKIN CORROSION/IRRITATION - Category 2 | Calculation method |
| TOXIC TO REPRODUCTION - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

- Date of printing** : 10/9/2020
- Date of issue/Date of revision** : 10/9/2020
- Date of previous issue** : 5/14/2020
- Version** : 7

Section 16. Other information

- Key to abbreviations**
- : ATE = Acute Toxicity Estimate
 - BCF = Bioconcentration Factor
 - GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 - IATA = International Air Transport Association
 - IBC = Intermediate Bulk Container
 - IMDG = International Maritime Dangerous Goods
 - LogPow = logarithm of the octanol/water partition coefficient
 - MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 - N/A = Not available
 - SGG = Segregation Group
 - UN = United Nations

▣ Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

SAFETY DATA SHEET



VINYL ESTER RESIN

Section 1. Identification

GHS product identifier : VINYL ESTER RESIN
Product code : CORVE8401
Other means of identification : Vinyl Ester Resin
Product type : Liquid.

Relevant identified uses of the substance or mixture and uses advised against

Industrial applications.

Supplier's details : INTERPLASTIC CORPORATION
1225 Willow Lake Boulevard
St. Paul, MN 55110-5145
651.481.6860

Emergency telephone number (with hours of operation) : CHEMTREC 24-Hour Emergency Telephone
US and Canada 800.424.9300
Outside US and Canada +1 703.741.5970

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE LIQUIDS - Category 3
ACUTE TOXICITY (inhalation) - Category 4
SKIN IRRITATION - Category 2
EYE IRRITATION - Category 2A
GERM CELL MUTAGENICITY - Category 1
CARCINOGENICITY - Category 2
TOXIC TO REPRODUCTION (Fertility) - Category 2
TOXIC TO REPRODUCTION (Unborn child) - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (hearing organs) - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown dermal toxicity: 38.2%

GHS label elements

Hazard pictograms :



Signal word : Danger

Section 2. Hazards identification

- Hazard statements** : Flammable liquid and vapor.
Harmful if inhaled.
Causes serious eye irritation.
Causes skin irritation.
May cause genetic defects.
Suspected of damaging fertility or the unborn child.
Suspected of causing cancer.
May cause respiratory irritation.
Causes damage to organs through prolonged or repeated exposure. (hearing organs)
- Precautionary statements**
- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Use explosion-proof electrical, ventilating, lighting and all material-handling equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Keep container tightly closed. Use only outdoors or in a well-ventilated area. Do not breathe vapor. Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling.
- Response** : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
- Storage** : Store in a well-ventilated place. Keep cool. Store containers in a safe place.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations. Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Vinyl Ester Resin

| Ingredient name | % | CAS number |
|------------------------------|-------------|------------|
| styrene | <= 38.4 | 100-42-5 |
| Proprietary | Proprietary | - |
| cobalt bis(2-ethylhexanoate) | <= 1.0 | 136-52-7 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.
Any concentration shown as exact is based on formula.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

VOC content is listed in Section 9.

Environmental composition is shown in Section 15.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention. Buffered baby shampoo will aid in removal of resin.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Harmful if inhaled. May cause respiratory irritation.
- Skin contact** : Causes skin irritation.
- Ingestion** : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Section 4. First aid measures

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use dry chemical, CO₂, water spray (fog) or foam.
- Unsuitable extinguishing media** : Do not use water jet.

Specific hazards arising from the chemical : Flammable liquid and vapor. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. The vapor/gas is heavier than air and will spread along the ground. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
halogenated compounds

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Section 6. Accidental release measures

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Absorb with an inert material and transfer the spilled material and absorbent to an appropriate waste disposal container. Wear appropriate respirator when ventilation is inadequate. Wear eye/face protection.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal. Wear appropriate respiratory protection. Wear protective clothing and eye or face protection:

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Take precautionary measures against electrostatic discharges. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Do not store above the following temperature: 38°C (100.4°F). Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use. Store containers in a safe place.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Section 8. Exposure controls/personal protection

| Ingredient name | Exposure limits |
|---|--|
| styrene | <p>ACGIH TLV (United States, 3/2017). TWA: 20 ppm 8 hours. TWA: 85 mg/m³ 8 hours. STEL: 40 ppm 15 minutes. STEL: 170 mg/m³ 15 minutes.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 50 ppm 8 hours. TWA: 215 mg/m³ 8 hours. STEL: 100 ppm 15 minutes. STEL: 425 mg/m³ 15 minutes.</p> <p>OSHA PEL Z2 (United States, 2/2013). TWA: 100 ppm 8 hours. CEIL: 200 ppm AMP: 600 ppm 5 minutes.</p> <p>NIOSH REL (United States, 10/2016). TWA: 50 ppm 10 hours. TWA: 215 mg/m³ 10 hours. STEL: 100 ppm 15 minutes. STEL: 425 mg/m³ 15 minutes.</p> |
| Proprietary cobalt bis(2-ethylhexanoate) | <p>None.</p> <p>ACGIH TLV (United States, 3/2017). TWA: 0.02 mg/m³, (as Co) 8 hours.</p> |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Various
- Odor** : Aromatic. Sweetish.
- Odor threshold** : 0.1 ppm
- pH** : Not applicable.
- Melting point** : Not available.
- Boiling point** : 145°C (293°F)
- Flash point** : Closed cup: 31°C (87.8°F)
- Evaporation rate** : <1 (butyl acetate = 1)
- Lower and upper explosive (flammable) limits** : Lower: 0.9%
Upper: 6.8%
- Vapor pressure** : 0.67 kPa (5 mm Hg) [room temperature]
- Vapor density** : 3.6 [Air = 1]
- Relative density** : 0.9 to 1.3
- Solubility** : Not available.
- Solubility in water** : Not applicable.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Viscosity** : Not available.
- VOC content** : 40.3 % (w/w) As shipped, including monomers and additives.

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Hazardous reactions or instability may occur under certain conditions of storage or use.
- Conditions to avoid** : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Do not allow vapor to accumulate in low or confined areas.

Section 10. Stability and reactivity

Hazardous polymerization may occur under certain conditions of storage or use. Keep away from heat and direct sunlight. Keep away from heat and flame. Keep away from oxidizing agents.

- Incompatible materials** : Reactive or incompatible with the following materials:
oxidizing materials
- Reactive or incompatible with the following materials: metals, acids and alkalis.
Incompatible with alkali metals. Incompatible with some alkalis. Incompatible with some strong acids. Incompatible with copper alloys, brass.

- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|--|-----------------------|---------|-------------------------|----------|
| styrene | LC50 Inhalation Gas. | Rat | 2770 ppm | 4 hours |
| | LC50 Inhalation Vapor | Rat | 11800 mg/m ³ | 4 hours |
| Proprietary cobalt bis(2-ethylhexanoate) | LD50 Oral | Rat | 2650 mg/kg | - |
| | LD50 Oral | Rat | 8210 mg/kg | - |
| | LD50 Dermal | Rabbit | >5 g/kg | - |
| | LD50 Oral | Rat | 1.22 g/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-------------------------|-------------|
| styrene | Eyes - Mild irritant | Human | - | 50 parts per million | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 100 milligrams | - |
| | Eyes - Severe irritant | Rabbit | - | 100 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 500 milligrams | - |
| Proprietary | Skin - Moderate irritant | Rabbit | - | 100 Percent | - |
| | Eyes - Mild irritant | Rabbit | - | 0.1 Milliliters | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 0.5 milligrams | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

- Conclusion/Summary** : Styrene manufacturers have determined that the weight of evidence for the carcinogenicity of this substance does not meet the criteria for classification.

Styrene is listed by IARC as a possible carcinogen to humans (Group 2B) based on "limited evidence" in humans, "limited evidence" in animals and "other relevant data". The United States NTP listed styrene as reasonably anticipated to be a human carcinogen based on "limited evidence" from studies in humans, "sufficient evidence" from studies in experimental animals, and supporting data on mechanisms of carcinogenesis. The significance of these results for humans has not been established

1967

Section 11. Toxicological information

through risk assessment.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|------------------------------|------|------|--|
| styrene | - | 2B | Reasonably anticipated to be a human carcinogen. |
| cobalt bis(2-ethylhexanoate) | - | 2B | Reasonably anticipated to be a human carcinogen. |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|---------|------------|-------------------|------------------------------|
| styrene | Category 3 | Not applicable. | Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|---------|------------|-------------------|----------------|
| styrene | Category 1 | Inhalation | hearing organs |

A study of long term effects of workers exposed to styrene levels in the range of 25-35 ppm for an 8-hour TWA indicated a possible mild hearing loss.

Aspiration hazard

| Name | Result |
|---------|--------------------------------|
| styrene | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Harmful if inhaled. May cause respiratory irritation.
- Skin contact** : Causes skin irritation.
- Ingestion** : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
reduced fetal weight
increase in fetal deaths
skeletal malformations

Section 11. Toxicological information

- Skin contact** : Adverse symptoms may include the following:
 irritation
 redness
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

- General** : Causes damage to organs through prolonged or repeated exposure.
- Carcinogenicity** : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.
- Mutagenicity** : May cause genetic defects.
- Teratogenicity** : Suspected of damaging the unborn child.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : Suspected of damaging fertility.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|---------------------|--------------|
| Oral | 6937.1 mg/kg |
| Inhalation (gases) | 7251.2 ppm |
| Inhalation (vapors) | 30.89 mg/l |

Section 12. Ecological information

Toxicity

Section 12. Ecological information

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|----------------------------------|---|----------|
| styrene | Acute EC50 1400 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 720 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 4700 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 52 mg/l Marine water | Crustaceans - Artemia salina | 48 hours |
| | Acute LC50 4020 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Chronic NOEC 63 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |

Persistence and degradability

| Product/ingredient name | Test | Result | Dose | Inoculum |
|-------------------------|------|--------------------------|------|----------|
| styrene | OECD | 70 % - Readily - 28 days | - | - |

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| styrene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|------------------------------|--------------------|-------|-----------|
| styrene | 0.35 | 13.49 | low |
| Proprietary | -0.61 | - | low |
| cobalt bis(2-ethylhexanoate) | - | 15600 | high |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | Mexico Classification | TDG Classification | IATA | IMDG |
|----------------------------|--|--|--|---|--|
| UN number | UN1866 | UN1866 | UN1866 | UN1866 | UN1866 |
| UN proper shipping name | RESIN SOLUTION | RESIN SOLUTION | RESIN SOLUTION | RESIN SOLUTION | RESIN SOLUTION |
| Transport hazard class(es) | 3  | 3  | 3  | 3  | 3  |
| Packing group | III | III | III | III | III |
| Environmental hazards | No. | No. | No. | No. | No. |

Additional information

DOT Classification : **Reportable quantity** 2617.8 lbs / 1188.5 kg [285.42 gal / 1080.4 L]. Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements.

TDG Classification : Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.18-2.19 (Class 3).

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) PAIR:** 4-tert-butylpyrocatechol; N,N-dimethylaniline; triethyl phosphate
TSCA 8(a) CDR Exempt/Partial exemption: Not determined
TSCA 8(c) calls for record of SAR: triethyl phosphate
Commerce control list precursor: dimethyl methylphosphonate
Clean Water Act (CWA) 311: styrene

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Styrene
 Cobalt Compounds
 N,N-Diethyl aniline

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

Section 15. Regulatory information

SARA 311/312

- Classification** :
- FLAMMABLE LIQUIDS - Category 3
 - ACUTE TOXICITY (inhalation) - Category 4
 - SKIN IRRITATION - Category 2
 - EYE IRRITATION - Category 2A
 - GERM CELL MUTAGENICITY - Category 1
 - CARCINOGENICITY - Category 2
 - TOXIC TO REPRODUCTION (Fertility) - Category 2
 - TOXIC TO REPRODUCTION (Unborn child) - Category 2
 - SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
 - SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (hearing organs) - Category 1

SARA 313

| | Product name | CAS number | % |
|--|------------------------------|------------|---------|
| Form R - Reporting requirements | styrene | 100-42-5 | <= 39.0 |
| | cobalt bis(2-ethylhexanoate) | 136-52-7 | <= 1.0 |
| Supplier notification | styrene | 100-42-5 | 38.20 |
| | cobalt bis(2-ethylhexanoate) | 136-52-7 | 0.12 |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

Any concentration shown as exact is based on formula.

State regulations

- Massachusetts** : The following components are listed: STYRENE; PHENYLETHYLENE
- New York** : The following components are listed: Styrene
- New Jersey** : The following components are listed: STYRENE MONOMER; BENZENE, ETHENYL-; COBALT compounds
- Pennsylvania** : The following components are listed: BENZENE, ETHENYL-; COBALT COMPOUNDS
- California Prop. 65** : The following components are listed. For more information go to www.P65Warnings.ca.gov. Styrene

Inventory list

- Australia** : All components are listed or exempted.
- Canada** : All components are listed or exempted.
- China** : All components are listed or exempted.
- Europe** : Not determined.
- Japan** : **Japan inventory (ENCS)**: Not determined.
Japan inventory (ISHL): Not determined.
- Malaysia** : Not determined.
- New Zealand** : All components are listed or exempted.
- Philippines** : All components are listed or exempted.
- Republic of Korea** : All components are listed or exempted.
- Taiwan** : All components are listed or exempted.
- Thailand** : Not determined.
- Turkey** : Not determined.
- United States** : All components are listed or exempted.
- Viet Nam** : Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 2 |
| Flammability | | 3 |
| Physical hazards | | 1 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE LIQUIDS - Category 3 | On basis of test data |
| ACUTE TOXICITY (inhalation) - Category 4 | Calculation method |
| SKIN IRRITATION - Category 2 | Calculation method |
| EYE IRRITATION - Category 2A | Calculation method |
| GERM CELL MUTAGENICITY - Category 1 | Calculation method |
| CARCINOGENICITY - Category 2 | Calculation method |
| TOXIC TO REPRODUCTION (Fertility) - Category 2 | Calculation method |
| TOXIC TO REPRODUCTION (Unborn child) - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (hearing organs) - Category 1 | Calculation method |

History

| | | |
|---------------------------------------|---|---|
| Date of printing | : | 9/4/2018 |
| Date of issue/Date of revision | : | 9/4/2018 |
| Date of previous issue | : | No previous validation |
| Version | : | 1 |
| | | New form 08-2018 |
| Prepared by | : | Health, Safety and Environmental Department |

Section 16. Other information

For questions about the SDS, contact : iasafety@ip-corporation.com

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations

References :

- 29 CFR 1910.1200 Hazard Communication Standard, March 2012
- CCR Title 27 Division 4 Office of Environmental Health Hazard Assessment (California Prop. 65)
- American Composites Manufacturers Association
- Styrene Information and Research Center

✔ Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SECTION 1: Identification of the substance/mixture and of the company/undertaking
1.1. Product identifier

Product form : Mixture
 Trade name : CIP 150® Alkaline Process & Research Cleaner
 Product code : 1D15

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Alkaline Cage Wash Detergent
 Use of the substance/mixture : For industrial and institutional use only. Not for home use.

1.3. Details of the supplier of the safety data sheet

STERIS Corporation
 P. O. Box 147, St. Louis, MO 63166, US
 Telephone Number for Information: 1-800-444-9009 (Customer Service-Scientific Products)

1.4. Emergency telephone number

Emergency number : US Emergency Telephone No.1-314-535-1395 (STERIS); 1-800-424-9300 (CHEMTREC)

SECTION 2: Hazards identification
2.1. Classification of the substance or mixture
GHS-US classification

Acute Tox. 4 (Oral) H302
 Skin Corr. 1A H314
 Eye Dam. 1 H318

2.2. Label elements
GHS-US labelling

Hazard pictograms (GHS-US) :



GHS05

GHS07

Signal word (GHS-US) :

: Danger

Hazard statements (GHS-US) :

: H302 – Harmful if swallowed.
 H314 – Causes severe skin burns and eye damage.
 H318 – Causes serious eye damage.

Precautionary statements (GHS-US) :

: P260 – Do not breathe mist, spray, vapors.
 P264 – Wash hands thoroughly after handling.
 P270 – Do not eat, drink or smoke when using this product.
 P280 – Wear eye protection, protective clothing, protective gloves.
 P301+P330+P331 – IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
 P303+P361+P353 – IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
 P304+P340 – IF INHALED: Remove person to fresh air and keep comfortable for breathing
 P305+P351+P338 – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 P310 – Immediately call a POISON CENTER/doctor.
 P363 – Wash contaminated clothing before reuse.

2.3. Other hazards

No additional information available.

2.4. Unknown acute toxicity (GHS-US)

No data available.

SECTION 3: Composition/information on ingredients**3.1. Substance**

Not applicable.

3.2. Mixture

| Name | Product identifier | % | GHS-US classification |
|---------------------|--|---------|-----------------------------|
| Potassium hydroxide | (CAS No) 1310-58-3 (REACH No) 01-2119487136-33-0057 | 10 - 15 | H302 Skin Corr. 1A, H314 |
| Sodium hypochlorite | (CAS No) 7681-52-9 | 1 - 5 | Skin Corr. 1B, H314 |

Full text of H-phrases: see Section 16.

SECTION 4: First aid measures**4.1. Description of first aid measures**

- First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).
- First-aid measures after inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, give artificial respiration. Get medical attention.
- First-aid measures after skin contact : Immediately flush skin with plenty of water for at least 15 minutes. Remove/Take off immediately all contaminated clothing. Obtain medical attention.
- First-aid measures after eye contact : In case of contact with eyes flush immediately with plenty of flowing water for 10 to 15 minutes holding eyelids apart and consult an ophthalmologist. Remove contact lenses, if present and easy to do. Continue rinsing. Seek medical attention immediately.
- First-aid measures after ingestion : If swallowed, rinse mouth with water (only if the person is conscious). Immediately call a POISON CENTER or doctor/physician. Do NOT induce vomiting. Give water to drink if victim completely conscious/alert.

4.2. Most important symptoms and effects, both acute and delayed

- Symptoms/injuries : Causes severe skin burns and eye damage.
- Symptoms/injuries after inhalation : Inhalation of mists is extremely irritating to mucous membranes and upper respiratory tract.
- Symptoms/injuries after skin contact : Caustic burns/corrosion of the skin.
- Symptoms/injuries after eye contact : Causes serious eye damage.
- Symptoms/injuries after ingestion : Swallowing a small quantity of this material will result in serious health hazard. Although ingestion is an unlikely route of entry, ingestion will cause corrosion of the mouth and the upper gastrointestinal tract. Swelling of the tissues in the throat and mouth may result in extreme difficulty in swallowing. Significant swelling may restrict air passages. In all cases of ingestion, the risk of aspiration into the lungs exists. Entry into the lungs can cause permanent damage to the lungs resulting in pulmonary edema. This condition may lead to death.

4.3. Indication of any immediate medical attention and special treatment needed

No additional information available.

SECTION 5: Firefighting measures**5.1. Extinguishing media**

- Suitable extinguishing media : Use extinguishing media appropriate for surrounding fire. Foam. Dry powder. Carbon dioxide. Water spray.

5.2. Special hazards arising from the substance or mixture

No additional information available.

5.3. Advice for firefighters

- Firefighting instructions : Exercise caution when fighting any chemical fire. Prevent fire-fighting water from entering environment.
- Protective equipment for firefighters : Use self-contained breathing apparatus. Do not enter fire area without proper protective equipment, including respiratory protection.
- Other information : May react with soft metals to evolve flammable hydrogen gas. Thermal decomposition generates: Corrosive vapors. Fume. Carbon monoxide. CO₂, HCl, Cl₂, HOCl, hydrogen gas.

CIP 150®

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : Do not breathe fumes, vapors. Avoid contact with skin, eyes and clothes. Use personal protective equipment as required. Stop leak if safe to do so.

6.1.1. For non-emergency personnel

Protective equipment : Wear suitable protective clothing. For further information refer to Section 8: Exposure-controls/personal protection.

Emergency procedures : Stop leak if safe to do so. Evacuate unnecessary personnel.

6.1.2. For emergency responders

Protective equipment : Equip cleanup crew with proper protection.

Emergency procedures : Ventilate area.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters. Avoid release to the environment.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams. Ensure all national/local regulations are observed. Neutralize spill carefully with any weak acid and flush remainder with plenty of water. Consult hazardous waste contractor for disposal of large amounts. Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Collect in closed containers for disposal. Store away from other materials. Wash contaminated areas with large quantities of water to a sanitary sewer, if in accordance with local, state or national legislation.

6.4. Reference to other sections

See Heading 8. Exposure controls and personal protection.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Product for industrial use only. Read label before use. Avoid contact with skin, eyes and clothing. Avoid breathing mist or vapor. Provide good ventilation in process area to prevent formation of vapor. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.

Hygiene measures : Wash hands thoroughly after handling. Take care for general good hygiene and housekeeping. Do not eat, drink or smoke when using this product. Wash contaminated clothing before reuse. Separate working clothes from town clothes. Launder separately.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : A washing facility/water for eye and skin cleaning purposes should be present. Provide adequate ventilation. Comply with applicable regulations.

Storage conditions : Keep only in the original container in a cool, well ventilated place. Keep out of reach of children. Keep away from incompatible materials. Keep container closed when not in use.

Incompatible materials : Acids, soft metals, oxidizers, organic halogen compounds. Contact with some metals such as magnesium, aluminum, zinc (galvanized), tin, chromium, brass and bronze may generate hydrogen. Reacts violently with acids liberating irritating gas. May evolve flammable hydrogen gas on contact with soft metals.

7.3. Specific end use(s)

No additional information available.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Potassium hydroxide (1310-58-3)

| | | |
|-----------|------------------------------------|---------------------|
| USA ACGIH | ACGIH Ceiling (mg/m ³) | 2 mg/m ³ |
|-----------|------------------------------------|---------------------|

8.2. Exposure controls

Appropriate engineering controls : Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of mists and/or vapors below the recommended exposure limits. Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure.

CIP 150[®]

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

Personal protective equipment : Personal protective equipment should be selected based upon the conditions under which this product is handled or used. protective clothing. Protective clothing. Gloves. Protective goggles. For certain operations, additional Personal Protection Equipment (PPE) may be required.



Hand protection : Wear rubber gloves.
Eye protection : Wear chemical goggles or face shield.
Skin and body protection : Wear suitable protective clothing. Rubber apron, boots.
Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment.
Other information : Do not eat, drink or smoke during use.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Liquid
Appearance : Clear
Color : Light yellow
Odor : Chlorine odor
Odor threshold : No data available
pH : No data available
pH solution : 11.8 - 12.2 (1% solution)
Relative evaporation rate (butyl acetate=1) : No data available
Melting point : No data available
Freezing point : No data available
Boiling point : No data available
Flash point : No data available
Auto-ignition temperature : No data available
Decomposition temperature : No data available
Flammability (solid, gas) : Non-flammable
Vapor pressure : No data available
Relative vapor density at 20 °C : No data available
Relative density : No data available
Density : ca. 1.16 g/ml Specific Gravity
Solubility : Water: Completely soluble
Log Pow : No data available
Log Kow : No data available
Viscosity, kinematic : No data available
Viscosity, dynamic : No data available
Explosive properties : No data available
Oxidizing properties : No data available
Explosive limits : No data available.

9.2. Other information

No additional information available.

SECTION 10: Stability and reactivity

10.1. Reactivity

No additional information available.

10.2. Chemical stability

Stable under normal conditions of use.

CIP 150®

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

keep away from incompatible materials. Heat. Direct sunlight.

10.5. Incompatible materials

Strong oxidizers. Strong acids. Strong bases.

10.6. Hazardous decomposition products

CO₂, HCl, Cl₂, HOCl, hydrogen gas. Fumes.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Corrosive to mouth, throat, and stomach.

| Potassium hydroxide (1310-58-3) | |
|---------------------------------|--------------------------|
| LD50 oral rat | 214 mg/kg |
| ATE CLP (oral) | 500.000 mg/kg bodyweight |

| Sodium hypochlorite (7681-52-9) | |
|---------------------------------|---------------------------|
| LD50 oral rat | 8200 mg/kg |
| LD50 dermal rabbit | > 10000 mg/kg |
| ATE CLP (oral) | 8200.000 mg/kg bodyweight |

| Potassium silicate (1312-76-1) | |
|--------------------------------|---------------------------|
| LD50 oral rat | 1300 mg/kg |
| ATE CLP (oral) | 1300.000 mg/kg bodyweight |
| IARC group | 3 - Not classifiable |

| | |
|---|--|
| Skin corrosion/irritation | : Causes severe skin burns pH: ca. 12 |
| Serious eye damage/irritation | : Causes serious eye damage pH: ca. 12 |
| Respiratory or skin sensitisation | : Not classified Based on available data, the classification criteria are not met |
| Germ cell mutagenicity | : Not classified Based on available data, the classification criteria are not met |
| Carcinogenicity | : Not classified Based on available data, the classification criteria are not met |
| Reproductive toxicity | : Not classified Based on available data, the classification criteria are not met |
| Specific target organ toxicity (single exposure) | : Not classified Based on available data, the classification criteria are not met |
| Specific target organ toxicity (repeated exposure) | : Not classified Based on available data, the classification criteria are not met |
| Aspiration hazard | : Not classified Based on available data, the classification criteria are not met |
| Potential Adverse human health effects and symptoms | : Harmful if swallowed. |

SECTION 12: Ecological information

12.1. Toxicity

Ecology - water : Very toxic to aquatic life.

| CIP 150® Alkaline Process & Research Cleaner | |
|--|--|
| LC50 fishes 1 | > 750 mg/l (Fish - Pimephales promelas) (10% Solution) |

CIP 150®

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

| Sodium hypochlorite (7681-52-9) | |
|---------------------------------|--|
| LC50 fishes 1 | 0.06 - 0.11 mg/l (Exposure time: 96 h - Species: Pimephales promelas [Flow-through]) |
| EC50 Daphnia 1 | 0.033 - 0.044 mg/l (Exposure time: 48 h - Species: Daphnia magna [Static]) |
| LC50 fish 2 | 4.5 - 7.6 mg/l (Exposure time: 96 h - Species: Pimephales promelas [Static]) |

12.2. Persistence and degradability

| CIP 150® Alkaline Process & Research Cleaner | |
|--|---|
| Persistence and degradability | The surfactant(s) contained in this preparation complies (comply) with the biodegradability criteria as laid down in Regulation (EC) No. 648/2004 on detergents. Data to support this assertion are held at the disposal of the competent authorities of the Member States and will be made available to them, at their direct request or at the request of a detergent manufacturer. |

12.3. Bioaccumulative potential

| CIP 150® Alkaline Process & Research Cleaner | |
|--|-------------------------------|
| Bioaccumulative potential | Not established. |
| Potassium hydroxide (1310-58-3) | |
| Log Pow | 0.65 |
| Potassium silicate (1312-76-1) | |
| BCF fish 1 | (no bioaccumulation expected) |

12.4. Mobility in soil

No additional information available.

12.5. Other adverse effects


Other information : Avoid release to the environment.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

| | |
|--------------------------------|--|
| Waste disposal recommendations | : Dispose in a safe manner in accordance with local/national regulations. Do not contaminate water with the product or its container (Do not clean application equipment near surface water/Avoid contamination via drains from farmyards and roads.) High concentration in receiving water will injure aquatic life by pH effect. Do not re-use empty containers. |
| Additional information | : Never return unused material to original container. Empty containers should be thoroughly rinsed with large quantities of clean water. Dispose of empty containers and wastes safely. Containers may be send for reconditioning, recycling. Dispose in a safe manner in accordance with local/national regulations. Small spills may be flushed to a sanitary sewer with copious amounts of water, if in accordance with local, state or national legislation. |
| Ecology - waste materials | : Avoid release to the environment. |

SECTION 14: Transport information

| | |
|---|---|
| In accordance with DOT | |
| Transport document description | : UN3266 CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S. (Potassium Hydroxide and Sodium Hypochlorite Solution) 8, III |
| UN-No.(DOT) | : 3266 |
| DOT NA no. | : UN3266 |
| DOT Proper Shipping Name | : CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S. |
| Department of Transportation (DOT) Hazard Classes | : 8 - Class 8 - Corrosive material 49 CFR 173.136 |
| Hazard labels (DOT) | : 8 - Corrosive |
| |  |
| Packing group (DOT) | : III - Minor Danger |

CIP 150®

Alkaline Process & Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

Additional information

Special transport precautions : NOT approved for air shipment.

ADR

No additional information available.

Transport by sea

No additional information available.

Air transport

NOT approved for air shipment.

SECTION 15: Regulatory information

15.1. US Federal regulations

Potassium hydroxide (1310-58-3)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

RQ (Reportable quantity, Section 304 of EPA's List of Lists) : 1000 lb

Sodium hypochlorite (7681-52-9)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

15.2. US State regulations

No additional information available.

SECTION 16: Other information

Revision date : 10/29/2018

Other information : None.

Full text of H-phrases:

| | |
|---------------------|---|
| Acute Tox. 4 (Oral) | Acute toxicity (oral), Category 4 |
| Eye Dam. 1 | Serious eye damage/eye irritation, Category 1 |
| Skin Corr. 1A | Skin corrosion/irritation, Category 1A |
| Skin Corr. 1B | Skin corrosion/irritation, Category 1B |
| H302 | Harmful if swallowed |
| H314 | Causes severe skin burns and eye damage |
| H318 | Causes serious eye damage |

NFPA health hazard


: 3 - Short exposure could cause serious temporary or residual injury even though prompt medical attention was given.

NFPA fire hazard

: 1 - Must be preheated before ignition can occur.

NFPA reactivity

: 1 - Normally stable, but can become unstable at elevated temperatures and pressures or may react with water with some release of energy, but not violently.



SDS US

The information on this sheet is not a specification and does not guarantee specific properties. The information is intended to provide general knowledge as to health and safety based upon our knowledge of the handling, storage and use of the product. It is not applicable to unusual or non-standard uses of the product or where instruction or recommendations are not followed.



SAFETY DATA SHEET

1. Identification

| | |
|---|--|
| Product identifier | HERCULES CLEAR, PURPLE, AND UNPURPLE PRIMER |
| Other means of identification | |
| SDS number | 7402E |
| Synonyms | Part Numbers: Clear - 60453, 60458, 60460, 60465, 60470, Purple - 60403, 60413, 60415, 60420, 60425 Un-Purple - 60445, 60447 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | HCC Holdings, Inc. an Oatey Affiliate |
| Address | 4700 West 160th Street Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |
| Label elements | | |



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC) Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen.

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------|------------|-------|
| Acetone | 67-64-1 | 30-60 |
| Cyclohexanone | 108-94-1 | 15-40 |
| Furan, Tetrahydro- | 109-99-9 | 10-30 |
| Methyl ethyl ketone | 78-93-3 | 10-30 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

Skin contact Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Ingestion Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis.

Most important symptoms/effects, acute and delayed Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain.

Indication of immediate medical attention and special treatment needed Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Unsuitable extinguishing media Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Specific methods Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 50 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 200 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 50 ppm |
| | STEL | 300 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------------------|-----------|-----------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | | 250 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 590 mg/m3 |
| | | 200 ppm |
| | STEL | 885 mg/m3 |
| | TWA | 300 ppm |
| | 590 mg/m3 | |
| | | 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9) Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Face shield is recommended. Wear safety glasses with side shields (or goggles).

| | |
|---------------------------------------|---|
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

| | |
|---|----------------------------------|
| Appearance | Translucent. |
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Clear. or Purple |
| Odor | Solvent. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 151 °F (66.11 °C) |
| Flash point | 14.0 - 23.0 °F (-10.0 - -5.0 °C) |
| Evaporation rate | 5.5 - 8 |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.82 - 0.86 |
| Solubility(ies) | |
| Solubility (water) | Not available. |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | < 100 cP |
| Other information | |
| Bulk density | 7 lb/gal |
| VOC (Weight %) | < 550 g/l SQACMD Method 304 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |

Hazardous decomposition products No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics

Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

Cyclohexanone (CAS 108-94-1) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

| | |
|---|---|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|-----------------------------------|--|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquids, n.o.s. (Methyl ethyl ketone RQ = 25063 LBS, Acetone RQ = 12522 LBS) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions IB2, T7, TP1, TP8, TP28
Packaging exceptions 150
Packaging non bulk 202
Packaging bulk 242

IATA

UN number UN1993
UN proper shipping name Flammable liquid, n.o.s. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3H
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1993
UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards
Marine pollutant No.
EmS F-E, S-E
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

Methyl ethyl ketone (CAS 78-93-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|-------------------------------|
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 17-December-2014

Revision date -

Version # 01

HMIS® ratings Health: 2
Flammability: 3
Physical hazard: 0

Disclaimer The information in the sheet was written based on the best knowledge and experience currently available. HCC Holdings Inc. an Oatey Affiliate cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.



GHS SAFETY DATA SHEET

WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: **NOV 2018**
Supersedes: **OCT 2018**




SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe
PRODUCT USE: Low VOC Solvent Cement for CPVC Plastic Pipe
SUPPLIER: **MANUFACTURER:** IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

| GHS CLASSIFICATION: | | Health | Environmental | Physical |
|---------------------|------------|-------------------|---------------|------------------|
| Acute Toxicity: | Category 4 | Acute Toxicity: | None Known | Flammable Liquid |
| Skin Irritation: | Category 3 | Chronic Toxicity: | None Known | Physical |
| Skin Sensitization: | NO | | | Category 2 |
| Eye: | Category 2 | | | |

GHS LABEL:    **Signal Word:** **Danger** **WHMIS CLASSIFICATION:** CLASS B, DIVISION 2
CLASS D, DIVISION 2B

| Hazard Statements | Precautionary Statements |
|--|--|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H332: Harmful if inhaled H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer EUH019: May form explosive peroxides EUH066: Repeated exposure may cause skin dryness or cracking | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P337+P313: Get medical advice/attention P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------------------|----------|-----------|------------------------------|------------------------------|
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 01-2119444314-46-0000 | 30 - 60 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 01-2119457290-43-0000 | 5 - 25 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 5 - 20 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

Likely Routes of Exposure: Inhalation, Eye and Skin Contact

Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.

Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog.
Unsuitable Extinguishing Media: Water spray or stream.
Exposure Hazards: Inhalation and dermal contact
Combustion Products: Oxides of carbon, hydrogen chloride and smoke

| | HMIS | NFPA | |
|--------------|------|------|------------|
| Health | 2 | 2 | 1-Slight |
| Flammability | 3 | 3 | 2-Moderate |
| Reactivity | 0 | 0 | 3-Serious |
| PPE | B | | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).
Do not eat, drink or smoke while handling.

Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.

Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.

Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 33°C (90°F) and away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH 8-hr TLV | ACGIH 15-min STEL | OSHA 8-hr PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8-hr PEL | CAL/OSHA Ceiling | CAL/OSHA 15-min STEL |
|------------------|---------------------------|-------------------|----------------------|------------------|---------------------|---------------------|----------------------|---------------------|-------------------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: NOV 2018
Supersedes: OCT 2018

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|--------------------------------|---|
| Appearance: | Orange or gray, heavy syrupy liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 66°C (151°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 66°C (151°F) Based on first boiling component: THF | Flammability Limits: | LEL: 1.1% based on Cyclohexanone |
| Flash Point: | -20°C (-4°F) TCC based on THF | UEL: 11.8% based on THF | |
| Specific Gravity: | 0.995 @23°C (73°F) | Vapor Pressure: | 129 mm Hg @ 20°C (68°F) based on THF |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Vapor Density: | >2 (Air = 1) |
| Partition Coefficient n-octanol/water: | Not Available | Other Data: Viscosity: | Heavy bodied |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 490 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | Not Established |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 490 g/l. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

| EXCEPTION for Ground Shipping |
|--|
| DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package. |
| Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" . |

| TDG INFORMATION | |
|---------------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|-----------------------------|---|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | R66: | Repeated exposure may cause skin dryness or cracking |
| Risk Phrases: | R11: Highly flammable. R36/37: Irritating to eyes and respiratory system. | R67: | Vapors may cause drowsiness and dizziness |
| Safety Phrases: | S2: Keep out of the reach of children S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. | S25: | Avoid contact with eyes. |
| | | S26: | In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. |
| | | S33: | Take precautionary measures against static discharges. |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 11/27/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for CPVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

ALL SEASON T30 SELECT™

MATERIAL SAFETY DATA SHEET

Effective Date: 01/01/2014

4ALL SEASON T30 SELECT is a diester based synthetic lubricant formulated for use in Ingersoll-Rand Type 30 Reciprocating Air compressors.

1. PRODUCT IDENTIFICATION: Mixture-Chemical Family: Diester

2. HAZARDOUS INGREDIENTS: The components of this product are not listed as hazardous or toxic according to OSHA (29 CFR OSHA 1910.1200), NTP, IARC and SARA 313.

Hazardous Materials Identification System (HMIS):

| | | | | | |
|--------|--------------|------------|-------|---------------------|------------|
| Health | Flammability | Reactivity | Basis | Hazard Ratings Key: | |
| 0 | 1 | 0 | — | 4 = Highest | 0 = Lowest |

3. PHYSICAL DATA:

Boiling Point: N/A

Viscosity: 96.9 cSt @ 40°C

Vapor Density: Greater than air

Solubility in Water: Negligible

Appearance: Light straw colored fluid

Odor: Mild ester odor

Pour Point: -40°F

Specific Gravity: 0.92

Percent Volatile: Negligible

Evaporation Rate: Not volatile, slower than Butyl Acetate

4. FIRE AND EXPLOSION HAZARD DATA:

Flash Point: 480°F (249°C)

Method Used: ASTM D92

Flammable Limits: Not established

Fire Fighting Media: Water spray, dry chemical, foam or carbon dioxide

Fire Fighting Procedures: Use water to keep fire-exposed container cool. Wear self-contained positive pressure breathing apparatus and full protective gear to fight fire. Cool with water spray.

Special Fire and Explosion Hazard: None expected

5. HEALTH HAZARD: This product does not contain any components considered to be health hazards under the OSHA Hazard Communication Standards 29CFR 1910.1200 or under the WHMIS Controlled Product Regulations in Canada.

Effects on exposure: Prolonged or repeated skin contact may tend to remove natural skin oils, thus leading to possible irritation and dermatitis.

Medical Conditions Generally Aggravated by Exposure: May aggravate previous skin condition.

Skin Contact: With repeated contact, a skin defatter. May develop redness or mild irritation.

Skin Absorption: Not established

Ingestion (Acute): Can cause gastrointestinal irritation. No hazard expected in normal use.

Eyes: Mild irritation.

Systemic & Other Effects: Not established

All Season T30 Select™

6. REACTIVITY DATA:

Stability: Stable under normal storage conditions

Incompatibility: Avoid contact with strong oxidizers such as liquid chlorine, concentrated oxygen, sodium hypochlorite or calcium hypochlorite.

Hazardous Decomposition: Burning will produce toxic fumes.

Hazardous Polymerization: Will not occur under normal conditions

Conditions to Avoid: Open flames

7. HANDLING AND STORAGE:

Exposure Guidelines: Not Established. OSHA TLV/TWA 5mg/m³ oil mist can be used.

Ventilation: Local exhaust to capture vapor, mist or fumes, if necessary.

Respiratory Protection: Use NIOSH-approved equipment: filter, fume or mist respirator under misty conditions.

Skin Protection: For prolonged use, use chemical resistant gloves to minimize skin contact.

Eye Protection: Use safety glasses with side shields.

Special Handling: If splashing occurs, use apron. Do not get in eyes, on skin or clothing. Wash thoroughly after handling.

Storage: Store in a cool, dry place. Keep containers closed when not in use.

8. ENVIRONMENTAL AND DISPOSAL INFORMATION:

Steps to be Taken in Case of Spills: Ventilate area. Prevent spread of spill. Absorb with sand or an inert, absorbing material. Sweep or scoop up and place in a disposal container. Do not contaminate any lakes, ponds, streams, ground water or soil.

Waste Disposal Method: Dispose of in accordance with local, state or federal laws.

9. FIRST AID:

Eyes: Flush with water for at least 15 minutes. Hold eyelids open while flushing. If irritation persists get medical attention.

Skin: Remove contaminated clothing and wash skin thoroughly with soap and water.

Ingestion: Drink 8-10 ounces of water. Do not induce vomiting. Get medical attention immediately.

Inhalation: Remove to fresh air. Get medical attention if discomfort persists.

10. PREPARED BY: Ingersoll-Rand

Note: This information is furnished without warranty, representation, inducement or license of any kind, except that it is accurate to the best of Ingersoll-Rand's knowledge or obtained from sources believed by Ingersoll-Rand to be accurate, and Ingersoll-Rand does not assume any legal responsibility for use or reliance upon same. Customers are encouraged to conduct their own tests. Before using any product, READ ITS LABEL.

Emergency Contact:

Telephone: 704/655-4000

Ingersoll Rand Company

800-B Beaty Street

Davidson, NC 28036

SAFETY DATA SHEET

Blue Gold Industrial Cleaner

Revision Date 03/05/2020

SECTION – 1 CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME Blue Gold Industrial Cleaner **ITEM** 109
(360-MC)
PRODUCT USE Hard Surface Cleaner / Degreaser
COMPANY NAME Modern Chemical, Inc. **Office** (501) 988-1311
P.O. Box 368 **Fax** (501) 988-2229
Jacksonville AR 72078 **Web** www.bluegoldcleaner.com
EMERGENCY TELEPHONE NUMBER **INFOTRAC (800) 535-5053**

SECTION – 2 HAZARDS INFORMATION

Physical Hazards None
Health Hazards EYES-Category 1; SKIN-Category 2; STOT SINGLE EXPOSURE-Category 3
Classification (EC 1272/2008) Label In Accordance with (EC) No. 1272/2008



Irritant (skin)
Respiratory Tract Irritant



Eye Damage

----- See "Section -16" for "Hazard and Precautionary Statements with Codes" -----
Danger Causes serious eye damage, Causes skin irritation, May cause respiratory irritation, Keep out of reach of children, May be harmful if swallowed, Do not get in eyes, on skin, or clothing, and inhalation of mist, Use personal protective equipment as required, Wash thoroughly after handling, Avoid release into the environment

SECTION – 3 COMPOSITION INFORMATION (Exact percentage of the listed chemicals of composition has been withheld as a trade secret)

| CHEMICAL NAME | COMMON NAME AND SYNONYMS | CAS # | IMPURITIES | PERCENT |
|----------------------------------|-----------------------------------|------------|------------|---------|
| 2-(2-Butoxyethoxy)ethanol | Diethylene Glycol Monobutyl Ether | 112-34-5 | | 7 - 10% |
| Sodium Metasilicate Pentahydrate | Disodium Trioxosilicate | 10213-79-3 | | 4 - 9% |
| Nonylphenol Ethoxylate | Nonylphenyl-polyethylene glycol | 9016-45-9 | | 1 – 5% |

SECTION – 4 FIRST AID MEASURES

EYE CONTACT Immediately flush eyes with cold water for at least 15 minutes while lifting upper and lower eyelids, Remove contact lenses if present and easy to do without injury to the eye and continue rinsing, If irritation persists obtain immediate medical attention, preferably from an ophthalmologist

SKIN CONTACT Wash contaminated skin with plenty of soap and water, Remove any contaminated clothing and wash before reuse, If irritation is present or occurs obtain medical attention

INHALATION Move person to fresh air, if they have problem breathing, show signs of overexposure or feel unwell obtain medical attention

INGESTION DO NOT INDUCE VOMITING. If person is fully conscious, rinse mouth out and give one to two glasses of water to dilute and obtain immediate medical attention. If vomiting occurs, keep head below hips to prevent aspiration into the lungs

Aspiration Hazard Not considered to be an aspiration hazard

ACUTE SYMPTOMS OF SINGLE OVEREXPOSURE

Eyes Causes serious eye irritation, redness, tearing, pain, or possible corneal injury
Skin Can cause skin irritation, redness, drying or cracking
Inhalation Spray mist may cause mild irritation, to respiratory tract
Ingestion May be harmful if swallowed, Can cause irritation, of the mouth, throat, and esophagus

CHRONIC SYMPTOMS OF PROLONGED OR REPEATED OVEREXPOSURE

Eyes Causes serious eye irritation, redness, tearing, pain, burns, or possible eye damage
Skin Causes skin irritation, redness, burning, drying or cracking
Inhalation Spray mist may cause irritation, to nose, throat, mucus membranes or respiratory tract
Ingestion May be harmful if swallowed, Causes irritation, burning in the mouth, throat, and esophagus, Slight acute toxicity if swallowed

SECTION – 5 FIRE FIGHTING MEASURES

Extinguishing Media Not flammable: Use extinguishing media for surrounding fire
Hazardous Decomposition Burning or thermal decomposition can produce, carbon monoxide, carbon dioxide, and other toxic fumes
Reactive With Incompatible with, strong oxidizing agents, strong acids
Explosion Hazards Not applicable
Static Discharge Not applicable
Mechanical Impact Not applicable
Protective Equipment Use MSHA/NIOSH approved self-contained breathing apparatus and full protective gear

SECTION – 6 ACCIDENTAL RELEASE MEASURES

| | |
|-----------------------------|---|
| Emergency Procedures | Warn personnel of spill |
| Personal Precautions | Ventilate area, Avoid slipping on spilled product |
| Protective Equipment | Safety Glasses, Chemical Gloves and Rubber Boots |
| Containment | Use absorbent socks or pads to prevent spill from spreading |
| Clean Up Procedures | Small Spills: Use wet vacuum or mop and wringer to pick up spilled material then mop area with clean water Large Spills: Absorb spill with inert material (e.g., dry sand or earth), then place in a chemical waste container Vacuum or sweep up material and place in a disposal container |
| Disposal | Dispose of material in accordance with all State and Federal Guidelines and Regulations |

SECTION – 7 HANDLING AND STORAGE

| | |
|-------------------------------|---|
| Handling | Keep away from incompatible materials, Use appropriate safety equipment, Avoid eye and skin contact, Avoid inhalation of mist, May cause respiratory irritation, Harmful if swallowed, Wash thoroughly after handling, Avoid release to the environment |
| Storage | KEEP OUT OF REACH OF CHILDREN, Keep container closed when not in use, Store away from incompatible materials |
| Incompatible Materials | Incompatible with, strong oxidizing agents, strong acids |

SECTION – 8 EXPOSURE CONTROLS / PERSONAL PROTECTION**EXPOSURE LIMITS**

| CHEMICAL NAME | ACGIH (TWA 8) | ACGIH (STEL) | OSHA PEL (TWA 8) | OSHA (CEIL) | Significant Exposure |
|----------------------------------|------------------|--------------|------------------|-------------|----------------------|
| 2-(2-Butoxyethoxy)ethanol | 10 ppm | | | | |
| Nonylphenol Ethoxylate | None Established | | | | ED |
| Sodium Metasilicate Pentahydrate | None Established | | | | |

PERSONAL PROTECTIVE EQUIPMENT

Chemical Safety Glasses, Goggles or Face Shield



Impervious Chemical Gloves



Eye Wash and Safety Shower (Recommended)

**Ventilation**

General Ventilation

Ventilate to keep vapors of this material below the lowest ppm listed above.
If over Threshold Limit Value use a MSHA / NIOSH approved respirator

HMIS HAZARD RATINGS

| | |
|---------------------|---|
| Health | 2 |
| Flammability | 0 |
| Reactivity | 0 |
| Personal Protection | B |

SECTION – 9 PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|----------------------------|---|-----------------------------------|--------|
| Flash Point | >212°F (100°C) TAG Closed Cup | Specific Gravity / Density | 1.08 |
| Flammable Limits | ND | pH (± 0.3) | 13.0 |
| Auto-Ignition Temp. | ND | Viscosity | ND |
| Physical State | Liquid | Freeze Point | ND |
| Appearance | Clear Blue | Boiling Point | ND |
| Odor | Peppermint | Vapor Density (air=1) | ND |
| Odor Threshold | ND | Vapor Pressure (mm Hg) | ND |
| Solubility | 100% | Evaporation Rate (nBuAc=1) | ND |
| Volatiles | ND | Partition Coefficient | ND |
| VOC | 0.5% at 5% dilution / 5 gm/L VOC in 5% dilution | Molecular Weight (g/mol) | ~82.44 |
| LVP-VOC | ND | Decomposition Temperature | ND |

SECTION – 10 STABILITY AND REACTIVITY

| | |
|--|---|
| Reactivity (Specific Test Data) | None available |
| Chemical Stability | Stable when stored below 49°C (120°F) |
| Hazardous Polymerization | Will not occur |
| Conditions To Avoid | Incompatible materials |
| Incompatible Materials | Incompatible with, strong oxidizing agents, strong acids |
| Thermal Decomposition | Burning or thermal decomposition can produce, carbon monoxide, carbon dioxide, sodium oxides, silicon oxides, and other toxic fumes |

SECTION – 11 TOXICOLOGICAL INFORMATION**ROUTES OF EXPOSURE**

Eyes (Yes), Skin (Yes), Inhalation (Yes "Mist"), Ingestion (Yes)

ACUTE SYMPTOMS OF SINGLE OVEREXPOSURE

Eyes Causes serious eye irritation, redness, tearing, pain, or possible corneal injury
Skin Can cause skin irritation, redness, drying or cracking
Inhalation Spray mist may cause mild irritation, to respiratory tract
Ingestion May be harmful if swallowed, Can cause irritation, of the mouth, throat, and esophagus

CHRONIC SYMPTOMS OF PROLONGED OR REPEATED OVEREXPOSURE

Eyes Causes serious eye irritation, redness, tearing, pain, burns, or possible eye damage
Skin Causes skin irritation, redness, burning, drying or cracking
Inhalation Spray mist may cause irritation, to nose, throat, mucus membranes or respiratory tract
Ingestion May be harmful if swallowed, Causes irritation, burning in the mouth, throat, and esophagus, Slight acute toxicity if swallowed

Acute Tox Calculated **Oral:** 9,977 mg/kg **Dermal:** 15,710 mg/kg **Inhaled:** 57.5 mg/L

Acute Tox Category Not applicable (Oral >2,000 mg/kg), Not applicable (Dermal >2,000 mg/kg), Not applicable (Inhaled > 20 mg/L) Vapors

Additional Info

Target Organs Kidneys, Liver

Medical Conditions Preexisting, liver, kidney, disorders may be aggravated by exposure to this product

Notes to Physician In case of ingestion, gastric lavage with activated charcoal can be used promptly to prevent absorption

CARCINOGENIC – This product contains concentrations above 0.1% of the following:

| <u>CHEMICAL NAME</u> | <u>NTP</u> | <u>ACGIH</u> | <u>IARC</u> | <u>GHS Category</u> |
|----------------------|------------|--------------|-------------|---------------------|
| None Listed | NA | NA | NA | NA |

MUTAGENIC AND REPRODUCTIVE EFFECTS – This product contains concentrations above 0.1% of the following:

| <u>CHEMICAL NAME</u> | <u>Germ Cell Mutagenicity</u> | <u>Toxic to Reproduction</u> |
|----------------------|-------------------------------|------------------------------|
| None Listed | NA | NA |

COMPONENTS ACUTE TOXICITY

| <u>CHEMICAL NAME</u> | <u>Type</u> | <u>Form</u> | <u>Subject</u> | <u>Result Value</u> | <u>Exposure Time</u> | <u>GHS Category</u> |
|----------------------------------|-------------|-------------|----------------|---------------------|----------------------|-----------------------|
| Nonylphenol Ethoxylate | LD50 | Oral | Rat | 960 mg/kg | | 4 (>300, ≤2000 mg/kg) |
| | LD50 | Inhaled | Rat | 1.15 mg/L | 4 Hours (Mist) | 4 (>1.0, ≤5 mg/L) |
| | LD50 | Dermal | Rabbit | 2,991 mg/kg | | (>2000 mg/kg) |
| Sodium Metasilicate Pentahydrate | LD50 | Oral | Rat | 847 mg/kg | | 4 (>300, ≤2000 mg/kg) |
| | LD50 | Rat | Dermal | > 5000 mg/kg | | (>2000 mg/kg) |
| Glycol Ether DB | LD50 | Oral | Rat | 7,291 mg/kg | | (>2000 mg/kg) |
| | LD50 | Dermal | Rabbit | 2,764 mg/kg | | (>2000 mg/kg) |

SECTION – 12 ECOLOGICAL INFORMATION

| <u>CHEMICAL NAME</u> | <u>Type</u> | <u>Subject</u> | <u>Subject Latin</u> | <u>Result Value</u> | <u>Exposure Time</u> | <u>GHS Category</u> |
|----------------------------------|-------------|----------------|-----------------------|---------------------|----------------------|---------------------|
| Nonylphenol Ethoxylate | LC50 | Bluegill | (Lepomis macrochirus) | 1.0 mg/L | 96 Hours | 2 (>1, ≤10 mg/L) |
| | EC50 | Water Flea | (Daphnia magna) | 12.2 mg/L | 48 Hours | 3 (>10, ≤100 mg/L) |
| Sodium Metasilicate Pentahydrate | LC50 | Zebrafish | (Brachydanio rerio) | 210 mg/L | 96 Hours | 4 (>100 mg/L) |
| | EC50 | Water Flea | (Daphnia magna) | 1700 mg/L | 48 Hours | 4 (>100 mg/L) |
| 2-(2-Butoxyethoxy)ethanol | LC50 | Fish | (Leuciscus Idus) | 1,300 mg/L | 96 Hours | 4 (>100 mg/L) |
| | EC50 | Water Flea | (Daphnia magna) | >100 mg/L | 48 Hours | 4 (>100 mg/L) |

Presistence And Degradability This product is inherently biodegradable according to the OECD definition

Bioaccumulative Potential No data available

Mobility In Soil This product is water soluble and will move readily in soil and water

Other Adverse Effects Harmful to aquatic life

SECTION – 13 DISPOSAL CONSIDERATIONS**DO NOT DUMP INTO ANY STORM SEWERS, ON THE GROUND, OR INTO ANY BODY OF WATER****Dispose of any waste in accordance with all State and Federal Guidelines and Regulations****ENVIRONMENTAL FATE**

Under RCRA rules, it is the responsibility of the user of the product to determine, at the time of disposal, whether the material is a hazardous waste.

Chemical additions, processing or otherwise altering this material may make the waste management information presented in this SDS incomplete, inaccurate, or otherwise inappropriate.

SECTION – 14 TRANSPORT INFORMATION**DOT CLASSIFICATION****UN Number****Proper Shipping Name** n.o.s. (Chemicals) or "Limits"

Not Regulated Non Hazardous – Compounds Cleaning Liquid

| Hazard Class | Packing Group | Label Codes | Reportable Quantity (lbs) | Response Code | Marine Pollutant |
|----------------------------|----------------------------|----------------------------|----------------------------------|----------------------------|----------------------------|
| None | None | None | None | 154 | No |
| Not Restricted as per IATA | Not Restricted as per IATA | Not Restricted as per IATA | Not Restricted as per IATA | Not Restricted as per IATA | Not Restricted as per IATA |

SECTION – 15 REGULATORY INFORMATION**TSCA**

| CHEMICAL NAME | Sec 8(b) Inventory | Sec 8(d) Health And Safety | Sec 4(a) Chemical Test Rules | Sec 12(b) Export Notification |
|----------------------------------|---------------------------|-----------------------------------|-------------------------------------|--------------------------------------|
| Glycol Ethers | Yes | | | |
| Sodium Metasilicate Pentahydrate | Yes | | | |

REPORTABLE QUANTITIES

| CHEMICAL NAME | Extremely Hazardous | Reportable Quantity | Emission Reporting | | | |
|----------------------|----------------------------|----------------------------|---------------------------|--------------------|------------------|------------------------|
| CHEMICAL NAME | EPCRA TPQ Sec 302 | EPCRA RQ Sec 304 | CERCLA RQ Sec 103 | TRI Sec 313 | RCRA Code | RMP TQ Sec 112r |
| Glycol Ethers | | | Yes | | | |

SARA

| CHEMICAL NAME | Section 311 | | Section 311 / 312 Hazards | | | |
|----------------------------------|---------------------------|--------------|----------------------------------|------------------|-----------------|-----------------|
| | Hazardous Chemical | Acute | Chronic | Flammable | Pressure | Reactive |
| 2-(2-Butoxyethoxy)ethanol | Yes | Yes | Yes | | | |
| Nonylphenol Ethoxylate | Yes | Yes | | | | |
| Sodium Metasilicate Pentahydrate | Yes | Yes | | | | |

RIGHT TO KNOW

| CHEMICAL NAME | STATE | | | | | | | | | | | | | |
|----------------------------------|--------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| | CA | CT | FL | IL | LA | NJ | NY | PA | MI | MN | MA | RI | WI | |
| 2-(2-Butoxyethoxy)ethanol | | | | | | | Yes | Yes | | | | | | |
| Nonylphenol Ethoxylate | | | | | | Yes | | Yes | | | | | | |
| Sodium Metasilicate Pentahydrate | | | | | | Yes | | Yes | | | | | | |

CALIFORNIA

| CHEMICAL NAME | CAS # | WARNING! This product contains chemicals known to the state of California to cause: | | | |
|----------------------|--------------|--|--------------------------|-------------------|----------------------|
| CHEMICAL NAME | CAS # | Birth Defects | Reproductive Harm | Carcinogen | Developmental |
| None Listed | | | | | |

CLEAN AIR WATER ACTS

| CHEMICAL NAME | CAS # | Clean Air Acts | | | Clean Water Acts | | |
|----------------------|--------------|-----------------------|----------------------|----------------------|-------------------------|-----------|-----------|
| | | HAP | Ozone Class 1 | Ozone Class 2 | HS | PP | TP |
| None Listed | | | | | | | |

INTERNATIONAL REGULATIONS – The components of this product are listed on the chemical inventories of the following countries:

| CHEMICAL NAME | Australia | Canada | Europe (EINECS) | Japan | Korea | UK |
|----------------------|------------------|---------------|------------------------|--------------|--------------|-----------|
| Glycol Ethers | Yes | Yes | Yes | Yes | Yes | Yes |

WHMIS Classification

| CHEMICAL NAME | DSL | Class | Description |
|----------------------------------|------------|--------------|---|
| 2-(2-Butoxyethoxy)ethanol | Yes | D-2B | Materials Causing Other Toxic Effects; Toxic Material |
| Sodium Metasilicate Pentahydrate | Yes | E | Corrosive Material |

SECTION – 16 OTHER INFORMATION

| <u>Code</u> | <u>Hazard and Precautionary Statements</u> |
|----------------|--|
| H303 | May be harmful if swallowed |
| H315 | Causes skin irritation |
| H318 | Causes serious eye damage |
| H335 | May cause respiratory irritation |
| P261 | Avoid breathing dust/fume/gas/mist/vapours/spray. |
| P262 | Do not get in eyes, on skin, or on clothing. |
| P264 | Wash ... thoroughly after handling. |
| P273 | Avoid release to the environment. |
| P281 | Use personal protective equipment as required. |
| P301+P330+P331 | IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. |
| P302+P352 | IF ON SKIN: Wash with plenty of soap and water. |
| P304+P341 | IF INHALED: If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P314 | Get medical advice/attention if you feel unwell. |
| P362 | Take off contaminated clothing and wash before reuse. |
| P376 | Stop leak if safe to do so. |
| P370+P378 | In case of fire: Use dry chemicals, CO2, alcohol foam for extinction. Water spray to cool or protect exposed materials |
| P402+P404 | Store in a dry place. Store in a closed container. |
| P501 | Dispose of contents/ container to an approved waste disposal plant. |

SDS LEGEND DESCRIPTION

| | | | |
|---------------|---|--------------|--|
| ACGIH | American Conference of Governmental Industrial Hygienists | LC50 | A concentration that is lethal to 50% of a given species in a given time |
| CAS | Chemical Abstracts Service Registry | LD50 | Dose that is lethal to 50% of a given species by a given route of exposure |
| CEIL | Ceiling Limit (15 minutes) | LEL | Lower Explosive Limit |
| CERCL | Comprehensive Environmental Response, Compensation, and Liability Act | LD | Liver Damage |
| CI | Cochlear Impairment | NA | Not Applicable |
| CNS | Central Nervous System | ND | Not Determined |
| EC50 | Concentration of a chemical that gives half-maximal response | NFPA | National Fire Protection Association |
| EPA | Environmental Protection Agency | NIOSH | National Institute for Occupational Safety and Health |
| Eye | (EI = Irritation) (ED = Damage) (EV = Visual Impairment) | NE | Not Established |
| FBG | Full Bunker Gear | NTP | National Toxicology Program |
| GHS | Globally Harmonized System | OSHA | Occupational Safety and Health Administration |
| HAP | California Hazardous air pollutant Clean Air Act | PEL | Permissible Exposure Limit (OSHA) |
| HMIS-A | Safety Glasses | PNS | Peripheral Nervous System |
| HMIS-B | Safety glasses, gloves | PP | California Priority Pollutant under the Clean Water Act |
| HMIS-C | Safety glasses, gloves, chemical apron | REL | Recommended exposure limit (NIOSH) |
| HMIS-D | Face shield, gloves, chemical apron | RT | Upper Respiratory Tract |
| HMIS-E | Safety glasses, gloves, dust respirator | Skin | (SI = Irritation) (SD = Damage) (SA = Absorption) (SS = Sensitizer) |
| HMIS-F | Safety glasses, gloves, chemical apron, dust respirator | SARA | Superfund Amendments and Reauthorization Act |
| HMIS-G | Safety glasses, gloves, vapor respirator | STEL | Short Term Exposure Limit (15 minutes) |
| HMIS-H | Splash goggles, gloves, chemical apron, vapor respirator | TC Lo | Lowest concentration that is toxic to a given species in a given time |
| HMIS-I | Safety glasses, gloves, dust and vapor respirator | TD Lo | Lowest dose that is toxic to a given species |
| HMIS-J | Splash goggles, gloves, chemical apron, dust and vapor respirator | TLV | Threshold Limit Value (ACGIH) |
| HMIS-K | Air line hood or mask, gloves, full chemical suit, boots | TP | California Toxic Pollutant under the Clean Water Act |
| HMIS-X | Ask Supervisor | TSCA | Toxic Substances Control Act |
| HS | California Hazardous Substance under the Clean Water Act | TWA | Time Weighted Average (8 hours) |
| KD | Kidney Damage (nephropathy) | UEL | Upper Explosive Limit |

Modern Chemical, Inc.

and Abernathy Company have compiled the information herein from sources believed to be reliable and up-to-date, and is accurate to the best of our knowledge. However, we cannot give any guarantees regarding information from other sources or the completeness and expressly do not make warranties, nor assume any liability for its use. The information contained herein is provided for reference purposes only and is intended only for persons having relevant technical skills. Because conditions and manner of use are outside of our control, the user is responsible for determining the conditions of safe use of the product. Buyers and users assume all risk, responsibility and liability whatsoever for any and all injuries, losses, or damages to persons or property arising from the use of this product or information.

Supersedes Safety Data Sheet Dated 01/10/2020



Revision Number: 003.3

Issue date: 08/07/2017

1. PRODUCT AND COMPANY IDENTIFICATION

Product name: LOCTITE LB 8014 FOODGRADE ANTI-SEIZE known as LOCTITE® Food Grade Anti-Seize
Product type: Lubricant
Restriction of Use: None identified
Company address: Henkel Corporation
 One Henkel Way
 Rocky Hill, Connecticut 06067

IDH number: 1228666

Item number: 1228666
Region: United States

Contact information:
 Telephone: +1 (860) 571-5100
 MEDICAL EMERGENCY Phone: Poison Control Center
 1-877-671-4608 (toll free) or 1-303-592-1711
 TRANSPORT EMERGENCY Phone: CHEMTREC
 1-800-424-9300 (toll free) or 1-703-527-3887
 Internet: www.henkelna.com

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

DANGER: CAUSES SKIN IRRITATION.
 CAUSES SERIOUS EYE DAMAGE.

| HAZARD CLASS | HAZARD CATEGORY |
|--------------------|-----------------|
| SKIN IRRITATION | 2 |
| SERIOUS EYE DAMAGE | 1 |

PICTOGRAM(S)



Precautionary Statements

Prevention: Wash affected area thoroughly after handling. Wear protective gloves, eye protection, and face protection.

Response: IF ON SKIN: Wash with plenty of water. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation occurs: Get medical attention. Take off contaminated clothing.

Storage: Not prescribed

Disposal: Not prescribed

Classification complies with OSHA Hazard Communication Standard (29 CFR 1910.1200) and is consistent with the provisions of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

| Hazardous Component(s) | CAS Number | Percentage* |
|---|------------|-------------|
| Mineral oil | Unknown | 40 - 50 |
| White mineral oil (petroleum), highly refined | 8042-47-5 | 10 - 20 |

IDH number: 1228666

Product name: LOCTITE LB 8014 FOODGRADE ANTI-SEIZE known as LOCTITE® Food Grade Anti-Seize

| | | |
|---------------------|------------|---------|
| Calcium dihydroxide | 1305-62-0 | 10 - 20 |
| Talc | 14807-96-6 | 5 - 10 |

* Exact percentages may vary or are trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

| | |
|----------------------|---|
| Inhalation: | Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. If symptoms develop and persist, get medical attention. |
| Skin contact: | Wash with soap and water. If symptoms develop and persist, get medical attention. |
| Eye contact: | Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. If symptoms develop and persist, get medical attention. |
| Ingestion: | Do not induce vomiting. Never give anything by mouth to an unconscious person. If symptoms develop and persist, get medical attention. |
| Symptoms: | See Section 11. |

5. FIRE FIGHTING MEASURES

| | |
|---|--|
| Extinguishing media: | Water spray (fog), foam, dry chemical or carbon dioxide. |
| Special firefighting procedures: | Wear self-contained breathing apparatus and full protective clothing, such as turn-out gear. |
| Unusual fire or explosion hazards: | Closed containers may rupture (due to build up of pressure) when exposed to extreme heat. |
| Hazardous combustion products: | Oxides of carbon. Toxic and irritating vapors. |

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

| | |
|-----------------------------------|--|
| Environmental precautions: | Do not allow product to enter sewer or waterways. |
| Clean-up methods: | Keep unnecessary personnel away. Scrape up as much material as possible. Clean residue with soap and water. Store in a partly filled, closed container until disposal. Refer to Section 8 "Exposure Controls / Personal Protection" prior to clean up. |

7. HANDLING AND STORAGE

| | |
|------------------|---|
| Handling: | Avoid contact with eyes, skin and clothing. Do not breathe gas/fumes/vapor/spray. Wash thoroughly after handling. Refer to Section 8. |
| Storage: | Keep in a cool, well ventilated area away from heat, sparks and open flame. Keep container tightly closed until ready for use. |

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

| Hazardous Component(s) | ACGIH TLV | OSHA PEL | AIHA WEEL | OTHER |
|---|--|--|-----------|--------|
| Mineral oil | 5 mg/m ³ TWA mist 10 mg/m ³ STEL mist | 5 mg/m ³ TWA mist | None | None |
| White mineral oil (petroleum), highly refined | 5 mg/m ³ TWA Inhalable fraction. | 5 mg/m ³ TWA mist 5 mg/m ³ PEL Mist. | None | None |
| Calcium dihydroxide | 5 mg/m ³ TWA | 5 mg/m ³ PEL Respirable fraction. 15 mg/m ³ PEL Total dust. | None | None |
| Talc | 2 mg/m ³ TWA Respirable fraction. | 0.1 mg/m ³ TWA Respirable. 2.4 MPPCF TWA Respirable. 20 MPPCF TWA | None | 50 ppm |

Engineering controls:

Use only with adequate ventilation. Local exhaust ventilation is recommended when general ventilation is not sufficient to control airborne contamination below occupational exposure limits.

Respiratory protection:

Use NIOSH approved respirator if there is potential to exceed exposure limit(s). Observe OSHA regulations for respirator use (29 CFR 1910.134).

Eye/face protection:

Safety goggles or safety glasses with side shields. Full face protection should be used if the potential for splashing or spraying of product exists. Safety showers and eye wash stations should be available.

Skin protection:

Use impermeable gloves and protective clothing as necessary to prevent skin contact.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|------------------------------|
| Physical state: | Paste |
| Color: | White |
| Odor: | Mild |
| Odor threshold: | Not available. |
| pH: | Not available. |
| Vapor pressure: | Not determined |
| Boiling point/range: | Not available. |
| Melting point/ range: | Not available. |
| Specific gravity: | 1.18 |
| Vapor density: | Not available. |
| Flash point: | 154 °C (309.2 °F) calculated |
| Flammable/Explosive limits - lower: | Not available. |
| Flammable/Explosive limits - upper: | Not available. |
| Autoignition temperature: | Not available. |
| Flammability: | Not applicable |
| Evaporation rate: | Not available. |
| Solubility in water: | Insoluble |
| Partition coefficient (n-octanol/water): | Not determined |
| VOC content: | < 3 % |
| Viscosity: | Not available. |
| Decomposition temperature: | Not available. |

10. STABILITY AND REACTIVITY

| | |
|--|---|
| Stability: | Stable under normal conditions of storage and use. |
| Hazardous reactions: | Will not occur. |
| Hazardous decomposition products: | Oxides of carbon. Hydrocarbons. Irritating organic vapours. |
| Incompatible materials: | Oxidizing agents. |
| Reactivity: | Not available. |
| Conditions to avoid: | Excessive heat. Store away from incompatible materials. |

11. TOXICOLOGICAL INFORMATION

Relevant routes of exposure: Skin, Inhalation, Eyes, Ingestion

Potential Health Effects/Symptoms

| | |
|----------------------|--|
| Inhalation: | This product has low volatility and is not expected to cause respiratory tract irritation during normal conditions of use. |
| Skin contact: | Causes skin irritation. |
| Eye contact: | Causes serious eye damage. |
| Ingestion: | Not expected under normal conditions of use. May cause gastrointestinal tract irritation if swallowed. |

| Hazardous Component(s) | LD50s and LC50s | Immediate and Delayed Health Effects |
|---|-------------------------------|--|
| Mineral oil | None | No Data |
| White mineral oil (petroleum), highly refined | None | Irritant |
| Calcium dihydroxide | Oral LD50 (Rat) = 7,340 mg/kg | Irritant, Corrosive |
| Talc | None | Irritant, Lung, Some evidence of carcinogenicity |

| Hazardous Component(s) | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen (Specifically Regulated) |
|---|----------------|-----------------|--|
| Mineral oil | No | No | No |
| White mineral oil (petroleum), highly refined | No | No | No |
| Calcium dihydroxide | No | No | No |
| Talc | No | Group 2B | No |

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Follow all local, state, federal and provincial regulations for disposal.
Hazardous waste number: Not a RCRA hazardous waste.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any package/configuration.

U.S. Department of Transportation Ground (49 CFR)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

International Air Transportation (ICAO/IATA)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

Water Transportation (IMO/IMDG)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

15. REGULATORY INFORMATION

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory.
TSCA 12 (b) Export Notification: None above reporting de minimis
CERCLA/SARA Section 302 EHS: None above reporting de minimis.
CERCLA/SARA Section 311/312: Immediate Health, Delayed Health
CERCLA/SARA Section 313: None above reporting de minimis.
California Proposition 65: This product contains a chemical known in the State of California to cause cancer. This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Canada Regulatory Information

CEPA DSL/NDSL Status: All components are listed on or are exempt from listing on the Canadian Domestic Substances List.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: New Safety Data Sheet format.

Prepared by: Cara R. Rivera, Regulatory Affairs Specialist
Issue date: 08/07/2017

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.



GHS SAFETY DATA SHEET

Date Revised: JUN 2018

WELD-ON® 725™ Wet 'R Dry™ Low VOC Cement for PVC Plastic Pipe

Supersedes: MAR 2017

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 725™ Wet 'R Dry™ Low VOC Cement for PVC Plastic Pipe

PRODUCT USE: Low VOC Solvent Cement for PVC Plastic Pipe

SUPPLIER:

MANUFACTURER:

IPS Corporation
17109 South Main Street, Gardena, CA 90248-3127
P.O. Box 379, Gardena, CA 90247-0379
Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

Medical: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|--|--|-----------------------------|
| Acute Toxicity: Category 4 Skin Irritation: Category 3 Skin Sensitization: NO Eye: Category 2 | Acute Toxicity: None Known Chronic Toxicity: None Known | Flammable Liquid Category 2 |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 1B

| Hazard Statements | Precautionary Statements |
|--|--|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer EUH019: May form explosive peroxides | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P337+P313: Get medical advice/attention P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH Pre-registration Number | CONCENTRATION % by Weight |
|---------------------------|----------|-----------|----------------------------------|------------------------------|
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 45 - 60 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 4 - 15 |
| Acetone | 67-64-1 | 200-662-2 | 05-2116297713-35-0000 | 14 - 25 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing. * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372). # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.
Likely Routes of Exposure: Inhalation, Eye and Skin Contact
Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.
Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. **HMIS** 2 **NFPA** 0-Minimal
Unsuitable Extinguishing Media: Water spray or stream. **Health** 2 **2** 1-Slight
Exposure Hazards: Inhalation and dermal contact **Flammability** 3 **3** 2-Moderate
Combustion Products: Oxides of carbon, hydrogen chloride and smoke **Reactivity** 0 **0** 3-Serious
Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks. **PPE** B **4** 4-Severe

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL | OSHA PEL-Ceiling | CAL/OSHA PEL | CAL/OSHA Ceiling | CAL/OSHA STEL |
|------------------|---------------------------|-----------|------------|----------|-----------|------------------|--------------|------------------|---------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Acetone | 500 ppm | 750 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |

Engineering Controls: Use local exhaust as needed.

Monitoring: Maintain breathing zone airborne concentrations below exposure limits.

Personal Protective Equipment (PPE):

Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.

Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.

Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.

Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above. With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® 725™ Wet 'R Dry™ Low VOC Cement for PVC Plastic Pipe

Date Revised: JUN 2018
Supersedes: MAR 2017

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|---|-------------------------------|---|
| Appearance: | Aqua Blue or Clear, medium syrupy liquid | Odor Threshold: | 1 ppm (Acetone) |
| Odor: | Ketone | Boiling Range: | 56°C (133°F) to 80°C (176°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 56°C (133°F) Based on first boiling component: Acetone | Flammability Limits: | LEL: 1.4% based on MEK UEL: 12.8% based on Acetone |
| Flash Point: | -20°C (-4°F) TCC based on Acetone | Vapor Pressure: | 190 mm Hg @ 20°C (68°F) Acetone |
| Specific Gravity: | 0.924 @23°C (73°F) | Vapor Density: | >2.0 (Air = 1) |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Other Data: Viscosity: | Medium bodied |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 510g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Acetone | Oral: 5800 mg/kg (rat) | Inhalation 50,100 mg/m ³ (rat) | STOT SE3 |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|--|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 510g/l. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

| EXCEPTION for Ground Shipping |
|--|
| DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package. |
| Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" . |

| TDG INFORMATION | |
|--------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|-----------------------------|--|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R36/37: Irritating to eyes and respiratory system. | | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness |
| Safety Phrases: | S2: Keep out of the reach of children S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. | | S25: Avoid contact with eyes. S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 6/28/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for PVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

1. Identification

Product identifier PVC Medium Clear Cement

Other means of identification

SDS number 1101E

Recommended use Joining PVC Pipes

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Company Name Oatey Co.
Address 4700 West 160th St.
Cleveland, OH 44135

Telephone 216-267-7100
E-mail info@oatey.com
Transport Emergency Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887)
Emergency First Aid 1-877-740-5015
Contact person MSDS Coordinator

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



Signal word Danger

Hazard statement Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness.

Precautionary statement

Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only outdoors or in a well-ventilated area. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Wear protective gloves/protective clothing/eye protection/face protection.

Response Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish.

Storage Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise classified (HNOC)

Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen.

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 30-50 |
| Acetone | 67-64-1 | 10-25 |
| Methyl ethyl ketone | 78-93-3 | 10-25 |
| Polyvinyl chloride | 9002-86-2 | 12-20 |
| Cyclohexanone | 108-94-1 | 10-20 |
| Fumed Silica | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation

Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

Skin contact

Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse.

Eye contact

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Ingestion

Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis.

Most important symptoms/effects, acute and delayed

Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. May cause redness and pain.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information

Take off all contaminated clothing immediately. IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media

Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Unsuitable extinguishing media

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards

Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid inhalation of vapors or mists. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Use water spray to reduce vapors or divert vapor cloud drift. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not taste or swallow. Avoid breathing mist or vapor. Avoid contact with skin. Avoid contact with eyes. Avoid prolonged exposure. Avoid contact with clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). Keep in an area equipped with sprinklers.

8. Exposure controls/personal protection

Occupational exposure limits

U.S. - OSHA

| Components | Type | Value | Form |
|--------------------------------|------|-----------------------|--------------|
| Fumed Silica (CAS 112945-52-5) | TWA | 0.8 mg/m ³ | Unspecified. |
| | | 20 mppcf | Unspecified. |

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|-----------------------------------|------|------------------------------------|------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m ³ 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m ³ 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m ³ 200 ppm | |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|-----------------------|----------------------|
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m ³ | |
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 200 ppm | Respirable fraction. |
| | | 5 mg/m ³ | |
| | | 15 mg/m ³ | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|--------------------------------|------|-----------------------|
| Fumed Silica (CAS 112945-52-5) | TWA | 0.8 mg/m ³ |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------------------|----------------------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm | |
| | TWA | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m ³ | Respirable fraction. |
| | | | |

U.S. - NIOSH

| Components | Type | Value | Form |
|--------------------------------|------|---------------------|--------------|
| Fumed Silica (CAS 112945-52-5) | REL | 6 mg/m ³ | Unspecified. |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------------------|------|-----------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m ³ |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m ³ |
| | | 25 ppm |
| Fumed Silica (CAS 112945-52-5) | TWA | 6 mg/m ³ |
| | | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m ³ |
| | | 250 ppm |
| | TWA | 590 mg/m ³ |
| | | 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 885 mg/m ³ |
| | | 300 ppm |
| | TWA | 590 mg/m ³ |
| | | 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Wash hands after handling and before eating.

9. Physical and chemical properties

Appearance

Physical state

Liquid.

Form

Translucent liquid.

Color

Clear.

Odor

Solvent.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

Not available.

Initial boiling point and boiling range

151 °F (66.11 °C)

Flash point

14.0 - 23.0 °F (-10.0 - -5.0 °C)

Evaporation rate

5.5 - 8

| | |
|---|-----------------------------|
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1.8 |
| Flammability limit - upper (%) | 11.8 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.93 +/- 0.02 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 1200 - 2500 cP |
| Viscosity temperature | 77 °F (25 °C) |
| Other information | |
| Bulk density | 7.7 lbs/gal |
| VOC (Weight %) | < 510 g/l SCAQMD 1168/M316A |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. May cause irritation to the respiratory system. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. |

Symptoms related to the physical, chemical and toxicological characteristics Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|----------------|---------------------|
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |

| Components | Species | Test Results |
|-------------------|---------|-------------------|
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|---|--|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | Suspected of causing cancer. In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure. This product contains polyvinyl chloride (PVC) that is not a fabricated product, and is therefore, defined and regulated as a toxic and hazardous substance under 29 C.F.R. § 1910.1017 due to the presumed presence of residual vinyl chloride monomer. The concentrations of residual vinyl chloride calculated to be contained in this product are well below the threshold for classification in accordance with 29 C.F.R. § 1910.1200. |
| IARC Monographs. Overall Evaluation of Carcinogenicity | |
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| Fumed Silica (CAS 112945-52-5) | 3 Not classifiable as to carcinogenicity to humans. |
| Polyvinyl chloride (CAS 9002-86-2) | 3 Not classifiable as to carcinogenicity to humans. |
| OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050) | |
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Respiratory tract irritation. Narcotic effects. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

| | |
|--------------------------------------|--|
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | No data available. |

| Partition coefficient n-octanol / water (log Kow) | |
|--|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

| | |
|------------------------------|---|
| Mobility in soil | No data available. |
| Other adverse effects | No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component. |

13. Disposal considerations

| | |
|--|--|
| Disposal instructions | Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T11, TP1, TP8, TP27 |
| Packaging exceptions | 150 |
| Packaging non bulk | 201 |
| Packaging bulk | 243 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|---|---|
| UN number | UN1133 |
| UN proper shipping name | ADHESIVES |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code | Not available. |

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer Central nervous system Liver Blood Flammability |
|------------------------------------|--|

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|--|
| Hazard categories | Immediate Hazard - Yes Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No |
|--------------------------|--|

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Fumed Silica (CAS 112945-52-5)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Fumed Silica (CAS 112945-52-5)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. This product contains trace amounts of chemicals known to the state of California to cause cancer. Under normal use conditions, exposure to these chemicals at levels above the State of California "No significant Risk Level" (NSRL) are unlikely. The use of proper personal protective equipment (PPE) and ventilation guidelines noted in Section 8 will minimize exposure levels to these chemicals.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 27-May-2015 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available.

SECTION I - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 717™ Low VOC Cements for PVC Plastic Pipe
PRODUCT USE: Low VOC Solvent Cement for PVC Plastic Pipe
SUPPLIER: **MANUFACTURER:** IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300
EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|--|--|-----------------------------|
| Acute Toxicity: Category 4 Skin Irritation: Category 3 Skin Sensitization: NO Eye: Category 2 | Acute Toxicity: None Known Chronic Toxicity: None Known | Flammable Liquid Category 2 |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 1B

Hazard Statements

H225: Highly flammable liquid and vapor
 H319: Causes serious eye irritation
 H332: Harmful if inhaled
 H335: May cause respiratory irritation
 H336: May cause drowsiness or dizziness
 H351: Suspected of causing cancer
 EUH019: May form explosive peroxides

Precautionary Statements

P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking
 P261: Avoid breathing dust/fume/gas/mist/vapors/spray
 P280: Wear protective gloves/protective clothing/eye protection/face protection
 P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
 P403+P233: Store in a well ventilated place. Keep container tightly closed
 P501: Dispose of contents/container in accordance with local regulation

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH | CONCENTRATION |
|---------------------------|----------|-----------|-------------------------|---------------|
| | | | Pre-registration Number | % by Weight |
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 25 - 70 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 5 - 36 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 05-2116297718-25-0000 | 10 - 25 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.
Likely Routes of Exposure: Inhalation, Eye and Skin Contact
Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.
Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog.
Unsuitable Extinguishing Media: Water spray or stream.
Exposure Hazards: Inhalation and dermal contact
Combustion Products: Oxides of carbon, hydrogen chloride and smoke
Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

| | HMIS | NFPA | 0-Minimal |
|--------------|------|------|------------|
| Health | 2 | 2 | 1-Slight |
| Flammability | 3 | 3 | 2-Moderate |
| Reactivity | 0 | 0 | 3-Serious |
| PPE | B | | 4-Severe |

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL | OSHA PEL-Ceiling | CAL/OSHA PEL | CAL/OSHA Ceiling | CAL/OSHA STEL |
|------------------|---------------------------|-----------|------------|----------|-----------|------------------|--------------|------------------|---------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Gray or clear, heavy syrupy liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 66°C (151°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 66°C (151°F) Based on first boiling component: THF | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 11.8% based on THF |
| Flash Point: | -20°C (-4°F) TCC based on THF | Vapor Pressure: | 129 mm Hg @ 20°C (68°F) based on THF |
| Specific Gravity: | 0.963 @23°C (73°F) | Vapor Density: | >2 (Air = 1) |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Other Data: Viscosity: | Heavy bodied |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 510 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 510 g/l. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

EXCEPTION for Ground Shipping

DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package.
Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" .

| TDG INFORMATION | |
|--------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|-----------------------------|---|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R20: Harmful by inhalation. R36/37: Irritating to eyes and respiratory system. | | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness |
| Safety Phrases: | S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. S25: Avoid contact with eyes. | | S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. S46: If swallowed, seek medical advice immediately and show this container or label. |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 6/21/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for PVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

1. Identification

| | |
|---|---|
| Product identifier | Harvey P6 Medium Bodied Clear Cement |
| Other means of identification | |
| SDS number | 3101E |
| Synonyms | Clear - 018150, 018168, 018185, 018257, 018392, 018151, 018170, 018187, 018269, 018393, 018152, 018171, 018190, 018276, 018450, 018153, 018172, 018191, 018277, MVC9962, 018157, 018173, 018192, 018283, PV018158, 018159, 018174, 018193, 018350, PV018159, 018160, 018177, 018194, 018351, PV018890, 018161, 018180, 018208, 018352, 018163, 018181, 018209, 018353, 018166, 018182, 018253, 018361, 018167, 018183, 018254, 018390, 018258 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | William H. Harvey Company |
| Address | 4334 South 67th Street Omaha, NE 68117 |
| Telephone | 402-331-1175 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only outdoors or in a well-ventilated area. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise classified (HNOC) Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen.

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 30-50 |
| Acetone | 67-64-1 | 10-25 |
| Methyl ethyl ketone | 78-93-3 | 10-25 |
| Polyvinyl chloride | 9002-86-2 | 12-20 |
| Cyclohexanone | 108-94-1 | 10-20 |
| Fumed silica | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.

Skin contact Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Ingestion Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis.

Most important symptoms/effects, acute and delayed Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. May cause redness and pain.

Indication of immediate medical attention and special treatment needed Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information Take off all contaminated clothing immediately. IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Unsuitable extinguishing media Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Specific methods Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid inhalation of vapors or mists. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Use water spray to reduce vapors or divert vapor cloud drift. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not taste or swallow. Avoid breathing mist or vapor. Avoid contact with skin. Avoid contact with eyes. Avoid prolonged exposure. Avoid contact with clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). Keep in an area equipped with sprinklers.

8. Exposure controls/personal protection

Occupational exposure limits

U.S. - OSHA

| Components | Type | Value | Form |
|--------------------------------|------|-----------------------|--------------|
| Fumed silica (CAS 112945-52-5) | TWA | 0.8 mg/m ³ | Unspecified. |
| | | 20 mppcf | Unspecified. |

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|-----------------------------------|------|------------------------|------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m ³ | |
| | | 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m ³ | |
| | | 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m ³ | |
| | | 200 ppm | |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|-----------------------|----------------------|
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m ³ | |
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 200 ppm | Respirable fraction. |
| | | 5 mg/m ³ | |
| | | 15 mg/m ³ | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|--------------------------------|------|-----------------------|
| Fumed silica (CAS 112945-52-5) | TWA | 0.8 mg/m ³ |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------------------|----------------------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm | |
| | TWA | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m ³ | Respirable fraction. |
| | | | |

U.S. - NIOSH

| Components | Type | Value | Form |
|--------------------------------|------|---------------------|--------------|
| Fumed silica (CAS 112945-52-5) | REL | 6 mg/m ³ | Unspecified. |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------------------|------|-----------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m ³ |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m ³ |
| | | 25 ppm |
| Fumed silica (CAS 112945-52-5) | TWA | 6 mg/m ³ |
| | | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m ³ |
| | | 250 ppm |
| | | 590 mg/m ³ |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 200 ppm |
| | | 885 mg/m ³ |
| | | 300 ppm |
| | TWA | 590 mg/m ³ |
| | | 200 ppm |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Wash hands after handling and before eating.

9. Physical and chemical properties

Appearance

Physical state

Liquid.

Form

Translucent liquid.

Color

Clear.

Odor

Solvent.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

Not available.

Initial boiling point and boiling range

151 °F (66.11 °C)

Flash point

14.0 - 23.0 °F (-10.0 - -5.0 °C)

Evaporation rate

5.5 - 8

| | |
|---|-----------------------------|
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1.8 |
| Flammability limit - upper (%) | 11.8 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.93 +/- 0.02 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 1200 - 2500 cP |
| Viscosity temperature | 77 °F (25 °C) |
| Other information | |
| Bulk density | 7.7 lbs/gal |
| VOC (Weight %) | < 510 g/l SCAQMD 1168/M316A |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. May cause irritation to the respiratory system. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. |

Symptoms related to the physical, chemical and toxicological characteristics Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|--------------|
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |

| Components | Species | Test Results |
|---------------------------|---------|-------------------|
| <i>Inhalation</i> LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | Suspected of causing cancer. In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure. This product contains polyvinyl chloride (PVC) that is not a fabricated product, and is therefore, defined and regulated as a toxic and hazardous substance under 29 C.F.R. § 1910.1017 due to the presumed presence of residual vinyl chloride monomer. The concentrations of residual vinyl chloride calculated to be contained in this product are well below the threshold for classification in accordance with 29 C.F.R. § 1910.1200. |

IARC Monographs. Overall Evaluation of Carcinogenicity

| | |
|------------------------------------|---|
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| Fumed silica (CAS 112945-52-5) | 3 Not classifiable as to carcinogenicity to humans. |
| Polyvinyl chloride (CAS 9002-86-2) | 3 Not classifiable as to carcinogenicity to humans. |

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
|------------------------------------|--------|

| | |
|---|--|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Respiratory tract irritation. Narcotic effects. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

| | |
|--------------------------------------|--|
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | No data available. |

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

| | |
|------------------------------|---|
| Mobility in soil | No data available. |
| Other adverse effects | No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component. |

13. Disposal considerations

| | |
|--|--|
| Disposal instructions | Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. |

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T11, TP1, TP8, TP27 |
| Packaging exceptions | 150 |
| Packaging non bulk | 201 |
| Packaging bulk | 243 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|---|---|
| UN number | UN1133 |
| UN proper shipping name | ADHESIVES |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code | Not available. |

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer Central nervous system Liver Blood Flammability |
|------------------------------------|--|

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|--|
| Hazard categories | Immediate Hazard - Yes Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No |
|--------------------------|--|

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Fumed silica (CAS 112945-52-5)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Fumed silica (CAS 112945-52-5)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. This product contains trace amounts of chemicals known to the state of California to cause cancer. Under normal use conditions, exposure to these chemicals at levels above the State of California "No significant Risk Level" (NSRL) are unlikely. The use of proper personal protective equipment (PPE) and ventilation guidelines noted in Section 8 will minimize exposure levels to these chemicals.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | No |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 27-May-2015 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available.



Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations
Date of issue: 08/14/2015 Revision date: 04/03/2019 Version: 4.0

SECTION 1: Identification

1.1. Identification

Product form : Mixture
Product name : Wonder Gel Stainless Steel Pickling Gel
Product code : WG

1.2. Recommended use and restrictions on use

Recommended use : Industrial use
Restrictions on use : None known

1.3. Supplier

Bradford Derustit Corp
P.O. Box PO Box 1194
Yorba Linda, 92885
T (714) 695-0899
sales@derustit.com - www.DERUSTIT.com

1.4. Emergency telephone number

Emergency number : Chemtrec 800-424-9300/ 703-527-3887 CCN 3103 ; Chemtrec Mexico 1-800-681-9531

SECTION 2: Hazard(s) identification

2.1. Classification of the substance or mixture

GHS US classification

| | | |
|--|------|---|
| Ox. Liq. 3 | H272 | May intensify fire; oxidizer |
| Acute Tox. 3 (Oral) | H301 | Toxic if swallowed |
| Acute Tox. 2 (Dermal) | H310 | Fatal in contact with skin |
| Acute Tox. 3 (Inhalation:dust,mist) | H331 | Toxic if inhaled |
| Skin Corr. 1A | H314 | Causes severe skin burns and eye damage |
| Eye Dam. 1 | H318 | Causes serious eye damage |

Full text of hazard classes and H-statements : see section 16

2.2. GHS Label elements, including precautionary statements

GHS US labeling

Hazard pictograms (GHS US) :



Signal word (GHS US) :

Danger

Hazard statements (GHS US) :

H272 - May intensify fire; oxidizer
H301+H331 - Toxic if swallowed or if inhaled
H310 - Fatal in contact with skin
H314 - Causes severe skin burns and eye damage

Precautionary statements (GHS US) :

P210 - Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
P220 - Keep/Store away from combustible materials
P221 - Take any precaution to avoid mixing with combustible materials
P260 - Do not breathe dust, fume, vapors.
P261 - Avoid breathing dust, fume, vapors.
P262 - Do not get in eyes, on skin, or on clothing.
P264 - Wash hands thoroughly after handling.
P270 - Do not eat, drink or smoke when using this product.
P271 - Use only outdoors or in a well-ventilated area.
P280 - Wear protective gloves/protective clothing/eye protection/face protection.
P301+P310 - If swallowed: Immediately call a POISON CENTER
P301+P330+P331 - If swallowed: rinse mouth. Do NOT induce vomiting
P303+P361+P353 - If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
P304+P340 - If inhaled: Remove person to fresh air and keep comfortable for breathing
P305+P351+P338 - If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

P310 - Immediately call a POISON CENTER
P311 - Call a POISON CENTER
P330 - Rinse mouth.
P361 - Take off immediately all contaminated clothing.
P363 - Wash contaminated clothing before reuse.
P370+P378 - In case of fire: Use ABC-powder to extinguish.
P403+P233 - Store in a well-ventilated place. Keep container tightly closed.
P405 - Store locked up.
P501 - Dispose of contents/container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulation

2.3. Other hazards which do not result in classification

Other hazards not contributing to the classification : None.

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/Information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

| Name | Product identifier | % | GHS US classification |
|---------------------|----------------------|---------|--|
| Calcium nitrate | (CAS-No.) 10124-37-5 | 15 - 40 | Acute Tox. 4 (Oral), H302 |
| Nitric acid | (CAS-No.) 7697-37-2 | 10 - 30 | Ox. Liq. 2, H272 Skin Corr. 1A, H314 Eye Dam. 1, H318 |
| Ammonium bifluoride | (CAS-No.) 1341-49-7 | 10 - 20 | Acute Tox. 3 (Oral), H301 Skin Corr. 1B, H314 |
| Hydrofluoric acid | (CAS-No.) 7664-39-3 | 1 - 5 | Acute Tox. 2 (Oral), H300 Acute Tox. 1 (Dermal), H310 Acute Tox. 2 (Inhalation:dust,mist), H330 Skin Corr. 1A, H314 |

Full text of hazard classes and H-statements : see section 16

SECTION 4: First-aid measures

4.1. Description of first aid measures

First-aid measures general : Call a physician immediately. If you feel unwell, seek medical advice (show the label where possible).

First-aid measures after inhalation : Remove person to fresh air and keep comfortable for breathing. Call a doctor.

First-aid measures after skin contact : Remove/Take off immediately all contaminated clothing. Call a physician immediately. Immediately remove contaminated clothing or footwear. Seek medical attention if burns develop. Wash skin with plenty of water.

First-aid measures after eye contact : Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a physician immediately. Consult an ophthalmologist if irritation persists.

First-aid measures after ingestion : Rinse mouth. Call a physician immediately. Do not induce vomiting.

4.2. Most important symptoms and effects (acute and delayed)

Symptoms/effects : Not expected to present a significant hazard under anticipated conditions of normal use.

Symptoms/effects after skin contact : Burns.

Symptoms/effects after eye contact : Serious damage to eyes.

Symptoms/effects after ingestion : Burns.

4.3. Immediate medical attention and special treatment, if necessary

Not applicable.

SECTION 5: Fire-fighting measures

5.1. Suitable (and unsuitable) extinguishing media

Suitable extinguishing media : Water spray. Dry powder. Foam. Carbon dioxide.

5.2. Specific hazards arising from the chemical

Fire hazard : May intensify fire; oxidizer.

Reactivity : May intensify fire; oxidizer.

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

5.3. Special protective equipment and precautions for fire-fighters

Protection during firefighting : Do not attempt to take action without suitable protective equipment. Self-contained breathing apparatus. Complete protective clothing.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

6.1.1. For non-emergency personnel

Emergency procedures : No open flames, no sparks, and no smoking. Only qualified personnel equipped with suitable protective equipment may intervene. Do not breathe dust/fume/gas/mist/vapors/spray. Evacuate unnecessary personnel.

6.1.2. For emergency responders

Protective equipment : Do not attempt to take action without suitable protective equipment. For further information refer to section 8: "Exposure controls/personal protection".

6.2. Environmental precautions

Avoid release to the environment.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Notify authorities if product enters sewers or public waters. In case of large spillages: Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Shovel or sweep up and put in a closed container for disposal. Small quantities of liquid spill: take up in non-combustible absorbent material and shovel into container for disposal.

Other information : Dispose of materials or solid residues at an authorized site.

6.4. Reference to other sections

For further information refer to section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Use only outdoors or in a well-ventilated area. Avoid breathing dust/fume/gas/mist/vapors/spray.

Hygiene measures : Wash contaminated clothing before reuse. Separate work clothes from street clothes. Launder separately. Do not eat, drink or smoke when using this product. Always wash hands after handling the product.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Store locked up. Store in a well-ventilated place. Keep container tightly closed. Keep cool.

Incompatible materials : Combustible materials.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Calcium nitrate (10124-37-5) | | |
|---------------------------------|-------------------------------------|---------------------|
| Not applicable | | |
| Nitric acid (7697-37-2) | | |
| ACGIH | ACGIH TWA (ppm) | 2 ppm |
| ACGIH | ACGIH STEL (ppm) | 4 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 5 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 2 ppm |
| Hydrofluoric acid (7664-39-3) | | |
| ACGIH | ACGIH TWA (ppm) | 0.5 ppm |
| ACGIH | ACGIH Ceiling (ppm) | 2 ppm |
| OSHA | OSHA PEL (TWA) (ppm) | 3 ppm |
| Ammonium bifluoride (1341-49-7) | | |
| Not applicable | | |

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

8.2. Appropriate engineering controls

Appropriate engineering controls : Ensure good ventilation of the work station.
Environmental exposure controls : Avoid release to the environment.

8.3. Individual protection measures/Personal protective equipment

Hand protection:

Chemically resistant protective gloves

Eye protection:

Chemical goggles or safety glasses. Eye protection, including both chemical splash goggles and face shield, must be worn when possibility exists for eye contact due to spraying liquid or airborne particles

Skin and body protection:

Wear suitable protective clothing

Respiratory protection:

In case of insufficient ventilation, wear suitable respiratory equipment. Wear respiratory protection.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|---|---------------------|
| Physical state | : Liquid |
| Color | : green |
| Odor | : acidic |
| Odor threshold | : No data available |
| pH | : 2.66 |
| Melting point | : Not applicable |
| Freezing point | : No data available |
| Boiling point | : -212 °F |
| Flash point | : No data available |
| Relative evaporation rate (butyl acetate=1) | : No data available |
| Flammability (solid, gas) | : Not applicable. |
| Vapor pressure | : No data available |
| Relative vapor density at 20 °C | : No data available |
| Relative density | : 1.2 |
| Solubility | : No data available |
| Log Pow | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |
| Explosion limits | : No data available |
| Explosive properties | : No data available |
| Oxidizing properties | : No data available |

9.2. Other information

No additional information available

SECTION 10: Stability and reactivity

10.1. Reactivity

May intensify fire; oxidizer.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

No dangerous reactions known under normal conditions of use.

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

10.4. Conditions to avoid

Avoid contact with hot surfaces. Heat. No flames, no sparks. Eliminate all sources of ignition.

10.5. Incompatible materials

Combustible materials.

10.6. Hazardous decomposition products

Under normal conditions of storage and use, hazardous decomposition products should not be produced. On combustion, forms: carbon oxides (CO and CO₂).

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Oral: Toxic if swallowed. Dermal: Fatal in contact with skin. Inhalation:dust,mist: Toxic if inhaled.

| Wonder Gel Stainless Steel Pickling Gel | |
|---|--------------------------------|
| ATE US (oral) | 80.04 mg/kg body weight |
| ATE US (dermal) | 100 mg/kg body weight |
| ATE US (dust, mist) | 1 mg/l/4h |
| Calcium nitrate (10124-37-5) | |
| LD50 oral rat | 302 mg/kg |
| ATE US (oral) | 302 mg/kg body weight |
| Nitric acid (7697-37-2) | |
| LC50 inhalation rat (ppm) | 2500 ppm/1h |
| ATE US (gases) | 1250 ppmV/4h |
| Hydrofluoric acid (7664-39-3) | |
| LC50 inhalation rat (mg/l) | 0.79 mg/l (Exposure time: 1 h) |
| ATE US (oral) | 5 mg/kg body weight |
| ATE US (dermal) | 5 mg/kg body weight |
| ATE US (vapors) | 0.79 mg/l/4h |
| ATE US (dust, mist) | 0.05 mg/l/4h |
| Ammonium bifluoride (1341-49-7) | |
| LD50 oral rat | 130 mg/kg |
| ATE US (oral) | 130 mg/kg body weight |

Skin corrosion/irritation : Causes severe skin burns and eye damage.
pH: 2.66

Serious eye damage/irritation : Causes serious eye damage.
pH: 2.66

Respiratory or skin sensitization : Not classified

Germ cell mutagenicity : Not classified

Carcinogenicity : Not classified

Reproductive toxicity : Not classified

Specific target organ toxicity – single exposure : Not classified

Specific target organ toxicity – repeated exposure : Not classified

Aspiration hazard : Not classified

Symptoms/effects : Not expected to present a significant hazard under anticipated conditions of normal use.

Symptoms/effects after skin contact : Burns.

Symptoms/effects after eye contact : Serious damage to eyes.

Symptoms/effects after ingestion : Burns.

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general : Before neutralization, the product may represent a danger to aquatic organisms.

| Calcium nitrate (10124-37-5) | |
|------------------------------|--|
| LC50 fish 1 | 10000 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [static]) |

| Hydrofluoric acid (7664-39-3) | |
|-------------------------------|---|
| EC50 Daphnia 1 | 270 mg/l (Exposure time: 48 h - Species: Daphnia species) |

12.2. Persistence and degradability

| Wonder Gel Stainless Steel Pickling Gel | |
|---|------------------|
| Persistence and degradability | Not established. |

12.3. Bioaccumulative potential

| Wonder Gel Stainless Steel Pickling Gel | |
|---|------------------|
| Bioaccumulative potential | Not established. |

| Nitric acid (7697-37-2) | |
|-------------------------|-----------------|
| Log Pow | -2.3 (at 25 °C) |

| Hydrofluoric acid (7664-39-3) | |
|-------------------------------|----------------------|
| BCF fish 1 | (no bioaccumulation) |
| Log Pow | -1.4 |

| Ammonium bifluoride (1341-49-7) | |
|---------------------------------|-----------------------------------|
| BCF fish 1 | (completely dissociated in water) |

12.4. Mobility in soil

| Wonder Gel Stainless Steel Pickling Gel | |
|---|------------------|
| Ecology - soil | Not established. |

12.5. Other adverse effects

Effect on global warming : Not established

| Hydrofluoric acid (7664-39-3) | |
|--|-----|
| 1990 Hazardous Air Pollutant (Clean Air Act) | Yes |

SECTION 13: Disposal considerations

13.1. Disposal methods

Waste treatment methods : Dispose of contents/container in accordance with licensed collector's sorting instructions.

Product/Packaging disposal recommendations : Dispose in a safe manner in accordance with local/national regulations.

SECTION 14: Transport information

Department of Transportation (DOT)

In accordance with DOT

Transport document description : UN3264 Corrosive liquid, acidic, inorganic, n.o.s. (nitric acid, hydrofluoric acid), 8, II
UN-No.(DOT) : UN3264
Proper Shipping Name (DOT) : Corrosive liquid, acidic, inorganic, n.o.s.
nitric acid, hydrofluoric acid
Class (DOT) : 8 - Class 8 - Corrosive material 49 CFR 173.136
Packing group (DOT) : II - Medium Danger

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Hazard labels (DOT) : 8 - Corrosive



DOT Packaging Non Bulk (49 CFR 173.xxx) : 202
DOT Packaging Bulk (49 CFR 173.xxx) : 242
DOT Symbols : G - Identifies PSN requiring a technical name
DOT Special Provisions (49 CFR 172.102) : B2 - MC 300, MC 301, MC 302, MC 303, MC 305, and MC 306 and DOT 406 cargo tanks are not authorized.
IB2 - Authorized IBCs: Metal (31A, 31B and 31N); Rigid plastics (31H1 and 31H2); Composite (31HZ1). Additional Requirement: Only liquids with a vapor pressure less than or equal to 110 kPa at 50 C (1.1 bar at 122 F), or 130 kPa at 55 C (1.3 bar at 131 F) are authorized.
T11 - 6 178.274(d)(2) Normal..... 178.275(d)(3)
TP2 - a. The maximum degree of filling must not exceed the degree of filling determined by the following: (image) Where: t_r is the maximum mean bulk temperature during transport, t_f is the temperature in degrees celsius of the liquid during filling, and a is the mean coefficient of cubical expansion of the liquid between the mean temperature of the liquid during filling (t_f) and the maximum mean bulk temperature during transportation (t_r) both in degrees celsius. b. For liquids transported under ambient conditions may be calculated using the formula: (image) Where: d_{15} and d_{50} are the densities (in units of mass per unit volume) of the liquid at 15 C (59 F) and 50 C (122 F), respectively.
TP27 - A portable tank having a minimum test pressure of 4 bar (400 kPa) may be used provided the calculated test pressure is 4 bar or less based on the MAWP of the hazardous material, as defined in 178.275 of this subchapter, where the test pressure is 1.5 times the MAWP.
DOT Packaging Exceptions (49 CFR 173.xxx) : 154
DOT Quantity Limitations Passenger aircraft/rail (49 CFR 173.27) : 1 L
DOT Quantity Limitations Cargo aircraft only (49 CFR 175.75) : 30 L
DOT Vessel Stowage Location : B - (i) The material may be stowed "on deck" or "under deck" on a cargo vessel and on a passenger vessel carrying a number of passengers limited to not more than the larger of 25 passengers, or one passenger per each 3 m of overall vessel length; and (ii) "On deck only" on passenger vessels in which the number of passengers specified in paragraph (k)(2)(i) of this section is exceeded.
DOT Vessel Stowage Other : 40 - Stow "clear of living quarters"
Emergency Response Guide (ERG) Number : 154
Other information : No supplementary information available.

Transport by sea

Transport document description (IMDG) : UN 3264 CORROSIVE LIQUID, ACIDIC, INORGANIC, N.O.S. (nitric acid, hydrofluoric acid), 8, II
UN-No. (IMDG) : 3264
Proper Shipping Name (IMDG) : CORROSIVE LIQUID, ACIDIC, INORGANIC, N.O.S.
Class (IMDG) : 8 - Corrosive substances
Packing group (IMDG) : II - substances presenting medium danger

Air transport

Transport document description (IATA) : UN 3264 Corrosive liquid, acidic, inorganic, n.o.s. (nitric acid, hydrofluoric acid), 8, II
UN-No. (IATA) : 3264
Proper Shipping Name (IATA) : Corrosive liquid, acidic, inorganic, n.o.s.
Class (IATA) : 8 - Corrosives
Packing group (IATA) : II - Medium Danger

SECTION 15: Regulatory information

15.1. US Federal regulations

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Chemical(s) subject to the reporting requirements of Section 313 or Title III of the Superfund Amendments and Reauthorization Act (SARA) of 1986 and 40 CFR Part 372.

| | | |
|-------------------|-------------------|----------|
| Nitric acid | CAS-No. 7697-37-2 | 10 - 30% |
| Hydrofluoric acid | CAS-No. 7664-39-3 | 1 - 5% |

Calcium nitrate (10124-37-5)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Nitric acid (7697-37-2)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

| | |
|--|---------|
| CERCLA RQ | 1000 lb |
| Section 302 EPCRA Reportable Quantity (RQ) | 1000 lb |
| SARA Section 302 Threshold Planning Quantity (TPQ) | 1000 lb |

Hydrofluoric acid (7664-39-3)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

| | |
|--|--------|
| CERCLA RQ | 100 lb |
| Section 302 EPCRA Reportable Quantity (RQ) | 100 lb |
| SARA Section 302 Threshold Planning Quantity (TPQ) | 100 lb |

Ammonium bifluoride (1341-49-7)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

| | |
|-----------|--------|
| CERCLA RQ | 100 lb |
|-----------|--------|

15.2. International regulations

CANADA

Calcium nitrate (10124-37-5)

Listed on the Canadian DSL (Domestic Substances List)

Nitric acid (7697-37-2)

Listed on the Canadian DSL (Domestic Substances List)

Hydrofluoric acid (7664-39-3)

Listed on the Canadian DSL (Domestic Substances List)

Ammonium bifluoride (1341-49-7)

Listed on the Canadian DSL (Domestic Substances List)

EU-Regulations

Calcium nitrate (10124-37-5)

Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances)

Nitric acid (7697-37-2)

Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances)

Hydrofluoric acid (7664-39-3)

Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances)

Ammonium bifluoride (1341-49-7)

Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances)

National regulations

Wonder Gel Stainless Steel Pickling Gel

All chemical substances in this product are listed in the EPA (Environment Protection Agency) TSCA (Toxic Substances Control Act) Inventory

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Calcium nitrate (10124-37-5)

Listed on the AICS (Australian Inventory of Chemical Substances)
Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
Listed on the Japanese ISHL (Industrial Safety and Health Law)
Listed on the Korean ECL (Existing Chemicals List)
Listed on NZIoC (New Zealand Inventory of Chemicals)
Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
Listed on INSQ (Mexican National Inventory of Chemical Substances)
Listed on CICR (Turkish Inventory and Control of Chemicals)
Listed on the TCSI (Taiwan Chemical Substance Inventory)

Nitric acid (7697-37-2)

Listed on the AICS (Australian Inventory of Chemical Substances)
Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
Listed on the Japanese ISHL (Industrial Safety and Health Law)
Listed on the Korean ECL (Existing Chemicals List)
Listed on NZIoC (New Zealand Inventory of Chemicals)
Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
Japanese Poisonous and Deleterious Substances Control Law
Listed on INSQ (Mexican National Inventory of Chemical Substances)
Listed on CICR (Turkish Inventory and Control of Chemicals)
Listed on the TCSI (Taiwan Chemical Substance Inventory)

Hydrofluoric acid (7664-39-3)

Listed on the AICS (Australian Inventory of Chemical Substances)
Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
Listed on the Japanese ISHL (Industrial Safety and Health Law)
Listed on the Korean ECL (Existing Chemicals List)
Listed on NZIoC (New Zealand Inventory of Chemicals)
Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
Japanese Poisonous and Deleterious Substances Control Law
Japanese Pollutant Release and Transfer Register Law (PRTR Law)
Listed on INSQ (Mexican National Inventory of Chemical Substances)
Listed on CICR (Turkish Inventory and Control of Chemicals)
Listed on the TCSI (Taiwan Chemical Substance Inventory)

Ammonium bifluoride (1341-49-7)

Listed on the AICS (Australian Inventory of Chemical Substances)
Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
Listed on the Japanese ISHL (Industrial Safety and Health Law)
Listed on the Korean ECL (Existing Chemicals List)
Listed on NZIoC (New Zealand Inventory of Chemicals)
Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
Japanese Poisonous and Deleterious Substances Control Law
Japanese Pollutant Release and Transfer Register Law (PRTR Law)
Listed on INSQ (Mexican National Inventory of Chemical Substances)
Listed on CICR (Turkish Inventory and Control of Chemicals)
Listed on the TCSI (Taiwan Chemical Substance Inventory)

15.3. US State regulations

Calcium nitrate (10124-37-5)

U.S. - New Jersey - Right to Know Hazardous Substance List

Nitric acid (7697-37-2)

U.S. - Massachusetts - Right To Know List
U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - Pennsylvania - RTK (Right to Know) - Environmental Hazard List
U.S. - Pennsylvania - RTK (Right to Know) List

Wonder Gel Stainless Steel Pickling Gel

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Hydrofluoric acid (7664-39-3)

U.S. - Massachusetts - Right To Know List
 U.S. - New Jersey - Right to Know Hazardous Substance List
 U.S. - Pennsylvania - RTK (Right to Know) - Environmental Hazard List
 U.S. - Pennsylvania - RTK (Right to Know) List

Ammonium bifluoride (1341-49-7)

U.S. - Massachusetts - Right To Know List
 U.S. - New Jersey - Right to Know Hazardous Substance List
 U.S. - Pennsylvania - RTK (Right to Know) - Environmental Hazard List
 U.S. - Pennsylvania - RTK (Right to Know) List

SECTION 16: Other information

Revision date : 04/03/2019

Full text of H-phrases:

| | |
|--|--|
| Acute Tox. 1 (Dermal) | Acute toxicity (dermal) Category 1 |
| Acute Tox. 2 (Dermal) | Acute toxicity (dermal) Category 2 |
| Acute Tox. 2 (Inhalation:dust,mist) | Acute toxicity (inhalation:dust,mist) Category 2 |
| Acute Tox. 2 (Oral) | Acute toxicity (oral) Category 2 |
| Acute Tox. 3 (Inhalation:dust,mist) | Acute toxicity (inhalation:dust,mist) Category 3 |
| Acute Tox. 3 (Oral) | Acute toxicity (oral) Category 3 |
| Acute Tox. 4 (Oral) | Acute toxicity (oral) Category 4 |
| Eye Dam. 1 | Serious eye damage/eye irritation Category 1 |
| Ox. Liq. 2 | Oxidizing liquids Category 2 |
| Ox. Liq. 3 | Oxidizing liquids Category 3 |
| Skin Corr. 1A | Skin corrosion/irritation Category 1A |
| Skin Corr. 1B | Skin corrosion/irritation Category 1B |
| H272 | May intensify fire; oxidizer |
| H300 | Fatal if swallowed |
| H301 | Toxic if swallowed |
| H302 | Harmful if swallowed |
| H310 | Fatal in contact with skin |
| H314 | Causes severe skin burns and eye damage |
| H318 | Causes serious eye damage |
| H330 | Fatal if inhaled |
| H331 | Toxic if inhaled |

SDS US (GHS HazCom 2012)

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product form : Mixture
Product name : Scalebuster R

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Scale remover

1.3. Details of the supplier of the safety data sheet

Trucent CentraSep Technologies LLC
14425 Bergen Blvd. Suite A-1
Noblesville, IN 46060
317-660-6670

1.4. Emergency telephone number

Emergency number : 24 Hour Contact CHEMTREC: 1-800-424-9300

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

Classification (GHS-US)

Acute Tox. 4 (Inhalation:dust,mist) H332
Skin Corr. 1A H314

2.2. Label elements

GHS-US labeling

Hazard pictograms (GHS-US) :



GHS05

GHS07

Signal word (GHS-US) :

Danger

Hazard statements (GHS-US) :

H314 - Causes severe skin burns and eye damage
H332 - Harmful if inhaled

Precautionary statements (GHS-US) :

P260 - Do not breathe vapors
P264 - Wash hands and other exposed areas thoroughly after handling
P271 - Use only outdoors or in a well-ventilated area
P280 - Wear protective equipment
P301 + P330 + P331 - If swallowed: rinse mouth. Do NOT induce vomiting
P303 + P361 + P353 - If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
P304 + P340 - If inhaled: Remove person to fresh air and keep comfortable for breathing
P305+P351+P338 - If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
P312 - Call a poison center or doctor/physician if you feel unwell
P363 - Wash contaminated clothing before reuse

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS-US)

None of the ingredients in the mixture are of unknown toxicity

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable – product is a mixture

3.2. Mixture

| Name | Product identifier | % | Classification (GHS-US) |
|-------------------|--------------------|---------|--|
| Hydrogen chloride | (CAS No) 7647-01-0 | 5 – 15* | Acute Tox. 3 (Inhalation:gas), H331 Skin Corr. 1A, H314 |
| 2-Butoxyethanol | (CAS No) 111-76-2 | <= 5* | Flam. Liq. 4, H227 Acute Tox. 4 (Oral), H302 Acute Tox. 3 (Dermal), H311 |

*The exact percentages have been withheld as a trade secret

Scalebuster R

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 4: First aid measures

4.1. Description of first aid measures

| | |
|---------------------------------------|--|
| First-aid measures general | : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the product label where possible). |
| First-aid measures after inhalation | : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a poison center or doctor/physician if you feel unwell. |
| First-aid measures after skin contact | : Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. Immediately call a poison center or doctor/physician. |
| First-aid measures after eye contact | : Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison center or doctor/physician. |
| First-aid measures after ingestion | : Rinse mouth. Do NOT induce vomiting. Immediately call a poison center or doctor/physician. |

4.2. Most important symptoms and effects, both acute and delayed

| | |
|------------------------------------|--|
| Symptoms/injuries | : Causes severe skin burns and eye damage. |
| Symptoms/injuries after inhalation | : Danger of serious damage to health by prolonged exposure through inhalation. Harmful if inhaled. |

4.3. Indication of any immediate medical attention and special treatment needed

No additional information available

SECTION 5: Firefighting measures

5.1. Extinguishing media

| | |
|--------------------------------|--|
| Suitable extinguishing media | : Foam. Dry powder. Carbon dioxide. Water spray. Sand. |
| Unsuitable extinguishing media | : Do not use a heavy water stream. |

5.2. Special hazards arising from the substance or mixture

| | |
|------------|---|
| Reactivity | : Thermal decomposition generates : Corrosive vapors. |
|------------|---|

5.3. Advice for firefighters

| | |
|--------------------------------|--|
| Firefighting instructions | : Use water spray or fog for cooling exposed containers. Exercise caution when fighting any chemical fire. Contain all water used for fire-fighting to the greatest extent possible. |
| Protection during firefighting | : Do not enter fire area without proper protective equipment, including respiratory protection. |

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

6.1.1. For non-emergency personnel

| | |
|----------------------|-----------------------------------|
| Emergency procedures | : Evacuate unnecessary personnel. |
|----------------------|-----------------------------------|

6.1.2. For emergency responders

| | |
|----------------------|--|
| Protective equipment | : Equip cleanup crew with proper protection. |
| Emergency procedures | : Ventilate area. |

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

| | |
|-------------------------|--|
| Methods for cleaning up | : Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Collect spillage. Store away from other materials. |
|-------------------------|--|

6.4. Reference to other sections

See Heading 8. Exposure controls and personal protection.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

| | |
|-------------------------------|--|
| Precautions for safe handling | : Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work. Provide good ventilation in process area to prevent formation of vapor. Use only outdoors or in a well-ventilated area. Do not breathe vapors. Avoid contact during pregnancy/while nursing. |
| Hygiene measures | : Wash hands and other exposed areas thoroughly after handling. |

7.2. Conditions for safe storage, including any incompatibilities

| | |
|------------------------|---|
| Technical measures | : Comply with applicable regulations. |
| Storage conditions | : Keep only in the original container in a cool, well ventilated place. Keep container closed when not in use. Do not freeze. |
| Incompatible products | : Strong bases. Strong acids. |
| Incompatible materials | : Sources of ignition. Direct sunlight. |

Scalebuster R

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

7.3. Specific end use(s)

No additional information available

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| 2-Butoxyethanol (111-76-2) | | |
|----------------------------|-------------------------------------|-----------------------|
| ACGIH | ACGIH TWA (ppm) | 20 ppm |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 240 mg/m ³ |
| OSHA | OSHA PEL (TWA) (ppm) | 50 ppm |

| Hydrogen chloride (7647-01-0) | | |
|-------------------------------|---|---------------------|
| ACGIH | ACGIH Ceiling (ppm) | 2 ppm |
| OSHA | OSHA PEL (Ceiling) (mg/m ³) | 7 mg/m ³ |
| OSHA | OSHA PEL (Ceiling) (ppm) | 5 ppm |

8.2. Exposure controls

| | |
|----------------------------------|---|
| Appropriate engineering controls | : Ensure that proper ventilation is provided to maintain exposures below regulated limits. |
| Personal protective equipment | : Avoid all unnecessary exposure. |
| Hand protection | : Wear protective gloves. |
| Eye protection | : Chemical goggles and face shield. |
| Skin and body protection | : Wear suitable protective clothing. |
| Respiratory protection | : Not typically required. In those cases where exposures exceed occupational control limits a NIOSH approved respirator is recommended. |
| Other information | : Do not eat, drink or smoke during use. |

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|---|---------------------|
| Physical state | : Liquid |
| Color | : Pale yellow |
| Odor | : Lime |
| Odor threshold | : No data available |
| pH | : 1.0 |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : 101 °C |
| Flash point | : No data available |
| Relative evaporation rate (butyl acetate=1) | : No data available |
| Flammability (solid, gas) | : No data available |
| Explosion limits | : No data available |
| Explosive properties | : No data available |
| Oxidizing properties | : No data available |
| Vapor pressure | : 30 mm Hg |
| Relative density | : 1.0 |
| Relative vapor density at 20 °C | : No data available |
| Solubility | : Infinite in water |
| Log Pow | : No data available |
| Log Kow | : No data available |
| Auto-ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Viscosity | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |

9.2. Other information

No additional information available

Scalebuster R

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 10: Stability and reactivity

10.1. Reactivity

Thermal decomposition generates : Corrosive vapors.

10.2. Chemical stability

Not established.

10.3. Possibility of hazardous reactions

Not established.

10.4. Conditions to avoid

Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids. Strong bases.

10.6. Hazardous decomposition products

Carbon monoxide. Carbon dioxide. Thermal decomposition generates : Corrosive vapors.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Likely routes of exposure : Skin and eye contact; Ingestion; Inhalation

Acute toxicity : Inhalation:dust/mist: Harmful if inhaled.

| Scalebuster R | |
|-------------------------------|---------------------------|
| ATE US (dust, mist) | 3.472 mg/l/4h |
| 2-Butoxyethanol (111-76-2) | |
| LD50 oral rat | 470 mg/kg |
| LD50 dermal rabbit | 400 mg/kg |
| LC50 inhalation rat (ppm) | 450 ppm/4h |
| ATE US (oral) | 470.000 mg/kg body weight |
| ATE US (dermal) | 400.000 mg/kg body weight |
| ATE US (gases) | 450.000 ppmV/4h |
| Hydrogen chloride (7647-01-0) | |
| LD50 oral rat | 700 mg/kg |
| LD50 dermal rabbit | > 5010 mg/kg |
| LC50 inhalation rat (ppm) | 3124 ppm/1h |
| ATE US (oral) | 700.000 mg/kg body weight |
| ATE US (gases) | 1562.000 ppmV/4h |
| ATE US (vapors) | 3.000 mg/l/4h |
| ATE US (dust, mist) | 0.500 mg/l/4h |

Skin corrosion/irritation : Causes severe skin burns and eye damage.

Serious eye damage/irritation : Causes severe skin burns and eye damage.

Respiratory or skin sensitization : Not classified

Germ cell mutagenicity : Not classified

Carcinogenicity : Not classified

| 2-Butoxyethanol (111-76-2) | |
|--|---------------------------------|
| IARC group | 3 - Not classifiable |
| National Toxicology Program (NTP) Status | 1 - Evidence of Carcinogenicity |
| Hydrogen chloride (7647-01-0) | |
| IARC group | 3 - Not classifiable |

Reproductive toxicity : Not classified

Specific target organ toxicity (single exposure) : Not classified

Specific target organ toxicity (repeated exposure) : Not classified

Aspiration hazard : Not classified

Potential Adverse human health effects and symptoms : Harmful if inhaled.

Symptoms/injuries after inhalation : Danger of serious damage to health by prolonged exposure through inhalation. Harmful if inhaled.

Scalebuster R

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 12: Ecological information

12.1. Toxicity

| 2-Butoxyethanol (111-76-2) | |
|----------------------------|---|
| LC50 fish 1 | 1490 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [static]) |
| EC50 Daphnia 1 | > 1000 mg/l (Exposure time: 48 h - Species: Daphnia magna) |
| LC50 fish 2 | 2950 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus) |

12.2. Persistence and degradability

| Scalebuster R | |
|-------------------------------|------------------|
| Persistence and degradability | Not established. |
| 2-Butoxyethanol (111-76-2) | |
| Persistence and degradability | Not established. |
| Hydrogen chloride (7647-01-0) | |
| Persistence and degradability | Not established. |

12.3. Bioaccumulative potential

| Scalebuster R | |
|-------------------------------|------------------|
| Bioaccumulative potential | Not established. |
| 2-Butoxyethanol (111-76-2) | |
| Log Pow | 0.81 (at 25 °C) |
| Bioaccumulative potential | Not established. |
| Hydrogen chloride (7647-01-0) | |
| Bioaccumulative potential | Not established. |

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

Other information : Avoid release to the environment.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste disposal recommendations : Dispose in a safe manner in accordance with local, state, and federal regulations.
Ecology - waste materials : Avoid release to the environment.

SECTION 14: Transport information

Department of Transportation (DOT)

In accordance with DOT

Transport document description : UN1789 Hydrochloric acid, 8, III
UN-No.(DOT) : UN1789
Proper Shipping Name (DOT) : Hydrochloric acid
Department of Transportation (DOT) Hazard Classes : 8 - Class 8 - Corrosive material 49 CFR 173.136

Hazard labels (DOT) : 8 - Corrosive



Packing group (DOT) : III - Minor Danger
DOT Packaging Non Bulk (49 CFR 173.xxx) : 203
DOT Packaging Bulk (49 CFR 173.xxx) : 241

Scalebuster R

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|--|--|
| DOT Special Provisions (49 CFR 172.102) | : A3 - For combination packaging, if glass inner packaging (including ampoules) are used, they must be packed with absorbent material in tightly closed metal receptacles before packing in outer packaging. IB3 - Authorized IBCs: Metal (31A, 31B and 31N); Rigid plastics (31H1 and 31H2); Composite (31HZ1 and 31HA2, 31HB2, 31HN2, 31HD2 and 31HH2). Additional Requirement: Only liquids with a vapor pressure less than or equal to 110 kPa at 50 C (1.1 bar at 122 F), or 130 kPa at 55 C (1.3 bar at 131 F) are authorized, except for UN2672 (also see Special Provision IP8 in Table 2 for UN2672). T4 - 2.65 178.274(d)(2) Normal. 178.275(d)(3) TP1 - The maximum degree of filling must not exceed the degree of filling determined by the following: Degree of filling = $97 / 1 + a (tr - tf)$ Where: tr is the maximum mean bulk temperature during transport, and tf is the temperature in degrees celsius of the liquid during filling. TP12 - This material is considered highly corrosive to steel. |
| DOT Packaging Exceptions (49 CFR 173.xxx) | : 154 |
| DOT Quantity Limitations Passenger aircraft/rail (49 CFR 173.27) | : 5 L |
| DOT Quantity Limitations Cargo aircraft only (49 CFR 175.75) | : 60 L |
| DOT Vessel Stowage Location | : C- The material must be stowed "on deck only" on a cargo vessel and on a passenger vessel. |
| DOT Vessel Stowage Other | : 8 - Glass carboys not permitted on passenger vessels |

Additional information

ADR

No additional information available

Transport by sea

No additional information available

Air transport

No additional information available

SECTION 15: Regulatory information

15.1. US Federal regulations

| | |
|---|--|
| Scalebuster R | |
| SARA Section 311/312 Hazard Classes | Immediate (acute) health hazard |
| 2-Butoxyethanol (111-76-2) | |
| Listed on the United States TSCA (Toxic Substances Control Act) inventory | |
| SARA Section 313 - Emission Reporting | Reportable chemical (Glycol Ethers Category) |
| Hydrogen chloride (7647-01-0) | |
| Listed on the United States TSCA (Toxic Substances Control Act) inventory | |
| SARA Section 302 Threshold Planning Quantity (TPQ) | 500 (gas only) |
| SARA Section 313 - Emission Reporting | Reportable chemical (Aerosol forms only) |

15.2. International regulations

CANADA

| | |
|---|--|
| 2-Butoxyethanol (111-76-2) | |
| Listed on the Canadian DSL (Domestic Substances List) | |
| Hydrogen chloride (7647-01-0) | |
| Listed on the Canadian DSL (Domestic Substances List) | |

EU-Regulations

| | |
|--|--|
| 2-Butoxyethanol (111-76-2) | |
| Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances) | |
| Hydrogen chloride (7647-01-0) | |
| Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances) | |

Classification according to Regulation (EC) No. 1272/2008 [CLP]

No additional information available

Classification according to Directive 67/548/EEC [DSD] or 1999/45/EC [DPD]

No additional information available

Scalebuster R

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

National regulations

2-Butoxyethanol (111-76-2)

Listed on the AICS (Australian Inventory of Chemical Substances)
Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
Listed on the Korean ECL (Existing Chemicals List)
Listed on NZIoC (New Zealand Inventory of Chemicals)
Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
Listed on the Canadian IDL (Ingredient Disclosure List)

Hydrogen chloride (7647-01-0)

Listed on the AICS (Australian Inventory of Chemical Substances)
Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
Listed on the Korean ECL (Existing Chemicals List)
Listed on NZIoC (New Zealand Inventory of Chemicals)
Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
Poisonous and Deleterious Substances Control Law
Listed on the Canadian IDL (Ingredient Disclosure List)

15.3. US State regulations

No additional information available

SECTION 16: Other information

Other information : None.

Full text of H-phrases:

| | |
|-------------------------------------|--|
| Acute Tox. 3 (Dermal) | Acute toxicity (dermal) Category 3 |
| Acute Tox. 3 (Inhalation) | Acute toxicity (inhalation) Category 3 |
| Acute Tox. 3 (Inhalation:gas) | Acute toxicity (inhalation:gas) Category 3 |
| Acute Tox. 4 (Inhalation:dust,mist) | Acute toxicity (inhalation:dust,mist) Category 4 |
| Acute Tox. 4 (Oral) | Acute toxicity (oral) Category 4 |
| Flam. Liq. 4 | Flammable liquids Category 4 |
| Skin Corr. 1A | Skin corrosion/irritation Category 1A |
| H227 | Combustible liquid |
| H302 | Harmful if swallowed |
| H311 | Toxic in contact with skin |
| H314 | Causes severe skin burns and eye damage |
| H331 | Toxic if inhaled |
| H332 | Harmful if inhaled |

SDS US (GHS HazCom 2012)

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product

Product Name: MOBIL RARUS 424
Revision Date: 24 Feb 2021
Revision Number: 1.05
Page 1 of 12

SAFETY DATA SHEET

| | |
|------------------|---|
| SECTION 1 | IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY / UNDERTAKING |
|------------------|---|

As of the revision date above, this SDS meets the regulations in the United Kingdom excluding Northern Ireland.

1.1. PRODUCT IDENTIFIER

Product Name: MOBIL RARUS 424
Product Description: Base Oil and Additives
Product Code: 201560202010, 400568, 606038-60

1.2. RELEVANT IDENTIFIED USES OF THE SUBSTANCE OR MIXTURE AND USES ADVISED AGAINST

Intended Use: Air compressor oil

Uses advised against: None unless specified elsewhere in this SDS.

1.3. DETAILS OF THE SUPPLIER OF THE SAFETY DATA SHEET

Supplier: EXXONMOBIL MARINE LIMITED
ERMYN HOUSE
MAILPOINT 31, ERMYN WAY
KT22 8UX LEATHERHEAD
United Kingdom

Supplier General Contact: (UK) (+44) (0) 1372 222 000
E-Mail: sds.uk@exxonmobil.com

1.4. EMERGENCY TELEPHONE NUMBER

24 Hour Emergency Telephone: (UK) (+44) (0) 23 8089 1558
National Poison Control Centre: (UK) 111

| | |
|------------------|-------------------------------|
| SECTION 2 | HAZARDS IDENTIFICATION |
|------------------|-------------------------------|

2.1. CLASSIFICATION OF SUBSTANCE OR MIXTURE

Classification according to CLP

Not Classified

2.2. LABEL ELEMENTS

Label elements according to CLP

Product Name: MOBIL RARUS 424
 Revision Date: 24 Feb 2021
 Revision Number: 1.05
 Page 2 of 12

Hazard Statements:

Supplemental:

EUH210: Safety data sheet available on request.
 EUH208: Contains: N-PHENYL-1-NAPHTHYLAMINE, OXA DITHIA PHOSPHATETRADECANOIC ACID ETHYLHEXYL ESTER May produce an allergic reaction.

2.3. OTHER HAZARDS

Physical / Chemical Hazards:

No significant hazards.

Health Hazards:

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

Environmental Hazards:

No significant hazards. Material does not meet the criteria for PBT or vPvB in accordance with REACH Annex XIII.

SECTION 3 COMPOSITION / INFORMATION ON INGREDIENTS

3.1. SUBSTANCES Not Applicable. This material is regulated as a mixture.

3.2. MIXTURES

This material is defined as a mixture.

Reportable hazardous substance(s) complying with the classification criteria and/or with an exposure limit (OEL)

| Name | CAS# | EC# | Registration# | Concentration * | GHS/CLP classification |
|---|------------|-----------|------------------|-----------------|---|
| N-PHENYL-1-NAPHTHYLAMINE | 90-30-2 | 201-983-0 | 01-2119488704-27 | 0.1 - < 1% | Acute Tox. 4 H302, Skin Sens. 1B H317, Aquatic Acute 1 H400 (M factor 1), Aquatic Chronic 1 H410 (M factor 1), STOT RE 2 H373 |
| OXA DITHIA PHOSPHATETRADECANOIC ACID ETHYLHEXYL ESTER | 83547-95-9 | 280-479-2 | 01-2120768774-38 | 0.1 - < 1% | [Aquatic Acute 2 H401], Aquatic Chronic 2 H411, Skin Irrit. 2 H315, Skin Sens. 1B H317 |

Note - any classification in brackets is a GHS building block that was not adopted in CLP and therefore is not applicable in the countries which have implemented CLP and is shown for informational purposes only.

Note: See SDS Section 16 for full text of hazard statements.

Product Name: MOBIL RARUS 424
Revision Date: 24 Feb 2021
Revision Number: 1.05
Page 3 of 12

SECTION 4 FIRST AID MEASURES

4.1. DESCRIPTION OF FIRST AID MEASURES

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

4.2. MOST IMPORTANT SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED

Local necrosis as evidenced by delayed onset of pain and tissue damage a few hours after injection.

4.3. INDICATION OF ANY IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT NEEDED

The need to have special means for providing specific and immediate medical treatment available in the workplace is not expected.

SECTION 5 FIRE FIGHTING MEASURES

5.1. EXTINGUISHING MEDIA

Suitable Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Unsuitable Extinguishing Media: Straight streams of water

5.2. SPECIAL HAZARDS ARISING FROM THE SUBSTANCE OR MIXTURE

Hazardous Combustion Products: Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulphur oxides

5.3. ADVICE FOR FIRE FIGHTERS

Fire Fighting Instructions: Evacuate area. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

FLAMMABILITY PROPERTIES

Flash Point [Method]: >200°C (392°F) [ASTM D-92]

Product Name: MOBIL RARUS 424
Revision Date: 24 Feb 2021
Revision Number: 1.05
Page 4 of 12

Upper/Lower Flammable Limits (Approximate volume % in air): UEL: 7.0 LEL: 0.9 [Estimated]
Autoignition Temperature: No data available

| | |
|------------------|------------------------------------|
| SECTION 6 | ACCIDENTAL RELEASE MEASURES |
|------------------|------------------------------------|

6.1. PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

6.2. ENVIRONMENTAL PRECAUTIONS

Large Spills: Dyke far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

6.3. METHODS AND MATERIAL FOR CONTAINMENT AND CLEANING UP

Land Spill: Stop leak if you can do so without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do so without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

6.4. REFERENCES TO OTHER SECTIONS

See Sections 8 and 13.

| | |
|------------------|-----------------------------|
| SECTION 7 | HANDLING AND STORAGE |
|------------------|-----------------------------|

7.1. PRECAUTIONS FOR SAFE HANDLING

Product Name: MOBIL RARUS 424
Revision Date: 24 Feb 2021
Revision Number: 1.05
Page 5 of 12

This material is not intended for use in air compressors for breathing applications. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or earthing procedures. However, bonding and earthing may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

Static Accumulator: This material is a static accumulator.

7.2. CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

7.3. SPECIFIC END USES

Section 1 informs about identified end-uses. No industrial or sector specific guidance available.

SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

8.1. CONTROL PARAMETERS

Exposure limits/standards for materials that can be formed when handling this product: When mists/aerosols can occur the following is recommended: 5 mg/m³ - ACGIH TLV (inhalable fraction).

Note: Information about recommended monitoring procedures can be obtained from the relevant agency(ies)/institute(s):

UK Health and Safety Executive (HSE)

8.2. EXPOSURE CONTROLS

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:
No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

Product Name: MOBIL RARUS 424
Revision Date: 24 Feb 2021
Revision Number: 1.05
Page 6 of 12

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

| | |
|------------------|---|
| SECTION 9 | PHYSICAL AND CHEMICAL PROPERTIES |
|------------------|---|

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

9.1. INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES

Physical State: Liquid

Colour: Amber

Odour: Characteristic

Odour Threshold: No data available

pH: Not technically feasible

Melting Point: Not technically feasible

Freezing Point: No data available

Initial Boiling Point / and Boiling Range: > 316°C (600°F) [Estimated]

Flash Point [Method]: >200°C (392°F) [ASTM D-92]

Evaporation Rate (n-butyl acetate = 1): No data available

Flammability (Solid, Gas): Not technically feasible

Upper/Lower Flammable Limits (Approximate volume % in air): UEL: 7.0 LEL: 0.9 [Estimated]

Product Name: MOBIL RARUS 424
 Revision Date: 24 Feb 2021
 Revision Number: 1.05
 Page 7 of 12

Vapour Pressure: < 0.013 kPa (0.1 mm Hg) at 20 °C [Estimated]
Vapour Density (Air = 1): > 2 at 101 kPa [Estimated]
Relative Density (at 15 °C): 0.866 [test method unavailable]
Solubility(ies): water Negligible
Partition coefficient (n-Octanol/Water Partition Coefficient): > 3.5 [Estimated]
Autoignition Temperature: No data available
Decomposition Temperature: No data available
Viscosity: 32 cSt (32 mm²/sec) at 40°C | 5.4 cSt (5.4 mm²/sec) at 100°C [ASTM D 445]
Explosive Properties: None
Oxidizing Properties: None

9.2. OTHER INFORMATION

Pour Point: -18°C (0°F) [ASTM D97]
DMSO Extract (mineral oil only), IP-346: < 3 %wt

| SECTION 10 | STABILITY AND REACTIVITY |
|------------|--------------------------|
|------------|--------------------------|

- 10.1. REACTIVITY:** See sub-sections below.
- 10.2. CHEMICAL STABILITY:** Material is stable under normal conditions.
- 10.3. POSSIBILITY OF HAZARDOUS REACTIONS:** Hazardous polymerization will not occur.
- 10.4. CONDITIONS TO AVOID:** Excessive heat. High energy sources of ignition.
- 10.5. INCOMPATIBLE MATERIALS:** Strong oxidisers
- 10.6. HAZARDOUS DECOMPOSITION PRODUCTS:** Material does not decompose at ambient temperatures.

| SECTION 11 | TOXICOLOGICAL INFORMATION |
|------------|---------------------------|
|------------|---------------------------|

11.1. INFORMATION ON TOXICOLOGICAL EFFECTS

| Hazard Class | Conclusion / Remarks |
|--|---|
| Inhalation | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Irritation: No end point data for material. | Negligible hazard at ambient/normal handling temperatures. |
| Ingestion | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin Corrosion/Irritation: No end point data for material. | Negligible irritation to skin at ambient temperatures. Based on assessment of the components. |
| Eye | |
| Serious Eye Damage/Irritation: No end point | May cause mild, short-lasting discomfort to eyes. Based on |

Product Name: MOBIL RARUS 424
 Revision Date: 24 Feb 2021
 Revision Number: 1.05
 Page 8 of 12

| | |
|--|--|
| data for material. | assessment of the components. |
| Sensitisation | |
| Respiratory Sensitization: No end point data for material. | Not expected to be a respiratory sensitizer. |
| Skin Sensitization: No end point data for material. | Not expected to be a skin sensitizer. Based on assessment of the components. |
| Aspiration: Data available. | Not expected to be an aspiration hazard. Based on physico-chemical properties of the material. |
| Germ Cell Mutagenicity: No end point data for material. | Not expected to be a germ cell mutagen. Based on assessment of the components. |
| Carcinogenicity: No end point data for material. | Not expected to cause cancer. Based on assessment of the components. |
| Reproductive Toxicity: No end point data for material. | Not expected to be a reproductive toxicant. Based on assessment of the components. |
| Lactation: No end point data for material. | Not expected to cause harm to breast-fed children. |
| Specific Target Organ Toxicity (STOT) | |
| Single Exposure: No end point data for material. | Not expected to cause organ damage from a single exposure. |
| Repeated Exposure: No end point data for material. | Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components. |

TOXICITY FOR SUBSTANCES

| NAME | ACUTE TOXICITY |
|--------------------------|--|
| N-PHENYL-1-NAPHTHYLAMINE | Oral Lethality: LD 50 1625 mg/kg (Rat) |

OTHER INFORMATION

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitising in test animals.

SECTION 12 ECOLOGICAL INFORMATION

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

12.1. TOXICITY

Material -- Not expected to be harmful to aquatic organisms.

12.2. PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

12.3. BIOACCUMULATIVE POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

12.4. MOBILITY IN SOIL

Base oil component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

Product Name: MOBIL RARUS 424
Revision Date: 24 Feb 2021
Revision Number: 1.05
Page 9 of 12

12.5. PERSISTENCE, BIOACCUMULATION AND TOXICITY FOR SUBSTANCE(S)

Material does not meet the Reach Annex XIII criteria for PBT or vPvB.

12.6. OTHER ADVERSE EFFECTS

No adverse effects are expected.

| | |
|-------------------|--------------------------------|
| SECTION 13 | DISPOSAL CONSIDERATIONS |
|-------------------|--------------------------------|

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

13.1. WASTE TREATMENT METHODS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products. Protect the environment. Dispose of used oil at designated sites. Minimize skin contact. Do not mix used oils with solvents, brake fluids or coolants.

European Waste Code: 13 02 05*

NOTE: These codes are assigned based upon the most common uses for this material and may not reflect contaminants resulting from actual use. Waste producers need to assess the actual process used when generating the waste and its contaminants in order to assign the proper waste disposal code(s).

This material is considered as hazardous waste pursuant to The Hazardous Waste Regulations (HWR), and subject to the provisions of those Regulations.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

| | |
|-------------------|------------------------------|
| SECTION 14 | TRANSPORT INFORMATION |
|-------------------|------------------------------|

LAND (ADR/RID): 14.1-14.6 Not Regulated for Land Transport

INLAND WATERWAYS (ADN): 14.1-14.6 Not Regulated for Inland Waterways Transport

SEA (IMDG): 14.1-14.6 Not Regulated for Sea Transport according to IMDG-Code

SEA (MARPOL 73/78 Convention - Annex II):

Product Name: MOBIL RARUS 424
 Revision Date: 24 Feb 2021
 Revision Number: 1.05
 Page 10 of 12

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code
 Not classified according to Annex II

AIR (IATA): 14.1-14.6 Not Regulated for Air Transport

| | |
|-------------------|-------------------------------|
| SECTION 15 | REGULATORY INFORMATION |
|-------------------|-------------------------------|

REGULATORY STATUS AND APPLICABLE LAWS AND REGULATIONS

Listed or exempt from listing/notification on the following chemical inventories (May contain substance(s) subject to notification to the EPA Active TSCA inventory prior to import to USA): AIIC, IECSC, KECI, PICCS, TSCA
Special Cases:

| Inventory | Status |
|-----------|--------------------|
| ENCS | Restrictions Apply |
| NDSL | Restrictions Apply |

15.1. SAFETY, HEALTH AND ENVIRONMENTAL REGULATIONS/LEGISLATION SPECIFIC FOR THE SUBSTANCE OR MIXTURE

Applicable UK legislation:

REACH [... Registration, Evaluation, Authorisation and Restriction of Chemicals ... and amendments thereto]
 CLP [Classification, labelling and packaging of substances and mixtures.. and amendments thereto]

REACH Restrictions on the manufacturing, placing on the market and use of certain dangerous substances, mixtures and articles (Annex XVII):

The following entries of Annex XVII may be considered for this product: None

15.2. CHEMICAL SAFETY ASSESSMENT

REACH Information: A Chemical Safety Assessment has been carried out for one or more substances present in the material.

| | |
|-------------------|--------------------------|
| SECTION 16 | OTHER INFORMATION |
|-------------------|--------------------------|

REFERENCES: Sources of information used in preparing this SDS included one or more of the following: results from in house or supplier toxicology studies, CONCAWE Product Dossiers, publications from other trade associations, such as the EU Hydrocarbon Solvents REACH Consortium, U.S. HPV Program Robust Summaries, the EU IUCLID Data Base, U.S. NTP publications, and other sources, as appropriate.

Product Name: MOBIL RARUS 424

Revision Date: 24 Feb 2021

Revision Number: 1.05

Page 11 of 12

List of abbreviations and acronyms that could be (but not necessarily are) used in this safety data sheet:

| Acronym | Full text |
|----------------|--|
| N/A | Not applicable |
| N/D | Not determined |
| NE | Not established |
| VOC | Volatile Organic Compound |
| AIIC | Australian Inventory of Industrial Chemicals |
| AIHA WEEL | American Industrial Hygiene Association Workplace Environmental Exposure Limits |
| ASTM | ASTM International, originally known as the American Society for Testing and Materials (ASTM) |
| DSL | Domestic Substance List (Canada) |
| EINECS | European Inventory of Existing Commercial Substances |
| ELINCS | European List of Notified Chemical Substances |
| ENCS | Existing and new Chemical Substances (Japanese inventory) |
| IECSC | Inventory of Existing Chemical Substances in China |
| KECI | Korean Existing Chemicals Inventory |
| NDSL | Non-Domestic Substances List (Canada) |
| NZIoC | New Zealand Inventory of Chemicals |
| PICCS | Philippine Inventory of Chemicals and Chemical Substances |
| TLV | Threshold Limit Value (American Conference of Governmental Industrial Hygienists) |
| TSCA | Toxic Substances Control Act (U.S. inventory) |
| UVCB | Substances of Unknown or Variable composition, Complex reaction products or Biological materials |
| LC | Lethal Concentration |
| LD | Lethal Dose |
| LL | Lethal Loading |
| EC | Effective Concentration |
| EL | Effective Loading |
| NOEC | No Observable Effect Concentration |
| NOELR | No Observable Effect Loading Rate |

KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):

Acute Tox. 4 H302: Harmful if swallowed; Acute Tox Oral, Cat 4

Skin Irrit. 2 H315: Causes skin irritation; Skin Corr/Irritation, Cat 2

Skin Sens. 1 H317: May cause allergic skin reaction; Skin Sensitization, Cat 1

Aquatic Acute 1 H400: Very toxic to aquatic life; Acute Env Tox, Cat 1

[Aquatic Acute 2 H401]: Toxic to aquatic life; Acute Env Tox, Cat 2

Aquatic Chronic 1 H410: Very toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 1

Aquatic Chronic 2 H411: Toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 2

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

GHS CLP Supplemental Statements information was added.

GHS Target Organ Phrase information was deleted.

Hazard Identification: Section 3 Footnotes for CLP tables information was modified.

Section 02: GHS Sensitizer Statement information was added.

Section 02: GHS Sensitizer Statement information was deleted.

Section 13: European Waste Code Hazardous Note information was modified.

Section 15: EU Directives and Regulations information was modified.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and

Product Name: MOBIL RARUS 424

Revision Date: 24 Feb 2021

Revision Number: 1.05

Page 12 of 12

examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0B, 0B, 0, 0, 0, 0

PPEC: A

DGN: 2008391QGB (547538)

| |
|--------------|
| ANNEX |
|--------------|

Annex not required for this material.



Revision Number: 002.0

Issue date: 12/15/2014

1. PRODUCT AND COMPANY IDENTIFICATION

| | | | |
|----------------------------|---|-----------------------------|--|
| Product name: | Loctite® PL300® Foamboard Construction Adhesive | IDH number: | 1421941 |
| Product type: | Water based adhesive | Region: | United States |
| Restriction of Use: | None identified | Contact information: | Telephone: +1 (800) 624-7767 |
| Company address: | Henkel Corporation One Henkel Way Rocky Hill, Connecticut 06067 | | MEDICAL EMERGENCY Phone: Poison Control Center 1-877-671-4608 (toll free) or 1-303-592-1711 TRANSPORT EMERGENCY Phone: CHEMTREC 1-800-424-9300 (toll free) or 1-703-527-3887 |

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

WARNING: ABRASION COULD RELEASE RESPIRABLE PARTICLES OF SILICA QUARTZ, A CANCER HAZARD BY INHALATION. NORMAL USE OF THIS PRODUCT CAUSES NO SUCH RELEASE.

CAUSES SERIOUS EYE IRRITATION.

| HAZARD CLASS | HAZARD CATEGORY |
|----------------|-----------------|
| EYE IRRITATION | 2A |

PICTOGRAM(S)



Precautionary Statements

| | |
|--------------------|---|
| Prevention: | Wash thoroughly after handling. Wear eye and face protection. |
| Response: | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to remove. Continue rinsing. If eye irritation persists: Get medical attention. |
| Storage: | Not prescribed |
| Disposal: | Not prescribed |

Classification complies with OSHA Hazard Communication Standard (29 CFR 1910.1200) and is consistent with the provisions of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

| Hazardous Component(s) | CAS Number | Percentage* |
|----------------------------|------------|-------------|
| Limestone | 1317-65-3 | 30 - 60 |
| Quartz (SiO ₂) | 14808-60-7 | 0.1 - 1 |

* Exact percentage is a trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

| | |
|----------------------|--|
| Inhalation: | No specific treatment is necessary since material is not likely to be hazardous by inhalation. |
| Skin contact: | Wash affected area immediately with soap and water. |
| Eye contact: | Immediately flush eyes with plenty of water for at least 15 minutes. If symptoms develop and persist, get medical attention. |
| Ingestion: | Consult a physician if necessary. |
| Symptoms: | See Section 11. |

5. FIRE FIGHTING MEASURES

| | |
|---|---|
| Extinguishing media: | Carbon dioxide, foam, powder Water fog. |
| Special firefighting procedures: | Use water spray to keep fire exposed containers cool and disperse vapors. |
| Unusual fire or explosion hazards: | Closed containers may rupture (due to build up of pressure) when exposed to extreme heat. |
| Hazardous combustion products: | Oxides of carbon. Oxides of nitrogen. |

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

| | |
|-----------------------------------|--|
| Environmental precautions: | Not available. |
| Clean-up methods: | Absorb spill with inert material. Shovel material into appropriate container for disposal. |

7. HANDLING AND STORAGE

| | |
|------------------|---|
| Handling: | Avoid prolonged or repeated skin contact with this material. Keep out of the reach of children. |
| Storage: | For safe storage, store at or above 0 °C (32°F) Keep from freezing. Store in a cool, dry area. Keep containers closed when not in use. |

For information on product shelf life, please review labels on container or check the Technical Data Sheet.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

| Hazardous Component(s) | ACGIH TLV | OSHA PEL | AIHA WEEL | OTHER |
|----------------------------|--|---|-----------|-------|
| Limestone | 10 mg/m ³ TWA Total dust. | 5 mg/m ³ PEL Respirable fraction. 15 mg/m ³ PEL Total dust. | None | None |
| Quartz (SiO ₂) | 0.025 mg/m ³ TWA Respirable fraction. | 2.4 MPPCF TWA Respirable. 0.1 mg/m ³ TWA Respirable. 0.3 mg/m ³ TWA Total dust. | None | None |

| | |
|--------------------------------|---|
| Engineering controls: | Use local ventilation if general ventilation is insufficient to maintain vapor concentration below established exposure limits. |
| Respiratory protection: | No personal respiratory protective equipment normally required. |
| Eye/face protection: | Safety goggles or safety glasses with side shields. |
| Skin protection: | Suitable protective clothing |

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|----------------------------|
| Physical state: | pasty |
| Color: | Blue |
| Odor: | Mild, acrylic |
| Odor threshold: | Not available. |
| pH: | 7.0 - 7.5 |
| Vapor pressure: | 15 mm hg (20 °C (68°F)) |
| Boiling point/range: | 100 °C (212°F) |
| Melting point/ range: | Not available. |
| Specific gravity: | 1.224 |
| Vapor density: | Heavier than air |
| Flash point: | not applicable |
| Flammable/Explosive limits - lower: | Not available. |
| Flammable/Explosive limits - upper: | Not available. |
| Autoignition temperature: | Not available. |
| Evaporation rate: | < 0.6 (Butyl acetate = 1) |
| Solubility in water: | Soluble |
| Partition coefficient (n-octanol/water): | Not available. |
| VOC content: | < 1 %; 33 g/l (calculated) |
| Viscosity: | 280,000 - 380,000 mPa.s |
| Decomposition temperature: | Not available. |

10. STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable under normal conditions of storage and use. |
| Hazardous reactions: | Will not occur. |
| Hazardous decomposition products: | Oxides of carbon. Oxides of nitrogen. |
| Incompatible materials: | None |
| Reactivity: | Not available. |
| Conditions to avoid: | Heat. Do not freeze. |

11. TOXICOLOGICAL INFORMATION

Relevant routes of exposure: Skin contact

Potential Health Effects/Symptoms

Inhalation: Abrasion of cured material such as by sanding or grinding could release respirable particles of silica quartz, a cancer hazard by inhalation. Normal use of this product causes no such release.
Skin contact: May cause slight irritation to skin.
Eye contact: May cause slight irritation to eyes on contact.
Ingestion: Not expected to be harmful by ingestion. Ingestion of large amounts may produce gastrointestinal disturbances including irritation, nausea, and diarrhea.

| Hazardous Component(s) | LD50s and LC50s | Immediate and Delayed Health Effects |
|----------------------------|-----------------|---|
| Limestone | None | Nuisance dust |
| Quartz (SiO ₂) | None | Immune system, Lung. Some evidence of carcinogenicity |

| Hazardous Component(s) | NTP Carcinogen | IARC Carcinogen | OSHA Carcinogen (Specifically Regulated) |
|----------------------------|-------------------------------|-----------------|--|
| Limestone | No | No | No |
| Quartz (SiO ₂) | Known To Be Human Carcinogen. | Group 1 | No |

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Dispose of according to Federal, State and local governmental regulations.

Hazardous waste number: It is the responsibility of the user to determine if an item is hazardous as defined in the Resource Conservation and Recovery Act (RCRA) at the time of disposal. Product uses, transformations, mixtures, processes, etc., may render the resulting material hazardous, under the criteria of ignitability, corrosivity, reactivity and toxicity characteristics of the Toxicity Characteristics Leaching Procedure (TCLP) 40 CFR 261.20-24.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any package/configuration.

U.S. Department of Transportation Ground (49 CFR)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

International Air Transportation (ICAO/IATA)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

Water Transportation (IMO/IMDG)

Proper shipping name: Not regulated
Hazard class or division: None
Identification number: None
Packing group: None

15. REGULATORY INFORMATION

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed or are exempt from listing on the Toxic Substances Control Act Inventory.
TSCA 12 (b) Export Notification: None above reporting de minimis
CERCLA/SARA Section 302 EHS: None above reporting de minimis
CERCLA/SARA Section 311/312: Delayed Health
CERCLA/SARA Section 313: None above reporting de minimis
California Proposition 65: This product contains a chemical known in the State of California to cause cancer. This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Canada Regulatory Information

CEPA DSL/NDSL Status: All components are listed on or are exempt from listing on the Canadian Domestic Substances List.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: New Safety Data Sheet format.

Prepared by: Mary Ellen Roddy, Sr. Regulatory Affairs Specialist

Issue date: 12/15/2014

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.

Safety Data Sheet



1. Identification

| | | | |
|-----------------------------|--|-------------------------|--|
| Product Name: | BIN 1-GL 4 PK PRIMER | Revision Date: | 7/9/2021 |
| Product Identifier: | 901 | Supercedes Date: | 5/5/2020 |
| Recommended Use: | Primer / Shellac Based | | |
| Supplier: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA | Manufacturer: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA |
| Preparer: | Regulatory Department | | |
| Emergency Telephone: | 24 Hour Hotline: 847-367-7700 | | |

2. Hazards Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

49% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

Flammable Liquid, category 2 H225 Highly flammable liquid and vapor.

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|----------------|---|
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. NO SMOKING. |
| P233 | Keep container tightly closed. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P303+P361+P353 | IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. |
| P370+P378 | In case of fire: Use alcohol film forming foam, carbon dioxide, dry chemical, dry sand to extinguish. |
| P403+P235 | Store in a well-ventilated place. Keep cool. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

GHS SDS PRECAUTIONARY STATEMENTS

| | |
|------|--|
| P240 | Ground/bond container and receiving equipment. |
| P241 | Use explosion-proof electrical/ventilating/lighting/equipment. |
| P242 | Use only non-sparking tools. |
| P243 | Take precautionary measures against static discharge. |

3. Composition / Information on Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|----------------------------|----------------|-------------------|--------------------|-----------------------|
| Ethanol | 64-17-5 | 25-50 | GHS02 | H225 |
| Shellac | 9000-59-3 | 10-25 | Not Available | Not Available |
| Titanium Dioxide | 13463-67-7 | 10-25 | Not Available | Not Available |
| Kaolin Clay | 1332-58-7 | 10-25 | Not Available | Not Available |
| Hydrous Magnesium Silicate | 14807-96-6 | 2.5-10 | Not Available | Not Available |
| 2-Propanol | 67-63-0 | 1.0-2.5 | GHS02-GHS07 | H225-302-319-336 |
| Amorphous Silica | 7631-86-9 | 0.1-1.0 | GHS07 | H332 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: Closed containers may explode when exposed to extreme heat due to buildup of steam. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): Avoid generating dust; fine dust dispersed in air in sufficient concentrations, and in the presence of an ignition source is a potential dust explosion hazard.

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Eliminate all ignition sources; use explosion-proof equipment. Place material in a container and dispose of according to local, provincial, state and federal regulations. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of NFPA Class II combustible liquids. Keep away from heat, sparks, flame and sources of ignition. Keep container closed when not in use. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: Minimize dust generation and accumulation. Routine housekeeping should be instituted to ensure that dusts do not accumulate on surfaces. Dry powders can build static electricity charges when subjected to the friction of transfer and mixing operations. Provide adequate precautions such as grounding and bonding or inert atmospheres. For safe handling, refer to NFPA 654, Standard for the Prevention of Fire and Dust Explosions from the Manufacturing, Processing, and Handling of Combustible Particulate Solids.

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|----------------------------|------------|-----------------------|-------------------|--------------------|--------------|----------------------|
| Ethanol | 64-17-5 | 45.0 | N.E. | 1000 ppm | 1000 ppm | N.E. |
| Shellac | 9000-59-3 | 20.0 | N.E. | N.E. | N.E. | N.E. |
| Titanium Dioxide | 13463-67-7 | 15.0 | 10 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| Kaolin Clay | 1332-58-7 | 15.0 | 2 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| Hydrous Magnesium Silicate | 14807-96-6 | 10.0 | 2 mg/m3 | N.E. | N.E. | N.E. |
| 2-Propanol | 67-63-0 | 5.0 | 200 ppm | 400 ppm | 400 ppm | N.E. |
| Amorphous Silica | 7631-86-9 | 1.0 | N.E. | N.E. | 50 µg/m3 | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with an organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

Protection provided by air purifying respirators is limited. Use a positive pressure air supplied respirator if there is any potential for an uncontrolled release, exposure levels are not known, or in any other circumstances where air purifying respirators may not provide adequate protection.

SKIN PROTECTION: Use impervious gloves to prevent skin contact and absorption of this material through the skin.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications. Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: It is recommended that all dust control equipment such as local exhaust ventilation and material transport systems involved in handling of the product contain explosion relief vents, an explosion suppression system, or an oxygen deficient environment. Ensure that dust handling systems such as exhaust ducts, dust collectors, vessels, and processing equipment are designed in a manner to prevent the escape of dust into the work area (i.e., there is no leakage from the equipment). Use only appropriately classified electrical equipment and powered industrial trucks.

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Liquid | Physical State: | Liquid |
| Odor: | Alcohol Like | Odor Threshold: | N.E. |
| Specific Gravity: | 1.177 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Miscible | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 3.3 - 19.0 |
| Boiling Range, °C: | 173 - 537 | Flash Point, °C: | 17 |
| Flammability: | Supports Combustion | Auto-Ignition Temp., °C: | N.D. |
| Evaporation Rate: | Slower than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

Conditions to Avoid: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

Incompatibility: Incompatible with strong oxidizing agents, strong acids and strong alkalis.

Hazardous Decomposition: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

Hazardous Polymerization: Will not occur under normal conditions.

Stability: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: Prolonged or repeated skin contact may cause irritation. Causes skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. May cause headaches and dizziness. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation. Constituents of this product include crystalline silica dust which can cause silicosis, a form of progressive pulmonary fibrosis. Inhalable crystalline silica is listed by IARC as a group I carcinogen (lung) based on sufficient evidence in occupationally exposed humans and sufficient evidence in animals. Crystalline Silica is also listed by the NTP as a known human carcinogen. Constituents may also contain prismatic tremolite as an impurity, and sufficient exposure to respirable prismatic tremolite dust may cause serious lung problems.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed. Aspiration hazard if swallowed; can enter lungs and cause damage.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010)

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|----------------------------|------------------|---------------------|-------------------|
| 64-17-5 | Ethanol | 7060 mg/kg Rat | 15,800 mg/kg Rabbit | 30,000 mg/L Rat |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 1332-58-7 | Kaolin Clay | 5500 mg/kg | >5000 mg/kg Rat | 25 |
| 14807-96-6 | Hydrous Magnesium Silicate | 6000 | N.E. | 30 |
| 67-63-0 | 2-Propanol | 1870 mg/kg Rat | 4059 mg/kg Rabbit | 72.6 mg/L Rat |
| 7631-86-9 | Amorphous Silica | 7900 mg/kg Rat | >5000 mg/kg Rabbit | 25 mg/L |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. Dispose of material in accordance to local, state, and federal regulations and ordinances.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|--------------------------------------|-----------------------------|-------------------|--------------------------------------|
| UN Number: | N.A. | 1263 | 1263 | N.A. |
| Proper Shipping Name: | Paint Products in Limited Quantities | Paint | Paint | Paint Products in Limited Quantities |
| Hazard Class: | N.A. | 3 | 3 | N.A. |
| Packing Group: | N.A. | II | II | N.A. |
| Limited Quantity: | Yes | Yes | No | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Flammable (gases, aerosols, liquids, or solids)

SARA Section 313

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|----------------------|----------------|
| 2-Propanol | 67-63-0 |

Toxic Substances Control Act

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

16. Other Information

HMIS RATINGS

Health: 2* Flammability: 3 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: 2 Flammability: 3 Instability: 0

Volatile Organic Compounds: 539 g/L

SDS REVISION DATE: 7/9/2021

REASON FOR REVISION: Substance Hazard Threshold % Changed
 Substance and/or Product Properties Changed in
 Section(s):
 03 - Composition / Information on Ingredients
 08 - Exposure Controls / Personal Protection
 11 - Toxicological Information
 15 - Regulatory Information
 Revision Statement(s) Changed

Legend: N.A. - Not Applicable, N.D. - Not Determined, N.E. - Not Established

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.

SAFETY DATA SHEET

4444

Section 1. Identification

Product name : MINWAX® POLYCRYLIC® Water-Based Protective Finish
Clear Semi-Gloss

Product code : 4444

Other means of identification : Not available.

Product type : Liquid.

Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : MINWAX Company
10 Mountainview Road
Upper Saddle River, NJ 07458

Emergency telephone number of the company : US/Canada: (800) 424-9300
Mexico: CHEMTREC México 01-800-681-9531. Available 24 hours and 365 days per year

Product Information Telephone Number : US/Canada: (800) 523-9299
Mexico: 01-800-71-73-123 / (52) 53-33-15-01

Regulatory Information Telephone Number : US / Canada: (216) 566-2902
Mexico: 01-800-71-73-123 / (52) 53-33-15-01

Transportation Emergency Telephone Number : US / Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : TOXIC TO REPRODUCTION (Unborn child) - Category 1B
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
Percentage of the mixture consisting of ingredient(s) of unknown acute oral toxicity: 5.2%
Percentage of the mixture consisting of ingredient(s) of unknown acute dermal toxicity: 4.6%
Percentage of the mixture consisting of ingredient(s) of unknown acute inhalation toxicity: 9.3%

GHS label elements

Hazard pictograms :



Signal word : Danger

Hazard statements : May damage the unborn child.
May cause damage to organs through prolonged or repeated exposure.

Precautionary statements

General : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Date of issue/Date of revision : 4/27/2020 **Date of previous issue** : 2/6/2020

Version : 13

1/14

4444 MINWAX® POLYCRYLIC® Water-Based Protective Finish
Clear Semi-Gloss

SHW-85-NA-GHS-US

2071

Section 2. Hazards identification

- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Do not breathe vapor.
- Response** : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention.
- Storage** : Store locked up.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Supplemental label elements** DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
- Please refer to the SDS for additional information. Keep out of reach of children. Do not transfer contents to other containers for storage.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.

CAS number/other identifiers

| Ingredient name | % by weight | CAS number |
|-------------------------------|-------------|------------|
| Butoxypropanol | ≤3.2 | 5131-66-8 |
| Ethylene Glycol | ≤2.5 | 107-21-1 |
| 1-Methyl-2-Pyrrolidone | ≤1.8 | 872-50-4 |
| Decylpoly(ethyleneoxy)ethanol | ≤1.3 | 9014-85-1 |
| Polypropylene | ≤3 | - |
| 2-Methoxymethylethoxypropanol | ≤1 | 34590-94-8 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention following exposure or if feeling unwell.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.

Section 4. First aid measures

- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : No known significant effects or critical hazards.

Over-exposure signs/symptoms

- Eye contact** : No specific data.
- Inhalation** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media : Use an extinguishing agent suitable for the surrounding fire.

Unsuitable extinguishing media : None known.

Specific hazards arising from the chemical : In a fire or if heated, a pressure increase will occur and the container may burst.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
nitrogen oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures

: Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.

Advice on general occupational hygiene

: Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities

: Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|---|-------------------------|--|
| Butoxypropanol Ethylene Glycol | 5131-66-8 107-21-1 | None. ACGIH TLV (United States, 3/2019). STEL: 10 mg/m ³ 15 minutes. Form: Inhalable fraction. Aerosol only. STEL: 50 ppm 15 minutes. Form: Vapor fraction TWA: 25 ppm 8 hours. Form: Vapor fraction |
| 1-Methyl-2-Pyrrolidone | 872-50-4 | AIHA WEEL (United States, 7/2018). Absorbed through skin. TWA: 10 ppm 8 hours. |
| Decylpoly(ethyleneoxy)ethanol Polypropylene 2-Methoxymethylethoxypropanol | 9014-85-1 34590-94-8 | None. None. ACGIH TLV (United States, 3/2019). Absorbed through skin. TWA: 100 ppm 8 hours. TWA: 606 mg/m ³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 909 mg/m ³ 15 minutes. NIOSH REL (United States, 10/2016). Absorbed through skin. TWA: 100 ppm 10 hours. TWA: 600 mg/m ³ 10 hours. STEL: 150 ppm 15 minutes. STEL: 900 mg/m ³ 15 minutes. OSHA PEL (United States, 5/2018). Absorbed through skin. TWA: 100 ppm 8 hours. TWA: 600 mg/m ³ 8 hours. |

Date of issue/Date of revision

: 4/27/2020

Date of previous issue

: 2/6/2020

Version : 13

5/14

4444

MINWAX® POLYCRYLIC® Water-Based Protective Finish
Clear Semi-Gloss

SHW-85-NA-GHS-US

2075

Section 8. Exposure controls/personal protection

[Occupational exposure limits \(Canada\)](#)

| Ingredient name | CAS # | Exposure limits |
|-------------------------------------|------------|---|
| Ethylene glycol | 107-21-1 | <p>CA British Columbia Provincial (Canada, 5/2019). C: 100 mg/m³ Form: Aerosol TWA: 10 mg/m³ 8 hours. Form: Particulate STEL: 20 mg/m³ 15 minutes. Form: Particulate C: 50 ppm Form: Vapour</p> <p>CA Ontario Provincial (Canada, 1/2018). C: 100 mg/m³ Form: Aerosol only.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). CEIL: 100 mg/m³ Form: aerosol</p> <p>CA Alberta Provincial (Canada, 6/2018). C: 100 mg/m³</p> <p>CA Quebec Provincial (Canada, 1/2014). STEV: 50 ppm 15 minutes. Form: vapour and mist STEV: 127 mg/m³ 15 minutes. Form: vapour and mist</p> |
| N-Methyl pyrrolidone | 872-50-4 | <p>CA Ontario Provincial (Canada, 1/2018). TWA: 400 mg/m³ 8 hours.</p> |
| Dipropylene glycol monomethyl ether | 34590-94-8 | <p>CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 909 mg/m³ 15 minutes. 8 hrs OEL: 606 mg/m³ 8 hours. 15 min OEL: 150 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 5/2019). Absorbed through skin. TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 1/2014). Absorbed through skin. TWAEV: 100 ppm 8 hours. TWAEV: 606 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 909 mg/m³ 15 minutes.</p> <p>CA Ontario Provincial (Canada, 1/2018). Absorbed through skin. STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). Absorbed through skin. STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |

[Occupational exposure limits \(Mexico\)](#)

Section 8. Exposure controls/personal protection

| | CAS # | Exposure limits |
|-------------------------------|------------|---|
| ethanediol | 107-21-1 | NOM-010-STPS-2014 (Mexico, 4/2016). CEIL: 100 mg/m ³ Form: Only AEROSOL |
| 2-Methoxymethylethoxypropanol | 34590-94-8 | NOM-010-STPS-2014 (Mexico, 4/2016). Absorbed through skin. TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes. |

- Appropriate engineering controls** : If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
 - Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
 - Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
 - Skin protection**
 - Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
 - Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
 - Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
 - Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

- Appearance**
- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 8.5

Section 9. Physical and chemical properties

- Melting point/freezing point** : Not available.
- Boiling point/boiling range** : 100°C (212°F)
- Flash point** : Closed cup: 100°C (212°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 0.8 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 0.6%
Upper: 20.4%
- Vapor pressure** : 2.3 kPa (17.5 mm Hg) [at 20°C]
- Vapor density** : 1 [Air = 1]
- Relative density** : 1.02
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): >0.205 cm²/s (>20.5 cSt)
- Molecular weight** : Not applicable.
- Aerosol product**
- Heat of combustion** : 4.018 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : No specific data.
- Incompatible materials** : No specific data.
- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-------------|---------|------------|----------|
| Butoxypropanol | LD50 Dermal | Rabbit | 3100 mg/kg | - |
| Ethylene Glycol | LD50 Oral | Rat | 4700 mg/kg | - |
| 1-Methyl-2-Pyrrolidone | LD50 Dermal | Rabbit | 8 g/kg | - |
| | LD50 Oral | Rat | 3914 mg/kg | - |

Irritation/Corrosion

Section 11. Toxicological information

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|--|--------------------------|---------|-------|-----------------|-------------|
| Ethylene Glycol 1-Methyl-2-Pyrrolidone 2-Methoxymethylethoxypropanol | Eyes - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 1 hours 100 mg | - |
| | Eyes - Moderate irritant | Rabbit | - | 6 hours 1440 mg | - |
| | Skin - Mild irritant | Rabbit | - | 555 mg | - |
| | Eyes - Moderate irritant | Rabbit | - | 100 mg | - |
| | Eyes - Mild irritant | Human | - | 8 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 500 mg | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|------------------------|--------------------------|------------------------------------|--|
| Butoxypropanol | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Ethylene Glycol | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| 1-Methyl-2-Pyrrolidone | Category 3 | Not applicable. | Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|-----------------|------------|-------------------|----------------|
| Butoxypropanol | Category 2 | Not determined | Not determined |
| Ethylene Glycol | Category 2 | Not determined | Not determined |

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Inhalation : No known significant effects or critical hazards.

Section 11. Toxicological information

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.

Inhalation : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Skin contact : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Ingestion : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : May cause damage to organs through prolonged or repeated exposure.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : May damage the unborn child.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|--------|-----------------|
| Oral | 19616.12 mg/kg |
| Dermal | 102963.77 mg/kg |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|--------------------------------------|--|----------|
| Ethylene Glycol | Acute LC50 6900000 µg/l Fresh water | Crustaceans - Ceriodaphnia dubia - Neonate | 48 hours |
| | Acute LC50 41000000 µg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| 1-Methyl-2-Pyrrolidone | Acute LC50 8050000 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute LC50 1.23 ppm Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 832 ppm Fresh water | Fish - Lepomis macrochirus | 96 hours |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Ethylene Glycol | - | - | Readily |

Bioaccumulative potential

Not available.

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|--------------------|--------------------|-----------------------|----------------|----------------|
| UN number | Not regulated. | Not regulated. | Not regulated. | Not regulated. | Not regulated. |
| UN proper shipping name | - | - | - | - | - |
| Transport hazard class(es) | - | - | - | - | - |

Section 14. Transport information

| | | | | | |
|-------------------------------|-----|-----|-----|-----|-----|
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - | - | - | - | - |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Proper shipping name : Not available.
Ship type : Not available.
Pollution category : Not available.

Section 15. Regulatory information

TSCA 5(a)2 proposed significant new use rules: 1-Methyl-2-Pyrrolidone; 5-Chloro-2-methylisothiazolinone

SARA 313
 SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65
 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations
International lists : **Australia inventory (AICS):** Not determined.
China inventory (IECSC): Not determined.
Japan inventory (ENCS): Not determined.
Japan inventory (ISHL): Not determined.
Korea inventory (KECI): Not determined.
New Zealand Inventory of Chemicals (NZIoC): Not determined.
Philippines inventory (PICCS): Not determined.
Taiwan Chemical Substances Inventory (TCSI): Not determined.
Thailand inventory: Not determined.
Turkey inventory: Not determined.
Vietnam inventory: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|-------------------------|---|---|
| Health | * | 3 |
| Flammability | | 0 |
| Physical hazards | | 0 |
| | | |

Section 16. Other information

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| Classification | Justification |
|---|--------------------|
| TOXIC TO REPRODUCTION (Unborn child) - Category 1B | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 | Calculation method |

History

Date of printing : 4/27/2020

Date of issue/Date of revision : 4/27/2020

Date of previous issue : 2/6/2020

Version : 13

Key to abbreviations : ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 N/A = Not available
 SGG = Segregation Group
 UN = United Nations

📌 Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

SECTION 1: IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING
1.1. PRODUCT IDENTIFIER

Product form : Mixture
 Product name : SPOTCHECK® SKL-SP2 - aerosol
 Vaporizer : Aerosol

1.2. RELEVANT IDENTIFIED USES OF THE SUBSTANCE OR MIXTURE AND USES ADVISED AGAINST
1.2.1. Relevant identified uses

Main use category : Industrial use
 Use of the substance/mixture : Non-Destructive Testing.

1.2.2. Uses advised against

No additional information available

1.3. DETAILS OF THE SUPPLIER OF THE SAFETY DATA SHEET
Manufacturer

Magnaflux® (A Division of ITW Ltd)
 Faraday Road, South Dorcan Industrial Estate
 SN3 5HE Swindon - UK
 T +44 (0)1793 524566 - F +44 (0)1793 490459
support.eu@magnaflux.com - www.eu.magnaflux.com

1.4. EMERGENCY TELEPHONE NUMBER

Emergency number : DURING OFFICE HOURS, CALL T: +44 (0)1793 524566 (English only) [Office hours (GMT) Monday - Thursday 8am - 5pm, Friday 8am - 4pm];
 OUT OF OFFICE HOURS, CALL T: +44(0)203 394 9866

SECTION 2: HAZARDS IDENTIFICATION
2.1. CLASSIFICATION OF THE SUBSTANCE OR MIXTURE
Classification according to Regulation (EC) No. 1272/2008 [CLP]

Aerosol 1 H222;H229
 Skin Sens. 1 H317
 Asp. Tox. 1 H304

Full text of hazard classes and H-statements : see section 16

Adverse physicochemical, human health and environmental effects

No additional information available

2.2. LABEL ELEMENTS
Labelling according to Regulation (EC) No. 1272/2008 [CLP]

Hazard pictograms (CLP) :



Signal word (CLP) : Danger

Hazardous ingredients : Hydrocarbons, C12-C15, n-alkanes, isoalkanes, cyclics, < 2% aromatics ; 2-Naphthalenol, 1-[2-[2-ethyl-4-[2-(2-ethylphenyl)diazenyl]phenyl]diazenyl]-, ar-heptyl derivs

Hazard statements (CLP) : H222 - Extremely flammable aerosol.
 H229 - Pressurised container: May burst if heated.
 H304 - May be fatal if swallowed and enters airways.
 H317 - May cause an allergic skin reaction.

Precautionary statements (CLP) : P210 - Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
 P211 - Do not spray on an open flame or other ignition source.
 P251 - Do not pierce or burn, even after use.
 P280 - Wear protective gloves/protective clothing/eye protection/face protection.
 P301+P310+P331 - IF SWALLOWED: Immediately call a POISON CENTER/doctor. Do NOT induce vomiting.
 P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F.

EUH-statements : EUH066 - Repeated exposure may cause skin dryness or cracking.

| | |
|--|--|
| Unknown acute toxicity (CLP) - SDS | : 48.35% of the mixture consists of ingredient(s) of unknown acute toxicity (Oral) 88.35% of the mixture consists of ingredient(s) of unknown acute toxicity (Dermal) 56.32% of the mixture consists of ingredient(s) of unknown acute toxicity (Inhalation (Gas)) |
| Unknown hazards to the aquatic environment (CLP) | : Contains 86.37 % of components with unknown hazards to the aquatic environment |

2.3. OTHER HAZARDS

No additional information available

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

3.1. SUBSTANCES

Not applicable

3.2. MIXTURES

| Name | Product identifier | % | Classification according to Regulation (EC) No. 1272/2008 [CLP] |
|--|--|---------|---|
| Hydrocarbons, C12-C15, n-alkanes, isoalkanes, cyclics, < 2% aromatics | (CAS-No.) 869062-45-3 (EC-No.) 920-107-4 | 30 - 60 | Asp. Tox. 1, H304 |
| 1,2-Benzenedicarboxylic acid, di-C8-10-branched alkyl esters, C9-rich | (CAS-No.) 68515-48-0 (EC-No.) 271-090-9 | 5 - 10 | Aquatic Acute 1, H400 |
| 2-Naphthalenol, 1-[2-[2-ethyl-4-[2-(2-ethylphenyl)diazenyl]phenyl]diazenyl]-, ar-heptyl derivs | (CAS-No.) 1401000-07-4 (EC-No.) 825-706-3 | 1 - 5 | Skin Sens. 1, H317 Aquatic Chronic 4, H413 |

Full text of H-statements: see section 16

SECTION 4: FIRST AID MEASURES

4.1. DESCRIPTION OF FIRST AID MEASURES

| | |
|---------------------------------------|---|
| First-aid measures after inhalation | : If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical advice/attention if you feel unwell. |
| First-aid measures after skin contact | : IF ON SKIN: Wash with plenty of water. Take off contaminated clothing and wash it before reuse. If skin irritation or rash occurs: Get medical advice/attention. |
| First-aid measures after eye contact | : IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor. |
| First-aid measures after ingestion | : IF SWALLOWED: Immediately call a POISON CENTER/doctor. Do NOT induce vomiting. Never give anything by mouth to an unconscious person. |

4.2. MOST IMPORTANT SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED

| | |
|-------------------------------------|---|
| Symptoms/effects after inhalation | : May cause irritation to the respiratory tract. |
| Symptoms/effects after skin contact | : May cause skin irritation. Repeated exposure may cause skin dryness or cracking. May cause an allergic skin reaction. |
| Symptoms/effects after eye contact | : May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with possible redness and swelling. |
| Symptoms/effects after ingestion | : May be fatal if swallowed and enters airways. May be harmful if swallowed. May cause gastrointestinal irritation, nausea, vomiting and diarrhea. May result in aspiration into the lungs, causing chemical pneumonia. |

4.3. INDICATION OF ANY IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT NEEDED

Symptoms may be delayed. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

SECTION 5: FIREFIGHTING MEASURES

5.1. EXTINGUISHING MEDIA

| | |
|--------------------------------|---|
| Suitable extinguishing media | : Carbon dioxide (CO ₂), dry chemical powder, foam. Water spray or fog. |
| Unsuitable extinguishing media | : Do not use water jet. |

5.2. SPECIAL HAZARDS ARISING FROM THE SUBSTANCE OR MIXTURE

| | |
|------------------|--|
| Fire hazard | : Extremely flammable aerosol. Products of combustion may include, and are not limited to: oxides of carbon, oxides of nitrogen. Irritating fumes. |
| Explosion hazard | : Heat may build pressure, rupturing closed containers, spreading fire and increasing risk of burns and injuries. |

5.3. ADVICE FOR FIREFIGHTERS

| | |
|--------------------------------|---|
| Firefighting instructions | : DO NOT fight fire when fire reaches explosives. Evacuate area. |
| Protection during firefighting | : Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Cool closed containers exposed to fire with water spray. |

SECTION 6: ACCIDENTAL RELEASE MEASURES**6.1. PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES**

General measures : Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Eliminate every possible source of ignition. Use only non-sparking tools. Use special care to avoid static electric charges.

6.1.1. For non-emergency personnel

No additional information available

6.1.2. For emergency responders

No additional information available

6.2. ENVIRONMENTAL PRECAUTIONS

Prevent entry to sewers and public waters.

6.3. METHODS AND MATERIAL FOR CONTAINMENT AND CLEANING UP

For containment : Stop leak without risks if possible. Move containers from spill area. Use only non-sparking tools. Use explosion-proof equipment. Absorb and/or contain spill with inert material (sand, vermiculite or other appropriate material), then place in suitable container. Do not flush into surface water or sewer system. Wear recommended personal protective equipment.

Methods for cleaning up : Sweep or shovel spills into appropriate container for disposal. Provide ventilation.

6.4. REFERENCE TO OTHER SECTIONS

For further information refer to section 8: "Exposure controls/personal protection".

SECTION 7: HANDLING AND STORAGE**7.1. PRECAUTIONS FOR SAFE HANDLING**

Additional hazards when processed : Do not pierce or burn, even after use. Keep away from sources of ignition - No smoking. Hazardous waste due to potential risk of explosion.

Precautions for safe handling : Avoid contact with skin and eyes. Ensure adequate ventilation. Do not swallow. Handle and open container with care. When using do not eat, drink or smoke. Do not spray on an open flame or other ignition source. Use non-sparking tools. Use explosion-proof equipment. Take precautionary measures against static discharge.

Hygiene measures : Wash contaminated clothing before reuse. Always wash hands after handling the product.

7.2. CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES

Technical measures : Proper grounding procedures to avoid static electricity should be followed.

Storage conditions : Keep out of the reach of children. Store tightly closed in a dry and cool place. Keep away from ignition sources. Keep out of direct sunlight. Do not expose to temperatures exceeding 50 °C/ 122 °F. Keep in fireproof place.

Storage temperature : 10 - 30 °C

7.3. SPECIFIC END USE(S)

Not available.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1. CONTROL PARAMETERS**

No additional information available

8.2. EXPOSURE CONTROLS**Appropriate engineering controls:**

Ensure good ventilation of the work station.

Hand protection:

Chemical resistant gloves (according to European standard NF EN 374 or equivalent)

Eye protection:

Safety glasses or goggles are recommended when using product.

Skin and body protection:

Wear suitable protective clothing

Respiratory protection:

In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Environmental exposure controls:

Avoid release to the environment.

Other information:

Handle in accordance with good industrial hygiene and safety procedures. Do not eat, drink or smoke when using this product.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES**9.1. INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES**

| | |
|--|--|
| Physical state | : Liquid |
| Appearance | : Red Aerosol |
| Colour | : Red |
| Odour | : Mild hydrocarbon |
| Odour threshold | : No data available |
| pH | : Neutral |
| Relative evaporation rate (butylacetate=1) | : < 0.1 |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : 230 °C |
| Flash point | : -40 °C (aerosol propellant) |
| Auto-ignition temperature | : > 200 °C |
| Decomposition temperature | : No data available |
| Flammability (solid, gas) | : No data available |
| Vapour pressure | : < 0.5 mm Hg (@ 38°C) |
| Relative vapour density at 20 °C | : > 1 |
| Relative density | : 0.85 g/cm ³ |
| Solubility | : Negligible. |
| Partition coefficient n-octanol/water | : 3.9 - 6 (distillates (petroleum), hydrotreated light naphthenic) |
| Viscosity, kinematic | : 3.3 mm ² /s (@ 20°C) |
| Viscosity, dynamic | : No data available |
| Explosive properties | : No data available |
| Oxidising properties | : Non oxidizing. |
| Lower explosive limit (LEL) | : 1 vol % |
| Upper explosive limit (UEL) | : 6 vol % |

9.2. OTHER INFORMATION

No additional information available

SECTION 10: STABILITY AND REACTIVITY**10.1. REACTIVITY**

No dangerous reactions known under normal conditions of use.

10.2. CHEMICAL STABILITY

Extremely flammable aerosol. Extreme risk of explosion by shock, friction, fire or other sources of ignition. Contents under pressure. Container may explode if heated. Do not puncture. Do not burn.

10.3. POSSIBILITY OF HAZARDOUS REACTIONS

No dangerous reactions known under normal conditions of use.

10.4. CONDITIONS TO AVOID

Heat. Incompatible materials. Sources of ignition. Direct sunlight.

10.5. INCOMPATIBLE MATERIALS

Strong oxidizing agents. Acids. Strong alkalis.

10.6. HAZARDOUS DECOMPOSITION PRODUCTS

May include, and are not limited to: oxides of carbon, oxides of nitrogen. Irritating fumes.

SECTION 11: TOXICOLOGICAL INFORMATION**11.1. INFORMATION ON TOXICOLOGICAL EFFECTS**

| | |
|-----------------------------|-------------------|
| Acute toxicity (oral) | : Not classified. |
| Acute toxicity (dermal) | : Not classified. |
| Acute toxicity (inhalation) | : Not classified. |

| 1,2-Benzenedicarboxylic acid, di-C8-10-branched alkyl esters, C9-rich (68515-48-0) | |
|--|---------------|
| LD50 oral rat | > 10000 mg/kg |
| LD50 dermal rabbit | > 3160 mg/kg |

| | |
|------------------------------------|--|
| Unknown acute toxicity (CLP) - SDS | : 48.35% of the mixture consists of ingredient(s) of unknown acute toxicity (Oral) 88.35% of the mixture consists of ingredient(s) of unknown acute toxicity (Dermal) 56.32% of the mixture consists of ingredient(s) of unknown acute toxicity (Inhalation (Gas)) |
| Skin corrosion/irritation | : Not classified. |
| Additional information | : Based on available data, the classification criteria are not met. Repeated exposure may cause skin dryness or cracking. |
| Serious eye damage/irritation | : Not classified. |
| Additional information | : Based on available data, the classification criteria are not met. |
| Respiratory or skin sensitisation | : May cause an allergic skin reaction. |
| Germ cell mutagenicity | : Not classified. |
| Additional information | : Based on available data, the classification criteria are not met. |
| Carcinogenicity | : Not classified. |
| Additional information | : Based on available data, the classification criteria are not met. |
| Reproductive toxicity | : Not classified. |
| Additional information | : Based on available data, the classification criteria are not met. |
| STOT-single exposure | : Not classified. |
| Additional information | : Based on available data, the classification criteria are not met. |
| STOT-repeated exposure | : Not classified. |
| Additional information | : Based on available data, the classification criteria are not met. |
| Aspiration hazard | : May be fatal if swallowed and enters airways. |

| SPOTCHECK® SKL-SP2 - aerosol | |
|------------------------------|---------------------------------|
| Vaporizer | Aerosol |
| Viscosity, kinematic | 3.3 mm ² /s (@ 20°C) |

Other information : Likely routes of exposure: ingestion, inhalation, skin and eye.

SECTION 12: ECOLOGICAL INFORMATION

12.1. TOXICITY

| | |
|--|--|
| Ecology - general | : May cause long-term adverse effects in the aquatic environment. |
| Unknown hazards to the aquatic environment (CLP) | : Contains 86.37 % of components with unknown hazards to the aquatic environment |
| Acute aquatic toxicity | : Not classified. |
| Chronic aquatic toxicity | : Not classified. |

| 1,2-Benzenedicarboxylic acid, di-C8-10-branched alkyl esters, C9-rich (68515-48-0) | |
|--|---|
| LC50 fish 1 | 0.42 mg/l (Exposure time: 96 h - Species: Ictalurus punctatus [flow-through]) |
| LC50 fish 2 | > 0.16 mg/l (Exposure time: 96 h - Species: Oncorhynchus mykiss [flow-through]) |
| EC50 Daphnia 1 | > 0.086 mg/l (Exposure time: 48 h - Species: Daphnia magna) |
| EC50 96h algae (1) | > 2.8 mg/l (Species: Pseudokirchneriella subcapitata) |

12.2. PERSISTENCE AND DEGRADABILITY

| SPOTCHECK® SKL-SP2 - aerosol | |
|-------------------------------|------------------|
| Persistence and degradability | Not established. |

12.3. BIOACCUMULATIVE POTENTIAL

| SPOTCHECK® SKL-SP2 - aerosol | |
|------------------------------|------------------|
| Bioaccumulative potential | Not established. |

12.4. MOBILITY IN SOIL

No additional information available

12.5. RESULTS OF PBT AND VPVB ASSESSMENT

No additional information available

12.6. OTHER ADVERSE EFFECTS

| | |
|------------------------|--------------------------|
| Additional information | : No other effects known |
|------------------------|--------------------------|

SECTION 13: DISPOSAL CONSIDERATIONS**13.1. WASTE TREATMENT METHODS**

Product/Packaging disposal recommendations : This material must be disposed of in accordance with all local, state, provincial, and federal regulations. Container under pressure. Do not drill or burn even after use.

SECTION 14: TRANSPORT INFORMATION

In accordance with ADR / IATA / IMDG

14.1. UN NUMBER

UN-No. (ADR) : 1950
UN-No. (IMDG) : 1950
UN-No. (IATA) : 1950

14.2. UN PROPER SHIPPING NAME

Proper Shipping Name (ADR) : AEROSOLS, flammable.
Proper Shipping Name (IMDG) : AEROSOLS, flammable.
Proper Shipping Name (IATA) : AEROSOLS, flammable.

14.3. TRANSPORT HAZARD CLASS(ES)**ADR**

Transport hazard class(es) (ADR) : 2.1
Danger labels (ADR) :

IMDG

Transport hazard class(es) (IMDG) : 2.1

IATA

Transport hazard class(es) (IATA) : 2.1

14.4. PACKING GROUP

Packing group (ADR) : Not applicable
Packing group (IMDG) : Not applicable
Packing group (IATA) : Not applicable

14.5. ENVIRONMENTAL HAZARDS

Dangerous for the environment : No
Marine pollutant : No
Other information : No supplementary information available.

14.6. SPECIAL PRECAUTIONS FOR USER

Special transport precautions : Do not handle until all safety precautions have been read and understood.

14.7. TRANSPORT IN BULK ACCORDING TO ANNEX II OF MARPOL AND THE IBC CODE

IBC code : Not applicable.

SECTION 15: REGULATORY INFORMATION**15.1. SAFETY, HEALTH AND ENVIRONMENTAL REGULATIONS/LEGISLATION SPECIFIC FOR THE SUBSTANCE OR MIXTURE****15.1.1. EU-Regulations**

Contains no REACH substances with Annex XVII restrictions

Contains no REACH candidate substance.

Contains no REACH Annex XIV substances

15.1.2. National regulations**National regulations (Germany):**

Wassergefährdungsklasse (water hazard class): WGK 1 – Low hazard to waters

TechnischeAnleitungLuft (TA-Luft): Class 5.2.5 Organic substances, except dusts.

15.2. CHEMICAL SAFETY ASSESSMENT

No chemical safety assessment has been carried out

SECTION 16: OTHER INFORMATION

Indication of changes:

None.

Prepared according to Regulation (EC) No. 1907/2006 (REACH) with its amendment Regulation (EU) 2015/830

| | |
|-------------------|---|
| Data sources | : REGULATION (EC) No 1272/2008 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 16 December 2008 on classification, labelling and packaging of substances and mixtures, amending and repealing Directives 67/548/EEC and 1999/45/EC, and amending Regulation (EC) No 1907/2006. |
| Other information | : None. |
| Prepared by | : Nexreg Compliance Inc. www.Nexreg.com |



Full text of H- and EUH-statements:

| | |
|-------------------|---|
| Aerosol 1 | Aerosol, Category 1 |
| Aquatic Acute 1 | Hazardous to the aquatic environment — Acute Hazard, Category 1 |
| Aquatic Chronic 4 | Hazardous to the aquatic environment — Chronic Hazard, Category 4 |
| Asp. Tox. 1 | Aspiration hazard, Category 1 |
| Skin Sens. 1 | Skin sensitisation, Category 1 |
| H222 | Extremely flammable aerosol. |
| H229 | Pressurised container: May burst if heated. |
| H304 | May be fatal if swallowed and enters airways. |
| H317 | May cause an allergic skin reaction. |
| H400 | Very toxic to aquatic life. |
| H413 | May cause long lasting harmful effects to aquatic life. |
| EUH066 | Repeated exposure may cause skin dryness or cracking. |

Classification and procedure used to derive the classification for mixtures according to Regulation (EC) 1272/2008 [CLP]:

| | | |
|--------------|-----------|--------------------|
| Aerosol 1 | H222;H229 | Expert judgment |
| Skin Sens. 1 | H317 | Calculation method |
| Asp. Tox. 1 | H304 | Calculation method |

SDS EU (REACH Annex II)_NEXREG_NEW_Magnaflux

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.

SAFETY DATA SHEET

BG In-Force (Aerosol)



Section 1. Identification

GHS product identifier : BG In-Force (Aerosol)
Product code : 438
Other means of identification : Not available.
Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Identified uses

Penetrant.

Supplier's details : BG Products Inc.
740 S. Wichita Street
Wichita, KS, 67213, USA
www.bgprod.com
316-266-8120
msds@bgprod.com

Emergency telephone number (with hours of operation) : (800) 424-9300 (CHEMTREC)
24-hour telephone and/or website

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
ACUTE TOXICITY (inhalation) - Category 4
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown oral toxicity: 25%
Percentage of the mixture consisting of ingredient(s) of unknown dermal toxicity: 30.5%
Percentage of the mixture consisting of ingredient(s) of unknown inhalation toxicity: 30.5%

GHS label elements

Hazard pictograms



Signal word : Danger

Hazard statements : Extremely flammable aerosol.
Contains gas under pressure; may explode if heated.
Harmful if inhaled.
May be fatal if swallowed and enters airways.

Precautionary statements

Prevention

: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Avoid breathing vapor. Pressurized container: Do not pierce or burn, even after use.

Section 2. Hazards identification

- Response** : IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting.
- Storage** : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.

| Ingredient name | % | CAS number |
|--|---------|------------|
| Distillates (petroleum), hydrotreated heavy naphthenic | 30 - 60 | 64742-52-5 |
| Petroleum gases, liquefied, sweetened | 10 - 30 | 68476-86-8 |
| Distillates (petroleum), hydrotreated light | 10 - 30 | 64742-47-8 |
| ethyl acetate | 5 - 10 | 141-78-6 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Section 4. First aid measures

- Eye contact** : No known significant effects or critical hazards.
- Inhalation** : Harmful if inhaled.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
irritation
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
- Skin contact** : No specific data.
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Do not swallow. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Avoid breathing vapor or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|--|---|
| Distillates (petroleum), hydrotreated heavy naphthenic | <p>ACGIH TLV (United States, 3/2017). TWA: 5 mg/m³ 8 hours. Form: Inhalable fraction</p> <p>OSHA PEL (United States, 6/2016). TWA: 5 mg/m³ 8 hours.</p> <p>NIOSH REL (United States, 10/2016). TWA: 5 mg/m³ 10 hours. Form: Mist STEL: 10 mg/m³ 15 minutes. Form: Mist</p> |
| Petroleum gases, liquefied, sweetened Distillates (petroleum), hydrotreated light | <p>None.</p> <p>ACGIH TLV (United States, 3/2017). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapor) 8 hours.</p> |
| ethyl acetate | <p>ACGIH TLV (United States, 3/2017). TWA: 400 ppm 8 hours. TWA: 1440 mg/m³ 8 hours.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 400 ppm 8 hours. TWA: 1400 mg/m³ 8 hours.</p> <p>NIOSH REL (United States, 10/2016). TWA: 400 ppm 10 hours. TWA: 1400 mg/m³ 10 hours.</p> <p>OSHA PEL (United States, 6/2016). TWA: 400 ppm 8 hours. TWA: 1400 mg/m³ 8 hours.</p> |

Appropriate engineering controls

- : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls

- : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

- : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

- : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection

- : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid. [Aerosol.]
- Color** : Green. [Dark]
- Odor** : Solvents
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : Not available.
- Boiling point** : Not available.
- Flash point** : Closed cup: -96.4°C (-141.5°F)
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : Not available.
- Vapor density** : Not available.
- Relative density** : 0.809
- Solubility** : Very slightly soluble in the following materials: cold water and hot water.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Not available.
- Flow time (ISO 2431)** : Not available.
- Aerosol product**
- Type of aerosol** : Spray
- Heat of combustion** : >30 kJ/g
- Ignition distance** : 15 cm

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.

Section 10. Stability and reactivity

Conditions to avoid : Avoid all possible sources of ignition (spark or flame).

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|--|---------------------------------|---------|-------------|----------|
| Distillates (petroleum), hydrotreated heavy naphthenic | LC50 Inhalation Dusts and mists | Rat | 5.7 mg/l | 4 hours |
| | LD50 Dermal | Rabbit | >5 g/kg | - |
| | LD50 Oral | Rat | >5 g/kg | - |
| Distillates (petroleum), hydrotreated light | LC50 Inhalation Dusts and mists | Rat | 6.8 mg/l | 4 hours |
| | LD50 Dermal | Rabbit | 4000 mg/kg | - |
| | LD50 Oral | Rat | >5000 mg/kg | - |
| ethyl acetate | LD50 Oral | Rat | 5620 mg/kg | - |

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

| Name | Result |
|--|--------------------------------|
| Extremely flammable aerosol. | ASPIRATION HAZARD - Category 1 |
| Distillates (petroleum), hydrotreated heavy naphthenic | ASPIRATION HAZARD - Category 1 |
| Distillates (petroleum), hydrotreated light | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Inhalation : Harmful if inhaled.

Section 11. Toxicological information

- Skin contact** : No known significant effects or critical hazards.
Ingestion : May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
 irritation
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
- Skin contact** : No specific data.
- Ingestion** : Adverse symptoms may include the following:
 nausea or vomiting

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
Potential delayed effects : Not available.

Long term exposure

- Potential immediate effects** : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

- General** : No known significant effects or critical hazards.
Carcinogenicity : No known significant effects or critical hazards.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|---|-------------------------------------|-------------------------------------|----------|
| Distillates (petroleum), hydrotreated light ethyl acetate | Acute LC50 2200 µg/l Fresh water | Fish - Lepomis macrochirus | 4 days |
| | Acute EC50 2500000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 750000 µg/l Fresh water | Crustaceans - Gammarus pulex | 48 hours |
| | Acute LC50 154000 µg/l Fresh water | Daphnia - Daphnia cucullata | 48 hours |
| | Acute LC50 212500 µg/l Fresh water | Fish - Heteropneustes fossilis | 96 hours |
| | Chronic NOEC 2400 µg/l Fresh water | Daphnia - Daphnia magna | 21 days |
| | Chronic NOEC 75.6 mg/l Fresh water | Fish - Pimephales promelas - Embryo | 32 days |

Persistence and degradability

Section 12. Ecological information

Not available.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|---------------------------------------|--------------------|-----|-----------|
| Petroleum gases, liquefied, sweetened | 1.09 | - | low |
| ethyl acetate | 0.68 | 30 | low |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.







Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

United States - RCRA Toxic hazardous waste "U" List

| Ingredient | CAS # | Status | Reference number |
|--|----------|--------|------------------|
| Ethyl acetate (I); Acetic acid ethyl ester (I) | 141-78-6 | Listed | U112 |

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | ADR/RID | IMDG | IATA |
|-----------------------------------|--|--|--|---|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | Aerosols | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS | Aerosols, flammable |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. | No. |

Additional information

DOT Classification : **Limited quantity** Yes.
Packaging instruction Exceptions: 306. Non-bulk: None. Bulk: None.
Quantity limitation Passenger aircraft/rail: 75 kg. Cargo aircraft: 150 kg.
Special provisions N82

Section 14. Transport information

- TDG Classification** : Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2).
Explosive Limit and Limited Quantity Index 1
Passenger Carrying Road or Rail Index 75
Special provisions 80, 107
- Mexico Classification** : **Special provisions** 63, 190, 277, 327, 344
- ADR/RID** : **Limited quantity** 1 L
Special provisions 190, 327, 625, 344
Tunnel code (D)
- IMDG** : **Emergency schedules** F-D, S-U
Special provisions 63, 190, 277, 327, 344, 381, 959
- IATA** : **Quantity limitation** Passenger and Cargo Aircraft: 75 kg. Packaging instructions: 203. Cargo Aircraft Only: 150 kg. Packaging instructions: 203. Limited Quantities - Passenger Aircraft: 30 kg. Packaging instructions: Y203.
Special provisions A145, A167, A802
- Special precautions for user** : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.
- Transport in bulk according to Annex II of MARPOL and the IBC Code** : Not available.

Section 15. Regulatory information

- U.S. Federal regulations** : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : FLAMMABLE AEROSOLS - Category 1
 GASES UNDER PRESSURE - Compressed gas
 ACUTE TOXICITY (inhalation) - Category 4
 ASPIRATION HAZARD - Category 1

Composition/information on ingredients

Section 15. Regulatory information

| Name | % | Classification |
|--|-----------|---|
| Distillates (petroleum), hydrotreated heavy naphthenic | ≥25 - ≤50 | ASPIRATION HAZARD - Category 1 |
| Petroleum gases, liquefied, sweetened | ≥25 - ≤50 | FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Compressed gas |
| Distillates (petroleum), hydrotreated light | ≥10 - ≤25 | FLAMMABLE LIQUIDS - Category 3 ASPIRATION HAZARD - Category 1 |
| ethyl acetate | ≤10 | FLAMMABLE LIQUIDS - Category 2 |

State regulations

- Massachusetts** : The following components are listed: OIL MIST, MINERAL; ETHYL ACETATE; ACETIC ACID, ETHYL ESTER
- New York** : The following components are listed: Ethyl acetate
- New Jersey** : The following components are listed: ETHYL ACETATE; ACETIC ACID, ETHYL ESTER
- Pennsylvania** : The following components are listed: ACETIC ACID ETHYL ESTER

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

Inventory list

- Australia** : All components are listed or exempted.
- Canada** : All components are listed or exempted.
- China** : All components are listed or exempted.
- Europe** : All components are listed or exempted.
- Japan** : **Japan inventory (ENCS)**: Not determined.
Japan inventory (ISHL): Not determined.
- Malaysia** : Not determined.
- New Zealand** : All components are listed or exempted.
- Philippines** : All components are listed or exempted.
- Republic of Korea** : All components are listed or exempted.
- Taiwan** : All components are listed or exempted.
- Thailand** : Not determined.
- Turkey** : Not determined.
- United States** : All components are listed or exempted.
- Viet Nam** : Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | / | 2 |
| Flammability | | 4 |
| Physical hazards | | 1 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|--|--|
| FLAMMABLE AEROSOLS - Category 1 GASES UNDER PRESSURE - Compressed gas ACUTE TOXICITY (inhalation) - Category 4 ASPIRATION HAZARD - Category 1 | On basis of test data Expert judgment Expert judgment Regulatory data |

History

| | |
|---------------------------------------|--------------------------|
| Date of printing | : 1/9/2019 |
| Date of issue/Date of revision | : 1/9/2019 |
| Date of previous issue | : No previous validation |
| Version | : 7 |
| Formulation Version number | : 1.0 |

| | |
|-----------------------------|--|
| Key to abbreviations | : ATE = Acute Toxicity Estimate BCF = Bioconcentration Factor GHS = Globally Harmonized System of Classification and Labelling of Chemicals IATA = International Air Transport Association IBC = Intermediate Bulk Container IMDG = International Maritime Dangerous Goods LogPow = logarithm of the octanol/water partition coefficient MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution) UN = United Nations |
|-----------------------------|--|

| | |
|-------------------|------------------|
| References | : Not available. |
|-------------------|------------------|

▣ Indicates information that has changed from previously issued version.

Section 16. Other information

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



SAFETY DATA SHEET

Issue Date 13-Dec-2012

Revision Date 26-Mar-2013

Version 1

1. PRODUCT AND COMPANY IDENTIFICATION

Product Identifier

Product Name Silicone Sealant – Acetoxy Cure – Clear, White & Colors

Other Means of Identification

SDS # RD-0081

Product Code 0810, 0816, 0826 Series

Recommended Use of the Chemical and Restrictions on Use

Recommended Use Silicone Sealant.

Details of the Supplier of the Safety Data Sheet

Supplier Address

Red Devil, Inc.
4175 Webb Street
Pryor, Oklahoma 74361
www.reddevil.com

Emergency Telephone Number

Company Phone Number 918-825-5744
Fax: 918-825-5761
Emergency Telephone INFOTRAC 1-352-323-3500 (International)
1-800-535-5053 (North America)

2. HAZARDS IDENTIFICATION

Classification

| | |
|---------------------------|------------|
| Skin corrosion/irritation | Category 2 |
|---------------------------|------------|

Signal Word

Warning

Hazard Statements

Causes skin irritation



Appearance Clear/opaque or colored
paste

Physical State Paste

Odor Acetic Acid Odor (Vinegar odor)

Precautionary Statements - Prevention

Wash face, hands and any exposed skin thoroughly after handling
Wear protective gloves/protective clothing/eye protection/face protection

Precautionary Statements - Response

IF ON SKIN: Wash with plenty of soap and water
If skin irritation persists: Get medical advice/attention
Take off contaminated clothing and wash before reuse

Hazards Not Otherwise Classified (HNOC)

Not Applicable

Other Information

Not Applicable

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% |
|--------------------------------------|-------------|----------|
| Hydroxy-terminated Dimethyl siloxane | 70131-67-8 | >50 |
| Non-hazardous ingredients * | Proprietary | >10 |
| Amorphous silica (glass) | 7631-86-9 | <13 |
| Polydimethylsiloxane | 63148-62-9 | <10 |
| Methyltriacetoxysilane | 4253-34-3 | <6 |
| Titanium Dioxide | 13463-67-7 | <5 |
| Ethyltriacetoxysilane | 17689-77-9 | <6 |

* Unlisted ingredients are not considered hazardous under the OSHA GHS Hazard Communication Standard (29 CFR 1910.1200). (Methyltriacetoxysilane) Observe limits for acetic acid formed during curing on exposure to water or humid air. (Silica, amorphous; Titanium Dioxide) Inhalation of particulates unlikely due to product's physical state

4. FIRST AID MEASURES

First Aid Measures

| | |
|-----------------------|---|
| General advice | Provide this SDS to medical personnel for treatment. |
| Inhalation | If symptoms are experienced remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice. |
| Eye Contact | Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 5 minutes while holding the eyelid(s) open. Obtain medical attention. |
| Ingestion | Rinse mouth thoroughly with water. If irritation or discomfort occurs, obtain medical advice. |
| Skin Contact | No health effects expected. If irritation does occur, flush with lukewarm, gently flowing water for 5 minutes. If irritation persists, obtain medical advice. |

Most Important Symptoms and Effects, both Acute and Delayed

Symptoms Causes skin irritation. May cause nose, throat & respiratory tract irritation. Direct contact with eyes may cause temporary irritation.

Indication of any Immediate Medical Attention and Special Treatment Needed

Note to Physicians Treat according to person's condition & specifics of exposure.

5. FIRE-FIGHTING MEASURES**Suitable Extinguishing Media**

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

Small Fire Use carbon dioxide (CO₂), dry chemical or water spray.

Large Fire Use dry chemical, foam or water spray.

Unsuitable Extinguishing Media Not determined.

Specific Hazards Arising from the Chemical

Not determined.

Hazardous combustion products Carbon oxides & traces of incompletely burned carbon compounds. Silicon dioxide. Formaldehyde.

Protective Equipment and Precautions for Firefighters

Self-contained breathing apparatus & protective clothing should be worn in fighting large fires involving chemicals. Determine the need to evacuate or isolate the area according to your local emergency plan. Use water spray to keep fire exposed containers cool.

6. ACCIDENTAL RELEASE MEASURES**Personal Precautions, Protective Equipment and Emergency Procedures**

Personal Precautions Observe all personal protection equipment recommendations described in Sections 5 & 8.

Environmental Precautions See Section 12 for additional ecological information.

Methods and Material for Containment and Cleaning Up

Methods for Containment Prevent further leakage or spillage if safe to do so. Use absorbent material to contain spill.

Methods for Cleaning Up Wipe up or scrape up & contain for salvage or disposal. Clean area as appropriate since spilled materials, even in small quantities, may present a slip hazard. Final cleaning may require use of steam, solvents or detergents. Dispose of saturated absorbent or cleaning materials appropriately, since spontaneous heating may occur. Local, state & federal laws & regulations may apply to releases & disposal of this material as well as those materials & items employed in the cleanup of releases. You will need to determine which federal, state & local laws & regulations are applicable. Sections 13 & 15 of this MSDS provide information regarding certain federal & state requirements.

7. HANDLING AND STORAGE**Precautions for Safe Handling**

Advice on Safe Handling Handle in accordance with good industrial hygiene and safety practice. Wash face, hands, and any exposed skin thoroughly after handling. Use personal protection recommended in Section 8. Use only in well-ventilated areas. Avoid contact with skin and eyes. Product evolves acetic acid (HOAc) when exposed to water or humid air.

Conditions for Safe Storage, Including any Incompatibilities

| | |
|-------------------------------|---|
| Storage Conditions | Keep container closed & store away from water or moisture. |
| Incompatible Materials | Oxidizing material can cause a reaction. Water, moisture or humid air can cause hazardous vapors to form as described in Section 8. |

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines Exposure guidelines / protective equipment are for routine handling and accidental spills

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|---------------------------------------|---------------------------|---|--|
| Amorphous silica (glass) 7631-86-9 | - | (vacated) TWA: 6 mg/m ³ <1% Crystalline silica TWA: 20 mppcf : (80)/(% SiO ₂) mg/m ³ TWA | IDLH: 3000 mg/m ³ TWA: 6 mg/m ³ |
| Titanium Dioxide 13463-67-7 | TWA: 10 mg/m ³ | TWA: 15 mg/m ³ total dust (vacated) TWA: 10 mg/m ³ total dust | IDLH: 5000 mg/m ³ |

Other Information Acetic acid is formed upon contact w/ water or humid air. Provide adequate ventilation to control exposures within guidelines of OSHA PEL: TWA 10 ppm & ACGIH TLV: TWA 10 ppm, STEL 15 ppm.

Appropriate Engineering Controls

Engineering Controls Ventilation must be adequate to maintain the ambient workplace atmosphere below the exposure limit(s) outlined in the SDS. Good general ventilation should be sufficient.

Individual Protection Measures, such as Personal Protective Equipment

| | |
|---------------------------------|---|
| Eye/Face Protection | Safety glasses as a minimum for protection. |
| Skin and Body Protection | Wear suitable protective clothing. |
| Respiratory Protection | No special equipment needed. |

General Hygiene Considerations Note: These precautions are for room temperature handling. Use @ elevated temperature or aerosol/spray applications may require added precautions. Handle in accordance with good industrial hygiene and safety practice. Wash @ mealtime & end of shift. Contaminated clothing & shoes should be removed as soon as practical & thoroughly cleaned before reuse.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on Basic Physical and Chemical Properties

| | | | |
|-------------------------------------|-------------------------------|-------------------------|---------------------------------|
| Physical State | Paste | Odor | Acetic Acid Odor (Vinegar odor) |
| Appearance | Clear/opaque or colored paste | Odor threshold | Not determined |
| Color | Various | Remarks • Method | |
| Property | Values | | |
| pH | Not determined | | |
| Melting point/freezing point | Not determined | | |
| Boiling point/boiling range | Not determined | | |
| Flash point | Not applicable | | |
| Evaporation rate | Not determined | | |
| Flammability (solid, gas) | Not determined | | |
| Flammability limits in air | | | |

| | | |
|-------------------------------------|----------------|-----------------|
| Upper flammability limits | Not determined | |
| Lower flammability limit | Not determined | |
| Vapor pressure | Not determined | |
| Vapor density | Not determined | |
| Specific gravity | ~1.04 | @ 25 °C (77 °F) |
| Water solubility | Not determined | |
| Solubility in other solvents | Not determined | |
| Partition coefficient | Not determined | |
| Autoignition temperature | Not determined | |
| Decomposition temperature | Not determined | |
| Kinematic viscosity | Not determined | |
| Dynamic viscosity | Not determined | |
| Explosive properties | Not determined | |
| Oxidizing Properties | Not determined | |

Other Information

Additional information Note: The above information is not intended for use in preparing product specifications
VOC Content (%) < 3%/wt (< 40 g/L)

10. STABILITY AND REACTIVITY**Reactivity**

Not reactive under normal conditions

Chemical Stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

None under normal processing.

Hazardous polymerization

Hazardous polymerization does not occur.

Conditions to Avoid

Incompatible Materials.

Incompatible Materials

Oxidizing material can cause a reaction. Water, moisture or humid air can cause hazardous vapors to form as described in Section 8.

Hazardous Decomposition Products

Thermal breakdown of this product during fire or very high heat conditions may evolve the following decomposition products: Carbon oxides & traces of incompletely burned carbon compounds. Silicon dioxide. Formaldehyde, Nitrogen oxides & metal oxides.

11. TOXICOLOGICAL INFORMATION**Information on Likely Routes of Exposure****Product Information****Inhalation**

May cause irritation of respiratory tract.

Eye Contact

May cause temporary irritation on eye contact.

Skin Contact

Causes skin irritation. Can be absorbed through the skin.

Ingestion

Can be harmful if swallowed.

Component Information

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|---------------------------------------|-----------------------|-------------------------|------------------------|
| Amorphous silica (glass) 7631-86-9 | > 5000 mg/kg (Rat) | > 2000 mg/kg (Rabbit) | > 2.2 mg/L (Rat) 1 h |
| Polydimethylsiloxane 63148-62-9 | > 17 g/kg (Rat) | > 2 g/kg (Rabbit) | - |
| Methyltriacetoxysilane 4253-34-3 | = 2060 mg/kg (Rat) | - | - |
| Titanium Dioxide 13463-67-7 | > 10000 mg/kg (Rat) | - | - |

Information on Physical, Chemical and Toxicological Effects

Symptoms

Please see section 4 of this SDS for symptoms.

Delayed and Immediate Effects as well as Chronic Effects from Short and Long-term Exposure

Carcinogenicity

The table below indicates whether each agency has listed any ingredient as a carcinogen. Titanium dioxide is a possible carcinogen when it appears as a respirable dust.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|---------------------------------------|-------|----------|-----|------|
| Amorphous silica (glass) 7631-86-9 | | Group 3 | | |
| Titanium Dioxide 13463-67-7 | | Group 2B | | X |

IARC (International Agency for Research on Cancer)

Group 2B - Possibly Carcinogenic to Humans

Group 3 IARC components are "not classifiable as human carcinogens"

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

Numerical Measures of Toxicity- Product

Not determined

12. ECOLOGICAL INFORMATION

Ecotoxicity

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to microorganisms | Crustacea |
|---------------------------------------|---|--|----------------------------|--|
| Amorphous silica (glass) 7631-86-9 | 440: 72 h Pseudokirchneriella subcapitata mg/L EC50 | 5000: 96 h Brachydanio rerio mg/L LC50 static | | 7600: 48 h Ceriodaphnia dubia mg/L EC50 |

Persistence and Degradability

Complete information is not yet available.

Bioaccumulation

Complete information is not yet available.

Mobility

Complete information is not yet available.

Other Adverse Effects

Not determined

13. DISPOSAL CONSIDERATIONS

Waste Treatment Methods

| | |
|-------------------------------|---|
| Disposal of Wastes | Disposal should be in accordance with applicable regional, national and local laws and regulations. |
| Contaminated Packaging | Disposal should be in accordance with applicable regional, national and local laws and regulations. |

14. TRANSPORT INFORMATION

| | |
|-------------|--|
| Note | Please see current shipping paper for most up to date shipping information, including exemptions and special circumstances |
| DOT | Not regulated |
| IATA | Not regulated |
| IMDG | Not regulated |

15. REGULATORY INFORMATION**International Inventories****Legend:**

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory

DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances

ENCS - Japan Existing and New Chemical Substances

IECSC - China Inventory of Existing Chemical Substances

KECL - Korean Existing and Evaluated Chemical Substances

PICCS - Philippines Inventory of Chemicals and Chemical Substances

US Federal Regulations**SARA 311/312 Hazard Categories**

| | |
|--|----|
| Acute health hazard | No |
| Chronic Health Hazard | No |
| Fire hazard | No |
| Sudden release of pressure hazard | No |
| Reactive Hazard | No |

US State Regulations

| Chemical Name | California Proposition 65 |
|-------------------------------|---------------------------|
| Titanium Dioxide - 13463-67-7 | Carcinogen |

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania |
|---------------------------------------|------------|---------------|--------------|
| Amorphous silica (glass) 7631-86-9 | X | X | X |

| | | | |
|--------------------------------|---|---|---|
| Titanium Dioxide 13463-67-7 | X | X | X |
|--------------------------------|---|---|---|

U.S. EPA Label Information

16. OTHER INFORMATION

| | | | | |
|-------------|-----------------------|---------------------|-------------------------|------------------------------|
| NFPA | Health Hazards | Flammability | Instability | Special Hazards |
| | 1 | 1 | 0 | Not determined |
| HMIS | Health Hazards | Flammability | Physical Hazards | Personal Protection |
| | 1 | 0 | 0 | B- Safety Glasses, Gloves |

Issue Date 13-Dec-2012

Revision Date 26-Mar-2013

Revision Note

New format

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

Safety Data Sheet



SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

Multifak EP 00

Product Use: Grease
Product Number(s): 274509

Company Identification

Chevron Products Company
a division of Chevron U.S.A. Inc.
6001 Bollinger Canyon Rd.
San Ramon, CA 94583
United States of America
www.chevronlubricants.com

Transportation Emergency Response

CHEMTREC: (800) 424-9300 or (703) 527-3887

Health Emergency

Chevron Emergency Information Center: Located in the USA. International collect calls accepted. (800) 231-0623 or (510) 231-0623

Product Information

email : lubemsds@chevron.com
Product Information: 1 (800) 582-3835, LUBETEK@chevron.com

SECTION 2 HAZARDS IDENTIFICATION

CLASSIFICATION: Not classified as hazardous according to 29 CFR 1910.1200 (2012).

HAZARDS NOT OTHERWISE CLASSIFIED: Not Applicable

SECTION 3 COMPOSITION/ INFORMATION ON INGREDIENTS

| COMPONENTS | CAS NUMBER | AMOUNT |
|--|------------|-----------------|
| Highly refined mineral oil (C15 - C50) | Mixture | 60 - 99 %weight |

SECTION 4 FIRST AID MEASURES

Description of first aid measures

Eye: No specific first aid measures are required. As a precaution, remove contact lenses, if worn, and flush eyes with water.

Skin: No specific first aid measures are required. As a precaution, remove clothing and shoes if contaminated. To remove the material from skin, use soap and water. Discard contaminated clothing and shoes or thoroughly clean before reuse.

Ingestion: No specific first aid measures are required. Do not induce vomiting. As a precaution, get medical advice.

Inhalation: No specific first aid measures are required. If exposed to excessive levels of material in the air, move the exposed person to fresh air. Get medical attention if coughing or respiratory discomfort occurs.

Most important symptoms and effects, both acute and delayed

IMMEDIATE HEALTH EFFECTS

Eye: Not expected to cause prolonged or significant eye irritation.

Skin: High-Pressure Equipment Information: Accidental high-velocity injection under the skin of materials of this type may result in serious injury. Seek medical attention at once should an accident like this occur. The initial wound at the injection site may not appear to be serious at first; but, if left untreated, could result in disfigurement or amputation of the affected part.

Contact with the skin is not expected to cause prolonged or significant irritation. Contact with the skin is not expected to cause an allergic skin response. Not expected to be harmful to internal organs if absorbed through the skin.

Ingestion: Not expected to be harmful if swallowed.

Inhalation: Not expected to be harmful if inhaled. Contains a petroleum-based mineral oil. May cause respiratory irritation or other pulmonary effects following prolonged or repeated inhalation of oil mist at airborne levels above the recommended mineral oil mist exposure limit. Symptoms of respiratory irritation may include coughing and difficulty breathing.

DELAYED OR OTHER HEALTH EFFECTS: Not classified

Indication of any immediate medical attention and special treatment needed

Note to Physicians: In an accident involving high-pressure equipment, this product may be injected under the skin. Such an accident may result in a small, sometimes bloodless, puncture wound. However, because of its driving force, material injected into a fingertip can be deposited into the palm of the hand. Within 24 hours, there is usually a great deal of swelling, discoloration, and intense throbbing pain. Immediate treatment at a surgical emergency center is recommended.

SECTION 5 FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Unusual Fire Hazards: Leaks/ruptures in high pressure system using materials of this type can create a fire hazard when in the vicinity of ignition sources (eg. open flame, pilot lights, sparks, or electric arcs).

PROTECTION OF FIRE FIGHTERS:

Fire Fighting Instructions: This material will burn although it is not easily ignited. See Section 7 for proper handling and storage. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus.

Combustion Products: Highly dependent on combustion conditions. A complex mixture of airborne solids, liquids, and gases including carbon monoxide, carbon dioxide, and unidentified organic compounds will be evolved when this material undergoes combustion. Combustion may form oxides of: Phosphorus, Sulfur, Zinc, Lithium.

SECTION 6 ACCIDENTAL RELEASE MEASURES

Protective Measures: Eliminate all sources of ignition in vicinity of spilled material.

Spill Management: Clean up spills immediately, observing precautions in Exposure Controls/Personal Protection section. Stop the source of the release if you can do it without risk. Contain release to prevent further contamination of soil, surface water or groundwater. Clean up spill as soon as possible, observing precautions in Exposure Controls/Personal Protection. Use appropriate techniques such as applying non-combustible absorbent materials or pumping. Where feasible and appropriate, remove contaminated soil. Place contaminated materials in disposable containers and dispose of in a manner consistent with applicable regulations.

Reporting: Report spills to local authorities and/or the U.S. Coast Guard's National Response Center at (800) 424-8802 as appropriate or required.

SECTION 7 HANDLING AND STORAGE

General Handling Information: Avoid contaminating soil or releasing this material into sewage and drainage systems and bodies of water.

Precautionary Measures: DO NOT USE IN HIGH PRESSURE SYSTEMS in the vicinity of flames, sparks and hot surfaces. Use only in well ventilated areas. Keep container closed. Keep out of the reach of children.

Static Hazard: Electrostatic charge may accumulate and create a hazardous condition when handling this material. To minimize this hazard, bonding and grounding may be necessary but may not, by themselves, be sufficient. Review all operations which have the potential of generating and accumulating an electrostatic charge and/or a flammable atmosphere (including tank and container filling, splash filling, tank cleaning, sampling, gauging, switch loading, filtering, mixing, agitation, and vacuum truck operations) and use appropriate mitigating procedures.

Container Warnings: Container is not designed to contain pressure. Do not use pressure to empty container or it may rupture with explosive force. Empty containers retain product residue (solid, liquid, and/or vapor) and can be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, static electricity, or other sources of ignition. They may explode and cause injury or death. Empty containers should be completely drained, properly closed, and promptly returned to a drum reconditioner or disposed of properly.

SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

GENERAL CONSIDERATIONS:

Consider the potential hazards of this material (see Section 2), applicable exposure limits, job activities, and other substances in the work place when designing engineering controls and selecting personal protective equipment. If engineering controls or work practices are not adequate to prevent exposure to harmful levels of this material, the personal protective equipment listed below is recommended. The user should read and understand all instructions and limitations supplied with the equipment since protection is usually provided for a limited time or under certain circumstances.

ENGINEERING CONTROLS:

Use in a well-ventilated area.

PERSONAL PROTECTIVE EQUIPMENT

Eye/Face Protection: No special eye protection is normally required. Where splashing is possible, wear safety glasses with side shields as a good safety practice.

Skin Protection: No special protective clothing is normally required. Where splashing is possible, select protective clothing depending on operations conducted, physical requirements and other substances in the workplace. Suggested materials for protective gloves include: Neoprene, Nitrile Rubber, Silver Shield, Viton.

Respiratory Protection: No respiratory protection is normally required.

If user operations generate an oil mist, determine if airborne concentrations are below the occupational exposure limit for mineral oil mist. If not, wear an approved respirator that provides adequate protection from the measured concentrations of this material. For air-purifying respirators use a particulate cartridge.

Use a positive pressure air-supplying respirator in circumstances where air-purifying respirators may not provide adequate protection.

Occupational Exposure Limits:

| Component | Agency | TWA | STEL | Ceiling | Notation |
|--|----------|---------|----------|---------|----------|
| Highly refined mineral oil (C15 - C50) | ACGIH | 5 mg/m3 | 10 mg/m3 | -- | -- |
| Highly refined mineral oil (C15 - C50) | OSHA Z-1 | 5 mg/m3 | -- | -- | -- |

Consult local authorities for appropriate values.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Attention: the data below are typical values and do not constitute a specification.

Color: Light to Brown

Physical State: Semi-solid

Odor: Petroleum odor

Odor Threshold: No data available

pH: Not Applicable

Vapor Pressure: <0.01 mmHg (Estimated) @ 37.8 °C (100 °F)

Vapor Density (Air = 1): >1 (Estimated)

Initial Boiling Point: 260°C (500°F)

Solubility: Soluble in hydrocarbons; insoluble in water

Freezing Point: No data available

Melting Point: 155°C (311°F) (Min)

Specific Gravity: 0.90 (Typical)

Density: No data available

Viscosity: 112 mm²/s @ 40°C (104°F) (Typical)

Evaporation Rate: Not Applicable

Decomposition temperature: No data available

Octanol/Water Partition Coefficient: No data available

FLAMMABLE PROPERTIES:

Flammability (solid, gas): No Data Available

Flashpoint: 150 °C (302 °F) (Typical)

Autoignition: No data available

Flammability (Explosive) Limits (% by volume in air): Lower: Not Applicable Upper: Not Applicable

SECTION 10 STABILITY AND REACTIVITY

Reactivity: May react with strong acids or strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

Chemical Stability: This material is considered stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.

Incompatibility With Other Materials: Not applicable

Hazardous Decomposition Products: Hydrogen Sulfide (Elevated temperatures), Alkyl Mercaptans (Elevated temperatures)

Hazardous Polymerization: Hazardous polymerization will not occur.

SECTION 11 TOXICOLOGICAL INFORMATION

Information on toxicological effects

Serious Eye Damage/Irritation: The eye irritation hazard is based on evaluation of data for similar materials.

Skin Corrosion/Irritation: The skin irritation hazard is based on evaluation of data for similar materials.

Skin Sensitization: The skin sensitization hazard is based on evaluation of data for similar materials.

Acute Dermal Toxicity: The acute dermal toxicity hazard is based on evaluation of data for similar materials.

Acute Oral Toxicity: The acute oral toxicity hazard is based on evaluation of data for similar materials.

Acute Inhalation Toxicity: The acute inhalation toxicity hazard is based on evaluation of data for product components.

Acute Toxicity Estimate: Not Determined

Germ Cell Mutagenicity: The hazard evaluation is based on data for components or a similar material.

Carcinogenicity: The hazard evaluation is based on data for components or a similar material.

Reproductive Toxicity: The hazard evaluation is based on data for components or a similar material.

Specific Target Organ Toxicity - Single Exposure: The hazard evaluation is based on data for components or a similar material.

Specific Target Organ Toxicity - Repeated Exposure: The hazard evaluation is based on data for components or a similar material.

ADDITIONAL TOXICOLOGY INFORMATION:

This product contains petroleum base oils which may be refined by various processes including severe solvent extraction, severe hydrocracking, or severe hydrotreating. None of the oils requires a cancer warning under the OSHA Hazard Communication Standard (29 CFR 1910.1200). These oils have not been listed in the National Toxicology Program (NTP) Annual Report nor have they been classified by the International Agency for Research on Cancer (IARC) as; carcinogenic to humans (Group 1), probably carcinogenic to humans (Group 2A), or possibly carcinogenic to humans (Group 2B).

These oils have not been classified by the American Conference of Governmental Industrial Hygienists (ACGIH) as: confirmed human carcinogen (A1), suspected human carcinogen (A2), or confirmed animal carcinogen with unknown relevance to humans (A3).

SECTION 12 ECOLOGICAL INFORMATION

ECOTOXICITY

This material is not expected to be harmful to aquatic organisms.

The product has not been tested. The statement has been derived from the properties of the individual components.

MOBILITY

No data available.

PERSISTENCE AND DEGRADABILITY

This material is not expected to be readily biodegradable. The biodegradability of this material is based on an evaluation of data for the components or a similar material.

The product has not been tested. The statement has been derived from the properties of the individual components.

POTENTIAL TO BIOACCUMULATE

Bioconcentration Factor: No data available.

Octanol/Water Partition Coefficient: No data available

SECTION 13 DISPOSAL CONSIDERATIONS

Use material for its intended purpose or recycle if possible. Oil collection services are available for used oil recycling or disposal. Place contaminated materials in containers and dispose of in a manner consistent with

applicable regulations. Contact your sales representative or local environmental or health authorities for approved disposal or recycling methods.

SECTION 14 TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

DOT Shipping Description: NOT REGULATED AS HAZARDOUS MATERIAL UNDER 49 CFR

IMO/IMDG Shipping Description: NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER THE IMDG CODE

ICAO/IATA Shipping Description: NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER ICAO

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC code:
Not applicable

SECTION 15 REGULATORY INFORMATION

EPCRA 311/312 CATEGORIES: Not applicable

REGULATORY LISTS SEARCHED:

| | |
|---------------------|----------------------|
| 01-1=IARC Group 1 | 03=EPCRA 313 |
| 01-2A=IARC Group 2A | 04=CA Proposition 65 |
| 01-2B=IARC Group 2B | 05=MA RTK |
| 02=NTP Carcinogen | 06=NJ RTK |
| | 07=PA RTK |

No components of this material were found on the regulatory lists above.

CHEMICAL INVENTORIES:

All components comply with the following chemical inventory requirements: AICS (Australia), DSL (Canada), IECSC (China), KECI (Korea), TSCA (United States).

One or more components is listed on ELINCS (European Union). All other components are listed or exempted from listing on EINECS.

One or more components does not comply with the following chemical inventory requirements: ENCS (Japan), PICCS (Philippines).

NEW JERSEY RTK CLASSIFICATION:

Under the New Jersey Right-to-Know Act L. 1983 Chapter 315 N.J.S.A. 34:5A-1 et. seq., the product is to be identified as follows: PETROLEUM OIL (Grease)

SECTION 16 OTHER INFORMATION

NFPA RATINGS: Health: 2 Flammability: 1 Reactivity: 0

HMIS RATINGS: Health: 0 Flammability: 1 Reactivity: 0
 (0-Least, 1-Slight, 2-Moderate, 3-High, 4-Extreme, PPE:- Personal Protection Equipment Index recommendation, *-Chronic Effect Indicator). These values are obtained using the guidelines or published evaluations prepared by the National Fire Protection Association (NFPA) or the National Paint and Coating Association (for HMIS ratings).

REVISION STATEMENT: SECTION 09 - Physical/Chemical Properties information was modified.
 SECTION 15 - SARA 311 EPCRA Score information was added.
 SECTION 15 - SARA 311 Score information was deleted.

Revision Date: February 06, 2019

ABBREVIATIONS THAT MAY HAVE BEEN USED IN THIS DOCUMENT:

| | |
|---|--|
| TLV - Threshold Limit Value | TWA - Time Weighted Average |
| STEL - Short-term Exposure Limit | PEL - Permissible Exposure Limit |
| GHS - Globally Harmonized System | CAS - Chemical Abstract Service Number |
| ACGIH - American Conference of Governmental Industrial Hygienists | IMO/IMDG - International Maritime Dangerous Goods Code |
| API - American Petroleum Institute | SDS - Safety Data Sheet |
| HMIS - Hazardous Materials Information System | NFPA - National Fire Protection Association (USA) |
| DOT - Department of Transportation (USA) | NTP - National Toxicology Program (USA) |
| IARC - International Agency for Research on Cancer | OSHA - Occupational Safety and Health Administration |
| NCEL - New Chemical Exposure Limit | EPA - Environmental Protection Agency |
| SCBA - Self-Contained Breathing Apparatus | |

Prepared according to the 29 CFR 1910.1200 (2012) by Chevron Energy Technology Company, 6001 Bollinger Canyon Road, San Ramon, CA 94583.

The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.



GHS SAFETY DATA SHEET

WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: OCT 2013

Supersedes: DEC 2011

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe**PRODUCT USE:** Low VOC Solvent Cement for CPVC Plastic Pipe**SUPPLIER:****MANUFACTURER:**IPS Corporation
17109 South Main Street, Gardena, CA 90248-3127
P.O. Box 379, Gardena, CA 90247-0379
Tel. 1-310-898-3300**EMERGENCY:** Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)**Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|---|--|-----------------------------|
| Acute Toxicity: Category 4 Skin Irritation: Category 3 Skin Sensitization: NO Eye: Category 2B | Acute Toxicity: None Known Chronic Toxicity: None Known | Flammable Liquid Category 2 |

GHS LABEL:

OR

**Signal Word:** Danger**WHMIS CLASSIFICATION:** CLASS B, DIVISION 2

Hazard Statements

H225: Highly flammable liquid and vapor
H319: Causes serious eye irritation
H332: Harmful if inhaled
H335: May cause respiratory irritation
H336: May cause drowsiness or dizziness
EUH019: May form explosive peroxides

Precautionary Statements

P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking
P261: Avoid breathing dust/fume/gas/mist/vapors/spray
P280: Wear protective gloves/protective clothing/eye protection/face protection
P337+P313: Get medical advice/attention
P403+P233: Store in a well ventilated place. Keep container tightly closed
P501: Dispose of contents/container in accordance with local regulation

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH | CONCENTRATION |
|---------------------------|----------|-----------|-------------------------|---------------|
| | | | Pre-registration Number | % by Weight |
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 30 - 60 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 5 - 25 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 05-2116297718-25-0000 | 5 - 20 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.

* Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).

indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.

Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.

Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.

Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

SECTION 5 - FIREFIGHTING MEASURES

| | | | | |
|--|--|--------------|------|------------|
| Suitable Extinguishing Media: | Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. | HMIS | NFPA | 0-Minimal |
| Unsuitable Extinguishing Media: | Water spray or stream. | Health | 2 | 1-Slight |
| Exposure Hazards: | Inhalation and dermal contact | Flammability | 3 | 2-Moderate |
| Combustion Products: | Oxides of carbon, hydrogen chloride and smoke | Reactivity | 0 | 3-Serious |
| | | PPE | B | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).

Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.

Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.

Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 33°C (90°F) and away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL: | OSHA | CAL/OSHA | CAL/OSHA | CAL/OSHA |
|------------------|---------------------------|-----------|------------|----------|------------|-------------|----------|----------|----------|
| | | | | | | PEL-Ceiling | PEL | Ceiling | STEL |
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.**Monitoring:** Maintain breathing zone airborne concentrations below exposure limits.**Personal Protective Equipment (PPE):****Eye Protection:** Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.**Skin Protection:** Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.**Respiratory Protection:** Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.

2120



GHS SAFETY DATA SHEET

WELD-ON® 714™ Low VOC Cement for CPVC Plastic Pipe

Date Revised: OCT 2013

Supersedes: DEC 2011

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Orange or gray, heavy syrupy liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 66°C (151°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 66°C (151°F) Based on first boiling component: THF | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 11.8% based on THF |
| Flash Point: | -20°C (-4°F) TCC based on THF | Vapor Pressure: | 129 mm Hg @ 20°C (68°F) based on THF |
| Specific Gravity: | 0.995 @23°C (73°F) | Vapor Density: | >2 (Air = 1) |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Other Data: Viscosity: | Heavy bodied |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 490 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

Likely Routes of Exposure: Inhalation, Eye and Skin Contact

Acute symptoms and effects:

| | |
|----------------------|---|
| Inhalation: | Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages. |
| Eye Contact: | Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid. |
| Skin Contact: | Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact. |
| Ingestion: | May cause nausea, vomiting, diarrhea and mental sluggishness. |

Chronic (long-term) effects: None known to humans

| | | |
|---------------------------|---|--|
| Toxicity: | LD ₅₀ | LC ₅₀ |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) |

| | | | | | |
|-----------------------------|-----------------------|---------------------|-----------------------|---------------------------------|-----------------------------|
| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 490 g/l. |
| Degradability: | Biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|--------------------------|
| Proper Shipping Name: | Adhesives |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1133 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

EXCEPTION for Ground Shipping

DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package.
Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D".

TDG INFORMATION

| | |
|---------------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|--|--|
| Precautionary Label Information: | Highly Flammable, Irritant | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia |
| Symbols: | F, Xi | | AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Risk Phrases: | R11: Highly flammable. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness | |
| Safety Phrases: | S2: Keep out of the reach of children S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. | S25: Avoid contact with eyes. S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. | |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 10/15/2013 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for CPVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

1 Identification

- **Product identifier**
- **Trade name:**
FS-ONE MAX
Hilti Firestop Filler Mastic CFS-FIL
- **Relevant identified uses of the substance or mixture and uses advised against** No further relevant information available.
- **Application of the substance / the mixture** Construction chemicals
- **Details of the supplier of the safety data sheet**
- **Manufacturer/Supplier:**
Hilti, Inc.
5400 South 122nd East Ave.
US-Tulsa, OK 74146
Phone: (800) 879-8000
Fax: (800) 879-7000
Español: (800) 879-5000
- **Information department:**
chemicals.hse@hilti.com
see section 16
- **Emergency telephone number:**
Chem-Trec
Tel.: 1 800 424 9300
Schweizerisches Toxikologisches Informationszentrum - 24 h Service
Tel.: 0041 / 44 251 51 51 (international)

2 Hazard(s) identification

- **Classification of the substance or mixture** The product is not classified according to the Globally Harmonized System (GHS).
- **Label elements**
- **GHS label elements** Void
- **Hazard pictograms** Void
- **Signal word** Void
- **Hazard statements** Void
- **Classification system**
- **NFPA ratings (scale 0-4)**



- **Other hazards**
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.

3 Composition/information on ingredients

- **Chemical characterization: Mixtures**
- **Description:** -
- **Dangerous components:** Void
- **Additional information** For the wording of the listed risk phrases refer to section 16.

4 First-aid measures

- **Description of first aid measures**
- **General information** No special measures required.
- **After inhalation** Take affected persons into fresh air and keep quiet.
- **After skin contact** Immediately wash with water and soap and rinse thoroughly.
- **After eye contact** Rinse opened eye for several minutes under running water. Then consult a doctor.
- **After swallowing** Seek immediate medical advice.
- **Information for doctor**
- **Most important symptoms and effects, both acute and delayed** No further relevant information available.
- **Indication of any immediate medical attention and special treatment needed** No further relevant information available.

5 Fire-fighting measures

- **Extinguishing media**
- **Suitable extinguishing agents** CO₂, extinguishing powder or water spray. Fight larger fires with water spray or alcohol resistant foam.
- **Special hazards arising from the substance or mixture**
In case of fire, the following can be released:
Carbon monoxide (CO)

(Contd. on page 2)

US

(Contd. of page 1)

- Carbondioxide (CO₂)
- **Advice for firefighters**
- **Protective equipment:** Ensure adequate ventilation

6 Accidental release measures

- **Personal precautions, protective equipment and emergency procedures**
 - Ensure adequate ventilation
 - Wear protective clothing.
 - Particular danger of slipping on leaked/spilled product.
- **Environmental precautions:** Do not allow product to reach sewage system or any water course.
- **Methods and material for containment and cleaning up:**
 - Pick up mechanically.
 - Dispose contaminated material as waste according to item 13.
- **Reference to other sections**
 - See Section 7 for information on safe handling
 - See Section 8 for information on personal protection equipment.
 - See Section 13 for disposal information.

7 Handling and storage

- **Handling**
- **Precautions for safe handling** No special measures required.
- **Information about protection against explosions and fires:** No special measures required.
- **Conditions for safe storage, including any incompatibilities**
- **Storage**
- **Requirements to be met by storerooms and receptacles:** keep containers securely closed and dry, store at 5 - 25 °C / 41 - 77 °F
- **Information about storage in one common storage facility:** Not required.
- **Further information about storage conditions:** None.
- **Storage class** 10
- **Specific end use(s)** No further relevant information available.

8 Exposure controls/personal protection

- **Control parameters**
- **Components with limit values that require monitoring at the workplace:**
 - The product does not contain any relevant quantities of materials with critical values that have to be monitored at the workplace.
- **Additional information:** The lists that were valid during the creation were used as basis.
- **Exposure controls**
- **Personal protective equipment**
- **General protective and hygienic measures**
 - The usual precautionary measures for handling chemicals should be followed.
 - Avoid contact with the eyes and skin.
 - Keep away from foodstuffs, beverages and feed.
 - Wash hands before breaks and at the end of work.
- **Breathing equipment:** Not necessary if room is well-ventilated.
- **Protection of hands:**



Protective gloves.

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.
Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation
EN 374

- **Material of gloves**
 - Synthetic gloves

The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.

- **Penetration time of glove material**
 - The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed.
- **For the permanent contact gloves made of the following materials are suitable:** Nitrile rubber, NBR
- **Eye protection:**



Tightly sealed goggles.

EN 166 + EN 170

(Contd. on page 3)

US

(Contd. of page 2)

 · **Body protection:**


Protective work clothing.

9 Physical and chemical properties

 · **Information on basic physical and chemical properties**

 · **General Information**

 · **Appearance:**

| | |
|---------------------------|-----------------|
| · Form: | Pasty |
| · Color: | Red |
| · Odor: | Characteristic |
| · Odour threshold: | Not determined. |

 · **pH-value:** Not determined.

 · **Change in condition**

| | |
|---------------------------------------|-----------------|
| · Melting point/Melting range: | Not determined. |
| · Boiling point/Boiling range: | 100 °C (212 °F) |

 · **Flash point:** Not applicable

 · **Flammability (solid, gaseous)** Not applicable.

 · **Ignition temperature:**

 · **Decomposition temperature:** Not determined.

 · **Auto igniting:** Product is not selfigniting.

 · **Danger of explosion:** Product does not present an explosion hazard.

 · **Explosion limits:**

| | |
|-----------------|-----------------|
| · Lower: | Not determined. |
| · Upper: | Not determined. |

 · **Vapor pressure at 20 °C (68 °F):** 23 hPa (17 mm Hg)

 · **Density:** Not determined

 · **Relative density** Not determined.

 · **Vapour density** Not determined.

 · **Evaporation rate** Not determined.

 · **Solubility in / Miscibility with**

 · **Water:** Not miscible or difficult to mix

 · **Partition coefficient (n-octanol/water):** Not determined.

 · **Viscosity:**

 · **dynamic:** Not determined.

 · **kinematic:** Not determined.

 · **Solvent content:**

 · **Organic solvents:** 1.0 %

 · **Water:** 18.5 %

 · **Other information** VOC Content: 9 g/l (EPA Method 24)

10 Stability and reactivity

 · **Reactivity**

 · **Chemical stability**

 · **Thermal decomposition / conditions to be avoided:** No decomposition if used according to specifications.

 · **Possibility of hazardous reactions** No dangerous reactions known

 · **Conditions to avoid** No further relevant information available.

 · **Incompatible materials:** No further relevant information available.

 · **Hazardous decomposition products:** No dangerous decomposition products known

11 Toxicological information

 · **Information on toxicological effects**

 · **Acute toxicity:**

 · **Primary irritant effect:**

 · **on the skin:** No irritant effect.

 · **on the eye:** No irritating effect.

 · **Sensitization:** No sensitizing effects known.

(Contd. on page 4)

(Contd. of page 3)

Additional toxicological information:

When used and handled according to specifications, the product does not have any harmful effects according to our experience and the information provided to us.

IARC (International Agency for Research on Cancer)

None of the ingredients is listed.

NTP (National Toxicology Program)

None of the ingredients is listed.

OSHA-Ca (Occupational Safety & Health Administration)

None of the ingredients is listed.

12 Ecological information

- **Toxicity**
- **Aquatic toxicity:** No further relevant information available.
- **Persistence and degradability:** No further relevant information available.
- **Behavior in environmental systems:**
- **Bioaccumulative potential:** No further relevant information available.
- **Mobility in soil:** No further relevant information available.
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.
- **Other adverse effects:** No further relevant information available.

13 Disposal considerations

- **Waste treatment methods**
- **Recommendation:** Must not be disposed of together with household garbage. Do not allow product to reach sewage system.
- **European waste catalogue:**
08 00 00
08 04 00
08 04 10
- **Uncleaned packagings:**
- **Recommendation:** Dispose of packaging according to regulations on the disposal of packagings.

14 Transport information

| | |
|---|-----------------|
| · UN-Number | |
| · DOT, ADR, ADN, IMDG, IATA | Void |
| · UN proper shipping name | |
| · DOT, ADR, ADN, IMDG, IATA | Void |
| · Transport hazard class(es) | |
| · DOT, ADR, ADN, IMDG, IATA | |
| · Class | Void |
| · Packing group | |
| · DOT, ADR, IMDG, IATA | Void |
| · Environmental hazards: | |
| · Marine pollutant: | No |
| · Special precautions for user | Not applicable. |
| · Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code | Not applicable. |
| · UN "Model Regulation": | - |

15 Regulatory information

- Safety, health and environmental regulations/legislation specific for the substance or mixture
- Sara

Section 355 (Extremely hazardous substances):

None of the ingredients is listed.

Section 313 (Specific toxic chemical listings):

None of the ingredients are listed.

TSCA (Toxic Substances Control Act):

All ingredients are listed.

(Contd. on page 5)

(Contd. of page 4)

· **Proposition 65:**· **Chemicals known to cause cancer:**

None of the ingredients are listed.

· **Carcinogeny categories**· **EPA (Environmental Protection Agency)**

None of the ingredients is listed.

· **TLV (Threshold Limit Value established by ACGIH)**

None of the ingredients is listed.

· **MAK (German Maximum Workplace Concentration)**

None of the ingredients is listed.

· **NIOSH-Ca (National Institute for Occupational Safety and Health)**

None of the ingredients is listed.

· **Chemical safety assessment:** not required.**16 Other information**

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

· **Department issuing SDS:**

Hilti Corporation
Business Unit Chemicals
Quality/Safety/Environment
FL-9494 Schaan / Liechtenstein

chemicals.hse@hilti.com

Tel.: +423 234 3004

FAX.: +423 234 3462

· **Date of preparation / last revision** 03/06/2015 / -· **Abbreviations and acronyms:**

ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road)
IMDG: International Maritime Code for Dangerous Goods
DOT: US Department of Transportation
IATA: International Air Transport Association
ACGIH: American Conference of Governmental Industrial Hygienists
EINECS: European Inventory of Existing Commercial Chemical Substances
ELINCS: European List of Notified Chemical Substances
CAS: Chemical Abstracts Service (division of the American Chemical Society)
NFPA: National Fire Protection Association (USA)

· * **Data compared to the previous version altered.**

US

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 1 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

29 CFR 1910.1200 (OSHA HazCom 2012)

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : MAC'S PREMIUM STARTING FLUID

Recommended use of the chemical and restrictions on use

| | |
|--|---|
| Details of the supplier of the safety data sheet Ashland P.O. Box 2219 Columbus, OH 43216 United States of America EHS Customer Requests@ashland.com | Emergency telephone number 1-800-ASHLAND (1-800-274-5263) Regulatory Information Number 1-800-325-3751 Product Information 614-790-3333 |
|--|---|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Flammable aerosols : Category 1
 Acute toxicity (Oral) : Category 4
 Carcinogenicity : Category 2
 Reproductive toxicity : Category 2
 Specific target organ systemic toxicity - single exposure : Category 3 (Central nervous system)
 Aspiration hazard : Category 1

GHS Label element

Hazard pictograms : 

Signal Word : Danger

Hazard Statements : Extremely flammable aerosol.
 Harmful if swallowed.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 2 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

May be fatal if swallowed and enters airways.
 May cause drowsiness or dizziness.
 Suspected of causing cancer.
 Suspected of damaging fertility or the unborn child.

Precautionary Statements

: Prevention:

Obtain special instructions before use.
 Do not handle until all safety precautions have been read and understood.
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not spray on an open flame or other ignition source.
 Pressurized container: Do not pierce or burn, even after use.
 Avoid breathing dust/ fume/ gas/ mist/ vapors/ spray.
 Wash skin thoroughly after handling.
 Do not eat, drink or smoke when using this product.
 Use only outdoors or in a well-ventilated area.
 Wear protective gloves/ protective clothing/ eye protection/ face protection.

Response:

IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
 IF exposed or concerned: Get medical advice/ attention.
 Do NOT induce vomiting.

Storage:

Store in a well-ventilated place. Keep container tightly closed.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50 °C/ 122 °F.

Disposal:

Dispose of contents/ container to an approved waste disposal plant.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture
 Chemical nature : Static Accumulator
 Chemical nature : Defatter

Hazardous components

| Chemical Name | CAS-No. | Classification | Concentration (%) |
|------------------------------------|------------|--------------------|-------------------|
| SOLVENT NAPHTHA (PETROLEUM), LIGHT | 64742-89-8 | Flam. Liq. 2; H225 | 67.75 |

SAFETY DATA SHEET

Revision Date: 05/23/2015

Print Date: 6/1/2015

SDS Number: R0340955

MAC'S PREMIUM STARTING FLUID

Version: 1.0

NM7216

| | | | |
|----------------|----------|---|-------|
| ALIPHATIC | | STOT SE 3; H336 Asp. Tox. 1; H304 Aquatic Acute 2; H401 Aquatic Chronic 2; H411 | |
| ETHYL ETHER | 60-29-7 | Flam. Liq. 1; H224 Acute Tox. 4; H302 STOT SE 3; H336 | 29.33 |
| n-HEPTANE | 142-82-5 | Flam. Liq. 2; H225 Skin Irrit. 2; H315 STOT SE 3; H336 Asp. Tox. 1; H304 | 2.71 |
| CARBON DIOXIDE | 124-38-9 | Press. Gas Liquefied gas; H280 | 2.01 |
| ETHANOL | 64-17-5 | Flam. Liq. 2; H225 Eye Irrit. 2A; H319 STOT SE 3; H336 | 1.75 |
| ETHYL CHLORIDE | 75-00-3 | Flam. Gas 1; H220 Carc. 2; H351 | 0.43 |
| TOLUENE | 108-88-3 | Flam. Liq. 2; H225 Skin Irrit. 2; H315 Eye Irrit. 2A; H319 | 0.18 |

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 4 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

| | | | |
|--|--|-------------------|--|
| | | Repr. 2; H361 | |
| | | STOT SE 3; H336 | |
| | | STOT RE 2; H373 | |
| | | Asp. Tox. 1; H304 | |

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Call a POISON CENTRE or doctor/physician if exposed or you feel unwell.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : Move to fresh air.
If unconscious place in recovery position and seek medical advice.
Consult a physician after significant exposure.
- In case of skin contact : Remove contaminated clothing. If irritation develops, get medical attention.
If on skin, rinse well with water.
Wash contaminated clothing before re-use.
- In case of eye contact : Flush eyes with water as a precaution.
Remove contact lenses.
Protect unharmed eye.
If eye irritation persists, consult a specialist.
- If swallowed : Obtain medical attention.
Rinse mouth with water.
Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
- Most important symptoms and effects, both acute and delayed : Inhalation of high concentrations of this material, as could occur in enclosed spaces or during deliberate abuse, may be associated with cardiac arrhythmias. Sympathomimetic drugs may initiate cardiac arrhythmias in persons exposed to this material.
- Harmful if swallowed.
May be fatal if swallowed and enters airways.
May cause drowsiness or dizziness.
Suspected of causing cancer.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 5 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

Suspected of damaging fertility or the unborn child.
Signs and symptoms of exposure to this material through breathing, swallowing, and/or passage of the material through the skin may include:
stomach or intestinal upset (nausea, vomiting, diarrhea)
irritation (nose, throat, airways)
Cough
loss of appetite
confusion
irregular heartbeat
respiratory failure

Notes to physician : No hazards which require special first aid measures.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Water spray
Foam
Alcohol-resistant foam
Carbon dioxide (CO₂)
Dry chemical
- Unsuitable extinguishing media : High volume water jet
- Specific hazards during firefighting : Never use welding or cutting torch on or near drum (even empty) because product (even just residue) can ignite explosively.
Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
Do not allow run-off from fire fighting to enter drains or water courses.
- Hazardous combustion products : Aldehydes
carbon dioxide and carbon monoxide
organic compounds
Hydrocarbons
formaldehyde-like
- Specific extinguishing methods :

Product is compatible with standard fire-fighting agents.
- Further information : Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations.
Use a water spray to cool fully closed containers.
- Special protective equipment for firefighters : In the event of fire, wear self-contained breathing apparatus.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 6 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, protective equipment and emergency procedures : Evacuate personnel to safe areas.
Remove all sources of ignition.
Use personal protective equipment.
Ensure adequate ventilation.
Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed.
- Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
If the product contaminates rivers and lakes or drains inform respective authorities.
- Other information : Comply with all applicable federal, state, and local regulations.
Suppress (knock down) gases/vapours/mists with a water spray jet.

SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Open drum carefully as content may be under pressure.
Provide sufficient air exchange and/or exhaust in work rooms.
Do not breathe vapours/dust.
Do not smoke.
Container hazardous when empty.
Take precautionary measures against static discharges.
Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
Smoking, eating and drinking should be prohibited in the application area.
For personal protection see section 8.
Dispose of rinse water in accordance with local and national regulations.
Container may be opened only under exhaust ventilation hood.
- Conditions for safe storage : BEWARE: Aerosol is pressurized. Keep away from direct sun exposure and temperatures over 50 °C. Do not open by force or throw into fire even after use. Do not spray on flames or red-hot objects.
Keep container tightly closed in a dry and well-ventilated place.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Observe label precautions.
No smoking.
Electrical installations / working materials must comply with

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 7 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

the technological safety standards.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|--|------------|----------------------------------|---|-------------|
| SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC | 64742-89-8 | TWA | 500 ppm | OSHA_TRANS |
| | | TWA | 300 ppm | ACGIH |
| | | TWA | 2,000 mg/m3 | OSHA_TRANS |
| ETHYL ETHER | 60-29-7 | TWA | 1,370 mg/m3 | ACGIH |
| | | TWA | 400 ppm | ACGIH |
| | | STEL | 500 ppm | ACGIH |
| | | PEL | 400 ppm 1,200 mg/m3 | OSHA_TRANS |
| | | TWA | 400 ppm 1,200 mg/m3 | TN OEL |
| n-HEPTANE | 142-82-5 | STEL | 500 ppm 1,500 mg/m3 | TN OEL |
| | | REL | 85 ppm 350 mg/m3 | NIOSH/GUIDE |
| | | Ceil_Time | 440 ppm 1,800 mg/m3 | NIOSH/GUIDE |
| | | PEL | 500 ppm 2,000 mg/m3 | OSHA_TRANS |
| | | TWA | 400 ppm | ACGIH |
| CARBON DIOXIDE | 124-38-9 | STEL | 500 ppm | ACGIH |
| | | TWA | 5,000 ppm | ACGIH |
| | | STEL | 30,000 ppm | ACGIH |
| | | REL | 5,000 ppm 9,000 mg/m3 | NIOSH/GUIDE |
| | | STEL | 30,000 ppm 54,000 mg/m3 | NIOSH/GUIDE |
| ETHANOL | 64-17-5 | PEL | 5,000 ppm 9,000 mg/m3 | OSHA_TRANS |
| | | REL | 1,000 ppm 1,900 mg/m3 | NIOSH/GUIDE |
| | | PEL | 1,000 ppm 1,900 mg/m3 | OSHA_TRANS |
| | | STEL | 1,000 ppm | ACGIH |
| DISTILLATES (PETROLEUM), HYDROTREATED LIGHT | 64742-53-6 | TWA | 1,000 ppm 1,900 mg/m3 | Z1A |
| | | PEL | 500 ppm 2,000 mg/m3 | OSHA_TRANS |
| | | | | |

SAFETY DATA SHEET

Revision Date: 05/23/2015

Print Date: 6/1/2015

SDS Number: R0340955

MAC'S PREMIUM STARTING FLUID

Version: 1.0

NM7216

| | | | | |
|----------------|----------|-----------|--------------------------|-----------------|
| NAPHTHENIC | | REL | 5 mg/m3 Mist. | NIOSH/GUID E |
| | | STEL | 10 mg/m3 Mist. | NIOSH/GUID E |
| | | PEL | 5 mg/m3 Mist. | OSHA_TRA NS |
| ETHYL CHLORIDE | 75-00-3 | TWA | 100 ppm | ACGIH |
| | | PEL | 1,000 ppm 2,600 mg/m3 | OSHA_TRA NS |
| | | TWA | 1,000 ppm 2,600 mg/m3 | Z1A |
| TOLUENE | 108-88-3 | TWA | 20 ppm | ACGIH |
| | | REL | 100 ppm 375 mg/m3 | NIOSH/GUID E |
| | | STEL | 150 ppm 560 mg/m3 | NIOSH/GUID E |
| | | TWA | 200 ppm | OSHA/Z2 |
| | | Ceiling | 300 ppm | OSHA/Z2 |
| | | MAX. CONC | 500 ppm | OSHA/Z2 |

Biological occupational exposure limits

| Components | CAS-No. | Control parameters | Biological specimen | Sampling time | Permissible concentration | Basis |
|------------|------------|---------------------------|---------------------|--|---------------------------|-------|
| TOLUENE | 108-88-3 | o-Cresol, with hydrolysis | Creatinine in urine | Sampling time: End of shift. | 0.3 mg/g | |
| Remarks: | Background | | | | | |
| | | toluene | Urine | Sampling time: End of shift. | 0.03 mg/l | |
| | | toluene | Blood | Sampling time: Prior to last shift of work week. | 0.02 mg/l | |

Engineering measures : Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Personal protective equipment

Respiratory protection : In the case of vapour formation use a respirator with an approved filter.
In the case of dust or aerosol formation use respirator with an approved filter.

A NIOSH-approved air-purifying respirator with an appropriate

| | | |
|------------------------------|--|---------------------------|
| ASHLAND | | Page: 9 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

cartridge and/or filter may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits (if applicable) or if overexposure has otherwise been determined. Protection provided by air-purifying respirators is limited. Use a positive pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are not known or any other circumstances where an air-purifying respirator may not provide adequate protection.

- Hand protection
Material : Nitrile rubber
- Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.
- Eye protection : Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.
- Skin and body protection : Wear as appropriate:
impervious clothing
Safety shoes
Flame-resistant clothing
Choose body protection according to the amount and concentration of the dangerous substance at the work place.
Wear resistant gloves (consult your safety equipment supplier).
- Hygiene measures : Wash hands before breaks and at the end of workday.
When using do not eat or drink.
When using do not smoke.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Physical state : aerosol
- Colour : colourless
- Odour : ether-like
- Odour Threshold : No data available
- pH : No data available
- : No data available
- Boiling point/boiling range : 94.3 °F / 34.6 °C
(1,013.232 hPa)
Calculated Phase Transition Liquid/Gas
- Flash point : -49 °F / -45 °C
Calculated Flash Point
- Evaporation rate : No data available

SAFETY DATA SHEET

Revision Date: 05/23/2015

Print Date: 6/1/2015

SDS Number: R0340955

MAC'S PREMIUM STARTING FLUID

Version: 1.0

NM7216

Flammability (solid, gas) : No data available

Upper explosion limit : 36.5 %(V)
Calculated Explosive Limit

Lower explosion limit : 1.05 %(V)
Calculated Explosive Limit

Vapour pressure : 717.2616 hPa (25 °C)
Calculated Vapor Pressure

Relative vapour density : No data available

Relative density : No data available

Density : 0.706 g/cm3 (15.56 °C)

Solubility(ies)

Water solubility : No data available

Solubility in other solvents : No data available

Partition coefficient: n-octanol/water : No data available

Thermal decomposition : No data available

Viscosity

Viscosity, dynamic : No data available

Viscosity, kinematic : No data available

Oxidizing properties : No data available

SECTION 10. STABILITY AND REACTIVITY

Reactivity : No decomposition if stored and applied as directed.

Chemical stability : Stable under recommended storage conditions.

Possibility of hazardous reactions : Vapours may form explosive mixture with air.

Conditions to avoid : Heat, flames and sparks.
excessive heat

Incompatible materials : Acids
Alkali metals
Ammonia
Bases
halogens

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 11 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

inorganic materials
Oxidizing agents
sodium
Sulphur compounds

Hazardous decomposition
products

Aldehydes
carbon dioxide and carbon monoxide
formaldehyde-like
Hydrocarbons
organic compounds

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure : Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Harmful if swallowed.

Components:

SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC:

Acute oral toxicity : LD 50 (Rat): > 8,000 mg/kg

Acute inhalation toxicity : LC 50 (Rat): 3400 ppm
Exposure time: 4 h
Test atmosphere: vapour

Acute dermal toxicity : LD 50 (Rat): > 4,000 mg/kg

ETHYL ETHER:

Acute oral toxicity : LD50 (Rat): 1,200 - 1,700 mg/kg

Acute inhalation toxicity : LC 50 (Rat): 32,000 mg/l
Exposure time: 4 h

n-HEPTANE:

Acute oral toxicity : LD 50 (Rat): Expected > 5,000 mg/kg
Remarks: Information given is based on data obtained from similar substances.

Acute inhalation toxicity : LC 50 (Rat, male and female): > 29.29 mg/l
Exposure time: 4 h
Test atmosphere: vapour
Method: OECD Test Guideline 403
Assessment: No adverse effect has been observed in acute inhalation toxicity tests.

Acute dermal toxicity : LD 50 (Rabbit): Expected > 2,000 mg/kg
Assessment: Not classified as acutely toxic by dermal absorption under GHS.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 12 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

Remarks: Information given is based on data obtained from similar substances.

ETHANOL:

Acute oral toxicity : LD 50 (Rat): 7,060 mg/kg

Acute inhalation toxicity : LC 50 (Rat): 117 - 125 mg/l
Exposure time: 4 h

LC 50 (Mouse): 39 mg/l
Exposure time: 4 h

Acute dermal toxicity : LD Lo (Rabbit): 20 g/kg

ETHYL CHLORIDE:

Acute inhalation toxicity : LC 50 (Rat): > 19000 ppm
Exposure time: 4 h
Test atmosphere: vapour
Method: OECD Test Guideline 403

TOLUENE:

Acute oral toxicity : LD 50 (Rat): > 5,000 mg/kg

Acute inhalation toxicity : LC 50 (Rat): 8000 ppm
Exposure time: 4 h

Acute dermal toxicity : LD 50 (Rabbit): 12,124 mg/kg

Skin corrosion/irritation

Not classified based on available information.

Product:

Result: Repeated exposure may cause skin dryness or cracking.

Components:

SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC:

Result: Mildly irritating to skin

ETHYL ETHER:

Result: Irritating to skin

n-HEPTANE:

Result: Irritating to skin

CARBON DIOXIDE:

Result: Not irritating to skin

ETHANOL:

Result: Slightly irritating to skin

ETHYL CHLORIDE:

Result: Mildly irritating to skin

TOLUENE:

| | | |
|--|--|---------------------------|
| ASHLAND® | | Page: 13 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID NM7216 | | Version: 1.0 |

Result: Irritating to skin

Serious eye damage/eye irritation

Not classified based on available information.

Product:

Remarks: Vapours may cause irritation to the eyes, respiratory system and the skin.

Components:

SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC:

Result: Mildly irritating to eyes

ETHYL ETHER:

Result: Severely irritating to eyes

n-HEPTANE:

Result: Mildly irritating to eyes

CARBON DIOXIDE:

Result: Not irritating to eyes

ETHANOL:

Result: Irritating to eyes

ETHYL CHLORIDE:

Result: Mildly irritating to eyes

TOLUENE:

Result: Irritating to eyes

Respiratory or skin sensitisation

Skin sensitisation: Not classified based on available information.

Respiratory sensitisation: Not classified based on available information.

Components:

n-HEPTANE:

Test Type: Maximisation Test (GPMT)

Species: Guinea pig

Result: Did not cause sensitisation on laboratory animals.

Germ cell mutagenicity

Not classified based on available information.

Components:

n-HEPTANE:

Genotoxicity in vitro

: Test Type: Chromosome aberration test in vitro
Test species: rat hepatocytes
Method: OECD Test Guideline 473
Result: negative

: Test Type: Ames test
Method: OECD Test Guideline 471
Result: negative

Carcinogenicity

Suspected of causing cancer.

Components:

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 14 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

ETHYL CHLORIDE:
 Carcinogenicity - Assessment : Limited evidence of carcinogenicity in animal studies

Reproductive toxicity
 Suspected of damaging fertility or the unborn child.

Components:
 TOLUENE:
 Reproductive toxicity - Assessment : Some evidence of adverse effects on sexual function and fertility, and/or on development, based on animal experiments.

STOT - single exposure
 May cause drowsiness or dizziness.

Components:
 ETHYL ETHER:
 Assessment: May cause drowsiness or dizziness.

n-HEPTANE:
 Assessment: May cause drowsiness or dizziness.

ETHANOL:
 Assessment: May cause drowsiness or dizziness.

TOLUENE:
 Exposure routes: Inhalation
 Target Organs: Central nervous system
 Assessment: May cause drowsiness or dizziness.

STOT - repeated exposure
 Not classified based on available information.

Components:
 TOLUENE:
 Exposure routes: Inhalation
 Target Organs: Neurologic: other (neuropsychological effects, auditory dysfunction and effects on colour vision)
 Assessment: May cause damage to organs through prolonged or repeated exposure.

Aspiration toxicity
 May be fatal if swallowed and enters airways.

Components:
 SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC:
 May be fatal if swallowed and enters airways.

n-HEPTANE:
 May be fatal if swallowed and enters airways.

TOLUENE:
 May be fatal if swallowed and enters airways.

Further information

Product:
 Remarks: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting., Concentrations substantially above the TLV value may cause narcotic effects., Solvents may degrease the skin.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 15 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

Components:

ETHYL CHLORIDE:

Remarks: Liver

Remarks: Central nervous system

Carcinogenicity:

IARC

Group 1: Carcinogenic to humans

DISTILLATES 64742-53-6
(PETROLEUM),
HYDROTREATED LIGHT
NAPHTHENIC

OSHA

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

NTP

Known to be human carcinogen

DISTILLATES 64742-53-6
(PETROLEUM),
HYDROTREATED LIGHT
NAPHTHENIC

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

n-HEPTANE:

Toxicity to daphnia and other aquatic invertebrates : EC 50 (Water flea (Daphnia magna)): 1.5 mg/l
Exposure time: 48 h
Test Type: static test

LC 50 (Mysidopsis bahia (opossum shrimp)): 0.1 mg/l
Exposure time: 96 h
Test Type: semi-static test

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOELR (Water flea (Daphnia magna)): 1 mg/l
Exposure time: 21 d
Test Type: static test
Test substance: WAF
Method: OECD Test Guideline 211
Remarks: Information given is based on data obtained from similar substances.

Ecotoxicology Assessment
Acute aquatic toxicity : Very toxic to aquatic life.

Chronic aquatic toxicity : Very toxic to aquatic life with long lasting effects.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 16 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

ETHANOL:

Toxicity to fish : LC 50 (Rainbow trout,donaldson trout (Oncorhynchus mykiss)): 12,000 - 16,000 mg/l
Exposure time: 96 h
Test Type: static test

Toxicity to daphnia and other aquatic invertebrates : EC 50 (Water flea (Daphnia magna)): > 10,000 mg/l
Exposure time: 48 h
Test Type: static test

ETHYL CHLORIDE:

Toxicity to daphnia and other aquatic invertebrates : EC50 (Water flea (Daphnia magna)): 58 mg/l
Exposure time: 48 h
Test Type: static test
Method: Directive 67/548/EEC, Annex V, C.2.

Toxicity to algae : EC50 (Desmodesmus subspicatus (green algae)): 118 mg/l
End point: Growth inhibition
Exposure time: 72 h
Test Type: static test
Method: Directive 67/548/EEC, Annex V, C.3.

TOLUENE:

Toxicity to fish : LC50 (Oncorhynchus kisutch (coho salmon)): 5.5 mg/l
Exposure time: 96 h
Test Type: flow-through test

Toxicity to daphnia and other aquatic invertebrates : EC50 (Water flea (Ceriodaphnia dubia)): 3.78 mg/l
Exposure time: 48 h
Remarks: Mortality

Toxicity to algae : EC50 (Pseudokirchneriella subcapitata (microalgae)): > 433 mg/l
End point: Growth inhibition
Exposure time: 96 h

NOEC (Scenedesmus quadricauda (Green algae)): > 400 mg/l
End point: Growth inhibition
Exposure time: 7 d

Toxicity to fish (Chronic toxicity) : NOEC (Oncorhynchus mykiss (rainbow trout)): 1.39 mg/l
Exposure time: 40 d
Test Type: flow-through test

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Water flea (Ceriodaphnia dubia)): 0.74 mg/l
Exposure time: 7 d

Persistence and degradability

n-HEPTANE:

Biodegradability : Result: Readily biodegradable

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 17 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

ETHYL CHLORIDE:

Biodegradability : Inoculum: activated sludge
 Result: Not readily biodegradable.
 Biodegradation: 0 %
 Exposure time: 28 d
 Method: Directive 67/548/EEC Annex V, C.4.E.

TOLUENE:

Biodegradability : Result: Readily biodegradable

Bioaccumulative potential

ETHYL ETHER:

Partition coefficient: n-octanol/water : log Pow: 0.89

n-HEPTANE:

Partition coefficient: n-octanol/water : log Pow: 4.66

ETHANOL:

Partition coefficient: n-octanol/water : log Pow: -0.31

ETHYL CHLORIDE:

Partition coefficient: n-octanol/water : log Pow: 1.43

TOLUENE:

Bioaccumulation : Species: Ide, silver or golden orfe (Leuciscus idus)
 Bioconcentration factor (BCF): 94
 Exposure time: 3 d
 Concentration: 0.05 mg/l
 Method: Not reported

Partition coefficient: n-octanol/water : log Pow: 2.73

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Additional ecological information : An environmental hazard cannot be excluded in the event of unprofessional handling or disposal., Toxic to aquatic life with long lasting effects.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 18 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

General advice : The product should not be allowed to enter drains, water courses or the soil.
Do not contaminate ponds, waterways or ditches with chemical or used container.
Send to a licensed waste management company.

Dispose of in accordance with all applicable local, state and federal regulations.

Contaminated packaging : Empty remaining contents.
Empty containers should be taken to an approved waste handling site for recycling or disposal.
Do not re-use empty containers.
Do not burn, or use a cutting torch on, the empty drum.

SECTION 14. TRANSPORT INFORMATION

International transport regulations

REGULATION

| ID NUMBER | PROPER SHIPPING NAME | *HAZARD CLASS | SUBSIDIARY HAZARDS | PACKING GROUP | MARINE POLLUTANT / LTD. QTY. |
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|
| | | | | | |

MEXICAN REGULATION FOR THE LAND TRANSPORT OF HAZARDOUS MATERIALS AND WASTES

| | | | | | |
|----|------|---------------------------|---|--|--|
| UN | 1950 | ORM-D, CONSUMER COMMODITY | 2 | | |
| | | | | | |

INTERNATIONAL AIR TRANSPORT ASSOCIATION - PASSENGER

| | | | | | |
|----|------|---------------------------|-----|--|--|
| UN | 1950 | ORM-D, CONSUMER COMMODITY | 2.1 | | |
| | | | | | |

INTERNATIONAL AIR TRANSPORT ASSOCIATION - CARGO

| | | | | | |
|----|------|---------------------------|-----|--|--|
| UN | 1950 | ORM-D, CONSUMER COMMODITY | 2.1 | | |
| | | | | | |

INTERNATIONAL MARITIME DANGEROUS GOODS

| | | | | | |
|----|------|----------|-----|--|--|
| UN | 1950 | AEROSOLS | 2.1 | | |
| | | | | | |

TRANSPORT CANADA - INLAND WATERWAYS

| | | | | | |
|----|------|----------|-----|--|--|
| UN | 1950 | AEROSOLS | 2.1 | | |
| | | | | | |

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 19 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

TRANSPORT CANADA - RAIL

| | | | |
|----|------|----------|-----|
| UN | 1950 | AEROSOLS | 2.1 |
|----|------|----------|-----|

TRANSPORT CANADA - ROAD

| | | | | |
|----|------|----------|-----|--|
| UN | 1950 | AEROSOLS | 2.1 | MARINE POLLUTANT:(ALIPHATIC PETROLEUM NAPHTHA) |
|----|------|----------|-----|--|

U.S. DOT - INLAND WATERWAYS

| | | |
|--|---|-----|
| | Aerosols, flammable (engine starting fluid) | ORM |
|--|---|-----|

U.S. DOT - RAIL

| | | |
|--|---|-----|
| | Aerosols, flammable (engine starting fluid) | ORM |
|--|---|-----|

U.S. DOT - ROAD

| | | |
|--|----------|-----|
| | AEROSOLS | ORM |
|--|----------|-----|

*ORM = ORM-D, CBL = COMBUSTIBLE LIQUID

| | |
|------------------|-----|
| Marine pollutant | yes |
|------------------|-----|

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

| Components | CAS-No. | Component RQ (lbs) | Calculated product RQ (lbs) |
|-------------|---------|--------------------|-----------------------------|
| ETHYL ETHER | 60-29-7 | 100 | 340.921101 |

SARA 311/312 Hazards : Fire Hazard
Chronic Health Hazard
Acute Health Hazard

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 20 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

SARA 313 Component(s) : This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Pennsylvania Right To Know

| | | |
|---|------------|-----------------|
| SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC | 64742-89-8 | 50.00 - 70.00 % |
| ETHYL ETHER | 60-29-7 | 20.00 - 30.00 % |
| n-HEPTANE | 142-82-5 | 1.00 - 5.00 % |
| CARBON DIOXIDE | 124-38-9 | 1.00 - 5.00 % |
| ETHANOL | 64-17-5 | 1.00 - 5.00 % |

New Jersey Right To Know

| | | |
|---|------------|-----------------|
| SOLVENT NAPHTHA (PETROLEUM), LIGHT ALIPHATIC | 64742-89-8 | 50.00 - 70.00 % |
| ETHYL ETHER | 60-29-7 | 20.00 - 30.00 % |
| n-HEPTANE | 142-82-5 | 1.00 - 5.00 % |
| CARBON DIOXIDE | 124-38-9 | 1.00 - 5.00 % |
| ETHANOL | 64-17-5 | 1.00 - 5.00 % |
| DISTILLATES (PETROLEUM), HYDROTREATED LIGHT NAPHTHENIC | 64742-53-6 | 0.10 - 1.00 % |
| TOLUENE | 108-88-3 | 0.10 - 1.00 % |

California Prop 65 Proposition 65 warnings are not required for this product based on the results of a risk assessment.

The components of this product are reported in the following inventories:

- TSCA : On TSCA Inventory
- DSL : All components of this product are on the Canadian DSL.
- AUSTR : On the inventory, or in compliance with the inventory
- NZIOC : On the inventory, or in compliance with the inventory
- ENCS : Not in compliance with the inventory
- KECL : On the inventory, or in compliance with the inventory
- PICCS : On the inventory, or in compliance with the inventory
- IECSC : On the inventory, or in compliance with the inventory

Inventories

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 21 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

AICS (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIoC (New Zealand), PICCS (Philippines), TSCA (USA)

SECTION 16. OTHER INFORMATION

Further information

Revision Date: 05/23/2015

| | | | | | | | |
|---|--|---------------|----------|---------------------|----------|------------------------|----------|
| NFPA: | HMIS III: | | | | | | |
| <p>Flammability</p> <p>Health</p> <p>Instability</p> <p>Special hazard.</p> | <table border="1"> <tr> <td>HEALTH</td> <td>2</td> </tr> <tr> <td>FLAMMABILITY</td> <td>4</td> </tr> <tr> <td>PHYSICAL HAZARD</td> <td>0</td> </tr> </table> <p>0 = not significant, 1 = Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 2 | FLAMMABILITY | 4 | PHYSICAL HAZARD | 0 |
| HEALTH | 2 | | | | | | |
| FLAMMABILITY | 4 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Not applicable

Full text of H-Statements referred to under sections 2 and 3.

| | |
|------|---|
| H220 | Extremely flammable gas. |
| H224 | Extremely flammable liquid and vapor. |
| H225 | Highly flammable liquid and vapor. |
| H280 | Contains gas under pressure; may explode if heated. |
| H302 | Harmful if swallowed. |
| H304 | May be fatal if swallowed and enters airways. |
| H315 | Causes skin irritation. |
| H319 | Causes serious eye irritation. |
| H336 | May cause drowsiness or dizziness. |
| H351 | Suspected of causing cancer. |
| H361 | Suspected of damaging fertility or the unborn child. |
| H373 | May cause damage to organs through prolonged or repeated exposure if inhaled. |
| H401 | Toxic to aquatic life. |
| H411 | Toxic to aquatic life with long lasting effects. |

Sources of key data used to compile the Safety Data Sheet

Ashland internal data including own and sponsored test reports

The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

| | | |
|------------------------------|--|---------------------------|
| ASHLAND® | | Page: 22 |
| SAFETY DATA SHEET | | Revision Date: 05/23/2015 |
| | | Print Date: 6/1/2015 |
| | | SDS Number: R0340955 |
| MAC'S PREMIUM STARTING FLUID | | Version: 1.0 |
| NM7216 | | |

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Ashland's Environmental Health and Safety Department (1-800-325-3751).

List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists
 BEI : Biological Exposure Index
 CAS : Chemical Abstracts Service (Division of the American Chemical Society).
 CMR : Carcinogenic, Mutagenic or Toxic for Reproduction
 FG : Food grade
 GHS : Globally Harmonized System of Classification and Labeling of Chemicals.
 H-statement : Hazard Statement
 IATA : International Air Transport Association.
 IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization
 ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"
 IMDG : International Maritime Code for Dangerous Goods
 ISO : International Organization for Standardization
 logPow : octanol-water partition coefficient
 LCxx : Lethal Concentration, for xx percent of test population
 LDxx : Lethal Dose, for xx percent of test population.
 ICxx : Inhibitory Concentration for xx of a substance
 Ecxx : Effective Concentration of xx
 N.O.S.: Not Otherwise Specified
 OECD : Organization for Economic Co-operation and Development
 OEL : Occupational Exposure Limit
 P-Statement : Precautionary Statement
 PBT : Persistent , Bioaccumulative and Toxic
 PPE : Personal Protective Equipment
 STEL : Short-term exposure limit
 STOT : Specific Target Organ Toxicity
 TLV : Threshold Limit Value
 TWA : Time-weighted average
 vPvB : Very Persistent and Very Bioaccumulative
 WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act
 DOT : Department of Transportation
 FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act
 HMIRC : Hazardous Materials Information Review Commission
 HMIS : Hazardous Materials Identification System
 NFPA : National Fire Protection Association
 NIOSH : National Institute for Occupational Safety and Health
 OSHA : Occupational Safety and Health Administration
 PMRA : Health Canada Pest Management Regulatory Agency
 RTK : Right to Know
 WHMIS : Workplace Hazardous Materials Information System



Safety Data Sheet

1. PRODUCT IDENTIFICATION

| | |
|--------------|--|
| Name | Isopropyl Alcohol |
| Synonyms | 2-propanol, isopropanol, 2-hydroxypropane, sec-propyl alcohol, IPA |
| CAS# | 67-63-0 |
| Europe EC# | 200-661-7 |
| Product Uses | solvent, disinfectant, organic synthesis, pharmaceuticals |

EMERGENCY INFORMATION

| | | |
|--------|------------------------|----------------|
| Canada | Call CANUTEC (collect) | (613) 996-6666 |
| U.S.A. | Call CHEMTREC | (800) 424-9300 |


2. HAZARDS

| | | | |
|----------------------|---|--|--|
| GHS Class (Category) | <i>flammable</i> (2) | <i>eye irritant</i> (2A) | <i>STOT</i> (3) |
| Signal Words | DANGER | WARNING | WARNING |
| Hazard Statements | <i>highly flammable liquid & vapour</i> (H225) | <i>causes serious eye irritation</i> (H319) | <i>may cause drowsiness of dizziness</i> (H336) |



Canada – WHMIS
Key:

B 2, D 2B
B 2 – Flash Point <38°C, **B 3** – Flash Point >38°C & <93°C
D 1 – Immediately Toxic, **D 2** – Chronic Toxicity
C – Oxidising Substance, **E** – Corrosive, **F** – Reactive Substance



3. COMPOSITION

| | % | TWAEV / TLV ppm / mg/m ³ | LD ₅₀ (mg/kg) ORAL | LD ₅₀ (mg/kg) SKIN | LC ₅₀ ppm INHALATION |
|------------|------|--|----------------------------------|----------------------------------|------------------------------------|
| 2-propanol | 100% | 200 / 490 | >4400 | 12,900 | >5920 |

4. FIRST AID

| | |
|-------------|---|
| SKIN: | Wash with plenty of water. Remove contaminated clothing and do not reuse until thoroughly laundered. |
| EYES: | Wash eyes with plenty of water, holding eyelids open. Seek medical assistance promptly if there is irritation. |
| INHALATION: | Remove from contaminated area promptly. CAUTION: Rescuer must not endanger himself! If breathing stops, administer artificial respiration and seek medical aid promptly. |
| INGESTION: | Give plenty of water to dilute product. Do not induce vomiting (NOTE below). Keep victim quiet. If vomiting occurs, lower victim's head below hips to prevent inhalation of vomited material. Seek medical help promptly. |

Inadvertent inhalation of vomited material may seriously damage the lungs. The danger of this is greater than the risk of poisoning through absorption of this relatively low-toxicity substance. The stomach should only be emptied under medical supervision, and after the installation of an airway to protect the lungs.

Please ensure that this MSDS is given to, and explained to people using this product.

5. FIRE FIGHTING & FLAMMABILITY

| | |
|--------------------------|--|
| Flash Point | 12°C / 53°F (closed cup) |
| Autoignition Temperature | 399°C / 750°F |
| Flammable Limits | 2.0% – 12% |
| Combustion Products | carbon monoxide, nitrogen oxides, smoke, part oxidised hydrocarbon fragments |
| Firefighting Precautions | foam, dry chemical, water fog or spray to cool & dilute; firefighters must wear SCBA |
| Static Discharge | cannot accumulate a static charge |

6. ACCIDENTAL RELEASE MEASURES

Serious Fire Potential: blanket spill with foam as a precaution against accidental ignition. Take extreme care to avoid sparks – do not operate (turn on OR off) electrical appliances near spill, unless explosion proof.

| | |
|-----------------|---|
| Leak Precaution | dyke to control spillage and prevent environmental contamination |
| Handling Spill | ventilate contaminated area; recover free liquid with suitable pumps; absorb residue on an inert sorbent, sweep & pick up using plastic or aluminium shovel, & store in closed containers for recycling or disposal |

7. HANDLING & STORAGE

Store and use in a cool dry environment, away from sources of ignition, heat and oxidising agents. **Take great care to avoid sparks – use non-sparking bronze or aluminum hand tools. All electrical and mechanical equipment (lighting, switchgear, forklift trucks, etc) used with or around this product must be explosion-proof.**

Although this product does not accumulate a static charge on agitation or transfer, in view of the low flash point it is prudent to ground containers, mixers, and transfer equipment before handling to prevent static discharge. On transfer, ensure that the delivery nozzle is below the surface in the receiving container to prevent splash.

Empty containers may contain a flammable/explosive vapour. Never cut, drill, weld or grind on or near this container, whether empty or full. Always replace drum, pail or IBC cap prior to moving the container!

Avoid breathing product vapour. Use with adequate ventilation to maintain airborne concentration of the product below the TLV (see IX above). If dealing with a spill, and ventilation is impractical, wear a respirator with organic vapour cartridge. *If the spill is extensive, use an air-supplied respirator.* Avoid prolonged contact with skin and wash work clothes frequently. An eye bath and safety shower should be available near the workplace.

8. EXPOSURE CONTROL & PERSONAL PROTECTION

| | | | |
|---------------|---|--------------|--------------------------------|
| Ontario TWAEV | 200ppm / 490mg/m ³ ; | Ontario STEV | 400ppm / 980mg/m ³ |
| ACGIH TLV | 200ppm / 491mg/m ³ | ACGIH STEL | 400ppm / 983mg/m ³ |
| OSHA PEL | 400ppm / 980mg/m ³ | OSHA STEL | 500ppm / 1225mg/m ³ |
| Ventilation | mechanical ventilation may be required to maintain airborne vapour or mist concentrations below TLV; a respirator with organic vapour cartridge should be available for escape purposes, should ventilation fail (<i>always store respirator in an airtight container [eg: "Tupperware"] to maintain cartridge "freshness"</i>) | | |
| Hands | butyl, neoprene or nitrile gloves – <i>always confirm suitability with supplier</i> | | |
| Eyes | safety glasses with side shields – <i>always protect eyes</i> | | |
| Clothing | no special protective clothing required | | |

9. PHYSICAL PROPERTIES

| | |
|---|---|
| Odour & Appearance | clear, colourless, mobile liquid with strong odour of rubbing alcohol |
| Odour Threshold | ~40ppm – <i>varies widely</i> |
| Vapour Pressure | 33mmHg / 4.4kPa (20°C/ 68°F) |
| Vapour Density (air = 1) | 2.1 |
| Evaporation Rate (<i>Butyl Acetate=1</i>) | 1.5 |
| Boiling Point | 82°C / 180°F |
| Freezing Point | -88.5°C / -127°F |

Please ensure that this MSDS is given to, and explained to people using this product.

9. PHYSICAL PROPERTIES, cont'd

| | |
|---|--|
| Specific Gravity | 0.786 (20/20°C) |
| Water Solubility | complete |
| - in other solvents | most organic solvents |
| Log P _{O/W} (Octanol/H ₂ O partition) | 0.05 (<i>measured</i>) |
| Viscosity | 2.4centipoise (20°C / 68°F) |
| pH | none – <i>does not yield hydrogen ions in solution</i> |
| Molecular Weight | 60 grams/mole |
| Conversion Factor | 1ppm = 4.9mg/m ³ |

10. REACTIVITY

| | |
|---------------------------|--|
| Dangerously Reactive With | strong oxidising agents; strong acids; acid anhydrides; alkali metals or alkaline earth metals |
| Also Reactive With | ethylene oxide, phosgene, crotonaldehyde or isocyanates |
| Chemical Stability | stable; will not polymerize |
| Decomposes in Presence of | together oxygen (air) & light slowly convert isopropanol into potentially explosive peroxides |
| Decomposition Products | none apart from Hazardous Combustion Products |
| Mechanical Impact | not sensitive |

11. TOXICITY**Effects, Acute Exposure**

| | |
|-----------------|---|
| Skin Contact | slightly irritating |
| Skin Absorption | slight; toxic effects unlikely by this route |
| Eye Contact | liquid irritating; vapour irritating above 400ppm; 800ppm considered highly unpleasant |
| Inhalation | 400ppm mildly irritating; 800ppm very unpleasant; headache, dizziness, drowsiness, intoxication and lack of co-ordination |
| Ingestion | headache, dizziness, drowsiness, intoxication and lack of co-ordination |

Effects, Chronic Exposure

| | |
|-------------------------------|--|
| General | prolonged or repeated exposure may cause dermatitis through removal of protective skin oils |
| Sensitising | not a sensitiser |
| Carcinogen/Tumorigen | not known to be a tumorigen or a carcinogen in humans or animals |
| Reproductive Effect | no known effect on humans; fetotoxic in animals <i>at doses also causing maternal toxicity and not relevant to industrial exposure</i> |
| Mutagen | not known to be a mutagen or teratogen in humans or animals |
| Synergistic With | not known |
| LD ₅₀ (oral) | 4400-5500mg/kg (rat), 4475mg/kg (mouse), 4710mg/kg (cat), 5030 & 7990mg/kg (rabbit), 4830mg/kg (dog) |
| LD ₅₀ (skin) | 12,900mg/kg (rabbit) |
| LC ₅₀ (inhalation) | 10,800ppm (mouse), 5920, 10,420, 14,800, 16,000 & 17,000ppm (rat) |

12. ECOLOGICAL INFORMATION

| | |
|-----------------------------------|--|
| Bioaccumulation | low potential for bioaccumulation |
| Biodegradation | biodegrades readily & rapidly: aerobic – >75% in 28days; anaerobic – >65% in 20days |
| Abiotic Degradation | reacts with atmospheric hydroxyl (OH) radicals; estimated ½-life in air 3.2 days |
| Mobility in soil, water | water soluble; moves readily through soil and the water column |
| Marine Toxicity | |
| LC ₅₀ (Fish, 96) | 9640, 10,400 & 11,130mg/litre (Pimephelas promelas), 4200mg/litre (Rasbora heteromorpha) |
| LC ₅₀ (Crustacea, 48) | 1100 & 1400mg/l (Crangon crangon), 13,300mg/litre (Daphnia magna) |
| EC ₅₀ (Algae, 96hr) | 1000mg/l (Scenedesmus subspicatus) |
| LC ₅₀ (Microorganisms) | 1050 & 5175mg/l (Pseudomonas putida), 41,676mg/litre (“activated sludge, domestic sewage”) 39,540 & 112,000mg/litre (“activated sludge, industrial sewage”), 35,000 & 42,000mg/litre (Photobacterium phosphoreum) & others |

Please ensure that this MSDS is given to, and explained to people using this product.

13. DISPOSAL

Waste Disposal Containers **do not flush to sewer**, recycle solvent if possible, may be incinerated in approved facility
Drums should be reused. Recondition and pressure test by a licensed reconditioner prior to re-use.
Pails must be vented and thoroughly dried prior to crushing and recycling.
IBCs (intermediate bulk containers): polyethylene bottle must be pressure tested & recertified at 30 months. Replace at 60 months (5yrs). Steel containers must be inspected, pressure tested & recertified every 5 years.
Never cut, drill, weld or grind on or near this container, even if empty

14. TRANSPORT CLASSIFICATION

| | | |
|-------------------------|----------------------------------|---|
| Canada TDG | PIN | UN - 1219 |
| AND | Shipping Name | isopropyl alcohol OR isopropanol |
| U.S.A. 49 CFR | Class & Packing Group | 3 II |
| Marine Pollutant | | not a marine pollutant |
| ERAP Required | | NO |

15. REGULATIONS

//////
Canada DSL **on inventory**
U.S.A. TSCA **on inventory**
Europe EINECS **on inventory**

U.S.A. Regulations:

Immediately Dangerous to Life or Health: 2000 ppm (Based on 10% of the lower explosive limit for safety considerations even though the relevant toxicological data indicated that irreversible health effects or impairment of escape existed only at higher concentrations.)

Allowable Tolerances: Unless specifically excluded, residues resulting from the use of the following substances as either an inert or an active ingredient in a pesticide chemical formulation, including antimicrobial pesticide chemicals, are exempted from the requirement of a tolerance under FFDCFA section 408, if such use is in accordance with good agricultural or manufacturing practices. 2-Propanol is included on this list.

OSHA Standards: Permissible Exposure Limit: Table Z-1 8-hr Time Weighted Avg: 400ppm (980mg/m³). Vacated 1989 OSHA PEL TWA 400ppm (980mg/m³); STEL 500ppm (1225mg/m³) is still enforced in some states.

NIOSH Recommendations: Recommended Exposure Limit: 10 Hour Time-Weighted Average: 400ppm (980mg/m³). Recommended Exposure Limit: 15 Minute Short-Term Exposure Limit: 500ppm (1225mg/m³).

Threshold Limit Values: 8 hr Time Weighted Avg (TWA): 200 ppm; 15 min Short Term Exposure Limit (STEL): 400 ppm A4; Not classifiable as a human carcinogen. Biological Exposure Index (BEI): Determinant: acetone in urine; Sampling Time: end of shift at end of workweek; BEI: 40 mg/L. The determinant may be present in biological specimens collected from subjects who have not been occupationally exposed, at a concentration which could affect interpretation of the result. Such background concentrations are incorporated in the BEI value. The determinant is nonspecific, since it is also observed after exposure to other chemicals.

Atmospheric Standards: This action promulgates standards of performance for equipment leaks of Volatile Organic Compounds (VOC) in the Synthetic Organic Chemical Manufacturing Industry (SOCMI). The intended effect of these standards is to require all newly constructed, modified, and reconstructed SOCMCI process units to use the best demonstrated system of continuous emission reduction for equipment leaks of VOC, considering costs, non air quality health and environmental impact and energy requirements. Isopropanol is produced, as an intermediate or a final product, by process units covered under this subpart.

State Drinking Water Guidelines: Connecticut 2300 ug/l

TSCA Requirements: Pursuant to section 8(d) of TSCA, EPA promulgated a model Health and Safety Data Reporting Rule. The section 8(d) model rule requires manufacturers, importers, and processors of listed chemical substances and mixtures to submit to EPA copies and lists of unpublished health and safety studies. 2-Propanol is included on this list. Effective date: 12/15/86; Sunset date: 12/15/96.

FIFRA Requirements: Unless specifically excluded, residues resulting from the use of the following substances as either an inert or an active ingredient in a pesticide chemical formulation, including antimicrobial pesticide chemicals, are exempted from the requirement of a tolerance under FFDCFA section 408, if such use is in accordance with good agricultural or manufacturing practices. 2-Propanol is included on this list. Based on the reviews of the generic data for the active ingredients ethanol and isopropanol, the Agency has sufficient information on the health effects and on their potential for causing adverse effects in fish and wildlife and the environment. The Agency has determined that ethanol and isopropanol products, labeled and used as specified in this Reregistration Eligibility Decision, will not pose unreasonable risks or adverse effects to humans or the environment. Therefore, the Agency concludes that products containing ethanol and isopropanol for all uses are eligible for reregistration. As the federal pesticide law FIFRA directs, EPA is conducting a comprehensive review of older pesticides to consider their health and environmental effects and make decisions about their continued use. Under this pesticide reregistration program, EPA examines newer health and safety data for pesticide active ingredients initially registered before November 1, 1984, and determines whether the use of the pesticide does not pose unreasonable risk in accordance to newer safety standards, such as those described in the Food Quality Protection Act of 1996. Pesticides for which EPA had not issued Registration Standards prior to the effective date of FIFRA '88 were divided into three lists based upon their potential for human exposure and other factors, with List B containing pesticides of greater concern than those on List C, and with List C containing pesticides of greater concern than those on List D. Isopropanol is found on List D. Case No: 4003; Pesticide type: insecticide, fungicide, herbicide, antimicrobial; Case Status: RED Approved 3/95; OPP has made a decision that some uses of the pesticide are eligible for reregistration, as reflected in a Reregistration Eligibility Decision (RED) document.; Active ingredient (AI): isopropanol; AI Status: OPP has completed a Reregistration Eligibility Decision (RED) for the case/AI.

FDA Requirements: Isopropyl alcohol (without residue) may be used in inks for marking food supplements in tablet form, gum, and confectionery. Diluents in color additive mixtures for drug use exempt from certification. Ingested drugs (general use) - Substance: isopropyl alcohol; Restrictions: In color coatings for pharmaceutical forms, no residue. Isopropanol is a food additive permitted for direct addition to food for human consumption as a synthetic flavoring substance and adjuvant in accordance with the following conditions: a) they are used in the minimum quantity required to produce their intended effect, and otherwise in accordance with all the principles of good manufacturing practice, and b) they consist of one or more of the following, used alone or in combination with flavoring substances and adjuvants generally recognized as safe in food, prior-sanctioned for such use, or regulated by an appropriate section in this part. Isopropyl alcohol may be present in the following foods under the conditions specified: (a) In spice oleoresins as a residue from the extraction of spice, at a level not to exceed 50 parts per million. (b) In lemon oil as a residue in production of the oil, at a level not to exceed 6 parts per million. (c) In hops extract as a residue from the extraction of hops at a level not to exceed 2.0 percent by weight; Provided, that, (1) The hops extract is added to the wort before or during cooking in the manufacture of beer. (2) The label of the hops extract specifies the presence of the isopropyl alcohol & provides for the use of the hops extract only as prescribed by paragraph (c)(1) of this section. Isopropanol is an indirect food additive for use only as a component of adhesives.

16. OTHER INFORMATION

Prepared for Megaloid Laboratories by Peter Bursztyn, (705) 734-1577
 Data from RTECS, HSDB (Haz. Substance Data Base), Cheminfo (CCOHS), IUCLID Datasheets (ESIS – European Chem. Substance Info. System), & others.
 Preparation Date: **July 2006** Revision Date: **July 2009, June 2012, November 2013**

Please ensure that this MSDS is given to, and explained to people using this product.

Safety Data Sheet



1. Identification

| | | | |
|-----------------------------|--|-------------------------|--|
| Product Name: | PRO +LSPR 6PK SAFETY RED | Revision Date: | 1/3/2019 |
| Product Identifier: | 7564838 | Supercedes Date: | 5/22/2017 |
| Recommended Use: | Topcoat/Aerosols | | |
| Supplier: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA | Manufacturer: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA |
| Preparer: | Regulatory Department | | |
| Emergency Telephone: | 24 Hour Hotline: 847-367-7700 | | |

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

31% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|--|
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Eye Irritation, category 2 | H319 | Causes serious eye irritation. |
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| STOT, repeated exposure, category 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |
| Skin Sensitizer, category 1 | H317 | May cause an allergic skin reaction. |

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|-----------|--|
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P260 | Do not breathe dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P272 | Contaminated work clothing should not be allowed out of the workplace. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P302+P352 | IF ON SKIN: Wash with plenty of soap and water. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |

| | |
|----------------|--|
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P321 | For specific treatment see label |
| P333+P313 | If skin irritation or rash occurs: Get medical advice/attention. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

GHS SDS PRECAUTIONARY STATEMENTS

P363 Wash contaminated clothing before reuse.

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|------------------------------|----------------|-------------------|--------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| n-Butyl Acetate | 123-86-4 | 10-25 | GHS02-GHS07 | H226-336 |
| n-Butane | 106-97-8 | 2.5-10 | GHS04 | H280 |
| Barium Sulfate | 7727-43-7 | 2.5-10 | GHS07 | H332 |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 2.5-10 | GHS02-GHS07 | H226-315-319-332 |
| Ethylbenzene | 100-41-4 | 1.0-2.5 | GHS02-GHS07-GHS08 | H225-304-332-373 |
| Ethyl 3-Ethoxypropionate | 763-69-9 | 0.1-1.0 | GHS06 | H331 |
| Methyl ethyl ketoxime | 96-29-7 | 0.1-1.0 | GHS05-GHS06 | H302-312-317-318-331 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|------------------------------|-----------|-----------------------|---------------------|--------------------|----------------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 20.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 20.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Barium Sulfate | 7727-43-7 | 10.0 | 5 mg/m ³ | N.E. | 15 mg/m ³ | N.E. |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 5.0 | 100 ppm | 150 ppm | 100 ppm | N.E. |
| Ethylbenzene | 100-41-4 | 5.0 | 20 ppm | N.E. | 100 ppm | N.E. |
| Ethyl 3-Ethoxypropionate | 763-69-9 | 1.0 | N.E. | N.E. | N.E. | N.E. |
| Methyl ethyl ketoxime | 96-29-7 | 1.0 | 10 ppm | N.E. | N.E. | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Relative Density: | 0.793 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 1.0 - 13.0 |
| Boiling Range, °C: | -37 - 260 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: May cause skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B).

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|------------------------------|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 7727-43-7 | Barium Sulfate | 307000 mg/kg Rat | N.E. | N.E. |
| 1330-20-7 | Xylenes (o-, m-, p- isomers) | 3500 mg/kg Rat | >4350 mg/kg Rabbit | 29.08 mg/L Rat |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |
| 763-69-9 | Ethyl 3-Ethoxypropionate | 5000 mg/kg Rat | >9500 mg/kg Rabbit | >5.96 mg/L Rat |
| 96-29-7 | Methyl ethyl ketoxime | 930 mg/kg Rat | 1100 mg/kg Rabbit | >4.83 mg/L Rat |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|---|-----------------------------|---------------------|---------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint and Related Spray Products in Ltd Qty | Aerosols | Aerosols, flammable | Aerosols |
| Hazard Class: | N.A. | 2 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Respiratory or Skin Sensitization, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure)

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------------|----------------|
| Xylenes (o-, m-, p- isomers) | 1330-20-7 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65:

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

16. Other Information**HMIS RATINGS**

Health: 2 Flammability: 4 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: N.E. Flammability: 4 Instability: 0

Volatile Organic Compounds 531 g/L

SDS REVISION DATE: 1/3/2019

REASON FOR REVISION: Revision Description Changed
Product Composition Changed
Substance and/or Product Properties Changed in Section(s):
02 - Hazard Identification
09 - Physical & Chemical Properties
14 - Transport Information
15 - Regulatory Information
16 - Other Information
Revision Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.



SAFETY DATA SHEET

1. Identification

Product identifier Oatey No. 95 Tinning Flux

Other means of identification

SDS number 1611E

Synonyms Part Numbers: 30372, 30373, 30374, 30375, 53201, 48356, 48430, 48432, 48433

Recommended use Joining Copper Pipes. Joining Copper Tubing.

Recommended restrictions None known.

Company Name Oatey Co.

Address 4700 West 160th St.
Cleveland, OH 44135

Distributor Oatey Canada Supply Chain Services Co.
145 Walker Drive
Brampton, ON L6T 5P5, Canada

Telephone 216-267-7100

E-mail info@oatey.com

Transport Emergency Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887)

Emergency First Aid 1-877-740-5015

Contact person MSDS Coordinator

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Skin corrosion/irritation Category 1B
Serious eye damage/eye irritation Category 1

Environmental hazards Not classified.

Label elements



Signal word Danger

Hazard statement Causes severe skin burns and eye damage.

Precautionary statement

Prevention Do not breathe dusts or mists. Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

Response IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor.

Storage Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Other hazards None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------|------------|-------|
| Petrolatum | 8009-03-8 | 60-70 |

| | | |
|-------------------|------------|-------|
| Zinc chloride | 7646-85-7 | 10-30 |
| Tin | 7440-31-5 | 4-8 |
| Ammonium chloride | 12125-02-9 | 1-5 |
| Bismuth | 7440-69-9 | 0-1 |
| Copper | 7440-50-8 | 0-1 |

All concentrations are in percent by weight (kg) unless ingredient is a gas. Gas concentrations are in percent by volume (l).

4. First-aid measures

| | |
|---|--|
| Inhalation | If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Get medical attention immediately. |
| Skin contact | Take off immediately all contaminated clothing. Rinse skin with water/shower. Call a physician or poison control center immediately. Chemical burns must be treated by a physician. Wash contaminated clothing before reuse. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Continue rinsing. Call a physician or poison control center immediately. Remove contact lenses, if present and easy to do. |
| Ingestion | Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. |
| Most important symptoms/effects, acute and delayed | Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Water spray. Water fog. Foam. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Use water spray to cool unopened containers. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. Do not breathe vapor. |
| Methods and materials for containment and cleaning up | Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Avoid dispersal of dust in the air (i.e., clearing dust surfaces with compressed air). |
| Environmental precautions | Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Store locked up. Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

Occupational exposure limits

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|---------------------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | TWA | 5 mg/m ³ | Inhalable fraction. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |
| | TWA | 1 mg/m ³ | Fume. |

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|-------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | STEL | 10 mg/m ³ | Mist. |
| | TWA | 5 mg/m ³ | Mist. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |
| | TWA | 1 mg/m ³ | Fume. |

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|-------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |
| | TWA | 1 mg/m ³ | Fume. |

Canada. Manitoba OELs (Reg. 217/2006, The Workplace Safety And Health Act)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|---------------------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | TWA | 5 mg/m ³ | Inhalable fraction. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |
| | TWA | 1 mg/m ³ | Fume. |

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|-------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | STEL | 10 mg/m ³ | Mist. |
| | TWA | 5 mg/m ³ | Mist. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | STEL | 2 mg/m ³ | Fume. |

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

| Components | Type | Value | Form |
|------------|------|---------------------|-------|
| | TWA | 1 mg/m ³ | Fume. |

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|-------|
| Ammonium chloride (CAS 12125-02-9) | STEL | 20 mg/m ³ | Fume. |
| | TWA | 10 mg/m ³ | Fume. |
| Petrolatum (CAS 8009-03-8) | STEL | 10 mg/m ³ | Mist. |
| | TWA | 5 mg/m ³ | Mist. |
| Tin (CAS 7440-31-5) | TWA | 2 mg/m ³ | |
| Zinc chloride (CAS 7646-85-7) | TWA | 1 mg/m ³ | Fume. |

| | |
|--|---|
| Biological limit values | No biological exposure limits noted for the ingredient(s). |
| Exposure guidelines | Occupational Exposure Limits are not relevant to the current physical form of the product. |
| Appropriate engineering controls | Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Ensure adequate ventilation, especially in confined areas. Eye wash facilities and emergency shower must be available when handling this product. |
| Individual protection measures, such as personal protective equipment | |
| Eye/face protection | Wear safety glasses with side shields (or goggles) and a face shield. |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | In case of insufficient ventilation, wear suitable respiratory equipment. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties**Appearance**

| | |
|---|---------------------|
| Physical state | Solid. |
| Form | Paste. |
| Color | Yellow. |
| Odor | Slight. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 638.6 °F (337 °C) |
| Flash point | 539.6 °F (282.0 °C) |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not available. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |

| | |
|---|----------------|
| Vapor pressure | Not available. |
| Vapor density | > 1 |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Oxidizing properties | Not oxidizing. |
| Specific gravity | 1.1 @20°C |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Chlorine. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | Prolonged inhalation may be harmful. May cause irritation to the respiratory system. |
| Skin contact | Causes severe skin burns. |
| Eye contact | Causes serious eye damage. |
| Ingestion | Causes digestive tract burns. |

Symptoms related to the physical, chemical and toxicological characteristics Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|------------------------------------|---------|--------------|
| Ammonium chloride (CAS 12125-02-9) | | |
| Acute | | |
| <i>Oral</i> | | |
| LD50 | Rat | 1650 mg/kg |
| Zinc chloride (CAS 7646-85-7) | | |
| Acute | | |
| <i>Oral</i> | | |
| LD50 | Mouse | 350 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes severe skin burns and eye damage.

Serious eye damage/eye irritation Causes serious eye damage.

Respiratory or skin sensitization

Canada - Alberta OELs: Irritant

Ammonium chloride (CAS 12125-02-9) Irritant

Zinc chloride (CAS 7646-85-7)

Irritant

Respiratory sensitization Not available.**Skin sensitization** This product is not expected to cause skin sensitization.**Germ cell mutagenicity** No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.**Carcinogenicity** None known.**ACGIH Carcinogens**

Petrolatum (CAS 8009-03-8)

A4 Not classifiable as a human carcinogen.

Canada - Manitoba OELs: carcinogenicityMINERAL OIL, EXCLUDING METAL WORKING FLUIDS, Not classifiable as a human carcinogen.
PURE, HIGHLY AND SEVERELY REFINED,
INHALABLE FRACTION (CAS 8009-03-8)**IARC Monographs. Overall Evaluation of Carcinogenicity**

Petrolatum (CAS 8009-03-8)

3 Not classifiable as to carcinogenicity to humans.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.**Specific target organ toxicity - single exposure** Not classified.**Specific target organ toxicity - repeated exposure** Not classified.**Aspiration hazard** Not an aspiration hazard.**Chronic effects** Prolonged inhalation may be harmful.**12. Ecological information****Ecotoxicity** The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|-------------------------------|---------|--|
| Zinc chloride (CAS 7646-85-7) | | |
| Aquatic | | |
| Crustacea | EC50 | American or virginia oyster (Crassostrea virginica) 0.1511 - 0.2782 mg/l, 48 hours |
| Fish | LC50 | Rainbow trout,donaldson trout (Oncorhynchus mykiss) 0.101 - 0.197 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.**Bioaccumulative potential** No data available.**Mobility in soil** No data available.**Other adverse effects** No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.**13. Disposal considerations****Disposal instructions** Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.**Local disposal regulations** Dispose in accordance with all applicable regulations.**Hazardous waste code** The waste code should be assigned in discussion between the user, the producer and the waste disposal company.**Waste from residues / unused products** Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).**Contaminated packaging** Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

TDG

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

15. Regulatory information

Canadian regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

Controlled Drugs and Substances Act

Not regulated.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Not regulated.

International regulations

Stockholm Convention

Not applicable.

Rotterdam Convention

Not applicable.

Kyoto protocol

Not applicable.

Montreal Protocol

Not applicable.

Basel Convention

Not applicable.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|-------------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other Information

Issue date 10-December-2015

Revision date -

Version #

01

References

ACGIH
ACGIH Documentation of the Threshold Limit Values and Biological Exposure Indices
EPA: AQUIRE database
GOST 30333-2007 - Chemical production safety passport. General requirements
HSDB® - Hazardous Substances Data Bank
IARC Monographs. Overall Evaluation of Carcinogenicity
National Toxicology Program (NTP) Report on Carcinogens
NLM: Hazardous Substances Data Base
US. IARC Monographs on Occupational Exposures to Chemical Agents
Korea. Accidental Release Prevention Substances (Presidential Decree of Toxic Chemical Control Law, Executive Order No. 19203)
Korea. Dangerous Substances Threshold Quantity (Presidential Decree of Dangerous Substances Safety Management Act No. 18406, Schedule 1)
Korea. Harmful Substances Prohibited from Manufacturing (Presidential Decree on the Industrial Safety and Health Act (No. 13053), Article 29)
Korea. Harmful Substances Requiring Permission for Manufacture or Use (Presidential Decree on the Industrial Safety and Health Act (No. 13053), Article 30)
Korea. Non-Toxic Chemicals List (National Institute of Environment Research (NIER) Public Notice No. 1997-10, as amended)
Korea. Observational Chemicals (Ministerial Decree of TCCL Article 6)
Korea. OELs. Regulation for Permitted Concentration of Hazardous Substances (Ministry of Labor (MOL) Public Notice No. 1986-45, as amended)
Korea. Prohibited Chemical Substances (TCCL Article 11)
Korea. Regulated volatile organic compounds (VOCs) (MOE Notice No. 2001-36, March 8, 2001, as amended)
Korea. Restricted Chemical Substances (TCCL Article 11)
Korea. Toxic Chemical Control Law (TCCL), Existing Chemicals Inventory (KECI)
Korea. Toxic Chemical Control Law (TCCL), pre-1997 List
Korea. Toxic Chemicals (TCCL Article 10)
Korea. Toxic Release Inventory (TRI) Chemicals (TCCL Article 14)
Taiwan. Dangerous Materials (Rules on Hazard Communication of Dangerous Materials and Toxic Materials)
Taiwan. Industrial Precursor Chemicals (Categories and Regulations Governing Inspection and Declaration of Industrial Precursor Chemicals, MOEA Decree No. 87, as amended)
Taiwan. OELs. (Standards on Workplace Atmosphere of Dangerous and Hazardous Materials)
Taiwan. Toxic Chemical Substances (TCS) (List of Toxic Chemical Substances announced by the Environmental Protection Administration)
Taiwan. Toxic Materials (Rules on Hazard Communication of Dangerous Materials and Toxic Materials)
Japan Society for Occupational Health, Recommendation of Occupational Exposure Limits
Japan Chemical Industry Association (JCIA) GHS Guideline, June 2012
JIS Z 7253:2012 Hazard communication of chemicals based on GHS – Labelling and Safety Data Sheet (SDS)
JIS Z 7252:2009 Classification of chemicals based on "Globally Harmonized System of Classification and Labelling of Chemicals (GHS)"

Disclaimer

Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.

SAFETY DATA SHEET

VINYL ESTER RESIN



Section 1. Identification

GHS product identifier : VINYL ESTER RESIN

Product code : CORVE8190

Other means of identification : Vinyl Ester Resin

Product type : Liquid.

Material uses

Product use : Industrial applications.

Supplier's details : INTERPLASTIC CORPORATION
1225 Willow Lake Boulevard
St. Paul, MN 55110-5145
651.481.6860

Emergency telephone number (with hours of operation) : CHEMTREC 24-Hour Emergency Telephone 800.424.9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE LIQUIDS - Category 3
ACUTE TOXICITY: INHALATION - Category 4
SKIN CORROSION/IRRITATION - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 2
Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 59%

GHS label elements

Hazard pictograms :



Signal word : Warning

Hazard statements : Flammable liquid and vapor.
Harmful if inhaled.
Causes serious eye irritation.
Causes skin irritation.
Suspected of causing cancer.

Precautionary statements

Section 2. Hazards identification

- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Wear protective gloves. Wear eye or face protection. Keep away from heat, sparks, open flames and hot surfaces. - No smoking. Use explosion-proof electrical, ventilating, lighting and all material-handling equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Keep container tightly closed. Use only outdoors or in a well-ventilated area. Avoid breathing vapor. Wash hands thoroughly after handling.
- Response** : IF exposed or concerned: Get medical attention. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
- Storage** : Store containers in a safe place. Store in a well-ventilated place. Keep cool.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Vinyl Ester Resin

CAS number/other identifiers

- CAS number** : Not applicable.
- Product code** : CORVE8190

| Ingredient name | % | CAS number |
|-----------------|-------------|------------|
| Styrene | 36.0 - 39.0 | 100-42-5 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation. Any concentration shown as exact is based on formula.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.

Section 4. First aid measures

- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Harmful if inhaled.
- Skin contact** : Causes skin irritation.
- Ingestion** : Irritating to mouth, throat and stomach.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media : Use dry chemical, CO₂, water spray (fog) or foam.

Unsuitable extinguishing media : Do not use water jet.

Specific hazards arising from the chemical : Flammable liquid and vapor. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. The vapor/gas is heavier than air and will spread along the ground. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Runoff to sewer may create fire or explosion hazard.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
halogenated compounds
metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Section 6. Accidental release measures

- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapor or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Take precautionary measures against electrostatic discharges. Empty containers retain product residue and can be hazardous. Do not reuse container.

- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Do not store above the following temperature: 38°C (100.4°F). Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|-----------------|---|
| Styrene | <p>ACGIH TLV (United States, 4/2014). TWA: 20 ppm 8 hours. TWA: 85 mg/m³ 8 hours. STEL: 40 ppm 15 minutes. STEL: 170 mg/m³ 15 minutes.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 50 ppm 8 hours. TWA: 215 mg/m³ 8 hours. STEL: 100 ppm 15 minutes. STEL: 425 mg/m³ 15 minutes.</p> |

Section 8. Exposure controls/personal protection

OSHA PEL Z2 (United States, 2/2013).

TWA: 100 ppm 8 hours.

CEIL: 200 ppm

AMP: 600 ppm 5 minutes.

NIOSH REL (United States, 10/2013).

TWA: 50 ppm 10 hours.

TWA: 215 mg/m³ 10 hours.

STEL: 100 ppm 15 minutes.

STEL: 425 mg/m³ 15 minutes.

- Appropriate engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

| | |
|---|---|
| Physical state | : Liquid. |
| Color | : Various |
| Odor | : Characteristic. |
| Odor threshold | : Not available. |
| pH | : Not applicable. |
| Melting point | : Not available. |
| Boiling point | : 145.2°C (293.4°F) |
| Flash point | : Closed cup: 31.1°C (88°F) |
| Burning time | : Not applicable. |
| Burning rate | : Not applicable. |
| Evaporation rate | : <1 (ether (anhydrous) = 1) |
| Flammability (solid, gas) | : Not available. |
| Lower and upper explosive (flammable) limits | : Lower: 1.1% Upper: 6.1% |
| Vapor pressure | : 0.57 kPa (4.3 mm Hg) [room temperature] |
| Vapor density | : 3.6 [Air = 1] |
| Relative density | : 1.01 to 1.3 |
| Solubility | : Not available. |
| Solubility in water | : Not available. |
| Partition coefficient: n-octanol/water | : Not available. |
| Auto-ignition temperature | : Not available. |
| Decomposition temperature | : Not available. |
| SADT | : Not available. |
| Viscosity | : Not available. |

Section 10. Stability and reactivity

| | |
|---|--|
| Reactivity | : No specific test data related to reactivity available for this product or its ingredients. |
| Chemical stability | : The product is stable. |
| Possibility of hazardous reactions | : Hazardous reactions or instability may occur under certain conditions of storage or use. |
| Conditions to avoid | : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Do not allow vapor to accumulate in low or confined areas. |
| Incompatible materials | : Reactive or incompatible with the following materials: oxidizing materials Reactive or incompatible with the following materials: acids and alkalis. |
| Hazardous decomposition products | : Under normal conditions of storage and use, hazardous decomposition products should not be produced. |

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|-------------------------|----------|
| Styrene | LC50 Inhalation Gas. | Rat | 2770 ppm | 4 hours |
| | LC50 Inhalation Vapor | Rat | 11800 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | 2650 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-------------------------|-------------|
| Styrene | Eyes - Mild irritant | Human | - | 50 parts per million | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 100 milligrams | - |
| | Eyes - Severe irritant | Rabbit | - | 100 milligrams | - |
| | Skin - Mild irritant | Rabbit | - | 500 milligrams | - |
| | Skin - Moderate irritant | Rabbit | - | 100 Percent | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Conclusion/Summary : Styrene manufacturers vary on their determination that the GHS hazard classification criteria for carcinogenicity has been met.

Styrene is listed by IARC as a possible carcinogen to humans (Group 2B) based on "limited evidence" in humans, "limited evidence" in animals and "other relevant data". The United States NTP listed styrene as reasonably anticipated to be a human carcinogen based on "limited evidence" from studies in humans, "sufficient evidence" from studies in experimental animals, and supporting data on mechanisms of carcinogenesis. The significance of these results for humans has not been established through risk assessment.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|--|
| Styrene | - | 2B | Reasonably anticipated to be a human carcinogen. |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Section 11. Toxicological information

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Causes serious eye irritation.
Inhalation : Harmful if inhaled.
Skin contact : Causes skin irritation.
Ingestion : Irritating to mouth, throat and stomach.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness

Inhalation : No specific data.

Skin contact : Adverse symptoms may include the following:
 irritation
 redness

Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.
Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Section 11. Toxicological information

| Route | ATE value |
|---------------------|--------------|
| Oral | 2740.3 mg/kg |
| Inhalation (gases) | 2945.3 ppm |
| Inhalation (vapors) | 12.55 mg/l |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|------------------------------------|---|----------|
| Styrene | Acute EC50 1400 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 720 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 4700 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 52000 µg/l Marine water | Crustaceans - Artemia salina - Nauplii | 48 hours |
| | Acute LC50 4020 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Chronic NOEC 63 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |

Persistence and degradability

Not available.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-------|-----------|
| Styrene | 0.35 | 13.49 | low |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.







Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact

Section 13. Disposal considerations

with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | Mexico Classification | IMDG | IATA |
|---------------------------------------|--|---|---|---|
| UN number | UN1866 | UN1866 | UN1866 | UN1866 |
| UN proper shipping name | RESIN SOLUTION | RESIN SOLUTION | RESIN SOLUTION | RESIN SOLUTION |
| Transport hazard class(es) | 3  | 3   | 3   | 3  |
| Packing group | III | III | III | III |
| Environmental hazards | Yes. | Yes. | Yes. | No. |
| Additional information | Reportable quantity 2592.2 lbs / 1176.9 kg [269. 17 gal / 1018.9 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements. | - | - | - |

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

**Transport in bulk according
to Annex II of MARPOL
73/78 and the IBC Code** : Not available.

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) PAIR: 4-tert-butylpyrocatechol; triethyl phosphate
 TSCA 8(a) CDR Exempt/Partial exemption: Not determined
 TSCA 8(c) calls for record of SAR: triethyl phosphate
 United States inventory (TSCA 8b): Not determined.
 Clean Water Act (CWA) 307: ethylbenzene
 Clean Water Act (CWA) 311: styrene; xylene; ethylbenzene

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

SARA 302/304

Composition/information on ingredients

| Name | % | EHS | SARA 302 TPQ | | SARA 304 RQ | |
|----------------------|------|------|--------------|-----------|-------------|-----------|
| | | | (lbs) | (gallons) | (lbs) | (gallons) |
| 1,4-dihydroxybenzene | 0.01 | Yes. | 500 / 10000 | - | 100 | - |

SARA 304 RQ : 1579392.1 lbs / 717044 kg [164002.6 gal / 620817.3 L]

SARA 311/312

Classification : Fire hazard
 Immediate (acute) health hazard
 Delayed (chronic) health hazard

SARA 313

| | Product name | CAS number | % |
|--|--------------|------------|-------|
| Form R - Reporting requirements | styrene | 100-42-5 | 38.58 |
| Supplier notification | styrene | 100-42-5 | 38.58 |

State regulations

Massachusetts : The following components are listed: STYRENE MONOMER

New York : The following components are listed: Styrene

New Jersey : The following components are listed: STYRENE MONOMER; BENZENE, ETHENYL-

Pennsylvania : The following components are listed: BENZENE, ETHENYL-

California Prop. 65

WARNING: This product contains less than 0.1% of a chemical known to the State of California to cause cancer.

WARNING: This product contains less than 1% of a chemical known to the State of California to cause birth defects or other reproductive harm.

Section 15. Regulatory information

| Ingredient name | Cancer | Reproductive | No significant risk level | Maximum acceptable dosage level |
|-----------------|--------|--------------|---|---|
| methanol | No. | Yes. | No. | 23000 µg/day (ingestion) 47000 µg/day (inhalation) |
| ethylbenzene | Yes. | No. | 41 µg/day (ingestion) 54 µg/day (inhalation) | No. |

International regulations

International lists

- Australia inventory (AICS):** Not determined.
- China inventory (IECSC):** All components are listed or exempted.
- Japan inventory:** Not determined.
- Korea inventory:** Not determined.
- Malaysia Inventory (EHS Register):** Not determined.
- New Zealand Inventory of Chemicals (NZIoC):** All components are listed or exempted.
- Philippines inventory (PICCS):** All components are listed or exempted.
- Taiwan inventory (CSNN):** All components are listed or exempted.

Canada inventory

: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 2 |
| Flammability | | 3 |
| Physical hazards | | 1 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Section 16. Other information

History

Date of printing : 5/30/2015.
Date of issue/Date of revision : 5/30/2015.
Date of previous issue : 12/22/2014.
Version : 3
Prepared by Health, Safety and Environmental Department
Email : For questions regarding the SDS contact: iasafety@ip-corporation.com

Key to abbreviations : ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 UN = United Nations

References : OSHA Hazard Communication Standard, March 2012 (29 CFR 1910.1200)

 Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

VELTEK ASSOCIATES, INC.

Date of issue: 11/24/2011

Revision date: 11/24/2018

Supersedes: 04/18/2017

Version: 4.1

SECTION 1: Identification

1.1. Identification

Product form : Mixture
 Product name : DECON-AHOL WFI Formula
 Product code : SDS VEL-104-NONAEROSOL

1.2. Recommended use and restrictions on use

Recommended use : Decontaminant, Disinfectant
 Restrictions on use : For professional use only

1.3. Supplier

Veltek Associates, Inc.
 15 Lee Blvd
 Malvern, PA 19355-1234 USA
 Telephone: +1 610-644-8335 - Fax: +1 610-644-8336
 E-mail: vai@sterile.com

In Canada distributed by:
 Canada Clean Room (CCR)
 200 Terence Matthews
 Kanata, ONT K2M 2C6, Canada
 Telephone: 888-595-8070

1.4. Emergency telephone number

Emergency number : CARECHEM 24: 1-215-207-0061
 1-866-928-0789 (toll free)
 Canada: 1-800-579-7421 (toll free)
 Mexico: +52-55-5004-8763

SECTION 2: Hazard(s) identification

2.1. Classification of the substance or mixture

GHS US classification

| | | |
|---|------|-----------------------------------|
| Flammable liquids Category 2 | H225 | Highly flammable liquid and vapor |
| Serious eye damage/eye irritation Category 2 | H319 | Causes serious eye irritation |
| Specific target organ toxicity (single exposure) Category 3 | H336 | May cause drowsiness or dizziness |

Full text of H statements : see section 16

2.2. GHS Label elements, including precautionary statements

GHS US labeling

Hazard pictograms (GHS US) :  

Signal word (GHS US) : Danger

Hazard statements (GHS US) : H225 - Highly flammable liquid and vapor
 H319 - Causes serious eye irritation
 H336 - May cause drowsiness or dizziness

Precautionary statements (GHS US) : P210 - Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
 P233 - Keep container tightly closed.
 P241 - Use explosion-proof electrical, lighting, ventilating equipment
 P242 - Use only non-sparking tools.
 P243 - Take precautionary measures against static discharge.

DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

P261 - Avoid breathing vapors.
P264 - Wash hands thoroughly after handling.
P271 - Use only outdoors or in a well-ventilated area.
P280 - Wear eye protection, protective gloves, protective clothing.
P303+P361+P353 - If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
P304+P340 - IF INHALED: Remove person to fresh air and keep comfortable for breathing.
P305+P351+P338 - If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
P312 - Call a doctor if you feel unwell.
P337+P313 - If eye irritation persists: Get medical advice/attention.
P370+P378 - In case of fire: Use Dry powder, carbon dioxide (CO₂), alcohol resistant foam to extinguish.
P403+P233 - Store in a well-ventilated place. Keep container tightly closed.
P235 - Keep cool.
P405 - Store locked up.
P501 - Dispose of contents/container to an authorized waste collection point

2.3. Other hazards which do not result in classification

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/Information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

| Name | Product identifier | % | GHS US classification |
|-------------|--------------------|---------|--|
| Propan-2-ol | (CAS-No.) 67-63-0 | 68 – 72 | Flam. Liq. 2, H225 Eye Irrit. 2A, H319 STOT SE 3, H336 |

Full text of hazard classes and H-statements : see section 16

SECTION 4: First-aid measures

4.1. Description of first aid measures

First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).

First-aid measures after inhalation : Remove person to fresh air and keep at rest in a position comfortable for breathing. If symptoms develop obtain medical attention.

First-aid measures after skin contact : Rinse skin with water/shower. Remove/Take off immediately all contaminated clothing. Gently wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention.

First-aid measures after eye contact : Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

First-aid measures after ingestion : Do NOT induce vomiting. Do not give an unconscious person anything to drink. Rinse mouth. Get immediate medical attention.

4.2. Most important symptoms and effects (acute and delayed)

Potential Adverse human health effects and symptoms : Causes serious eye irritation. Repeated or prolonged contact may cause skin irritation. May cause drowsiness or dizziness. Headache. Fatigue. Nausea. Vomiting. Ingestion may cause irritation of the gastrointestinal tract.

4.3. Immediate medical attention and special treatment, if necessary

Treat symptomatically.

SECTION 5: Fire-fighting measures

5.1. Suitable (and unsuitable) extinguishing media

Suitable extinguishing media : Dry powder. Carbon dioxide. Alcohol resistant foam.

Unsuitable extinguishing media : Do not use water jet.

5.2. Specific hazards arising from the chemical

Fire hazard : Highly flammable liquid and vapor.

Explosion hazard : May form flammable/combustible vapour-air mixture when heated. On heating, there is a risk of bursting due to internal pressure build-up. Cool down the containers exposed to heat with a water spray.

DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Reactivity : Stable under recommended handling and storage conditions (see section 7).

5.3. Special protective equipment and precautions for fire-fighters

Firefighting instructions : Exercise caution when fighting any chemical fire. Use water spray or fog for cooling exposed containers. Do not allow run-off from fire fighting to enter drains or water courses.

Protection during firefighting : Do not enter fire area without proper protective equipment, including respiratory protection. Use self-contained breathing apparatus when in close proximity to fire.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

6.1.1. For non-emergency personnel

Emergency procedures : Remove all sources of ignition. Ventilate area. Avoid inhalation of vapors. Avoid contact with skin, eyes and clothing. Evacuate unnecessary personnel.

6.1.2. For emergency responders

Protective equipment : Equip cleanup crew with proper protection.

Emergency procedures : Remove all sources of ignition. Use only non-sparking tools. Take precautionary measures against static discharge. Ventilate area. Avoid inhalation of vapors. Avoid contact with eyes, skin and clothing.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal.

6.4. Reference to other sections

SECTION 8: Exposure controls/personal protection. SECTION 13: Disposal considerations.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Additional hazards when processed : Handle empty containers with care because residual vapors are flammable.

Precautions for safe handling : Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Take precautionary measures against static discharge. Provide good ventilation in process area to prevent formation of vapor. Use only outdoors or in a well-ventilated area. Use only non-sparking tools. Avoid inhalation of vapors. Avoid contact with skin, eyes and clothing.

Hygiene measures : Handle in accordance with good industrial hygiene and safety practice. Do not eat, drink or smoke when using this product. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Proper grounding procedures to avoid static electricity should be followed. Protect from sunlight. Store in a well-ventilated place. Keep container tightly closed. Keep only in original container. Keep cool. Store locked up. Always keep container in upright position. Have appropriate fire extinguishers and spill cleanup equipment in or near storage area. Stored containers should be periodically checked for general condition and leakage.

Incompatible materials : Strong acids. Strong alkalis. Oxidizing agents. Combustible materials. Halogens. Peroxides. Metallic salts.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Propan-2-ol (67-63-0) | | |
|-----------------------|-------------------------------------|---------------------------|
| ACGIH | Local name | 2-Propanol |
| ACGIH | ACGIH TWA (ppm) | 200 ppm |
| ACGIH | ACGIH STEL (ppm) | 400 ppm |
| ACGIH | Remark (ACGIH) | Eye & URT irr; CNS impair |
| ACGIH | Regulatory reference | ACGIH 2018 |
| OSHA | OSHA PEL (TWA) (mg/m ³) | 980 mg/m ³ |

DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| Propan-2-ol (67-63-0) | | |
|-----------------------|--------------------------------|--------------------------|
| OSHA | OSHA PEL (TWA) (ppm) | 400 ppm |
| OSHA | Regulatory reference (US-OSHA) | OSHA Annotated Table Z-1 |

8.2. Appropriate engineering controls

- Appropriate engineering controls : Provide good ventilation in process area to prevent formation of vapor. Ensure exposure is below occupational exposure limits (where available). Emergency eye wash fountains should be available in the immediate vicinity of any potential exposure.
- Environmental exposure controls : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams.

8.3. Individual protection measures/Personal protective equipment

Personal protective equipment:

Avoid all unnecessary exposure. Wash hands thoroughly after handling.

Hand protection:

Wear chemically resistant protective gloves. The exact breakthrough time has to be found out by the manufacturer of the protective gloves and has to be observed. Gloves should be removed and replaced if there are any signs of degradation or breakthrough.

Eye protection:

Chemical goggles or safety glasses

Skin and body protection:

Long sleeved protective clothing

Respiratory protection:

In case of inadequate ventilation wear respiratory protection.

Thermal hazard protection:

Not required for normal conditions of use.

Other information:

Do not eat, drink or smoke during use. Do not eat, drink or smoke when using this product.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|---|--------------------------------------|
| Physical state | : Liquid |
| Appearance | : Clear. |
| Color | : Colorless |
| Odor | : Slight alcohol |
| Odor threshold | : No data available |
| pH | : 5.5 - 7.5 |
| Melting point | : Not applicable |
| Freezing point | : Not applicable |
| Boiling point | : 82.5 °C (180.5 °F) |
| Flash point | : 18.3 °C (64.9 °F) |
| Relative evaporation rate (butyl acetate=1) | : No data available |
| Flammability (solid, gas) | : No data available |
| Vapor pressure | : 3.7 - 4.1 kPa @ 20°C (Propan-2-ol) |
| Relative vapor density at 20 °C | : 1.6 Relative density, gas (air=1) |
| Relative density | : No data available |
| Specific gravity / density | : 0.84 - 0.87 g/cm ³ |
| Solubility | : Water: Miscible |
| Log Pow | : No data available |
| Auto-ignition temperature | : 399 °C (750.2 °F) |

DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|---------------------------|---|
| Decomposition temperature | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : 2.1 cP @ 25°C (Propan-2-ol) |
| Explosion limits | : 2.5 - 12 vol % |
| Explosive properties | : Vapors may form explosive mixture with air. |
| Oxidizing properties | : Not oxidizing. |

9.2. Other information

No additional information available

SECTION 10: Stability and reactivity

10.1. Reactivity

Stable under recommended handling and storage conditions (see section 7).

10.2. Chemical stability

Stable under recommended handling and storage conditions (see section 7). Highly flammable liquid and vapor.

10.3. Possibility of hazardous reactions

None known.

10.4. Conditions to avoid

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Take precautionary measures to prevent the formation of static electricity. Direct sunlight.

10.5. Incompatible materials

Strong acids. Strong bases. Oxidizing agents. Halogens. Peroxides. Metallic salts.

10.6. Hazardous decomposition products

Fire may produce irritating, corrosive and/or toxic gases. Carbon monoxide. Carbon dioxide.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

| | |
|-----------------------------|------------------|
| Acute toxicity (oral) | : Not classified |
| Acute toxicity (dermal) | : Not classified |
| Acute toxicity (inhalation) | : Not classified |

| Propan-2-ol (67-63-0) | |
|----------------------------|---|
| LD50 oral, rat | 5840 mg/kg (OECD 401 method) |
| LD50 dermal, rabbit | 16.4 ml/kg (OECD 402 method) |
| LC50 inhalation, rat (ppm) | > 10000 ppm - 6 Hours (OECD 403 method) |

| | |
|-----------------------------------|---|
| Skin corrosion/irritation | : Not classified pH: 5.5 - 7.5 |
| Serious eye damage/irritation | : Causes serious eye irritation. pH: 5.5 - 7.5 |
| Respiratory or skin sensitization | : Not classified |
| Germ cell mutagenicity | : Not classified |
| Carcinogenicity | : Not classified |

| Propan-2-ol (67-63-0) | |
|-----------------------|----------------------|
| IARC group | 3 - Not classifiable |

| | |
|--|--------------------------------------|
| Reproductive toxicity | : Not classified |
| Specific target organ toxicity – single exposure | : May cause drowsiness or dizziness. |

| Propan-2-ol (67-63-0) | |
|--|------------------------------------|
| Specific target organ toxicity – single exposure | May cause drowsiness or dizziness. |

| | |
|--|---------------------|
| Specific target organ toxicity – repeated exposure | : Not classified |
| Aspiration hazard | : Not classified |
| Viscosity, kinematic | : No data available |

DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Potential Adverse human health effects and symptoms : Causes serious eye irritation. Repeated or prolonged contact may cause skin irritation. May cause drowsiness or dizziness. Headache. Fatigue. Nausea. Vomiting. Ingestion may cause irritation of the gastrointestinal tract.

SECTION 12: Ecological information

12.1. Toxicity

| Propan-2-ol (67-63-0) | |
|-----------------------|---|
| LC50 fish | 9640 - 10000 mg/l - 96 Hours (Pimephales promelas), (OECD 203 method) |
| EC50 Daphnia | > 10000 mg/l - 24 Hours (Daphnia magna, Mobility), (OECD 202 method) |

12.2. Persistence and degradability

| DECON-AHOL WFI Formula | |
|-------------------------------|---------------------|
| Persistence and degradability | Rapidly degradable. |

| Propan-2-ol (67-63-0) | |
|-------------------------------|------------------------|
| Persistence and degradability | Readily biodegradable. |
| Biodegradation | 53 % - 5 days |

12.3. Bioaccumulative potential

| DECON-AHOL WFI Formula | |
|---------------------------|--------------------------------|
| Bioaccumulative potential | Low bioaccumulation potential. |

| Propan-2-ol (67-63-0) | |
|-------------------------------------|------|
| Bioconcentration factor (BCF REACH) | 3 |
| Log Pow | 0.05 |

12.4. Mobility in soil

| DECON-AHOL WFI Formula | |
|------------------------|--------------|
| Ecology - soil | Very mobile. |

12.5. Other adverse effects

Other information : Avoid release to the environment.

SECTION 13: Disposal considerations

13.1. Disposal methods

Waste disposal recommendations : Dispose in a safe manner in accordance with local/national regulations. Dispose of this material and its container to hazardous or special waste collection point.

Additional information : Handle empty containers with care because residual vapors are flammable.

Ecology - waste materials : Avoid release to the environment.

SECTION 14: Transport information

Department of Transportation (DOT)

In accordance with DOT

Transport document description : UN1219 Isopropanol, 3, II

UN-No.(DOT) : UN1219

Proper Shipping Name (DOT) : Isopropanol

Transport hazard class(es) (DOT) : 3 - Class 3 - Flammable and combustible liquid 49 CFR 173.120

Packing group (DOT) : II - Medium Danger

Hazard labels (DOT) : 3 - Flammable liquid



DOT Packaging Non Bulk (49 CFR 173.xxx) : 202

DOT Packaging Bulk (49 CFR 173.xxx) : 242

DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| | |
|--|---|
| DOT Special Provisions (49 CFR 172.102) | : IB2, T4, TP1 |
| DOT Packaging Exceptions (49 CFR 173.xxx) | : 4b;150 |
| DOT Quantity Limitations Passenger aircraft/rail (49 CFR 173.27) | : 5 L |
| DOT Quantity Limitations Cargo aircraft only (49 CFR 175.75) | : 60 L |
| DOT Vessel Stowage Location | : B |
| Emergency Response Guide (ERG) Number | : 129 |
| Other information | : No supplementary information available. |
| Special transport precautions | : No special precautions required. |

Transportation of Dangerous Goods

| | |
|---|-----------------------------------|
| Transport document description | : UN1219 ISOPROPANOL, 3, II |
| UN-No. (TDG) | : UN1219 |
| Proper Shipping Name (Transportation of Dangerous Goods) | : ISOPROPANOL |
| TDG Primary Hazard Classes | : 3 - Class 3 - Flammable Liquids |
| Packing group | : II - Medium Danger |
| Explosive Limit and Limited Quantity Index | : 1 L |
| Passenger Carrying Road Vehicle or Passenger Carrying Railway Vehicle Index | : 5 L |

Transport by sea

| | |
|---------------------------------------|--|
| Transport document description (IMDG) | : UN 1219 ISOPROPANOL (ISOPROPYL ALCOHOL), 3, II |
| UN-No. (IMDG) | : 1219 |
| Proper Shipping Name (IMDG) | : ISOPROPANOL (ISOPROPYL ALCOHOL) |
| Class (IMDG) | : 3 - Flammable liquids |
| Packing group (IMDG) | : II - substances presenting medium danger |
| Limited quantities (IMDG) | : 1 L |

Air transport

| | |
|---------------------------------------|------------------------------|
| Transport document description (IATA) | : UN 1219 Isopropanol, 3, II |
| UN-No. (IATA) | : 1219 |
| Proper Shipping Name (IATA) | : Isopropanol |
| Class (IATA) | : 3 - Flammable Liquids |
| Packing group (IATA) | : II - Medium Danger |

SECTION 15: Regulatory information

15.1. US Federal regulations

| DECON-AHOL WFI Formula | |
|-------------------------------------|---|
| SARA Section 311/312 Hazard Classes | Physical hazard - Flammable (gases, aerosols, liquids, or solids) Health hazard - Serious eye damage or eye irritation Health hazard - Specific target organ toxicity (single or repeated exposure) |

Chemical(s) subject to the reporting requirements of Section 313 or Title III of the Superfund Amendments and Reauthorization Act (SARA) of 1986 and 40 CFR Part 372.

| | | |
|-------------|-----------------|----------|
| Propan-2-ol | CAS-No. 67-63-0 | 68 – 72% |
|-------------|-----------------|----------|

| Propan-2-ol (67-63-0) |
|---|
| Listed on the United States TSCA (Toxic Substances Control Act) inventory |

15.2. International regulations

CANADA

| Propan-2-ol (67-63-0) |
|---|
| Listed on the Canadian DSL (Domestic Substances List) |

DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

EU-Regulations

No additional information available

National regulations

No additional information available

15.3. US State regulations

California Proposition 65 - This product does not contain any substances known to the state of California to cause cancer, developmental and/or reproductive harm

| Component | State or local regulations |
|----------------------|--|
| Propan-2-ol(67-63-0) | U.S. - New Jersey - Right to Know Hazardous Substance List U.S. - Pennsylvania - RTK (Right to Know) List |

SECTION 16: Other information

| | |
|-------------------|---|
| Revision date | : 11/24/2018 |
| Data sources | : US OSHA HazCom (GHS) 25 May 2012. |
| Other information | : This chemical is a pesticide product registered by the United States Environmental Protection Agency (68959-2) and is subject to certain labeling requirements under federal pesticide law. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS), and for workplace labels of non-pesticide chemicals. The hazard information required on the pesticide label is KEEP OUT OF REACH OF CHILDREN, DANGER PELIGRO. The pesticide label also includes other important information, including directions for use. Canada DIN #023512374. In Canada, this product is a drug product registered with Health Canada. |

Full text of H-phrases:

| | |
|------|-----------------------------------|
| H225 | Highly flammable liquid and vapor |
| H319 | Causes serious eye irritation |
| H336 | May cause drowsiness or dizziness |

Abbreviations and acronyms:


| | |
|--|---|
| | ATE (Acute Toxicity Estimate) |
| | CAS (Chemical Abstracts Service) number |
| | DNEL (Derived No Effect Level) |
| | EC50 (Effective Concentration 50%) |
| | IARC (International Agency for Research on Cancer) |
| | IATA (International Air Transport Association) |
| | IMDG (International Maritime Dangerous Goods Code) |
| | IMO (International Maritime Organisation) |
| | LC50 (Lethal Concentration 50%) |
| | LD50 (Lethal Dose 50%) |
| | OECD (Organisation for Economic Co-operation and Development) |
| | PBT (Persistent, Bioaccumulative and Toxic) |
| | STEL (Short Term Exposure Limit) |
| | TWA (Time Weighted Average) |
| | UNxxxx (Number assigned by the United Nations Committee of Experts on the Transport of Dangerous Goods) |
| | vPvB (very Persistent and very Bioaccumulative) |

DECON-AHOL WFI Formula

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

- NFPA health hazard : 2 - Materials that, under emergency conditions, can cause temporary incapacitation or residual injury.
- NFPA fire hazard : 3 - Liquids and solids (including finely divided suspended solids) that can be ignited under almost all ambient temperature conditions.
- NFPA reactivity : 0 - Material that in themselves are normally stable, even under fire conditions.



- Hazard Rating
- Health : 2 Moderate Hazard - Temporary or minor injury may occur
- Flammability : 3 Serious Hazard - Materials capable of ignition under almost all normal temperature conditions. Includes flammable liquids with flash points below 73 F and boiling points above 100 F. as well as liquids with flash points between 73 F and 100 F. (Classes IB & IC)
- Physical : 0 Minimal Hazard - Materials that are normally stable, even under fire conditions, and will NOT react with water, polymerize, decompose, condense, or self-react. Non-Explosives.
- Personal protection : G
G - Safety glasses, Gloves, Vapor respirator

Indication of changes:

| Section | Changed item | Change | Comments |
|---------|---|----------|----------|
| 2 | Hazards identification | Modified | |
| 8 | Exposure controls / Personal protection equipment | Modified | |
| 15 | Regulatory information | Modified | |
| 16 | Other information | Modified | |

SDS US (GHS HazCom 2012)

Information contained in this publication or as otherwise supplied to Users is believed to be accurate and is given in good faith, but it is for the Users to satisfy themselves of the suitability of the product for their own particular purpose. Veltek Associates, Inc. gives no warranty as to the fitness of the product for any particular purpose and any implied warranty or condition (statutory or otherwise) is excluded except to the extent that exclusion is prevented by law. Veltek Associates, Inc. accepts no liability for loss or damage resulting from reliance on this information. Freedom under Patents, Copyright and Designs cannot be assumed.

This SDS has been translated into the official language of the country/region in which the product is to be placed on the market. Where no official translation exists, the regulatory text is reported in English, as it appears in the relevant regulatory text.



Safety Data Sheet

Issue Date: 30-Dec-2014

Revision Date: N/A

Version 1

1. IDENTIFICATION

Product Identifier

Product Name Coastal SAE 80W-90 Limited Slip Gear Oil

Other means of identification

SDS # WUI-060

Recommended use of the chemical and restrictions on use

Recommended Use Lubricant.

Details of the supplier of the safety data sheet

Supplier Address

Warren Oil Company, LLC
915 E. Jefferson Ave.
West Memphis, AR 72301

Emergency Telephone Number

Company Phone Number 1-800-428-9284
Emergency Telephone (24 hr) CHEMTREC 1-800-424-9300

2. HAZARDS IDENTIFICATION

Appearance Clear amber liquid **Physical State** Liquid **Odor** Petroleum

Classification

This chemical does not meet the hazardous criteria set forth by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200). However, this Safety Data Sheet (SDS) contains valuable information critical to the safe handling and proper use of this product. This SDS should be retained and available for employees and other users of this product.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% |
|--|------------|----------|
| Petroleum distillates, hydrotreated heavy paraffinic | 64742-54-7 | 50-60 |
| Residual oils (petroleum), solvent refined | 64742-01-4 | 10-20 |
| Distillates, petroleum, solvent refined heavy paraffinic | 64741-88-4 | 10-20 |

If Chemical Name/CAS No is "proprietary" and/or Weight-% is listed as a range, the specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. FIRST-AID MEASURES

First Aid Measures

Eye Contact Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

| | |
|---------------------|---|
| Skin Contact | No treatment is necessary under ordinary circumstances. Remove contaminated clothing. Wash contaminated area thoroughly with soap and water. If redness or irritation occurs and persists, seek medical attention. |
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. If breathing is difficult, give oxygen. If not breathing give artificial respiration, preferably mouth-to-mouth. Call a POISON CENTER or doctor/physician. |
| Ingestion | If swallowed, do not induce vomiting. If victim exhibits signs of lung aspiration such as coughing or choking, seek immediate medical attention. |

Most important symptoms and effects

| | |
|-----------------|---|
| Symptoms | Expected to be a minor eye irritant. Repeated or prolonged skin contact may cause dermatitis. |
|-----------------|---|

Indication of any immediate medical attention and special treatment needed

| | |
|---------------------------|------------------------|
| Notes to Physician | Treat symptomatically. |
|---------------------------|------------------------|

5. FIRE-FIGHTING MEASURES**Suitable Extinguishing Media**

Dry chemical. Foam. Carbon dioxide (CO₂).

Unsuitable Extinguishing Media Not determined.

Specific Hazards Arising from the Chemical

Dense smoke may be generated while burning.

Hazardous Combustion Products Carbon monoxide. Carbon dioxide (CO₂). Other oxides.

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Avoid breathing smoke and vapor. Water may be used to cool containers exposed to heat or flame.

6. ACCIDENTAL RELEASE MEASURES**Personal precautions, protective equipment and emergency procedures**

Personal Precautions Use personal protective equipment as required.

Methods and material for containment and cleaning up

Methods for Containment Remove sources of ignition. Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams.

Methods for Clean-Up Take up small spills with absorbent pads. Large spills may be taken up with pump or vacuum.

7. HANDLING AND STORAGE**Precautions for safe handling**

Advice on Safe Handling Handle in accordance with good industrial hygiene and safety practice.

Conditions for safe storage, including any incompatibilities

| | |
|-------------------------------|--|
| Storage Conditions | Keep containers tightly closed in a dry, cool and well-ventilated place. |
| Incompatible Materials | Strong oxidizing agents. |

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines This product, as supplied, does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies

Appropriate engineering controls

Engineering Controls Ensure adequate ventilation, especially in confined areas. Showers. Eyewash stations.

Individual protection measures, such as personal protective equipment

| | |
|---------------------------------|---|
| Eye/Face Protection | Avoid contact with eyes. |
| Skin and Body Protection | Wear suitable protective clothing. |
| Respiratory Protection | Respiratory protection is not required under conditions of normal use. If vapor or mist is generated when the material is heated or handled, use organic vapor respirator with a dust or mist filter. |

General Hygiene Considerations Handle in accordance with good industrial hygiene and safety practice.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | | | |
|-----------------------|--------------------|-----------------------|----------------|
| Physical State | Liquid | Odor | Petroleum |
| Appearance | Clear amber liquid | Odor Threshold | Not determined |
| Color | Clear amber | | |

| Property | Values | Remarks • Method |
|------------------------------|-----------------------|------------------|
| pH | Not determined | |
| Melting Point/Freezing Point | Not determined | |
| Boiling Point/Boiling Range | Not determined | |
| Flash Point | 218.3 °C / 425 °F | ASTM D-92 |
| Evaporation Rate | Not determined | |
| Flammability (Solid, Gas) | Liquid-Not applicable | |
| Upper Flammability Limits | Not established | |
| Lower Flammability Limit | Not established | |
| Vapor Pressure | Not determined | |
| Vapor Density | No data available | |
| Specific Gravity | 0.90 | |
| Water Solubility | insoluble | |
| Solubility in other solvents | Not determined | |
| Partition Coefficient | Not determined | |
| Auto-ignition Temperature | No data available | |
| Decomposition Temperature | Not determined | |
| Kinematic Viscosity | Not determined | |
| Dynamic Viscosity | Not determined | |
| Explosive Properties | Not determined | |
| Oxidizing Properties | Not determined | |

12. ECOLOGICAL INFORMATION

Ecotoxicity

The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Component Information

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to microorganisms | Crustacea |
|---|----------------------|--|----------------------------|------------------------------------|
| Petroleum distillates, hydrotreated heavy paraffinic 64742-54-7 | | 5000: 96 h Oncorhynchus mykiss mg/L LC50 | | 1000: 48 h Daphnia magna mg/L EC50 |
| Distillates, petroleum, solvent refined heavy paraffinic 64741-88-4 | | 5000: 96 h Oncorhynchus mykiss mg/L LC50 | | 1000: 48 h Daphnia magna mg/L EC50 |
| Residual oils (petroleum), solvent refined 64742-01-4 | | 5000: 96 h Oncorhynchus mykiss mg/L LC50 | | 1000: 48 h Daphnia magna mg/L EC50 |

Persistence/Degradability

Not determined.

Bioaccumulation

Not determined.

Mobility

Not determined

Other Adverse Effects

Not determined

13. DISPOSAL CONSIDERATIONS

Waste Treatment Methods

Disposal of Wastes

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated Packaging

Disposal should be in accordance with applicable regional, national and local laws and regulations.

14. TRANSPORT INFORMATION

Note

Please see current shipping paper for most up to date shipping information, including exemptions and special circumstances.

DOT

Not regulated

IATA

Not regulated

IMDG

Not regulated

15. REGULATORY INFORMATION

International Inventories

| Chemical Name | TSCA | DSL | NDSL | EINECS | ELINCS | ENCS | IECSC | KECL | PICCS | AICS |
|--|---------|-----|------|---------|--------|---------|-------|---------|-------|------|
| Petroleum distillates, hydrotreated heavy paraffinic | Present | X | | Present | | Present | X | Present | X | X |
| Residual oils (petroleum), solvent refined | Present | X | | Present | | | X | Present | X | X |
| Distillates, petroleum, solvent refined heavy paraffinic | Present | X | | Present | | Present | X | Present | X | X |

Legend:

- TSCA - United States Toxic Substances Control Act Section 8(b) Inventory*
- DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List*
- EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances*
- ENCS - Japan Existing and New Chemical Substances*
- IECSC - China Inventory of Existing Chemical Substances*
- KECL - Korean Existing and Evaluated Chemical Substances*
- PICCS - Philippines Inventory of Chemicals and Chemical Substances*
- AICS - Australian Inventory of Chemical Substances*

US Federal Regulations

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355).

SARA 311/312 Hazard Categories

- Acute Health Hazard** No
- Chronic Health Hazard** No
- Fire Hazard** No
- Sudden Release of Pressure Hazard** No
- Reactive Hazard** No

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

US State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

This product does not contain any substances regulated under applicable state right-to-know regulations

16. OTHER INFORMATION

| | | | | |
|--------------------|-----------------------|---------------------|-------------------------|----------------------------|
| <u>NFPA</u> | Health Hazards | Flammability | Instability | Special Hazards |
| | 0 | 1 | 0 | Not determined |
| <u>HMIS</u> | Health Hazards | Flammability | Physical Hazards | Personal Protection |
| | 1 | 1 | 0 | Not determined |

Issue Date: 29-Oct-2013
 Revision Date: 18-Nov-2014
 Revision Note: New format

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

1. PRODUCT AND COMPANY IDENTIFICATION

Company

Arkema Inc.
900 First Avenue
King of Prussia, Pennsylvania 19406

Functional Additives

Customer Service Telephone Number: (800) 331-7654
(Monday through Friday, 8:00 AM to 5:00 PM EST)

Emergency Information

Transportation: CHEMTREC: (800) 424-9300
(24 hrs., 7 days a week)
Medical: Rocky Mountain Poison Center: (866) 767-5089
(24 hrs., 7 days a week)

Product Information

Product name: LUPEROX® DDM-9
Synonyms: Not available
Molecular formula: Complex mixture
Chemical family: Organic peroxide - ketone peroxides
Product use: initiator/catalyst

2. HAZARDS IDENTIFICATION

Emergency Overview

Color: colourless
Physical state: liquid
Form: oily
Odor: sweet

***Classification of the substance or mixture:**

Organic peroxides, Type D, H242
Oral: Acute toxicity, Category 4, H302
Skin corrosion, Category 1B, H314
Serious eye damage, Category 1, H318
Chronic aquatic toxicity, Category 3, H412

*For the full text of the H-Statements mentioned in this Section, see Section 16.

GHS-Labeling

Hazard pictograms:



Signal word:

Danger

Hazard statements:

H242 : Heating may cause a fire.

H302 : Harmful if swallowed.

H314 : Causes severe skin burns and eye damage.

H412 : Harmful to aquatic life with long lasting effects.

Supplemental Hazard Statements:

Organic peroxide. Hazardous decomposition may occur.

Precautionary statements:

Prevention:

- P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.
- P220 : Keep/Store away from clothing/ combustible materials.
- P234 : Keep only in original container.
- P264 : Wash skin thoroughly after handling.
- P270 : Do not eat, drink or smoke when using this product.
- P273 : Avoid release to the environment.
- P280 : Wear protective gloves/ protective clothing/ eye protection/ face protection.

Response:

- P301 + P312 : IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell.
- P301 + P330 + P331 : IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
- P303 + P361 + P353 : IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
- P304 + P340 : IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
- P305 + P351 + P338 : IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- P310 : Immediately call a POISON CENTER or doctor/ physician.
- P363 : Wash contaminated clothing before reuse.

Storage:

- P405 : Store locked up.
- P410 : Protect from sunlight.
- P411 + P235 : Maximum storage temperature is specified on label and in section 7 of SDS. Keep cool.
- P420 : Store away from other materials.

Disposal:

- P501 : Dispose of contents/ container to an approved waste disposal plant.

Supplemental information:

Potential Health Effects:

If swallowed, may cause severe irritation and injury to the mouth, throat and digestive tract.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS-No. | Wt/Wt | GHS Classification** |
|---|-----------|----------------|------------------------------|
| Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester | 6846-50-0 | >= 57 - < 59 % | H412 |
| 2-Butanone, peroxide | 1338-23-4 | >= 32 - < 34 % | H302, H312, H314, H318, H242 |

| | | | |
|----------------------------|-----------|------------------|--|
| 2,4-Pentanediol, 2-methyl- | 107-41-5 | >= 5.5 - < 6.5 % | H319, H336 |
| 2-Butanone | 78-93-3 | >= 1 - < 2 % | H225, H315, H319, H336 |
| 1-Butanamine, N,N-dibutyl- | 102-82-9 | <= 1 % | H302, H310, H330, H315 |
| Hydrogen peroxide | 7722-84-1 | <= 1 % | H271, H301, H332, H335, H314, H318, H412 |

**For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

Inhalation:

If inhaled, remove victim to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

Skin:

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. Thoroughly clean shoes before reuse.

Eyes:

In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention immediately.

Ingestion:

If swallowed, DO NOT induce vomiting unless directed to do so by medical personnel. Get medical attention immediately. If victim is fully conscious, give a cupful of water. Never give anything by mouth to an unconscious person. Rinse mouth.

5. FIREFIGHTING MEASURES

Extinguishing media (suitable):

Water spray, Foam, Dry chemical

Protective equipment:

Fire fighters and others who may be exposed to products of combustion should wear full fire fighting turn out gear (full Bunker Gear) and self-contained breathing apparatus (pressure demand / NIOSH approved or equivalent).

Further firefighting advice:

Fight fire with large amounts of water from a safe distance.
Cool closed containers exposed to fire with water spray.
Closed containers of this material may explode when subjected to heat from surrounding fire.
After a fire, wait until the material has cooled to room temperature before initiating clean-up activities.
Do not allow run-off from fire fighting to enter drains or water courses.
Fire fighting equipment should be thoroughly decontaminated after use.

Fire and explosion hazards:

Contact with incompatible materials or exposure to temperatures exceeding the SADT may result in a self-accelerating decomposition reaction with release of flammable vapors which may autoignite.

When burned, the following hazardous products of combustion can occur:

Carbon oxides

Hazardous organic compounds

6. ACCIDENTAL RELEASE MEASURES**Personal precautions, Emergency procedures, Methods and materials for containment/clean-up:**

Prevent further leakage or spillage if you can do so without risk. Evacuate area of all unnecessary personnel. Ventilate the area. Eliminate all ignition sources. Avoid generation of vapors. Contain and collect spillage with non-combustible absorbent material such as clean sand, earth, diatomaceous earth or non-acidic clay and place into suitable properly labeled containers for prompt disposal. DO NOT USE peat moss. DO NOT USE vermiculite. Sweep or scoop up using non-sparking tools and place into suitable properly labeled containers for prompt disposal. The sweepings should be wetted down further with water. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Consult a regulatory specialist to determine appropriate state or local reporting requirements, for assistance in waste characterization and/or hazardous waste disposal and other requirements listed in pertinent environmental permits.

Protective equipment:

Appropriate personal protective equipment is set forth in Section 8.

7. HANDLING AND STORAGE**Handling****General information on handling:**

Contact with materials to avoid or exposure to temperatures exceeding the SADT may result in a self-accelerating decomposition reaction with release of flammable vapors which may autoignite.

Do not taste or swallow.

Do not get in eyes, on skin, or on clothing.

Avoid breathing vapor or mist.

Keep away from heat, sparks and flames.

No smoking.

Use only with adequate ventilation.

Wash thoroughly after handling.

Prevent product contamination.

Keep container tightly closed and away from combustible materials.

Keep only in the original container.

Do not reuse container as it may retain hazardous product residue.

Emptied container retains vapor and product residue.

Container hazardous when empty.

Improper disposal or reuse of this container may be dangerous and/or illegal.

Storage**General information on storage conditions:**

Store in closed containers, in a secure area to prevent container damage and subsequent spillage. Outside or detached storage is preferred. Store out of direct sunlight in a cool well-ventilated place. Store in original container. Store away from combustibles and materials to avoid. Refer also to National Fire Protection Association (NFPA) Code 400, Hazardous Materials Code.

Storage stability – Remarks:

Follow the recommended storage temperatures provided in this Section in order to maintain stability and oxygen content.

Storage incompatibility – General:

Strong acids

Strong bases

Strong oxidizing agents

Reducing agents

Accelerators

Friedel - Crafts reaction catalyst

transition metal salts

metal ions

Brass

Copper

Iron

For all Organic Peroxides, compatible materials of contact are stainless steel 304 or 316 (preferred), high-density polyethylene (HDPE), polytetrafluoroethylene or glass linings.

Temperature tolerance – Do not store below:–

50 °F (10 °C)

Temperature tolerance – Do not store above:

100 °F (38 °C)

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Airborne Exposure Guidelines:

2-Butanone, peroxide (1338-23-4)

US. ACGIH Threshold Limit Values

| | |
|---------------------|---------|
| Ceiling Limit Value | 0.2 ppm |
|---------------------|---------|

2,4-Pentanediol, 2-methyl- (107-41-5)

US. ACGIH Threshold Limit Values

| | |
|---------------------|--------|
| Ceiling Limit Value | 25 ppm |
|---------------------|--------|

2-Butanone (78-93-3)

US. ACGIH Threshold Limit Values

| | |
|-----------------------------------|---------|
| Time weighted average | 200 ppm |
| Short Term Exposure Limit (STEL): | 300 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| | |
|------|---------------------|
| PEL: | 200 ppm (590 mg/m3) |
|------|---------------------|

Hydrogen peroxide (7722-84-1)

US. ACGIH Threshold Limit Values

| | |
|-----------------------|-------|
| Time weighted average | 1 ppm |
|-----------------------|-------|

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| | |
|------|-------------------|
| PEL: | 1 ppm (1.4 mg/m3) |
|------|-------------------|

Only those components with exposure limits are printed in this section. Limits with skin contact designation above have skin contact effect. Air sampling alone is insufficient to accurately quantitate exposure. Measures to prevent significant cutaneous absorption may be required. Limits with a sensitizer designation above mean that exposure to this material may cause allergic reactions.

Engineering controls:

Investigate engineering techniques to reduce exposures below airborne exposure limits or to otherwise reduce exposures. Provide ventilation if necessary to minimize exposures or to control exposure levels to below airborne exposure limits (if applicable see above). If practical, use local mechanical exhaust ventilation at sources of air contamination such as open process equipment.

Consult ACGIH ventilation manual or NFPA Standard 91 for design of exhaust systems.

Respiratory protection:

Avoid breathing vapor or mist. Where airborne exposure is likely or airborne exposure limits are exceeded (if applicable, see above), use NIOSH approved respiratory protection equipment appropriate to the material and/or its components. Full facepiece equipment is recommended and, if used, replaces need for face shield and/or chemical goggles. Consult respirator manufacturer to determine appropriate type equipment for a given application. Observe respirator use limitations specified by NIOSH or the manufacturer. For emergency and other conditions where there may be a potential for significant exposure or where exposure limit may be significantly exceeded, use an approved full face positive-pressure, self-contained breathing apparatus or positive-pressure airline with auxiliary self-contained air supply. Respiratory protection programs must comply with 29 CFR § 1910.134.

Skin protection:

Wear appropriate chemical resistant protective clothing and chemical resistant gloves to prevent skin contact.

Consult glove manufacturer to determine appropriate type glove material for given application. Wear chemical goggles, a face shield, and chemical resistant clothing such as a rubber apron when splashing may occur. Rinse immediately if skin is contaminated. Remove contaminated clothing immediately and wash before reuse. Clean protective equipment before reuse. Provide a safety shower at any location where skin contact can occur. Wash thoroughly after handling.

Eye protection:

Where there is potential for eye contact, wear a face shield, chemical goggles, and have eye flushing equipment immediately available.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|--|
| Color: | colourless |
| Physical state: | liquid |
| Form: | oily |
| Odor: | sweet |
| Odor threshold: | No data available |
| Flash point | The flashpoint of this product is greater than the Self Acceleration Decomposition Temperature (SADT). |
| Auto-ignition temperature: | No data available |
| Lower flammable limit (LFL): | No data available |
| Upper flammable limit (UFL): | No data available |
| pH: | No data available |
| Density: | 1.0077 g/cm ³ (68 °F (20 °C)) |
| Specific Gravity (Relative density): | 1.0088 (68 °F (20 °C))Water=1 (liquid) |
| Vapor pressure: | 5.20 mmHg (66 °F (19 °C)) |
| Vapor density: | No data available |
| Boiling point/boiling range: | Decomposes before boiling. Rate of decomposition increases with rising temperature. |
| Melting point/range: | No data available. |
| Freezing point: | No data available |
| Evaporation rate: | No data available |

| | |
|--|-------------------------------------|
| Solubility in water: | slightly soluble |
| Refractive index: | 1.4356 |
| Viscosity, dynamic: | 17.30 mPa.s 68 °F (20 °C) |
| Oil/water partition coefficient: | No data available |
| Self-Accelerating Decomposition Temperature (SADT): | 167 °F (75 °C) 45 pound container |
| Thermal decomposition | No data available |
| Active oxygen content: | 8.7 - 9.0 % |
| Flammability: | See GHS Classification in Section 2 |

10. STABILITY AND REACTIVITY

Stability:

This material is chemically unstable and should only be handled under specified conditions.

Hazardous reactions:

Hazardous polymerization does not occur.

Materials to avoid:

- Strong acids
- Strong bases
- Strong oxidizing agents
- Reducing agents
- Accelerators
- Friedel - Crafts reaction catalyst
- transition metal salts
- metal ions
- Brass
- Copper
- Iron

For all Organic Peroxides, compatible materials of contact are stainless steel 304 or 316 (preferred), high-density polyethylene (HDPE), polytetrafluoroethylene or glass linings.

Conditions / hazards to avoid:

SADT - Self Accelerating Decomposition Temperature. Lowest temperature at which the tested package size will undergo a self-accelerating decomposition reaction. This reaction will generate flammable vapors which may autoignite. The length of time to generate a decomposition reaction, after the SADT has been reached or exceeded, is dependent upon how much the SADT has been exceeded and the length of time needed for the reaction exotherm (heat spike from increasing decomposition rate) to initiate a rapid decomposition reaction. Typically, SADT is inversely proportional to package size. Larger packages will have a lower SADT due to smaller ratio to heat transfer area to volume of product. See HANDLING AND STORAGE section of this SDS for specified conditions. See Hazardous Decomposition Products below.

Hazardous decomposition products:

Temperatures at or above SADT can result in the release of hazardous decomposition products which are flammable and may autoignite.

Thermal decomposition giving flammable and toxic products:

Carbon oxides

Hazardous organic compounds

11. TOXICOLOGICAL INFORMATION

Data on this material and/or its components are summarized below.

Data for LUPEROX® DDM-9

Acute toxicity

Oral:

Acute toxicity estimate 1,992 mg/kg.

Dermal:

Acute toxicity estimate > 5,000 mg/kg.

Inhalation:

4 h Acute toxicity estimate 39.54 mg/l.

Data for Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester (6846-50-0)

Acute toxicity

Skin Irritation:

Not irritating. (Rabbit) Irritation Index: 0/8. (4 h)

Eye Irritation:

Causes mild eye irritation. (Rabbit)

Skin Sensitization:

Not a sensitizer. Repeated skin exposure. (Guinea pig) No skin allergy or irritation was observed.

Repeated dose toxicity

Repeated oral administration to rat / affected organ(s): kidney, liver / signs: clinical chemistry changes, changes in organ weights, hyaline droplet nephropathy / (not considered relevant in humans)

Subchronic dietary administration to dog / No adverse systemic effects reported.

Genotoxicity

Assessment in Vitro:

No genetic changes were observed in laboratory tests using: bacteria, animal cells

Developmental toxicity

Reproductive/Developmental Effects Screening Assay. dietary (rat) / No birth defects were observed.

Reproductive effects

Reproductive/Developmental Effects Screening Assay. dietary (rat) / No toxicity to reproduction. At high dose : levels produced toxic effects in the mothers and offspring

Human experience**Skin contact:**

No skin allergy was observed. (studied using human volunteers)

Data for 2-Butanone, peroxide (1338-23-4)**Acute toxicity****Skin Irritation:**

Causes severe skin burns. (Rabbit) (4 h) (33 %) (occluded exposure, In solution in Dimethyl phthalate)

Eye Irritation:

Causes serious eye damage. (Rabbit) (33 - 39 %) (In solution in Dimethyl phthalate)

Skin Sensitization:

Not a sensitizer. Guinea pig maximization test. No skin allergy was observed (40 %) (In solution in Dimethyl phthalate)

Repeated dose toxicity

Repeated oral administration to Rat / affected organ(s): stomach, liver / signs: Irritation of the gastric mucosa, increased organ weight

Subchronic dermal administration to rat and mouse / affected organ(s): skin / signs: severe damage / No adverse systemic effects reported.

Genotoxicity**Assessment in Vitro:**

Both positive and negative responses for genetic changes were observed in laboratory tests using: bacteria, animal cells

Genotoxicity**Assessment in Vivo:**

No genetic changes were observed in laboratory tests using: mice

Developmental toxicity

Reproductive/Developmental Effects Screening Assay. oral (Rat) / No birth defects were observed.

Reproductive effects

Reproductive/Developmental Effects Screening Assay. oral (Rat) / No toxicity to reproduction.

Human experience**Skin contact:**

No skin allergy was observed. (studied using human volunteers)

Skin allergy was observed. Isolated case reports after exposure to a mixture containing this substance.

Human experience**Eye contact:**

Eyes: Pain, tearing, sensitivity to light, irritation. Mist and/or vapor are reported to cause irritation when proper industrial hygiene controls/procedures are not used. (based on reports of occupational exposure to workers) (severity of effects depends on extent of exposure)

Eyes: Pain, causes severe burns. (accidental exposure to concentrated solutions) (based on reports of occupational exposure to workers) (severity of effects depends on extent of exposure)

Human experience**Ingestion:**

Esophagus: Severe irritation, burns. (accidental exposure to concentrated solutions)

Data for 2,4-Pentanediol, 2-methyl- (107-41-5)**Acute toxicity****Specific target organ toxicity - single exposure:**

May cause drowsiness or dizziness.

Skin Irritation:

Practically non-irritating. (Rabbit) Irritation Index: 0.4/8. (4 h)

Eye Irritation:

Causes serious eye irritation. (Rabbit)

Skin Sensitization:

Not a sensitizer. Repeated skin exposure. (Guinea pig) No skin allergy or irritation was observed.

Repeated dose toxicity

Repeated dietary administration to rat / affected organ(s): kidney, liver, stomach / signs: Irritation of the gastric mucosa / No significant impairment of function.

Repeated inhalation administration to rat / affected organ(s): upper respiratory tract / Local irritation (Aerosol)

Genotoxicity**Assessment in Vitro:**

No genetic changes were observed in laboratory tests using: bacteria, animal cells

Developmental toxicity

Exposure during pregnancy. Oral (rat) / No birth defects were observed. (delays in development, at doses that produce effects in mothers)

Reproductive effects

Reproductive/Developmental Effects Screening Assay. Oral (rat) / No toxicity to reproduction. At high dose : Effects on offspring / (increased mortality in the offspring, decreased growth rate)

Human experience**Inhalation:**

Discomfort. (severity of effects depends on extent of exposure) (studied using human volunteers)

Human experience**Skin contact:**

No skin allergy was observed. (studied using human volunteers)

Local irritation, redness, swelling. (subjects with dermatitis or eczema)

Central nervous system depression. (severity of effects depends on extent of exposure)

Human experience**Eye contact:**

Discomfort, slightly irritating. (liquid or aerosol) (studied using human volunteers) (severity of effects depends on extent of exposure)

Data for 2-Butanone (78-93-3)**Acute toxicity****Specific target organ toxicity - single exposure:**

May cause drowsiness or dizziness.

Skin Irritation:

Causes skin irritation. (Rabbit) (24 h)

Eye Irritation:

Causes serious eye irritation. (Rabbit) Draize Test 21/110.

Skin Sensitization:

Not a sensitizer. Buehler method. (Guinea pig) No skin allergy was observed

Repeated dose toxicity

Subchronic inhalation administration to Rat / affected organ(s): liver / signs: blood chemistry changes, changes in organ weights

Repeated inhalation administration to rat, mouse, cat, chicken / no nervous system injuries

Carcinogenicity

Chronic dermal application administration to Mouse / signs: No increase in tumor incidence was reported.

Genotoxicity**Assessment in Vitro:**

No genetic changes were observed in laboratory tests using: bacteria, animal cells, human cells

Both positive and equivocal responses have been reported in tests using: yeast

Genotoxicity**Assessment in Vivo:**

No genetic changes were observed in laboratory tests using: mice

Developmental toxicity

Exposure during pregnancy. inhalation (Mouse) / No birth defects were observed. (skeletal variations, delays in development)

Exposure during pregnancy. inhalation (Rat) / No birth defects were observed. (delays in development, at

doses that produce effects in mothers)

Reproductive effects

Reproduction test. drinking water (Rat) / No toxicity to reproduction / (similar material)

Aspiration hazard

May be fatal if swallowed and enters airways.

Human experience**Inhalation:**

Upper respiratory tract: irritation. (vapor)

Central nervous system: drowsiness, dizziness. Exposure to other materials makes the association questionable. (based on reports of occupational exposure to workers)

Nervous system: altered reflexes, changes in motor activity. Exposure to other materials makes the association questionable. (based on reports of occupational exposure to workers)

Human experience**Skin contact:**

Skin: No skin allergy was observed. (studied using human volunteers)

Skin: dermatitis, cracking. Has a degreasing effect on the skin. (repeated or prolonged exposure)

Human experience**Eye contact:**

Eyes: irritating. (vapor)

Data for 1-Butanamine, N,N-dibutyl- (102-82-9)**Acute toxicity****Skin Irritation:**

Causes skin irritation. (Rabbit) (1 h)

Eye Irritation:

Causes mild eye irritation. (Rabbit) Irritation Index: 2 / 110.

Skin Sensitization:

Not a sensitizer. Buehler method. (Guinea pig) No skin allergy was observed

Repeated dose toxicity

Repeated inhalation administration to Rat / signs: nasal irritation, incoordination, restlessness, tremors

Genotoxicity**Assessment in Vitro:**

No genetic changes were observed in laboratory tests using: bacteria, animal cells

Genotoxicity**Assessment in Vivo:**

No genetic changes were observed in a laboratory test using: mice

Developmental toxicity

Exposure during pregnancy. oral (Rat) / No birth defects were observed. (at doses that produce effects in mothers)

Data for Hydrogen peroxide (7722-84-1)**Acute toxicity****Specific target organ toxicity - single exposure:**

May cause respiratory irritation.

Skin Irritation:

Causes severe skin burns. (Rabbit) (3 min) (70 %) (aqueous solution)

Eye Irritation:

Causes serious eye damage. (Rabbit) (70 %) (aqueous solution)

Repeated dose toxicity

Repeated drinking water administration to rat and mouse / affected organ(s): Gastro-intestinal tract / signs: irritation

Repeated inhalation administration to Rat / affected organ(s): nose / signs: irritation

Carcinogenicity

Chronic drinking water administration to rat and mouse / affected organ(s): Gastro-intestinal tract / signs: Increased incidence of tumors was reported.

Classified by the International Agency for Research on Cancer as: Group 3: Unclassifiable as to carcinogenicity in humans.

Genotoxicity**Assessment in Vitro:**

Genetic changes were observed in laboratory tests using: bacteria, animal cells

Genotoxicity**Assessment in Vivo:**

Genetic changes were observed in a laboratory test using: mice, rats

Human experience**Inhalation:**

Throat: irritation. (based on reports of occupational exposure to workers)

Human experience**Skin contact:**

Skin: bleaching of hair. (based on reports of occupational exposure to workers)

Human experience**Eye contact:**

Eye: irritating. (based on reports of occupational exposure to workers)

Human experience**Ingestion:**

Gastrointestinal tract: bloating, ulceration, burns. (accidental exposure to concentrated solutions)

Lung: accumulation of fluid in the lungs, death. (severity of effects depends on extent of exposure)

12. ECOLOGICAL INFORMATION

Chemical Fate and Pathway

Data on this material and/or its components are summarized below.

Data for Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester (6846-50-0)

Biodegradation:

Inherently biodegradable. (aerobic, 28 d) biodegradation 71 % / The 10 day time window criterion is not fulfilled.

Theoretical Biological Oxygen Demand:

Theoretical oxygen demand (ThOD) = 2,400 mg/g

Bioaccumulation:

BCF = 670 (without metabolism)

BCF = 14,611 (with metabolism)

BCF = 5.2 - 31 (Carp)

Octanol Water Partition Coefficient:

log Pow = 4.04 - 4.91 (calculated)

Data for 2-Butanone, peroxide (1338-23-4)

Biodegradation:

Readily biodegradable. (28 d) biodegradation 87 %

Octanol Water Partition Coefficient:

log Pow < 0.3

Data for 2,4-Pentanediol, 2-methyl- (107-41-5)

Biodegradation:

Readily biodegradable. (28 d) biodegradation 81 %

Octanol Water Partition Coefficient:

log Pow = -0.14

Data for 2-Butanone (78-93-3)

Biodegradation:

Readily biodegradable. (28 d) biodegradation 98 %

Octanol Water Partition Coefficient:

log Pow = 0.3

Photodegradation:

Half-life direct photolysis: = 6.9 d
(is rapidly degraded in air by OH radicals.)

Data for 1-Butanamine, N,N-dibutyl- (102-82-9)**Biodegradation:**

Readily biodegradable (29 d) biodegradation 80.3 %

Biological Oxygen Demand:

15 d BOD >70%ThOD

Theoretical Biological Oxygen Demand:

Theoretical oxygen demand (ThOD) = 3,110 mg/g

Octanol Water Partition Coefficient:

log Pow = 3.338

Data for Hydrogen peroxide (7722-84-1)**Biodegradation:**

Readily biodegradable. (0.02 d) biodegradation 99 %

Octanol Water Partition Coefficient:

log Pow = -1.57 (calculated)

Ecotoxicology

Data on this material and/or its components are summarized below.

Data for Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester (6846-50-0)**Aquatic toxicity data:**

No effect up to the limit of solubility. Lepomis macrochirus (Bluegill sunfish) 96 h NOEC > 6 mg/l

Aquatic invertebrates:

No effect up to the limit of solubility. Daphnia magna (Water flea) 48 h EC50 > 1.46 mg/l

Algae:

No effect up to the limit of solubility. Selenastrum capricornutum 72 h EC50 (growth rate) > 7.49 mg/l

Chronic toxicity to aquatic invertebrates:

Harmful. Daphnia magna (Water flea) 21 d NOEC (reproduction) = 0.7 mg/l

Data for 2-Butanone, peroxide (1338-23-4)**Aquatic toxicity data:**

Harmful. Poecilia reticulata (guppy) 96 h LC50 = 44.2 mg/l (In solution in Dimethyl phthalate)

Aquatic invertebrates:

Harmful. Daphnia (water flea) 48 h EC50 = 39 mg/l (In solution in Dimethyl phthalate)

Algae:

Toxic. Pseudokirchneriella subcapitata (green algae) 72 h ErC50 = 5.6 mg/l (In solution in Dimethyl phthalate)

Microorganisms:

Respiration inhibition / Activated sludge 30 min EC50 = 48 mg/l (In solution in Dimethyl phthalate)

Data for 2,4-Pentanediol, 2-methyl- (107-41-5)**Aquatic toxicity data:**

Practically nontoxic. *Oncorhynchus mykiss* (rainbow trout) 96 h LC50 = 9,450 mg/l
Practically nontoxic. *Lepomis macrochirus* (Bluegill sunfish) 96 h LC50 = 12,800 mg/l
Practically nontoxic. *Pimephales promelas* (fathead minnow) 96 h LC50 = 8,690 - 10,700 mg/l

Aquatic invertebrates:

Practically nontoxic. *Daphnia magna* (Water flea) 48 h EC50 = 3,200 - 5,410 mg/l

Algae:

Practically nontoxic. *Selenastrum capricornutum* 72 h EC50 > 429 mg/l

Microorganisms:

Bacteria 10 d NOEC > 1,000 mg/l

Data for 2-Butanone (78-93-3)**Aquatic toxicity data:**

Practically nontoxic. *Pimephales promelas* (fathead minnow) 96 h LC50 = 2,993 mg/l

Aquatic invertebrates:

Practically nontoxic. *Daphnia magna* (Water flea) 48 h EC50 = 308 mg/l

Algae:

Practically nontoxic. *Pseudokirchneriella subcapitata* (green algae) 72 h EC50 = 1,972 mg/l

Microorganisms:

Pseudomonas putida 16 h Toxicity threshold = 1,150 mg/l

Data for 1-Butanamine, N,N-dibutyl- (102-82-9)**Aquatic toxicity data:**

Harmful. *Oryzias latipes* (medaka) 96 h LC50 = 16.3 mg/l

Aquatic invertebrates:

Toxic. *Daphnia magna* (Water flea) 48 h EC50 = 8 mg/l

Algae:

Toxic. *Scenedesmus subspicatus* 72 h EbC50 = 8.2 mg/l (neutralized product)
Toxic. *Scenedesmus subspicatus* 72 h EbC50 = 3.5 mg/l (product not neutralized)

Microorganisms:

Nitrosomonas sp 2 h NOEC = 100 mg/l

Data for Hydrogen peroxide (7722-84-1)**Aquatic toxicity data:**

Harmful. *Pimephales promelas* (fathead minnow) 96 h LC50 = 16.4 mg/l

Aquatic invertebrates:

Toxic. *Daphnia pulex* (Water flea) 48 h EC50 = 2.4 mg/l

Algae:

Toxic. Skeletonema costatum (marine diatom) 72 h ErC50 = 1.38 mg/l

Microorganisms:

Activated sludge 0.5 h EC50 = 466 mg/l

Activated sludge 3 h EC50 > 1,000 mg/l

Chronic toxicity to aquatic invertebrates:

Harmful. Daphnia magna (Water flea) 21 d NOEC (reproduction) = 0.63 mg/l

13. DISPOSAL CONSIDERATIONS

Waste disposal:

Dilution followed by incineration is the preferred method. Dilution ratio of 10:1 in a clean, compatible, combustible solvent (i.e., Fuel Oil #2, mineral oil) will reduce reactivity hazard during incineration and transportation. Dispose of in accordance with federal, state and local regulations. Consult a regulatory specialist to determine appropriate state or local reporting requirements, for assistance in waste characterization and/or hazardous waste disposal and other requirements listed in pertinent environmental permits. Note: Chemical additions to, processing of, or otherwise altering this material may make this waste management information incomplete, inaccurate, or otherwise inappropriate. Furthermore, state and local waste disposal requirements may be more restrictive or otherwise different from federal laws and regulations.

Take appropriate measures to prevent release to the environment.

14. TRANSPORT INFORMATION

US Department of Transportation (DOT)

UN Number : 3105
 Proper shipping name : Organic peroxide type D, liquid
 Technical name : (Methyl ethyl ketone peroxide(s), <=45%)
 Class : 5.2
 Packaging group : II
 Marine pollutant : no
 Reportable quantity : 10 lbs (Methyl ethyl ketone peroxide(s))

International Maritime Dangerous Goods Code (IMDG)

UN Number : 3105
 Proper shipping name : ORGANIC PEROXIDE TYPE D, LIQUID
 Technical name : (METHY ETHYL KETONE PEROXIDE, <=45%)
 Class : 5.2
 Marine pollutant : no

15. REGULATORY INFORMATION

Chemical Inventory Status

| | | |
|------------|--------|-------------|
| EU. EINECS | EINECS | Conforms to |
|------------|--------|-------------|

LUPEROX® DDM-9

| | | |
|--|------------|---|
| United States TSCA Inventory | TSCA | The components of this product are all on the TSCA Inventory. |
| Canadian Domestic Substances List (DSL) | DSL | All components of this product are on the Canadian DSL |
| China. Inventory of Existing Chemical Substances in China (IECSC) | IECSC (CN) | Conforms to |
| Japan. ENCS - Existing and New Chemical Substances Inventory | ENCS (JP) | Conforms to |
| Japan. ISHL - Inventory of Chemical Substances | ISHL (JP) | Conforms to |
| Korea. Korean Existing Chemicals Inventory (KECI) | KECI (KR) | Conforms to |
| Philippines Inventory of Chemicals and Chemical Substances (PICCS) | PICCS (PH) | Conforms to |
| Australia Inventory of Chemical Substances (AICS) | AICS | Conforms to |

United States – Federal Regulations
SARA Title III – Section 302 Extremely Hazardous Chemicals:

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>SARA Reportable Quantities</u> | <u>SARA Threshold Planning Quantity</u> |
|----------------------|----------------|-----------------------------------|---|
| Hydrogen peroxide | 7722-84-1 | 1000 lbs | 1000 lbs |

SARA Title III - Section 311/312 Hazard Categories:

Acute Health Hazard, Reactivity Hazard

SARA Title III – Section 313 Toxic Chemicals:

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) - Reportable Quantity (RQ):

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Reportable quantity</u> |
|----------------------|----------------|----------------------------|
| 2-Butanone, peroxide | 1338-23-4 | 10 lbs |
| 2-Butanone | 78-93-3 | 5000 lbs |

United States – State Regulations

New Jersey Right to Know

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|----------------------------|----------------|
| 2-Butanone, peroxide | 1338-23-4 |
| 2,4-Pentanediol, 2-methyl- | 107-41-5 |
| 2-Butanone | 78-93-3 |
| 1-Butanamine, N,N-dibutyl- | 102-82-9 |
| Hydrogen peroxide | 7722-84-1 |

New Jersey Right to Know – Special Health Hazard Substance(s)

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|----------------------------|----------------|
| 2-Butanone, peroxide | 1338-23-4 |
| 2-Butanone | 78-93-3 |
| 1-Butanamine, N,N-dibutyl- | 102-82-9 |
| Hydrogen peroxide | 7722-84-1 |

Pennsylvania Right to Know

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|---|----------------|
| Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester | 6846-50-0 |
| 2-Butanone, peroxide | 1338-23-4 |
| 2,4-Pentanediol, 2-methyl- | 107-41-5 |
| 2-Butanone | 78-93-3 |
| 1-Butanamine, N,N-dibutyl- | 102-82-9 |
| Hydrogen peroxide | 7722-84-1 |

Pennsylvania Right to Know – Environmentally Hazardous Substance(s)

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|----------------------|----------------|
| 2-Butanone, peroxide | 1338-23-4 |
| 2-Butanone | 78-93-3 |
| Hydrogen peroxide | 7722-84-1 |

California Prop. 65

This product does not contain any chemicals known to the State of California to cause cancer, birth defects, or any other reproductive defects.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

| | |
|------|--|
| H225 | Highly flammable liquid and vapour. |
| H242 | Heating may cause a fire. |
| H271 | May cause fire or explosion; strong oxidizer. |
| H301 | Toxic if swallowed. |
| H302 | Harmful if swallowed. |
| H310 | Fatal in contact with skin. |
| H312 | Harmful in contact with skin. |
| H314 | Causes severe skin burns and eye damage. |
| H315 | Causes skin irritation. |
| H318 | Causes serious eye damage. |
| H319 | Causes serious eye irritation. |
| H330 | Fatal if inhaled. |
| H332 | Harmful if inhaled. |
| H335 | May cause respiratory irritation. |
| H336 | May cause drowsiness or dizziness. |
| H412 | Harmful to aquatic life with long lasting effects. |

HMIS ratings:

| | |
|-------------|---------------------|
| Health: | 3 (SERIOUS HAZARD) |
| Fire: | 2 (MODERATE HAZARD) |
| Reactivity: | 3 (SERIOUS HAZARD) |

Latest Revision(s):

| | |
|-------------------|--------------|
| Reference number: | 000000034127 |
| Date of Revision: | 10/18/2015 |
| Date Printed: | 11/29/2016 |

LUPEROX® is a registered trademark of Arkema Inc.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, ARKEMA expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; **NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN.** The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement. See SDS for Health & Safety Considerations.

Arkema has implemented a Medical Policy regarding the use of Arkema products in Medical Devices applications that are in contact with the body or circulating bodily fluids (<http://www.arkema.com/en/social-responsibility/responsible-product-management/medical-device-policy/index.html>) Arkema has designated Medical grades to be used for such Medical Device applications. Products that have not been designated as Medical grades are not authorized by Arkema for use in Medical Device applications that are in contact with the body or circulating bodily fluids. In addition, Arkema strictly prohibits the use of any Arkema products in Medical Device applications that are implanted in the body or in contact with bodily fluids or tissues for greater than 30 days. The Arkema trademarks and the Arkema name shall not be used in conjunction with customers' medical devices, including without limitation, permanent or temporary implantable devices, and customers shall not represent to anyone else, that Arkema allows, endorses or permits the use of Arkema products in such medical devices.

It is the sole responsibility of the manufacturer of the medical device to determine the suitability (including biocompatibility) of all raw materials, products and components, including any medical grade Arkema products, in order to ensure that the final end-use product is safe for its end use; performs or functions as intended; and complies with all applicable legal and regulatory requirements (FDA or other national drug agencies) It is the sole responsibility of the manufacturer of the medical device to conduct all necessary

tests and inspections and to evaluate the medical device under actual end-use requirements and to adequately advise and warn purchasers, users, and/or learned intermediaries (such as physicians) of pertinent risks and fulfill any postmarket surveillance obligations. Any decision regarding the appropriateness of a particular Arkema material in a particular medical device should be based on the judgment of the manufacturer, seller, the competent authority, and the treating physician.

COMPOSITE
ENVISIONS





SAFETY DATA SHEET

SECTION 1: Product and Company Identification

Product Name: NEW RAPID TAP
Recommended Use: Multi-purpose metal cutting oil

Manufacturer Information:

Relton Corporation-Chemical Division
 317 Rolyn Place
 Arcadia, CA 91007-2838

Phone: (800)-423-1505
Emergency Number (24 hours):
 CHEMTREC 800-424-9300

SECTION 2: Hazards Identification

GHS Classification: Hazardous to the aquatic environment, acute hazard: Category 1, H400
 Hazardous to the aquatic environment, long term hazard: Category 1, H410

GHS Label Elements:



Signal Word: Warning

Hazard Statements:

H400 Very toxic to aquatic life
 H410 Very toxic to aquatic life with long lasting effects

Precautionary Statements

P201 Obtain special instructions before use.
 P260 Do not breathe dust/fume/gas/mist/vapors/spray.
 P264 Wash thoroughly after handling.
 P270 Do not eat, drink or smoke when using this product.
 P308+P313 IF exposed or concerned: Get medical advice/ attention.
 P273 Avoid release to the environment.
 P391 Collect spillage.
 P501 Dispose of contents/container to an appropriate waste treatment facility.

Hazards not otherwise classified (HNOC): Not listed

SECTION 3: Composition/Information on Ingredients

| Chemical Name | CAS# | % | |
|--|------------------------|-------|---|
| Severely solvent refined heavy naphthenic distillates, Hydrotreated heavy naphthenic petroleum distillates | 64741-96-4, 64742-52-5 | 40-50 | * |
| Alkanes, C14-C16, Chloro | 1372804-76-6 | 30-40 | * |
| Calcium sulfonate | confidential | 5-10 | * |

The remaining ingredients are classified as non hazardous or are below reportable levels.

*The exact percentage of composition has been withheld as a trade secret

SECTION 4: First Aid Measures

| | |
|--|---|
| Inhalation: | May cause mild respiratory tract irritation. Remove individual to fresh air. If breathing is difficult give oxygen. |
| Skin Contact: | Flush the affected area with water for 15 minutes minimum. Remove exposed or contaminated clothing and shoes. Wash contaminated clothing before reuse. Seek medical attention if irritation develops. |
| Eye Contact: | Remove contact lenses if present. Rinse eyes thoroughly with water for 15 minutes minimum. Seek medical attention if eye irritation develops or persists. |
| Ingestion: | If conscious give one cup of water or milk if available and transport to a medical facility. Do not give anything by mouth to an unconscious person. |
| Most important symptoms acute or delayed: | Not available |
| Recommendations for immediate medical care and special treatment: | Not available |

SECTION 5: Fire Fighting Measures

| | |
|--|---|
| Suitable extinguishing media: | Slightly combustible. Use carbon dioxide, extinguishing powder or foam. Avoid water spray. |
| Unsuitable extinguishing media: | Not available |
| Specific hazards arising during fire: | Combustion may generate carbon monoxide, carbon dioxide, hydrogen chloride and oxides of sulfur and calcium |
| Firefighting equipment: | Firefighters should wear suitable protective equipment |
| Firefighting instructions: | Evacuate personnel to a safe area. Firefighters should use self contained breathing equipment and protective clothing. Keep containers cool with water spray. |

SECTION 6: Accidental Release Measures

| | |
|---|---|
| Personal Precautions: | Wear appropriate protective equipment and clothing during clean up. Keep unprotected persons away. |
| Environmental Precautions | Do not allow product to enter sewers, surface or ground waters. |
| Methods and materials for containment and cleanup: | Contain and recover liquid when possible. Absorb with suitable absorbent and place in a chemical waste container for proper disposal (see Section 13, Disposal Considerations). |

SECTION 7: Handling and Storage

| | |
|---|--|
| Precautions for safe handling: | As with all chemical products, avoid contact and wash thoroughly after handling. Do not eat, drink or smoke while using this product. Use only in well-ventilated areas. Remove contaminated clothing and protective equipment before entering eating areas. |
| Conditions for safe storage including incompatibilities: | All personnel who handle this product should be trained in its safe handling. Store tightly closed in cool, dry, ventilated area. Keep out of direct sunlight and away from heat and incompatible materials. Avoid contact with acids, oxidizing agents, and caustics. |

SECTION 8: Exposure Controls/Personal Protection**Exposure limit values**

| Material | CAS# | List | Type | Value |
|--|--------------|-------------------|------------|--|
| Alkanes, C14-C16, Chloro | 1372804-76-6 | No data available | | |
| Severely solvent refined heavy naphthenic distillate | 64741-96-4 | OSHA ACGIH | PEL TLV | 5 mg/m3 (TWA 8h) 5 mg/m3 (TWA 8h) |
| Petroleum distillates, hydrotreated heavy naphthenic | 64742-52-5 | OSHA ACGIH | PEL TLV | 5 mg/m3 (as oil mist) 5 mg/m3 (as oil mist) |

Appropriate Engineering Controls: Provide sufficient mechanical (general/and or local exhaust) ventilation to maintain exposure below exposure guidelines, if applicable, or below levels that cause known, suspected, or adverse effects.

Personal Protective Measures

Eye/face protection: Use chemical goggles or full face shield.

Hand protection: Use chemically-resistant gloves.

Respiratory protection: Not required under normal conditions of use. If airborne concentrations exceed applicable exposure limits, use NIOSH approved respiratory protection.

Thermal hazards: Not available

General hygiene considerations: Handle in accordance with good industrial hygiene and safety practice. Eyewash station and safety shower should be in vicinity of work area.

SECTION 9: Physical and Chemical Properties

| | |
|---|--------------------------------------|
| Appearance: | Amber colored oily liquid |
| Odor: | Mild petroleum |
| Odor threshold: | Not available |
| pH: | Not applicable |
| Solubility in water: | Insoluble |
| Viscosity: | Not available |
| Specific Gravity @ 70F: | 1.04 |
| Melting point: | Not available |
| Freezing point: | Not available |
| VOC Content (ASTM E-1868-10): | Less than 10g/L AQMD SUPER COMPLIANT |
| Initial boiling point and boiling range: | Not available |
| Flash point: | Not determined |
| Evaporation rate: | Not available |
| Flammability (solid, gas): | Not available |
| Upper/Lower flammability or explosive limits (%) | |
| Flammability limit-lower: | Not available |
| Flammability limit-upper: | Not available |
| Explosive limit-lower: | Not available |
| Explosive limit-upper: | Not available |
| Vapor pressure | <0.01 mmHg @ 20°C |
| Vapor density | Heavier than air |
| Partition coefficient (octanol:water) | Not available |

Auto-ignition temperature Not available
 Decomposition temperature Not available
 Decomposition temperature Not available

SECTION 10: Stability and Reactivity

Reactivity: No reactivity hazards are known.

Chemical Stability: Material is stable under normal conditions of storage and handling.

Possibility of hazardous reactions: No hazardous reactions are known under normal conditions of use.

Conditions to avoid: Keep away from heat, sparks, open flames. Protect from freezing.

Materials to avoid: Do not store with strong oxidizing agents. Keep away from heat, sparks, open flames, or all sources of ignition.

Hazardous decomposition products: May include carbon monoxide, carbon dioxide, hydrogen chloride, oxides of calcium and sulfur.

SECTION 11: Toxicological Information

Acute Toxicity:
 C14-C16 chlorinated paraffins
 1372804-76-6

| Test | Species | Test Results |
|---|---------|---|
| Dermal Acute Liquid DNEL | Human | 0.0065 mg/kg, 8 hours |
| Oral Liquid | Rat | 23 mg/kg, 90 days by body weight - effected organ kidney; repeat dose study |
| Inhalation Chronic Liquid DNEL | Rat | 6.7 mg/m ³ |
| Oral LD50 Liquid | Rodent | LD50 15000 mg/kg |
| NOAEL | Rat | 100 mg/kg, 90 days by body weight - target organ liver; Reproductive 1-generation study |

Skin: Not expected to be a primary skin irritant. Prolonged or repeated contact may cause irritation.

Eyes: May cause mild eye irritation.

Inhalation: May cause mild irritation of the respiratory tract with prolonged exposure.

Ingestion: Ingestion may cause irritation of the gastrointestinal lining, nausea, vomiting, diarrhea, and abdominal pain.

Delayed and immediate effects of exposure: Not available.

| Classification | Category | Hazard Description |
|-----------------------------------|---|--------------------|
| Acute toxicity (oral) | Not classified | Not applicable |
| Acute toxicity (dermal) | Not classified | Not applicable |
| Acute toxicity (inhalation) | Not classified | Not applicable |
| Skin corrosion/irritation | Not classified | Not applicable |
| STOT -single exposure | Not classified | Not applicable |
| STOT-repeated exposure | Not classified | Not applicable |
| Serious eye damage/eye irritation | Not classified | Not applicable |
| Respiratory sensitization | Not classified | Not applicable |
| Skin sensitization | Not classified | Not applicable |
| Carcinogenicity | Not classified | Not applicable |
| Reproductive toxicity | For C14-C16 chlorinated paraffins 1372804-76-6: 400 mg/kg/day diet produced internal hemorrhaging due to the inhibition of vitamin K uptake in rat dams and rat pups. The mode of action for the effect is likely due to a pre-existing vitamin K deficiency in the rodents. This result was not observed in the uterine lining of the rat dams where there was sufficient supply of vitamin K. In addition, the mode of action for the observed effects in rats is not equivalent to human exposure. IRDC (International Research and Development Corporation). 1985. Chlorinated Paraffin: Reproduction Range-Finding Study in Rats. IRDC Report No. 438/049, Mattawan Michigan USA. | |

Carcinogenicity:

IARC: No ingredient is considered to be carcinogenic.
OSHA: No ingredient is considered to be carcinogenic.
NTP: No ingredient is considered to be carcinogenic.

SECTION 12: Ecological Information

Ecotoxicity: Alkane C14-C16 Chloro (CAS # 1372804-76-6) is very toxic to aquatic life with long lasting effects

| Ingredient | CAS No. | Algae | Fish | Crustacea |
|--|--------------|------------|---|---|
| Alkanes, C14-C16, Chloro | 1372804-76-6 | Not listed | LC Bluegill (<i>Lepomis macrochirus</i>) > 0.1 mg/l, 96 hours Rainbow trout, donaldson trout (<i>Oncorhynchus mykiss</i>) > 0.1 mg/l, 96 Hours | Not listed Not listed |
| severely solvent refined heavy naphthenic distillate 64741-96-4 | 64741-96-4 | Not listed | 5000: 96 h <i>Oncorhynchus mykiss</i> mg/L LC50 | 1000: 48 h <i>Daphnia magna</i> mg/L EC50 |
| Petroleum distillates, hydrotreated heavy naphthenic 64742-52-5 | 64742-52-5 | Not listed | 5000: 96 h <i>Oncorhynchus mykiss</i> mg/L LC50 | 1000: 48 h <i>Daphnia magna</i> mg/L EC50 |

Bioaccumulation potential: Not available.

Mobility: Not available.

Other adverse effects: This material is expected to have adverse effects on marine and plant life. Spills may contaminate drinking water.

SECTION 13: Disposal Considerations

Disposal instructions: Waste disposal must be in accordance with appropriate US Federal, State and Local regulations.

Disposal of contaminated containers or packaging: Dispose of as unused product.

SECTION 14: Transportation Information

DOT
Not regulated as dangerous goods

IATA
Not regulated as dangerous goods

IMDG

UN Number: 3082

UN proper shipping name: Environmentally hazardous substances, liquid, N.O.S, (Alkanes, C14-C16, chloro)

Transport hazard class: 9

Subsidiary risk -

Packing group: III

Labels: 9

Marine Pollutant: Yes

SECTION 15: Regulatory Information

Toxic Substances Control Act (TSCA): All components of this product are on the TSCA Inventory or are exempt from reporting requirements.

SARA 302 Extremely Hazardous Substances: No

SARA 311/312 Classification:

| | |
|-------------------------|----|
| Immediate hazard | No |
| Delayed hazard | No |
| Fire hazard | No |
| Reactive hazard | No |
| Pressure hazard | No |

SARA 313 Components: No

California Proposition 65 (Safe Drinking Water and Toxic Enforcement Act of 1986):

This product contains no listed substances known to the State of California to cause cancer, birth defects or other reproductive harm

HMIS Information:

| | |
|---------------------|---|
| Health | 1 |
| Flammability | 1 |
| Reactivity | 1 |
| Personal Protection | B |

NFPA Information:



SECTION 16: Other Information

Issue date: March 30, 2015
Revision date: February 25, 2019
Version: 8.0

Disclaimer: Relton Corporation products are manufactured for professional and industrial use only. Relton Corporation believes the information contained herein is valid and accurate and makes no representation or warranty, express or implied, including the warranties of merchantability and fitness, for a particular purpose with respect to the information contained herein.



Safety Data Sheet

SC-125

Issue Date: May, 2012

Revision Date: October, 2020

Version: 2

1. IDENTIFICATION

Product Identifier

Product Name SC-125

Other means of identification

SDS # 6120

UN/ID No UN1593

Recommended use of the chemical and restrictions on use

Recommended Use Adhesive.

Restrictions on Use

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal

Details of the supplier of the safety data sheet

Supplier Address

Caseway Industrial Products, Inc.
3487 Highland Drive
Bay City, MI 48706
Ph: 989-391-9992
Fax: 989-391-9994

Emergency Telephone Number

Emergency Telephone (24 hr)

INFOTRAC 1-352-323-3500 (International)
1-800-535-5053 (North America) Contract # 106140
Contact manufacturer for all non-emergency calls

2. HAZARDS IDENTIFICATION

Appearance Clear colorless liquid

Physical State Liquid

Odor Ether-like

Classification GHS

| | |
|--|--------------------|
| Acute toxicity, oral | Category 4 [H302] |
| Skin corrosion/irritation | Category 2 [H315] |
| Serious eye damage/eye irritation | Category 2A [H319] |
| Carcinogenicity | Category 2 [H351] |
| Specific target organ toxicity (single exposure) | Category 1 [H370] |
| Specific target organ toxicity (repeated exposure) | Category 2 [H373] |
| Aspiration hazard | Category 2 [H305] |
| Hazardous to the aquatic life | Category 3 [H412] |

Hazards Not Otherwise Classified (HNOC)

- Methylene chloride can be metabolized to carbon monoxide (CO), which is then very tightly bound to hemoglobin. This complex is called carboxyhemoglobin (COHb) and results in a reduction in the oxygen carried in the blood. This product may be absorbed through the skin, causing systemic effects.
- Exposure in an enclosed or poorly-ventilated area may be harmful.
- This material may be absorbed across the skin causing systemic effects.
- ASPIRATION HAZARD IF SWALLOWED – CAN ENTER LUNGS AND CAUSE DAMAGE

Signal Word**Danger****Hazard Statements****H302:** Harmful if swallowed**H305:** May be harmful if swallowed and enters airways**H315:** Causes skin irritation**H319:** Causes serious eye irritation**H335:** May cause respiratory irritation.**H336:** May cause drowsiness or dizziness**H351:** Suspected of causing cancer**H370:** Causes damage to cardiovascular system including elevated carboxyhemoglobin levels**H373:** Causes damage to organs through prolonged or repeated exposure**H402:** Harmful to aquatic life**Precautionary Statements - Prevention****P201:** Obtain special instructions before use.**P202:** Do not handle until all safety precautions have been read and understood.**P260:** Do not breathe dust/fume/gas/mist/vapors/spray.**P264:** Wash hands, arms, and face thoroughly after handling.**P270:** Do not eat, drink, or smoke while using this product**P271:** Use only outdoors or in a well-ventilated area.**P280:** Wear protective gloves/protective clothing/eye protection/face protection.**Precautionary Statements - Response****P308+P313:** IF exposed or concerned: Get medical advice/attention.**P305+P351+P338:** IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do - continue rinsing.**P337+P313:** IF eye irritation persists: Get medical advice/attention.**P302+P352:** IF ON SKIN: wash with plenty of water.**P332+P313:** IF SKIN irritation occurs: Get medical advice/attention.**P362:** Take off contaminated clothing.**P304+P340:** IF INHALED: Remove person to fresh air and keep comfortable for breathing.**P304+P312:** IF INHALED: Call a POISON CENTER/doctor/... if you feel unwell.**P310:** IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.**P301+P330+P331:** IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.**Precautionary Statements - Storage****P403+P233:** Store in a well-ventilated place. Keep container tightly closed.**P405:** Store locked up.**Precautionary Statements - Disposal****P501:** Dispose of contents/container to an approved waste disposal plant.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% |
|-----------------|---------|----------|
| Dichloromethane | 75-09-2 | 60-100 |

If Chemical Name/CAS No is "proprietary" and/or Weight-% is listed as a range, the specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. FIRST-AID MEASURES

First Aid Measures

| | |
|-----------------------|---|
| General Advice | Provide this SDS to medical personnel for treatment. |
| Eye Contact | Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention. |
| Skin Contact | Wash off immediately with plenty of water while removing all contaminated clothes and shoes. If skin irritation persists, get medical advice/attention. Wash clothing after reuse. Treat any skin irritation symptomatically. |
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a physician or poison control center immediately. |
| Ingestion | Rinse mouth. Never give anything by mouth to an unconscious person. Do not induce vomiting without medical advice. Get medical attention immediately. |

Most important symptoms and effects

| | |
|-----------------|--|
| Symptoms | <p>Inhalation (breathing): Respiratory System Effects: Pulmonary irritation, cough, chest discomfort, shortness of breath, headache, euphoria, nausea, and vomiting, respiratory irritation. Changes in heart rate, paresthesias, sleepiness and seizures are described. Heavy exposure can result in muscle weakness or hypotonia, syncope, stupor followed by loss of consciousness. Complications include cardiac abnormalities and elevations of carboxyhemoglobin. Coma with respiratory depression may result in death.</p> <p>Skin: Skin Irritation. Skin exposure may cause intense burning sensation, mild redness and numbness. Severe burns may develop following prolonged exposures.</p> <p>Eye: Eye Irritation. Mild eye irritation may occur when exposed to vapor. Splash of liquid in the eye can cause conjunctival irritation and burning pain. Prolonged contact can cause severe corneal burns.</p> <p>Ingestion (swallowing): Ingesting this material may cause nausea, vomiting, mucosal irritation with burning sensation. System effects include central nervous system depression, headache, syncope, seizures, and coma. The minimum oral lethal dose is estimated at 0.5 to 5 ml/kg. Lesser amounts may cause significant toxicity.</p> <p>Delayed Symptoms/Effects: May cause cancer. Repeated or prolonged exposure may cause blood and liver damage.</p> <p>Protection of First-Aiders: Protect against vapor/gas exposure. Protect against liquid contamination. Most cases of serious toxicity or death have been associated with stripping operations and or use in enclosed spaces.</p> |
|-----------------|--|

Indication of any immediate medical attention and special treatment needed**Notes to Physician**

Treat symptomatically. Acute symptoms from low airborne levels are generally mild and self-limiting following removal from exposure, and should require no specific treatment. The primary exposure route is inhalation. Symptomatic exposure should be treated with oxygen. The primary toxicity is central nervous system depression. May cause cardiac arrhythmias. Treatment with non-catecholamine agent is theoretically preferred. Treat seizures with benzodiazepines. Methylene chloride is metabolized to carbon monoxide. Carbon monoxide levels may increase after exposure has ceased. Treat following carbon monoxide recommendations. For ingestion, protect the airway and do not administer fluids or attempt to decontaminate due to the risk of vomiting and aspiration. Protect the airway. May dissolve some medical grade plastics. Systemic toxicity from skin absorption is unlikely. There is no antidote

Interaction with Other Chemicals Which Enhance Toxicity
Medical Conditions Aggravated by Exposure

May potentiate other agents that cause central nervous system (CNS) and respiratory system depression, such as alcohol, opiates.
 May increase potential for cardiac arrhythmia. May increase carboxyhemoglobin levels.
 May worsen respiratory system disorders such as asthma and other breathing disorders.
 May worsen central nervous system disorders such as seizure disorders or impair central nervous system functions. May worsen ischemic heart disease.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Water fog or fine spray, carbon dioxide, dry chemical, foam.

Unsuitable Extinguishing Media Water jet.**Specific Hazards Arising from the Chemical**

Vapor concentrated in a confined or poorly ventilated area can be ignited upon contact with a high energy spark, flame, or high intensity heat source.

Hazardous Combustion Products: Hydrogen chloride, trace amounts of phosgene, chlorine, and carbon monoxide.

Component: Methylene Chloride (Dichloromethane) 75-09-2

Immediately Dangerous to Health/Life (IDLH): 2300 ppm IDLH

Lower Flammability Level (air): 12% @ 100°C

Upper Flammability Level (air): 19% @ 100°C

Auto Ignition Temperature: 1033°F (556.1°C)

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent). Concentrated vapors may be ignited by high intensity source. Move container from fire area if it can be done without risk. Cool containers with water spray until well after the fire is out. Flood with fine water spray. Do not scatter spilled material with high pressure water streams. Avoid inhalation of material or combustion by-products. Stay upwind and keep out of low areas. Keep water runoff out of water supplies and sewers. (see Section 6 of the SDS).

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures**Personal Precautions**

Most vapors are heavier than air and will spread along ground and collect in low or confined areas (drains, basements, tanks). Do not breath vapors, mist, or spray. Ventilate closed spaces before entering. Exposure in an enclosed or poorly-ventilated area may be very harmful. Keep unnecessary people away, isolate hazard, and deny entry. Evacuation of surrounding area may be necessary for large spills. Shut off ventilation system if needed. Do not get in eyes, on skin, or clothing. Wear protective clothing as described in Section 8 of this safety data sheet. Remove all sources of ignition. The wet contaminated surface may be slippery.

Environmental Precautions Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air). See Section 12 for additional Ecological Information.

Methods and material for containment and cleaning up

Methods for Containment Stop leak if possible, without personal risk. Ventilate closed spaces before entering. Completely contain spilled materials with sandbags, dikes, etc. Remove contaminated soil or collect with appropriate absorbent and place into suitable container. Contain and collect spillage with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite).

Methods for Clean-Up Sweep up absorbed material and shovel into suitable containers for disposal. Discard any product, residue, disposable container or liner in full compliance with federal, state, and local regulations. For waste disposal, see section 13 of the SDS. Wash spill area with a mild detergent.

7. HANDLING AND STORAGE

Precautions for safe handling

Advice on Safe Handling Handle in accordance with good industrial hygiene and safety practice. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear appropriate personal protective equipment. Wash face, hands, and any exposed skin thoroughly after handling. Keep away from heat/sparks/open flames/hot surfaces. — No smoking. Use only in well-ventilated areas. Keep containers closed when not in use. Do not breathe vapors or spray mist. Do not eat, drink or smoke when using this product.

Conditions for safe storage, including any incompatibilities

Storage Conditions Keep container tightly closed and store in a cool, dry and well-ventilated place. Store locked up. Protect from damp. Store away from heat and incompatible materials.

Incompatible Materials Oxidizing agents. Strong bases. Zinc powders. Aluminum powders. Magnesium powders. Potassium. Sodium.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|----------------------------|------------------|---|-------------------|
| Dichloromethane 75-09-2 | TWA: 50 ppm | TWA: 25 ppm (vacated) TWA: 500 ppm (vacated) STEL: 2000 ppm 5 min in any 3 h (vacated) Ceiling: 1000 ppm STEL: 125 ppm see 29 CFR 1910.1052 | IDLH: 2300 ppm |

Appropriate engineering controls

Engineering Controls Provide local exhaust or process enclosure ventilated system, Ensure compliance with applicable exposure limits. Monitoring should be performed regularly in accordance with 29 CFR 1910.1052(d) to determine exposure level(s). Good ventilation is required. Maintain eye wash fountain and quick-drench shower facilities in work area.

Individual protection measures, such as personal protective equipment

| | |
|---------------------------------------|--|
| Eye/Face Protection | Splash goggles or full-face shield. |
| Skin and Body Protection | Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact. |
| Respiratory Protection | Ensure adequate ventilation, especially in confined areas. Use NIOSH approved air-purifying respirator if the potential to exceed established exposure limits exists. |
| General Hygiene Considerations | Avoid contact with skin, eyes and clothing. After handling this product, wash hands before eating, drinking, or smoking. If contact occurs, remove contaminated clothing. If needed, take first aid action shown on section 4 of this SDS. Launder contaminated clothing before reuse. |

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | | | |
|--------------------------------|------------------------|--------------------------------|--|
| Physical State | Liquid | Odor | Mildly sweet |
| Appearance | Clear colorless liquid | | Chloroform-like odor |
| Color | Clear Colorless | Odor Threshold | 200 – 300 ppm (causes olfactory fatigue) |
| <u>Property</u> | <u>Values</u> | <u>Remarks • Method</u> | |
| pH | Not determined | | |
| Melting Point/Freezing Point | -95 °C | | |
| Boiling Point/Boiling Range | 39.8 °C / 104 °F | | |
| Flash Point | None | | |
| Evaporation Rate | .07 (ether=1) | | |
| Flammability (Solid, Gas) | Not determined | | |
| Upper Flammability Limit (air) | 19% @ 100 °C | | |
| Lower Flammability Limit (air) | 12% @ 100 °C | | |
| Vapor Pressure | 350 mmHg @ 2 0°C | | |
| Vapor Pressure | 435 mmHg @ 25 °C | | |
| Vapor Density | 2.93 | (Air=1) | |
| Specific Gravity | 1.31 – 1.32 @ 25 °C | @ 25 °C (77 °F) | |
| Water Solubility | 1.32% @ 25 °C | Or 13,000 mg/l at 25 °C | |
| Solubility in other solvents | Not determined | | |
| Partition Coefficient | Not determined | | |
| Auto-ignition Temperature | 556.1 °C / 1033 °F | | |
| Decomposition Temperature | Not determined | | |
| Viscosity | - 0.41 (cps) @ 77 °F | | |
| Dynamic Viscosity | Not determined | | |
| Explosive Properties | Not determined | | |
| Oxidizing Properties | Not determined | | |

10. STABILITY AND REACTIVITY

Reactivity

Not reactive under normal conditions. Reacts violently with active metals.

Chemical Stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

Avoid heat, flames, and other sources of ignition. Containers may rupture or explode if exposed to heat. Reacts violently with active metals. Avoid contact with incompatible substances and conditions due to generation of phosgene and other toxic and irritating substances.

| | |
|---------------------------------|--|
| Hazardous Polymerization | Under normal conditions of storage and use, hazardous polymerization will not occur. |
|---------------------------------|--|

Conditions to Avoid

Heat, flames and sparks.

Incompatible Materials

Oxidizing agents. Strong bases. Zinc powders. Aluminum powders. Magnesium powders. Potassium. Sodium, Reactive metals, Alkali metals.

Hazardous Decomposition Products

Hydrogen chlorine, Chlorine, Phosgene, Oxides of Carbon

11. TOXICOLOGICAL INFORMATION**Information on likely routes of exposure****Product Information****Eye Contact**

Causes serious eye irritation. Vapors may cause eye irritation. Contact may cause tearing, redness, a stinging or burning feeling, swelling, and blurred vision.

Skin Contact

Causes skin irritation. May cause effects ranging from mild irritation to severe pain, and possibly burns, depending on the intensity of contact. Skin absorption may occur.

Inhalation

May cause upper respiratory tract irritation and central nervous system depression with symptoms such as confusion, lightheadedness, nausea, vomiting, headache, and fatigue. Causes formation of carbon monoxide in blood which may affect the cardiovascular system and central nervous system. Continued exposure may cause unconsciousness or even death.

Ingestion

Ingestion may cause nausea or vomiting. If vomiting results in aspiration, chemical pneumonia may occur. Absorption through the gastrointestinal tract may produce central nervous system depression.

Component Information

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|----------------------------|-------------------|----------------------|--|
| Dichloromethane 75-09-2 | 985 mg/kg (Rat) | >2,000 mg/kg (Rat) | = 76,000 mg/m ³ (Mouse) 4 h |

Interaction with Other Chemicals Which Enhance toxicity

May potentiate other agents that cause central nervous system (CNS) depression and respiratory system depression, such as alcohol, opiates.

Chronic Toxicity

Liver effects have not been reported in humans, but liver changes have been observed in several long-term studies with laboratory animals. Inhalation of 500 to 3,500 ppm methylene chloride for two years produced only minimal, nonproliferative changes in the liver of Sprague Dawley rats (the no-observed-effect level was equal to 200 ppm) and no liver effects in hamsters. Nonproliferative changes were noted in rats in another study after exposure to 1,000 to 4,000 ppm. Liver enlargement has been observed in mice exposed to 2,000 and 4,000 ppm of methylene chloride for 11 days.

Chronic Effects: May cause liver damage. May cause cancer based on animal data.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|----------------------------|-------|----------|------------------------|------|
| Dichloromethane 75-09-2 | A3 | Group 2B | Reasonably Anticipated | X |

Legend**ACGIH (American Conference of Governmental Industrial Hygienists)**

A3 - Animal Carcinogen

IARC (International Agency for Research on Cancer)

Group 2B - Possibly Carcinogenic to Humans

NTP (National Toxicology Program)

Reasonably Anticipated - Reasonably Anticipated to be a Human Carcinogen

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

| | |
|---------------------------------|--|
| STOT - single exposure | (Single Exposure): Category 1 - Causes damage to cardiovascular system including elevated carboxyhemoglobin levels, Category 3 - Narcotic Effects, Category 3 - Respiratory Tract Irritation |
| STOT - repeated exposure | Category 2 - Blood, Liver. |
| MUTAGENICITY | Company's GHS Self-Classification for mutagen category: Not classified as a mutagen. Positive results have been observed in the Ames test. In mammalian systems, responses have generally been negative. |
| DEVELOPMENTAL TOXICITY | Not classified as a developmental or reproductive toxin per GHS criteria. May cross the placenta. May be excreted in breast milk. No significant developmental effects were observed in female rats and mice exposed to 1,250 ppm during gestation. A similar result was observed in rats exposed to 4,500 ppm before and during gestation. A two-generation inhalation study showed no adverse reproductive effects in rats exposed to as much as 1,500 ppm for 14 weeks. |
| Other Adverse Effects | In confined or poorly ventilated areas, vapors can readily accumulate and can cause unconsciousness and death. Excessive exposure may cause irritation to upper respiratory tract (nose and throat). May cause carboxyhemoglobinemia, thereby impairing the blood's ability to transport oxygen. Minimal anesthetic or narcotic effects may be seen in the range of 500-1000 ppm methylene chloride. Higher levels over 1000 ppm can cause dizziness, drunkenness, and as low as 10,000 ppm, unconsciousness and death. These high levels may also cause cardiac arrhythmias (irregular heartbeats). |
| ASPIRATION HAZARD | Category 2 - May be harmful if swallowed and enters airways |
| GHS HEALTH HAZARDS | <p>GHS: CONTACT HAZARD - SKIN: Category 2 - Causes skin irritation</p> <p>GHS: CONTACT HAZARD - EYE: Category 2A - Causes serious eye irritation</p> <p>GHS: ACUTE TOXICITY - ORAL: Category 4 - Harmful if swallowed</p> <p>GHS: TARGET ORGAN TOXICITY (SINGLE EXPOSURE): Category 1 - Causes damage to cardiovascular system including elevated carboxyhemoglobin levels</p> <p>Category 3 - May cause drowsiness or dizziness</p> <p>Category 3 - May cause respiratory tract irritation</p> <p>GHS: TARGET ORGAN TOXICITY (REPEATED EXPOSURE): Category 2 - May cause damage to Blood and Hepatic System through prolonged or repeated exposures</p> <p>GHS: ASPIRATION HAZARD: Category 2 - May be harmful if swallowed and enters airways</p> <p>GHS: CARCINOGENICITY: Category 2 - Suspected of causing cancer</p> |
| IRRITATION DATA | Methylene Chloride: 810 mg/24 hour(s) skin-rabbit severe; 100 mg/24 hour(s) skin-rabbit moderate; 162 mg eyes-rabbit moderate; 10 mg eyes-rabbit mild; 500 mg/24 hour(s) eyes-rabbit mild Skin Absorbent / Dermal Route: Yes. |
| CARCINOGENICITY COMMENT | Methylene chloride is carcinogenic in experimental animals at a relatively high dose, by route(s) of administration, at site(s), of histologic type(s), or by mechanism(s) that are not considered relevant to worker exposure. Available epidemiological studies do not confirm an increased risk of cancer in humans. Available evidence suggests that this material is not likely to cause cancer in humans except under uncommon or unlikely routes or levels of exposure. |

Numerical measures of toxicity

Not determined

12. ECOLOGICAL INFORMATION

Ecotoxicity

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Component Information

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to microorganisms | Crustacea |
|----------------------------|---|---|---|---|
| Dichloromethane 75-09-2 | 500: 96 h Pseudokirchneriella subcapitata mg/L EC50 500: 72 h Pseudokirchneriella subcapitata mg/L EC50 | 140.8 - 277.8: 96 h Pimephales promelas mg/L LC50 flow-through 262 - 855: 96 h Pimephales promelas mg/L LC50 static 193: 96 h Lepomis macrochirus mg/L LC50 static 193: 96 h Lepomis macrochirus mg/L LC50 flow-through | EC50 = 1 mg/L 24 h EC50 = 2.88 mg/L 15 min | 1532 - 1847: 48 h Daphnia magna mg/L EC50 Static 190: 48 h Daphnia magna mg/L EC50 |

Component Ecotoxicity

96 Hr LC50 Pimephales promelas: 140.8 - 277.8 mg/L [flow-through]
 96 Hr LC50 Pimephales promelas: 262 - 855 mg/L [static]
 96 Hr LC50 Lepomis macrochirus: 193 mg/L [static]
 96 Hr LC50 Lepomis macrochirus: 193 mg/L [flow-through]
 48 Hr EC50 Daphnia magna: 190 mg/L
 48 Hr EC50 Daphnia magna: 1532 - 1847 mg/L
 96 Hr EC50 Pseudokirchneriella subcapitata: >500 mg/L
 72 Hr EC50 Pseudokirchneriella subcapitata: >500 mg/L
 48 Hr LC50 (filter paper) Eisenia foetida: 0.3 mg/cm²
 48 Hr LC50 (filter paper) Eisenia foetida: 304 mg/cm²
 96 Hr LC50 Fathead minnow: 310 mg/L (static)
 96 Hr LC50 Bluegill sunfish: 220 mg/L (static)
 96 Hr LC50 Mysid Shrimp: 256 mg/L
 48 Hr LC50 Daphnia magna: 224 mg/L

Persistence/Degradability

AIR: This material released to the atmosphere will degrade by reaction with hydroxyl radicals with a half-life of several months. It is not subject to direct photo oxidation. SOIL: On land is expected to evaporate rapidly into the atmosphere due to its high vapor pressure. It is poorly adsorbed to soil and can leach into the groundwater. Calculated Adsorption Coefficient (log KOC) is 1.

WATER: This material is subject to rapid evaporation, with estimated evaporative half-lives ranging from 3 to 5.6 hours under moderate mixing condition. This material has a negligible rate of hydrolysis.

Bioaccumulation

Bioconcentration potential in aquatic organisms is low with BCF of 2.

Mobility

| Chemical Name | Partition Coefficient |
|----------------------------|-----------------------|
| Dichloromethane 75-09-2 | 1.25 |

Other Adverse Effects

Not determined

13. DISPOSAL CONSIDERATIONS**Waste Treatment Methods****Disposal of Wastes**

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Contaminated Packaging

Disposal should be in accordance with applicable regional, national and local laws and regulations.

US EPA Waste Number

| Chemical Name | RCRA | RCRA - Basis for Listing | RCRA - D Series Wastes | RCRA - U Series Wastes |
|----------------------------|------|--|------------------------|------------------------|
| Dichloromethane 75-09-2 | U080 | Included in waste streams: F001, F002, F024, F025, F039, K009, K010, K156, K157, K158 | | U080 |

| Chemical Name | RCRA - Halogenated Organic Compounds | RCRA - P Series Wastes | RCRA - F Series Wastes | RCRA - K Series Wastes |
|----------------------------|--------------------------------------|------------------------|--|------------------------|
| Dichloromethane 75-09-2 | Category I - Volatiles | | Toxic waste waste number F025 Waste description: Condensed light ends, spent filters and filter aids, and spent desiccant wastes from the production of certain chlorinated aliphatic hydrocarbons, by free radical catalyzed processes. These chlorinated aliphatic hydrocarbons are those having carbon chain lengths ranging from one to and including five, with varying amounts and positions of chlorine substitution. | |

California Hazardous Waste Status

| Chemical Name | California Hazardous Waste Status |
|----------------------------|-----------------------------------|
| Dichloromethane 75-09-2 | Toxic |

14. TRANSPORT INFORMATION

Note Please see current shipping paper for most up to date shipping information, including exemptions and special circumstances.

DOT
UN/ID No UN1593
Proper Shipping Name Dichloromethane mixture
Hazard Class 6.1
Packing Group III
Reportable Quantity (RQ) 1000 lbs for Dichloromethane

IATA
UN/ID No UN1593
Proper Shipping Name Dichloromethane mixture
Hazard Class 6.1
Packing Group III

IMDG
UN/ID No UN1593
Proper Shipping Name Dichloromethane mixture
Hazard Class 6.1
Packing Group III

15. REGULATORY INFORMATION

International Inventories

| Chemical Name | TSCA | DSL | NDSL | EINECS | ELINCS | ENCS | IECSC | KECL | PICCS | AICS |
|-----------------|---------|-----|------|---------|--------|---------|-------|---------|-------|------|
| Dichloromethane | Present | X | | Present | | Present | X | Present | X | X |

Legend:

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory

DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances

ENCS - Japan Existing and New Chemical Substances

IECSC - China Inventory of Existing Chemical Substances

KECL - Korean Existing and Evaluated Chemical Substances

PICCS - Philippines Inventory of Chemicals and Chemical Substances

AICS - Australian Inventory of Chemical Substances

TSCA 12(b):

Methylene Chloride is subject to TSCA 12(b) annual reporting requirements (per country) De minimis reporting level: 0.1%
TSCA Section(s): 6(a).

TSCA (Toxic Substance Control Act)

TSCA section 6(a). March 27, 2019 Final Rule published for 40 CFR part 751.

Effective May 28, 2019.

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal

CERCLA

| Chemical Name | Hazardous Substances RQs | CERCLA/SARA RQ | Reportable Quantity (RQ) |
|----------------------------|--------------------------|----------------|--|
| Dichloromethane 75-09-2 | 1000 lb 1 lb | | RQ 1000 lb final RQ RQ 454 kg final RQ RQ 1 lb final RQ RQ 0.454 kg final RQ |

SARA 311/312 Hazard Categories

| | |
|-----------------------------------|-----|
| Acute Health Hazard | Yes |
| Chronic Health Hazard | Yes |
| Fire Hazard | No |
| Sudden Release of Pressure Hazard | No |
| Reactive Hazard | No |

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

| Chemical Name | CAS No | Weight-% | SARA 313 - Threshold Values % |
|---------------------------|---------|----------|-------------------------------|
| Dichloromethane - 75-09-2 | 75-09-2 | 60-100 | 0.1 |

CWA (Clean Water Act)

| Chemical Name | CWA - Reportable Quantities | CWA - Toxic Pollutants | CWA - Priority Pollutants | CWA - Hazardous Substances |
|-----------------|-----------------------------|------------------------|---------------------------|----------------------------|
| Dichloromethane | | X | X | |

US State Regulations**California Proposition 65**

This product contains the following Proposition 65 chemicals.

| Chemical Name | California Proposition 65 |
|---------------------------|---------------------------|
| Dichloromethane - 75-09-2 | Carcinogen |

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania |
|----------------------------|------------|---------------|--------------|
| Dichloromethane 75-09-2 | X | X | X |

| |
|------------------------------|
| 16. OTHER INFORMATION |
|------------------------------|

| | | | | |
|--------------------|-----------------------|---------------------|-------------------------|----------------------------|
| <u>NFPA</u> | Health Hazards | Flammability | Instability | Special Hazards |
| | 2 | 1 | 0 | Not determined |
| <u>HMIS</u> | Health Hazards | Flammability | Physical Hazards | Personal Protection |
| | 2 | 1 | 0 | Not determined |

Issue Date: 15-May-2012
Revision Date: October 8th, 2020
Revision Note: Added GHS codes, additional information in each section.

Disclaimer

The supplier disclaims all expressed or implied warranties of merchantability or fitness for a specific use, with respect to the product or the information provided herein, except for conformation to contracted specifications. All information appearing herein is based upon data obtained from manufacturers and/or recognized technical sources. While the information is believed to be accurate, we make no representations as to its accuracy or sufficiency. Conditions of use are beyond our control, and therefore users are responsible for verifying the data under their own operating conditions to determine whether the product is suitable for their particular purposes and they assume all risks of their handling and disposal of the product. Users also assume all risks in regards to the publication or use of, or reliance upon information contained herein. This information relates only to the product designated herein, and does not relate to its use in combination with any other material or process.

End of Safety Data Sheet



SAFETY DATA SHEET

1. Identification

| | | |
|--------------------------------------|---|--|
| Product identifier | Oatey Dark Cutting Oil | |
| Other means of identification | | |
| Product code | 1698EC | |
| Synonyms | Part Numbers: 30203, 30204, 30205 | |
| Recommended use | Cutting Oil | |
| Recommended restrictions | None known. | |
| | Manufacturer | Distributor |
| Company Name | Oatey Co. | Oatey Canada Supply Chain Services Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 | 145 Walker Drive Brampton, ON L6T 5P5, Canada |
| Telephone | 216-267-7100 | |
| E-mail | info@oatey.com | |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) | |
| Emergency First Aid | 1-877-740-5015 | |
| Contact person | MSDS Coordinator | |

2. Hazard(s) identification

| | |
|---------------------------------|--|
| Physical hazards | Not classified. |
| Health hazards | Not classified. |
| Environmental hazards | Not classified. |
| Label elements | |
| Hazard symbol | None. |
| Signal word | None. |
| Hazard statement | The mixture does not meet the criteria for classification. |
| Precautionary statement | |
| Prevention | Not applicable. |
| Response | Not applicable. |
| Storage | Not applicable. |
| Disposal | Not applicable. |
| Other hazards | None known. |
| Supplemental information | Used oil may contain harmful impurities.. |

3. Composition/information on ingredients

Mixtures

The components are not hazardous or are below required disclosure limits.

4. First-aid measures

| | |
|---------------------|---|
| Inhalation | Move to fresh air. Call a physician if symptoms develop or persist. |
| Skin contact | Wash off with soap and plenty of water. Remove contaminated clothing and shoes. Get medical attention if irritation develops and persists. |
| Eye contact | Rinse immediately with plenty of water for at least 15 minutes. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth with water. Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention if symptoms occur. |

| | |
|---|--|
| Most important symptoms/effects, acute and delayed | Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea. |
| Indication of immediate medical attention and special treatment needed | Treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Water fog. Foam. Dry chemical powder, carbon dioxide, sand or earth may be used for small fires only. |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. Carbon oxides. Phosphorus oxides. Sulfur oxides. Hydrogen chloride. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Avoid contact with skin and eyes. Ensure adequate ventilation. |
| Methods and materials for containment and cleaning up | In case of spills, beware of slippery floors and surfaces. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Store in original tightly closed container. Keep in a cool place. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

| | |
|--|---|
| Occupational exposure limits | No exposure limits noted for ingredient(s). |
| Biological limit values | No biological exposure limits noted for the ingredient(s). |
| Appropriate engineering controls | Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. |
| Individual protection measures, such as personal protective equipment | |
| Eye/face protection | If risk of splashing, wear safety goggles or face shield. |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. Neoprene, nitrile, polyethylene or PVC. |
| Other | Wear suitable protective clothing. |
| Respiratory protection | In case of insufficient ventilation, wear suitable respiratory equipment. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

Oatey Dark Cutting Oil
932643 Version #: 02 Revision date: 11-April-2018 Issue date: 28-June-2016

| | |
|---|---|
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Dark |
| Odor | Slight hydrocarbon. |
| Odor threshold | Not available. |
| pH | Not applicable. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | Not available. |
| Flash point | 339.8 °F (171.0 °C) |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not applicable. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | > 1 estimated |
| Relative density | 0.92 g/ml |
| Relative density temperature | 77 °F (25 °C) |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | > 6 Based on information on similar products. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Kinematic viscosity | 181 SUS |
| Kinematic viscosity temperature | 100 °F (37.78 °C) |
| Oxidizing properties | Not oxidizing. |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. This product may react with strong oxidizing agents. |
| Conditions to avoid | Extreme temperatures. Protect against direct sunlight. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | None expected under normal conditions of use. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | No adverse effects due to inhalation are expected. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |

| | |
|---|---|
| Ingestion | Expected to be a low ingestion hazard. |
| Symptoms related to the physical, chemical and toxicological characteristics | Direct contact with eyes may cause temporary irritation. |
| Information on toxicological effects | |
| Acute toxicity | Not expected to be acutely toxic. |
| Skin corrosion/irritation | Prolonged exposure may cause skin irritation. Prolonged exposure or repeated exposure without proper cleaning can clog pores of the skin. |
| Serious eye damage/eye irritation | Slightly irritating. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not a respiratory sensitizer. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | Not available. |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not an aspiration hazard. |
| Further information | Used oils may contain harmful impurities that have accumulated during use. The concentration of such impurities will depend on use and may present risks to health and the environment on disposal. Used oil should be handled with caution and skin contact should be avoided when possible. |

12. Ecological information

| | |
|--|--|
| Ecotoxicity | The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment. |
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | |
| Partition coefficient n-octanol / water (log Kow) | > 6, Based on information on similar products. |
| Mobility in soil | Floats on water If it enters soil, it will absorb to soil particles and will not be mobile. |
| Other adverse effects | No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component. |

13. Disposal considerations

| | |
|--|--|
| Disposal instructions | Collect and reclaim or dispose in sealed containers at licensed waste disposal site. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. |

14. Transport information

| | |
|-------------|-----------------------------------|
| TDG | Not regulated as dangerous goods. |
| IATA | Not regulated as dangerous goods. |
| IMDG | Not regulated as dangerous goods. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

Canadian regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

Controlled Drugs and Substances Act

Not regulated.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Not regulated.

International regulations

Stockholm Convention

Not applicable.

Rotterdam Convention

Not applicable.

Kyoto protocol

Not applicable.

Montreal Protocol

Not applicable.

Basel Convention

Not applicable.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--------------------------------|-------------------------------|
| Canada | Domestic Substances List (DSL) | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information

Issue date 28-June-2016

Revision date -

Version # 01

Disclaimer Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.



SAFETY DATA SHEET

Oil Eater® Cleaner/Degreaser

In compliance with International Regulations: GHS -SDS Effective Date: September 2019
 Federal regulations: CFR 29 and 42 State: Illinois Public Act 83-240
 Applicable Items: AOD0435430 , AOD1G35437, AOD5G35438, AOD3035444,
 AOD5535389, AOD27535001

SECTION 1 – CHEMICAL PRODUCT & COMPANY IDENTIFICATION

GHS Product Identifier: Oil Eater® Degreaser/Cleaner Other Identification means: Aqueous Surfactant Solution
 Uses: General Purpose Cleaning
 Manufacturer Name: Kafko International. Ltd.
 Address: 3555 W Howard St. Skokie, IL. 60076-4012
 Phone: (847) 763-0333 Fax: (847) 763-0334
 Emergency Contact: Chemtrec (800) 424-9300

SECTION 2 - HAZARDS IDENTIFICATION

GHS Classification:

| Health | Environmental | Physical |
|--|--------------------------------|---------------|
| Acute Toxicity – Not considered an oral, dermal, or inhalation toxin | Non-toxic to Aquatic Organisms | Non Flammable |
| Eye - Eye Irritant Category 2B | | |
| Skin Corrosion – Skin Irritant Category 2 | | |
| Skin Sensitization – Not considered a skin sensitizer | | |
| Mutagenicity – Not considered a mutagenic compound | | |
| Carcinogenicity – Not considered a carcinogen | | |
| Target Organ Toxicity – Single Exposure: Not considered a TOS toxin - Repeated Exposure: Not considered a TOS toxin | | |

Labelling:  WARNING: Causes Eye/Skin Irritation

Precautionary Statement: Wash skin / eyes thoroughly after contact. Wear protective glasses/gloves. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. If on skin: Wash with plenty of water. If skin irritation occurs: Get medical attention/advice. Take off contaminated clothing and wash before reuse.

SECTION 3 - INGREDIENTS

| MATERIAL | CAS # | % by WT. |
|------------------------------------|------------|----------|
| Sodium metasilicate - pentahydrate | 6834-92-0 | < 5% |
| 2 Butoxyethanol | 111-76-2 | < 5 % |
| Linear Alcohol Ethoxylate | 68439-46-3 | < 5 % |

SECTION 4 – FIRST AID MEASURES

Skin Contact: Remove contaminated clothing. Rinse skin with warm water for 15 minutes. If irritation occurs seek medical attention.
 Eye Contact: Flush with water for 15 minutes. If irritation persists seek medical attention.
 Ingestion: Drink large quantities of water. Call physician immediately.
 Inhalation: Remove to fresh air immediately. If irritation persists, contact physician

SECTION 5 - FIRE FIGHTING MEASURES

Flammability of the product: Non Flammable
 Flash Point: None
 Extinguishing Media: Dry Chemical, Water Fog, Co2, Sand
 Fire Fighting Procedures: Wear Self Contained Breathing Apparatus
 Products of combustion: Carbon oxides
 Fire Hazards in the presence of other chemicals: No specific information is available
 Unusual Fire Hazards: None Expected

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Small Spill: Absorb with industrial absorbent. Dispose of in accordance with local, state & federal regulations. Rinse residue to avoid slippery conditions.
 Large Spill: Non-flammable material. Wear chemical resistant gloves, boots and goggles. Stop the source of the spill. Collect the spill using mechanical means. Waste disposal method: Fully water-soluble. Follow all local, state and federal regulations.

SECTION 7 – HANDLING & STORAGE

Precautions: Store containers upright in cool dry place
 Storage: Store product in original containers. Do not store in metal vessels
 Other precautions: Keep out of reach of children

SECTION 8 – EXPOSURE CONTRIOLS & PERSONAL PROTECTION

| Chemical name | type | Exposure Limit Values | Source |
|-----------------|------|-----------------------|---|
| 2-butoxyethanol | TWA | 20 ppm | US. ACGIH Threshold Limit Values (01 2010) |
| | PEL | 50 ppm 240 mg/m3 | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |

Engineering Controls: No control measures are required under normal conditions. If large quantities are involved use NIOSH or MSHA approved respirator. Limited personal exposures exist with this product. As always keep airborne vapors below TLV limits. Ensure that proper work-station safety mechanisms are operative and tested including showers and eyewash stations.

Personal Protection Equipment: Safety glasses are recommended, chemical resistant gloves aprons and suits are optional for those with dermatological sensitivity.

SECTION 9 - PHYSICAL DATA

Boiling point: 200° F
 Voc content: .42 LBS/GAL
 Vapor pressure: 4.0 mm Hg @ 77 F (ASTM D-2879)
 Solubility in water: COMPLETE
 Appearance and odor: Clear Solution With A Characteristic Odor
 Specific gravity: 1.038 (ASTM 112H @ 20° C)
 Evaporation rate: 1.2 (water=1.0)
 pH: 12.4

SECTION 10 – STABILITY & REACTIVITY DATA

Conditions To Avoid: Extreme Heat
 Stability: Stable
 Incompatibility: Acids, Strong Oxidizers
 Hazardous Polymerization: Will Not Occur
 Corrosivity: Non-corrosive

SECTION 11 - TOXICOLOGICAL DATA

Signs and Symptoms of Overexposure: Redness of eyes or skin due to contact with product, unusual headache.
 Acute Effects: Eye Contact: may cause redness & irritation Skin Contact: may cause redness & irritation

| Acute Toxicity Values | | |
|-----------------------------------|---|------------------------|
| Test | Results | Basis |
| Oral Toxicity (Rats) | Greater than 5000mg/kg | FHSA/CPSC |
| Dermal Toxicity (Rabbits) | Greater than 2000mg/kg | OECD 402 |
| Inhalation Toxicity, Vapor (Rats) | Greater than 2.3mg/L @ 4 hours ATE > 20.0 mg/L | OECD 403 Additivity |
| Eye Irritation (Rabbits) | Eye Irritant Category 2B | FHSA/CPSC |
| Dermal Irritation (Rabbits) | Mild Skin Irritant | OECD 404 |

This product is not considered a carcinogen by OSHA, NTP, or IARC.

SECTION 12 - Ecological Information

Persistence and degradability: This product is expected to be inherently biodegradable.
 Bio-accumulative potential: There is no evidence to suggest bioaccumulation will occur.
 Mobility: Accidental spillage may lead to penetration in the soil and groundwater. However, there is no evidence that this would cause adverse ecological effects.

| Test | Results | Comments |
|----------------|---|-------------------|
| Acute Toxicity | Non-toxic to Aquatic Organisms Fathead Minnow (Pimephales promelas) LC50 > 200mg/L at 96 hours | Product Test Data |

SECTION 13 – DISPOSAL CONSIDERATIONS

Waste Disposal: Dispose of in accordance with local, state & federal regulations.
 Rinse residue to avoid slippery conditions.

SECTION 14 – TRANSPORT INFORMATION

Not regulated

SECTION 15 – REGULATORY INFORMATION

All components used in this compound appear on the TSCA Inventory
 Federal/National: 2 Butoxyethanol - This chemical is subject to S.A.R.A. Title III section 313 part 372 reporting. The hazard communication standard requires that mixtures such as this product be assumed to present the same health hazards, as do the components that constitute at least 1% of the mixture. OSHA has, however, noted that the health hazards of the individual components may be reduced or altered by including them in a mixture.

Food Facility Categories: Per federal guidelines as detailed in FDA 21 CFR:
 (A1) General Purpose Cleaners (A4) Floor & Wall Degreasers (A8) Degreasers/Carbon Removers

SECTION 16 – OTHER INFORMATION

Performance Certifications: Aircraft: Passed Boeing D6-17487 Rev P Exterior and General Cleaners and Liquid Waxes, Polishes and Polishing Compounds when diluted with 5 parts water.
 For further questions regarding the safe use of this product consult our web page www.oileater.com. The Information Herein Is Based On Data Considered To Be Accurate As Of The Date Of The Presentation Of This Safety Data Sheet. No Warranty Or Representation, Expressed Or Implied, Is Made As To The Accuracy Or Completeness Of The Foregoing Data And Safety Information. The User Assumes All Liability For Any Damage Or Injury Resulting From Abnormal Uses, For Any Failure To Adhere To Recommended Practices, Or For Any Hazards Inherent In The Nature Of The Product.

Safety Data Sheet

acc. to OSHA HCS

Printing date 09/29/2014

Revised On 09/29/2014

1 Identification of the substance and manufacturer

Trade name: STRIPE FLUORESCENT ORANGE

Product code: 0000200657

Product category: PC9a Paints and coatings.

Manufacturer/Supplier: Seymour of Sycamore
917 Crosby Avenue
Sycamore, IL 60178
Phone: 815-895-9101 www.seymourpaint.com

Emergency telephone number: CHEMTEL 1-800-255-3924, 813-248-0585 *if located outside the U.S.*



2 Hazard(s) identification

Classification of the substance or mixture

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 Carc. 2 H351 Suspected of causing cancer.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.
 Eye Irrit. 2A H319 Causes serious eye irritation.

GHS Hazard pictograms



GHS02 GHS04 GHS07 GHS08

Signal word

Hazard statements

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 Causes serious eye irritation.
 Suspected of causing cancer.

Precautionary statements

May cause damage to organs through prolonged or repeated exposure.
 If medical advice is needed, have product container or label at hand.
 Keep out of reach of children.
 Read label before use.
 Obtain special instructions before use.
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not spray on an open flame or other ignition source.
 Pressurized container: Do not pierce or burn, even after use.
 Wash hands thoroughly after handling.
 Do not handle until all safety precautions have been read and understood.
 Wear protective gloves/protective clothing/eye protection/face protection.
 Do not breathe dust/fume/gas/mist/vapours/spray.
 Use personal protective equipment as required.
 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists, get medical advice/attention.
 IF exposed or concerned: Get medical advice/attention.
 Get medical advice/attention if you feel unwell.
 If eye irritation persists: Get medical advice/attention.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F.
 Store in a well-ventilated place.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|-------------------|--------|
| 64742-89-8 | VM&P Naphtha | 18.28% |
| 74-98-6 | propane | 15.13% |
| 1317-65-3 | Calcium Carbonate | 11.75% |
| 106-97-8 | n-butane | 8.88% |
| 64742-47-8 | Mineral Spirits | 3.85% |
| 110-19-0 | isobutyl acetate | 3.2% |

4 First-aid measures

After inhalation: Supply fresh air; consult doctor in case of complaints.
After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water. Then consult a doctor.
After swallowing: Rinse mouth with water. Do not induce vomiting.
Most important symptoms and effects: Dizziness
Indication of any immediate medical attention needed: No further relevant information available.

5 Fire-fighting measures

Extinguishing agents: CO2, extinguishing powder or water spray. Fight larger fires with water spray.

Safety Data Sheet

acc. to OSHA HCS

Printing date 09/29/2014

Revised On 09/29/2014

Trade name: STRIPE FLUORESCENT ORANGE

Special hazards: Can form explosive gas-air mixtures.

Protective equipment for firefighters: A respiratory protective device may be necessary.

(Contd. of page 1)

6 Accidental release measures

Personal precautions, protective equipment and emergency procedures: Use respiratory protective device against the effects of fumes/dust/aerosol.

Methods and material for containment and cleaning up: Absorb liquid components with liquid-binding material.

7 Handling and storage

Precautions for safe handling: Use only in well ventilated areas.

Storage requirements: Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up.

8 Exposure controls/personal protection

Components with limit values that require monitoring at the workplace:

74-98-6 propane

PEL (USA) Long-term value: 1800 mg/m³, 1000 ppm
 REL (USA) Long-term value: 1800 mg/m³, 1000 ppm
 TLV (USA) refer to Appendix F

106-97-8 n-butane

REL (USA) Long-term value: 1900 mg/m³, 800 ppm
 TLV (USA) Short-term value: 2370 mg/m³, 1000 ppm

110-19-0 isobutyl acetate

PEL (USA) Long-term value: 700 mg/m³, 150 ppm
 REL (USA) Long-term value: 700 mg/m³, 150 ppm
 TLV (USA) Long-term value: 713 mg/m³, 150 ppm

Hygienic protection: Wash hands after use.
Do not eat or drink while working.

Breathing equipment: A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene.

Hand protection: Protective gloves. The glove material must be impermeable and resistant to the substance.

Eye protection: Tightly sealed goggles

9 Physical and chemical properties

Appearance: Aerosol.
Odor: Aromatic
Odor threshold: Not determined.
pH-value: Not determined.
Melting point/Melting range: Undetermined.
Boiling point: -44 °C (-47 °F)
Flash point: -19 °C (-2 °F)
Flammability (solid, gas): Extremely flammable.
Decomposition temperature: Not determined.
Auto igniting: Product is not self-igniting.
Danger of explosion: In use, may form flammable/explosive vapour-air mixture.
Lower Explosion Limit: 1.7 Vol %
Upper Explosion Limit: 10.9 Vol %
Vapor pressure: Not determined.
Relative Density: Between 0.77 and 0.85 (Water equals 1.00)
Vapour density: Not determined.
Evaporation rate: Not applicable.
Partition coefficient: n-octonal/water: Not determined.
Solubility: Not determined.
Viscosity: Not determined.
VOC content: 525.5 g/l / 4.39 lb/gl
VOC content (less exempt solvents): 50.5 %
Water: 24.3 %
MIR Value: 0.57

(Contd. on page 3)

US4

Safety Data Sheet

acc. to OSHA HCS

Printing date 09/29/2014

Revised On 09/29/2014

Trade name: STRIPE FLUORESCENT ORANGE

(Contd. of page 2)

Solids content: 24.2 %

10 Stability and reactivity

Reactivity: Stable at normal temperatures.
Conditions to avoid: Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures.
Chemical stability: Not fully evaluated.
Possibility of hazardous reactions: No dangerous reactions known.
Incompatible materials: No further relevant information available.
Hazardous decomposition: No dangerous decomposition products known.

11 Toxicological information

LD/LC50 values that are relevant for classification:

106-97-8 n-butane

Inhalative LC50/4 h 658 mg/l (rat)

110-19-0 isobutyl acetate

Oral LD50 4763 mg/kg (rbt)

Information on toxicological effects: No data available.
Sensitization: No sensitizing effects known.

Carcinogenic categories

IARC (International Agency for Research on Cancer)

None of the ingredients is listed.

NTP (National Toxicology Program)

None of the ingredients is listed.

OSHA-Ca (Occupational Safety & Health Administration)

None of the ingredients is listed.

12 Ecological information

Aquatic toxicity: Hazardous for water, do not empty into drains.
Persistence and degradability: The product is degradable after prolonged exposure to natural weathering processes.
Bioaccumulative potential: No further relevant information available.
Mobility in soil: No further relevant information available.
Other adverse effects: No further relevant information available.

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.
Recommendation: Completely empty cans should be recycled.

14 Transport information

UN-Number UN1950
DOT Aerosols, flammable
ADR 1950 Aerosols
Transport hazard class(es):
Class 2.1
Marine pollutant: No
Special precautions for user: Warning: Gases
EMS Number: F-D,S-U
Quantity limitations On passenger aircraft/rail: 75 kg
 On cargo aircraft only: 150 kg

ADR
Excepted quantities (EQ) Code: E0
 Not permitted as Excepted Quantity

IMDG

Limited quantities (LQ) 1L
Excepted quantities (EQ) Code: E0
 Not permitted as Excepted Quantity

Packaging Group: --
UN "Model Regulation": UN1950, Aerosols, 2.1

US4
(Contd. on page 4)

Safety Data Sheet

acc. to OSHA HCS

Printing date 09/29/2014

Revised On 09/29/2014

Trade name: STRIPE FLUORESCENT ORANGE

(Contd. of page 3)

15 Regulatory information

SARA Section 355 (extremely hazardous substances):

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

None of the ingredients is listed.

CPSC: This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.

California Proposition 65 chemicals known to cause cancer:

100-41-4 ethyl benzene

EPA:

110-19-0 isobutyl acetate

D

16 Other information

Contact: Regulatory Affairs

US4

1. Identification

| | |
|---|--|
| Product identifier | Oatey Purple Primer- NSF Listed for PVC and CPVC |
| Other means of identification | |
| Product code | 1402E |
| Synonyms | Part Numbers: 30755(TV), 30756(TV), 30757(TV), 30758, 30759, 30927 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | Oatey Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |

| | |
|--|--|
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------------|------------|-------|
| Acetone | 67-64-1 | 25-40 |
| Cyclohexanone | 108-94-1 | 25-40 |
| Furan, Tetrahydro- | 109-99-9 | 15-30 |
| Methyl ethyl ketone | 78-93-3 | 15-30 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value |
|-----------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 50 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 200 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 50 ppm |
| | STEL | 300 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|-----------------------------------|------|-----------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | | 250 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | TWA | 590 mg/m3 |
| | | 200 ppm |
| | STEL | 885 mg/m3 |
| | TWA | 300 ppm |
| | | 590 mg/m3 |
| | | 200 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines**US - California OELs: Skin designation**

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment**Eye/face protection**

Face shield is recommended. Wear safety glasses with side shields (or goggles).

| | |
|---------------------------------------|---|
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|--|----------------------------------|
| Physical state | Liquid. |
| Form | Translucent liquid. |
| Color | Purple |
| Odor | Solvent. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 151 °F (66.11 °C) |
| Flash point | 14.0 - 23.0 °F (-10.0 - -5.0 °C) |
| Evaporation rate | 5.5 - 8 |
| Flammability (solid, gas) | Not available. |

Upper/lower flammability or explosive limits

| | |
|--|----------------------------|
| Flammability limit - lower (%) | 1.8 |
| Flammability limit - upper (%) | 11.8 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.84 +/- 0.02 @20°C |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Bulk density | 7 lb/gal |
| VOC (Weight %) | < 550 g/l SQACMD Method 24 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |

Hazardous decomposition products No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics

Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

Cyclohexanone (CAS 108-94-1) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

| | |
|---|---|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|-----------------------------------|--|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquids, n.o.s. (Methyl ethyl ketone RQ = 26274 LBS, Acetone RQ = 13130 LBS) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions IB2, T7, TP1, TP8, TP28
Packaging exceptions 150
Packaging non bulk 202
Packaging bulk 242

IATA

UN number UN1993
UN proper shipping name Flammable liquid, n.o.s. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3H
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1993
UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Methyl ethyl ketone, Acetone)
Transport hazard class(es)
Class 3
Subsidiary risk -
Packing group II
Environmental hazards
Marine pollutant No.
EmS F-E, S-E
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

Methyl ethyl ketone (CAS 78-93-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

Methyl ethyl ketone (CAS 78-93-3) 6714

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1)

Furan, Tetrahydro- (CAS 109-99-9)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 27-May-2015 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

SECTION 1: Product and company identification

1.1. Product identifier

Product form : Substance
Trade name : Oxygen, MediPure Oxygen
CAS-No. : 7782-44-7
Formula : O₂
Other means of identification : Oxygen, Compressed; MediPure Oxygen; Aviator's Breathing Oxygen; USP Oxygen; Oxygen - Diving Grade

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Medical applications.
Industrial use
Diving Gas (Underwater Breathing)

1.3. Details of the supplier of the safety data sheet

Linde Inc.
10 Riverview Drive
Danbury, CT 06810-6268 - USA

1.4. Emergency telephone number

Emergency number : Onsite Emergency: 1-800-645-4633

CHEMTREC, 24hr/day 7days/week
— Within USA: 1-800-424-9300, Outside USA: 001-703-527-3887
(collect calls accepted, Contract 17729)

SECTION 2: Hazard identification

2.1. Classification of the substance or mixture


GHS US classification

Ox. Gas 1 H270
Press. Gas (Comp.) H280

2.2. Label elements

GHS US labeling

Hazard pictograms (GHS US) :



Signal word (GHS US) : Danger
Hazard statements (GHS US) : H270 - MAY CAUSE OR INTENSIFY FIRE; OXIDIZER
H280 - CONTAINS GAS UNDER PRESSURE; MAY EXPLODE IF HEATED
Precautionary statements (GHS US) : P202 - Do not handle until all safety precautions have been read and understood.
P220 - Keep/Store away from combustible materials, clothing
P244 - Keep reduction valves/valves and fittings free from oil and grease
P271+P403 - Use and store only outdoors or in a well-ventilated place.
P370+P376 - IN CASE OF FIRE: Stop leak if safe to do so
CGA-PG05 - Use a back flow preventive device in the piping.



Oxygen, compressed



Safety Data Sheet P-4638

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

CGA-PG20+CGA-PG10 - Use only with equipment of compatible materials of construction and rated for cylinder pressure.
CGA-PG22 - Use only with equipment cleaned for oxygen service.
CGA-PG12 - Do not open valve until connected to equipment prepared for use.
CGA-PG21 - Open valve slowly.
CGA-PG06 - Close valve after each use and when empty.
CGA-PG02 - Protect from sunlight when ambient temperature exceeds 52°C (125°F).

2.3. Other hazards

Other hazards not contributing to the classification : Breathing 80 percent or more oxygen at atmospheric pressure for more than a few hours may cause nasal stuffiness, cough, sore throat, chest pain, and breathing difficulty. Breathing oxygen at higher pressure increases the likelihood of adverse effects within a shorter time period. Breathing pure oxygen under pressure may cause lung damage and central nervous system (CNS) effects, resulting in dizziness, poor coordination, tingling sensation, visual and hearing disturbances, muscular twitching, unconsciousness, and convulsions. Breathing oxygen under pressure may cause prolongation of adaptation to darkness and reduced peripheral vision.

2.4. Unknown acute toxicity (GHS US)

No data available

SECTION 3: Composition/Information on ingredients

3.1. Substances

Name : Oxygen, compressed
CAS-No. : 7782-44-7

| Name | Product identifier | % |
|--------|---------------------|------------|
| Oxygen | (CAS-No.) 7782-44-7 | 99.5 - 100 |

3.2. Mixtures

Not applicable

SECTION 4: First aid measures

4.1. Description of first aid measures

First-aid measures after inhalation : Move to fresh air. Get medical advice/attention.
First-aid measures after skin contact : Adverse effects not expected from this product.
First-aid measures after eye contact : Adverse effects not expected from this product. In case of eye irritation: Rinse immediately with plenty of water. Consult an ophthalmologist if irritation persists.
First-aid measures after ingestion : Ingestion is not considered a potential route of exposure.

4.2. Most important symptoms and effects, both acute and delayed

No additional information available

4.3. Indication of any immediate medical attention and special treatment needed

None.

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media : Vigorously accelerates combustion. Use media appropriate for surrounding fire. Water (e.g. safety shower) is the preferred extinguishing media for clothing fires.

5.2. Special hazards arising from the substance or mixture

Fire hazard : Oxidizing agent; vigorously accelerates combustion. Contact with flammable materials may cause fire or explosion.



Oxygen, compressed



Safety Data Sheet P-4638

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

5.3. Advice for firefighters

- Firefighting instructions : High-pressure, oxidizing gas.

Evacuate all personnel from the danger area. Use self-contained breathing apparatus (SCBA) and protective clothing. Immediately cool containers with water from maximum distance. Stop flow of gas if safe to do so, while continuing cooling water spray. Remove ignition sources if safe to do so. Remove containers from area of fire if safe to do so. On-site fire brigades must comply with OSHA 29 CFR 1910.156 and applicable standards under 29 CFR 1910 Subpart L—Fire Protection.
- Special protective equipment for fire fighters : Standard protective clothing and equipment (Self Contained Breathing Apparatus) for fire fighters.
- Specific methods : Use fire control measures appropriate for the surrounding fire. Exposure to fire and heat radiation may cause gas containers to rupture. Cool endangered containers with water spray jet from a protected position. Prevent water used in emergency cases from entering sewers and drainage systems.

Stop flow of product if safe to do so.

Use water spray or fog to knock down fire fumes if possible.
- Other information : Heat of fire can build pressure in container and cause it to rupture. Containers are equipped with a pressure relief device. (Exceptions may exist where authorized by DOT.) No part of the container should be subjected to a temperature higher than 125°F (52°C). Smoking, flames, and electric sparks in the presence of enriched oxygen atmospheres are potential explosion hazards.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

- General measures : Prevent from entering sewers, basements and workpits, or any place where its accumulation can be dangerous. Ensure adequate air ventilation. Eliminate ignition sources. Evacuate area. Try to stop release. Monitor concentration of released product. Wear self-contained breathing apparatus when entering area unless atmosphere is proven to be safe. Stop leak if safe to do so.
- 6.1.1. For non-emergency personnel : No additional information available
- 6.1.2. For emergency responders : No additional information available

6.2. Environmental precautions

Try to stop release.

6.3. Methods and material for containment and cleaning up

No additional information available

6.4. Reference to other sections

See also sections 8 and 13.



Oxygen, compressed



Safety Data Sheet P-4638

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

SECTION 7: Handling and storage

7.1. Precautions for safe handling

- Precautions for safe handling : Wear leather safety gloves and safety shoes when handling cylinders. Protect cylinders from physical damage; do not drag, roll, slide or drop. While moving cylinder, always keep in place removable valve cover. Never attempt to lift a cylinder by its cap; the cap is intended solely to protect the valve. When moving cylinders, even for short distances, use a cart (trolley, hand truck, etc.) designed to transport cylinders. Never insert an object (e.g. wrench, screwdriver, pry bar) into cap openings; doing so may damage the valve and cause a leak. Use an adjustable strap wrench to remove over-tight or rusted caps. Slowly open the valve. If the valve is hard to open, discontinue use and contact your supplier. Close the container valve after each use; keep closed even when empty. Never apply flame or localized heat directly to any part of the container. High temperatures may damage the container and could cause the pressure relief device to fail prematurely, venting the container contents. For other precautions in using this product, see section 16.
- Safe use of the product : **The suitability of this product as a component in underwater breathing gas mixtures** is to be determined by or under the supervision of personnel experienced in the use of underwater breathing gas mixtures and familiar with the physiological effects, methods employed, frequency and duration of use, hazards, side effects, and precautions to be taken.

7.2. Conditions for safe storage, including any incompatibilities

- Storage conditions : Store only where temperature will not exceed 125°F (52°C). Post "No Smoking/No Open Flames" signs in storage and use areas. There must be no sources of ignition. Separate packages and protect against potential fire and/or explosion damage following appropriate codes and requirements (e.g. NFPA 30, NFPA 55, NFPA 70, and/or NFPA 221 in the U.S.) or according to requirements determined by the Authority Having Jurisdiction (AHJ). Always secure containers upright to keep them from falling or being knocked over. Install valve protection cap, if provided, firmly in place by hand when the container is not in use. Store full and empty containers separately. Use a first-in, first-out inventory system to prevent storing full containers for long periods. For other precautions in using this product, see section 16.

OTHER PRECAUTIONS FOR HANDLING, STORAGE, AND USE: When handling product under pressure, use piping and equipment adequately designed to withstand the pressures to be encountered. Never work on a pressurized system. Use a back flow preventive device in the piping. Store and use with adequate ventilation. If a leak occurs, close the container valve and blow down the system in a safe and environmentally correct manner in compliance with all international, federal/national, state/provincial, and local laws; then repair the leak. Never place a container where it may become part of an electrical circuit.

7.3. Specific end use(s)

None.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Oxygen, compressed (7782-44-7) | |
|--------------------------------|-----------------|
| ACGIH | Not established |
| USA OSHA | Not established |
| Oxygen (7782-44-7) | |
| ACGIH | Not established |
| USA OSHA | Not established |

8.2. Exposure controls

- Appropriate engineering controls : Avoid oxygen rich (>23.5%) atmospheres. Use a local exhaust system with sufficient flow velocity to maintain an adequate supply of air in the worker's breathing zone. Mechanical (general): General exhaust ventilation may be acceptable if it can maintain an adequate supply of air.
- Eye protection : Wear safety glasses with side shields.



Oxygen, compressed



Safety Data Sheet P-4638

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

- Skin and body protection : Wear metatarsal shoes and work gloves for cylinder handling, and protective clothing where needed. Wear appropriate chemical gloves during cylinder changeout or wherever contact with product is possible. Select per OSHA 29 CFR 1910.132, 1910.136, and 1910.138. As needed for welding, wear hand, head, and body protection to help prevent injury from radiation and sparks. (See ANSI Z49.1.) At a minimum, this includes welder's gloves and protective goggles, and may include arm protectors, aprons, hats, and shoulder protection as well as substantial clothing.
- Respiratory protection : When workplace conditions warrant respirator use, follow a respiratory protection program that meets OSHA 29 CFR 1910.134, ANSI Z88.2, or MSHA 30 CFR 72.710 (where applicable). Use an air-supplied or air-purifying cartridge if the action level is exceeded. Ensure that the respirator has the appropriate protection factor for the exposure level. If cartridge type respirators are used, the cartridge must be appropriate for the chemical exposure. For emergencies or instances with unknown exposure levels, use a self-contained breathing apparatus (SCBA).

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

- Physical state : Gas
- Appearance : Colorless gas.
- Molecular mass : 32 g/mol
- Color : Colorless.
- Odor : No odor warning properties.
- Odor threshold : No data available
- pH : Not applicable.
- Relative evaporation rate (butyl acetate=1) : No data available
- Relative evaporation rate (ether=1) : Not applicable.
- Melting point : -219 °C (-362°F)
- Freezing point : No data available
- Boiling point : -183 °C (-297°F)
- Flash point : Not applicable.
- Critical temperature : -118.6 °C (-181.48°F)
- Auto-ignition temperature : Not applicable.
- Decomposition temperature : No data available
- Flammability (solid, gas) : No data available
- Vapor pressure : Not applicable.
- Critical pressure : 50.4 bar (731.4 psia)
- Relative vapor density at 20 °C : 0.0827 lb/ft³ (1.325 kg/m³) absolute vapor density at 70°F/21.1°C, 1 atm
- Relative density : 1.1
- Density : 1.4289 kg/m³ (at 21.1 °C)
- Relative gas density : 1.1
- Solubility : Water: 39 mg/l
- Log Pow : Not applicable.
- Log Kow : Not applicable.
- Viscosity, kinematic : Not applicable.
- Viscosity, dynamic : Not applicable.
- Explosive properties : Not applicable.
- Oxidizing properties : Oxidizer.
- Explosion limits : No data available

9.2. Other information

- Gas group : Compressed gas



Oxygen, compressed



Safety Data Sheet P-4638

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

Additional information : Gas/vapor heavier than air. May accumulate in confined spaces, particularly at or below ground level.

SECTION 10: Stability and reactivity

10.1. Reactivity

No additional information available

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

Violently oxidizes organic material.

10.4. Conditions to avoid

None under recommended storage and handling conditions (see section 7).

10.5. Incompatible materials

Keep equipment free from oil and grease. Consider the potential toxicity hazard due to the presence of chlorinated or fluorinated polymers in high pressure (> 30 bar) oxygen lines in case of combustion. May react violently with combustible materials. May react violently with reducing agents.

10.6. Hazardous decomposition products

None.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Not classified

Skin corrosion/irritation : Not classified
pH: Not applicable.

Serious eye damage/irritation : Not classified
pH: Not applicable.

Respiratory or skin sensitization : Not classified

Germ cell mutagenicity : Not classified

Carcinogenicity : Not classified

Reproductive toxicity : Not classified

Specific target organ toxicity – single exposure : Not classified

Specific target organ toxicity – repeated exposure : Not classified

Aspiration hazard : Not classified

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general : No ecological damage caused by this product.

12.2. Persistence and degradability

| | |
|---------------------------------------|--|
| Oxygen, compressed (7782-44-7) | |
| Persistence and degradability | No ecological damage caused by this product. |
| Oxygen (7782-44-7) | |
| Persistence and degradability | No ecological damage caused by this product. |

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

12.3. Bioaccumulative potential

| Oxygen, compressed (7782-44-7) | |
|--------------------------------|--|
| Log Pow | Not applicable. |
| Log Kow | Not applicable. |
| Bioaccumulative potential | No ecological damage caused by this product. |

| Oxygen (7782-44-7) | |
|---------------------------|--|
| Log Pow | Not applicable. |
| Log Kow | Not applicable. |
| Bioaccumulative potential | No ecological damage caused by this product. |

12.4. Mobility in soil

| Oxygen, compressed (7782-44-7) | |
|--------------------------------|--|
| Mobility in soil | No data available. |
| Ecology - soil | No ecological damage caused by this product. |

| Oxygen (7782-44-7) | |
|--------------------|--|
| Mobility in soil | No data available. |
| Ecology - soil | No ecological damage caused by this product. |

12.5. Other adverse effects

Effect on ozone layer : None.
Effect on the global warming : No known effects from this product.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Product/Packaging disposal recommendations : Dispose of contents/container in accordance with local/regional/national/international regulations. Contact supplier for any special requirements.

SECTION 14: Transport information

In accordance with DOT
Transport document description : UN1072 Oxygen, compressed, 2.2
UN-No.(DOT) : UN1072
Proper Shipping Name (DOT) : Oxygen, compressed
Class (DOT) : 2.2 - Class 2.2 - Non-flammable compressed gas 49 CFR 173.115
Hazard labels (DOT) : 2.2 - Non-flammable gas
5.1 - Oxidizer



DOT Special Provisions (49 CFR 172.102) : 110 - Fire extinguishers transported under UN1044 may include installed actuating cartridges (cartridges, power device of Division 1.4C or 1.4S), without changing the classification of Division 2.2, provided the aggregate quantity of deflagrating (propellant) explosives does not exceed 3.2 grams per extinguishing unit.
A14 - This material is not authorized to be transported as a limited quantity or consumer commodity in accordance with 173.306 of this subchapter when transported aboard an aircraft.

Additional information

Emergency Response Guide (ERG) Number : 122 (UN1072)
Other information : No supplementary information available.



Oxygen, compressed



Safety Data Sheet P-4638

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

Special transport precautions : Avoid transport on vehicles where the load space is not separated from the driver's compartment. Ensure vehicle driver is aware of the potential hazards of the load and knows what to do in the event of an accident or an emergency. Before transporting product containers:
- Ensure there is adequate ventilation. - Ensure that containers are firmly secured. - Ensure cylinder valve is closed and not leaking. - Ensure valve outlet cap nut or plug (where provided) is correctly fitted. - Ensure valve protection device (where provided) is correctly fitted.

Transport by sea

UN-No. (IMDG) : 1072
Proper Shipping Name (IMDG) : OXYGEN, COMPRESSED
Class (IMDG) : 2 - Gases
Division (IMDG) : 2.2 - Non-flammable, non-toxic gases
MFAG-No : 122

Air transport

UN-No. (IATA) : 1072
Proper Shipping Name (IATA) : Oxygen, compressed
Class (IATA) : 2
Civil Aeronautics Law : Gases under pressure/Gases nonflammable nontoxic under pressure

SECTION 15: Regulatory information

15.1. US Federal regulations

| | |
|---|--|
| Oxygen, compressed (7782-44-7) | |
| Listed on the United States TSCA (Toxic Substances Control Act) inventory | |
| SARA Section 311/312 Hazard Classes | Sudden release of pressure hazard Fire hazard |

All components of this product are listed on the Toxic Substances Control Act (TSCA) inventory.

15.2. International regulations

CANADA

| |
|---|
| Oxygen, compressed (7782-44-7) |
| Listed on the Canadian DSL (Domestic Substances List) |
| Oxygen (7782-44-7) |
| Listed on the Canadian DSL (Domestic Substances List) |

EU-Regulations

| |
|--|
| Oxygen, compressed (7782-44-7) |
| Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances) |



Oxygen, compressed



Safety Data Sheet P-4638

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
 Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

15.2.2. National regulations

| Oxygen, compressed (7782-44-7) |
|---|
| Listed on the AICS (Australian Inventory of Chemical Substances) Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China) Listed on the Korean ECL (Existing Chemicals List) Listed on NZIoC (New Zealand Inventory of Chemicals) Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances) Listed on INSQ (Mexican National Inventory of Chemical Substances) Listed on the TCSI (Taiwan Chemical Substance Inventory) |

15.3. US State regulations

| Oxygen, compressed(7782-44-7) | |
|---|---|
| U.S. - California - Proposition 65 - Carcinogens List | No |
| U.S. - California - Proposition 65 - Developmental Toxicity | No |
| U.S. - California - Proposition 65 - Reproductive Toxicity - Female | No |
| U.S. - California - Proposition 65 - Reproductive Toxicity - Male | No |
| State or local regulations | U.S. - Massachusetts - Right To Know List U.S. - New Jersey - Right to Know Hazardous Substance List U.S. - Pennsylvania - RTK (Right to Know) List |

California Proposition 65 - This product does not contain any substances known to the state of California to cause cancer, developmental and/or reproductive harm

| Oxygen (7782-44-7) | | | | |
|---|---|---|---|----------------------------------|
| U.S. - California - Proposition 65 - Carcinogens List | U.S. - California - Proposition 65 - Developmental Toxicity | U.S. - California - Proposition 65 - Reproductive Toxicity - Female | U.S. - California - Proposition 65 - Reproductive Toxicity - Male | No significant risk level (NSRL) |
| No | No | No | No | |

| Oxygen (7782-44-7) |
|---|
| U.S. - Massachusetts - Right To Know List U.S. - New Jersey - Right to Know Hazardous Substance List U.S. - Pennsylvania - RTK (Right to Know) List |



Oxygen, compressed



Safety Data Sheet P-4638

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.
Date of issue: 01/01/1979 Revision date: 01/27/2021 Supersedes: 08/28/2020 Version: 2.0

SECTION 16: Other information

Other information : When you mix two or more chemicals, you can create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an industrial hygienist or other trained person when you evaluate the end product. Before using any plastics, confirm their compatibility with this product.

Linde asks users of this product to study this SDS and become aware of the product hazards and safety information. To promote safe use of this product, a user should (1) notify employees, agents, and contractors of the information in this SDS and of any other known product hazards and safety information, (2) furnish this information to each purchaser of the product, and (3) ask each purchaser to notify its employees and customers of the product hazards and safety information.

The opinions expressed herein are those of qualified experts within Linde Inc. We believe that the information contained herein is current as of the date of this Safety Data Sheet. Since the use of this information and the conditions of use are not within the control of Linde Inc, it is the user's obligation to determine the conditions of safe use of the product.

Linde SDSs are furnished on sale or delivery by Linde or the independent distributors and suppliers who package and sell our products. To obtain current SDSs for these products, contact your sales representative, local distributor, or supplier, or download from www.lindeus.com. If you have questions regarding Linde SDSs, would like the document number and date of the latest SDS, or would like the names of the Linde suppliers in your area, phone or write the Linde Call Center (Phone: 1-800-772-9247; Address: Linde Call Center, Linde Inc, P.O. Box 44, Tonawanda, NY 14151-0044).

Linde, Praxair, the Linde wordmark and the Flowing Airstream design are trademarks or registered trademarks of Linde plc or its affiliates. The information contained herein is offered for use by technically qualified personnel at their discretion and risk without warranty of any kind.

Copyright © 2020, Linde plc.


Revision date : 01/27/2021

NFPA health hazard : 0 - Materials that, under emergency conditions, would offer no hazard beyond that of ordinary combustible materials.

NFPA fire hazard : 0 - Materials that will not burn under typical fire conditions, including intrinsically noncombustible materials such as concrete, stone, and sand.

NFPA instability : 0 - Material that in themselves are normally stable, even under fire conditions.

NFPA specific hazard : OX - Materials that posses oxidizing properties.



SDS US GHS DUAL BRANDED LINDE->PRAXAIR

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.



SAFETY DATA SHEET

Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

29 CFR 1910.1200 (OSHA HazCom 2012)

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : Premium Conventional SAE 10W-30 Motor Oil
Product code : VV129

| | |
|---|---|
| Details of the supplier of the safety data sheet Valvoline LLC 100 Valvoline Way Lexington, KY 40509 United States of America (USA) 1-800-TEAMVAL (1-800-832-6825) SDS@valvoline.com | Emergency telephone number 1-800-VALVOLINE (1-800-825-8654) Regulatory Information Number 1-800-TEAMVAL (1-800-832-6825) Product Information 1-800-TEAMVAL (1-800-832-6825) |
|---|---|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Not a hazardous substance or mixture.

GHS label elements

Not a hazardous substance or mixture.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Chemical nature : Defatter

Hazardous components

| Chemical name | CAS-No. | Classification | Concentration (%) |
|--|------------|--|-------------------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | Not a hazardous substance or mixture. | >=80.00 - < 90.00 |
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY | 64742-54-7 | Not a hazardous substance or mixture. | >=5.00 - < 10.00 |



SAFETY DATA SHEET

Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

| | | | |
|---|------------|-------------------|-----------------|
| PARAFFINIC HYDROTREATED LIGHT PARAFFINIC DISTILLATE | 64742-55-8 | Asp. Tox. 1; H304 | >=1.50 - < 5.00 |
|---|------------|-------------------|-----------------|

Actual concentration is withheld as a trade secret

SECTION 4. FIRST AID MEASURES

- General advice : Do not leave the victim unattended.
Show this safety data sheet to the doctor in attendance.
Move out of dangerous area.
- If inhaled : If breathed in, move person into fresh air.
If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : Wash contaminated clothing before re-use.
If on skin, rinse well with water.
Remove contaminated clothing. If irritation develops, get medical attention.
- In case of eye contact : Protect unharmed eye.
Remove contact lenses.
Immediately flush eye(s) with plenty of water.
- If swallowed : Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
- Most important symptoms and effects, both acute and delayed : No symptoms known or expected.
- Notes to physician : No hazards which require special first aid measures.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Water spray
Foam
Carbon dioxide (CO₂)
Dry chemical
- Unsuitable extinguishing media : High volume water jet



SAFETY DATA SHEET

Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

| | | |
|---|---|---|
| Specific hazards during firefighting | : | Do not allow run-off from fire fighting to enter drains or water courses. |
| Hazardous combustion products | : | carbon dioxide and carbon monoxide |
| Specific extinguishing methods | : | Product is compatible with standard fire-fighting agents. |
| Further information | : | Standard procedure for chemical fires. |
| Special protective equipment for firefighters | : | In the event of fire, wear self-contained breathing apparatus. |

SECTION 6. ACCIDENTAL RELEASE MEASURES

| | | |
|---|---|---|
| Personal precautions, protective equipment and emergency procedures | : | Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed. Use personal protective equipment. |
| Environmental precautions | : | Prevent further leakage or spillage if safe to do so. |
| Methods and materials for containment and cleaning up | : | Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal. |
| Other information | : | Comply with all applicable federal, state, and local regulations. |

SECTION 7. HANDLING AND STORAGE

| | | |
|-----------------------------|---|--|
| Advice on safe handling | : | Dispose of rinse water in accordance with local and national regulations. For personal protection see section 8. Smoking, eating and drinking should be prohibited in the application area. Avoid contact with skin and eyes. Container hazardous when empty. Do not smoke. Do not breathe vapours/dust. |
| Conditions for safe storage | : | Keep container tightly closed in a dry and well-ventilated place. |



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|--|------------|----------------------------------|---|-----------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | TWA | 5 mg/m3 Mist | OSHA Z-1 |
| | | TWA | 5 mg/m3 Inhalable particulate matter | ACGIH |
| | | TWA | 5 mg/m3 Mist | OSHA P0 |
| | | TWA | 5 mg/m3 Mist | NIOSH REL |
| | | ST | 10 mg/m3 Mist | NIOSH REL |
| | | PEL | 5 mg/m3 particulate | CAL PEL |
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | TWA | 5 mg/m3 Mist | OSHA Z-1 |
| | | TWA | 5 mg/m3 Inhalable particulate matter | ACGIH |
| | | TWA | 5 mg/m3 Mist | OSHA P0 |
| | | TWA | 5 mg/m3 Mist | NIOSH REL |
| | | ST | 10 mg/m3 Mist | NIOSH REL |
| | | PEL | 5 mg/m3 particulate | CAL PEL |
| HYDROTREATED LIGHT PARAFFINIC DISTILLATE | 64742-55-8 | TWA | 5 mg/m3 Mist | OSHA Z-1 |
| | | TWA | 5 mg/m3 Inhalable particulate matter | ACGIH |
| | | TWA | 5 mg/m3 Mist | OSHA P0 |
| | | TWA | 5 mg/m3 Mist | NIOSH REL |
| | | ST | 10 mg/m3 Mist | NIOSH REL |
| | | PEL | 5 mg/m3 particulate | CAL PEL |



SAFETY DATA SHEET

Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

-
- Engineering measures** : Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.
- Personal protective equipment**
- Respiratory protection : No personal respiratory protective equipment normally required.
- Hand protection
Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.
- Eye protection : Wear chemical splash goggles when there is the potential for exposure of the eyes to liquid, vapor or mist.
- Skin and body protection : Wear resistant gloves (consult your safety equipment supplier).
Choose body protection according to the amount and concentration of the dangerous substance at the work place.
Safety shoes
Impervious clothing
Wear as appropriate:
- Hygiene measures : When using do not smoke.
When using do not eat or drink.
Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Appearance : liquid
- Odour : No data available
- Odour Threshold : No data available
- pH : No data available
- Melting point/freezing point : No data available
- Boiling point/boiling range : No data available
- Flash point : 394 - 480 °F / 201 - 249 °C
- Method: Cleveland open cup



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

| | | |
|--|---|--|
| Evaporation rate | : | No data available |
| Flammability (solid, gas) | : | No data available |
| Self-ignition | : | No data available |
| Upper explosion limit / Upper flammability limit | : | No data available |
| Lower explosion limit / Lower flammability limit | : | No data available |
| Vapour pressure | : | 0.0133333 hPa (70.00 °F / 21.11 °C) Calculated Vapor Pressure |
| Relative vapour density | : | No data available |
| Relative density | : | 0.868 (60.01 °F / 15.56 °C) |
| Density | : | 0.868 g/cm ³ |
| Solubility(ies) | | |
| Water solubility | : | No data available |
| Solubility in other solvents | : | No data available |
| Partition coefficient: n-octanol/water | : | No data available |
| Decomposition temperature | : | No data available |
| Viscosity | | |
| Viscosity, dynamic | : | No data available |
| Viscosity, kinematic | : | 70 mm ² /s (104 °F / 40 °C) |
| Oxidizing properties | : | No data available |

SECTION 10. STABILITY AND REACTIVITY

| | | |
|------------------------------------|---|---|
| Reactivity | : | No decomposition if stored and applied as directed. |
| Chemical stability | : | Stable under recommended storage conditions. |
| Possibility of hazardous reactions | : | Product will not undergo hazardous polymerization. |



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

| | |
|----------------------------------|--|
| Conditions to avoid | : excessive heat |
| Incompatible materials | : Strong oxidizing agents Acids |
| Hazardous decomposition products | No hazardous decomposition products are known. |

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Acute oral toxicity : LD50 (Rat): > 15 g/kg

Acute dermal toxicity : LD50 (Rabbit): > 5 g/kg

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Acute oral toxicity : LD50 (Rat): > 15 g/kg

Acute dermal toxicity : LD50 (Rabbit): > 5 g/kg

Skin corrosion/irritation

Not classified based on available information.

Product:

Remarks : May cause skin irritation in susceptible persons.
May irritate skin.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Assessment : Slight, transient irritation

Result : Slight, transient irritation

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Assessment : Slight, transient irritation

Result : Slight, transient irritation

HYDROTREATED LIGHT PARAFFINIC DISTILLATE:

Assessment : Slight, transient irritation

Result : Slight, transient irritation



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

Serious eye damage/eye irritation

Not classified based on available information.

Product:

Remarks : Causes serious eye irritation.
Vapours may cause irritation to the eyes, respiratory system and the skin.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Result : No eye irritation
Assessment : No eye irritation

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Result : No eye irritation
Assessment : No eye irritation

HYDROTREATED LIGHT PARAFFINIC DISTILLATE:

Result : Slight, transient irritation
Assessment : Slight, transient irritation

Respiratory or skin sensitisation

Skin sensitisation

Not classified based on available information.

Respiratory sensitisation

Not classified based on available information.

Germ cell mutagenicity

Not classified based on available information.

Carcinogenicity

Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Carcinogenicity - : Classified based on DMSO extract content < 3% (Regulation
Assessment (EC) 1272/2008, Annex VI, Part 3, Note L)

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Carcinogenicity - : Classified based on DMSO extract content < 3% (Regulation
Assessment (EC) 1272/2008, Annex VI, Part 3, Note L)

HYDROTREATED LIGHT PARAFFINIC DISTILLATE:

Carcinogenicity - : Classified based on DMSO extract content < 3% (Regulation
Assessment (EC) 1272/2008, Annex VI, Part 3, Note L)

IARC No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

OSHA No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

NTP No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

Reproductive toxicity

Not classified based on available information.

STOT - single exposure

Not classified based on available information.

STOT - repeated exposure

Not classified based on available information.

Aspiration toxicity

Not classified based on available information.

Product:

No aspiration toxicity classification

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

No aspiration toxicity classification

HYDROTREATED LIGHT PARAFFINIC DISTILLATE:

May be fatal if swallowed and enters airways.

Further information

Product:

Remarks : No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Not classified based on available information.

Long-term (chronic) aquatic hazard : Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Toxicity to fish : LL50 (Fish): > 100 mg/l
Exposure time: 96 h

Toxicity to daphnia and other aquatic invertebrates : EL50 (Aquatic invertebrates): > 10,000 mg/l
Exposure time: 48 h

Toxicity to algae : EL50 (Algae, algal mat (Algae)): > 100 mg/l
Exposure time: 72 h

Toxicity to fish (Chronic toxicity) : NOEC (Fish): 10 mg/l



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Aquatic invertebrates): 10 mg/l

Ecotoxicology Assessment Short-term (acute) aquatic hazard : Not classified based on available information.

Long-term (chronic) aquatic hazard : Not classified based on available information.

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:
Ecotoxicology Assessment Short-term (acute) aquatic hazard : Not classified based on available information.

Long-term (chronic) aquatic hazard : Not classified based on available information.

Persistence and degradability

Components:

No data available

Bioaccumulative potential

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Partition coefficient: n-octanol/water : log Pow: Expected > 7

No data available

Mobility in soil

Components:

No data available

Other adverse effects

No data available

Product:

Regulation

40 CFR Protection of Environment; Part 82 Protection of Stratospheric Ozone - CAA Section 602 Class I Substances

Remarks

This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

Additional ecological information : No data available

Components:

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

-
- General advice : Dispose of in accordance with all applicable local, state and federal regulations.
- Send to a licensed waste management company.
Do not contaminate ponds, waterways or ditches with chemical or used container.
Do not dispose of waste into sewer.
- Contaminated packaging : Do not re-use empty containers.
Empty containers should be taken to an approved waste handling site for recycling or disposal.
Dispose of as unused product.
Empty remaining contents.

SECTION 14. TRANSPORT INFORMATION

International Regulations

UNRTDG

Not regulated as a dangerous good

IATA-DGR

Not regulated as a dangerous good

IMDG-Code

Not regulated as a dangerous good

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

National Regulations

49 CFR

Not regulated as a dangerous good

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

SARA 302 Extremely Hazardous Substances Threshold Planning Quantity

This material does not contain any components with a section 302 EHS TPQ.

SARA 311/312 Hazards : No SARA Hazards

SARA 313 : The following components are subject to reporting levels established by SARA Title III, Section 313:

Zinc O,O',O',O'- 2215-35-2 >= 0.1 - < 1 %
tetrakis(1,3-
dimethylbutyl)
bis(phosphorodit
hioate

Zinc, bis[O,O- 4259-15-8 >= 0.1 - < 1 %
bis(2-ethylhexyl)
phosphorodithioa
to-S,S']-, (T-4)-

Clean Air Act

This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

This product does not contain any hazardous air pollutants (HAP), as defined by the U.S. Clean Air Act Section 112 (40 CFR 61).

This product does not contain any chemicals listed under the U.S. Clean Air Act Section 112(r) for Accidental Release Prevention (40 CFR 68.130, Subpart F).

This product does not contain any chemicals listed under the U.S. Clean Air Act Section 111 SOCOMI Intermediate or Final VOC's (40 CFR 60.489).

Clean Water Act

This product does not contain any Hazardous Substances listed under the U.S. CleanWater Act, Section 311, Table 116.4A.

This product does not contain any Hazardous Chemicals listed under the U.S. CleanWater Act, Section 311, Table 117.3.

This product does not contain any priority pollutants related to the U.S. Clean Water Act

This product does not contain any toxic pollutants listed under the U.S. Clean Water Act Section 307

California Prop. 65

 **WARNING:** Cancer - www.P65Warnings.ca.gov.

The components of this product are reported in the following inventories:

DSL : All components of this product are on the Canadian DSL

AICS : On the inventory, or in compliance with the inventory

ENCS : On the inventory, or in compliance with the inventory



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

- KECI : On the inventory, or in compliance with the inventory
- PICCS : On the inventory, or in compliance with the inventory
- IECSC : On the inventory, or in compliance with the inventory
- TCSI : On the inventory, or in compliance with the inventory
- TSCA : On TSCA Inventory

TSCA list

No substances are subject to TSCA 12(b) export notification requirements.

Inventories

AICS (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIoC (New Zealand), PICCS (Philippines), TCSI (Taiwan), TSCA (USA)

SECTION 16. OTHER INFORMATION

Further information

Internal information : R0170829

| NFPA: | HMIS III: | | | | | | |
|---|---|---------------|----------|---------------------|----------|------------------------|----------|
| <p style="text-align: center;">Flammability</p> <p style="text-align: center;">Special hazard</p> | <table border="1" style="width: 100%;"> <tr> <td style="background-color: blue; color: white;">HEALTH</td> <td style="text-align: center;">0</td> </tr> <tr> <td style="background-color: red; color: white;">FLAMMABILITY</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="background-color: yellow;">PHYSICAL HAZARD</td> <td style="text-align: center;">0</td> </tr> </table> <p>0 = not significant, 1 =Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 0 | FLAMMABILITY | 1 | PHYSICAL HAZARD | 0 |
| HEALTH | 0 | | | | | | |
| FLAMMABILITY | 1 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Combustible Liquid Class IIIB

Full text of H-Statements

H304 May be fatal if swallowed and enters airways.



SAFETY DATA SHEET

Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

Sources of key data used to compile the Safety Data Sheet
Valvoline internal data including own and sponsored test reports
The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Valvoline's Environmental Health and Safety Department (1-800-VALVOLINE).

List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists
BEI : Biological Exposure Index
CAS : Chemical Abstracts Service (Division of the American Chemical Society).
CMR : Carcinogenic, Mutagenic or Toxic for Reproduction
FG : Food grade
GHS : Globally Harmonized System of Classification and Labeling of Chemicals.
H-statement : Hazard Statement
IATA : International Air Transport Association.
IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization
ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"
IMDG : International Maritime Code for Dangerous Goods
ISO : International Organization for Standardization
logPow : octanol-water partition coefficient
LCxx : Lethal Concentration, for xx percent of test population
LDxx : Lethal Dose, for xx percent of test population.
ICxx : Inhibitory Concentration for xx of a substance
Ecxx : Effective Concentration of xx
N.O.S.: Not Otherwise Specified
OECD : Organization for Economic Co-operation and Development
OEL : Occupational Exposure Limit
P-Statement : Precautionary Statement
PBT : Persistent , Bioaccumulative and Toxic
PPE : Personal Protective Equipment
STEL : Short-term exposure limit
STOT : Specific Target Organ Toxicity
TLV : Threshold Limit Value
TWA : Time-weighted average
vPvB : Very Persistent and Very Bioaccumulative
WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act
DOT : Department of Transportation
FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act
HMIRC : Hazardous Materials Information Review Commission



SAFETY DATA SHEET
Premium Conventional SAE 10W-30 Motor Oil

Version: 1.13

Revision Date: 09/23/2020

Print Date:
03/17/2021

HMIS : Hazardous Materials Identification System
NFPA : National Fire Protection Association
NIOSH : National Institute for Occupational Safety and Health
OSHA : Occupational Safety and Health Administration
PMRA : Health Canada Pest Management Regulatory Agency
RTK : Right to Know
WHMIS : Workplace Hazardous Materials Information System



MATERIAL SAFETY DATA SHEET

B-100 BUTYL RUBBER SEALANT

Section One

PRODUCT INFORMATION

Manufacturer's Name: ADCO Products, Inc. Business Phone No: 1-517-764-0334
 Manufacturer's Address: 4401 Page Ave., P.O. Box 457 Emergency Phone No: 1-800-424-9300
 Michigan Center, MI 49254 (CHEMTREC)
 Product Name: **B-100 Butyl Rubber Sealant**
 Proper Shipping Name: Adhesive, containing flammable liquid, 3, UN1133, PG II

Section Two

HAZARDOUS INGREDIENTS INFORMATION

| <u>Chemical Name</u> | <u>CAS #</u> | <u>% by Weight</u> | <u>ACGIH TLV</u> | <u>OSHA PEL</u> |
|-------------------------------|--------------|--------------------|------------------|-----------------|
| Aliphatic Hydrocarbon Solvent | 8052-41-3 | 10%-20% | 100 ppm | 500 ppm |

Section Three

PHYSICAL AND CHEMICAL DATA

Appearance & Odor: Paste available in various colors with aliphatic hydrocarbon odor
 Physical State: Paste Boiling Point: 352°F
 Specific Gravity (water = 1): 1.32 Evaporation Rate (n-butyl acetate = 1): 0.12
 Percent Volatiles: 10-20 Solubility in Water: 0.5%
 Vapor Pressure: 5 mm Hg @ 78°F, 26°C Vapor Density (air = 1): 5.0
 Percent Solids (by weight): 80-90 Melting Point: NA
 VOC Content: 248 grams/liter = 2.07 lbs/gallon

Section Four

FIRE & EXPLOSION HAZARD DATA

Flash Point: 106°F Method Used: Estimate based on the flash point of the most volatile component.

Flammable Limits: LEL: 0.5 UEL: 6.0

Proper Extinguishing Media: Foam, dry chemical or carbon dioxide. Water may be ineffective, but water should be used to keep fire-exposed containers cool.

Recommended Firefighting Procedures: Treat as a class "B" fire. Limit firefighting to those trained to do so. If a leak or spill has ignited, use water spray to disperse the vapors and to protect the men attempting to stop the leak. Minimize breathing gases, vapor, fumes or decomposition products. Use supplied-air breathing equipment for enclosed or confined spaces or as otherwise needed.

Unusual Fire & Explosion Hazards: Vapors are heavier than air and may travel along the ground and be ignited by ignition sources distant from the handling point. Residue in "empty" containers may be explosive if exposed to an ignition source. To prevent fire or explosion from static accumulation and discharge, effectively ground the product transfer system.

Section Five**HEALTH HAZARD DATA**

Medical Conditions Aggravated by Exposure: Pre-existing eye, skin and pulmonary disorders may be aggravated by exposure to this product.

| | | |
|-------------------------|-----------------|-----|
| Primary Route of Entry: | Skin absorption | Yes |
| | Inhalation | Yes |
| | Ingestion | Yes |
| | Eye contact | Yes |

Signs and Symptoms of Exposure:

| | |
|---------------|--|
| Skin contact: | Can cause redness, irritation, defatting, and dermatitis. |
| Inhalation: | Prolonged inhalation of vapors may cause irritation of the respiratory tract. Intentional misuse by deliberately concentrating and inhaling vapor may be harmful or fatal. |
| Ingestion: | Can cause gastrointestinal irritation, nausea, vomiting, and diarrhea. |
| Eye contact: | Can cause severe irritation, redness, tearing, blurred vision. |

Emergency and First Aid Procedures:

| | |
|-----------|---|
| On skin: | Wash with soap and water. Get medical attention if irritation persists. |
| Inhaled: | Remove affected person to fresh air, give oxygen or artificial respiration as necessary to assist breathing. Get medical attention. |
| Ingested: | Do not induce vomiting. Get medical attention. |
| In eyes: | Flush with large amounts of water, frequently flushing under the lids. Seek medical attention. |

Acute Effects of Overexposure: Irritation, redness

Chronic Effects:(include all potential carcinogens present @ .1% or greater): None known

Carcinogenicity: NTP? No IARC Monographs? No OSHA regulated? No

Section Six**REACTIVITY DATA**

Stability: Stable

Conditions to Avoid: None known

Hazardous Decomposition Products: In the event of partial combustion, fumes, smoke, carbon monoxide, aldehydes and other decomposition products may be released.

Hazardous Polymerization: Will not occur

Incompatibility: None known

Section Seven**PRECAUTIONS FOR SAFE HANDLING AND USE**

Ventilation: General exhaust as needed to keep TLV below recommended levels if engineering or administrative controls are not adequate.

Personal Protective Equipment:

Respirator: For large spills or entry into enclosed small spaces with inadequate ventilation, a pressure demand, self-contained breathing apparatus is recommended. If engineering or administrative controls are not adequate to maintain solvent TLV below recommended levels, an appropriate respirator should be used in conjunction with a respirator use and fit training program.

Gloves: Buna-N, if needed

Eye Protection: Safety glasses with side shields if needed.

Other Protective Clothing/Articles: To prevent repeated or prolonged skin contact, wear impervious clothing and boots if contact is likely.

Work/Hygienic Practices: Minimize breathing vapor. Avoid prolonged or repeated contact with the skin. Remove contaminated clothing and launder before reuse. Cleanse skin thoroughly after contact, before work breaks and meals and at the end of the workday. Product is readily removed from the skin with waterless hand cleaners followed by washing thoroughly with soap and water.

Steps To Be Taken in Case Material is Released or Spilled: Eliminate all ignition sources. Control the source of the spill if it is safe to do so. Ventilate enclosed areas to prevent vapor accumulation. Restrict access by unauthorized personnel. Absorb spilled product with vermiculite or other absorbent material. Shovel or scoop into a sealable container for disposal.

Waste Disposal Method: If this product becomes a waste, it is considered a hazardous waste due to its ignitability. Dispose of in accordance with local, state and federal environmental and waste regulations.

Storage and Handling Procedures: Do not store or handle near an ignition source. Keep containers closed. Effectively ground the product transfer system to prevent fire or explosion from static discharge. Empty containers may contain residual product. Do not reuse containers unless properly reconditioned.

Section Eight**REGULATORY INFORMATION**

All components are included in the EPA Toxic Substance Control Act (TSCA) Chemical Substance Inventory.

If this product becomes a waste, it meets the criteria of a hazardous waste as defined under RCRA 40CFR261: Ignitability

Hazardous Materials Identification System (HMIS):

Health Hazard Rating: 1 CAUTION Irritation or minor reversible injury possible

Flammability Hazard Rating: 2 CAUTION Material must be moderately heated before ignition will occur.

Reactivity Hazard Rating: 0 Normally stable and will not react with water

Personal Protective Equipment: B Safety glasses and gloves

EPA SARA Title III hazard class (40CFR370): Acute Health Hazard
Chronic Health Hazard
Fire Hazard

EPA SARA Title III Section 313 (40CFR372): There are no listed toxic chemicals present in quantities greater than the *de minimis* level.

EPA SARA Title III (40CFR355): There are no components present in this product at a level which would require reporting.

California Proposition 65 (Safe Drinking Water and Toxic Enforcement Act of 1986):

This product contains no listed substances, which the State of California has found to cause cancer, birth defects, or other reproductive harm, in a form which would require a warning under the statute.

Date of Preparation: January 4, 2010

Revision: 14 Supersedes MSDS Dated: May 24, 2007

THIS INFORMATION RELATES TO THE SPECIFIC MATERIAL DESIGNATED AND MAY NOT BE VALID FOR SUCH MATERIAL USED IN COMBINATION WITH ANY OTHER MATERIALS OR IN ANY PROCESS. SUCH INFORMATION IS TO THE BEST OF OUR KNOWLEDGE AND BELIEF ACCURATE AND RELIABLE AS OF THE DATE COMPILED. HOWEVER, NO REPRESENTATION, WARRANTY OR GUARANTEE IS MADE AS TO ITS ACCURACY, RELIABILITY OR COMPLETENESS. IT IS THE USER'S RESPONSIBILITY TO SATISFY HIMSELF AS TO THE SUITABILITY AND COMPLETENESS OF SUCH INFORMATION FOR HIS OWN PARTICULAR USE. WE DO NOT ACCEPT LIABILITY FOR ANY LOSS OR DAMAGE THAT MAY OCCUR FROM THE USE OF THIS INFORMATION NOR DO WE OFFER WARRANTY AGAINST PATENT INFRINGEMENT.

SAFETY DATA SHEET

SDS 0673

Section 1 -- PRODUCT AND COMPANY IDENTIFICATION

| | | HMIS CODES |
|--|---------------------------------|----------------|
| PRODUCT NAME | | Health 2 |
| Jim PR-1L or Clear PR-2L Low VOC | | Flammability 3 |
| | | Reactivity 1 |
| PRODUCT CODES | | PPI B |
| 55611, 55613, 55615, 55617, 55910, 55912, 55914, 55918, 55920, 55972, 55981, 55982 | | |
| CHEMICAL FAMILY | | |
| Organic | | |
| USE | | |
| PVC & CPVC Primer | | |
| MANUFACTURER'S NAME | EMERGENCY TELEPHONE NO. | |
| The RectorSeal Corporation | Chemtrec 24 Hours | |
| 2601 Spenwick Drive | (800)424-9300 USA | |
| Houston, Texas 77055 USA | (703)527-3887 International | |
| DATE OF VALIDATION | TECHNICAL SERVICE TELEPHONE NO. | |
| January 23, 2015 | (800)231-3345 or (713)263-8001 | |
| DATE OF PREPARATION | | |
| October 27, 2014 | | |

Section 2 -- HAZARDS IDENTIFICATION

GHS CLASSIFICATION
 PHYSICAL HAZARDS: Flammable Liquid, Category 2
 HEALTH HAZARDS
 Acute Toxicity:
 Oral: Category 4
 Dermal: Category 5
 Inhalation: Category 4
 Skin Corrosion/Irritation: Category 3
 Serious Eye Damage/Eye Irritation: Category 2A
 Skin Sensitization: Not Classified
 Respiratory Sensitization: Not Classified
 Germ Cell Mutagenicity: Not Classified
 Carcinogenicity: Category 2
 Reproductive Toxicology: Not Classified
 Target Organ Systemic Toxicity - Single Exposure: Category 3
 Target Organ Systemic Toxicity - Repeated Exposure: Not Classified
 Aspiration Toxicity: Not Classified

GHS Label elements, including precautionary statements
 Pictogram: GHS 02-Flammable Materials, GHS 08-Severe Health
 Hazards

Signal Word: Danger

Hazard Statements:

H225 - Highly flammable liquid and vapor

H302 - Harmful if swallowed.

H313 - May be harmful in contact with skin.

H316 - Causes mild skin irritation.

H318 - Causes serious eye damage.

H319 - Causes serious eye irritation

H335 + H336 - May cause respiratory irritation, and drowsiness or dizziness.

H351 - Suspected of causing cancer.

Contains a chemical classified by the US EPA as a suspected possible carcinogen.

Precautionary Statements:

P102 - Keep out of reach of children.

P210 - Keep away from heat/sparks/open flames/hot surfaces. - No smoking

P240 - Ground/Bond container and receiving equipment

P261 - Avoid breathing dust/fume/gas/mist/vapors/spray

P262 - Do not get in eyes, on skin, or on clothing.

P264 - Wash hands thoroughly after handling.

P280 - Wear protective gloves/protective clothing/eye protection/face protection.

P301 + P310 - IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

P305 + P351 + P338 - IF IN EYES: Rinse cautiously with water for several minutes.

Remove contact lenses, if present and easy to do. Continue rinsing.

P362 - Take off contaminated clothing and wash before reuse.

EUH066 - Repeated exposure may cause skin dryness or cracking

Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

SUMMARY OF ACUTE HAZARDS

Overexposure may cause coughing, shortness of breath, dizziness, central nervous system depression, intoxication and collapse. It may cause

2289

irritation to the respiratory tract and to other mucous membranes.

ROUTE OF EXPOSURE, SIGNS AND SYMPTOMS

INHALATION

Overexposure may cause coughing, shortness of breath, dizziness, central nervous system depression, intoxication and collapse. It may cause irritation to the respiratory tract and to other mucous membranes.

EYE CONTACT

Severely irritating. If not removed promptly, will injure eye tissue, which can result in permanent damage.

SKIN CONTACT

Frequent or prolonged contact may irritate and cause dermatitis. Low order of toxicity.

INGESTION

Low order of toxicity. Small amounts of the liquid aspirated into the respiratory system during ingestion, or from vomiting, may cause bronchiopneumonia or pulmonary edema.

SUMMARY OF CHRONIC HAZARDS

Repeated or prolonged exposure may cause signs of central nervous system depression and respiratory irritation. This material has been shown to induce tumors in laboratory animals.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Individuals with pre-existing or chronic diseases of the eyes, skin, respiratory system, cardiovascular system, gastrointestinal system, liver, or kidneys may have increased susceptibility to excessive exposure.

=====
Section 3 -- COMPOSITION/INFORMATION ON INGREDIENTS

INGREDIENT: Methyl Ethyl Ketone

PERCENTAGE BY WEIGHT: 20-85

CAS NUMBER: 78-93-3

EC# : 606-002-00-3

INGREDIENT: Tetrahydrofuran

PERCENTAGE BY WEIGHT: 5-12

CAS NUMBER: 109-99-9

EC# : 603-025-00-0

INGREDIENT: Cyclohexanone

PERCENTAGE BY WEIGHT: 5-15

CAS NUMBER: 108-94-1

EC# : 606-010-00-7

INGREDIENT: Acetone

PERCENTAGE BY WEIGHT: 20-40

CAS NUMBER: 67-64-1

EC# : 200-662-2
=====

Section 4 -- FIRST AID MEASURES

- If INHALED: If overcome by exposure, remove victim to fresh air immediately. Give oxygen or artificial respiration as needed. Obtain emergency medical attention. Prompt action is essential.
- If on SKIN: Immediately flush with large amounts of water; use soap if available. Remove contaminated clothing.
- If in EYES: Immediately flush with large amounts of water for at least 15 minutes. Get prompt medical attention.
- If SWALLOWED: If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.
- =====

Section 5 -- FIRE FIGHTING MEASURES

CONDITIONS OF FLAMMABILITY

Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.

SUITABLE EXTINGUISHING MEDIA

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

SPECIAL PROTECTIVE EQUIPMENT FOR FIRE-FIGHTERS

Wear self contained breathing apparatus for fire fighting if necessary.

HAZARDOUS COMBUSTION PRODUCTS

Hazardous decomposition products formed under fire conditions. - Carbon oxides

FURTHER INFORMATION

Use water spray to cool unopened containers.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Extremely flammable - very low flash point. Vapors are heavier than air and may travel along ground or to low spots at considerable distance to a source of ignition resulting in potential flashback. Burning liquid may float on water. Heat may build up pressure and rupture closed containers.

=====

Section 6 -- ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Ventilate area with natural or explosion-proof, forced air ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapors accumulating to form explosive concentrations. Vapors can accumulate in low areas.

ENVIRONMENTAL PRECAUTIONS

Prevent further leakage or spillage if safe to do so. Avoid flushing into sewers, drains, waterways, and soil.

METHODS AND MATERIALS FOR CONTAINMENT AND CLEANING UP

Use absorbent materials to prevent footing hazard and to contain, then collect and place in container for disposal according to local regulations (see section 13).

Section 7 -- HANDLING AND STORAGE

PRECAUTIONS FOR SAFE HANDLING

Avoid contact with skin and eyes. Avoid inhalation of vapor or mist. Avoid prolonged or repeated contact with skin or clothing. If transferring this material to other containers, ground all containers to avoid static electricity buildup and discharge which may ignite flammable vapors.

CONDITIONS FOR SAFE STORAGE

Do not store near heat, sparks, or open flames. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Empty containers may contain residues and vapors; treat as if full and observe all products precautions. Do not reuse empty containers.
KEEP OUT OF REACH OF CHILDREN.

Section 8 -- EXPOSURE CONTROLS/PERSONAL PROTECTION

INGREDIENT UNITS

Methyl Ethyl Ketone

| | | |
|-----------|-----|-----|
| ACGIH TLV | 200 | ppm |
| OSHA PEL | 200 | ppm |
| STEL | 300 | ppm |

Tetrahydrofuran

| | | |
|-----------|-----|-----|
| ACGIH TLV | 50 | ppm |
| OSHA PEL | 200 | ppm |
| STEL | 250 | ppm |

Cyclohexanone

| | | |
|-----------|----|------------|
| ACGIH TLV | 20 | ppm (skin) |
| OSHA PEL | 50 | ppm |

Acetone

| | | |
|-----------|------|-----|
| ACGIH TLV | 500 | ppm |
| OSHA PEL | 1000 | ppm |
| STEL | 750 | ppm |

RESPIRATORY PROTECTION (SPECIFY TYPE): In confined poorly ventilated areas, use NIOSH/MSHA approved air purifying or supplied air purifying or supplied air respirators.

VENTILATION - LOCAL EXHAUST: Acceptable

SPECIAL: Explosion-proof equipment.

MECHANICAL (GENERAL): Preferable

OTHER: N/A

PROTECTIVE GLOVES: Wear rubber gloves.

EYE PROTECTION: Chemical splash goggles (ANSI Z-87.1 or equivalent)

OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Coveralls recommended.

WORK/HYGIENIC PRACTICES: Where use can result in skin contact, wash exposed areas thoroughly before eating, drinking, smoking, or leaving work area. Launder contaminated clothing before reuse.

Section 9 -- PHYSICAL AND CHEMICAL PROPERTIES

| | |
|--|-------------------------------------|
| BOILING POINT: | 151 F (66 C) @ 760mm Hg |
| SPECIFIC GRAVITY (H2O = 1): | <1.0 |
| VAPOR PRESSURE (mm Hg): | 140 @ 68 F (20 C) |
| MELTING POINT: | N/A |
| VAPOR DENSITY (AIR = 1): | 2.5 |
| EVAPORATION RATE (ETHYL ACETATE = 1): | 6 |
| APPEARANCE/ODOR: | Clear or Purple Liquid/Pungent Odor |
| SOLUBILITY IN WATER: | Soluble |
| VOC LEVEL: 550 g/L per SCAQMD Test Method 316A | |
| FLASH POINT | 4.1 F (-17 C) SETA CC |
| LOWER EXPLOSION LIMIT | 1.8% |
| UPPER EXPLOSION LIMIT | 11.8% |

Section 10 -- STABILITY AND REACTIVITY

CHEMICAL STABILITY: Stable under recommended storage conditions.

POSSIBILITY OF HAZARDOUS REACTIONS: Can form potentially explosive peroxides

upon long standing in air. Vapors may form explosive mixture with air.
CONDITIONS TO AVOID: Heat, sparks, open flames, and strong oxidizing,
acidic and basic conditions.
MATERIALS TO AVOID: Oxidizers, acids and bases.
HAZARDOUS DECOMPOSITION PRODUCTS: CO, CO2, HCl and fragmented hydrocarbons.
HAZARDOUS POLYMERIZATION: Will not occur.

=====
Section 11 -- TOXICOLOGY INFORMATION
=====

CHRONIC HEALTH HAZARDS

No ingredient in this product is an IARC, NTP or OSHA listed carcinogen.
Tetrahydrofuran - The National Toxicology Program has reported that
exposures of mice and rats to THF vapor levels up to 1800 ppm 6hr/day, 5
days/week for their lifetime caused an incidence of kidney tumors in male
rats and liver tumors in female mice. The significance of these findings
for human health are unclear at this time, and may be related to "species
specific" effects. Elevated incidences of tumors in humans have not been
reported for THF.

TOXICOLOGY DATA
Ingredient Name

Methyl Ethyl Ketone
Oral-Rat LD50:2737 mg/kg
Inhalation-Rat LC50:23,500 mg/m3/8H
Tetrahydrofuran
Oral-Rat LD50:1650 mg/kg
Inhalation-Rat LC50:21,000 ppm/3H
Cyclohexanone
Oral-Rat LD50:1535 mg/kg
Inhalation-Rat LC50:8000 ppm/4H
Acetone
Oral-Rat LD50: 5800 mg/kg
Inhalation-Rat LC50: 50,100mg/m3

=====
Section 12 -- Ecological Information
=====

ECOLOGICAL DATA
Ingredient Name

Methyl Ethyl Ketone
Food Chain Concentration Potential: None
WATERFOWL TOXICITY: N/A
BOD: 214%
AQUATIC TOXICITY: 5640 mg/l/48 hr/bluegill/TLm/fresh water
Tetrahydrofuran
Food Chain Concentration Potential: None
WATERFOWL TOXICITY: N/A
BOD: N/A
AQUATIC TOXICITY: N/A
Cyclohexanone
Food Chain Concentration Potential: None
WATERFOWL TOXICITY: N/A
BOD: N/A
AQUATIC TOXICITY: N/A
Acetone
Food Chain Concentration Potential: None
WATERFOWL TOXICITY: N/A
BOD: N/A
AQUATIC TOXICITY: LC50/96-hour for fish > 100 mg/l

=====
Section 13 -- DISPOSAL CONSIDERATIONS
=====

Waste Classification: RCRA classified hazardous waste. Dispose of absorbed
materials and liquid waste in approved, controlled incineration facility
in accordance with all local, state and federal regulations.
Disposal Method: Incineration

=====
Section 14 -- TRANSPORTATION INFORMATION
=====

DOT: UN1993, Flammable Liquid, N.O.S. (Methyl Ethyl Ketone & Tetrahydrofuran),
Class 3, PG II, ERG#127. Quarts and less: Consumer Commodity,
ORM-D
OCEAN (IMDG): UN1993, Flammable Liquid, N.O.S. (Methyl Ethyl Ketone & Tetrahydrofuran),
Class 3, PG II, EMS-No: F-E, S-D
Quarts and less: UN1993, Flammable Liquid, N.O.S. (Methyl Ethyl Ketone & Tetrahydrofuran),
Class 3, PG II, Limited Quantities or Ltd Qty
AIR (IATA): UN1993, Flammable Liquid, N.O.S. (Methyl Ethyl Ketone & Tetrahydrofuran),
Class 3, PG II, ERG#127.
WHMIS (CANADA): Class B-2

Section 15 -- REGULATORY INFORMATION

REGULATORY DATA

Ingredient Name

| | | |
|---------------------|----------------|-----------|
| Methyl Ethyl Ketone | SARA 313 | Yes |
| | TSCA Inventory | Yes |
| | CERCLA RQ | 5,000 lb. |
| | RCRA Code | U159 |
| Tetrahydrofuran | SARA 313 | No |
| | TSCA Inventory | Yes |
| | CERCLA RQ | 1,000 lb. |
| | RCRA Code | U213 |
| Cyclohexanone | SARA 313 | No |
| | TSCA Inventory | Yes |
| | CERCLA RQ | 5,000 lb. |
| | RCRA Code | U057 |
| Acetone | SARA 313 | No |
| | TSCA Inventory | Yes |
| | CERCLA RQ | 5,000 lb. |
| | RCRA Code | U002 |

Section 16 -- OTHER INFORMATION

This document is prepared pursuant to the OSHA Hazard Communication Standard (29 CFR 1910.1200). The information herein is given in good faith, but no warranty, expressed or implied is made. Consult RectorSeal for further information: (713) 263-8001

1. Identification

| | | |
|--------------------------------------|--|--|
| Product identifier | Oatey Clear Cleaner | |
| Other means of identification | | |
| SDS number | 1400C | |
| Synonyms | Part Numbers: 30766, 31493, 31494, 31495, 31496, 31520, 31521, 31522, 31523, 48945, 48946, 48947 | |
| Recommended use | Cleaning PVC, CPVC, or ABS Pipe and fittings | |
| Recommended restrictions | None known. | |
| | Manufacturer | Distributor |
| Company Name | Oatey Co. | Oatey Canada Supply Chain Services Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 | 145 Walker Drive Brampton, ON L6T 5P5, Canada |
| Telephone | 216-267-7100 | |
| E-mail | info@oatey.com | |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) | |
| Emergency First Aid | 1-877-740-5015 | |
| Contact person | MSDS Coordinator | |

2. Hazard(s) identification

| | | |
|------------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| | Health hazards not otherwise classified | Category 1 |
| Environmental hazards | Not classified. | |
| Label elements | | |



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. May be fatal if swallowed and enters airways. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Keep container tightly closed. Ground and bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use non-sparking tools. Take action to prevent static discharges. Do not breathe mist or vapor. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Do NOT induce vomiting. In case of fire: Use appropriate media to extinguish. Call a poison center/doctor if you feel unwell. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of waste and residues in accordance with local authority requirements. Dispose of contents/container in accordance with local/regional/national/international regulations. |

| | |
|---------------------------------|---|
| Other hazards | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. |
| Supplemental information | Not applicable. |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---------------|------------|--------|
| Acetone | 67-64-1 | 70-100 |
| Cyclohexanone | 108-94-1 | 1-5 |

All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. Aspiration may cause pulmonary edema and pneumonitis. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. |
| Most important symptoms/effects, acute and delayed | Aspiration may cause pulmonary edema and pneumonitis. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. May cause respiratory irritation. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
|--|---|

Methods and materials for containment and cleaning up

Use water spray to reduce vapors or divert vapor cloud drift. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Take precautionary measures against static discharge. Use only non-sparking tools. This product is miscible in water. Prevent entry into waterways, sewer, basements or confined areas.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not breathe mist or vapor. Avoid contact with eyes. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 500 ppm |
| | TWA | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

| Components | Type | Value |
|------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | STEL | 1800 mg/m ³ |
| | | 750 ppm |
| | TWA | 1200 mg/m ³ |
| Cyclohexanone (CAS 108-94-1) | STEL | 500 ppm |
| | | 200 mg/m ³ |
| | TWA | 50 ppm |
| | | 80 mg/m ³ |
| | | 20 ppm |

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

| Components | Type | Value |
|------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 500 ppm |
| | TWA | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |

Canada. Manitoba OELs (Reg. 217/2006, The Workplace Safety And Health Act)

| Components | Type | Value |
|------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 500 ppm |
| | TWA | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

| Components | Type | Value |
|------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

| Components | Type | Value |
|------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | STEL | 2380 mg/m3 1000 ppm |
| | TWA | 1190 mg/m3 500 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 25 ppm |

Biological limit values**ACGIH Biological Exposure Indices**

| Components | Value | Determinant | Specimen | Sampling Time |
|------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 25 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines**Canada - Alberta OELs: Skin designation**

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Canada - British Columbia OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Canada - Manitoba OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Canada - Ontario OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Canada - Quebec OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Canada - Saskatchewan OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Chemical respirator with organic vapor cartridge and full facepiece.

| | |
|---------------------------------------|---|
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier. |
| Other | Wear appropriate chemical resistant clothing. |
| Respiratory protection | Chemical respirator with organic vapor cartridge and full facepiece. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

| | |
|--|-------------------------------|
| Physical state | Liquid. |
| Form | Translucent liquid. |
| Color | Clear. |
| Odor | Solvent. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 151 °F (66.11 °C) |
| Flash point | 0 - 4.0 °F (-17.8 - -15.6 °C) |
| Evaporation rate | 5.5 - 8 |
| Flammability (solid, gas) | Not applicable. |

Upper/lower flammability or explosive limits

| | |
|--|---------------------|
| Explosive limit - lower (%) | 2 |
| Explosive limit - upper (%) | 13 |
| Vapor pressure | 145 mm Hg @ 20 C |
| Vapor density | 2.5 |
| Relative density | 0.82 +/- 0.02 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | > 302 °F (> 150 °C) |
| Viscosity | < 10 cP |

Other information

| | |
|-----------------------------|-------------------------|
| Bulk density | 6.8 lb/gal |
| Explosive properties | Not explosive. |
| Oxidizing properties | Not oxidizing. |
| VOC (Weight %) | 20 g/l SQACMD Method 24 |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |

Hazardous decomposition products No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful.

Skin contact Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics Aspiration may cause pulmonary edema and pneumonitis. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 800 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

ACGIH Carcinogens

Acetone (CAS 67-64-1)

A4 Not classifiable as a human carcinogen.

Cyclohexanone (CAS 108-94-1)

A3 Confirmed animal carcinogen with unknown relevance to humans.

Canada - Manitoba OELs: carcinogenicity

ACETONE (CAS 67-64-1)

Not classifiable as a human carcinogen.

CYCLOHEXANONE (CAS 108-94-1)

Confirmed animal carcinogen with unknown relevance to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Cyclohexanone (CAS 108-94-1)

3 Not classifiable as to carcinogenicity to humans.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

| | |
|---|---|
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

TDG

| | |
|-------------------------------------|---|
| UN number | UN1993 |
| UN proper shipping name | FLAMMABLE LIQUID, N.O.S. (Acetone) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IATA

| | |
|--------------------------------|------------------------------------|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquid, n.o.s. (Acetone) |

Transport hazard class(es)

Class 3
Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3H

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1993
UN proper shipping name FLAMMABLE LIQUID, N.O.S. (Acetone)
Transport hazard class(es)

Class 3
Subsidiary risk -
Packing group II
Environmental hazards

Marine pollutant No.
EmS F-E, S-E

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

Canadian regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

Controlled Drugs and Substances Act

Not regulated.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Acetone (CAS 67-64-1) Class B

International regulations**Stockholm Convention**

Not applicable.

Rotterdam Convention

Not applicable.

Kyoto protocol

Not applicable.

Montreal Protocol

Not applicable.

Basel Convention

Not applicable.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--|------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | Yes |
| Korea | Existing Chemicals List (ECL) | Yes |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other Information

| | |
|----------------------|--|
| Issue date | 21-December-2015 |
| Revision date | - |
| Version # | 01 |
| References | ACGIH EPA: AQUIRE database NLM: Hazardous Substances Data Base US. IARC Monographs on Occupational Exposures to Chemical Agents |
| Disclaimer | The information in the sheet was written based on the best knowledge and experience currently available. Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. |

Safety Data Sheet

Printing date 01/02/2020

Revised On 01/02/2020

1 Identification of the substance and manufacturer

Trade name: CLEAR
Product code: KF00200631
Recommended use: Paint and coatings application.
Uses advised against: Any that differs from the recommended use.
Manufacturer/Supplier: Keson LLC
 810 Commerce Street
 Aurora, IL 60504-7931
 Phone: 1-800-34-KESON
 www.keson.com
Emergency telephone number: 1-800-255-3924

2 Hazard(s) identification

Classification of the substance or mixture

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 Eye Irrit. 2A H319 Causes serious eye irritation.
 Repr. 1B H360 May damage fertility or the unborn child.
 STOT SE 3 H336 May cause drowsiness or dizziness.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

GHS Hazard pictograms



GHS02 GHS04 GHS07 GHS08

Signal word
Hazard statements

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 Causes serious eye irritation.

Precautionary statements

May damage fertility or the unborn child.
 May cause drowsiness or dizziness.
 May cause damage to organs through prolonged or repeated exposure.
 Obtain special instructions before use.
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not spray on an open flame or other ignition source.
 Pressurized container: Do not pierce or burn, even after use.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 Wash hands thoroughly after handling.
 Use only outdoors or in a well-ventilated area.
 Wear protective gloves/protective clothing/eye protection/face protection.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 Call a poison center/doctor if you feel unwell.
 If eye irritation persists: Get medical advice/attention.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients

Chemical characterization: Mixtures

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|--------------------|--------|
| 67-64-1 | Acetone | 22.26% |
| 74-98-6 | propane | 15.72% |
| 1317-65-3 | Calcium Carbonate | 10.28% |
| 64742-89-8 | VM&P Naphtha | 9.34% |
| 106-97-8 | n-butane | 9.24% |
| 108-88-3 | Toluene | 4.69% |
| 64742-47-8 | Mineral Spirits | 2.78% |
| 540-88-5 | tert-butyl acetate | 2.72% |
| 2807-30-9 | Glycol Ether EP | 2.25% |

4 First-aid measures

After inhalation: Supply fresh air; consult doctor in case of complaints.
After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor.
After swallowing: Rinse mouth with water. Do not induce vomiting.
Most important symptoms and effects: Dizziness

(Contd. on page 2/3)

Safety Data Sheet

Printing date 01/02/2020

Revised On 01/02/2020

Trade name: CLEAR

(Contd. of page 1)

Indication of any immediate medical attention needed: No further relevant information available.

5 Fire-fighting measures

Extinguishing agents: CO₂, extinguishing powder or water spray. Fight larger fires with water spray.
Special hazards: Can form explosive gas-air mixtures.
Protective equipment for firefighters: A respiratory protective device may be necessary.

6 Accidental release measures

Personal precautions, protective equipment and emergency procedures: Use respiratory protective device against the effects of fumes/dust/aerosol.
Methods and material for containment and cleaning up: Dispose contaminated material as waste according to section 13.

7 Handling and storage

Precautions for safe handling: Use only in well ventilated areas.
Storage requirements: Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions. Store locked up.

8 Exposure controls/personal protection**Components with limit values that require monitoring at the workplace:****67-64-1 Acetone**

PEL (USA) Long-term value: 2400 mg/m³, 1000 ppm
REL (USA) Long-term value: 590 mg/m³, 250 ppm
TLV (USA) Short-term value: 1187 mg/m³, 500 ppm
Long-term value: 594 mg/m³, 250 ppm
BEI

74-98-6 propane

PEL (USA) Long-term value: 1800 mg/m³, 1000 ppm
REL (USA) Long-term value: 1800 mg/m³, 1000 ppm
TLV (USA) refer to Appendix F in TLVs&BEIs book; D, EX

106-97-8 n-butane

REL (USA) Long-term value: 1900 mg/m³, 800 ppm
TLV (USA) Short-term value: 2370 mg/m³, 1000 ppm
(EX)

108-88-3 Toluene

PEL (USA) Long-term value: 200 ppm
Ceiling limit value: 300; 500* ppm
*10-min peak per 8-hr shift
REL (USA) Short-term value: 560 mg/m³, 150 ppm
Long-term value: 375 mg/m³, 100 ppm
TLV (USA) Long-term value: 75 mg/m³, 20 ppm
BEI

540-88-5 tert-butyl acetate

PEL (USA) Long-term value: 950 mg/m³, 200 ppm
REL (USA) Long-term value: 950 mg/m³, 200 ppm
TLV (USA) Short-term value: 712 mg/m³, 150 ppm
Long-term value: 238 mg/m³, 50 ppm

Ingredients with biological limit values:**67-64-1 Acetone**

BEI (USA) 50 mg/L
Medium: urine
Time: end of shift
Parameter: Acetone (nonspecific)

Hygienic protection: Immediately remove all soiled and contaminated clothing.
Wash hands after use.
Store protective clothing separately.
Avoid contact with the eyes and skin.
Do not eat or drink while working.

Breathing equipment: A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene.

Hand protection: Nitrile gloves.
The glove material must be impermeable and resistant to the substance.

Safety Data Sheet

Printing date 01/02/2020

Revised On 01/02/2020

Trade name: CLEAR

Eye protection: Tightly sealed goggles

(Contd. of page 2)

9 Physical and chemical properties

Appearance: Aerosol.
Odor: Aromatic
Odor threshold: Not determined.
pH-value: Not determined.
Melting point/Melting range Undetermined.
Boiling point: -44 °C (-111.2 °F)
Flash point: -19 °C (-66.2 °F)
Flammability (solid, gas): Extremely flammable.
Decomposition temperature: Not determined.
Auto igniting: Product is not self-igniting.
Danger of explosion: In use, may form flammable/explosive vapour-air mixture.
Lower Explosion Limit: 1.7 Vol %
Upper Explosion Limit: 10.9 Vol %
Vapor pressure: Not determined.
Relative Density: Between 0.77 and 0.85 (Water equals 1.00)
Vapor density Not determined.
Evaporation rate Not applicable.
Partition coefficient: n-octonal/water: Not determined.
Solubility: Not determined.
Viscosity: Not determined.
VOC content (less exempt solvents): 40.2 %

10 Stability and reactivity

Reactivity: Stable at normal temperatures.
Conditions to avoid: Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures.
Chemical stability: Not fully evaluated.
Possibility of hazardous reactions: No dangerous reactions known.
Incompatible materials: No further relevant information available.
Hazardous decomposition: No dangerous decomposition products known.

11 Toxicological information

LD/LC50 values that are relevant for classification:

106-97-8 n-butane

Inhalative LC50/4 h 658 mg/l (rat)

Information on toxicological effects: No data available.
Skin effects: No irritant effect.
Eye effects: Irritating effect.
Sensitization: No sensitizing effects known.

12 Ecological information

Aquatic toxicity: Hazardous for water, do not empty into drains.
Persistence and degradability: The product is degradable after prolonged exposure to natural weathering processes.
Other information: This product does not contain any chlorofluorocarbons (CFC's), hydrochlorofluorocarbons (HCFC's), perfluorocarbons (PFC's), heavy metals (chromium, lead, cadmium), or chlorinated solvents.
Bioaccumulative potential: No further relevant information available.
Mobility in soil: No further relevant information available.
Other adverse effects: No further relevant information available.

13 Disposal considerations

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.
Recommendation: Completely empty cans should be recycled.

14 Transport information

UN-Number UN1950
DOT N/A
DOT Consumer Commodity ORM-D
ADR Aerosols, flammable
 1950 Aerosols

(Contd. on page 3 of 5)

Safety Data Sheet

Printing date 01/02/2020

Revised On 01/02/2020

Trade name: CLEAR

(Contd. of page 3)

Transport hazard class(es):
Class 2.1
Marine pollutant: No
Special precautions for user: Warning: Gases
EMS Number: F-D,S-U
Packaging Group: --
UN "Model Regulation": UN1950, Aerosols, 2.1

15 Regulatory information**SARA Section 355 (extremely hazardous substances):**

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

108-88-3 | Toluene

Toxic Substances Control Act**(TSCA):** All hazardous ingredients are found on the inventory list of substances.**Canadian Domestic Substances List****(DSL):** All ingredients are listed or exempted.**Consumer Product Safety****Comission (CPSC):** This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.**California Proposition 65 chemicals known to cause cancer:**

100-41-4 | ethyl benzene

Prop 65 chemicals known to cause birth defects or reproductive harm:

108-88-3 | Toluene

EPA:

67-64-1 | Acetone

16 Other information**Contact:** Regulatory Affairs

1. PRODUCT AND COMPANY IDENTIFICATION

Company

Arkema Inc.
900 First Avenue
King of Prussia, Pennsylvania 19406

Functional Additives

Customer Service Telephone Number: (800) 331-7654
(Monday through Friday, 8:00 AM to 5:00 PM EST)

Emergency Information

Transportation: CHEMTREC: (800) 424-9300
(24 hrs., 7 days a week)
Medical: Rocky Mountain Poison Center: (866) 767-5089
(24 hrs., 7 days a week)

Product Information

Product name: LUPEROX® DDM-9
Synonyms: Not available
Molecular formula: Complex mixture
Chemical family: Organic peroxide - ketone peroxides
Product use: initiator/catalyst

2. HAZARDS IDENTIFICATION

Emergency Overview

Color: colourless
Physical state: liquid
Form: oily
Odor: sweet

***Classification of the substance or mixture:**

Organic peroxides, Type D, H242
Oral: Acute toxicity, Category 4, H302
Skin corrosion, Category 1B, H314
Serious eye damage, Category 1, H318
Chronic aquatic toxicity, Category 3, H412

*For the full text of the H-Statements mentioned in this Section, see Section 16.

GHS-Labeling

Hazard pictograms:



Signal word:

Danger

Hazard statements:

H242 : Heating may cause a fire.

H302 : Harmful if swallowed.

H314 : Causes severe skin burns and eye damage.

H412 : Harmful to aquatic life with long lasting effects.

Supplemental Hazard Statements:

Organic peroxide. Hazardous decomposition may occur.

Precautionary statements:

Prevention:

- P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.
- P220 : Keep/Store away from clothing/ combustible materials.
- P234 : Keep only in original container.
- P264 : Wash skin thoroughly after handling.
- P270 : Do not eat, drink or smoke when using this product.
- P273 : Avoid release to the environment.
- P280 : Wear protective gloves/ protective clothing/ eye protection/ face protection.

Response:

- P301 + P312 : IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell.
- P301 + P330 + P331 : IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
- P303 + P361 + P353 : IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
- P304 + P340 : IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
- P305 + P351 + P338 : IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- P310 : Immediately call a POISON CENTER or doctor/ physician.
- P363 : Wash contaminated clothing before reuse.

Storage:

- P405 : Store locked up.
- P410 : Protect from sunlight.
- P411 + P235 : Maximum storage temperature is specified on label and in section 7 of SDS. Keep cool.
- P420 : Store away from other materials.

Disposal:

- P501 : Dispose of contents/ container to an approved waste disposal plant.

Supplemental information:

Potential Health Effects:

If swallowed, may cause severe irritation and injury to the mouth, throat and digestive tract.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS-No. | Wt/Wt | GHS Classification** |
|---|-----------|----------------|------------------------------|
| Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester | 6846-50-0 | >= 57 - < 59 % | H412 |
| 2-Butanone, peroxide | 1338-23-4 | >= 32 - < 34 % | H302, H312, H314, H318, H242 |

| | | | |
|----------------------------|-----------|------------------|--|
| 2,4-Pentanediol, 2-methyl- | 107-41-5 | >= 5.5 - < 6.5 % | H319, H336 |
| 2-Butanone | 78-93-3 | >= 1 - < 2 % | H225, H315, H319, H336 |
| 1-Butanamine, N,N-dibutyl- | 102-82-9 | <= 1 % | H302, H310, H330, H315 |
| Hydrogen peroxide | 7722-84-1 | <= 1 % | H271, H301, H332, H335, H314, H318, H412 |

**For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

Inhalation:

If inhaled, remove victim to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

Skin:

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. Thoroughly clean shoes before reuse.

Eyes:

In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention immediately.

Ingestion:

If swallowed, DO NOT induce vomiting unless directed to do so by medical personnel. Get medical attention immediately. If victim is fully conscious, give a cupful of water. Never give anything by mouth to an unconscious person. Rinse mouth.

5. FIREFIGHTING MEASURES

Extinguishing media (suitable):

Water spray, Foam, Dry chemical

Protective equipment:

Fire fighters and others who may be exposed to products of combustion should wear full fire fighting turn out gear (full Bunker Gear) and self-contained breathing apparatus (pressure demand / NIOSH approved or equivalent).

Further firefighting advice:

Fight fire with large amounts of water from a safe distance.
Cool closed containers exposed to fire with water spray.
Closed containers of this material may explode when subjected to heat from surrounding fire.
After a fire, wait until the material has cooled to room temperature before initiating clean-up activities.
Do not allow run-off from fire fighting to enter drains or water courses.
Fire fighting equipment should be thoroughly decontaminated after use.

Fire and explosion hazards:

Contact with incompatible materials or exposure to temperatures exceeding the SADT may result in a self-accelerating decomposition reaction with release of flammable vapors which may autoignite.

When burned, the following hazardous products of combustion can occur:

Carbon oxides

Hazardous organic compounds

6. ACCIDENTAL RELEASE MEASURES**Personal precautions, Emergency procedures, Methods and materials for containment/clean-up:**

Prevent further leakage or spillage if you can do so without risk. Evacuate area of all unnecessary personnel. Ventilate the area. Eliminate all ignition sources. Avoid generation of vapors. Contain and collect spillage with non-combustible absorbent material such as clean sand, earth, diatomaceous earth or non-acidic clay and place into suitable properly labeled containers for prompt disposal. DO NOT USE peat moss. DO NOT USE vermiculite. Sweep or scoop up using non-sparking tools and place into suitable properly labeled containers for prompt disposal. The sweepings should be wetted down further with water. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Consult a regulatory specialist to determine appropriate state or local reporting requirements, for assistance in waste characterization and/or hazardous waste disposal and other requirements listed in pertinent environmental permits.

Protective equipment:

Appropriate personal protective equipment is set forth in Section 8.

7. HANDLING AND STORAGE**Handling****General information on handling:**

Contact with materials to avoid or exposure to temperatures exceeding the SADT may result in a self-accelerating decomposition reaction with release of flammable vapors which may autoignite.

Do not taste or swallow.

Do not get in eyes, on skin, or on clothing.

Avoid breathing vapor or mist.

Keep away from heat, sparks and flames.

No smoking.

Use only with adequate ventilation.

Wash thoroughly after handling.

Prevent product contamination.

Keep container tightly closed and away from combustible materials.

Keep only in the original container.

Do not reuse container as it may retain hazardous product residue.

Emptied container retains vapor and product residue.

Container hazardous when empty.

Improper disposal or reuse of this container may be dangerous and/or illegal.

Storage**General information on storage conditions:**

Store in closed containers, in a secure area to prevent container damage and subsequent spillage. Outside or detached storage is preferred. Store out of direct sunlight in a cool well-ventilated place. Store in original container. Store away from combustibles and materials to avoid. Refer also to National Fire Protection Association (NFPA) Code 400, Hazardous Materials Code.

Storage stability – Remarks:

Follow the recommended storage temperatures provided in this Section in order to maintain stability and oxygen content.

Storage incompatibility – General:

Strong acids

Strong bases

Strong oxidizing agents

Reducing agents

Accelerators

Friedel - Crafts reaction catalyst

transition metal salts

metal ions

Brass

Copper

Iron

For all Organic Peroxides, compatible materials of contact are stainless steel 304 or 316 (preferred), high-density polyethylene (HDPE), polytetrafluoroethylene or glass linings.

Temperature tolerance – Do not store below:–

50 °F (10 °C)

Temperature tolerance – Do not store above:

100 °F (38 °C)

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Airborne Exposure Guidelines:

2-Butanone, peroxide (1338-23-4)

US. ACGIH Threshold Limit Values

| | |
|---------------------|---------|
| Ceiling Limit Value | 0.2 ppm |
|---------------------|---------|

2,4-Pentanediol, 2-methyl- (107-41-5)

US. ACGIH Threshold Limit Values

| | |
|---------------------|--------|
| Ceiling Limit Value | 25 ppm |
|---------------------|--------|

2-Butanone (78-93-3)

US. ACGIH Threshold Limit Values

| | |
|-----------------------------------|---------|
| Time weighted average | 200 ppm |
| Short Term Exposure Limit (STEL): | 300 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| | |
|------|---------------------|
| PEL: | 200 ppm (590 mg/m3) |
|------|---------------------|

Hydrogen peroxide (7722-84-1)

US. ACGIH Threshold Limit Values

| | |
|-----------------------|-------|
| Time weighted average | 1 ppm |
|-----------------------|-------|

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| | |
|------|-------------------|
| PEL: | 1 ppm (1.4 mg/m3) |
|------|-------------------|

Only those components with exposure limits are printed in this section. Limits with skin contact designation above have skin contact effect. Air sampling alone is insufficient to accurately quantitate exposure. Measures to prevent significant cutaneous absorption may be required. Limits with a sensitizer designation above mean that exposure to this material may cause allergic reactions.

Engineering controls:

Investigate engineering techniques to reduce exposures below airborne exposure limits or to otherwise reduce exposures. Provide ventilation if necessary to minimize exposures or to control exposure levels to below airborne exposure limits (if applicable see above). If practical, use local mechanical exhaust ventilation at sources of air contamination such as open process equipment.

Consult ACGIH ventilation manual or NFPA Standard 91 for design of exhaust systems.

Respiratory protection:

Avoid breathing vapor or mist. Where airborne exposure is likely or airborne exposure limits are exceeded (if applicable, see above), use NIOSH approved respiratory protection equipment appropriate to the material and/or its components. Full facepiece equipment is recommended and, if used, replaces need for face shield and/or chemical goggles. Consult respirator manufacturer to determine appropriate type equipment for a given application. Observe respirator use limitations specified by NIOSH or the manufacturer. For emergency and other conditions where there may be a potential for significant exposure or where exposure limit may be significantly exceeded, use an approved full face positive-pressure, self-contained breathing apparatus or positive-pressure airline with auxiliary self-contained air supply. Respiratory protection programs must comply with 29 CFR § 1910.134.

Skin protection:

Wear appropriate chemical resistant protective clothing and chemical resistant gloves to prevent skin contact.

Consult glove manufacturer to determine appropriate type glove material for given application. Wear chemical goggles, a face shield, and chemical resistant clothing such as a rubber apron when splashing may occur. Rinse immediately if skin is contaminated. Remove contaminated clothing immediately and wash before reuse. Clean protective equipment before reuse. Provide a safety shower at any location where skin contact can occur. Wash thoroughly after handling.

Eye protection:

Where there is potential for eye contact, wear a face shield, chemical goggles, and have eye flushing equipment immediately available.

9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|--|
| Color: | colourless |
| Physical state: | liquid |
| Form: | oily |
| Odor: | sweet |
| Odor threshold: | No data available |
| Flash point | The flashpoint of this product is greater than the Self Acceleration Decomposition Temperature (SADT). |
| Auto-ignition temperature: | No data available |
| Lower flammable limit (LFL): | No data available |
| Upper flammable limit (UFL): | No data available |
| pH: | No data available |
| Density: | 1.0077 g/cm ³ (68 °F (20 °C)) |
| Specific Gravity (Relative density): | 1.0088 (68 °F (20 °C))Water=1 (liquid) |
| Vapor pressure: | 5.20 mmHg (66 °F (19 °C)) |
| Vapor density: | No data available |
| Boiling point/boiling range: | Decomposes before boiling. Rate of decomposition increases with rising temperature. |
| Melting point/range: | No data available. |
| Freezing point: | No data available |
| Evaporation rate: | No data available |

| | |
|--|-------------------------------------|
| Solubility in water: | slightly soluble |
| Refractive index: | 1.4356 |
| Viscosity, dynamic: | 17.30 mPa.s 68 °F (20 °C) |
| Oil/water partition coefficient: | No data available |
| Self-Accelerating Decomposition Temperature (SADT): | 167 °F (75 °C) 45 pound container |
| Thermal decomposition | No data available |
| Active oxygen content: | 8.7 - 9.0 % |
| Flammability: | See GHS Classification in Section 2 |

10. STABILITY AND REACTIVITY

Stability:

This material is chemically unstable and should only be handled under specified conditions.

Hazardous reactions:

Hazardous polymerization does not occur.

Materials to avoid:

- Strong acids
- Strong bases
- Strong oxidizing agents
- Reducing agents
- Accelerators
- Friedel - Crafts reaction catalyst
- transition metal salts
- metal ions
- Brass
- Copper
- Iron

For all Organic Peroxides, compatible materials of contact are stainless steel 304 or 316 (preferred), high-density polyethylene (HDPE), polytetrafluoroethylene or glass linings.

Conditions / hazards to avoid:

SADT - Self Accelerating Decomposition Temperature. Lowest temperature at which the tested package size will undergo a self-accelerating decomposition reaction. This reaction will generate flammable vapors which may autoignite. The length of time to generate a decomposition reaction, after the SADT has been reached or exceeded, is dependent upon how much the SADT has been exceeded and the length of time needed for the reaction exotherm (heat spike from increasing decomposition rate) to initiate a rapid decomposition reaction. Typically, SADT is inversely proportional to package size. Larger packages will have a lower SADT due to smaller ratio to heat transfer area to volume of product. See HANDLING AND STORAGE section of this SDS for specified conditions. See Hazardous Decomposition Products below.

Hazardous decomposition products:

Temperatures at or above SADT can result in the release of hazardous decomposition products which are flammable and may autoignite.

Thermal decomposition giving flammable and toxic products:

Carbon oxides

Hazardous organic compounds

11. TOXICOLOGICAL INFORMATION

Data on this material and/or its components are summarized below.

Data for LUPEROX® DDM-9

Acute toxicity

Oral:

Acute toxicity estimate 1,992 mg/kg.

Dermal:

Acute toxicity estimate > 5,000 mg/kg.

Inhalation:

4 h Acute toxicity estimate 39.54 mg/l.

Data for Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester (6846-50-0)

Acute toxicity

Skin Irritation:

Not irritating. (Rabbit) Irritation Index: 0/8. (4 h)

Eye Irritation:

Causes mild eye irritation. (Rabbit)

Skin Sensitization:

Not a sensitizer. Repeated skin exposure. (Guinea pig) No skin allergy or irritation was observed.

Repeated dose toxicity

Repeated oral administration to rat / affected organ(s): kidney, liver / signs: clinical chemistry changes, changes in organ weights, hyaline droplet nephropathy / (not considered relevant in humans)

Subchronic dietary administration to dog / No adverse systemic effects reported.

Genotoxicity

Assessment in Vitro:

No genetic changes were observed in laboratory tests using: bacteria, animal cells

Developmental toxicity

Reproductive/Developmental Effects Screening Assay. dietary (rat) / No birth defects were observed.

Reproductive effects

Reproductive/Developmental Effects Screening Assay. dietary (rat) / No toxicity to reproduction. At high dose : levels produced toxic effects in the mothers and offspring

Human experience**Skin contact:**

No skin allergy was observed. (studied using human volunteers)

Data for 2-Butanone, peroxide (1338-23-4)**Acute toxicity****Skin Irritation:**

Causes severe skin burns. (Rabbit) (4 h) (33 %) (occluded exposure, In solution in Dimethyl phthalate)

Eye Irritation:

Causes serious eye damage. (Rabbit) (33 - 39 %) (In solution in Dimethyl phthalate)

Skin Sensitization:

Not a sensitizer. Guinea pig maximization test. No skin allergy was observed (40 %) (In solution in Dimethyl phthalate)

Repeated dose toxicity

Repeated oral administration to Rat / affected organ(s): stomach, liver / signs: Irritation of the gastric mucosa, increased organ weight

Subchronic dermal administration to rat and mouse / affected organ(s): skin / signs: severe damage / No adverse systemic effects reported.

Genotoxicity**Assessment in Vitro:**

Both positive and negative responses for genetic changes were observed in laboratory tests using: bacteria, animal cells

Genotoxicity**Assessment in Vivo:**

No genetic changes were observed in laboratory tests using: mice

Developmental toxicity

Reproductive/Developmental Effects Screening Assay. oral (Rat) / No birth defects were observed.

Reproductive effects

Reproductive/Developmental Effects Screening Assay. oral (Rat) / No toxicity to reproduction.

Human experience**Skin contact:**

No skin allergy was observed. (studied using human volunteers)

Skin allergy was observed. Isolated case reports after exposure to a mixture containing this substance.

Human experience**Eye contact:**

Eyes: Pain, tearing, sensitivity to light, irritation. Mist and/or vapor are reported to cause irritation when proper industrial hygiene controls/procedures are not used. (based on reports of occupational exposure to workers) (severity of effects depends on extent of exposure)

Eyes: Pain, causes severe burns. (accidental exposure to concentrated solutions) (based on reports of occupational exposure to workers) (severity of effects depends on extent of exposure)

Human experience**Ingestion:**

Esophagus: Severe irritation, burns. (accidental exposure to concentrated solutions)

Data for 2,4-Pentanediol, 2-methyl- (107-41-5)**Acute toxicity****Specific target organ toxicity - single exposure:**

May cause drowsiness or dizziness.

Skin Irritation:

Practically non-irritating. (Rabbit) Irritation Index: 0.4/8. (4 h)

Eye Irritation:

Causes serious eye irritation. (Rabbit)

Skin Sensitization:

Not a sensitizer. Repeated skin exposure. (Guinea pig) No skin allergy or irritation was observed.

Repeated dose toxicity

Repeated dietary administration to rat / affected organ(s): kidney, liver, stomach / signs: Irritation of the gastric mucosa / No significant impairment of function.

Repeated inhalation administration to rat / affected organ(s): upper respiratory tract / Local irritation (Aerosol)

Genotoxicity**Assessment in Vitro:**

No genetic changes were observed in laboratory tests using: bacteria, animal cells

Developmental toxicity

Exposure during pregnancy. Oral (rat) / No birth defects were observed. (delays in development, at doses that produce effects in mothers)

Reproductive effects

Reproductive/Developmental Effects Screening Assay. Oral (rat) / No toxicity to reproduction. At high dose : Effects on offspring / (increased mortality in the offspring, decreased growth rate)

Human experience**Inhalation:**

Discomfort. (severity of effects depends on extent of exposure) (studied using human volunteers)

Human experience**Skin contact:**

No skin allergy was observed. (studied using human volunteers)

Local irritation, redness, swelling. (subjects with dermatitis or eczema)

Central nervous system depression. (severity of effects depends on extent of exposure)

Human experience**Eye contact:**

Discomfort, slightly irritating. (liquid or aerosol) (studied using human volunteers) (severity of effects depends on extent of exposure)

Data for 2-Butanone (78-93-3)**Acute toxicity****Specific target organ toxicity - single exposure:**

May cause drowsiness or dizziness.

Skin Irritation:

Causes skin irritation. (Rabbit) (24 h)

Eye Irritation:

Causes serious eye irritation. (Rabbit) Draize Test 21/110.

Skin Sensitization:

Not a sensitizer. Buehler method. (Guinea pig) No skin allergy was observed

Repeated dose toxicity

Subchronic inhalation administration to Rat / affected organ(s): liver / signs: blood chemistry changes, changes in organ weights

Repeated inhalation administration to rat, mouse, cat, chicken / no nervous system injuries

Carcinogenicity

Chronic dermal application administration to Mouse / signs: No increase in tumor incidence was reported.

Genotoxicity**Assessment in Vitro:**

No genetic changes were observed in laboratory tests using: bacteria, animal cells, human cells

Both positive and equivocal responses have been reported in tests using: yeast

Genotoxicity**Assessment in Vivo:**

No genetic changes were observed in laboratory tests using: mice

Developmental toxicity

Exposure during pregnancy. inhalation (Mouse) / No birth defects were observed. (skeletal variations, delays in development)

Exposure during pregnancy. inhalation (Rat) / No birth defects were observed. (delays in development, at

doses that produce effects in mothers)

Reproductive effects

Reproduction test. drinking water (Rat) / No toxicity to reproduction / (similar material)

Aspiration hazard

May be fatal if swallowed and enters airways.

Human experience**Inhalation:**

Upper respiratory tract: irritation. (vapor)

Central nervous system: drowsiness, dizziness. Exposure to other materials makes the association questionable. (based on reports of occupational exposure to workers)

Nervous system: altered reflexes, changes in motor activity. Exposure to other materials makes the association questionable. (based on reports of occupational exposure to workers)

Human experience**Skin contact:**

Skin: No skin allergy was observed. (studied using human volunteers)

Skin: dermatitis, cracking. Has a degreasing effect on the skin. (repeated or prolonged exposure)

Human experience**Eye contact:**

Eyes: irritating. (vapor)

Data for 1-Butanamine, N,N-dibutyl- (102-82-9)**Acute toxicity****Skin Irritation:**

Causes skin irritation. (Rabbit) (1 h)

Eye Irritation:

Causes mild eye irritation. (Rabbit) Irritation Index: 2 / 110.

Skin Sensitization:

Not a sensitizer. Buehler method. (Guinea pig) No skin allergy was observed

Repeated dose toxicity

Repeated inhalation administration to Rat / signs: nasal irritation, incoordination, restlessness, tremors

Genotoxicity**Assessment in Vitro:**

No genetic changes were observed in laboratory tests using: bacteria, animal cells

Genotoxicity**Assessment in Vivo:**

No genetic changes were observed in a laboratory test using: mice

Developmental toxicity

Exposure during pregnancy. oral (Rat) / No birth defects were observed. (at doses that produce effects in mothers)

Data for Hydrogen peroxide (7722-84-1)**Acute toxicity****Specific target organ toxicity - single exposure:**

May cause respiratory irritation.

Skin Irritation:

Causes severe skin burns. (Rabbit) (3 min) (70 %) (aqueous solution)

Eye Irritation:

Causes serious eye damage. (Rabbit) (70 %) (aqueous solution)

Repeated dose toxicity

Repeated drinking water administration to rat and mouse / affected organ(s): Gastro-intestinal tract / signs: irritation

Repeated inhalation administration to Rat / affected organ(s): nose / signs: irritation

Carcinogenicity

Chronic drinking water administration to rat and mouse / affected organ(s): Gastro-intestinal tract / signs: Increased incidence of tumors was reported.

Classified by the International Agency for Research on Cancer as: Group 3: Unclassifiable as to carcinogenicity in humans.

Genotoxicity**Assessment in Vitro:**

Genetic changes were observed in laboratory tests using: bacteria, animal cells

Genotoxicity**Assessment in Vivo:**

Genetic changes were observed in a laboratory test using: mice, rats

Human experience**Inhalation:**

Throat: irritation. (based on reports of occupational exposure to workers)

Human experience**Skin contact:**

Skin: bleaching of hair. (based on reports of occupational exposure to workers)

Human experience**Eye contact:**

Eye: irritating. (based on reports of occupational exposure to workers)

Human experience**Ingestion:**

Gastrointestinal tract: bloating, ulceration, burns. (accidental exposure to concentrated solutions)

Lung: accumulation of fluid in the lungs, death. (severity of effects depends on extent of exposure)

12. ECOLOGICAL INFORMATION**Chemical Fate and Pathway**

Data on this material and/or its components are summarized below.

Data for Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester (6846-50-0)**Biodegradation:**

Inherently biodegradable. (aerobic, 28 d) biodegradation 71 % / The 10 day time window criterion is not fulfilled.

Theoretical Biological Oxygen Demand:

Theoretical oxygen demand (ThOD) = 2,400 mg/g

Bioaccumulation:

BCF = 670 (without metabolism)

BCF = 14,611 (with metabolism)

BCF = 5.2 - 31 (Carp)

Octanol Water Partition Coefficient:

log Pow = 4.04 - 4.91 (calculated)

Data for 2-Butanone, peroxide (1338-23-4)**Biodegradation:**

Readily biodegradable. (28 d) biodegradation 87 %

Octanol Water Partition Coefficient:

log Pow < 0.3

Data for 2,4-Pentanediol, 2-methyl- (107-41-5)**Biodegradation:**

Readily biodegradable. (28 d) biodegradation 81 %

Octanol Water Partition Coefficient:

log Pow = -0.14

Data for 2-Butanone (78-93-3)**Biodegradation:**

Readily biodegradable. (28 d) biodegradation 98 %

Octanol Water Partition Coefficient:

log Pow = 0.3

Photodegradation:

Half-life direct photolysis: = 6.9 d
(is rapidly degraded in air by OH radicals.)

Data for 1-Butanamine, N,N-dibutyl- (102-82-9)

Biodegradation:

Readily biodegradable (29 d) biodegradation 80.3 %

Biological Oxygen Demand:

15 d BOD >70%ThOD

Theoretical Biological Oxygen Demand:

Theoretical oxygen demand (ThOD) = 3,110 mg/g

Octanol Water Partition Coefficient:

log Pow = 3.338

Data for Hydrogen peroxide (7722-84-1)

Biodegradation:

Readily biodegradable. (0.02 d) biodegradation 99 %

Octanol Water Partition Coefficient:

log Pow = -1.57 (calculated)

Ecotoxicology

Data on this material and/or its components are summarized below.

Data for Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester (6846-50-0)

Aquatic toxicity data:

No effect up to the limit of solubility. Lepomis macrochirus (Bluegill sunfish) 96 h NOEC > 6 mg/l

Aquatic invertebrates:

No effect up to the limit of solubility. Daphnia magna (Water flea) 48 h EC50 > 1.46 mg/l

Algae:

No effect up to the limit of solubility. Selenastrum capricornutum 72 h EC50 (growth rate) > 7.49 mg/l

Chronic toxicity to aquatic invertebrates:

Harmful. Daphnia magna (Water flea) 21 d NOEC (reproduction) = 0.7 mg/l

Data for 2-Butanone, peroxide (1338-23-4)

Aquatic toxicity data:

Harmful. Poecilia reticulata (guppy) 96 h LC50 = 44.2 mg/l (In solution in Dimethyl phthalate)

Aquatic invertebrates:

Harmful. Daphnia (water flea) 48 h EC50 = 39 mg/l (In solution in Dimethyl phthalate)

Algae:

Toxic. Pseudokirchneriella subcapitata (green algae) 72 h ErC50 = 5.6 mg/l (In solution in Dimethyl phthalate)

Microorganisms:

Respiration inhibition / Activated sludge 30 min EC50 = 48 mg/l (In solution in Dimethyl phthalate)

Data for 2,4-Pentanediol, 2-methyl- (107-41-5)**Aquatic toxicity data:**

Practically nontoxic. *Oncorhynchus mykiss* (rainbow trout) 96 h LC50 = 9,450 mg/l
Practically nontoxic. *Lepomis macrochirus* (Bluegill sunfish) 96 h LC50 = 12,800 mg/l
Practically nontoxic. *Pimephales promelas* (fathead minnow) 96 h LC50 = 8,690 - 10,700 mg/l

Aquatic invertebrates:

Practically nontoxic. *Daphnia magna* (Water flea) 48 h EC50 = 3,200 - 5,410 mg/l

Algae:

Practically nontoxic. *Selenastrum capricornutum* 72 h EC50 > 429 mg/l

Microorganisms:

Bacteria 10 d NOEC > 1,000 mg/l

Data for 2-Butanone (78-93-3)**Aquatic toxicity data:**

Practically nontoxic. *Pimephales promelas* (fathead minnow) 96 h LC50 = 2,993 mg/l

Aquatic invertebrates:

Practically nontoxic. *Daphnia magna* (Water flea) 48 h EC50 = 308 mg/l

Algae:

Practically nontoxic. *Pseudokirchneriella subcapitata* (green algae) 72 h EC50 = 1,972 mg/l

Microorganisms:

Pseudomonas putida 16 h Toxicity threshold = 1,150 mg/l

Data for 1-Butanamine, N,N-dibutyl- (102-82-9)**Aquatic toxicity data:**

Harmful. *Oryzias latipes* (medaka) 96 h LC50 = 16.3 mg/l

Aquatic invertebrates:

Toxic. *Daphnia magna* (Water flea) 48 h EC50 = 8 mg/l

Algae:

Toxic. *Scenedesmus subspicatus* 72 h EbC50 = 8.2 mg/l (neutralized product)
Toxic. *Scenedesmus subspicatus* 72 h EbC50 = 3.5 mg/l (product not neutralized)

Microorganisms:

Nitrosomonas sp 2 h NOEC = 100 mg/l

Data for Hydrogen peroxide (7722-84-1)**Aquatic toxicity data:**

Harmful. *Pimephales promelas* (fathead minnow) 96 h LC50 = 16.4 mg/l

Aquatic invertebrates:

Toxic. *Daphnia pulex* (Water flea) 48 h EC50 = 2.4 mg/l

Algae:

Toxic. Skeletonema costatum (marine diatom) 72 h ErC50 = 1.38 mg/l

Microorganisms:

Activated sludge 0.5 h EC50 = 466 mg/l

Activated sludge 3 h EC50 > 1,000 mg/l

Chronic toxicity to aquatic invertebrates:

Harmful. Daphnia magna (Water flea) 21 d NOEC (reproduction) = 0.63 mg/l

13. DISPOSAL CONSIDERATIONS

Waste disposal:

Dilution followed by incineration is the preferred method. Dilution ratio of 10:1 in a clean, compatible, combustible solvent (i.e., Fuel Oil #2, mineral oil) will reduce reactivity hazard during incineration and transportation. Dispose of in accordance with federal, state and local regulations. Consult a regulatory specialist to determine appropriate state or local reporting requirements, for assistance in waste characterization and/or hazardous waste disposal and other requirements listed in pertinent environmental permits. Note: Chemical additions to, processing of, or otherwise altering this material may make this waste management information incomplete, inaccurate, or otherwise inappropriate. Furthermore, state and local waste disposal requirements may be more restrictive or otherwise different from federal laws and regulations.

Take appropriate measures to prevent release to the environment.

14. TRANSPORT INFORMATION

US Department of Transportation (DOT)

UN Number : 3105
 Proper shipping name : Organic peroxide type D, liquid
 Technical name : (Methyl ethyl ketone peroxide(s), <=45%)
 Class : 5.2
 Packaging group : II
 Marine pollutant : no
 Reportable quantity : 10 lbs (Methyl ethyl ketone peroxide(s))

International Maritime Dangerous Goods Code (IMDG)

UN Number : 3105
 Proper shipping name : ORGANIC PEROXIDE TYPE D, LIQUID
 Technical name : (METHY ETHYL KETONE PEROXIDE, <=45%)
 Class : 5.2
 Marine pollutant : no

15. REGULATORY INFORMATION

Chemical Inventory Status

| | | |
|------------|--------|-------------|
| EU. EINECS | EINECS | Conforms to |
|------------|--------|-------------|

LUPEROX® DDM-9

| | | |
|--|------------|---|
| United States TSCA Inventory | TSCA | The components of this product are all on the TSCA Inventory. |
| Canadian Domestic Substances List (DSL) | DSL | All components of this product are on the Canadian DSL |
| China. Inventory of Existing Chemical Substances in China (IECSC) | IECSC (CN) | Conforms to |
| Japan. ENCS - Existing and New Chemical Substances Inventory | ENCS (JP) | Conforms to |
| Japan. ISHL - Inventory of Chemical Substances | ISHL (JP) | Conforms to |
| Korea. Korean Existing Chemicals Inventory (KECI) | KECI (KR) | Conforms to |
| Philippines Inventory of Chemicals and Chemical Substances (PICCS) | PICCS (PH) | Conforms to |
| Australia Inventory of Chemical Substances (AICS) | AICS | Conforms to |

United States – Federal Regulations

SARA Title III – Section 302 Extremely Hazardous Chemicals:

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>SARA Reportable Quantities</u> | <u>SARA Threshold Planning Quantity</u> |
|----------------------|----------------|-----------------------------------|---|
| Hydrogen peroxide | 7722-84-1 | 1000 lbs | 1000 lbs |

SARA Title III - Section 311/312 Hazard Categories:

Acute Health Hazard, Reactivity Hazard

SARA Title III – Section 313 Toxic Chemicals:

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) - Reportable Quantity (RQ):

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Reportable quantity</u> |
|----------------------|----------------|----------------------------|
| 2-Butanone, peroxide | 1338-23-4 | 10 lbs |
| 2-Butanone | 78-93-3 | 5000 lbs |

United States – State Regulations

New Jersey Right to Know

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|----------------------------|----------------|
| 2-Butanone, peroxide | 1338-23-4 |
| 2,4-Pentanediol, 2-methyl- | 107-41-5 |
| 2-Butanone | 78-93-3 |
| 1-Butanamine, N,N-dibutyl- | 102-82-9 |
| Hydrogen peroxide | 7722-84-1 |

New Jersey Right to Know – Special Health Hazard Substance(s)

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|----------------------------|----------------|
| 2-Butanone, peroxide | 1338-23-4 |
| 2-Butanone | 78-93-3 |
| 1-Butanamine, N,N-dibutyl- | 102-82-9 |
| Hydrogen peroxide | 7722-84-1 |

Pennsylvania Right to Know

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|---|----------------|
| Propanoic acid, 2-methyl-, 2,2-dimethyl-1-(1-methylethyl)-1,3-propanediyl ester | 6846-50-0 |
| 2-Butanone, peroxide | 1338-23-4 |
| 2,4-Pentanediol, 2-methyl- | 107-41-5 |
| 2-Butanone | 78-93-3 |
| 1-Butanamine, N,N-dibutyl- | 102-82-9 |
| Hydrogen peroxide | 7722-84-1 |

Pennsylvania Right to Know – Environmentally Hazardous Substance(s)

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|----------------------|----------------|
| 2-Butanone, peroxide | 1338-23-4 |
| 2-Butanone | 78-93-3 |
| Hydrogen peroxide | 7722-84-1 |

California Prop. 65

This product does not contain any chemicals known to the State of California to cause cancer, birth defects, or any other reproductive defects.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

| | |
|------|--|
| H225 | Highly flammable liquid and vapour. |
| H242 | Heating may cause a fire. |
| H271 | May cause fire or explosion; strong oxidizer. |
| H301 | Toxic if swallowed. |
| H302 | Harmful if swallowed. |
| H310 | Fatal in contact with skin. |
| H312 | Harmful in contact with skin. |
| H314 | Causes severe skin burns and eye damage. |
| H315 | Causes skin irritation. |
| H318 | Causes serious eye damage. |
| H319 | Causes serious eye irritation. |
| H330 | Fatal if inhaled. |
| H332 | Harmful if inhaled. |
| H335 | May cause respiratory irritation. |
| H336 | May cause drowsiness or dizziness. |
| H412 | Harmful to aquatic life with long lasting effects. |

HMIS ratings:

| | |
|-------------|---------------------|
| Health: | 3 (SERIOUS HAZARD) |
| Fire: | 2 (MODERATE HAZARD) |
| Reactivity: | 3 (SERIOUS HAZARD) |

Latest Revision(s):

| | |
|-------------------|--------------|
| Reference number: | 000000034127 |
| Date of Revision: | 10/18/2015 |
| Date Printed: | 11/29/2016 |

LUPEROX® is a registered trademark of Arkema Inc.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, ARKEMA expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; **NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN.** The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement. See SDS for Health & Safety Considerations.

Arkema has implemented a Medical Policy regarding the use of Arkema products in Medical Devices applications that are in contact with the body or circulating bodily fluids (<http://www.arkema.com/en/social-responsibility/responsible-product-management/medical-device-policy/index.html>) Arkema has designated Medical grades to be used for such Medical Device applications. Products that have not been designated as Medical grades are not authorized by Arkema for use in Medical Device applications that are in contact with the body or circulating bodily fluids. In addition, Arkema strictly prohibits the use of any Arkema products in Medical Device applications that are implanted in the body or in contact with bodily fluids or tissues for greater than 30 days. The Arkema trademarks and the Arkema name shall not be used in conjunction with customers' medical devices, including without limitation, permanent or temporary implantable devices, and customers shall not represent to anyone else, that Arkema allows, endorses or permits the use of Arkema products in such medical devices.

It is the sole responsibility of the manufacturer of the medical device to determine the suitability (including biocompatibility) of all raw materials, products and components, including any medical grade Arkema products, in order to ensure that the final end-use product is safe for its end use; performs or functions as intended; and complies with all applicable legal and regulatory requirements (FDA or other national drug agencies) It is the sole responsibility of the manufacturer of the medical device to conduct all necessary

tests and inspections and to evaluate the medical device under actual end-use requirements and to adequately advise and warn purchasers, users, and/or learned intermediaries (such as physicians) of pertinent risks and fulfill any postmarket surveillance obligations. Any decision regarding the appropriateness of a particular Arkema material in a particular medical device should be based on the judgment of the manufacturer, seller, the competent authority, and the treating physician.

COMPOSITE
ENVISIONS





Safety Data Sheet

This safety data sheet complies with the requirements of: 2012 OSHA Hazard Communication Standard (29CFR 1910.1200)

Product name ANSUL ABC Multipurpose Dry Chemical Agent - Stored Pressure System

1. Identification

1.1. Product Identifier

Product name ANSUL ABC Multipurpose Dry Chemical Agent - Stored Pressure System

1.2. Other means of identification

Product code 435028
UN/ID no UN1044
Synonyms None
Chemical Family No information available

1.3. Recommended use of the chemical and restrictions on use

Recommended use No information available.
Uses advised against Consumer use.

1.4. Details of the Supplier of the Safety Data Sheet

Company Name Tyco Fire Protection Products
One Stanton Street
Marinette, WI 54143-2542
Telephone: 715-735-7411
Contact point Product Stewardship at 1-715-735-7411
E-mail address psra@tycofp.com

1.5. Emergency Telephone Number

Emergency telephone CHEMTREC 001-800-424-9300 or 001-703-527-3887

2. Hazards Identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Simple asphyxiants
Gases Under Pressure - Compressed Gas

2.2. Label Elements

Signal Word

WARNING

Hazard Statements

May displace oxygen and cause rapid suffocation
Contains gas under pressure; may explode if heated





Product code 435028

/ Product name ANSUL ABC /
Multipurpose Dry Chemical Agent -
Stored Pressure System

PAGE 2 / 9

Precautionary Statements

Storage

Protect from sunlight. Store in a well-ventilated place.

2.3. Hazards Not Otherwise Classified (HNOC)

Not Applicable.

2.4. Other Information

3. Composition/information on Ingredients

3.1. Mixture

The following component(s) in this product are considered hazardous under applicable OSHA(USA)

| Chemical name | CAS No. | weight-% |
|-------------------|------------|----------|
| Attapulgate | 12174-11-7 | 1 - 5 |
| Calcium carbonate | 471-34-1 | 1 - 5 |

4. First aid measures

4.1. Description of first aid measures

General Advice

Call 911 or emergency medical service. Remove and isolate contaminated clothing and shoes.

Eye Contact

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. If eye irritation persists: Get medical advice/attention.

Skin contact

In case of contact with liquefied gas, thaw frosted parts with lukewarm water.

Inhalation

Move victim to fresh air. If breathing is irregular or stopped, administer artificial respiration. Administer oxygen if breathing is difficult.

Ingestion

If swallowed: Call a POISON CENTER or doctor/physician if you feel unwell.

Self-Protection of the First Aider

Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

4.2. Most Important Symptoms and Effects, Both Acute and Delayed

Symptoms

None known.

4.3. Indication of Any Immediate Medical Attention and Special Treatment Needed

Note to physicians

Keep victim warm and quiet.

5. Fire-fighting measures

5.1. Suitable Extinguishing Media

Use extinguishing agent suitable for type of surrounding fire. Dry chemical or CO2. Water spray, fog or regular foam.



Product code 435028

/ Product name ANSUL ABC /
Multipurpose Dry Chemical Agent -
Stored Pressure System

PAGE 3 / 9

5.2. Unsuitable Extinguishing Media

None.

5.3. Specific Hazards Arising from the Chemical

Ruptured cylinders may rocket. Some may burn but none ignite readily.

5.4. Explosion Data

Sensitivity to Mechanical Impact None.

Sensitivity to Static Discharge None.

5.5. Protective Equipment and Precautions for Firefighters

Move containers from fire area if you can do it without risk. Damaged cylinders should be handled only by specialists.

6. Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

Personal Precautions Do not touch or walk through spilled material. Stop leak if you can do it without risk.

OTHER INFORMATION Ventilate the area.

For emergency responders Use personal protection recommended in Section 8.

6.2. Environmental Precautions

Environmental Precautions Use water spray to reduce vapors or divert vapor cloud drift. Avoid allowing water runoff to contact spilled material. Prevent entry into waterways, sewers, basements or confined areas. See Section 12 for additional Ecological Information.

6.3. Methods and material for containment and cleaning up

Methods for Containment If possible, turn leaking containers so that gas escapes rather than liquid. Allow substance to evaporate.

Methods for Cleaning Up Use personal protective equipment as required. Cover powder spill with plastic sheet or tarp to minimize spreading and keep powder dry. Take up mechanically, placing in appropriate containers for disposal. Avoid creating dust. Clean contaminated surface thoroughly.

7. Handling and Storage

7.1. Precautions for Safe Handling

Advice on safe handling Avoid generation of dust. Do not breathe dust/fume/gas/mist/vapors/spray. Use with local exhaust ventilation. Use personal protective equipment as required. Wash thoroughly after handling.

7.2. Conditions for safe storage, including any incompatibilities

Storage Conditions Store in a well-ventilated place. Keep cool. Keep container tightly closed. Guard against dust accumulation of material. Use care in handling/storage. Pressurized extinguishers



Product code 435028

/ Product name ANSUL ABC /
Multipurpose Dry Chemical Agent -
Stored Pressure System

PAGE 4 / 9

should be properly stored and secured to prevent falling or being knocked over.

Incompatible Materials Strong acids.

8. Exposure Controls/Personal Protection

8.1. Control Parameters

Exposure guidelines

| Chemical name | ACGIH TLV | OSHA PEL | NIOSH IDLH | Mexico OEL |
|-------------------------------|---|----------|---|------------|
| Attapulgit 12174-11-7 | TWA: 1 mg/m ³ respirable particulate matter | - | - | - |
| Calcium carbonate 471-34-1 | - | - | TWA: 10 mg/m ³ total dust TWA: 5 mg/m ³ respirable dust | - |

ACGIH (American Conference of Governmental Industrial Hygienists) OSHA (Occupational Safety and Health Administration of the US Department of Labor): NIOSH IDLH Immediately Dangerous to Life or Health

8.2. Appropriate Engineering Controls

Engineering controls Ensure adequate ventilation, especially in confined areas.

8.3. Individual protection measures, such as personal protective equipment

Eye/Face Protection Avoid contact with eyes. Tight sealing safety goggles.

Skin and Body Protection No special precautions are needed in handling this material.

Respiratory Protection In case of insufficient ventilation, wear suitable respiratory equipment.

Ventilation Use local exhaust or general dilution ventilation to control exposure with applicable limits

8.4. General hygiene considerations

Do not eat, drink or smoke when using this product. Handle in accordance with good industrial hygiene and safety practice.

9. Physical and Chemical Properties

9.1. Information on basic physical and chemical properties

| | | | |
|-----------------------|-------------------|--------------|--------|
| Physical State | powder | Color | Yellow |
| Odor | odorless | | |
| Odor Threshold | No data available | | |

| <u>Property</u> | <u>Values</u> | <u>Remarks • Method</u> |
|-------------------------------|-------------------|-------------------------|
| pH | No data available | |
| Melting point/freezing point | No data available | |
| Boiling point / boiling range | No data available | |
| Flash Point | No data available | |
| Evaporation Rate | No data available | |
| Flammability (solid, gas) | No data available | |
| Flammability limit in air | | |
| Upper flammability limit: | No data available | |
| Lower flammability limit: | No data available | |



Product code 435028

/ Product name ANSUL ABC /
Multipurpose Dry Chemical Agent -
Stored Pressure System

PAGE 5 / 9

| | |
|------------------------------|-------------------|
| Vapor Pressure | No data available |
| Vapor Density | No data available |
| Specific gravity | No data available |
| Water Solubility | No data available |
| Solubility in Other Solvents | No data available |
| Partition coefficient | No data available |
| Autoignition Temperature | No data available |
| Decomposition Temperature | No data available |
| Kinematic viscosity | No data available |

10. Stability and Reactivity

10.1. Chemical Stability

Stable under recommended storage conditions.

10.2. Reactivity

No data available

10.3. Possibility of hazardous reactions

Hazardous polymerization does not occur.

| | |
|---------------------------------|--|
| Hazardous Polymerization | Hazardous polymerization does not occur. |
|---------------------------------|--|

10.4. Conditions to Avoid

None known based on information supplied.

10.5. Incompatible Materials

Strong acids.

10.6. Hazardous decomposition products

Carbon oxides. Nitrogen oxides (NO_x).

11. Toxicological Information

11.1. Information on Likely Routes of Exposure

Product information

| | |
|---------------------|---|
| Inhalation | May cause irritation of respiratory tract. |
| Eye Contact | May cause irritation. |
| Skin contact | May cause irritation. |
| Ingestion | Ingestion may cause irritation to mucous membranes. |

Component Information

Acute Toxicity



Product code 435028

/ Product name ANSUL ABC /
 Multipurpose Dry Chemical Agent -
 Stored Pressure System

PAGE 6 / 9

| Chemical name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|-------------------------------|----------------------|-------------|-----------------|
| Calcium carbonate 471-34-1 | = 6450 mg/kg (Rat) | - | - |

11.2. Information on Toxicological Effects

Symptoms No information available.

11.3. Delayed and immediate effects as well as chronic effects from short and long-term exposure

Carcinogenicity Attapulgit (palygorskite fibers) is a hydrated magnesium aluminum silicate. Long palygorskite (attapulgit) fibers (>5 micrometers) are possibly carcinogenic to humans (Group 2B). Short palygorskite (attapulgit) fibers (<5 micrometers) cannot be classified as to their carcinogenicity to humans (Group 3). The attapulgit present in this product contains fibers 0.5-2.5 um range, so would be considered by IARC as Group 3. This product contains crystalline silica (quartz) in a non-respirable form. Inhalation of crystalline silica is unlikely to occur from exposure to this product.

| Chemical name | ACGIH | IARC | NTP | OSHA |
|--------------------------|-------|---------|-----|------|
| Attapulgit 12174-11-7 | - | Group 3 | - | X |

IARC (International Agency for Research on Cancer)

Group 3 - Not Classifiable as to Carcinogenicity in Humans

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

Reproductive Toxicity No information available.
STOT - Single Exposure No information available.
STOT - Repeated Exposure No information available.
Target organ effects Eyes, Respiratory System, Skin.
Aspiration Hazard No information available.

11.4. Numerical Measures of Toxicity - Product information

The following values are calculated based on chapter 3.1 of the GHS document

ATEmix (dermal) 8156 mg/kg

12. Ecological Information

12.1. Ecotoxicity

Not classified.

| Chemical name | Algae/aquatic plants | Fish | Crustacea |
|--|-----------------------|--|---|
| Ammonium sulfate, technical 7783-20-2 | - | LC50 96 h 460 - 1000 mg/L Leuciscus idus static; LC50 96 h 123 - 128 mg/L Poecilia reticulata semi-static; LC50 96 h = 126 mg/L Poecilia reticulata; LC50 96 h > 100 mg/L Pimephales promelas; LC50 96 h 32.2 - 41.9 mg/L Oncorhynchus mykiss flow-through; LC50 96 h 5.2 - 8.2 mg/L Oncorhynchus mykiss static; LC50 96 h = 18 mg/L Cyprinus carpio; LC50 96 h = 480 mg/L Brachydanio rerio flow-through; LC50 96 h = 420 mg/L Brachydanio rerio semi-static; LC50 96 h = 250 mg/L Brachydanio rerio | LC50 48 h = 14 mg/L Daphnia magna; EC50 24 h = 423 mg/L Daphnia magna |
| Silicic Acid/silica gel, Amorphous | EC50 (72h) = 440 mg/L | LC50 (96h) static = 5000 mg/L | EC50 (48h) = 7600 mg/L |



Product code 435028

/ Product name ANSUL ABC /
Multipurpose Dry Chemical Agent -
Stored Pressure System

PAGE 7 / 9

| | | | |
|-----------|---------------------------------|-------------------|--------------------|
| 7631-86-9 | Pseudokirchneriella subcapitata | Brachydanio rerio | Ceriodaphnia dubia |
|-----------|---------------------------------|-------------------|--------------------|

12.2. Persistence and Degradability

No information available.

12.3. Bioaccumulation

No information available.

12.4. Other Adverse Effects

No information available

13. Disposal Considerations

13.1. Waste Treatment Methods

Disposal of wastes

This material, as supplied, is not a hazardous waste according to Federal regulations (40 CFR 261). This material could become a hazardous waste if it is mixed with or otherwise comes in contact with a hazardous waste, if chemical additions are made to this material, or if the material is processed or otherwise altered. Consult 40 CFR 261 to determine whether the altered material is a hazardous waste. Consult the appropriate state, regional, or local regulations for additional requirements.

Contaminated Packaging

Do not reuse container. Pressurized container: Do not pierce or burn, even after use.

14. Transport Information

DOT

| | |
|---------------------------------|---------------------------------|
| UN/ID no | UN1044 |
| Proper Shipping Name | Fire extinguishers |
| Description | UN1044, Fire extinguishers, 2.2 |
| Hazard class | 2.2 |
| Special Provisions | 18, 110 |
| Emergency Response Guide Number | 126 |

TDG

| | |
|----------------------|---------------------------------|
| UN/ID no | UN1044 |
| Description | UN1044, Fire extinguishers, 2.2 |
| Proper Shipping Name | Fire extinguishers |
| Hazard class | 2.2 |

MEX

| | |
|----------------------|---------------------------------|
| UN/ID no | UN1044 |
| Description | UN1044, Fire extinguishers, 2.2 |
| Proper Shipping Name | Fire extinguishers |
| Hazard class | 2.2 |

ICAO (air)

| | |
|-------------|---------------------------------|
| UN/ID no | UN1044 |
| Description | UN1044, Fire extinguishers, 2.2 |



Product code 435028

/ Product name ANSUL ABC /
Multipurpose Dry Chemical Agent -
Stored Pressure System

PAGE 8 / 9

Proper Shipping Name Fire extinguishers
Hazard class 2.2
Special Provisions A19

IATA

UN/ID no UN1044
Description UN1044, Fire extinguishers, 2.2
Proper Shipping Name Fire extinguishers
Hazard class 2.2
ERG Code 2L
Special Provisions A19

IMDG

UN/ID no UN1044
Description UN1044, Fire extinguishers, 2.2
Proper Shipping Name Fire extinguishers
Hazard class 2.2
EmS-No F-C, S-V
Special Provisions 225

15. Regulatory Information

15.1. International Inventories

TSCA Complies
DSL/NDSL Complies
ENCS Does not comply
IECSC Complies
KECL Does not comply
PICCS Complies
AICS Complies

Legend:

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory
DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List
ENCS - Japan Existing and New Chemical Substances
IECSC - China Inventory of Existing Chemical Substances
KECL - Korean Existing and Evaluated Chemical Substances
PICCS - Philippines Inventory of Chemicals and Chemical Substances
AICS - Australian Inventory of Chemical Substances

15.2. US Federal Regulations

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

| Chemical name | SARA 313 - Threshold Values % |
|---|-------------------------------|
| Ammonium dihydrogen phosphate - 7722-76-1 | 1.0 |
| Ammonium sulfate, technical - 7783-20-2 | 1.0 |

SARA 311/312 Hazard Categories

Acute Health Hazard No
Chronic health hazard No
Fire Hazard No
Sudden Release of Pressure Hazard Yes
Reactive Hazard No



Product code 435028

/ Product name ANSUL ABC /
Multipurpose Dry Chemical Agent -
Stored Pressure System

PAGE 9 / 9

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level pertaining to releases of this material

15.3. US State Regulations

California Proposition 65

This product contains the following Proposition 65 chemicals

| Chemical name | California Proposition 65 |
|--------------------------|---------------------------|
| Attapulgite - 12174-11-7 | Carcinogen |

U.S. State Right-to-Know Regulations

| Chemical name | New Jersey | Massachusetts | Pennsylvania |
|---|------------|---------------|--------------|
| Silicic Acid/silica gel, Amorphous 7631-86-9 | - | X | X |
| Magnesium carbonate 546-93-0 | X | X | - |

16. Other information, including date of preparation of the last revision

| | | | | |
|-------------|------------------|----------------|--------------------|------------------------------------|
| NFPA | Health Hazards 0 | Flammability 0 | Instability 0 | Physical and chemical properties - |
| HMIS | Health Hazards 0 | Flammability 0 | Physical Hazards 3 | Personal Protection X |

Revision date 13-Feb-2019

Revision note No information available.

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

Product Name: MOBIL RARUS 424
Revision Date: 22 Mar 2021
Page 1 of 10

SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL RARUS 424
Product Description: Base Oil and Additives
Product Code: 201560202010, 606038-85
Intended Use: Air compressor oil

COMPANY IDENTIFICATION

Supplier: AMPOL AUSTRALIA PTY LTD
ABN 17 000 032 128
2 Market Street
Sydney
New South Wales 2000 Australia

| | |
|--------------------------------------|----------------|
| 24 Hour Emergency Telephone | 1800 033 111 |
| Product Technical Information | 1300364169 |
| Supplier General Contact | +612 9250-5000 |
| FAX | +612 9250-5742 |

SECTION 2 HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

Contains: N-PHENYL-1-NAPHTHYLAMINE, OXA DITHIA PHOSPHATETRADECANOIC ACID ETHYLHEXYL ESTER May produce an allergic reaction.

Other hazard information:

Physical / Chemical Hazards:

No significant hazards.

Health Hazards:

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

Environmental Hazards:

No significant hazards.

Product Name: MOBIL RARUS 424

Revision Date: 22 Mar 2021

Page 2 of 10

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

| | |
|------------------|---|
| SECTION 3 | COMPOSITION / INFORMATION ON INGREDIENTS |
|------------------|---|

This material is defined as a mixture.

Hazardous Substance(s) or Complex Substance(s) required for disclosure

| Name | CAS# | Concentration* | GHS Hazard Codes |
|---|------------|----------------|--|
| N-PHENYL-1-NAPHTHYLAMINE | 90-30-2 | 0.1 - < 1% | H302, H317, H373, H400(M factor 1), H410(M factor 1) |
| OXA DITHIA PHOSPHATETRADECANOIC ACID ETHYLHEXYL ESTER | 83547-95-9 | 0.1 - < 1% | H315, H317, H401, H411 |

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume. Other ingredients determined not to be hazardous up to 100%.

| | |
|------------------|---------------------------|
| SECTION 4 | FIRST AID MEASURES |
|------------------|---------------------------|

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

NOTE TO PHYSICIAN

None

| | |
|------------------|-------------------------------|
| SECTION 5 | FIRE FIGHTING MEASURES |
|------------------|-------------------------------|

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight streams of water

Product Name: MOBIL RARUS 424

Revision Date: 22 Mar 2021

Page 3 of 10

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulphur oxides

FLAMMABILITY PROPERTIES

Flash Point [Method]: >200°C (392°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6 ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

SPILL MANAGEMENT

Land Spill: Stop leak if you can do so without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do so without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dyke far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways,

sewers, basements or confined areas.

| | |
|------------------|-----------------------------|
| SECTION 7 | HANDLING AND STORAGE |
|------------------|-----------------------------|

HANDLING

This material is not intended for use in air compressors for breathing applications. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or earthing procedures. However, bonding and earthing may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

Static Accumulator: This material is a static accumulator. A liquid is typically considered a nonconductive, static accumulator if its conductivity is below 100 pS/m (100x10E-12 Siemens per meter) and is considered a semiconductive, static accumulator if its conductivity is below 10,000 pS/m. Whether a liquid is nonconductive or semiconductive, the precautions are the same. A number of factors, for example liquid temperature, presence of contaminants, anti-static additives and filtration can greatly influence the conductivity of a liquid.

STORAGE

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

Material is defined under the National Standard [NOHSC:1015] Storage and Handling of Workplace Dangerous Goods.

| | |
|------------------|--|
| SECTION 8 | EXPOSURE CONTROLS / PERSONAL PROTECTION |
|------------------|--|

Exposure limits/standards for materials that can be formed when handling this product:

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

Biological limits

No biological limits allocated.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:
No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a

Product Name: MOBIL RARUS 424

Revision Date: 22 Mar 2021

Page 5 of 10

level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

Particulate

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

Nitrile, Viton

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practise good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Liquid

Colour: Amber

Odour: Characteristic

Odour Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 °C): 0.87

Flammability (Solid, Gas): N/A

Flash Point [Method]: >200°C (392°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Product Name: MOBIL RARUS 424

Revision Date: 22 Mar 2021

Page 6 of 10

Autoignition Temperature: N/D
Boiling Point / Range: > 316°C (600°F) [Estimated]
Decomposition Temperature: N/D
Vapour Density (Air = 1): > 2 at 101 kPa [Estimated]
Vapour Pressure: < 0.013 kPa (0.1 mm Hg) at 20 °C [Estimated]
Evaporation Rate (n-butyl acetate = 1): N/D
pH: N/A
Log Pow (n-Octanol/Water Partition Coefficient): N/D
Solubility in Water: Negligible
Viscosity: 32 cSt (32 mm²/sec) at 40 °C
Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D
Melting Point: N/A
Pour Point: -18°C (0°F)
DMSO Extract (mineral oil only), IP-346: < 3 %wt

| | |
|-------------------|---------------------------------|
| SECTION 10 | STABILITY AND REACTIVITY |
|-------------------|---------------------------------|

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

INCOMPATIBLE MATERIALS: Strong oxidisers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

POSSIBILITY OF HAZARDOUS REACTIONS: Hazardous polymerization will not occur.

| | |
|-------------------|----------------------------------|
| SECTION 11 | TOXICOLOGICAL INFORMATION |
|-------------------|----------------------------------|

INFORMATION ON TOXICOLOGICAL EFFECTS

| Hazard Class | Conclusion / Remarks |
|--|---|
| Inhalation | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Irritation: No end point data for material. | Negligible hazard at ambient/normal handling temperatures. |
| Ingestion | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin Corrosion/Irritation: No end point data for material. | Negligible irritation to skin at ambient temperatures. Based on assessment of the components. |
| Eye | |
| Serious Eye Damage/Irritation: No end point data for material. | May cause mild, short-lasting discomfort to eyes. Based on assessment of the components. |
| Sensitisation | |

Product Name: MOBIL RARUS 424

Revision Date: 22 Mar 2021

Page 7 of 10

| | |
|--|--|
| Respiratory Sensitization: No end point data for material. | Not expected to be a respiratory sensitizer. |
| Skin Sensitization: No end point data for material. | Not expected to be a skin sensitizer. Based on assessment of the components. |
| Aspiration: Data available. | Not expected to be an aspiration hazard. Based on physico-chemical properties of the material. |
| Germ Cell Mutagenicity: No end point data for material. | Not expected to be a germ cell mutagen. Based on assessment of the components. |
| Carcinogenicity: No end point data for material. | Not expected to cause cancer. Based on assessment of the components. |
| Reproductive Toxicity: No end point data for material. | Not expected to be a reproductive toxicant. Based on assessment of the components. |
| Lactation: No end point data for material. | Not expected to cause harm to breast-fed children. |
| Specific Target Organ Toxicity (STOT) | |
| Single Exposure: No end point data for material. | Not expected to cause organ damage from a single exposure. |
| Repeated Exposure: No end point data for material. | Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components. |

TOXICITY FOR SUBSTANCES

| NAME | ACUTE TOXICITY |
|--------------------------|--|
| N-PHENYL-1-NAPHTHYLAMINE | Oral Lethality: LD 50 1625 mg/kg (Rat) |

OTHER INFORMATION

For the product itself:

Component concentrations in this formulation would not be expected to cause skin sensitization, based on tests of the components, this formulation, or similar formulations.

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitising in test animals. N-phenyl-1-naphthylamine (PAN): A single oral overexposure may result in clinical signs/symptoms of cyanosis, headache, shallow respiration, dizziness, confusion, low blood pressure, convulsions, coma, or jaundice. Hematuria may occur due to bladder and kidney irritation, and anemia may develop later. Repeated exposure in laboratory animals caused liver and kidney damage and depressed bone marrow activity. Undiluted PAN is a skin sensitiser. Human testing of lubricants containing 1.0% PAN resulted in no reactions indicative of sensitisation.

IARC Classification:

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = IARC 1

2 = IARC 2A

3 = IARC 2B

SECTION 12

ECOLOGICAL INFORMATION

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

Product Name: MOBIL RARUS 424
 Revision Date: 22 Mar 2021
 Page 8 of 10

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

ECOLOGICAL DATA

Ecotoxicity

| Test | Duration | Organism Type | Test Results |
|----------------------------|-----------|---------------|--------------|
| Aquatic - Chronic Toxicity | 21 day(s) | Daphnia magna | NOELR 1 mg/l |

SECTION 13 DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products. Protect the environment. Dispose of used oil at designated sites. Minimize skin contact. Do not mix used oils with solvents, brake fluids or coolants.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. **DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.**

SECTION 14 TRANSPORT INFORMATION

LAND (ADG) : Not Regulated for Land Transport

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

Marine Pollutant: No

Product Name: MOBIL RARUS 424
 Revision Date: 22 Mar 2021
 Page 9 of 10

AIR (IATA): Not Regulated for Air Transport

| | |
|-------------------|-------------------------------|
| SECTION 15 | REGULATORY INFORMATION |
|-------------------|-------------------------------|

This material is not considered hazardous according to Australia Model Work Health and Safety Regulations.

Product is not regulated according to Australian Dangerous Goods Code.

No Poison Schedule number allocated by the Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP) established under the Therapeutic Goods Act.

AS1940 COMBUSTIBLE CLASS: C2

REGULATORY STATUS AND APPLICABLE LAWS AND REGULATIONS

Listed or exempt from listing/notification on the following chemical inventories (May contain substance(s) subject to notification to the EPA Active TSCA inventory prior to import to USA): AIIC, DSL, IECSC, KECI, PICCS, TCSI, TSCA
Special Cases:

| Inventory | Status |
|-----------|--------------------|
| ENCS | Restrictions Apply |

| | |
|-------------------|--------------------------|
| SECTION 16 | OTHER INFORMATION |
|-------------------|--------------------------|

KEY TO ABBREVIATIONS AND ACRONYMS:

N/D = Not determined, N/A = Not applicable, STEL = Short-Term Exposure Limit, TWA = Time-Weighted Average

KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):

- H302: Harmful if swallowed; Acute Tox Oral, Cat 4
- H315: Causes skin irritation; Skin Corr/Irritation, Cat 2
- H317: May cause allergic skin reaction; Skin Sensitisation, Cat 1
- H373: May cause damage to organs through prolonged or repeated exposure; Target Organ, Repeated, Cat 2
- H400: Very toxic to aquatic life; Acute Env Tox, Cat 1
- H401: Toxic to aquatic life; Acute Env Tox, Cat 2
- H410: Very toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 1
- H411: Toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 2

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

- MotorActive: Section 01: Supplier Mailing Address information was deleted.
- Perkal Pty Ltd Trading as Statewide Oil (South Australia): Section 01: Supplier Mailing Address information was deleted.
- Perkal Pty Ltd Trading as Statewide Oil (Western Australia): Section 01: Supplier Mailing Address information was deleted.
- Southern Cross Lubes (Victoria and Tasmania, New South Wales and Australian Capital Territory): Section 01: Supplier Mailing Address information was deleted.
- Section 01: Company Contact Methods information was modified.
- Section 01: Company Mailing Address information was modified.

Product Name: MOBIL RARUS 424

Revision Date: 22 Mar 2021

Page 10 of 10

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, republication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

DGN: 2008394DAU (1017412)

Prepared by: Exxon Mobil Corporation
EMBSI, Clinton NJ USA
Contact Point: See Section 1 for Local Contact number

End of (M)SDS

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)
Revision Date: 03 May 2019
Page 1 of 10

SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)
Product Description: Base Oil and Additives
Product Code: 20202040B020, 478669
Intended Use: Engine oil

COMPANY IDENTIFICATION

Supplier: CATERPILLAR OF AUSTRALIA PTY LTD
A.B.N. 97 004 332 469
1 Caterpillar Drive
Tullamarine
Victoria 3043 Australia

24 Hour Emergency Telephone Health Emergency (Poison Information Centre) 13 11 26
Product Technical Information 03 9953 9333
Supplier General Contact 03 9953 9333

Supplier: Caterpillar Underground Mining Pty Ltd
A.B.N 69 069 652 866
2-8 Hopkinson St
South Burnie
Tasmania 7320 Australia

24 Hour Emergency Telephone Health Emergency (Poison Information Centre) 13 11 26
Product Technical Information
Supplier General Contact 0439 336 149
0439 336 149

SECTION 2 HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

Contains: ORGANO MOLY-SULFUR COMPLEX May produce an allergic reaction.

Other hazard information:

Physical / Chemical Hazards:
No significant hazards.

Health Hazards:

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)

Revision Date: 03 May 2019

Page 2 of 10

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

Environmental Hazards:

No significant hazards.

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 3 COMPOSITION / INFORMATION ON INGREDIENTS

This material is defined as a mixture.

Reportable Hazardous Substance(s) or Complex Substance(s)

| Name | CAS# | Concentration* | GHS Hazard Codes |
|----------------------------|--------------|----------------|------------------------------|
| ORGANO MOLY-SULFUR COMPLEX | CONFIDENTIAL | 0.1 - < 1% | H315, H317, H402, H412 |
| ZINC ALKYL DITHIOPHOSPHATE | 134759-18-5 | 1 - 2.5% | H303, H315, H318, H401, H411 |

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume. Other ingredients determined not to be hazardous up to 100%.

SECTION 4 FIRST AID MEASURES

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

NOTE TO PHYSICIAN

None

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)

Revision Date: 03 May 2019

Page 3 of 10

SECTION 5 FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight streams of water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulphur oxides

FLAMMABILITY PROPERTIES

Flash Point [Method]: >225°C (437°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6 ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

SPILL MANAGEMENT

Land Spill: Stop leak if you can do so without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do so without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)

Revision Date: 03 May 2019

Page 4 of 10

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dyke far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7 HANDLING AND STORAGE

HANDLING

Avoid contact with used product. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or earthing procedures. However, bonding and earthing may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

Static Accumulator: This material is a static accumulator.

STORAGE

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers.

Material is defined under the National Standard [NOHSC:1015] Storage and Handling of Workplace Dangerous Goods.

SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

EXPOSURE LIMIT VALUES

Exposure limits/standards (Note: Exposure limits are not additive)

| Substance Name | Form | Limit/Standard | | | Note | Source |
|----------------------------|----------------------|----------------|----------------------|--|------|--------|
| ORGANO MOLY-SULFUR COMPLEX | Inhalable fraction. | TWA | 10 mg/m ³ | | | ACGIH |
| ORGANO MOLY-SULFUR COMPLEX | Respirable fraction. | TWA | 3 mg/m ³ | | | ACGIH |

Exposure limits/standards for materials that can be formed when handling this product:

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

Biological limits

No biological limits allocated.

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)

Revision Date: 03 May 2019

Page 5 of 10

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

Particulate

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

Nitrile, Viton

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practise good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

| |
|------------------|
| SECTION 9 |
|------------------|

| |
|---|
| PHYSICAL AND CHEMICAL PROPERTIES |
|---|

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)
 Revision Date: 03 May 2019
 Page 6 of 10

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Liquid
 Colour: Brown
 Odour: Characteristic
 Odour Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 60 °F): 0.884
 Flammability (Solid, Gas): N/A
 Flash Point [Method]: >225°C (437°F) [ASTM D-92]
 Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0
 Autoignition Temperature: N/D
 Boiling Point / Range: > 316°C (600°F)
 Decomposition Temperature: N/D
 Vapour Density (Air = 1): > 2 at 101 kPa
 Vapour Pressure: < 0.013 kPa (0.1 mm Hg) at 20 °C
 Evaporation Rate (n-butyl acetate = 1): N/D
 pH: N/A
 Log Pow (n-Octanol/Water Partition Coefficient): > 3.5
 Solubility in Water: Negligible
 Viscosity: 109 cSt (109 mm²/sec) at 40 °C | 14.5 cSt (14.5 mm²/sec) at 100°C
 Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D
 Melting Point: N/A
 Pour Point: -27°C (-17°F)
 DMSO Extract (mineral oil only), IP-346: < 3 %wt

| | |
|-------------------|---------------------------------|
| SECTION 10 | STABILITY AND REACTIVITY |
|-------------------|---------------------------------|

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

INCOMPATIBLE MATERIALS: Strong oxidisers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

POSSIBILITY OF HAZARDOUS REACTIONS: Hazardous polymerization will not occur.

| | |
|-------------------|----------------------------------|
| SECTION 11 | TOXICOLOGICAL INFORMATION |
|-------------------|----------------------------------|

INFORMATION ON TOXICOLOGICAL EFFECTS

| Hazard Class | Conclusion / Remarks |
|---------------------------------------|---|
| Inhalation | |
| Acute Toxicity: No end point data for | Minimally Toxic. Based on assessment of the components. |

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)

Revision Date: 03 May 2019

Page 7 of 10

| | |
|--|--|
| material. | |
| Irritation: No end point data for material. | Negligible hazard at ambient/normal handling temperatures. |
| Ingestion | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin Corrosion/Irritation: No end point data for material. | Negligible irritation to skin at ambient temperatures. Based on assessment of the components. |
| Eye | |
| Serious Eye Damage/Irritation: No end point data for material. | May cause mild, short-lasting discomfort to eyes. Based on assessment of the components. |
| Sensitisation | |
| Respiratory Sensitization: No end point data for material. | Not expected to be a respiratory sensitizer. |
| Skin Sensitization: No end point data for material. | Not expected to be a skin sensitizer. Based on assessment of the components. |
| Aspiration: Data available. | Not expected to be an aspiration hazard. Based on physico-chemical properties of the material. |
| Germ Cell Mutagenicity: No end point data for material. | Not expected to be a germ cell mutagen. Based on assessment of the components. |
| Carcinogenicity: No end point data for material. | Not expected to cause cancer. Based on assessment of the components. |
| Reproductive Toxicity: No end point data for material. | Not expected to be a reproductive toxicant. Based on assessment of the components. |
| Lactation: No end point data for material. | Not expected to cause harm to breast-fed children. |
| Specific Target Organ Toxicity (STOT) | |
| Single Exposure: No end point data for material. | Not expected to cause organ damage from a single exposure. |
| Repeated Exposure: No end point data for material. | Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components. |

OTHER INFORMATION

For the product itself:

Component concentrations in this formulation would not be expected to cause skin sensitization, based on tests of the components, this formulation, or similar formulations.

Diesel engine oils: Not carcinogenic in animals tests. Used and unused diesel engine oils did not produce any carcinogenic effects in chronic mouse skin painting studies. Oils that are used in gasoline engines may become hazardous and display the following properties: Carcinogenic in animal tests. Caused mutations in vitro. Possible allergen and photoallergen. Contains polycyclic aromatic compounds (PAC) from combustion products of gasoline and/or thermal degradation products.

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitising in test animals.

IARC Classification:

The following ingredients are cited on the lists below: None.

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)
Revision Date: 03 May 2019
Page 8 of 10

--REGULATORY LISTS SEARCHED--

1 = IARC 1

2 = IARC 2A

3 = IARC 2B

| | |
|-------------------|-------------------------------|
| SECTION 12 | ECOLOGICAL INFORMATION |
|-------------------|-------------------------------|

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.
Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

| | |
|-------------------|--------------------------------|
| SECTION 13 | DISPOSAL CONSIDERATIONS |
|-------------------|--------------------------------|

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products. Protect the environment. Dispose of used oil at designated sites. Minimize skin contact. Do not mix used oils with solvents, brake fluids or coolants.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)
Revision Date: 03 May 2019
Page 9 of 10

| | |
|-------------------|------------------------------|
| SECTION 14 | TRANSPORT INFORMATION |
|-------------------|------------------------------|

LAND (ADG): Not Regulated for Land Transport

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

Marine Pollutant: No

AIR (IATA): Not Regulated for Air Transport

| | |
|-------------------|-------------------------------|
| SECTION 15 | REGULATORY INFORMATION |
|-------------------|-------------------------------|

This material is not considered hazardous according to Australia Model Work Health and Safety Regulations.

Product is not regulated according to Australian Dangerous Goods Code.

No Poison Schedule number allocated by the Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP) established under the Therapeutic Goods Act.

AS1940 COMBUSTIBLE CLASS: C2

REGULATORY STATUS AND APPLICABLE LAWS AND REGULATIONS

Listed or exempt from listing/notification on the following chemical inventories (May contain substance(s) subject to notification to the EPA Active TSCA inventory prior to import to USA): AICS, DSL, ENCS, IECSC, ISHL, KECI, PICCS, TCSI, TSCA

| | |
|-------------------|--------------------------|
| SECTION 16 | OTHER INFORMATION |
|-------------------|--------------------------|

KEY TO ABBREVIATIONS AND ACRONYMS:

N/D = Not determined, N/A = Not applicable, STEL = Short-Term Exposure Limit, TWA = Time-Weighted Average

KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):

H303: May be harmful if swallowed; Acute Tox Oral, Cat 5
H315: Causes skin irritation; Skin Corr/Irritation, Cat 2
H317: May cause allergic skin reaction; Skin Sensitization, Cat 1
H318: Causes serious eye damage; Serious Eye Damage/Irr, Cat 1
H401: Toxic to aquatic life; Acute Env Tox, Cat 2
H402: Harmful to aquatic life; Acute Env Tox, Cat 3
H411: Toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 2
H412: Harmful to aquatic life with long lasting effects; Chronic Env Tox, Cat 3

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

Section 15: National Chemical Inventory Listing information was modified.

Product Name: CAT DEO 15W-40 (DIESEL ENGINE OIL)

Revision Date: 03 May 2019

Page 10 of 10

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

DGN: 2030827DAU (1021970)

Prepared by: Exxon Mobil Corporation
EMBSI, Clinton NJ USA
Contact Point: See Section 1 for Local Contact number

End of (M)SDS

Section 1. Identification

Product name Castrol GTX 10W-30
SDS # 459835
Code 459835-US81

Relevant identified uses of the substance or mixture and uses advised against

Product use Engine Oils.
 For specific application advice see appropriate Technical Data Sheet or consult our company representative.

Supplier BP Lubricants USA Inc.
 1500 Valley Road
 Wayne, NJ 07470
 Telephone: (973) 633-2200

EMERGENCY HEALTH INFORMATION: 1 (800) 447-8735
 Outside the US: +1 703-527-3887 (CHEMTREC)

EMERGENCY SPILL INFORMATION: 1 (800) 424-9300 CHEMTREC (USA)

Section 2. Hazards identification

OSHA/HCS status This material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture Not classified.

GHS label elements

Signal word No signal word.
Hazard statements No known significant effects or critical hazards.

Precautionary statements

Prevention Not applicable.
Response Not applicable.
Storage Not applicable.
Disposal Not applicable.

Hazards not otherwise classified None known.

Section 3. Composition/information on ingredients

Substance/mixture Mixture
 Highly refined base oil (IP 346 DMSO extract < 3%). Proprietary performance additives.

| Ingredient name | CAS number | % |
|--|------------|-----------|
| <input checked="" type="checkbox"/> Distillates (petroleum), hydrotreated heavy paraffinic | 64742-54-7 | ≥75 - ≤90 |
| Distillates (petroleum), hydrotreated heavy paraffinic | 64742-54-7 | ≤10 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

Section 3. Composition/information on ingredients

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

| | |
|-----------------------------------|--|
| Eye contact | In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Eyelids should be held away from the eyeball to ensure thorough rinsing. Check for and remove any contact lenses. Get medical attention. |
| Skin contact | Wash skin thoroughly with soap and water or use recognized skin cleanser. Remove contaminated clothing and shoes. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention if symptoms occur. |
| Inhalation | <input checked="" type="checkbox"/> Inhaled, remove to fresh air. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours. Get medical attention if symptoms occur. |
| Ingestion | Do not induce vomiting unless directed to do so by medical personnel. Get medical attention if symptoms occur. |
| Protection of first-aiders | No action shall be taken involving any personal risk or without suitable training. |

Most important symptoms/effects, acute and delayed

See Section 11 for more detailed information on health effects and symptoms.

Indication of immediate medical attention and special treatment needed, if necessary

| | |
|----------------------------|---|
| Notes to physician | <input checked="" type="checkbox"/> Treatment should in general be symptomatic and directed to relieving any effects. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours. |
| Specific treatments | No specific treatment. |

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media In case of fire, use foam, dry chemical or carbon dioxide extinguisher or spray.

Unsuitable extinguishing media Do not use water jet.

Specific hazards arising from the chemical

In a fire or if heated, a pressure increase will occur and the container may burst.

Hazardous combustion products

Combustion products may include the following:
carbon oxides (CO, CO₂) (carbon monoxide, carbon dioxide)
nitrogen oxides (NO, NO₂ etc.)

Special protective actions for fire-fighters

No action shall be taken involving any personal risk or without suitable training. Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire.

Special protective equipment for fire-fighters

Fire-fighters should wear positive pressure self-contained breathing apparatus (SCBA) and full turnout gear.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

| | |
|------------------------------------|--|
| For non-emergency personnel | No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Put on appropriate personal protective equipment. Floors may be slippery; use care to avoid falling. |
|------------------------------------|--|

Section 6. Accidental release measures

For emergency responders If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill Stop leak if without risk. Move containers from spill area. Absorb with an inert material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill Stop leak if without risk. Move containers from spill area. Prevent entry into sewers, water courses, basements or confined areas. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations. Dispose of via a licensed waste disposal contractor.

Section 7. Handling and storage

Precautions for safe handling

Protective measures Put on appropriate personal protective equipment (see Section 8).

Advice on general occupational hygiene Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Wash thoroughly after handling. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.


Conditions for safe storage, including any incompatibilities Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Store and use only in equipment/containers designed for use with this product. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Not suitable Prolonged exposure to elevated temperature

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|--|---|
|  Distillates (petroleum), hydrotreated heavy paraffinic | ACGIH TLV (United States). TWA: 5 mg/m ³ 8 hours. Issued/Revised: 11/2009 Form: Inhalable fraction OSHA PEL (United States). TWA: 5 mg/m ³ 8 hours. Issued/Revised: 6/1993 |
| Distillates (petroleum), hydrotreated heavy paraffinic | ACGIH TLV (United States). TWA: 5 mg/m ³ 8 hours. Issued/Revised: 11/2009 Form: Inhalable fraction OSHA PEL (United States). TWA: 5 mg/m ³ 8 hours. Issued/Revised: 6/1993 |

While specific OELs for certain components may be shown in this section, other components may be present in any mist, vapor or dust produced. Therefore, the specific OELs may not be applicable to the product as a whole and are provided for guidance only.

Section 8. Exposure controls/personal protection

Appropriate engineering controls

All activities involving chemicals should be assessed for their risks to health, to ensure exposures are adequately controlled. Personal protective equipment should only be considered after other forms of control measures (e.g. engineering controls) have been suitably evaluated. Personal protective equipment should conform to appropriate standards, be suitable for use, be kept in good condition and properly maintained. Your supplier of personal protective equipment should be consulted for advice on selection and appropriate standards. For further information contact your national organisation for standards.

Provide exhaust ventilation or other engineering controls to keep the relevant airborne concentrations below their respective occupational exposure limits.

The final choice of protective equipment will depend upon a risk assessment. It is important to ensure that all items of personal protective equipment are compatible.

Environmental exposure controls

Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

Safety glasses with side shields.

Skin protection

Hand protection

Wear protective gloves if prolonged or repeated contact is likely. Wear chemical resistant gloves. Recommended: Nitrile gloves. The correct choice of protective gloves depends upon the chemicals being handled, the conditions of work and use, and the condition of the gloves (even the best chemically resistant glove will break down after repeated chemical exposures). Most gloves provide only a short time of protection before they must be discarded and replaced. Because specific work environments and material handling practices vary, safety procedures should be developed for each intended application. Gloves should therefore be chosen in consultation with the supplier/manufacturer and with a full assessment of the working conditions.

Body protection

Use of protective clothing is good industrial practice. Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. Cotton or polyester/cotton overalls will only provide protection against light superficial contamination that will not soak through to the skin. Overalls should be laundered on a regular basis. When the risk of skin exposure is high (e.g. when cleaning up spillages or if there is a risk of splashing) then chemical resistant aprons and/or impervious chemical suits and boots will be required.

Other skin protection

Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection

In case of insufficient ventilation, wear suitable respiratory equipment. The correct choice of respiratory protection depends upon the chemicals being handled, the conditions of work and use, and the condition of the respiratory equipment. Safety procedures should be developed for each intended application. Respiratory protection equipment should therefore be chosen in consultation with the supplier/manufacturer and with a full assessment of the working conditions.

Section 9. Physical and chemical properties

Appearance

| | |
|----------------|-----------------|
| Physical state | Liquid. |
| Color | Brown. |
| Odor | Not available. |
| Odor threshold | Not available. |
| pH | Not applicable. |

Section 9. Physical and chemical properties

| | |
|---|---|
| Melting point | Not available. |
| Boiling point | Not available. |
| Flash point | Open cup: >200°C (>392°F) [Cleveland.] |
| Pour point | -36 °C |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not applicable. Based on - Physical state |
| Lower and upper explosive (flammable) limits | Not available. |
| Vapor pressure | Not available. |
| Vapor density | Not available. |
| Density | <1000 kg/m ³ (<1 g/cm ³) at 15°C |
| Solubility | insoluble in water. |
| Partition coefficient: n-octanol/water | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Kinematic: 68 mm ² /s (68 cSt) at 40°C Kinematic: 9.8 to 10.8 mm ² /s (9.8 to 10.8 cSt) at 100°C |

Section 10. Stability and reactivity

| | |
|---|---|
| Reactivity | No specific test data available for this product. Refer to Conditions to avoid and Incompatible materials for additional information. |
| Chemical stability | The product is stable. |
| Possibility of hazardous reactions | Under normal conditions of storage and use, hazardous reactions will not occur. Under normal conditions of storage and use, hazardous polymerization will not occur. |
| Conditions to avoid | Avoid all possible sources of ignition (spark or flame). |
| Incompatible materials | Reactive or incompatible with the following materials: oxidizing materials. |
| Hazardous decomposition products | Under normal conditions of storage and use, hazardous decomposition products should not be produced. |

Section 11. Toxicological information

Information on toxicological effects

Aspiration hazard

| Name | Result |
|--|--------------------------------|
| Distillates (petroleum), hydrotreated heavy paraffinic | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure Routes of entry anticipated: Dermal, Inhalation.

Potential acute health effects

| | |
|---------------------|--|
| Eye contact | No known significant effects or critical hazards. |
| Skin contact | No known significant effects or critical hazards. |
| Inhalation | <input checked="" type="checkbox"/> Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure. |
| Ingestion | No known significant effects or critical hazards. |

Symptoms related to the physical, chemical and toxicological characteristics

| | | | |
|--|----------------------------------|------------------|-------------------------|
| Product name Castrol GTX 10W-30 | Product code 459835-US81 | Page: 5/9 | |
| Version 6 | Date of issue 01/08/2021. | Format US | Language ENGLISH |

Section 11. Toxicological information

| | |
|---------------------|--|
| Eye contact | No specific data. |
| Skin contact | Adverse symptoms may include the following: irritation dryness cracking |
| Inhalation | No specific data. |
| Ingestion | No specific data. |

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

| | |
|------------------------------------|----------------|
| Potential immediate effects | Not available. |
| Potential delayed effects | Not available. |

Long term exposure

| | |
|------------------------------------|----------------|
| Potential immediate effects | Not available. |
| Potential delayed effects | Not available. |

Potential chronic health effects

| | |
|------------------------------|---|
| General | USED ENGINE OILS Combustion products resulting from the operation of internal combustion engines contaminate engine oils during use. Used engine oil may contain hazardous components which have the potential to cause skin cancer. Frequent or prolonged contact with all types and makes of used engine oil must therefore be avoided and a high standard of personal hygiene maintained. |
| Carcinogenicity | No known significant effects or critical hazards. |
| Mutagenicity | No known significant effects or critical hazards. |
| Teratogenicity | No known significant effects or critical hazards. |
| Developmental effects | No known significant effects or critical hazards. |
| Fertility effects | No known significant effects or critical hazards. |

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

No testing has been performed by the manufacturer.

Persistence and degradability

Expected to be biodegradable.

Bioaccumulative potential

This product is not expected to bioaccumulate through food chains in the environment.

Mobility in soil

| | |
|--|--|
| Soil/water partition coefficient (K_{oc}) | Not available. |
| Mobility | Spillages may penetrate the soil causing ground water contamination. |

Other adverse effects No known significant effects or critical hazards.

Section 12. Ecological information

Other ecological information Spills may form a film on water surfaces causing physical damage to organisms. Oxygen transfer could also be impaired.

Section 13. Disposal considerations

Disposal methods The generation of waste should be avoided or minimized wherever possible. Significant quantities of waste product residues should not be disposed of via the foul sewer but processed in a suitable effluent treatment plant. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

| | DOT Classification | TDG Classification | IMDG | IATA |
|-----------------------------------|---------------------------|---------------------------|----------------|----------------|
| UN number | Not regulated. | Not regulated. | Not regulated. | Not regulated. |
| UN proper shipping name | - | - | - | - |
| Transport hazard class(es) | - | - | - | - |
| Packing group | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. |
| Additional information | - | - | - | - |

Special precautions for user Not available.

Transport in bulk according to IMO instruments Not available.

Section 15. Regulatory information

U.S. Federal regulations

United States inventory (TSCA 8b) All components are active or exempted.

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 311/312

Classification Not applicable.

SARA 313

Form R - Reporting requirements This product does not contain any hazardous ingredients at or above regulated thresholds.

Supplier notification This product does not contain any hazardous ingredients at or above regulated thresholds.

State regulations

Section 15. Regulatory information

| | |
|--|--|
| Massachusetts | The following components are listed: OIL MIST, MINERAL; OIL MIST, MINERAL |
| New Jersey | The following components are listed: Amines, polyethylenepoly-, reaction products with succinic anhydride polyisobutenyl derivs., borated |
| Pennsylvania | The following components are listed: Amines, polyethylenepoly-, reaction products with succinic anhydride polyisobutenyl derivs., borated |
| California Prop. 65 | <p>⚠ WARNING: This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. This product can expose you to chemicals including Naphthalene and Ethylbenzene, which are known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.</p> |
| Other regulations | |
| Australia inventory (AICS) | All components are listed or exempted. |
| Canada inventory | All components are listed or exempted. |
| China inventory (IECSC) | All components are listed or exempted. |
| Japan inventory (ENCS) | At least one component is not listed. |
| Korea inventory (KECI) | All components are listed or exempted. |
| Philippines inventory (PICCS) | At least one component is not listed. |
| Taiwan Chemical Substances Inventory (TCSI) | All components are listed or exempted. |
| REACH Status | For the REACH status of this product please consult your company contact, as identified in Section 1. |

Section 16. Other information

National Fire Protection Association (U.S.A.)



History

| | |
|---------------------------------------|---------------------|
| Date of issue/Date of revision | 01/08/2021. |
| Date of previous issue | 10/12/2020. |
| Prepared by | Product Stewardship |

Key to abbreviations

ACGIH = American Conference of Industrial Hygienists
ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
CAS Number = Chemical Abstracts Service Registry Number
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
OEL = Occupational Exposure Limit
SDS = Safety Data Sheet
STEL = Short term exposure limit
TWA = Time weighted average
UN = United Nations
UN Number = United Nations Number, a four digit number assigned by the United Nations Committee of Experts on the Transport of Dangerous Goods.
Varies = may contain one or more of the following 64741-88-4, 64741-89-5, 64741-95-3, 64741-96-4, 64742-01-4, 64742-44-5, 64742-45-6, 64742-52-5, 64742-53-6, 64742-54-7, 64742-55-8, 64742-56-9, 64742-57-0, 64742-58-1, 64742-62-7, 64742-63-8, 64742-65-0, 64742-70-7, 72623-85-9, 72623-86-0, 72623-87-1

| | | | |
|--|----------------------------------|------------------|-------------------------|
| Product name Castrol GTX 10W-30 | Product code 459835-US81 | Page: 8/9 | |
| Version 6 | Date of issue 01/08/2021. | Format US | Language ENGLISH |

Section 16. Other information

✔ Indicates information that has changed from previously issued version.

Notice to reader

All reasonably practicable steps have been taken to ensure this data sheet and the health, safety and environmental information contained in it is accurate as of the date specified below. No warranty or representation, express or implied is made as to the accuracy or completeness of the data and information in this data sheet.

The data and advice given apply when the product is sold for the stated application or applications. You should not use the product other than for the stated application or applications without seeking advice from BP Group.

It is the user's obligation to evaluate and use this product safely and to comply with all applicable laws and regulations. The BP Group shall not be responsible for any damage or injury resulting from use, other than the stated product use of the material, from any failure to adhere to recommendations, or from any hazards inherent in the nature of the material. Purchasers of the product for supply to a third party for use at work, have a duty to take all necessary steps to ensure that any person handling or using the product is provided with the information in this sheet. Employers have a duty to tell employees and others who may be affected of any hazards described in this sheet and of any precautions that should be taken. You can contact the BP Group to ensure that this document is the most current available. Alteration of this document is strictly prohibited.

Safety Data Sheet

Anchorlube G-771

SDS No. 771.14

Revision: 1/05/15

Section 1 - Chemical Product and Company Identification

Product/Chemical Name: Anchorlube G-771

Synonyms: N/A

General Use: Metalworking lubricant/coolant for cutting metals

Manufacturer: Anchor Chemical Company
777 Canterbury Road
Westlake, OH 44145
Phone (440) 871-1660, Fax (440) 871-1601

Emergency Phone: (440) 871-1660

Date Revised: 1/5/15

Preparer: Sam Firth

Section 2 - Hazards Identification

Hazard Pictogram:



Hazard Statements: None

Precautionary Statements:

P280: Wear eye protection.

P305+351+338: IF IN EYES: Rinse continuously with water. Remove contact lenses if present and easy to do-continue rinsing.

P302+352: IF ON SKIN: Wash with soap and water.

HMIS

H 1

F 0

R 0

PPE A

Section 3 - Composition / Information on Ingredients

Non-hazardous material.

The following components, present at a concentration $\geq 0.1\%$ are listed as carcinogens or potential carcinogens by either the National Toxicology Program (NTP), The International Agency for Research on Cancer (IARC) or OSHA:

None – Not Applicable

Section 4 - First Aid Measures

Inhalation: This would be extremely rare. Smoke from welding parts with residue may irritate throat. If any affects are felt dilute with water. If discomfort is noticed beyond 15 minutes, seek medical advice.

Eye Contact: Flush eyes thoroughly for several minutes taking care to rinse under eyelids. Do not scrub. Abrasion may cause irritation. If discomfort continues, continue to wash with water. If irritation persists, consult a physician.

Skin Contact: An individual predisposed to irritation caused by animal fats based soaps may experience mild skin irritation. Wash skin with soap and water. Consult a physician if irritation persists.

Ingestion: If swallowed, it may cause nausea due to soap base. Dilute with water. IF nausea continues, seek medical advice.

Most important symptoms and effects, both acute and delayed: None

Indication of any immediate medical attention and special treatment needed: None

Section 5 - Fire-Fighting Measures

Flammability Classification: Non-combustible

Extinguishing Media: Use extinguishing measures appropriate to the surrounding fire.

Unusual Fire or Explosion Hazards: None known.

Hazardous Combustion Products: None.

Fire-Fighting Instructions: None

Section 6 - Accidental Release Measures

Personal precautions, protective equipment, and emergency procedures: N/A

Methods and materials for containment and cleaning up: Cover with inert, absorbent material and remove to disposal container. Spill area may be slippery. Flush with water.

Regulatory Requirements: N/A

Section 7 - Handling and Storage

Handling Precautions: Material freezes and some separation may occur. Freezing will not affect capability of material to perform. Once thawed, stir material until smooth.

Storage Requirements: Store at room temperature (40-100 degrees f).

Section 8 - Exposure Controls / Personal Protection

Engineering Controls:

Ventilation: Provide general or local exhaust ventilation systems to maintain airborne concentrations below OSHA PELs. Local exhaust ventilation is preferred because it prevents contaminant dispersion into the work area by controlling it at its source.

Administrative Controls:

Protective Clothing/Equipment: Wear tightly fitting safety goggles or safety glasses.

Contaminated Equipment: Clean equipment with water. Contaminated clothing may be washed with regular street clothes.

Comments: Treat this product as you would other animal fat based soaps. Easily cleaned with soapy water and comes of clothing as simple as other soaps.

Section 9 - Physical and Chemical Properties

Physical State: Semi Paste

Appearance and Odor: Green Semi Paste with slight almond odor

Odor Threshold: n/e

Vapor Pressure: n/a

Vapor Density (Air=1): n/d

Formula Weight: n/a

Density: 8.51 Lb/Gal

Specific Gravity (H₂O=1, at 4 °C): 1.0365

pH: 6.0-6.5

Flash Point: >

Flash Point Method: Not flammable.

Burning Rate: Does not burn.

Auto-ignition Temperature: Does not ignite.

Explosive properties: Non-explosive.

Water Solubility: Dispersible

Boiling Point: F: 225 C: 107.22

Freezing/Melting Point: 0 C/32 C

Refractive Index: n/a

Surface Tension: n/a

% Volatile: n/a

Evaporation Rate: n/a

Section 10 - Stability and Reactivity

Stability: Stable at room temperature in closed containers under normal storage and handling conditions.

Polymerization: Hazardous polymerization cannot occur.

Chemical Incompatibilities: Avoid Magnesium as it is water based.

Reactivity with Heat: When exposed to fire or heat, Anchorlube loses its water and dries out leaving a waxy film.

Hazardous Decomposition Products: None known.

Section 11- Toxicological Information

Toxicity Data:*

Eye: May cause irritation.

Skin: May cause irritation.

Ingestion: Unlikely.

Acute Oral Effects: None known.

Chronic Effects: None known.

Carcinogenicity: Neither this product nor any of its components are considered carcinogenic by OSHA, IARC, NTP, or ACGIH.

Contains no oil, silicone, sulfur, chlorine or vocs.

Section 12 - Ecological Information

Not known.

Persistence and degradability: Product is biodegradable. Sealed shelf life is a minimum of two years. Unsealed will begin to degrade rapidly.

Bioaccumulative potential: Not applicable

Mobility in soil: Not applicable.

Section 13 - Disposal Considerations

Disposal: This substance is inert and does not require special disposal methods. Small amounts may be flushed into sanitary sewer. Large amounts follow applicable Federal, state, and local regulations.

Section 14 - Transport Information

DOT Transportation Data: This product is not classified as dangerous under the transport regulations for road, rail, sea, or air transport.

Section 15 - Regulatory Information

EPA Regulations:

RCRA Hazardous Waste Number (40 CFR 261.33): Not listed

RCRA Hazardous Waste Classification (40 CFR 261): Not classified

CERCLA Hazardous Substance (40 CFR 302.4) Not listed

SARA Toxic Chemical (40 CFR 372.65): Not listed

SARA EHS (Extremely Hazardous Substance) (40 CFR 355): Not listed

OSHA Regulations:

Air Contaminant (29 CFR 1910.1000, Table Z-1, Z-1-A): Not listed

OSHA Specifically Regulated Substance (29CFR 1910): Not Listed

All ingredients in this product are listed on the TSCA inventory or are not required to be listed on the TSCA inventory.

International Regulations:

Regulation (EC) No 2037/2000 (Ozone Depleting Substances): Not applicable

Regulation (EC) No 850/2004 (Persistent Organic Pollutants): Not applicable

Regulation (EC) No 689/2008 (Export and Import of Dangerous Substances): Not applicable

Directive 2002/95/EC (RoHS): Not applicable

Directive 2002/96/EC (WEEE): Not applicable

Directive 1999/13/EC (VOC): Not applicable

Restriictions according to TITLE VIII of the Regulation (EC) No 1907/2006 (REACH): None

S-phrases:

S39: Wear eye protection.

RoHS: Not applicable

Section 16 - Other Information

Prepared By: Sam Firth

Revision Notes: Updated to GHS

Disclaimer: Information contained herein is presented in good faith and is based on data believed to be accurate. However no warranty is expressed or implied regarding this information or the results obtained from the use of this Safety Data Sheet, whether it originates with Anchor Chemical name or others. This Safety Data Sheet relates only to the specific material designated herein. It does not relate to use with other material or processes. This information is supplied with the condition that the user will make appropriate determination as to its suitability for their purpose prior to using it.



SAFETY DATA SHEET

1. Identification

| | | |
|--------------------------------------|---|--|
| Product identifier | Oatey Dark Cutting Oil | |
| Other means of identification | | |
| Product code | 1698EC | |
| Synonyms | Part Numbers: 30203, 30204, 30205 | |
| Recommended use | Cutting Oil | |
| Recommended restrictions | None known. | |
| | Manufacturer | Distributor |
| Company Name | Oatey Co. | Oatey Canada Supply Chain Services Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 | 145 Walker Drive Brampton, ON L6T 5P5, Canada |
| Telephone | 216-267-7100 | |
| E-mail | info@oatey.com | |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) | |
| Emergency First Aid | 1-877-740-5015 | |
| Contact person | MSDS Coordinator | |

2. Hazard(s) identification

| | |
|---------------------------------|--|
| Physical hazards | Not classified. |
| Health hazards | Not classified. |
| Environmental hazards | Not classified. |
| Label elements | |
| Hazard symbol | None. |
| Signal word | None. |
| Hazard statement | The mixture does not meet the criteria for classification. |
| Precautionary statement | |
| Prevention | Not applicable. |
| Response | Not applicable. |
| Storage | Not applicable. |
| Disposal | Not applicable. |
| Other hazards | None known. |
| Supplemental information | Used oil may contain harmful impurities.. |

3. Composition/information on ingredients

Mixtures

The components are not hazardous or are below required disclosure limits.

4. First-aid measures

| | |
|---------------------|---|
| Inhalation | Move to fresh air. Call a physician if symptoms develop or persist. |
| Skin contact | Wash off with soap and plenty of water. Remove contaminated clothing and shoes. Get medical attention if irritation develops and persists. |
| Eye contact | Rinse immediately with plenty of water for at least 15 minutes. Get medical attention if irritation develops and persists. |
| Ingestion | Rinse mouth with water. Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention if symptoms occur. |

| | |
|---|--|
| Most important symptoms/effects, acute and delayed | Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea. |
| Indication of immediate medical attention and special treatment needed | Treat symptomatically. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|---|
| Suitable extinguishing media | Water fog. Foam. Dry chemical powder, carbon dioxide, sand or earth may be used for small fires only. |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | During fire, gases hazardous to health may be formed. Carbon oxides. Phosphorus oxides. Sulfur oxides. Hydrogen chloride. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | No unusual fire or explosion hazards noted. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Avoid contact with skin and eyes. Ensure adequate ventilation. |
| Methods and materials for containment and cleaning up | In case of spills, beware of slippery floors and surfaces. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. |
| Environmental precautions | Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. |

7. Handling and storage

| | |
|---|---|
| Precautions for safe handling | Observe good industrial hygiene practices. |
| Conditions for safe storage, including any incompatibilities | Store in original tightly closed container. Keep in a cool place. Store away from incompatible materials (see Section 10 of the SDS). |

8. Exposure controls/personal protection

| | |
|--|---|
| Occupational exposure limits | No exposure limits noted for ingredient(s). |
| Biological limit values | No biological exposure limits noted for the ingredient(s). |
| Appropriate engineering controls | Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. |
| Individual protection measures, such as personal protective equipment | |
| Eye/face protection | If risk of splashing, wear safety goggles or face shield. |
| Skin protection | |
| Hand protection | Wear appropriate chemical resistant gloves. Neoprene, nitrile, polyethylene or PVC. |
| Other | Wear suitable protective clothing. |
| Respiratory protection | In case of insufficient ventilation, wear suitable respiratory equipment. |
| Thermal hazards | Wear appropriate thermal protective clothing, when necessary. |
| General hygiene considerations | Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. |

9. Physical and chemical properties

Appearance

Oatey Dark Cutting Oil
932643 Version #: 02 Revision date: 11-April-2018 Issue date: 28-June-2016

| | |
|---|---|
| Physical state | Liquid. |
| Form | Liquid. |
| Color | Dark |
| Odor | Slight hydrocarbon. |
| Odor threshold | Not available. |
| pH | Not applicable. |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | Not available. |
| Flash point | 339.8 °F (171.0 °C) |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not applicable. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | Not available. |
| Flammability limit - upper (%) | Not available. |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | Not available. |
| Vapor density | > 1 estimated |
| Relative density | 0.92 g/ml |
| Relative density temperature | 77 °F (25 °C) |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | > 6 Based on information on similar products. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |
| Other information | |
| Explosive properties | Not explosive. |
| Kinematic viscosity | 181 SUS |
| Kinematic viscosity temperature | 100 °F (37.78 °C) |
| Oxidizing properties | Not oxidizing. |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. This product may react with strong oxidizing agents. |
| Conditions to avoid | Extreme temperatures. Protect against direct sunlight. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | None expected under normal conditions of use. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | No adverse effects due to inhalation are expected. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |

| | |
|---|---|
| Ingestion | Expected to be a low ingestion hazard. |
| Symptoms related to the physical, chemical and toxicological characteristics | Direct contact with eyes may cause temporary irritation. |
| Information on toxicological effects | |
| Acute toxicity | Not expected to be acutely toxic. |
| Skin corrosion/irritation | Prolonged exposure may cause skin irritation. Prolonged exposure or repeated exposure without proper cleaning can clog pores of the skin. |
| Serious eye damage/eye irritation | Slightly irritating. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not a respiratory sensitizer. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |
| Carcinogenicity | Not available. |
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Not classified. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | Not an aspiration hazard. |
| Further information | Used oils may contain harmful impurities that have accumulated during use. The concentration of such impurities will depend on use and may present risks to health and the environment on disposal. Used oil should be handled with caution and skin contact should be avoided when possible. |

12. Ecological information

| | |
|--|--|
| Ecotoxicity | The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment. |
| Persistence and degradability | No data is available on the degradability of this product. |
| Bioaccumulative potential | |
| Partition coefficient n-octanol / water (log Kow) | > 6, Based on information on similar products. |
| Mobility in soil | Floats on water If it enters soil, it will absorb to soil particles and will not be mobile. |
| Other adverse effects | No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component. |

13. Disposal considerations

| | |
|--|--|
| Disposal instructions | Collect and reclaim or dispose in sealed containers at licensed waste disposal site. |
| Local disposal regulations | Dispose in accordance with all applicable regulations. |
| Hazardous waste code | The waste code should be assigned in discussion between the user, the producer and the waste disposal company. |
| Waste from residues / unused products | Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). |
| Contaminated packaging | Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. |

14. Transport information

| | |
|-------------|-----------------------------------|
| TDG | Not regulated as dangerous goods. |
| IATA | Not regulated as dangerous goods. |
| IMDG | Not regulated as dangerous goods. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

Canadian regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

Controlled Drugs and Substances Act

Not regulated.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Not regulated.

International regulations

Stockholm Convention

Not applicable.

Rotterdam Convention

Not applicable.

Kyoto protocol

Not applicable.

Montreal Protocol

Not applicable.

Basel Convention

Not applicable.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--------------------------------|-------------------------------|
| Canada | Domestic Substances List (DSL) | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information

Issue date 28-June-2016

Revision date -

Version # 01

Disclaimer Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Material name : BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS
Material number : 000000000001042109

Manufacturer or supplier's details

Company : Zep Inc.
Address : 350 Joe Frank Harris Parkway, SE
Emerson, GA 30137
Telephone : 404-352-1680

Emergency telephone numbers

For SDS Information : Compliance Services 1-877-428-9937
For a Medical Emergency : 877-541-2016 Toll Free - All Calls Recorded
For a Transportation Emergency : CHEMTREC: 800-424-9300 - All Calls Recorded.
In the District of Columbia 202-483-7616

Recommended use of the chemical and restrictions on use

Recommended use : Degreaser

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

| | |
|------------|---------------|
| Appearance | liquid |
| Colour | clear, orange |
| Odour | strong |

GHS Classification

Flammable liquids : Category 3
Skin irritation : Category 2
Eye irritation : Category 2A
Skin sensitisation : Category 1
Aspiration hazard : Category 1

GHS label elements

Hazard pictograms : 

Signal word : Danger

Hazard statements : H226 Flammable liquid and vapour.
H304 May be fatal if swallowed and enters airways.
H315 Causes skin irritation.
H317 May cause an allergic skin reaction.
H319 Causes serious eye irritation.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

Precautionary statements : **Prevention:**
P210 Keep away from heat/sparks/open flames/hot surfaces.
No smoking.
P233 Keep container tightly closed.
P240 Ground/bond container and receiving equipment.
P241 Use explosion-proof electrical/ ventilating/ lighting
equipment.
P242 Use only non-sparking tools.
P243 Take precautionary measures against static discharge.
P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264 Wash skin thoroughly after handling.
P272 Contaminated work clothing should not be allowed out of
the workplace.
P280 Wear protective gloves/ eye protection/ face protection.
Response:
P301 + P310 IF SWALLOWED: Immediately call a POISON
CENTER/doctor.
P303 + P361 + P353 IF ON SKIN (or hair): Take off
immediately all contaminated clothing. Rinse skin with
water/shower.
P305 + P351 + P338 IF IN EYES: Rinse cautiously with water
for several minutes. Remove contact lenses, if present and
easy to do. Continue rinsing.
P331 Do NOT induce vomiting.
P333 + P313 If skin irritation or rash occurs: Get medical
advice/ attention.
P337 + P313 If eye irritation persists: Get medical advice/
attention.
P362 Take off contaminated clothing and wash before reuse.
P370 + P378 In case of fire: Use dry sand, dry chemical or
alcohol-resistant foam to extinguish.
Storage:
P403 + P235 Store in a well-ventilated place. Keep cool.
Disposal:
P501 Dispose of contents/container in accordance with local
regulation.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Concentration [%] |
|-------------------------------------|-------------|-------------------|
| d-limonene | 5989-27-5 | >= 70 - < 90 |
| 4-Nonylphenol branched, ethoxylated | 127087-87-0 | >= 5 - < 10 |
| p-mentha-1,4-diene | 99-85-4 | >= 1 - < 5 |
| linalool | 78-70-6 | >= 1 - < 5 |
| 7-methyl-3-methyleneocta-1,6-diene | 123-35-3 | >= 1 - < 5 |

The exact percentages of disclosed substances are withheld as trade secrets.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : If unconscious, place in recovery position and seek medical
advice.
If symptoms persist, call a physician.
- In case of skin contact : In case of contact, immediately flush skin with soap and plenty
of water.
If skin irritation persists, call a physician.
- In case of eye contact : Flush eyes with water at least 15 minutes. Get medical
attention if eye irritation develops or persists.
Remove contact lenses.
Protect unharmed eye.
Keep eye wide open while rinsing.
- If swallowed : Clean mouth with water and drink afterwards plenty of water.
Keep respiratory tract clear.
Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
DO NOT induce vomiting unless directed to do so by a
physician or poison control center.
- Most important symptoms
and effects, both acute and
delayed : Effects are immediate and delayed.
Symptoms may include irritation, redness, pain, and rash.
Causes skin irritation.
Causes serious eye irritation.
Review section 2 of SDS to see all potential hazards.
- Notes to physician : Treat symptomatically. Symptoms may be delayed.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Alcohol-resistant foam
Carbon dioxide (CO₂)
Dry chemical
- Unsuitable extinguishing
media : High volume water jet
- Specific hazards during
firefighting : Do not allow run-off from fire fighting to enter drains or water
courses.
- Hazardous combustion
products : Carbon dioxide (CO₂)
Carbon monoxide
Smoke
- Specific extinguishing
methods : Use extinguishing measures that are appropriate to local
circumstances and the surrounding environment.
- Further information : Collect contaminated fire extinguishing water separately. This
must not be discharged into drains.
Fire residues and contaminated fire extinguishing water must
be disposed of in accordance with local regulations.
For safety reasons in case of fire, cans should be stored
separately in closed containments.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

Special protective equipment for firefighters : Use a water spray to cool fully closed containers.
: Wear self-contained breathing apparatus for firefighting if necessary.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.
Remove all sources of ignition.
Evacuate personnel to safe areas.
Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
If the product contaminates rivers and lakes or drains inform respective authorities.

Methods and materials for containment and cleaning up : Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

SECTION 7. HANDLING AND STORAGE

Advice on safe handling : Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the application area.
Take precautionary measures against static discharges.
Provide sufficient air exchange and/or exhaust in work rooms.
Open drum carefully as content may be under pressure.
Dispose of rinse water in accordance with local and national regulations.
Persons susceptible to skin sensitisation problems or asthma, allergies, chronic or recurrent respiratory disease should not be employed in any process in which this mixture is being used.

Conditions for safe storage : No smoking.
Keep container tightly closed in a dry and well-ventilated place.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Observe label precautions.
Electrical installations / working materials must comply with the technological safety standards.

Materials to avoid : Keep away from oxidizing agents and strongly acid or alkaline materials.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|------------|-----------|-------------------------------------|---|---------|
| d-limonene | 5989-27-5 | TWA | 30 ppm | US WEEL |

Engineering measures : effective ventilation in all processing areas

Personal protective equipment

Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment.

Hand protection

Material : Protective gloves

Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.

Eye protection

: Tightly fitting safety goggles
Wear face-shield and protective suit for abnormal processing problems.

Skin and body protection

: Impervious clothing
Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

: When using do not eat or drink.
When using do not smoke.
Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|------------------------------|---------------------------------|
| Appearance | : liquid |
| Colour | : clear, orange |
| Odour | : strong |
| Odour Threshold | : No data available |
| pH | : Not applicable |
| Melting point/freezing point | : No data available |
| Boiling point | : 170 °C |
| Flash point | : 53.9 °C Method: closed cup |
| Evaporation rate | : < 1 |
| Upper explosion limit | : No data available |
| Lower explosion limit | : No data available |
| Vapour pressure | : 2.533 hPa |
| Relative vapour density | : No data available |

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

| | |
|--|----------------------------------|
| Density | : 0.864 g/cm ³ |
| Solubility(ies) | |
| Water solubility | : emulsifiable |
| Solubility in other solvents | : Not applicable |
| Partition coefficient: n- octanol/water | : No data available |
| Auto-ignition temperature | : not determined |
| Thermal decomposition | : No data available |
| Viscosity | |
| Viscosity, kinematic | : 3.8 mm ² /s (20 °C) |

SECTION 10. STABILITY AND REACTIVITY

| | |
|---------------------------------------|---|
| Reactivity | : Stable |
| Chemical stability | : Stable under normal conditions. |
| Possibility of hazardous reactions | : Vapours may form explosive mixture with air. No decomposition if stored and applied as directed. |
| Conditions to avoid | : Extremes of temperature and direct sunlight. Heat, flames and sparks. |
| Incompatible materials | : Acids Oxidizing agents |
| Hazardous decomposition products | : Carbon monoxide, carbon dioxide and unburned hydrocarbons (smoke). Nitrogen oxides (NO _x) |

SECTION 11. TOXICOLOGICAL INFORMATION

Potential Health Effects

| | |
|---------------------------------|---|
| Aggravated Medical Condition | : None known. |
| Symptoms of Overexposure | : Effects are immediate and delayed. Symptoms may include irritation, redness, pain, and rash. |

Carcinogenicity:

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

| | |
|--------------|---|
| ACGIH | human carcinogen by IARC. No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH. |
| OSHA | No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens. |
| NTP | No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP. |

Acute toxicity

Product:

Acute oral toxicity : Acute toxicity estimate : > 5,000 mg/kg
Method: Calculation method

Acute dermal toxicity : Acute toxicity estimate : > 5,000 mg/kg
Method: Calculation method

Components:

d-limonene:

Acute oral toxicity : LD50 Oral Rat: 4,400 mg/kg

Acute dermal toxicity : LD50 Dermal Rabbit: > 5,000 mg/kg

4-Nonylphenol branched, ethoxylated:

Acute oral toxicity : LD50 Oral Rat: 16,000 mg/kg

Acute dermal toxicity : LD50 Rabbit: 2,573 mg/kg

7-methyl-3-methyleneocta-1,6-diene:

Acute oral toxicity : LD50 Oral Rat: > 5,000 mg/kg

Acute dermal toxicity : LD50 Dermal Rabbit: > 5,000 mg/kg

Skin corrosion/irritation

Product:

Remarks: Irritating to skin.

Serious eye damage/eye irritation

Product:

Remarks: Severe eye irritation

Respiratory or skin sensitisation

Product:

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

Remarks: Causes sensitisation.

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

Aspiration toxicity

No data available

Further information

Product:

Remarks: Solvents may degrease the skin.

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

No data available

Persistence and degradability

No data available

Bioaccumulative potential

Product:

Partition coefficient: n- : Remarks: No data available
octanol/water

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Regulation

40 CFR Protection of Environment; Part 82 Protection of
Stratospheric Ozone - CAA Section 602 Class I

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

| | |
|-----------------------------------|---|
| Remarks | Substances This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B). |
| Additional ecological information | : No data available |

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

| | |
|------------------------|--|
| Waste from residues | : The product should not be allowed to enter drains, water courses or the soil. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of in accordance with local regulations. |
| Contaminated packaging | : Empty remaining contents. Dispose of as unused product. Do not re-use empty containers. Do not burn, or use a cutting torch on, the empty drum. |

SECTION 14. TRANSPORT INFORMATION

Transportation Regulation: 49 CFR (USA):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

Transportation Regulation: IMDG (Vessel):
UN1993, FLAMMABLE LIQUID, N.O.S., (D-LIMONENE), 3, III, MP: (D-LIMONENE)

Transportation Regulation: IATA (Cargo Air):
UN1993, Flammable liquid, n.o.s., (D-LIMONENE), 3, III, MP: (D-LIMONENE)

Transportation Regulation: IATA (Passenger Air):
UN1993, Flammable liquid, n.o.s., (D-LIMONENE), 3, III, MP: (D-LIMONENE)

Transportation Regulation: TDG (Canada):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

The product as delivered to the customer conforms to packaging requirements for shipment by road under US Department of Transportation (DOT) regulations. Additional transportation classifications noted above are for reference only, and not a certification or warranty of the suitability of the packaging for shipment under these alternative transport regulations.

SECTION 15. REGULATORY INFORMATION

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

TSCA list : No substances are subject to a Significant New Use Rule.

No substances are subject to TSCA 12(b) export notification requirements.

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Flammable (gases, aerosols, liquids, or solids)
Skin corrosion or irritation
Serious eye damage or eye irritation
Respiratory or skin sensitisation
Aspiration hazard

SARA 302 : No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 : This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

California Prop. 65



WARNING: This product can expose you to chemicals including 7-methyl-3-methyleneocta-1,6-diene, which is/are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

The components of this product are reported in the following inventories:

DSL This product contains one or more components that are listed on the Canadian NDSL. All other components are on the Canadian DSL.
TSCA On TSCA Inventory

For information on the country notification status for other regions please contact the manufacturer's regulatory group.

Inventory Acronym and Validity Area Legend:

TSCA (USA), DSL (Canada), NDSL (Canada)

SECTION 16. OTHER INFORMATION

SAFETY DATA SHEET

{ error: graphic file not found: C:\Program Files (x86)\SAP\FrontEnd\sapgui\WWI\graphics\ZepIncLogo.BMP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS


Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

Further information

NFPA:



HMIS III:

| | |
|-----------------|---|
| HEALTH | 2 |
| FLAMMABILITY | 2 |
| PHYSICAL HAZARD | 0 |

0 = not significant, 1 = Slight,
2 = Moderate, 3 = High
4 = Extreme, * = Chronic

OSHA - GHS Label Information:

Hazard pictograms :



Signal word :

Danger:

Hazard statements :

Flammable liquid and vapour. May be fatal if swallowed and enters airways. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation.

Precautionary statements :

Prevention: Keep away from heat/sparks/open flames/hot surfaces. No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ ventilating/ lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray. Wash skin thoroughly after handling. Contaminated work clothing should not be allowed out of the workplace. Wear protective gloves/ eye protection/ face protection.

Response: IF SWALLOWED: Immediately call a POISON CENTER/doctor. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Do NOT induce vomiting. If skin irritation or rash occurs: Get medical advice/ attention. If eye irritation persists: Get medical advice/ attention. Take off contaminated clothing and wash before reuse. In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

Storage: Store in a well-ventilated place. Keep cool.

Disposal: Dispose of contents/container in accordance with local regulation.

| | |
|----------------|------------|
| Version: | 3.0 |
| Revision Date: | 01/22/2018 |
| Print Date: | 08/30/2021 |

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. Users should make their own investigations to determine the suitability and applicability of the information for their particular purposes. This SDS has been prepared by the Compliance Services organization supporting this manufacturer, supplier or distributor.

SAFETY DATA SHEET

{ error: graphic file not
found: C:\Program Files
(x86)\SAP\FrontEnd\sapgui\
WWI\graphics\ZepIncLogo.B
MP }

BZ7612 CITRUS SOLVENT DEGRSER R25435 OBS

Version 3.0

Revision Date 01/22/2018

Print Date 08/30/2021

Zep Inc. markets products under well recognized and established brand names such as Zep®, Zep Commercial®, Zep Professional®, Enforcer®, National Chemical™, Selig™, Misty®, Next Dimension™, Petro®, i-Chem®, TimeMist®, TimeWick™, MicrobeMax®, Country Vet®, Konk®, Original Bike Spirits®, Blue Coral®, Black Magic®, Rain-X®, Niagara National™, FC Forward Chemicals®, Rexodan®, Mykal™, and a number of private labeled brands.

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Section 1 - PRODUCT AND COMPANY IDENTIFICATION

Material Name

Sure-Grip 404

Synonyms

Solvent-based mastic

Chemical Family

Mastic

Product Use

Duct sealant

Restrictions on Use

For industrial use only

Manufacturer Information

Carlisle HVAC Products

900 Hensley Lane

Wylie, TX 75098

www.carlislehvac.com

Medical Emergency:

CHEMTREC (USA): (800) 424-9300

MSDS Assistance – 972-442-6545

Technical Assistance – 888-229-2199

Customer Service – 888-229-0199

Section 2 - HAZARDS IDENTIFICATION

Classification in accordance with paragraph (d) of 29 CFR 1910.1200.

Flammable Liquids - Category 2

Skin Corrosion/Irritation - Category 2

Serious Eye Damage/Eye Irritation - Category 2A

Reproductive Toxicity - Category 1A

Specific Target Organ Toxicity - Repeated Exposure - Category 2

GHS Label Elements

Symbol(s)





Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Signal Word

Danger

Hazard Statement(s)

Highly flammable liquid and vapor

Causes skin irritation

Causes serious eye irritation

May damage fertility or the unborn child

May cause damage to organs through prolonged or repeated exposure

Precautionary Statement(s)

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Keep container tightly closed

Keep away from heat/sparks/open flame/hot surfaces - No smoking

Ground/Bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting equipment

Take precautionary measures against static discharge

Use only non-sparking tools

Wear protective gloves/protective clothing/eye protection/face protection

Do not breathe dust/fume/gas/mist/vapours/spray

Wash thoroughly after handling

Response

In case of fire: Use appropriate media to extinguish

IF exposed or concerned: Get medical advice/attention

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing

If eye irritation persists: Get medical advice/attention

IF ON SKIN (or hair): Remove/take off immediately all contaminated clothing. Rinse skin with water/shower

If skin irritation occurs: Get medical advice/attention

Take off contaminated clothing and wash before reuse

Specific treatment (see label)

Storage

Store in a well-ventilated place. Keep container tightly closed

Keep cool

Store locked up

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations

Other Hazards

No additional information available.

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Section 3 - COMPOSITION / INFORMATION ON INGREDIENTS

| CAS | Component Name | Percent |
|--------------|---------------------------|---------|
| Trade Secret | Styrene butadiene polymer | 5-10 |
| Trade Secret | Polyphenol antioxidant | 0.1-1 |
| 1314-13-2 | Zinc oxide | 1-5 |
| 21645-51-2 | Aluminum hydroxide | 5-10 |
| 108-88-3 | Toluene | 7-13 |
| 64742-89-8 | Heptane | 10-30 |

Section 4 - FIRST AID MEASURES

Description of Necessary Measures

IF exposed or concerned: Get medical advice/attention.

Inhalation

Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor if you feel unwell.

Skin

Remove/Take off immediately all contaminated clothing and wash it before reuse. Rinse skin with water/shower. If skin irritation occurs, get medical advice/attention.

Eyes

Flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists, get medical advice/attention.

Ingestion

If swallowed, get medical attention. Do NOT induce vomiting.

Indication of any immediate medical attention and special treatment needed

Treat symptomatically and supportively.

Most Important Symptoms/Effects

Acute

Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause gastrointestinal irritation.

Delayed

May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure: kidney, liver.



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Note to Physicians

Contains organic solvents: heptane, toluene.

Section 5 - FIRE FIGHTING MEASURES

Extinguishing Media

Suitable Extinguishing Media

Dry chemical, foam or carbon dioxide. Water may be ineffective. Use water spray to keep containers cool.

Unsuitable Extinguishing Media

Do not use high-pressure water streams.

Special Hazards Arising from the Chemical

Can burn and explode easily when exposed to open flames or high heat.

Hazardous Combustion Products

oxides of carbon, oxides of nitrogen

Special Protective Equipment and Precautions for Firefighters

Highly flammable liquid and vapor. Vapors are heavier than air and may travel a considerable distance to a source of ignition and flashback.

Fire Fighting Measures

Wear full protective fire fighting gear including self contained breathing apparatus (SCBA) for protection against possible exposure.

Section 6 - ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures

Wear personal protective clothing and equipment, see Section 8.

Methods and Materials for Containment and Cleaning Up

Remove all sources of ignition. Avoid breathing vapors. Ventilate affected area. Absorb with earth, sand or other non-combustible material and transfer to container. Use non-sparking tools. Dike for later disposal.

Environmental Precautions

Avoid release to the environment.

Section 7 - HANDLING AND STORAGE

Precautions for Safe Handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flame/hot surfaces - No smoking. Take precautionary measures against static discharge. Ground/bond container and receiving equipment. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. Do



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

not breathe dust/fume/gas/mist/vapors/spray. Wash thoroughly after handling. Wash contaminated clothing before reuse. KEEP OUT OF REACH OF CHILDREN.

Conditions for Safe Storage, Including any Incompatibilities

Store in a well-ventilated place. Keep container tightly closed

Keep cool

Store locked up

Keep away from heat and ignition sources. Keep away from incompatible materials. Do not cut, puncture, or weld on or near this container.

Incompatible Materials

Strong oxidizing agents, acids, bases

Section 8 - EXPOSURE CONTROLS / PERSONAL PROTECTION

Component Exposure Limits

| | | |
|-------------------|---|---|
| Limestone | 1317-65-3 | |
| NIOSH: | 10 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable dust | |
| OSHA (US): | 15 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable fraction | |
| Mexico: | 10 mg/m ³ TWA LMPE-PPT | 20 mg/m ³ STEL [LMPE-CT] |
| Zinc oxide | 1314-13-2 | |
| ACGIH: | 2 mg/m ³ TWA respirable fraction | 10 mg/m ³ STEL respirable fraction |
| NIOSH: | 5 mg/m ³ TWA dust and fume | 10 mg/m ³ STEL fume |
| | 15 mg/m ³ Ceiling dust | 500 mg/m ³ IDLH |
| OSHA (US): | 5 mg/m ³ TWA fume; 15 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable fraction | |
| Mexico: | 5 mg/m ³ TWA LMPE-PPT fume; 10 mg/m ³ TWA LMPE-PPT dust | |
| | 10 mg/m ³ STEL [LMPE-CT] fume | |
| Clay | 1332-58-7 | |
| ACGIH: | 2 mg/m ³ TWA particulate matter containing no asbestos and <1% crystalline silica, respirable fraction | |
| NIOSH: | 10 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable dust | |
| OSHA (US): | 15 mg/m ³ TWA total dust; 5 mg/m ³ TWA respirable fraction | |
| Mexico: | 10 mg/m ³ TWA LMPE-PPT | 20 mg/m ³ STEL [LMPE-CT] |

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

| | | |
|-------------------|---|--|
| Silica gel | 112926-00-8 | |
| ACGIH: | 10 mg/m ³ TLV-TWA | |
| NIOSH: | 6 mg/m ³ TWA | 3000 mg/m ³ IDLH |
| OSHA (US): | 20 mppcf TWA; ((80)/(% SiO ₂)) mg/m ³ TWA) | |
| Mexico: | 10 mg/m ³ TWA LMPE-PPT | |
| | | |
| Toluene | 108-88-3 | |
| ACGIH: | 20 ppm TWA | 150 ppm STEL |
| | | |
| NIOSH: | 100 ppm TWA; 375 mg/m ³ TWA | 150 ppm STEL; 560 mg/m ³ STEL |
| | 500 ppm IDLH | |
| Europe: | 50 ppm TWA; 192 mg/m ³ TWA | 100 ppm STEL; 384 mg/m ³ STEL |
| | Possibility of significant uptake through the skin | |
| OSHA (US): | 200 ppm TWA | 150 ppm STEL |
| | 300 ppm Ceiling | |
| Mexico: | 50 ppm TWA LMPE-PPT; 188 mg/m ³ TWA LMPE-PPT | |
| | Skin - potential for cutaneous absorption | |
| | | |
| Heptane | 64742-89-8 | |
| NIOSH: | 85 ppm TWA | 440 ppm STEL |
| | 500 ppm IDLH | |
| OSHA (US): | 400 ppm TWA | 500 ppm STEL |

Biological limit value

There are no biological limit values for any of this product's components.

Engineering Controls

Provide local exhaust ventilation system. Ensure compliance with applicable exposure limits.

Individual Protection Measures, such as Personal Protective Equipment

Eye/face protection

Safety glasses or goggles are recommended when there is a potential for eye contact. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.

Skin Protection

Wear appropriate work clothing. Wear protective shoes. Recommended material: protective skin cream.

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Respiratory Protection

In case of inadequate ventilation wear respiratory protection. Appropriate respirator selection should be made by a qualified professional as part of a comprehensive respiratory protection program as described in 29 CFR 1910.134.

Glove Recommendations

Wear protective gloves. Recommended material: nitrile.

Section 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|------------------------------|-----------------------|---|--------------------------|
| Appearance | gray mastic | Physical State | solid |
| Odor | mild,hydrocarbon odor | Color | gray |
| Odor Threshold | Not available | pH | Not available |
| Melting Point | -95 °C (-139 °F) | Boiling Point | 90 - 111 °C (194-231 °F) |
| Freezing point | Not available | Evaporation Rate | 3 |
| Boiling Point Range | Not available | Flammability (solid, gas) | Not available |
| Autoignition | 230 °C (475 °F) | Flash Point | -7.2 °C (19 °F) |
| Lower Explosive Limit | 1 % | Decomposition | Not available |
| Upper Explosive Limit | 7 % | Vapor Pressure | 45 mmHg |
| Vapor Density (air=1) | 3.4 | Specific Gravity (water=1) | Not available |
| Water Solubility | Negligible | Partition coefficient: n-octanol/water | Not available |
| Viscosity | 450000 cps | Solubility (Other) | Hydrocarbons |
| Density | 1 - 1.2 (relative) | VOC | 395 g/L |
| Volatility by Weight | 30 - 40 % | | |

Other Information

No additional information available.

Section 10 - STABILITY AND REACTIVITY

Reactivity

No reactivity hazard is expected.



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Chemical Stability

Stable under normal conditions of use.

Possibility of Hazardous Reactions

Hazardous polymerization will not occur.

Conditions to Avoid

Avoid heat, flames, sparks and other sources of ignition. Avoid contact with incompatible materials.

Incompatible Materials

Strong oxidizing agents, acids, bases

Hazardous decomposition products

Oxides of carbon, oxides of nitrogen

Section 11 - TOXICOLOGICAL INFORMATION

Information on Likely Routes of Exposure

Inhalation

May cause respiratory irritation.

Skin Contact

Causes skin irritation.

Eye Contact

Causes serious eye irritation.

Ingestion

May cause gastrointestinal irritation.

Acute and Chronic Toxicity

Component Analysis - LD50/LC50

The components of this material have been reviewed in various sources and the following selected endpoints are published:

Polyphenol antioxidant (Trade Secret)

Oral LD50 Rat >200 mg/kg

Dermal LD50 Rabbit >5010 mg/kg

Inhalation LC50 Rat >165 mg/L 1 h

Zinc oxide (1314-13-2)

Oral LD50 Rat >5000 mg/kg

Aluminum hydroxide (21645-51-2)

Oral LD50 Rat >5000 mg/kg

Toluene (108-88-3)

Oral LD50 Rat 2600 mg/kg

Dermal LD50 Rabbit 12000 mg/kg

Inhalation LC50 Rat 12.5 mg/L 4 h

Heptane (64742-89-8)



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Oral LD50 Mouse 5000 mg/kg
Dermal LD50 Rabbit 3000 mg/kg

Immediate Effects

Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause gastrointestinal irritation.

Delayed Effects

May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure: kidney, liver.

Irritation/Corrosivity Data

May cause skin irritation. Causes serious eye irritation. May cause respiratory irritation.

Respiratory Sensitization

No data available.

Dermal Sensitization

It may cause sensitization in some individuals.

Component Carcinogenicity

| | |
|-------------------|---|
| Clay | 1332-58-7 |
| ACGIH: | A4 - Not Classifiable as a Human Carcinogen |
| DFG: | Category 3B (could be carcinogenic for man) |
| | |
| Silica gel | 112926-00-8 |
| IARC: | Monograph 68 [1997] (Group 3 (not classifiable)) |
| | |
| Toluene | 108-88-3 |
| ACGIH: | A4 - Not Classifiable as a Human Carcinogen |
| IARC: | Monograph 71 [1999]; Monograph 47 [1989] (Group 3 (not classifiable)) |

Germ Cell Mutagenicity

No data available.

Reproductive Toxicity

May damage fertility or the unborn child.

Specific Target Organ Toxicity - Single Exposure

No data available.

Specific Target Organ Toxicity - Repeated Exposure

May cause damage to organs through prolonged or repeated exposure: kidney, liver.

Aspiration hazard

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

No data available.

Medical Conditions Aggravated by Exposure

No data available.

Additional Data

No additional information available.

Section 12 - ECOLOGICAL INFORMATION

Ecotoxicity

Avoid release to the environment.

Component Analysis - Aquatic Toxicity

| | |
|-------------------------------|---|
| Polyphenol antioxidant | Trade Secret |
| Fish: | LC50 96 h Oncorhynchus mykiss >0.2 mg/L [semi-static] |
| Algae: | EC50 72 h Pseudokirchneriella subcapitata >0.2 mg/L IUCLID |
| Invertebrate: | EC50 48 h Daphnia magna >0.2 mg/L IUCLID |
| | |
| Toluene | 108-88-3 |
| Fish: | LC50 96 h Pimephales promelas 15.22 - 19.05 mg/L [flow-through] (1 day old); LC50 96 h Pimephales promelas 12.6 mg/L [static]; LC50 96 h Oncorhynchus mykiss 5.89 - 7.81 mg/L [flow-through]; LC50 96 h Oncorhynchus mykiss 14.1 - 17.16 mg/L [static]; LC50 96 h Oncorhynchus mykiss 5.8 mg/L [semi-static]; LC50 96 h Lepomis macrochirus 11 - 15 mg/L [static]; LC50 96 h Oryzias latipes 54 mg/L [static]; LC50 96 h Poecilia reticulata 28.2 mg/L [semi-static]; LC50 96 h Poecilia reticulata 50.87 - 70.34 mg/L [static] |
| Algae: | EC50 96 h Pseudokirchneriella subcapitata >433 mg/L IUCLID; EC50 72 h Pseudokirchneriella subcapitata 12.5 mg/L [static] EPA |
| Invertebrate: | EC50 48 h Daphnia magna 5.46 - 9.83 mg/L [static] EPA; EC50 48 h Daphnia magna 11.5 mg/L IUCLID |
| | |
| Heptane | 64742-89-8 |
| Algae: | EC50 72 h Pseudokirchneriella subcapitata 4700 mg/L IUCLID |

Persistence and Degradability

No information available for the product.



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Bioaccumulative Potential

No information available for the product.

Mobility

No information available for the product.

Other Toxicity

No additional information available.

Section 13 - DISPOSAL CONSIDERATIONS

Disposal Methods

Dispose of contents/container in accordance with local/regional/national/international regulations.

Section 14 - TRANSPORT INFORMATION

US DOT Information:

Shipping Name:Adhesives

Hazard Class: 2

UN/NA #: UN1133

Packing Group: II

Required Label(s): Red caution label required (limited quantity if < 0.3 gal)

IATA Information:

Shipping Name:ADHESIVES

Hazard Class: 3

UN#: UN1133

Packing Group: II

Required Label(s): 3

TDG Information:

Shipping Name:ADHESIVES

Hazard Class: 3

UN#: UN1133

Packing Group: II

Required Label(s):

Section 15 - REGULATORY INFORMATION

U.S. Federal Regulations



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65), CERCLA (40 CFR 302.4), TSCA 12(b), and/or require an OSHA process safety plan.

| | |
|-----------|-----------------------------------|
| Toluene | 108-88-3 |
| SARA 313: | 1 % de minimis concentration |
| CERCLA: | 1000 lb final RQ; 454 kg final RQ |

SARA Section 311/312 (40 CFR 370 Subparts B and C)

Acute Health: Yes **Chronic Health:** Yes **Fire:** Yes **Pressure:** No **Reactivity:** No

U.S. State Regulations

The following components appear on one or more of the following state hazardous substances lists:

| Component | CAS | CA | MA | MN | NJ | PA |
|------------|-------------|-----|-----|-----|-----|-----|
| Limestone | 1317-65-3 | No | Yes | Yes | Yes | Yes |
| Zinc oxide | 1314-13-2 | Yes | Yes | Yes | Yes | Yes |
| Clay | 1332-58-7 | No | Yes | Yes | Yes | Yes |
| Silica gel | 112926-00-8 | No | Yes | Yes | Yes | Yes |
| Toluene | 108-88-3 | Yes | Yes | Yes | Yes | Yes |

The following statement(s) are provided under the California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65):

WARNING! This product contains a chemical known to the state of California to cause reproductive/developmental effects

| | |
|----------------|--|
| Toluene | 108-88-3 |
| Repro/Dev. Tox | developmental toxicity , initial date 1/1/91 |
| | female reproductive toxicity , initial date 8/7/09 |

Canadian WHMIS Ingredient Disclosure List (IDL)

Components of this material have been checked against the Canadian WHMIS Ingredients Disclosure List. The List is composed of chemicals which must be identified on MSDSs if they are included in products which meet WHMIS criteria specified in the Controlled Products Regulations and are present above the threshold limits listed on the IDL

| | |
|------------|-----------|
| Zinc oxide | 1314-13-2 |
| | 1 % |
| Toluene | 108-88-3 |
| | 1 % |

Component Analysis - Inventory

Polyphenol antioxidant (Trade Secret)

Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | No |

Limestone (1317-65-3)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | NSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Zinc oxide (1314-13-2)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Clay (1332-58-7)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Aluminum hydroxide (21645-51-2)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Silica gel (112926-00-8)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|----|-----|----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| No | DSL | No | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Toluene (108-88-3)

| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| Yes | DSL | EIN | Yes | Yes | Yes | No | Yes | No | Yes | Yes | Yes |

Heptane (64742-89-8)



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

| | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----------|-----------|----------------|-----------|-----|-----|-----|
| US | CA | EU | AU | PH | JP - ENCS | JP - ISHL | KR - KECI/KECL | KR - TCCA | CN | NZ | MX |
| Yes | DSL | EIN | Yes | Yes | No | No | Yes | No | Yes | Yes | Yes |

Section 16 - OTHER INFORMATION

NFPA Ratings

Health: 2 Fire: 3 Reactivity: 0

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe

Summary of Changes

Revision Date: June 1, 2018

Revision Note: General Update

Key / Legend

ACGIH - American Conference of Governmental Industrial Hygienists; ADR - European Road Transport; AU - Australia; BOD - Biochemical Oxygen Demand; C - Celsius; CA - Canada; CAS - Chemical Abstracts Service; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CLP - Classification, Labelling, and Packaging; CN - China; CPR - Controlled Products Regulations; DFG - Deutsche Forschungsgemeinschaft; DOT - Department of Transportation; DSD - Dangerous Substance Directive; DSL - Domestic Substances List; EEC - European Economic Community; EINECS - European Inventory of Existing Commercial Chemical Substances; EPA - Environmental Protection Agency; EU - European Union; F - Fahrenheit; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; ICAO - International Civil Aviation Organization; IDL - Ingredient Disclosure List; IDLH - Immediately Dangerous to Life and Health; IMDG - International Maritime Dangerous Goods; JP - Japan; Kow - Octanol/water partition coefficient; KR - Korea; LEL - Lower Explosive Limit; LLV - Level Limit Value; LOLI - List Of Lists™ - ChemADVISOR's Regulatory Database; MAK - Maximum Concentration Value in the Workplace; MEL - Maximum Exposure Limits; NFPA - National Fire Protection Agency; NIOSH - National Institute for Occupational Safety and Health; NJTSR - New Jersey Trade Secret Registry; NTP - National Toxicology Program; NZ - New Zealand; OSHA - Occupational Safety and Health Administration; PH - Philippines; RCRA - Resource Conservation and Recovery Act; REACH- Registration, Evaluation, Authorisation, and restriction of Chemicals; RID - European Rail Transport; SARA - Superfund Amendments and Reauthorization Act; STEL - Short-term Exposure Limit; TDG - Transportation of Dangerous Goods; TSCA - Toxic Substances Control Act; TWA - Time Weighted Average; UEL - Upper Explosive Limit; US - United States.



Safety Data Sheet

Material Name: Sure-Grip 404

Product #: 302014

Other Information

Disclaimer:

The information contained herein is based upon data and information available to us, and reflects our best professional judgment. This product may be formulated in part with components purchased from other companies. No warranty of merchantability, fitness for any use, or any other warranty is expressed or implied regarding the accuracy of such data or information. The results to be obtained from the use thereof, or that any such use does not infringe any patent, since the information contained herein may be applied under conditions of use beyond our control and with which we may be unfamiliar, we do not assume responsibility for the results of such application. This information is furnished upon the condition that the person receiving it shall make his own determination of the suitability of the material for his particular use.

**MATERIAL SAFETY DATA SHEET
FORMULA-8**

SECTION 1: Product and Company Identification

Product Name: Formula-8

Synonyms: Oxygen-compatible Thread Sealant

Manufacturer: Fluoramics Inc.

Address: 18 Industrial Avenue, Mahwah, NJ 07430

Emergency Phone: 201-825-8110

Information Phone: 1-800-922-0075

Fax Number: 201-825-7035

Chemical Name: Aqueous Paste & Filler of PTFE

Chemical Family: Mixture

Product use: Thread Sealant

SECTION 2: Composition/Information on Ingredients

| Ingredient | CAS No. | % Wt. |
|--------------------------------|-------------------|----------------|
| Water | 7732 18 5 | 45 - 60 |
| Polytetrafluoroethylene | 9002 84 0 | 40 - 60 |
| Carboxy Vinyl Polymer | 9003 01 4 | .5 - 2 |
| Titanium Dioxide | 13463 67 7 | 2.5 - 5 |

SECTION 3: Hazards Identification

Route of Entry:

Signs & Symptoms of Exposure: PTFE polymer, when thermally decomposed, may cause polymer fume fever and flu-like symptoms.

Eyes: May cause irritation. Use goggles if contact is probable

Skin: May cause irritation to sensitive skin. Use protective garment when applicable

Ingestion: Contact a physician

Inhalation: Use a local exhaust if possible

SECTION 4: First Aid Measures

Eyes: Flush eyes with copious amounts of water
Skin: Remove by wiping and wash with soap and water
Ingestion: Contact a physician
Inhalation: Remove to fresh air

SECTION 5: Fire Fighting Measures

Flash point & method used: N/A
Flammability limits in air by volume: Non-combustible
Extinguisher media: Incombustible
Special fire fighting procedures: none
Unusual fire and explosion hazards: In extreme fire situation, protection from hydrogen fluoride fumes should be employed

| | NFPA Codes | HMIS Codes |
|--------------------------------|-----------------------|-----------------------|
| Health | 1 | 1 |
| Flammability | 0 | 0 |
| Reactivity | 0 | 0 |
| Personal Protection | SCBA | B |

SECTION 6: Accidental Release Measures

Non-hazardous. Disposal to conform with local, state and federal regulations

SECTION 7: Handling and storage

Do not store below 35F (1.6C)
Precautions: Strictly enforce **NO SMOKING** rule for workers handling material

SECTION 8: Exposure control/Personal protection

Use normal personal hygiene and good housekeeping.

Respiratory protection: If exposed to high temperature processing fumes, wear self-contained breathing apparatus.

Use protective gloves.

SECTION 9: Physical and chemical properties

Appearance: white
Odor: None
Physical: paste
Boiling point: 212F (water)
Melting point: N/A

Vapor pressure: <.01
Solubility in water: dispersible
Specific gravity H₂O=1: 1.2
Evaporation rate (butyl acetate=1): H₂O slow

SECTION 10: Stability and reactivity

Stability: stable
Conditions to avoid: Temperatures above 250F without adequate ventilation.
Will not polymerize
Incompatibility: strong alkali
Hazardous decomposition products: At 650C (1202F) COF₂ is the principal toxic product. At above 650C, major products are CF₄ and CO₂.

SECTION 11: Toxicological information

No toxicology data available

SECTION 12: Ecological information

No ecological information is available

SECTION 13: Disposal considerations

Waste disposal methods: Land fill is preferred but disposal methods must conform with local, state and federal regulations.

SECTION 14: Transport information

Transport information: N/A

SECTION 15: Regulatory information

Non-hazardous product. Not applicable

SECTION 16: Other information

Date prepared: January 9, 2015

SAFETY DATA SHEET

MAPP GAS (Petroleum Gas, MAPD)

Section 1. Identification

| | |
|--------------------------------------|---|
| GHS product identifier | : MAPP GAS (Petroleum Gas, MAPD) |
| Other means of identification | : MAP, MAPP, Methylacetylene-Propadiene, Mixture of Methylacetylene and Propadiene |
| Product type | : Liquefied gas |
| Product use | : Synthetic/Analytical chemistry. |
| Synonym | : MAP, MAPP, Methylacetylene-Propadiene, Mixture of Methylacetylene and Propadiene |
| SDS # | : 002015 |
| Supplier's details | : Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253 |
| 24-hour telephone | : 1-866-734-3438 |

Section 2. Hazards identification

| | |
|---|---|
| OSHA/HCS status | : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200). |
| Classification of the substance or mixture | : FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Liquefied gas |

GHS label elements

Hazard pictograms



Signal word : Danger

Hazard statements : Extremely flammable gas.
May form explosive mixtures with air.
Contains gas under pressure; may explode if heated.
May cause frostbite.
May displace oxygen and cause rapid suffocation.

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. Always keep container in upright position. Approach suspected leak area with caution.

Prevention

: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Response

: Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so.

Storage

: Protect from sunlight. Store in a well-ventilated place.

Disposal

: Not applicable.

Hazards not otherwise classified

: Liquid can cause burns similar to frostbite.

Section 3. Composition/information on ingredients

| | |
|--------------------------------------|--|
| Substance/mixture | : Mixture |
| Other means of identification | : MAP, MAPP, Methylacetylene-Propadiene, Mixture of Methylacetylene and Propadiene |
| Product code | : 002015 |

| Ingredient name | % | CAS number |
|------------------|---------|------------|
| propylene | 37 - 55 | 115-07-1 |
| methyl acetylene | 27 - 33 | 74-99-7 |
| 1,2-propadiene | 13 - 15 | 463-49-0 |
| isobutane | 2 - 5 | 75-28-5 |
| N-Butane | 2 - 5 | 106-97-8 |
| Propane | 1 - 5 | 74-98-6 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. To avoid the risk of static discharges and gas ignition, soak contaminated clothing thoroughly with water before removing it. Get medical attention if symptoms occur. In case of contact with liquid, warm frozen tissues slowly with lukewarm water and get medical attention. Do not rub affected area. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if adverse health effects persist or are severe. Ingestion of liquid can cause burns similar to frostbite. If frostbite occurs, get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. As this product rapidly becomes a gas when released, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Liquid can cause burns similar to frostbite.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Ingestion** : Ingestion of liquid can cause burns similar to frostbite.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following: , frostbite
- Inhalation** : No specific data.

Section 4. First aid measures

- Skin contact** : Adverse symptoms may include the following: frostbite
- Ingestion** : Adverse symptoms may include the following: frostbite

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Contains gas under pressure. Extremely flammable gas. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool. If involved in fire, shut off flow immediately if it can be done without risk. If this is impossible, withdraw from area and allow fire to burn. Fight fire from protected location or maximum possible distance. Eliminate all ignition sources if safe to do so.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode. For incidents involving large quantities, thermally insulated undergarments and thick textile or leather gloves should be worn.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : Accidental releases pose a serious fire or explosion hazard. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Section 6. Accidental release measures

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Do not get in eyes or on skin or clothing. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
Use only non-sparking tools. Empty containers retain product residue and can be hazardous. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Eliminate all ignition sources. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F). Keep container tightly closed and sealed until ready for use. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|------------------|--|
| propylene | ACGIH TLV (United States, 3/2017). TWA: 500 ppm 8 hours. |
| methyl acetylene | ACGIH TLV (United States, 1/2005). TWA: 500 ppm 8 hours. Form: All forms |
| | ACGIH TLV (United States, 3/2017). TWA: 1640 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. |
| 1,2-propadiene | NIOSH REL (United States, 10/2016). TWA: 1650 mg/m ³ 10 hours. |
| | OSHA PEL (United States, 6/2016). TWA: 1650 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. |
| isobutane | OSHA PEL 1989 (United States, 3/1989). TWA: 1650 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. |
| | None. NIOSH REL (United States, 10/2016). TWA: 1900 mg/m ³ 10 hours. TWA: 800 ppm 10 hours. |

Section 8. Exposure controls/personal protection

| | |
|----------|---|
| N-Butane | <p>ACGIH TLV (United States, 3/2017). STEL: 1000 ppm 15 minutes.</p> <p>NIOSH REL (United States, 10/2016). TWA: 1900 mg/m³ 10 hours. TWA: 800 ppm 10 hours.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 1900 mg/m³ 8 hours. TWA: 800 ppm 8 hours.</p> |
| Propane | <p>ACGIH TLV (United States, 3/2017). STEL: 1000 ppm 15 minutes.</p> <p>NIOSH REL (United States, 10/2016). TWA: 1800 mg/m³ 10 hours. TWA: 1000 ppm 10 hours.</p> <p>OSHA PEL (United States, 6/2016). TWA: 1800 mg/m³ 8 hours. TWA: 1000 ppm 8 hours.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 1800 mg/m³ 8 hours. TWA: 1000 ppm 8 hours.</p> <p>ACGIH TLV (United States, 3/2017). Oxygen Depletion [Asphyxiant].</p> |

- Appropriate engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. If contact with the liquid is possible, insulated gloves suitable for low temperatures should be worn. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Section 8. Exposure controls/personal protection

- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.
- Thermal hazards** : If there is a risk of contact with the liquid, all protective equipment worn should be suitable for use with extremely low temperature materials.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Gas. [Liquefied gas]
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : -102.7°C (-152.9°F) This is based on data for the following ingredient: Methyl Acetylene. Weighted average: -152.81°C (-243.1°F)
- Boiling point** : Not available.
- Critical temperature** : Lowest known value: 91.85°C (197.3°F) (Propylene).
- Flash point** : Not available.
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 2%
Upper: 13%
- Vapor pressure** : Not available.
- Vapor density** : Highest known value: 2.1 (Air = 1) (butane). Weighted average: 1.52 (Air = 1)
- Gas Density (lb/ft³)** : Weighted average: 0.11
- Relative density** : Not applicable.
- Solubility** : Not available.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Not applicable.
- Flow time (ISO 2431)** : Not available.
- Molecular weight** : 42 g/mol

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Hazardous reactions or instability may occur under certain conditions of storage or use.
- Conditions to avoid** : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.
- Incompatible materials** : Oxidizers

Section 10. Stability and reactivity

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Hazardous polymerization : May Occur.

Conditions to Avoid: Elevated temperatures and pressures. Polymerization catalysts, such as metal alkyls, can cause uncontrolled polymerization. Contamination with oxygen can cause propadiene to form hazardous peroxides.

INHIBITORS/STABILIZERS

An inhibitor is added to the MAPD mixture to prevent potential unstable peroxide formation. Butanes (iso and/or normal) are also added to the MAPD mixture to prevent potential concentration of the methylacetylene and propadiene from reaching concentration levels that would render the mixture unstable in case of weathering off (evaporation of light components).

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|--------------------------|----------|
| isobutane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| N-Butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| propylene | - | 3 | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Section 11. Toxicological information

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Liquid can cause burns similar to frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
Ingestion : Ingestion of liquid can cause burns similar to frostbite.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:, frostbite
Inhalation : No specific data.
Skin contact : Adverse symptoms may include the following:, frostbite
Ingestion : Adverse symptoms may include the following:, frostbite

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
Potential delayed effects : Not available.

Long term exposure

- Potential immediate effects** : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

- General** : No known significant effects or critical hazards.
Carcinogenicity : No known significant effects or critical hazards.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Section 12. Ecological information

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-----|-----------|
| propylene | 1.77 | - | low |
| methyl acetylene | 0.94 | - | low |
| 1,2-propadiene | 1.45 | - | low |
| isobutane | 2.8 | - | low |
| N-Butane | 2.89 | - | low |
| Propane | 1.09 | - | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT | TDG | Mexico | IMDG | IATA |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1060 | UN1060 | UN1060 | UN1060 | UN1060 |
| UN proper shipping name | Methyl Acetylene and Propadiene mixtures, stabilized | Methyl Acetylene and Propadiene mixtures, stabilized | Methyl Acetylene and Propadiene mixtures, stabilized | Methyl Acetylene and Propadiene mixtures, stabilized | Methyl Acetylene and Propadiene mixtures, stabilized |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Additional information

TDG Classification : Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2).
Explosive Limit and Limited Quantity Index 0.125
ERAP Index 3000
Passenger Carrying Road or Rail Index Forbidden

Section 14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
Clean Air Act (CAA) 112 regulated flammable substances: Propylene; Methyl Acetylene; Propadiene; Isobutane; butane; propane

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Refer to Section 2: Hazards Identification of this SDS for classification of substance.

SARA 313

| | Product name | CAS number | % |
|--|--------------|------------|---------|
| Form R - Reporting requirements | Propylene | 115-07-1 | 37 - 55 |
| Supplier notification | Propylene | 115-07-1 | 37 - 55 |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : The following components are listed: PROPYLENE; PROPENE; PROPYNE; METHYL ACETYLENE; ISOBUTANE; BUTANE; PROPANE

New York : None of the components are listed.

New Jersey : The following components are listed: PROPYLENE; 1-PROPENE; METHYL ACETYLENE; 1-PROPYNE; PROPADIENE; 1,2-PROPADIENE; Isobutane; PROPANE, 2-METHYL-; BUTANE; PROPANE

Pennsylvania : The following components are listed: 1-PROPENE; 1-PROPYNE; PROPANE, 2-METHYL-; BUTANE; PROPANE

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Section 15. Regulatory information

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

Inventory list

| | |
|--------------------------|--|
| Australia | : All components are listed or exempted. |
| Canada | : All components are listed or exempted. |
| China | : Not determined. |
| Europe | : All components are listed or exempted. |
| Japan | : Japan inventory (ENCS): Not determined. Japan inventory (ISHL): Not determined. |
| Malaysia | : Not determined. |
| New Zealand | : All components are listed or exempted. |
| Philippines | : All components are listed or exempted. |
| Republic of Korea | : All components are listed or exempted. |
| Taiwan | : All components are listed or exempted. |
| Thailand | : Not determined. |
| Turkey | : Not determined. |
| United States | : All components are listed or exempted. |
| Viet Nam | : Not determined. |

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | / | 1 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Section 16. Other information

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|--|------------------------------------|
| FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Liquefied gas | Expert judgment Expert judgment |

History

Date of printing : 10/22/2018

Date of issue/Date of revision : 10/22/2018

Date of previous issue : 2/6/2018

Version : 1.01

Key to abbreviations : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
UN = United Nations

References : Not available.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

K00789007

Section 1. Identification

Product name : RUST TOUGH® Rust Preventive Enamel (Aerosol)
Flat Black

Product code : K00789007

Other means of identification : Not available.

Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : Krylon Products Group
101 Prospect Avenue NW
Cleveland, OH 44115

Emergency telephone number of the company : US/Canada: (800) 424-9300
Mexico: CHEMTREC Mexico 01-800-681-9531. Available 24 hours and 365 days per year

Product Information Telephone Number : US/Canada: (800) 247-3266
Mexico: Not Available

Regulatory Information Telephone Number : US/Canada: (216) 566-2902
Mexico: Not Available

Transportation Emergency Telephone Number : US/Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).


Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SKIN CORROSION/IRRITATION - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
SKIN SENSITIZATION - Category 1
CARCINOGENICITY - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (lungs) - Category 1
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown acute oral toxicity: 29.8%
Percentage of the mixture consisting of ingredient(s) of unknown acute dermal toxicity: 31.2%
Percentage of the mixture consisting of ingredient(s) of unknown acute inhalation toxicity: 31.2%

GHS label elements

| | | | |
|--|--|-------------------------|------|
| Date of issue/Date of revision : 11/27/2019 | Date of previous issue : 11/5/2019 | Version : 16 | 1/19 |
| K00789007 | RUST TOUGH® Rust Preventive Enamel (Aerosol) Flat Black | SHW-85-NA-GHS-US | 2418 |

Section 2. Hazards identification

Hazard pictograms

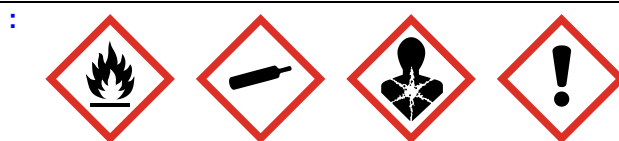

Signal word

: Danger

Hazard statements

- : Extremely flammable aerosol.
- Contains gas under pressure; may explode if heated.
- Causes serious eye irritation.
- Causes skin irritation.
- May cause an allergic skin reaction.
- Suspected of causing cancer.
- May be fatal if swallowed and enters airways.
- May cause respiratory irritation.
- May cause drowsiness or dizziness.
- Causes damage to organs through prolonged or repeated exposure. (lungs)

Precautionary statements

Prevention

- : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling. Contaminated work clothing must not be allowed out of the workplace. Pressurized container: Do not pierce or burn, even after use.

Response

- : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting. IF ON SKIN: Wash with plenty of soap and water. Wash contaminated clothing before reuse. If skin irritation or rash occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage

- : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.

Disposal

- : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Supplemental label elements

DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY. Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.

Hazards not otherwise classified

- : DANGER: Rags, steel wool, other waste soaked with this product, and sanding residue may spontaneously catch fire if improperly discarded. Immediately place rags, steel wool, other waste soaked with this product, and sanding residue in a sealed, water-filled, metal container. Dispose of in accordance with local fire regulations.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Other means of identification : Not available.

CAS number/other identifiers

| Ingredient name | % by weight | CAS number |
|-----------------------------------|-------------|------------|
| Propane | ≥10 - ≤25 | 74-98-6 |
| Acetone | ≥10 - ≤25 | 67-64-1 |
| n-Butyl Acetate | ≥10 - ≤25 | 123-86-4 |
| Talc | ≥10 - ≤25 | 14807-96-6 |
| Butane | ≤10 | 106-97-8 |
| Lt. Aliphatic Hydrocarbon Solvent | ≤10 | 64742-89-8 |
| Xylene, mixed isomers | ≤3 | 1330-20-7 |
| Ethyl 3-Ethoxypropionate | ≤3 | 763-69-9 |
| Carbon Black | ≤1 | 1333-86-4 |
| Ethylbenzene | <1 | 100-41-4 |
| Unsaturated Fatty Acids | <1 | 85711-46-2 |
| Light Aliphatic Hydrocarbon | ≤0.3 | 64742-47-8 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Wash with plenty of soap and water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. In the event of any complaints or symptoms, avoid further exposure. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

| | | | |
|--|---|-------------------------|------|
| Date of issue/Date of revision : 11/27/2019 | Date of previous issue : 11/5/2019 | Version : 16 | 3/19 |
| K00789007 RUST TOUGH® Rust Preventive Enamel (Aerosol) Flat Black | | SHW-85-NA-GHS-US | |

Section 4. First aid measures

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : Causes skin irritation. May cause an allergic skin reaction.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
 - pain or irritation
 - watering
 - redness
- Inhalation** : Adverse symptoms may include the following:
 - respiratory tract irritation
 - coughing
 - nausea or vomiting
 - headache
 - drowsiness/fatigue
 - dizziness/vertigo
 - unconsciousness
- Skin contact** : Adverse symptoms may include the following:
 - irritation
 - redness
- Ingestion** : Adverse symptoms may include the following:
 - nausea or vomiting

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

Section 5. Fire-fighting measures

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
 - carbon dioxide
 - carbon monoxide
 - phosphorus oxides
 - metal oxide/oxides
- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Persons with a history of skin sensitization problems should not be employed in any process in which this product is used. Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|-----------------|----------|---|
| Propane | 74-98-6 | NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2019). Oxygen Depletion [Asphyxiant]. Explosive potential. |
| Acetone | 67-64-1 | ACGIH TLV (United States, 3/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 250 ppm 10 hours. TWA: 590 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m ³ 8 hours. |
| n-Butyl Acetate | 123-86-4 | NIOSH REL (United States, 10/2016). TWA: 150 ppm 10 hours. TWA: 710 mg/m ³ 10 hours. STEL: 200 ppm 15 minutes. STEL: 950 mg/m ³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 150 ppm 8 hours. TWA: 710 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2019). |

Date of issue/Date of revision

: 11/27/2019

Date of previous issue

: 11/5/2019

Version : 16

6/19

K00789007

RUST TOUGH® Rust Preventive Enamel (Aerosol)
Flat Black

SHW-85-NA-GHS-US

Section 8. Exposure controls/personal protection

| | | |
|--|--------------------------|--|
| Talc | 14807-96-6 | <p>STEL: 150 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> <p>NIOSH REL (United States, 10/2016). TWA: 2 mg/m³ 10 hours. Form: Respirable fraction</p> <p>ACGIH TLV (United States, 3/2019). TWA: 2 mg/m³ 8 hours. Form: Respirable fraction</p> |
| Butane | 106-97-8 | <p>NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m³ 10 hours.</p> <p>ACGIH TLV (United States, 3/2019). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |
| Lt. Aliphatic Hydrocarbon Solvent Xylene, mixed isomers | 64742-89-8 1330-20-7 | <p>None.</p> <p>ACGIH TLV (United States, 3/2019). TWA: 100 ppm 8 hours. TWA: 434 mg/m³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m³ 15 minutes.</p> <p>OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
| Ethyl 3-Ethoxypropionate Carbon Black | 763-69-9 1333-86-4 | <p>None.</p> <p>NIOSH REL (United States, 10/2016). TWA: 3.5 mg/m³ 10 hours. TWA: 0.1 mg of PAHs/cm³ 10 hours.</p> <p>ACGIH TLV (United States, 3/2019). TWA: 3 mg/m³ 8 hours. Form: Inhalable fraction</p> <p>OSHA PEL (United States, 5/2018). TWA: 3.5 mg/m³ 8 hours.</p> |
| Ethylbenzene | 100-41-4 | <p>ACGIH TLV (United States, 3/2019). TWA: 20 ppm 8 hours.</p> <p>NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 435 mg/m³ 10 hours. STEL: 125 ppm 15 minutes. STEL: 545 mg/m³ 15 minutes.</p> <p>OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
| Unsaturated Fatty Acids Light Aliphatic Hydrocarbon | 85711-46-2 64742-47-8 | <p>None.</p> <p>ACGIH TLV (United States, 3/2019). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapor) 8 hours.</p> |

[Occupational exposure limits \(Canada\)](#)

Section 8. Exposure controls/personal protection

| Ingredient name | CAS # | Exposure limits |
|----------------------|----------|---|
| Normal propane | 74-98-6 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 1000 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> |
| Acetone | 67-64-1 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1200 mg/m³ 8 hours. 15 min OEL: 1800 mg/m³ 15 minutes. 8 hrs OEL: 500 ppm 8 hours. 15 min OEL: 750 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 500 ppm 8 hours. TWAEV: 1190 mg/m³ 8 hours. STEV: 1000 ppm 15 minutes. STEV: 2380 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 750 ppm 15 minutes. TWA: 500 ppm 8 hours.</p> |
| Normal butyl acetate | 123-86-4 | <p>CA Alberta Provincial (Canada, 6/2018). 15 min OEL: 200 ppm 15 minutes. 15 min OEL: 950 mg/m³ 15 minutes. 8 hrs OEL: 150 ppm 8 hours. 8 hrs OEL: 713 mg/m³ 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 20 ppm 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 150 ppm 8 hours. STEL: 200 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 150 ppm 8 hours. TWAEV: 713 mg/m³ 8 hours. STEV: 200 ppm 15 minutes. STEV: 950 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 200 ppm 15 minutes. TWA: 150 ppm 8 hours.</p> |

Section 8. Exposure controls/personal protection

| | | |
|-------------------------|------------|--|
| talc (none asbestiform) | 14807-96-6 | <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 2 mg/m³ 8 hours. Form: Respirable TWA: 0.1 f/cc 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 3 mg/m³ 8 hours. Form: Respirable dust.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 2 mg/m³ 8 hours. Form: Respirable fraction. TWA: 2 f/cc 8 hours.</p> <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 2 mg/m³ 8 hours. Form: Respirable particulate</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). TWA: 2 mg/m³ 8 hours. Form: respirable fraction</p> |
| Butane | 106-97-8 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 800 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |
| Xylene | 1330-20-7 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 651 mg/m³ 15 minutes. 15 min OEL: 150 ppm 15 minutes. 8 hrs OEL: 434 mg/m³ 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 651 mg/m³ 15 minutes.</p> <p>CA Ontario Provincial (Canada, 1/2018). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| Carbon black | 1333-86-4 | <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 3 mg/m³ 8 hours. Form: Inhalable</p> <p>CA Ontario Provincial (Canada, 1/2018).</p> |

Section 8. Exposure controls/personal protection

| | | |
|--------------|----------|--|
| Ethylbenzene | 100-41-4 | <p>TWA: 3 mg/m³ 8 hours. Form: Inhalable fraction.</p> <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 3.5 mg/m³ 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWA: 3.5 mg/m³ 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 7 mg/m³ 15 minutes. TWA: 3.5 mg/m³ 8 hours.</p> <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 8 hrs OEL: 434 mg/m³ 8 hours. 15 min OEL: 543 mg/m³ 15 minutes. 15 min OEL: 125 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 20 ppm 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 20 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWA: 100 ppm 8 hours. TWA: 434 mg/m³ 8 hours. STEV: 125 ppm 15 minutes. STEV: 543 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 125 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
|--------------|----------|--|

Occupational exposure limits (Mexico)

| | CAS # | Exposure limits |
|-----------------------|-----------|--|
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Acetone | 67-64-1 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. |
| n-Butyl Acetate | 123-86-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 150 ppm 8 hours. STEL: 200 ppm 15 minutes. |
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Xylene, mixed isomers | 1330-20-7 | NOM-010-STPS-2014 (Mexico, 4/2016). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. |
| Ethylbenzene | 100-41-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls :

Section 8. Exposure controls/personal protection

Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 7
- Melting point/freezing point** : Not available.
- Boiling point/boiling range** : Not available.
- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 5.6 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 0.9%
Upper: 12.8%
- Vapor pressure** : 101.3 kPa (760 mm Hg) [at 20°C]
- Vapor density** : 1.55 [Air = 1]

Section 9. Physical and chemical properties

Relative density : 0.78
Solubility : Not available.
Partition coefficient: n-octanol/water : Not available.
Auto-ignition temperature : Not available.
Decomposition temperature : Not available.
Viscosity : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
Molecular weight : Not applicable.
Aerosol product
 Type of aerosol : Spray
 Heat of combustion : 26.966 kJ/g

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : Avoid all possible sources of ignition (spark or flame).

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|--------------------------|-----------------------|---------|--------------------------|----------|
| Acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| | LD50 Dermal | Rabbit | >17600 mg/kg | - |
| | LD50 Oral | Rat | 10768 mg/kg | - |
| n-Butyl Acetate | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| | LC50 Inhalation Gas. | Rat | 5000 ppm | 4 hours |
| Butane | LD50 Oral | Rat | 4300 mg/kg | - |
| | LD50 Oral | Rat | 3200 mg/kg | - |
| Xylene, mixed isomers | LD50 Oral | Rat | >15400 mg/kg | - |
| | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| Ethyl 3-Ethoxypropionate | LD50 Oral | Rat | 3500 mg/kg | - |
| Carbon Black | LD50 Oral | Rat | 3500 mg/kg | - |
| Ethylbenzene | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |

Irritation/Corrosion

Section 11. Toxicological information

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|--------------------------|--------------------------|---------|-------|-------------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 ppm | - |
| | Eyes - Mild irritant | Rabbit | - | 10 UI | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 20 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 395 mg | - |
| n-Butyl Acetate | Eyes - Moderate irritant | Rabbit | - | 100 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Mild irritant | Human | - | 72 hours 300 ug l | - |
| Talc | Skin - Mild irritant | Human | - | 72 hours 300 ug l | - |
| | Skin - Mild irritant | Rabbit | - | 87 mg | - |
| Xylene, mixed isomers | Eyes - Severe irritant | Rabbit | - | 24 hours 5 mg | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 UI | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 100 % | - |
| Ethyl 3-Ethoxypropionate | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| Ethylbenzene | Eyes - Severe irritant | Rabbit | - | 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 15 mg | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Talc | - | 3 | - |
| Xylene, mixed isomers | - | 3 | - |
| Carbon Black | - | 2B | - |
| Ethylbenzene | - | 2B | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Section 11. Toxicological information

| Name | Category | Route of exposure | Target organs |
|-----------------------------------|--------------------------|------------------------------------|--|
| Propane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Acetone | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| n-Butyl Acetate | Category 3 | Not applicable. | Narcotic effects |
| Butane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Lt. Aliphatic Hydrocarbon Solvent | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Xylene, mixed isomers | Category 3 | Not applicable. | Respiratory tract irritation |
| Ethylbenzene | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|-----------------------------------|------------|-------------------|----------------|
| Propane | Category 2 | Not determined | Not determined |
| Acetone | Category 2 | Not determined | Not determined |
| Talc | Category 1 | Inhalation | lungs |
| Butane | Category 2 | Not determined | Not determined |
| Lt. Aliphatic Hydrocarbon Solvent | Category 2 | Not determined | Not determined |
| Xylene, mixed isomers | Category 2 | Not determined | Not determined |
| Ethylbenzene | Category 2 | Not determined | Not determined |

Aspiration hazard

| Name | Result |
|-----------------------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Lt. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Xylene, mixed isomers | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.

Skin contact : Causes skin irritation. May cause an allergic skin reaction.

Ingestion : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

Section 11. Toxicological information

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
- Skin contact** : Adverse symptoms may include the following:
 irritation
 redness
- Ingestion** : Adverse symptoms may include the following:
 nausea or vomiting

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : Causes damage to organs through prolonged or repeated exposure. Once sensitized, a severe allergic reaction may occur when subsequently exposed to very low levels.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|--------------------|----------------|
| Oral | 77421.48 mg/kg |
| Dermal | 36040.72 mg/kg |
| Inhalation (gases) | 163821.46 ppm |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-----------------------------------|-------------------------------------|---|----------|
| Acetone | Acute EC50 7200000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 6000000 µg/l Fresh water | Crustaceans - Gammarus pulex | 48 hours |
| | Acute LC50 6900 mg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| n-Butyl Acetate | Chronic NOEC 0.1 mg/l Fresh water | Fish - Fundulus heteroclitus | 4 weeks |
| | Acute LC50 32 mg/l Marine water | Crustaceans - Artemia salina | 48 hours |
| Lt. Aliphatic Hydrocarbon Solvent | Acute LC50 18000 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| Xylene, mixed isomers | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| Ethylbenzene | Acute EC50 4600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 3600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 6.53 mg/l Marine water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| Light Aliphatic Hydrocarbon | Acute EC50 2.93 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| | Acute LC50 4200 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| | Acute LC50 2200 µg/l Fresh water | Fish - Lepomis macrochirus | 4 days |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| n-Butyl Acetate | - | - | Readily |
| Xylene, mixed isomers | - | - | Readily |
| Ethylbenzene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-----------------------------------|--------------------|-------------|-----------|
| Lt. Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Xylene, mixed isomers | - | 8.1 to 25.9 | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. 126 | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. 126 | - ERG No. 126 | - | Emergency schedules F-D, S-U |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Proper shipping name : Not available.

Ship type : Not available.

Pollution category : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

International lists

- : **Australia inventory (AICS):** Not determined.
- : **China inventory (IECSC):** Not determined.
- : **Japan inventory (ENCS):** Not determined.
- : **Japan inventory (ISHL):** Not determined.
- : **Korea inventory (KECI):** Not determined.
- : **New Zealand Inventory of Chemicals (NZIoC):** Not determined.
- : **Philippines inventory (PICCS):** Not determined.
- : **Taiwan Chemical Substances Inventory (TCSI):** Not determined.
- : **Thailand inventory:** Not determined.
- : **Turkey inventory:** Not determined.
- : **Vietnam inventory:** Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| SKIN CORROSION/IRRITATION - Category 2 | Calculation method |
| SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A | Calculation method |
| SKIN SENSITIZATION - Category 1 | Calculation method |
| CARCINOGENICITY - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (lungs) - Category 1 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Date of printing : 11/27/2019

Date of issue/Date of revision : 11/27/2019

| | | | |
|--|---|-------------------------|-------|
| Date of issue/Date of revision : 11/27/2019 | Date of previous issue : 11/5/2019 | Version : 16 | 18/19 |
| K00789007 RUST TOUGH® Rust Preventive Enamel (Aerosol) Flat Black | | SHW-85-NA-GHS-US | |

Section 16. Other information

- Date of previous issue** : 11/5/2019
- Version** : 16
- Key to abbreviations** : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
N/A = Not available
SGG = Segregation Group
UN = United Nations

▣ Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.



GHS SAFETY DATA SHEET

WELD-ON® P-68™ Low VOC Primer for PVC and CPVC Plastic Pipe

Date Revised: DEC 2018
Supersedes: APR 2015

SECTION I - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® P-68™ Low VOC Primer for PVC and CPVC Plastic Pipe
PRODUCT USE: Low VOC Primer for PVC and CPVC Plastic Pipe
SUPPLIER:

MANUFACTURER: IPS Corporation
17109 South Main Street, Gardena, CA 90248-3127
P.O. Box 379, Gardena, CA 90247-0379
Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| | | | |
|-----------------------------------|--|------------------|---------------------|
| Acute Toxicity: Health Category 4 | Acute Toxicity: Environmental None Known | Flammable Liquid | Physical Category 2 |
| Skin Irritation: Category 3 | Chronic Toxicity: None Known | | |
| Skin Sensitization: NO | | | |
| Eye: Category 2 | | | |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 2B

| Hazard Statements | Precautionary Statements |
|---|--|
| H225: Highly flammable liquid and vapor | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking |
| H319: Causes serious eye irritation | P261: Avoid breathing dust/fume/gas/mist/vapors/spray |
| H332: Harmful if inhaled | P280: Wear protective gloves/protective clothing/eye protection/face protection |
| H335: May cause respiratory irritation | P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing |
| H336: May cause drowsiness or dizziness | P403+P233: Store in a well ventilated place. Keep container tightly closed |
| H351: Suspected of causing cancer | P501: Dispose of contents/container in accordance with local regulation |
| EUH019: May form explosive peroxides | |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------------------|----------|-----------|------------------------------|------------------------------|
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 01-2119444314-46-0000 | 20 - 35 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 01-2119457290-43-0000 | 15 - 25 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 10 - 30 |
| Acetone | 67-64-1 | 200-662-2 | 01-2119471330-49-0000 | 25 - 40 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing. * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372). # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.

Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.

Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.

Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

Likely Routes of Exposure: Inhalation, Eye and Skin Contact

Acute symptoms and effects:

Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.

Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.

Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.

Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.

Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog.

Unsuitable Extinguishing Media: Water spray or stream.

Exposure Hazards: Inhalation and dermal contact

Combustion Products: Oxides of carbon and smoke

| | HMIS | NFPA | |
|--------------|------|------|------------|
| Health | 2 | 2 | 0-Minimal |
| Flammability | 3 | 3 | 1-Slight |
| Reactivity | 0 | 0 | 2-Moderate |
| PPE | B | | 3-Serious |
| | | | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).

Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.

Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.

Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH 8 hour TLV | ACGIH 15 min STEL | OSHA 8 hour PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8 hour PEL | CAL/OSHA Ceiling | CAL/OSHA 15 min STEL |
|------------------|---------------------------|---------------------|----------------------|--------------------|---------------------|---------------------|------------------------|---------------------|-------------------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |
| | Acetone | 250 ppm | 500 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |

Engineering Controls: Use local exhaust as needed.

Monitoring: Maintain breathing zone airborne concentrations below exposure limits.

Personal Protective Equipment (PPE):

Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.

Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.

Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® P-68™ Low VOC Primer for PVC and CPVC Plastic Pipe

Date Revised: DEC 2018
Supersedes: APR 2015

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Clear or purple, thin liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ethereal | Boiling Range: | 56°C (133°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 56°C (133°F) Based on first boiling component: Acetone | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 12.8% based on Acetone |
| Flash Point: | -20°C (-4°F) TCC based on Acetone | Vapor Pressure: | 190 mm Hg @ 20°C (68°F) Acetone |
| Specific Gravity: | 0.842 @ 23°C (73°F) | Vapor Density: | >2.0 (Air = 1) |
| Solubility: | Solvent portion soluble in water. | Other Data: Viscosity: | Water-thin |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 550 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|---|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | |
| Acetone | Oral: 5800 mg/kg (rat) | Inhalation 50,100 mg/m ³ (rat) | STOT SE3 |

| | | | | | |
|--|--|--|--|--|--|
| Reproductive Effects Not Established | Teratogenicity Not Established | Mutagenicity Not Established | Embryotoxicity Not Established | Sensitization to Product Not Established | Synergistic Products Not Established |
|--|--|--|--|--|--|

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 550 g/l. |
| Degradability: | Not available |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|---|
| Proper Shipping Name: | Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1993 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

EXCEPTION for Ground Shipping

DOT Limited Quantity: Up to 1L per inner packaging, 30 kg gross weight per package.
Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" .

| TDG INFORMATION | |
|--------------------------|---|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) |
| UN NUMBER/PACKING GROUP: | UN 1993, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|-----------------------------|---|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R20: Harmful by inhalation. R36/37: Irritating to eyes and respiratory system. | | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness |
| Safety Phrases: | S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. S25: Avoid contact with eyes. | | S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. S46: If swallowed, seek medical advise immediately and show this container or label. |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 12/4/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Primer for PVC and CPVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data and the results to be obtained from the use thereof.

Safety Data Sheet



1. Identification

| | | | |
|-----------------------------|--|-------------------------|--|
| Product Name: | PRO +LSPR 6PK SAFETY GREEN | Revision Date: | 11/30/2020 |
| Product Identifier: | 7533838 | Supersedes Date: | 5/11/2017 |
| Recommended Use: | Topcoat/Aerosols | | |
| Supplier: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA | Manufacturer: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA |
| Preparer: | Regulatory Department | | |
| Emergency Telephone: | 24 Hour Hotline: 847-367-7700 | | |

2. Hazards Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

26% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|--|
| Carcinogenicity, category 2 | H351 | Suspected of causing cancer. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Eye Irritation, category 2A | H319 | Causes serious eye irritation. |
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| STOT, repeated exposure, category 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|------|--|
| P201 | Obtain special instructions before use. |
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. NO SMOKING. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P260 | Do not breathe dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |

| | |
|----------------|--|
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

3. Composition / Information on Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|------------------------------|----------------|-------------------|--------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| n-Butyl Acetate | 123-86-4 | 10-25 | GHS02-GHS07 | H226-336 |
| n-Butane | 106-97-8 | 2.5-10 | GHS04 | H280 |
| Xylenes (o-, m-, p- Isomers) | 1330-20-7 | 2.5-10 | GHS02-GHS07 | H226-315-319-332 |
| Titanium Dioxide | 13463-67-7 | 2.5-10 | Not Available | Not Available |
| Barium Sulfate | 7727-43-7 | 1.0-2.5 | GHS07 | H332 |
| Ethyl 3-Ethoxypropionate | 763-69-9 | 1.0-2.5 | GHS06 | H331 |
| Ethylbenzene | 100-41-4 | 1.0-2.5 | GHS02-GHS07-GHS08 | H225-304-332-351-373 |
| Cobalt 2-Ethylhexanoate | 136-52-7 | 0.1-1.0 | Not Available | Not Available |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|------------------------------|------------|-----------------------|-------------------|--------------------|--------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 20.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 20.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Xylenes (o-, m-, p- Isomers) | 1330-20-7 | 10.0 | 100 ppm | 150 ppm | 100 ppm | N.E. |
| Titanium Dioxide | 13463-67-7 | 5.0 | 10 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| Barium Sulfate | 7727-43-7 | 5.0 | 5 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| Ethyl 3-Ethoxypropionate | 763-69-9 | 5.0 | N.E. | N.E. | N.E. | N.E. |
| Ethylbenzene | 100-41-4 | 5.0 | 20 ppm | N.E. | 100 ppm | N.E. |
| Cobalt 2-Ethylhexanoate | 136-52-7 | 1.0 | N.E. | N.E. | N.E. | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Liquid | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Specific Gravity: | 0.804 | pH: | NE |
| Freeze Point, °C: | ND | Viscosity: | N.D. |
| Solubility in Water: | No Information | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 1.0 - 13.0 |
| Boiling Range, °C: | -37 - 537 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-Ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

Conditions to Avoid: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

Incompatibility: Incompatible with strong oxidizing agents, strong acids and strong alkalis.

Hazardous Decomposition: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

Hazardous Polymerization: Will not occur under normal conditions.

Stability: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: No Information

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010)

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|------------------------------|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 1330-20-7 | Xylenes (o-, m-, p- Isomers) | 3500 mg/kg Rat | >4350 mg/kg Rabbit | 29.08 mg/L Rat |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 7727-43-7 | Barium Sulfate | 307000 mg/kg Rat | N.E. | N.E. |
| 763-69-9 | Ethyl 3-Ethoxypropionate | 5000 mg/kg Rat | >9500 mg/kg Rabbit | >5.96 mg/L Rat |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |
| 136-52-7 | Cobalt 2-Ethylhexanoate | N.E. | >5000 mg/kg Rabbit | N.E. |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|---|-----------------------------|---------------------|---------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint and Related Spray Products in Ltd Qty | Aerosols | Aerosols, flammable | Aerosols |
| Hazard Class: | N.A. | 2 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Carcinogenicity, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure)

SARA Section 313

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------------|----------------|
| Xylenes (o-, m-, p- Isomers) | 1330-20-7 |
| Ethylbenzene | 100-41-4 |
| Cobalt 2-Ethylhexanoate | 136-52-7 |

Toxic Substances Control Act

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

| |
|------------------------------|
| 16. Other Information |
|------------------------------|

HMIS RATINGS

| | | | | | | | |
|----------------|-----------------------|----------------------|---|-------------------------|-----------------------|-----------------------------|-------------------|
| Health: | No Informa tion | Flammability: | 4 | Physical Hazard: | No Informatio n | Personal Protection: | No Information |
|----------------|-----------------------|----------------------|---|-------------------------|-----------------------|-----------------------------|-------------------|

NFPA RATINGS

| | | | | | |
|----------------|---|----------------------|---|---------------------|---|
| Health: | 2 | Flammability: | 4 | Instability: | 0 |
|----------------|---|----------------------|---|---------------------|---|

| | |
|--|------|
| Maximum Incremental Reactivity: | 0.92 |
|--|------|

| | |
|---------------------------|------------|
| SDS REVISION DATE: | 11/30/2020 |
|---------------------------|------------|

| | |
|-----------------------------|--|
| REASON FOR REVISION: | Revision Description Changed Product Composition Changed Substance and/or Product Properties Changed in Section(s): 02 - Hazard Identification 09 - Physical & Chemical Properties 14 - Transport Information 15 - Regulatory Information 16 - Other Information Revision Statement(s) Changed |
|-----------------------------|--|

Legend: N.A. - Not Applicable, N.D. - Not Determined, N.E. - Not Established

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.

Safety Data Sheet

Printing date 10/13/2020

Revised On 10/13/2020

1 Identification of the substance and manufacturer

Trade name: RED IRON OXIDE PRIMER
Product code: 0000980026
Recommended use: Paint and coatings application.
Uses advised against: Any that differs from the recommended use.
Manufacturer/Supplier: Seymour of Sycamore
 917 Crosby Avenue
 Sycamore, IL 60178 USA
 phone: 815-895-9101
 www.seymourpaint.com

Emergency telephone number: 1-800-255-3924

Seymour of Sycamore
 3041 Dougall Avenue, Suite 503
 Windsor, ONT N9E 1S3 CANADA
 phone: 800-435-4482
 www.seymourpaint.com

2 Hazard(s) identification

Classification of the substance or mixture

Flam. Aerosol 1 H222 Extremely flammable aerosol.
 Press. Gas H280 Contains gas under pressure; may explode if heated.
 Eye Irrit. 2A H319 Causes serious eye irritation.
 STOT SE 3 H336 May cause drowsiness or dizziness.
 STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

GHS Hazard pictograms



GHS02 GHS04 GHS07 GHS08

Signal word
Hazard statements

Danger
 Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 Causes serious eye irritation.
 May cause drowsiness or dizziness.

Precautionary statements

May cause damage to organs through prolonged or repeated exposure.
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 Do not spray on an open flame or other ignition source.
 Pressurized container: Do not pierce or burn, even after use.
 Do not breathe dust/fume/gas/mist/vapors/spray.
 Wash hands thoroughly after handling.
 Use only outdoors or in a well-ventilated area.
 Wear protective gloves/protective clothing/eye protection/face protection.
 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 Call a poison center/doctor if you feel unwell.
 If eye irritation persists: Get medical advice/attention.
 Store locked up.
 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
 Dispose of contents/container in accordance with local/regional/national/international regulations.

3 Composition/information on ingredients

Chemical characterization: Mixtures

Chemical Description: This product is a mixture of the substances listed below with nonhazardous additions.

Dangerous components:

| | | |
|------------|------------------------|---------|
| 67-64-1 | Acetone | 25-50% |
| 74-98-6 | propane | 10-15% |
| 110-19-0 | Isobutyl Acetate | 10-15% |
| 106-97-8 | n-butane | 5-10% |
| 64742-89-8 | VM&P Naphtha | 5-10% |
| 67-63-0 | Isopropyl Alcohol | ≥5-<10% |
| 1309-37-1 | red iron oxide pigment | 1-5% |
| 14807-96-6 | Talc | 1-5% |
| 123-86-4 | butyl acetate | 1-5% |
| 64742-47-8 | Mineral Spirits | 1-5% |
| 108-65-6 | PM acetate | 1-5% |

4 First-aid measures

After inhalation: Supply fresh air; consult doctor in case of complaints.
After skin contact: Remove contaminated clothing. Wash exposed area with soap and water.
After eye contact: Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor.
After swallowing: Rinse out mouth and then drink plenty of water.
 Rinse mouth with water. Do not induce vomiting.

(Contd. on page 2)

Safety Data Sheet

Printing date 10/13/2020

Revised On 10/13/2020

Trade name: RED IRON OXIDE PRIMER

(Contd. of page 1)

Most important symptoms and effects:

Dizziness

Indication of any immediate medical attention needed:

No further relevant information available.

5 Fire-fighting measures**Extinguishing agents:**CO₂, extinguishing powder or water spray. Fight larger fires with water spray.**Special hazards:**

Can form explosive gas-air mixtures.

Protective equipment for firefighters:

A respiratory protective device may be necessary.

6 Accidental release measures**Personal precautions, protective equipment and emergency procedures:**Wear protective equipment. Keep unprotected persons away.
Use respiratory protective device against the effects of fumes/dust/aerosol.**Methods and material for containment and cleaning up:**

Ensure adequate ventilation.

7 Handling and storage**Precautions for safe handling**

Use only in well ventilated areas.

Storage requirements:Keep away from sources of heat and direct sunlight. Do not warehouse in subfreezing conditions.
Store locked up.**8 Exposure controls/personal protection****Components with limit values that require monitoring at the workplace:****67-64-1 Acetone**PEL (USA) Long-term value: 2400 mg/m³, 1000 ppmREL (USA) Long-term value: 590 mg/m³, 250 ppmTLV (USA) Short-term value: 1187 mg/m³, 500 ppmLong-term value: 594 mg/m³, 250 ppm

BEI

74-98-6 propanePEL (USA) Long-term value: 1800 mg/m³, 1000 ppmREL (USA) Long-term value: 1800 mg/m³, 1000 ppm

TLV (USA) refer to Appendix F in TLVs&BEIs book; D, EX

110-19-0 Isobutyl AcetatePEL (USA) Long-term value: 700 mg/m³, 150 ppmREL (USA) Long-term value: 700 mg/m³, 150 ppmTLV (USA) Short-term value: 712 mg/m³, 150 ppmLong-term value: 238 mg/m³, 50 ppm**106-97-8 n-butane**REL (USA) Long-term value: 1900 mg/m³, 800 ppmTLV (USA) Short-term value: 2370 mg/m³, 1000 ppm
(EX)**67-63-0 Isopropyl Alcohol**PEL (USA) Long-term value: 980 mg/m³, 400 ppmREL (USA) Short-term value: 1225 mg/m³, 500 ppmLong-term value: 980 mg/m³, 400 ppmTLV (USA) Short-term value: 984 mg/m³, 400 ppmLong-term value: 492 mg/m³, 200 ppm

BEI

123-86-4 butyl acetatePEL (USA) Long-term value: 710 mg/m³, 150 ppmREL (USA) Short-term value: 950 mg/m³, 200 ppmLong-term value: 710 mg/m³, 150 ppmTLV (USA) Short-term value: 712 mg/m³, 150 ppmLong-term value: 238 mg/m³, 50 ppm**108-65-6 PM acetate**

WEEL (USA) Long-term value: 50 ppm

(Contd. on page 3)

Safety Data Sheet

Printing date 10/13/2020

Revised On 10/13/2020

Trade name: RED IRON OXIDE PRIMER

(Contd. of page 2)

Ingredients with biological limit values:**67-64-1 Acetone**

BEI (USA) 50 mg/L
 Medium: urine
 Time: end of shift
 Parameter: Acetone (nonspecific)

67-63-0 Isopropyl Alcohol

BEI (USA) 40 mg/L
 Medium: urine
 Time: end of shift at end of workweek
 Parameter: Acetone (background, nonspecific)

Hygienic protection:

Keep away from foodstuffs and animal feed. Wash hands after use.
 Immediately remove all soiled and contaminated clothing.
 Wash hands after use.
 Avoid contact with the eyes and skin.
 Do not eat or drink while working.

Breathing equipment:

A respirator is generally not necessary when using this product outdoors or in large open areas. In cases where short and/or long term overexposure exists, a charcoal filter respirator should be worn. If you suspect overexposure conditions exist, please consult an authority on chemical hygiene.

Hand protection:

Nitrile gloves.
 The glove material must be impermeable and resistant to the substance.

Eye protection:

Tightly sealed goggles

9 Physical and chemical properties

Appearance: Aerosol.
Odor: Aromatic
Odor threshold: Not determined.
pH-value: Not determined.
Melting point/Melting range Undetermined.
Boiling point: -44 °C (-47.2 °F)
Flash point: -19 °C (-2.2 °F)
Flammability (solid, gas): Extremely flammable.
Decomposition temperature: Not determined.
Auto igniting: Product is not self-igniting.
Danger of explosion: In use, may form flammable/explosive vapour-air mixture.
Lower Explosion Limit: 1.7 Vol %
Upper Explosion Limit: 10.9 Vol %
Vapor pressure: Not determined.
Relative Density: Between 0.77 and 0.85 (Water equals 1.00)
Vapor density Not determined.
Evaporation rate Not applicable.
Partition coefficient: n-octanol/water: Not determined.
Solubility: Not determined.
Viscosity: Not determined.
Water: 0.0 %

10 Stability and reactivity

Reactivity: Stable at normal temperatures.
Conditions to avoid: Do not allow can to exceed 120 degrees Fahrenheit. Do not warehouse in subfreezing temperatures.
Chemical stability: Not fully evaluated.
Possibility of hazardous reactions: No dangerous reactions known.
Incompatible materials: No further relevant information available.
Hazardous decomposition: No dangerous decomposition products known.

11 Toxicological information**LD/LC50 values that are relevant for classification:****110-19-0 Isobutyl Acetate**

| | | |
|------|------|-------------------|
| Oral | LD50 | 4,763 mg/kg (rbt) |
|------|------|-------------------|

67-63-0 Isopropyl Alcohol

| | | |
|------------|----------|--------------------|
| Oral | LD50 | 4,570 mg/kg (rat) |
| Dermal | LD50 | 13,400 mg/kg (rab) |
| Inhalative | LC50/4 h | 30 mg/l (rat) |

(Contd. on page 4)

Safety Data Sheet

Printing date 10/13/2020

Revised On 10/13/2020

Trade name: RED IRON OXIDE PRIMER

(Contd. of page 3)

1309-37-1 red iron oxide pigment

Oral LD50 >5,000 mg/kg (rat)

123-86-4 butyl acetate

Oral LD50 14,000 mg/kg (rat)

Inhalative LC50/4 h >21 mg/l (rat)

108-65-6 PM acetate

Oral LD50 8,500 mg/kg (rat)

Inhalative LC50/4 h 35.7 mg/l (rat)

Information on toxicological effects: No data available.**Skin effects:** No irritant effect.**Eye effects:** Irritating effect.**Sensitization:** No sensitizing effects known.**12 Ecological information****Aquatic toxicity:** Hazardous for water, do not empty into drains.**Persistence and degradability:** The product is degradable after prolonged exposure to natural weathering processes.**Other information:** This product does not contain any chlorofluorocarbons (CFC's), hydrochlorofluorocarbons (HCFC's), perfluorocarbons (PFC's), heavy metals (chromium, lead, cadmium), or chlorinated solvents.**Bioaccumulative potential:** No further relevant information available.**Mobility in soil:** No further relevant information available.**Other adverse effects:** No further relevant information available.**13 Disposal considerations**

Dispose of in accordance with local, state, and federal regulations. Do not puncture, incinerate, or compact. Partially empty cans must be disposed of responsibly. Do not heat or cut empty containers with electric or gas torches.

Recommendation: Completely empty cans should be recycled.**14 Transport information****UN-Number** UN1950**DOT** N/A**DOT** UN1950**DOT** Consumer Commodity ORM-D**ADR** Aerosols, flammable**Transport hazard class(es):** 1950 Aerosols**Class** 2.1**Marine pollutant:** No**Special precautions for user:** Warning: Gases**EMS Number:** F-D,S-U**Packaging Group:** --**UN "Model Regulation":** UN1950, Aerosols, 2.1**15 Regulatory information****SARA Section 355 (extremely hazardous substances):**

None of the ingredients in this product are listed.

SARA Section 313 (Specific toxic chemical listings):

67-63-0 Isopropyl Alcohol

Toxic Substances Control Act**(TSCA):** All hazardous ingredients are found on the inventory list of substances.**Canadian Domestic Substances List****(DSL):** All ingredients are listed or exempted.**Consumer Product Safety****Commission (CPSC):** This product complies with 16 CFR 1303 and does not contain more than 90 ppm of lead.**California Proposition 65 chemicals known to cause cancer:**

108-10-1 methyl isobutyl ketone

100-41-4 ethyl benzene

Prop 65 chemicals known to cause birth defects or reproductive harm:

108-10-1 methyl isobutyl ketone

EPA:

67-64-1 Acetone

I

110-19-0 Isobutyl Acetate

D

16 Other information**Contact:** Regulatory Affairs

2448

SAFETY DATA SHEET

EN-16/B25116

Section 1. Identification

Product name : OMNI-FILL® Enamel Blend (EN-16)
Product code : EN-16/B25116
Other means of identification : Not available.
Product type : Aerosol.
Relevant identified uses of the substance or mixture and uses advised against
Paint or paint related material.

Manufacturer : Distributed by:
Specialty Aerosols
101 W. Prospect Ave.
Cleveland, OHIO 44115

Emergency telephone number of the company : (216) 566-2917

Product Information Telephone Number : (800) 638-4852

Regulatory Information Telephone Number : (216) 566-2902

Transportation Emergency Telephone Number : (800) 424-9300

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown acute oral toxicity: 21.6%
Percentage of the mixture consisting of ingredient(s) of unknown acute dermal toxicity: 21.6%
Percentage of the mixture consisting of ingredient(s) of unknown acute inhalation toxicity: 21.6%

GHS label elements

Hazard pictograms :



Date of issue/Date of revision : 5/12/2020
EN-16/B25116 OMNI-FILL® Enamel Blend (EN-16)

Date of previous issue : 11/29/2019

Version : 10
SHW-85-NA-GHS-US

1/16 2449

Section 2. Hazards identification

Signal word : Danger

Hazard statements : Extremely flammable aerosol.
 Contains gas under pressure; may explode if heated.
 Causes serious eye irritation.
 Suspected of causing cancer.
 May be fatal if swallowed and enters airways.
 May cause respiratory irritation.
 May cause drowsiness or dizziness.
 May cause damage to organs through prolonged or repeated exposure.

Precautionary statements

Prevention : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Wash hands thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.

Response : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.

Disposal : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Supplemental label elements DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY.
 Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.

Hazards not otherwise classified : None known.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture

Other means of identification : Not available.

CAS number/other identifiers

| Ingredient name | % by weight | CAS number |
|-----------------------|-------------|------------|
| Acetone | ≥25 - ≤50 | 67-64-1 |
| Propane | ≥10 - ≤25 | 74-98-6 |
| Butane | ≥10 - ≤25 | 106-97-8 |
| Xylene, mixed isomers | <10 | 1330-20-7 |
| Ethylbenzene | ≤3 | 100-41-4 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Section 3. Composition/information on ingredients

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : No specific data.
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting

Section 4. First aid measures

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Section 6. Accidental release measures

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|-----------------|---------|---|
| Acetone | 67-64-1 | ACGIH TLV (United States, 3/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 250 ppm 10 hours. TWA: 590 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m ³ 8 hours. |
| Propane | 74-98-6 | NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. |

Section 8. Exposure controls/personal protection

| | | |
|-----------------------|-----------|---|
| Butane | 106-97-8 | <p>TWA: 1800 mg/m³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m³ 8 hours. ACGIH TLV (United States, 3/2019). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> |
| Xylene, mixed isomers | 1330-20-7 | <p>NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m³ 10 hours. ACGIH TLV (United States, 3/2019). Explosive potential. STEL: 1000 ppm 15 minutes. ACGIH TLV (United States, 3/2019). TWA: 100 ppm 8 hours. TWA: 434 mg/m³ 8 hours. STEL: 150 ppm 15 minutes. STEL: 651 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |
| Ethylbenzene | 100-41-4 | <p>ACGIH TLV (United States, 3/2019). TWA: 20 ppm 8 hours. NIOSH REL (United States, 10/2016). TWA: 100 ppm 10 hours. TWA: 435 mg/m³ 10 hours. STEL: 125 ppm 15 minutes. STEL: 545 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 100 ppm 8 hours. TWA: 435 mg/m³ 8 hours.</p> |

Occupational exposure limits (Canada)

| Ingredient name | CAS # | Exposure limits |
|-----------------|---------|---|
| Acetone | 67-64-1 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1200 mg/m³ 8 hours. 15 min OEL: 1800 mg/m³ 15 minutes. 8 hrs OEL: 500 ppm 8 hours. 15 min OEL: 750 ppm 15 minutes. CA British Columbia Provincial (Canada, 5/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. CA Ontario Provincial (Canada, 1/2018). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. CA Quebec Provincial (Canada, 1/2014). TWA_{EV}: 500 ppm 8 hours. TWA_{EV}: 1190 mg/m³ 8 hours. STEV: 1000 ppm 15 minutes. STEV: 2380 mg/m³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 750 ppm 15 minutes. TWA: 500 ppm 8 hours.</p> |
| Normal propane | 74-98-6 | <p>CA Alberta Provincial (Canada, 6/2018).</p> |

Section 8. Exposure controls/personal protection

| | | |
|--------------|-----------|--|
| Butane | 106-97-8 | <p>8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 1000 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 5/2019). Oxygen Depletion [Asphyxiant]. Explosive potential. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 800 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 5/2019). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |
| Xylene | 1330-20-7 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 651 mg/m³ 15 minutes. 15 min OEL: 150 ppm 15 minutes. 8 hrs OEL: 434 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 5/2019). TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes. CA Quebec Provincial (Canada, 1/2014). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 651 mg/m³ 15 minutes. CA Ontario Provincial (Canada, 1/2018). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| Ethylbenzene | 100-41-4 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 8 hrs OEL: 434 mg/m³ 8 hours. 15 min OEL: 543 mg/m³ 15 minutes. 15 min OEL: 125 ppm 15 minutes. CA British Columbia Provincial (Canada, 5/2019). TWA: 20 ppm 8 hours. CA Ontario Provincial (Canada, 1/2018).</p> |

Section 8. Exposure controls/personal protection

| | | |
|--|--|---|
| | | <p>TWA: 20 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 125 ppm 15 minutes. STEV: 543 mg/m³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 125 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
|--|--|---|

Occupational exposure limits (Mexico)

| | CAS # | Exposure limits |
|-----------------------|-----------|--|
| Acetone | 67-64-1 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. |
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Xylene, mixed isomers | 1330-20-7 | NOM-010-STPS-2014 (Mexico, 4/2016). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. |
| Ethylbenzene | 100-41-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 7
- Melting point/freezing point** : Not available.
- Boiling point/boiling range** : Not available.
- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 5.6 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 1%
Upper: 12.8%
- Vapor pressure** : 101.3 kPa (760 mm Hg) [at 20°C]
- Vapor density** : 1.55 [Air = 1]
- Relative density** : 0.66
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
- Molecular weight** : Not applicable.
- Aerosol product**
- Type of aerosol** : Spray
- Heat of combustion** : 34.46 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.

Section 10. Stability and reactivity

Conditions to avoid : Avoid all possible sources of ignition (spark or flame).

Incompatible materials : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|--------------------------|----------|
| Acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| Butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| Xylene, mixed isomers | LC50 Inhalation Gas. | Rat | 5000 ppm | 4 hours |
| | LD50 Oral | Rat | 4300 mg/kg | - |
| Ethylbenzene | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-----------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 ppm | - |
| | Eyes - Mild irritant | Rabbit | - | 10 UI | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 20 mg | - |
| Xylene, mixed isomers | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 395 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 87 mg | - |
| | | | | 24 hours 5 mg | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 UI | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| Ethylbenzene | Skin - Moderate irritant | Rabbit | - | 100 % | - |
| | Eyes - Severe irritant | Rabbit | - | 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 15 mg | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Xylene, mixed isomers | - | 3 | - |
| Ethylbenzene | - | 2B | - |

Reproductive toxicity

Section 11. Toxicological information

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|-----------------------|--------------------------|------------------------------------|--|
| Acetone | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Propane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Butane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Xylene, mixed isomers | Category 3 | Not applicable. | Respiratory tract irritation |
| Ethylbenzene | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|-----------------------|------------|-------------------|----------------|
| Acetone | Category 2 | Not determined | Not determined |
| Propane | Category 2 | Not determined | Not determined |
| Butane | Category 2 | Not determined | Not determined |
| Xylene, mixed isomers | Category 2 | Not determined | Not determined |
| Ethylbenzene | Category 2 | Not determined | Not determined |

Aspiration hazard

| Name | Result |
|-----------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Xylene, mixed isomers | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.

Skin contact : No known significant effects or critical hazards.

Ingestion : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : Adverse symptoms may include the following:
pain or irritation
watering
redness

Section 11. Toxicological information

- Inhalation** : Adverse symptoms may include the following:
 - respiratory tract irritation
 - coughing
 - nausea or vomiting
 - headache
 - drowsiness/fatigue
 - dizziness/vertigo
 - unconsciousness
- Skin contact** : No specific data.
- Ingestion** : Adverse symptoms may include the following:
 - nausea or vomiting

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

- General** : May cause damage to organs through prolonged or repeated exposure.
- Carcinogenicity** : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.
- Mutagenicity** : No known significant effects or critical hazards.
- Teratogenicity** : No known significant effects or critical hazards.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|---------------------|----------------|
| Oral | 32305.01 mg/kg |
| Dermal | 10058.76 mg/kg |
| Inhalation (gases) | 45721.63 ppm |
| Inhalation (vapors) | 569.05 mg/l |

Section 12. Ecological information

Toxicity

Section 12. Ecological information

| Product/ingredient name | Result | Species | Exposure |
|-------------------------|-------------------------------------|---|----------|
| Acetone | Acute EC50 7200000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 6000000 µg/l Fresh water | Crustaceans - Gammarus pulex | 48 hours |
| | Acute LC50 6900 mg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| Xylene, mixed isomers | Chronic NOEC 5 µg/l Marine water | Fish - Gasterosteus aculeatus - Larvae | 42 days |
| | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| Ethylbenzene | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute EC50 4600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 3600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 6.53 mg/l Marine water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| | Acute EC50 2.93 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| | Acute LC50 4200 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| Xylene, mixed isomers | - | - | Readily |
| Ethylbenzene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-------------|-----------|
| Xylene, mixed isomers | - | 8.1 to 25.9 | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. 126 | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. 126 | - ERG No. 126 | - | Emergency schedules F-D, S-U |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Proper shipping name : Not available.
Ship type : Not available.
Pollution category : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

Section 15. Regulatory information

International lists :

- Australia inventory (AICS):** Not determined.
- China inventory (IECSC):** Not determined.
- Japan inventory (ENCS):** Not determined.
- Japan inventory (ISHL):** Not determined.
- Korea inventory (KECI):** Not determined.
- New Zealand Inventory of Chemicals (NZIoC):** Not determined.
- Philippines inventory (PICCS):** Not determined.
- Taiwan Chemical Substances Inventory (TCSI):** Not determined.
- Thailand inventory:** Not determined.
- Turkey inventory:** Not determined.
- Vietnam inventory:** Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A | Calculation method |
| CARCINOGENICITY - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Date of printing : 5/12/2020

Date of issue/Date of revision : 5/12/2020

Date of previous issue : 11/29/2019

Version : 10

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL = International Convention for the Prevention of Pollution From Ships, 1973

Section 16. Other information

as modified by the Protocol of 1978. ("Marpol" = marine pollution)

N/A = Not available

SGG = Segregation Group

UN = United Nations

✔ Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

**MATERIAL SAFETY DATA SHEET
FORMULA-8**

SECTION 1: Product and Company Identification

Product Name: Formula-8

Synonyms: Oxygen-compatible Thread Sealant

Manufacturer: Fluoramics Inc.

Address: 18 Industrial Avenue, Mahwah, NJ 07430

Emergency Phone: 201-825-8110

Information Phone: 1-800-922-0075

Fax Number: 201-825-7035

Chemical Name: Aqueous Paste & Filler of PTFE

Chemical Family: Mixture

Product use: Thread Sealant

SECTION 2: Composition/Information on Ingredients

| Ingredient | CAS No. | % Wt. |
|--------------------------------|-------------------|----------------|
| Water | 7732 18 5 | 45 - 60 |
| Polytetrafluoroethylene | 9002 84 0 | 40 - 60 |
| Carboxy Vinyl Polymer | 9003 01 4 | .5 - 2 |
| Titanium Dioxide | 13463 67 7 | 2.5 - 5 |

SECTION 3: Hazards Identification

Route of Entry:

Signs & Symptoms of Exposure: PTFE polymer, when thermally decomposed, may cause polymer fume fever and flu-like symptoms.

Eyes: May cause irritation. Use goggles if contact is probable

Skin: May cause irritation to sensitive skin. Use protective garment when applicable

Ingestion: Contact a physician

Inhalation: Use a local exhaust if possible

SECTION 4: First Aid Measures

Eyes: Flush eyes with copious amounts of water
Skin: Remove by wiping and wash with soap and water
Ingestion: Contact a physician
Inhalation: Remove to fresh air

SECTION 5: Fire Fighting Measures

Flash point & method used: N/A
Flammability limits in air by volume: Non-combustible
Extinguisher media: Incombustible
Special fire fighting procedures: none
Unusual fire and explosion hazards: In extreme fire situation, protection from hydrogen fluoride fumes should be employed

| | NFPA Codes | HMIS Codes |
|--------------------------------|-----------------------|-----------------------|
| Health | 1 | 1 |
| Flammability | 0 | 0 |
| Reactivity | 0 | 0 |
| Personal Protection | SCBA | B |

SECTION 6: Accidental Release Measures

Non-hazardous. Disposal to conform with local, state and federal regulations

SECTION 7: Handling and storage

Do not store below 35F (1.6C)
Precautions: Strictly enforce **NO SMOKING** rule for workers handling material

SECTION 8: Exposure control/Personal protection

Use normal personal hygiene and good housekeeping.

Respiratory protection: If exposed to high temperature processing fumes, wear self-contained breathing apparatus.

Use protective gloves.

SECTION 9: Physical and chemical properties

Appearance: white
Odor: None
Physical: paste
Boiling point: 212F (water)
Melting point: N/A

Vapor pressure: <.01
Solubility in water: dispersible
Specific gravity H₂O=1: 1.2
Evaporation rate (butyl acetate=1): H₂O slow

SECTION 10: Stability and reactivity

Stability: stable
Conditions to avoid: Temperatures above 250F without adequate ventilation.
Will not polymerize
Incompatibility: strong alkali
Hazardous decomposition products: At 650C (1202F) COF₂ is the principal toxic product. At above 650C, major products are CF₄ and CO₂.

SECTION 11: Toxicological information

No toxicology data available

SECTION 12: Ecological information

No ecological information is available

SECTION 13: Disposal considerations

Waste disposal methods: Land fill is preferred but disposal methods must conform with local, state and federal regulations.

SECTION 14: Transport information

Transport information: N/A

SECTION 15: Regulatory information

Non-hazardous product. Not applicable

SECTION 16: Other information

Date prepared: January 9, 2015



SAFETY DATA SHEET

Issuing Date January 5, 2015

Revision Date July 23, 2018

Revision Number 2

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND OF THE COMPANY/UNDERTAKING

Product identifier

Product Name Clorox Commercial Solutions® Clorox® Germicidal Bleach

Other means of identification

EPA Registration Number 67619-32

Recommended use of the chemical and restrictions on use

Recommended use Institutional hard surface disinfecting and sanitizing bleach

Uses advised against No information available

Details of the supplier of the safety data sheet

Supplier Address

Clorox Professional Products Company
1221 Broadway
Oakland, CA 94612

Phone: 1-510-271-7000

Emergency telephone number

Emergency Phone Numbers For Medical Emergencies, call: 1-800-446-1014
For Transportation Emergencies, call Chemtrec: 1-800-424-9300

2. HAZARDS IDENTIFICATION


Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200).

| | |
|-----------------------------------|------------|
| Skin corrosion/irritation | Category 1 |
| Serious eye damage/eye irritation | Category 1 |

GHS Label elements, including precautionary statements

Emergency Overview

| | | | |
|---|--|-----------------------|-------------|
| Signal word | Danger | | |
| Hazard Statements | Causes severe skin burns and eye damage Causes serious eye damage | | |
|  | | | |
| Appearance | Clear, pale yellow | Physical State | Thin liquid |
| | | Odor | Bleach |

Precautionary Statements - Prevention

Wash face, hands and any exposed skin thoroughly after handling.
 Wear protective gloves, protective clothing, face protection, and eye protection such as safety glasses.

Precautionary Statements - Response

Immediately call a poison center or doctor.
 If swallowed: Rinse mouth. Do NOT induce vomiting.
 If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water.
 Wash contaminated clothing before reuse.
 If inhaled: Remove person to fresh air and keep comfortable for breathing.
 Specific treatment (see supplemental first aid instructions on this label).
 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

Precautionary Statements - Storage

Store locked up.

Precautionary Statements - Disposal

Dispose of contents in accordance with all applicable federal, state, and local regulations.

Hazards not otherwise classified (HNOC)

Although not expected, heart conditions or chronic respiratory problems such as asthma, chronic bronchitis, or obstructive lung disease may be aggravated by exposure to high concentrations of vapor or mist.

Product contains a strong oxidizer. Always flush drains before and after use.

Unknown Toxicity

Not applicable.

Other information

Very toxic to aquatic life with long lasting effects.

Interactions with Other Chemicals

Reacts with other household chemicals such as toilet bowl cleaners, rust removers, acids, or products containing ammonia to produce hazardous irritating gases, such as chlorine and other chlorinated compounds.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS-No | Weight % | Trade Secret |
|---------------------|-----------|----------|--------------|
| Sodium hypochlorite | 7681-52-9 | 5 - 10 | * |

* The exact percentage (concentration) of composition has been withheld as a trade secret.

4. FIRST AID MEASURES**First aid measures****General Advice**

Call a poison control center or doctor immediately for treatment advice. Show this safety data sheet to the doctor in attendance.

Eye Contact

Hold eye open and rinse slowly and gently with water for 15 - 20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.

Skin Contact

Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

Inhalation

Move to fresh air. If breathing is affected, call a doctor.

Ingestion

Have person sip a glassful of water if able to swallow. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give anything by mouth to an unconscious person. Call a poison control center or doctor immediately for treatment advice.

Protection of First-aiders

Avoid contact with skin, eyes, and clothing. Use personal protective equipment as required. Wear personal protective clothing (see section 8).

Most important symptoms and effects, both acute and delayed**Most Important Symptoms and Effects**

Burning of eyes and skin.

Indication of any immediate medical attention and special treatment needed**Notes to Physician**

Treat symptomatically. Probable mucosal damage may contraindicate the use of gastric lavage.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

Unsuitable Extinguishing Media

CAUTION: Use of water spray when fighting fire may be inefficient.

Specific Hazards Arising from the Chemical

This product causes burns to eyes, skin, and mucous membranes. Thermal decomposition can release sodium chlorate and irritating gases and vapors.

Explosion Data

Sensitivity to Mechanical Impact None.

Sensitivity to Static Discharge None.

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal Precautions

Avoid contact with eyes, skin, and clothing. Ensure adequate ventilation. Use personal protective equipment as required. For spills of multiple products, responders should evaluate the MSDSs of the products for incompatibility with sodium hypochlorite. Breathing protection should be worn in enclosed and/or poorly-ventilated areas until hazard assessment is complete.

Other Information

Refer to protective measures listed in Sections 7 and 8.

Environmental precautions

Environmental Precautions

This product is toxic to fish, aquatic invertebrates, oysters, and shrimp. Do not allow product to enter storm drains, lakes, or streams. See Section 12 for ecological information.

Methods and material for containment and cleaning up

Methods for Containment

Prevent further leakage or spillage if safe to do so.

Methods for Cleaning Up

Absorb and containerize. Wash residual down to sanitary sewer. Contact the sanitary treatment facility in advance to assure ability to process washed-down material.

7. HANDLING AND STORAGE

Precautions for safe handling

Handling Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes, and clothing. Do not eat, drink, or smoke when using this product.

Conditions for safe storage, including any incompatibilities

Storage Store away from children. Reclose cap tightly after each use. Store this product upright in a cool, dry area, away from direct sunlight and heat to avoid deterioration. Do not contaminate food or feed by storage of this product.

Incompatible Products Toilet bowl cleaners, rust removers, acids, and products containing ammonia.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure Guidelines

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|----------------------------------|-----------|----------|------------|
| Sodium hypochlorite 7681-52-9 | None | None | None |

ACGIH TLV: American Conference of Governmental Industrial Hygienists - Threshold Limit Value. OSHA PEL: Occupational Safety and Health Administration - Permissible Exposure Limits. NIOSH IDLH: Immediately Dangerous to Life or Health.

Appropriate engineering controls

Engineering Measures Showers
Eyewash stations
Ventilation systems

Individual protection measures, such as personal protective equipment

Eye/Face Protection If splashes are likely to occur: Wear safety glasses with side shields (or goggles) or face shield.

Skin and Body Protection Wear rubber or neoprene gloves and protective clothing such as long-sleeved shirt.

Respiratory Protection If irritation is experienced, NIOSH/MSHA approved respiratory protection should be worn. Positive-pressure supplied air respirators may be required for high airborne contaminant concentrations. Respiratory protection must be provided in accordance with current local regulations.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice. Wash hands after direct contact. Do not wear product-contaminated clothing for prolonged periods. Remove and wash contaminated clothing before re-use. Do not eat, drink, or smoke when using this product.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical and Chemical Properties

| | | | |
|-----------------------|-------------|-----------------------|--------------------------|
| Physical State | Thin liquid | Odor | Bleach |
| Appearance | Clear | Odor Threshold | No information available |
| Color | Pale yellow | | |

| <u>Property</u> | <u>Values</u> | <u>Remarks/ Method</u> |
|---|-------------------|------------------------|
| pH | ~12 | None known |
| Melting/freezing point | No data available | None known |
| Boiling point / boiling range | No data available | None known |
| Flash Point | Not flammable | None known |
| Evaporation rate | No data available | None known |
| Flammability (solid, gas) | No data available | None known |
| Flammability Limits in Air | | |
| Upper flammability limit | No data available | None known |
| Lower flammability limit | No data available | None known |
| Vapor pressure | No data available | None known |
| Vapor density | No data available | None known |
| Specific Gravity | ~1.1 | None known |
| Water Solubility | Soluble | None known |
| Solubility in other solvents | No data available | None known |
| Partition coefficient: n-octanol/water | No data available | None known |
| Autoignition temperature | No data available | None known |
| Decomposition temperature | No data available | None known |
| Kinematic viscosity | No data available | None known |
| Dynamic viscosity | No data available | None known |
| Explosive Properties | Not explosive | |
| Oxidizing Properties | No data available | |

Other Information

| | |
|-----------------------------------|-------------------|
| Softening Point | No data available |
| VOC Content (%) | No data available |
| Particle Size | No data available |
| Particle Size Distribution | No data available |

10. STABILITY AND REACTIVITY

Reactivity

Reacts with other household chemicals such as toilet bowl cleaners, rust removers, acids, or products containing ammonia to produce hazardous irritating gases, such as chlorine and other chlorinated compounds.

Chemical stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

None under normal processing.

Conditions to avoid

None known based on information supplied.

Incompatible materials

Toilet bowl cleaners, rust removers, acids, and products containing ammonia.

Hazardous Decomposition Products

None known based on information supplied.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Product Information

| | |
|---------------------|---|
| Inhalation | Exposure to vapor or mist may irritate respiratory tract and cause coughing. Inhalation of high concentrations may cause pulmonary edema. |
| Eye Contact | Corrosive. May cause severe damage to eyes. |
| Skin Contact | May cause severe irritation to skin. Prolonged contact may cause burns to skin. |
| Ingestion | Ingestion may cause burns to gastrointestinal tract and respiratory tract, nausea, vomiting, and diarrhea. |

Component Information

| Chemical Name | LD50 Oral | LD50 Dermal | LC50 Inhalation |
|----------------------------------|------------------|-----------------------|-----------------|
| Sodium hypochlorite 7681-52-9 | 8200 mg/kg (Rat) | >10000 mg/kg (Rabbit) | - |

Information on toxicological effects

Symptoms May cause redness and tearing of the eyes. May cause burns to eyes. May cause redness or burns to skin. Inhalation may cause coughing.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Sensitization No information available.

Mutagenic Effects No information available.

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|----------------------------------|-------|---------|-----|------|
| Sodium hypochlorite 7681-52-9 | - | Group 3 | - | - |

*IARC (International Agency for Research on Cancer)
Group 3 - Not Classifiable as to Carcinogenicity in Humans*

Reproductive Toxicity No information available.

STOT - single exposure No information available.

STOT - repeated exposure No information available.

Chronic Toxicity Carcinogenic potential is unknown.

Target Organ Effects Respiratory system, eyes, skin, gastrointestinal tract (GI).

Aspiration Hazard No information available.

Numerical measures of toxicity - Product Information

The following values are calculated based on chapter 3.1 of the GHS document

ATEmix (oral)

54 g/kg

ATEmix (inhalation-dust/mist)

58 mg/L

12. ECOLOGICAL INFORMATION**Ecotoxicity**

Very toxic to aquatic life with long lasting effects.

This product is toxic to fish, aquatic invertebrates, oysters, and shrimp. Do not allow product to enter storm drains, lakes, or streams.

Persistence and Degradability

No information available.

Bioaccumulation

No information available.

Other adverse effects

No information available.

13. DISPOSAL CONSIDERATIONS**Disposal methods**

Dispose of in accordance with all applicable federal, state, and local regulations. Do not contaminate food or feed by disposal of this product.

Contaminated Packaging

Do not reuse empty containers. Dispose of in accordance with all applicable federal, state, and local regulations.

14. TRANSPORT INFORMATION**DOT**

Not restricted.

TDG

Not restricted for road or rail.

ICAO

Not restricted, as per Special Provision A197, Environmentally Hazardous Substance exception.

IATA

Not restricted, as per Special Provision A197, Environmentally Hazardous Substance exception.

IMDG/IMO

Not restricted, as per IMDG Code 2.10.2.7, Marine Pollutant exception.

15. REGULATORY INFORMATION

Chemical Inventories

TSCA All components of this product are either on the TSCA 8(b) Inventory or otherwise exempt from listing.
DSL/NDSL All components are on the DSL or NDSL.

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory
DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

U.S. Federal Regulations

SARA 313
 Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

SARA 311/312 Hazard Categories

| | |
|--|-----|
| Acute Health Hazard | Yes |
| Chronic Health Hazard | No |
| Fire Hazard | No |
| Sudden Release of Pressure Hazard | No |
| Reactive Hazard | No |

Clean Water Act

This product contains the following substances which are regulated pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

| Chemical Name | CWA - Reportable Quantities | CWA - Toxic Pollutants | CWA - Priority Pollutants | CWA - Hazardous Substances |
|----------------------------------|-----------------------------|------------------------|---------------------------|----------------------------|
| Sodium hypochlorite 7681-52-9 | 100 lb | | | X |

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

| Chemical Name | Hazardous Substances RQs | Extremely Hazardous Substances RQs | RQ |
|----------------------------------|--------------------------|------------------------------------|---|
| Sodium hypochlorite 7681-52-9 | 100 lb | - | RQ 100 lb final RQ RQ 45.4 kg final RQ |

EPA Statement

This chemical is a pesticide product registered by the Environmental Protection Agency and is subject to certain labeling requirements under federal pesticide law. These requirements differ from the classification criteria and hazard information required for safety data sheets and for workplace labels of non-pesticide chemicals. Following is the hazard information as required on the pesticide label:

DANGER: CORROSIVE. Causes irreversible eye damage and skin burns. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Wear protective eyewear and rubber gloves when handling this product. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco, or using the restroom. Avoid breathing vapors and use only in a well-ventilated area.

US State Regulations**California Proposition 65**

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania | Rhode Island | Illinois |
|----------------------------------|------------|---------------|--------------|--------------|----------|
| Sodium hypochlorite 7681-52-9 | X | X | X | X | |
| Sodium chlorate 7775-09-9 | X | X | X | | |

International Regulations**Canada****WHMIS Hazard Class**

E - Corrosive material

**16. OTHER INFORMATION**

NFPA Health Hazard 3 Flammability 0 Instability 0 Physical and Chemical Hazards -

HMIS Health Hazard 3 Flammability 0 Physical Hazard 0 Personal Protection B

Prepared By Product Stewardship
23 British American Blvd.
Latham, NY 12110
1-800-572-6501

Revision Date July 23, 2018

Revision Note Revised Section 1.

Reference 1081722/166081.094

General Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal, and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

SAFETY DATA SHEET

SC0615000

Section 1. Identification

Product name : SP™615 Heavy Duty Paint Remover Aerosol
Product code : SC0615000
Other means of identification : Not available.
Product type : Aerosol.
Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

Manufacturer : Sprayon Products Group
101 W. Prospect Avenue,
Cleveland, Ohio 44115

Emergency telephone number of the company : US / Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Product Information Telephone Number : US / Canada: (800) 247-3266
Mexico: Not Available

Regulatory Information Telephone Number : US / Canada: (216) 566-2902
Mexico: Not Available

Transportation Emergency Telephone Number : US / Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).


Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
ACUTE TOXICITY (oral) - Category 4
SKIN CORROSION/IRRITATION - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 1A
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown acute oral toxicity: 12.5%
Percentage of the mixture consisting of ingredient(s) of unknown acute dermal toxicity: 74.5%
Percentage of the mixture consisting of ingredient(s) of unknown acute inhalation toxicity: 21%

Date of issue/Date of revision : 12/1/2019 **Date of previous issue** : 10/1/2019 **Version** : 10
SC0615000 SP™615 Heavy Duty Paint Remover Aerosol **SHW-85-NA-GHS-US** 1/17

Section 2. Hazards identification

GHS label elements

Hazard pictograms

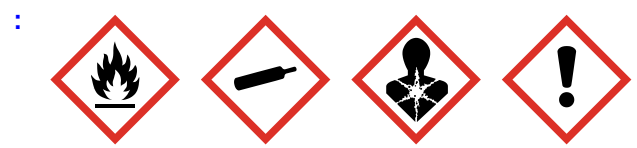

Signal word

: Danger

Hazard statements

- : Extremely flammable aerosol.
- Contains gas under pressure; may explode if heated.
- Harmful if swallowed.
- Causes serious eye irritation.
- Causes skin irritation.
- May cause cancer.
- May be fatal if swallowed and enters airways.
- May cause respiratory irritation.
- May cause drowsiness or dizziness.
- May cause damage to organs through prolonged or repeated exposure.

Precautionary statements

Prevention

- : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.

Response

- : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or physician. Rinse mouth. Do NOT induce vomiting. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage

- : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.

Disposal

- : Dispose of contents and container in accordance with all local, regional, national and international regulations.

Supplemental label elements

DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains a chemical known to the State of California to cause cancer. FOR INDUSTRIAL USE ONLY.

Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.

Hazards not otherwise classified

- : None known.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Other means of identification : Not available.

CAS number/other identifiers

| Ingredient name | % by weight | CAS number |
|-----------------------------|-------------|------------|
| Methylene Chloride | ≥50 - ≤75 | 75-09-2 |
| Propane | ≥10 - ≤25 | 74-98-6 |
| Butane | ≥10 - ≤25 | 106-97-8 |
| 2-Propanol | ≤10 | 67-63-0 |
| Ethanolamine | ≤3 | 141-43-5 |
| Light Aliphatic Hydrocarbon | ≤3 | 64742-47-8 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.

Section 4. First aid measures

- Skin contact** : Causes skin irritation.
- Ingestion** : Harmful if swallowed. Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
 - pain or irritation
 - watering
 - redness
- Inhalation** : Adverse symptoms may include the following:
 - respiratory tract irritation
 - coughing
 - nausea or vomiting
 - headache
 - drowsiness/fatigue
 - dizziness/vertigo
 - unconsciousness
- Skin contact** : Adverse symptoms may include the following:
 - irritation
 - redness
- Ingestion** : Adverse symptoms may include the following:
 - nausea or vomiting

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
 - carbon dioxide
 - carbon monoxide
 - nitrogen oxides
 - halogenated compounds
 - carbonyl halides

Section 5. Fire-fighting measures

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

Section 7. Handling and storage

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|--------------------|----------|--|
| Methylene Chloride | 75-09-2 | ACGIH TLV (United States, 3/2019). TWA: 50 ppm 8 hours. TWA: 174 mg/m ³ 8 hours. OSHA PEL Z2 (United States, 2/2013). STEL: 125 ppm 15 minutes. TWA: 25 ppm 8 hours. |
| Propane | 74-98-6 | NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2019). Oxygen Depletion [Asphyxiant]. Explosive potential. |
| Butane | 106-97-8 | NIOSH REL (United States, 10/2016). TWA: 800 ppm 10 hours. TWA: 1900 mg/m ³ 10 hours. ACGIH TLV (United States, 3/2019). Explosive potential. STEL: 1000 ppm 15 minutes. |
| 2-Propanol | 67-63-0 | ACGIH TLV (United States, 3/2019). TWA: 200 ppm 8 hours. STEL: 400 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 400 ppm 10 hours. TWA: 980 mg/m ³ 10 hours. STEL: 500 ppm 15 minutes. STEL: 1225 mg/m ³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 400 ppm 8 hours. TWA: 980 mg/m ³ 8 hours. |
| Ethanolamine | 141-43-5 | ACGIH TLV (United States, 3/2019). TWA: 3 ppm 8 hours. TWA: 7.5 mg/m ³ 8 hours. STEL: 6 ppm 15 minutes. STEL: 15 mg/m ³ 15 minutes. NIOSH REL (United States, 10/2016). TWA: 3 ppm 10 hours. |

Section 8. Exposure controls/personal protection

| | | |
|-----------------------------|------------|---|
| Light Aliphatic Hydrocarbon | 64742-47-8 | <p>TWA: 8 mg/m³ 10 hours. STEL: 6 ppm 15 minutes. STEL: 15 mg/m³ 15 minutes. OSHA PEL (United States, 5/2018). TWA: 3 ppm 8 hours. TWA: 6 mg/m³ 8 hours. ACGIH TLV (United States, 3/2019). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapor) 8 hours.</p> |
|-----------------------------|------------|---|

Occupational exposure limits (Canada)

| Ingredient name | CAS # | Exposure limits |
|--------------------|----------|--|
| Methylene chloride | 75-09-2 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 174 mg/m³ 8 hours. 8 hrs OEL: 50 ppm 8 hours. CA British Columbia Provincial (Canada, 5/2019). TWA: 25 ppm 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 50 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 50 ppm 8 hours. TWAEV: 174 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 75 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> |
| Normal propane | 74-98-6 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m³ 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 1000 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 5/2019). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> |
| Butane | 106-97-8 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 800 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 5/2019). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |

Section 8. Exposure controls/personal protection

| | | |
|---|------------|---|
| Isopropyl alcohol | 67-63-0 | <p>CA Alberta Provincial (Canada, 6/2018). 15 min OEL: 984 mg/m³ 15 minutes. 8 hrs OEL: 200 ppm 8 hours. 15 min OEL: 400 ppm 15 minutes. 8 hrs OEL: 492 mg/m³ 8 hours.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 200 ppm 8 hours. STEL: 400 ppm 15 minutes.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 200 ppm 8 hours. STEL: 400 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 400 ppm 8 hours. TWAEV: 983 mg/m³ 8 hours. STEV: 500 ppm 15 minutes. STEV: 1230 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 400 ppm 15 minutes. TWA: 200 ppm 8 hours.</p> |
| 2-Aminoethanol | 141-43-5 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 7.5 mg/m³ 8 hours. 8 hrs OEL: 3 ppm 8 hours. 15 min OEL: 15 mg/m³ 15 minutes. 15 min OEL: 6 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 3 ppm 8 hours. STEL: 6 ppm 15 minutes.</p> <p>CA Ontario Provincial (Canada, 1/2018). TWA: 3 ppm 8 hours. STEL: 6 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 1/2014). TWAEV: 3 ppm 8 hours. TWAEV: 7.5 mg/m³ 8 hours. STEV: 6 ppm 15 minutes. STEV: 15 mg/m³ 15 minutes.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 6 ppm 15 minutes. TWA: 3 ppm 8 hours.</p> |
| Petroleum refining, hydrotreated light distillate | 64742-47-8 | <p>CA British Columbia Provincial (Canada, 5/2019). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapour) 8 hours.</p> <p>CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 200 mg/m³, (as total hydrocarbon vapour) 8 hours.</p> <p>CA Ontario Provincial (Canada, 1/2018). Absorbed through skin. TWA: 200 mg/m³, (as total hydrocarbon vapour) 8 hours.</p> |

[Occupational exposure limits \(Mexico\)](#)

Section 8. Exposure controls/personal protection

| | CAS # | Exposure limits |
|-----------------------------|------------|--|
| Methylene Chloride | 75-09-2 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 50 ppm 8 hours. |
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| 2-Propanol | 67-63-0 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 200 ppm 8 hours. STEL: 400 ppm 15 minutes. |
| Ethanolamine | 141-43-5 | NOM-010-STPS-2014 (Mexico, 4/2016). STEL: 6 ppm 15 minutes. TWA: 3 ppm 8 hours. |
| Light Aliphatic Hydrocarbon | 64742-47-8 | ACGIH TLV (United States, 3/2019). Absorbed through skin. TWA: 200 mg/m ³ , (as total hydrocarbon vapor) 8 hours. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Section 8. Exposure controls/personal protection

Respiratory protection : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

Physical state : Liquid.
Color : Not available.
Odor : Not available.
Odor threshold : Not available.
pH : 7
Melting point/freezing point : Not available.
Boiling point/boiling range : Not available.
Flash point : Closed cup: -29°C (-20.2°F) [Tagliabue Closed Cup]
Evaporation rate : 27.5 (butyl acetate = 1)
Flammability (solid, gas) : Not available.
Lower and upper explosive (flammable) limits : Lower: 0.6%
Upper: 23.5%
Vapor pressure : 101.3 kPa (760 mm Hg) [at 20°C]
Vapor density : 1 [Air = 1]
Relative density : 0.93
Solubility : Not available.
Partition coefficient: n-octanol/water : Not available.
Auto-ignition temperature : Not available.
Decomposition temperature : Not available.
Viscosity : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
Molecular weight : Not applicable.
Aerosol product
Type of aerosol : Spray
Heat of combustion : 14.788 kJ/g

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.
Chemical stability : The product is stable.
Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid : Avoid all possible sources of ignition (spark or flame).
Incompatible materials : No specific data.
Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|-------------------------|-----------------------|---------|--------------------------|----------|
| Methylene Chloride | LC50 Inhalation Vapor | Rat | 76000 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | 985 mg/kg | - |
| Butane 2-Propanol | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| | LD50 Dermal | Rabbit | 12800 mg/kg | - |
| Ethanolamine | LD50 Oral | Rat | 5000 mg/kg | - |
| | LD50 Oral | Rat | 1720 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-----------------|-------------|
| Methylene Chloride | Eyes - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 10 mg | - |
| | Eyes - Moderate irritant | Rabbit | - | 162 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 100 mg | - |
| | Skin - Severe irritant | Rabbit | - | 24 hours 810 mg | - |
| 2-Propanol | Eyes - Moderate irritant | Rabbit | - | 24 hours 100 mg | - |
| | Eyes - Moderate irritant | Rabbit | - | 10 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 100 mg | - |
| Ethanolamine | Skin - Mild irritant | Rabbit | - | 500 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 250 ug | - |
| | Skin - Moderate irritant | Rabbit | - | 505 mg | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|--|
| Methylene Chloride | + | 2A | Reasonably anticipated to be a human carcinogen. |
| 2-Propanol | - | 3 | |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Section 11. Toxicological information

| Name | Category | Route of exposure | Target organs |
|-----------------------------|--------------------------|------------------------------------|--|
| Methylene Chloride | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Propane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Butane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| 2-Propanol | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Ethanolamine | Category 3 | Not applicable. | Respiratory tract irritation |
| Light Aliphatic Hydrocarbon | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|-----------------------------|------------|-------------------|----------------|
| Methylene Chloride | Category 2 | Not determined | Not determined |
| Propane | Category 2 | Not determined | Not determined |
| Butane | Category 2 | Not determined | Not determined |
| 2-Propanol | Category 2 | Not determined | Not determined |
| Light Aliphatic Hydrocarbon | Category 2 | Not determined | Not determined |

Aspiration hazard

| Name | Result |
|-----------------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Light Aliphatic Hydrocarbon | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : Causes skin irritation.
- Ingestion** : Harmful if swallowed. Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness

Section 11. Toxicological information

- Inhalation** : Adverse symptoms may include the following:
 - respiratory tract irritation
 - coughing
 - nausea or vomiting
 - headache
 - drowsiness/fatigue
 - dizziness/vertigo
 - unconsciousness
- Skin contact** : Adverse symptoms may include the following:
 - irritation
 - redness
- Ingestion** : Adverse symptoms may include the following:
 - nausea or vomiting

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

- General** : May cause damage to organs through prolonged or repeated exposure.
- Carcinogenicity** : May cause cancer. Risk of cancer depends on duration and level of exposure.
- Mutagenicity** : No known significant effects or critical hazards.
- Teratogenicity** : No known significant effects or critical hazards.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|---------------------|----------------|
| Oral | 1337.57 mg/kg |
| Dermal | 22541.41 mg/kg |
| Inhalation (vapors) | 699.42 mg/l |

Section 12. Ecological information

Toxicity

Section 12. Ecological information

| Product/ingredient name | Result | Species | Exposure |
|-----------------------------|--|--|----------------------|
| Methylene Chloride | Acute EC50 242 mg/l Fresh water | Algae - Chlamydomonas reinhardtii - Exponential growth phase | 72 hours |
| | Acute EC50 0.98 mg/l Fresh water | Algae - Chlorella vulgaris | 96 hours |
| | Acute EC50 177 mg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 108500 µg/l Marine water | Crustaceans - Palaemonetes pugio - Juvenile (Fledgling, Hatchling, Weanling) | 48 hours |
| | Acute LC50 2.6 mg/l Fresh water Chronic NOEC 56000 µg/l Fresh water | Fish - Pimephales promelas Algae - Pseudokirchneriella subcapitata | 96 hours 96 hours |
| 2-Propanol | Acute EC50 7550 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| | Acute LC50 1400000 µg/l Marine water | Crustaceans - Crangon crangon | 48 hours |
| Ethanolamine | Acute LC50 4200 mg/l Fresh water | Fish - Rasbora heteromorpha | 96 hours |
| | Acute EC50 8.42 mg/l Fresh water | Algae - Desmodesmus subspicatus | 72 hours |
| | Acute LC50 >100000 µg/l Marine water | Crustaceans - Crangon crangon - Adult | 48 hours |
| Light Aliphatic Hydrocarbon | Acute LC50 170 mg/l Fresh water | Fish - Carassius auratus | 96 hours |
| | Acute LC50 2200 µg/l Fresh water | Fish - Lepomis macrochirus | 4 days |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| 2-Propanol | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-------|-----------|
| Methylene Chloride | - | 22.91 | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. 126 | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. 126 | - ERG No. 126 | - | Emergency schedules F-D, S-U |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Proper shipping name : Not available.
Ship type : Not available.
Pollution category : Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

Methylene Chloride

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

California Prop. 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

International regulations

| | | | |
|---|---|-------------------------|-------|
| Date of issue/Date of revision : 12/1/2019 | Date of previous issue : 10/1/2019 | Version : 10 | 15/17 |
| SC0615000 | SP™615 Heavy Duty Paint Remover Aerosol | SHW-85-NA-GHS-US | |

Section 15. Regulatory information

International lists :

- Australia inventory (AICS):** Not determined.
- China inventory (IECSC):** Not determined.
- Japan inventory (ENCS):** Not determined.
- Japan inventory (ISHL):** Not determined.
- Korea inventory (KECI):** Not determined.
- New Zealand Inventory of Chemicals (NZIoC):** Not determined.
- Philippines inventory (PICCS):** Not determined.
- Taiwan Chemical Substances Inventory (TCSI):** Not determined.
- Thailand inventory:** Not determined.
- Turkey inventory:** Not determined.
- Vietnam inventory:** Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 2 |
| Physical hazards | | 0 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| ACUTE TOXICITY (oral) - Category 4 | Calculation method |
| SKIN CORROSION/IRRITATION - Category 2 | Calculation method |
| SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A | Calculation method |
| CARCINOGENICITY - Category 1A | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Date of printing : 12/1/2019

Date of issue/Date of revision : 12/1/2019

Date of previous issue : 10/1/2019

Version : 10

Section 16. Other information

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- N/A = Not available
- SGG = Segregation Group
- UN = United Nations

✔ Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.



SAFETY DATA SHEET

Issuing Date 10-Jan-2017

Revision Date 15-Jan-2019

Revision Number 4

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND OF THE COMPANY/UNDERTAKING

Product identifier

Product Name Clorox Healthcare® Bleach Germicidal Cleaner

Other means of identification

Synonyms None

EPA Pesticide registration number 56392-7

Recommended use of the chemical and restrictions on use

Recommended Use Disinfectant - Non-Aerosol

Uses advised against No information available

Details of the supplier of the safety data sheet

Supplier The Clorox Company

Supplier Address 1221 Broadway
Oakland
CA
94612
US

Telephone 1-510-271-7000

Emergency telephone number

Emergency Telephone Number For Medical Emergencies call: 1-800-446-1014. Transportation Emergencies, call Chemtrec: 1-800-424-9300

2. HAZARDS IDENTIFICATION

Classification

This product is not considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200).

GHS Label elements, including precautionary statements

Emergency Overview

The product contains no substances which at their given concentration, are considered to be hazardous to health.

Physical state Liquid

Odor Fruity, Floral, Bleach

Precautionary Statements - Prevention

Not applicable

Precautionary Statements - Response

None

Precautionary Statements - Storage

None

Precautionary Statements - Disposal

None

Hazards not otherwise classified (HNOC)

Not applicable

Unknown Toxicity

0.03 % of the mixture consists of ingredient(s) of unknown toxicity

Other information

No information available

Interactions with Other Chemicals

No information available.

Interactions with Other Chemicals

May react with bleach-containing products or other household cleaners to produce hazardous gases.

3. COMPOSITION/INFORMATION ON INGREDIENTS

The product contains no substances which at their given concentration, are considered to be hazardous to health.

4. FIRST AID MEASURES

First aid measures**General Advice**

Show this safety data sheet to the doctor in attendance.

Eye contact

Rinse thoroughly with water as necessary. If symptoms persist, call a physician.

Skin contact

Wash with soap and water. If skin irritation persists, call a physician.

Inhalation

Remove to fresh air. If breathing is difficult, (trained personnel should) give oxygen. If symptoms persist, call a physician.

Ingestion

Drink 1 or 2 glasses of water. Get medical attention if symptoms occur.

Most important symptoms and effects, both acute and delayed**Most Important Symptoms and Effects**

None known.

Indication of any immediate medical attention and special treatment needed**Notes to Physician**

Treat symptomatically.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment

Unsuitable extinguishing media

CAUTION: Use of water spray when fighting fire may be inefficient.

Specific hazards arising from the chemical

No information available.

Hazardous Combustion Products

Carbon oxides.

Explosion Data

Sensitivity to Mechanical Impact No.

Sensitivity to Static Discharge No.

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal precautions Avoid contact with eyes.

Other Information Refer to protective measures listed in Sections 7 and 8.

Environmental precautions

Environmental precautions See Section 12 for additional Ecological Information.

Methods and material for containment and cleaning up

Methods for containment Prevent further leakage or spillage if safe to do so.

Methods for cleaning up Pick up and transfer to properly labeled containers.

7. HANDLING AND STORAGE

Precautions for safe handling

Handling Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes or clothing. Do not eat, drink or smoke when using this product.

Conditions for safe storage, including any incompatibilities

Storage Keep containers tightly closed in a dry, cool and well-ventilated place.

Incompatible products None known based on information supplied.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure Guidelines This product, as supplied, does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies

Other Exposure Guidelines See section 15 for national exposure control parameters

Appropriate engineering controls

Engineering Measures Ventilation systems

Individual protection measures, such as personal protective equipment

Eye/face protection No special protective equipment required.

Skin and body protection No special protective equipment required.

Respiratory protection No protective equipment is needed under normal use conditions. If exposure limits are exceeded or irritation is experienced, ventilation and evacuation may be required.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical and Chemical Properties

| | | | |
|---|--|--------------|--------------------------|
| Physical state Odor Odor Threshold | Liquid Fruity Floral Bleach No information available | Color | No information available |
|---|--|--------------|--------------------------|

| <u>Property</u> | <u>Values</u> | <u>Remarks</u> | <u>Method</u> |
|--|--------------------|----------------|---------------|
| pH | 11.8 - 12.2 | None known | |
| Melting / freezing point | No data available | None known | |
| Boiling point / boiling range | No data available | None known | |
| Flash Point | No data available | None known | |
| Evaporation Rate | No data available | None known | |
| Flammability (solid, gas) | No data available | None known | |
| Flammability Limit in Air | | | |
| Upper flammability limit | No data available | | |
| Lower flammability limit | No data available | | |
| Vapor pressure | No data available | None known | |
| Vapor density | No data available | None known | |
| Specific Gravity | ~1.0 | None known | |
| Water Solubility | Completely soluble | None known | |
| Solubility in other solvents | No data available | None known | |
| Partition coefficient: n-octanol/water | 0 | None known | |
| Autoignition temperature | No data available | None known | |
| Decomposition temperature | No data available | None known | |
| Kinematic viscosity | No data available | None known | |
| Dynamic viscosity | No data available | None known | |
| Explosive properties | No data available | | |
| Oxidizing properties | No data available | | |

Other Information

| | |
|---|--|
| Softening Point VOC Content (%) Particle Size Particle Size Distribution | No data available No data available No data available No data available |
|---|--|

10. STABILITY AND REACTIVITY

Reactivity

No data available

Chemical stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

None under normal processing.

Conditions to avoid

None known based on information supplied.

Incompatible materials

Ammonia Acids

Hazardous Decomposition Products

None known based on information supplied.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Product Information

| | |
|---------------------|---|
| Inhalation | May cause irritation of respiratory tract. |
| Eye contact | May cause slight irritation. |
| Skin contact | Substance may cause slight skin irritation. |
| Ingestion | Ingestion may cause irritation to mucous membranes. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea. |

Component Information

Information on toxicological effects

Symptoms May cause redness and tearing of the eyes.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

| | |
|---------------------------------|--|
| Sensitization | No information available. |
| Mutagenic Effects | No information available. |
| Carcinogenicity | The table below indicates whether each agency has listed any ingredient as a carcinogen. <i>IARC (International Agency for Research on Cancer)</i> <i>Group 3 - Not Classifiable as to Carcinogenicity in Humans</i> |
| Reproductive toxicity | No information available. |
| STOT - single exposure | No information available. |
| STOT - repeated exposure | No information available. |
| Chronic Toxicity | No known effect based on information supplied. |
| Target Organ Effects | Skin. Eyes. Respiratory system. Reproductive System. |
| Aspiration Hazard | No information available. |

Numerical measures of toxicity Product Information

The following values are calculated based on chapter 3.1 of the GHS document

No information available

12. ECOLOGICAL INFORMATION

Ecotoxicity

None known.

Persistence and Degradability

No information available.

Bioaccumulation

No information available

Other adverse effects

No information available.

13. DISPOSAL CONSIDERATIONS

Waste treatment methods

Disposal methods Dispose of in accordance with federal, state and local regulations.

Contaminated Packaging Do not reuse empty containers. Dispose of in accordance with federal, state and local regulations.

California Waste Codes 232

This product contains one or more substances that are listed with the State of California as a hazardous waste.

14. TRANSPORT INFORMATION

DOT NOT REGULATED

TDG Not regulated

ICAO Not regulated

IATA Not regulated

IMDG Not regulated

15. REGULATORY INFORMATION

International Inventories

TSCA All components are listed on the TSCA Inventory
 DSL All components are listed either on the DSL or NDSL.

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory
DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

US Federal Regulations

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

SARA 311/312 Hazard Categories

| | |
|--|----|
| Acute Health Hazard | No |
| Chronic Health Hazard | No |
| Fire Hazard | No |
| Sudden release of pressure hazard | No |
| Reactive Hazard | No |

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level

pertaining to releases of this material

US State Regulations
California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

This product does not contain any substances above threshold limits that are regulated by state right-to-know.

EPA Pesticide Registration No. 56392-7

EPA Statement

This chemical is a pesticide product registered by the Environmental Protection Agency and is subject to certain labeling requirements under federal pesticide law. These requirements differ from the classification criteria and hazard information required for safety data sheets, and for workplace labels of non-pesticide chemicals. Following is the hazard information as required on the pesticide label:

EPA Pesticide label

CAUTION: Causes moderate eye irritation. Avoid contact with eyes or clothing. Wash thoroughly with soap and water after handling.

International Regulations

National occupational exposure limits

Mexico - Occupational Exposure Limits - Carcinogens

A3 - Confirmed Animal Carcinogen

Canada

WHMIS Hazard Class

Not determined

16. OTHER INFORMATION

| | | | | |
|-------------|-------------------------|-----------------------|--------------------------|---|
| NFPA | Health Hazards 0 | Flammability 0 | Instability 0 | Physical and Chemical Hazards N/A |
| HMS | Health Hazards 0 | Flammability 0 | Physical Hazard 0 | Personal Protection A |

Prepared By Product Stewardship
 23 British American Blvd.
 Latham, NY 12110
 1-800-572-6501

Issuing Date 10-Jan-2017
Revision Date 15-Jan-2019
Revision Note No information available

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of Safety Data Sheet



GHS SAFETY DATA SHEET

WELD-ON® 705™ Low VOC Cements for PVC Plastic Pipe

Date Revised: JUN 2018
Supersedes: NOV 2017

SECTION I - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 705™ Low VOC Cements for PVC Plastic Pipe
PRODUCT USE: Low VOC Solvent Cement for PVC Plastic Pipe
SUPPLIER: **MANUFACTURER:** IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | | Environmental | | Physical | |
|---------------------|------------|-------------------|------------|------------------|------------|
| Acute Toxicity: | Category 4 | Acute Toxicity: | None Known | Flammable Liquid | Category 2 |
| Skin Irritation: | Category 3 | Chronic Toxicity: | None Known | | |
| Skin Sensitization: | NO | | | | |
| Eye: | Category 2 | | | | |

GHS LABEL:    **Signal Word:** Danger **WHMIS CLASSIFICATION:** CLASS B, DIVISION 2
CLASS D, DIVISION 1B

| Hazard Statements | Precautionary Statements |
|--|---|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H332: Harmful if inhaled H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer EUH019: May form explosive peroxides | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH | CONCENTRATION |
|---------------------------|----------|-----------|-------------------------|---------------|
| | | | Pre-registration Number | % by Weight |
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 25 - 50 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 5 - 36 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 05-2116297718-25-0000 | 15 - 30 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin Contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

Likely Routes of Exposure: Inhalation, Eye and Skin Contact

Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.

Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

| | | | |
|---|--------------|------|------------|
| Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. | HMIS | NFPA | 0-Minimal |
| Unsuitable Extinguishing Media: Water spray or stream. | Health | 2 | 1-Slight |
| Exposure Hazards: Inhalation and dermal contact | Flammability | 3 | 2-Moderate |
| Combustion Products: Oxides of carbon, hydrogen chloride and smoke | Reactivity | 0 | 3-Serious |
| | PPE | B | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
Prevent contact with skin or eyes (see section 8).

Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.

Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.

Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL | OSHA PEL-Ceiling | CAL/OSHA PEL | CAL/OSHA Ceiling | CAL/OSHA STEL |
|------------------|---------------------------|-----------|------------|----------|-----------|------------------|--------------|------------------|---------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® 705™ Low VOC Cements for PVC Plastic Pipe

Date Revised: JUN 2018
Supersedes: NOV 2017

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Clear or gray, medium syrupy liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 66°C (151°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 66°C (151°F) Based on first boiling component: THF | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 11.8% based on THF |
| Flash Point: | -20°C (-4°F) TCC based on THF | Vapor Pressure: | 129 mm Hg @ 20°C (68°F) based on THF |
| Specific Gravity: | 0.9611 @ 23°C (73°F) | Vapor Density: | >2 (Air = 1) |
| Solubility: | Solvent portion soluble in water. Resin portion separates out. | Other Data: Viscosity: | Medium bodied |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 500 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|--|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | |
|---------------------------|---|--|----------------------|
| Toxicity: | LD ₅₀ | LC ₅₀ | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|-------------------------|---|
| Ecotoxicity: | None Known |
| Mobility: | In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 500 g/l. |
| Degradability: | Not readily biodegradable |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | | |
|-------------------------------|--------------------------|---|
| Proper Shipping Name: | Adhesives | EXCEPTION for Ground Shipping DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package. Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D". |
| Hazard Class: | 3 | |
| Secondary Risk: | None | TDG INFORMATION TDG CLASS: FLAMMABLE LIQUID 3 SHIPPING NAME: ADHESIVES UN NUMBER/PACKING GROUP: UN 1133, PG II |
| Identification Number: | UN 1133 | |
| Packing Group: | PG II | |
| Label Required: | Class 3 Flammable Liquid | |
| Marine Pollutant: | NO | |

SECTION 15 - REGULATORY INFORMATION

| | | | |
|---|--|---|--|
| Precautionary Label Information: | Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: | USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | | |
| Risk Phrases: | R11: Highly flammable. R20: Harmful by inhalation. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness | |
| Safety Phrases: | S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. S25: Avoid contact with eyes. | S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. S46: If swallowed, seek medical advise immediately and show this container or label. | |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 6/21/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for PVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® P-70™ Low VOC Primer for PVC and CPVC Plastic Pipe
PRODUCT USE: Low VOC Primer for PVC and CPVC Plastic Pipe
SUPPLIER:

MANUFACTURER: IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|--|--|-----------------------------|
| Acute Oral Toxicity: Category 4 Skin Irritation: Category 3 Skin Sensitization: NO Carcinogenicity: Category 2 Eye: Category 2 | Acute Toxicity: None Known Chronic Toxicity: None Known | Flammable Liquid Category 2 |

GHS LABEL:



Signal Word:
Danger

WHMIS CLASSIFICATION: CLASS B, DIVISION 2
CLASS D, DIVISION 2B

| Hazard Statements | Precautionary Statements |
|--|---|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H332: Harmful if inhaled H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer EUH019: May form explosive peroxides | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------------------|----------|-----------|------------------------------|------------------------------|
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 01-2119444314-46-0000 | 45 - 59 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 01-2119457290-43-0000 | 19 - 29 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 5 - 15 |
| Acetone | 67-64-1 | 200-662-2 | 01-2119471330-49-0000 | 5 - 20 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.
Likely Routes of Exposure: Inhalation, Eye and Skin Contact
Acute symptoms and effects:
Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.
Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.
Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.
Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.
Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog.
Unsuitable Extinguishing Media: Water spray or stream.
Exposure Hazards: Inhalation and dermal contact
Combustion Products: Oxides of carbon and smoke

| | HMIS | NFPA | |
|--------------|------|------|------------|
| Health | 2 | 2 | 0-Minimal |
| Flammability | 3 | 3 | 1-Slight |
| Reactivity | 0 | 0 | 2-Moderate |
| PPE | B | | 3-Serious |
| | | | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH 8 hour TLV | ACGIH 15 min STEL | OSHA 8 hour PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8 hour PEL | CAL/OSHA Ceiling | CAL/OSHA 15 min STEL |
|------------------|---------------------------|---------------------|----------------------|--------------------|---------------------|---------------------|------------------------|---------------------|-------------------------|
| | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 250 ppm |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |
| | Acetone | 250 ppm | 500 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|--|-------------------------------|---|
| Appearance: | Clear or purple, thin liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ethereal | Boiling Range: | 56°C (133°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -108.5°C (-163.3°F) Based on first melting component: THF | Flammability: | Category 2 |
| Boiling Point: | 56°C (133°F) Based on first boiling component: Acetone | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 12.8% based on Acetone |
| Flash Point: | -20°C (-4°F) TCC based on Acetone | Vapor Pressure: | 190 mm Hg @ 20°C (68°F) Acetone |
| Specific Gravity: | 0.858 @ 23°C (73°F) | Vapor Density: | >2.0 (Air = 1) |
| Solubility: | Solvent portion soluble in water. | Other Data: Viscosity: | Water-thin |
| Partition Coefficient n-octanol/water: | Not Available | | |
| Auto-ignition Temperature: | 321°C (610°F) based on THF | | |
| Decomposition Temperature: | Not Applicable | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 550 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|--|---|
| Stability: | Stable |
| Hazardous decomposition products: | None in normal use. When forced to burn, this product gives off oxides of carbon and smoke. |
| Conditions to avoid: | Keep away from heat, sparks, open flame and other ignition sources. |
| Incompatible Materials: | Oxidizers, strong acids and bases, amines, ammonia |

SECTION 11 - TOXICOLOGICAL INFORMATION

| | | | | | |
|---------------------------|---|-------------|--|-------------|----------------------|
| Toxicity: | | LD50 | | LC50 | Target Organs |
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | | Inhalation 4 hrs. 8,000 PPM (rat) | | |
| Acetone | Oral: 5800 mg/kg (rat) | | Inhalation 50,100 mg/m ³ (rat) | | STOT SE3 |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|--------------------------|---|
| Ecotoxicity: | None Known |
| Mobility in Soil: | If released into the environment, this product can move rapidly through the soil. |
| Degradability: | Not available |
| Bioaccumulation: | Minimal to none. |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|-------------------------------|---|
| Proper Shipping Name: | Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) |
| Hazard Class: | 3 |
| Secondary Risk: | None |
| Identification Number: | UN 1993 |
| Packing Group: | PG II |
| Label Required: | Class 3 Flammable Liquid |
| Marine Pollutant: | NO |

| EXCEPTION for Ground Shipping |
|---|
| DOT Limited Quantity: Up to 1L per inner packaging, 30 kg gross weight per package. Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D". |

| TDG INFORMATION |
|--|
| TDG CLASS: FLAMMABLE LIQUID 3 SHIPPING NAME: Flammable Liquid, n.o.s. (Acetone, Tetrahydrofuran) UN NUMBER/PACKING GROUP: UN 1993, PG II |

SECTION 15 - REGULATORY INFORMATION

| | | |
|---|---|---|
| Precautionary Label Information: | Highly Flammable, Irritant, (Carc.-THF) Cat. 2 | Ingredient Listings: USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: | F, Xi | |
| Risk Phrases: | R11: Highly flammable. R20: Harmful by inhalation. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness |
| Safety Phrases: | S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. S25: Avoid contact with eyes. | S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. S46: If swallowed, seek medical advice immediately and show this container or label. |
| Compliance Statement: | This SDS was prepared to be in accordance with: US OSHA Hazard Communication Standard 29 CFR 1910.1200 (Rev 2012) European Regulation (EC) No (EU) 2015/830 on classification, labelling and packaging of substances and mixtures | |

SECTION 16 - OTHER INFORMATION

| | |
|---|--|
| Specification information: | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs |
| E-mail address: | <EHSinfo@ipscorp.com> |
| Training necessary: | Yes, training in practices and procedures contained in product literature. |
| Reissue date / reason for reissue: | 1/11/2019 / Updated GHS Standard Format |
| Intended Use of Product: | Primer for PVC and CPVC Plastic Pipe |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.



SAFETY DATA SHEET

1. Identification

| | |
|---|---|
| Product identifier | HERCULES PVC Cement Clear Medium Body, Medium Set |
| Other means of identification | |
| Product code | MSDS #92 |
| Synonyms | Part Numbers: 60003, 60013, 60015, 60020, 60025 Export Part Numbers: 60003E, 60013E, 60015E, 60020E, 60025E |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | HCC Holdings, Inc. an Oatey Affiliate |
| Address | 4700 West 160th Street Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |

| | |
|--|--|
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |
| Supplemental information | Not applicable. |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|--------------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 40-60 |
| Methyl ethyl ketone | 78-93-3 | 10-25 |
| Polyvinyl chloride | 9002-86-2 | 10-20 |
| Acetone | 67-64-1 | 7-15 |
| Cyclohexanone | 108-94-1 | 5-15 |
| Silica, amorphous, fumed | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |

| | |
|---|---|
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

| | |
|--|---|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS. |
| Methods and materials for containment and cleaning up | Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water. |

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

| | |
|--------------------------------------|---|
| Precautions for safe handling | Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices. |
|--------------------------------------|---|

| | |
|---|---|
| Conditions for safe storage, including any incompatibilities | Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). |
|---|---|

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|-----------------------------------|------|------------|------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 | |
| | | 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 | |
| | | 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 | |
| | | 200 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 | |
| | | | |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|----------------------|----------------------|
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 200 ppm | Respirable fraction. |
| | | 5 mg/m ³ | |
| | | 15 mg/m ³ | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|--|------|-----------------------|
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 0.8 mg/m ³ |
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------------------|----------------------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm | |
| | TWA | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m ³ | Respirable fraction. |
| | TWA | 200 ppm | |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|--|------|-----------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m ³ |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m ³ |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m ³ |
| | TWA | 250 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 590 mg/m ³ |
| | | 200 ppm |
| | STEL | 885 mg/m ³ |
| | | 300 ppm |
| | TWA | 590 mg/m ³ |
| | | 200 ppm |
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 6 mg/m ³ |
| | | 6 mg/m ³ |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | | Cyclohexanol, with hydrolysis | Urine | * |

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|--------|-----------------|----------|---------------|
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9) Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Face shield is recommended. Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid.

Form Transparent liquid.

Color Clear.

Odor Solvent.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

Initial boiling point and boiling range 151 °F (66.11 °C)

Flash point 6.0 °F (-14.4 °C) Based on THF

Evaporation rate 7 - 11

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) 1.8

| | |
|--|-----------------------------|
| Flammability limit - upper (%) | 11.8 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 143 mm Hg @ 20 C |
| Vapor density | 2 - 2.5 |
| Relative density | 0.91 +/- 0.02 |
| Solubility(ies) | |
| Solubility (water) | Negligible |
| Partition coefficient (n-octanol/water) | Not available. |
| Auto-ignition temperature | Not available. |
| Decomposition temperature | Not available. |
| Viscosity | 80 - 500 cP |
| Other information | |
| Bulk density | 7.6 lb/gal |
| VOC (Weight %) | < 510 g/l SCAQMD 1168/M316A |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia. |

| | |
|---|--|
| Symptoms related to the physical, chemical and toxicological characteristics | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. |
|---|--|

Information on toxicological effects

| | |
|-----------------------|---|
| Acute toxicity | May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation. |
|-----------------------|---|

| Components | Species | Test Results |
|-----------------------|---------|------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

| | |
|--|---|
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| Polyvinyl chloride (CAS 9002-86-2) | 3 Not classifiable as to carcinogenicity to humans. |
| Silica, amorphous, fumed (CAS 112945-52-5) | 3 Not classifiable as to carcinogenicity to humans. |

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
|------------------------------------|--------|

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|---|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | T11, TP1, TP8, TP27 |
| Packaging exceptions | 150 |
| Packaging non bulk | 201 |
| Packaging bulk | 243 |

IATA

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | Adhesives |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3L |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|-------------------------------------|---|
| UN number | UN1133 |
| UN proper shipping name | ADHESIVES |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-D |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer Central nervous system Liver Blood Flammability |
|------------------------------------|--|

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

| | |
|--------------------------|--|
| Hazard categories | Immediate Hazard - Yes Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No |
|--------------------------|--|

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Silica, amorphous, fumed (CAS 112945-52-5)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Silica, amorphous, fumed (CAS 112945-52-5)

US. Rhode Island RTK

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | No |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 27-May-2015 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. HCC Holdings Inc. an Oatey Affiliate cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.

Weldfast ZC-275 Part A Safety Data Sheet

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifier

- Weldfast ZC-275 Part A

1.2 Relevant identified uses of the substance or mixture and uses advised against

- Epoxy adhesive for joining fiberglass reinforced plastic products.
- This product is intended to be mixed only with its specific catalyst; ZC-275 Part B Hardener

1.3 Details of the supplier of the safety data sheet

- NOV Fiber Glass Systems
17115 San Pedro Avenue, Suite 200
San Antonio, Texas 78232 USA
Tel: 1-210-477-7500
Fax: 1-210-231-5915
E-mail: Mike.Thayer@nov.com

1.4 Emergency telephone number(s)

- 3E Company, 24-Hour Support (Access Code/Contract Number: 333386)
 - USA, Canada 1-888-298-2344
 - Asia, Pacific 1-760-476-3960
 - Europe, Middle East, Africa 1-760-476-3961
 - Americas 1-760-476-3962

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

Physical

- Not classified

Health

- Acute toxicity, Category 4 (oral)
- Skin irritation, Category 2
- Skin sensitizer, Category 1
- Eye irritation – Category 2A
- Carcinogen – Category 1A (inhalation; quartz)
- Specific target organ systemic toxicity – single exposure, Category 3 (respiratory tract irritation; quartz)
- Specific target organ systemic toxicity – repeated exposure, Category 1 (respiratory system; quartz)

Environmental

- Chronic aquatic toxicity, Category 2

2.2 Label elements

Signal Word(s)

- DANGER

Pictogram(s)



Hazard Statements

- Physical
 - Not classified
- Health
 - H302: Harmful if swallowed.
 - H315: Causes skin irritation.
 - H317: May cause an allergic skin reaction.
 - H319: Causes serious eye irritation.
 - H332: Harmful if inhaled.
 - H335: May cause respiratory irritation.
 - H350: May cause cancer (inhalation; quartz).
 - H372: Causes damage to the respiratory system through prolonged or repeated exposure (inhalation; quartz).
- Environmental
 - H411: Toxic to aquatic life with long lasting effects.

Precautionary Statements

- Prevention
 - P201: Obtain special instructions before use.
 - P202: Do not handle until all safety precautions have been read and understood.
 - P233: Keep container tightly closed.
 - P261: Avoid breathing dust/fume/gas/mist/vapor/spray.
 - P264: Wash skin thoroughly after handling.
 - P270: Do not eat, drink or smoke when using this product.
 - P271: Use only outdoors or in well-ventilated area.
 - P272: Contaminated work clothing should not be allowed out of the workplace.
 - P273: Avoid release to the environment.
 - P280: Wear protective gloves/protective clothing/eye protection/face protection.
- Response
 - P302+P352: IF ON SKIN: Wash with plenty of soap and water.
 - P333+P313: If skin irritation or rash occurs: Get medical advice/attention.

- P301+P310: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
 - P303+P361+P353: IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
 - P304+P340: IF INHALED: Remove person to fresh air and keep comfortable for breathing.
 - P305+P351+P338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 - P308+P311: If exposed or concerned: Call a POISON CENTER or doctor/physician.
 - P308+P313: IF exposed or concerned: Get medical advice/attention.
 - P331: Do NOT induce vomiting.
 - P332+P313: If skin irritation occurs: Get medical advice/attention.
 - P337+P313: If eye irritation persists: Get medical advice/attention.
 - P362+P364: Take off all contaminated clothing and wash it before reuse.
 - P370+P378: In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
 - P391: Collect spillage.
- Storage
- P403+P233: Store in a well-ventilated place. Keep container tightly closed.
 - P403+P235: Store in a well-ventilated place. Keep cool.
- Disposal
- P501: Dispose of contents/container in accordance with regulatory requirements.

2.3 Other Hazards

- PBT and vPvB assessment
 - None of the ingredients are considered to be either PBT or vPvB.
- Warning: The cured adhesive product may form combustible dust concentrations in air when sanded, grinded, or cut.

SECTION 3: Composition/information on Ingredients

3.1 Substances

- Not applicable

3.2 Mixtures

| Chemical Identity | CAS No. | EC No. | Concentration Range (weight %) |
|--|----------------|----------------|--------------------------------|
| Epoxy phenol novolac resin | 028064-14-4 | Polymer | 40 – 50 |
| Ceramic microspheres | 066402-68-4 | 266-340-9 | 40 – 50 |
| Crystalline silica (quartz) | 014808-60-7 | 238-878-4 | 5 – 10 |
| Substances that do not meet the classification and labeling criteria established under the GHS | Not applicable | Not applicable | Balance |

SECTION 4. First-aid measures

4.1 Description of first-aid measures

Inhalation

- Move to fresh air.
- If difficulty in breathing or respiratory irritation; seek immediate medical attention.
- If breathing has stopped; seek immediate medical attention, perform artificial respiration.

Skin contact

- Wash affected area thoroughly with soap and water for at least 20 minutes.
- If irritation develops or persists; seek medical attention.

Eye contact

- Immediately flush with water for at least 20 minutes.
- Remove contact lenses, if present.
- If irritation develops or persists, seek medical attention.

Ingestion

- Do not induce vomiting unless directed to do so by medical personnel.
- Never give anything by mouth to an unconscious person.
- If conscious, rinse out mouth with water.
- If symptoms persist, seek immediate medical attention.

4.2 Most Important symptoms and effects, both acute and delayed

Acute

- Irritation.

Delayed

- Pre-existing skin problems may be aggravated by prolonged or repeated contact.

4.3 Indication of any immediate medical attention and special treatment needed

- Treat symptomatically.

SECTION 5: Firefighting measures

5.1 Extinguishing media

- Water spray, ABC dry chemical, foam or carbon dioxide.

5.2 Specific hazards arising from the substance or mixture

- Product is not considered a fire hazard, but may burn if ignited.
- Closed containers may rupture when exposed to extreme heat.
- Toxic or irritating substances may be emitted upon burning, combustion or decomposition.

5.3 Advice for firefighters

- Wear self-contained breathing apparatus and protective clothing, as necessary.
-

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

- Due to the high viscosity of this adhesive product and the relatively small end-use container size, significant spills are unlikely to occur.
- If a spilled in an enclosed area, ventilate and remove all sources of ignition.
- Use only non-sparking tools during cleanup and place discarded material into a suitable container.

6.2 Environmental precautions

- Do not allow spilled materials to enter storm sewers, sanitary sewers, or impact groundwater.
- Do not allow spilled materials to remain on the ground.

6.3 Methods and materials for containment and cleaning up

- Use only non-sparking tools during cleanup and place discarded material into a suitable container for disposal.
- Avoid dispersal of dust in the air (i.e., cleaning dusty surfaces with compressed air) as this can contribute to a combustible dust hazard.

6.4 Reference to other sections

- See also, *SECTION 8: Control parameters* and *SECTION 13: Disposal considerations*.
-

SECTION 7: Handling and storage

7.1 Precautions for safe handling

- Avoid contact with skin and eyes and inhalation of vapors.
- Avoid sources of ignition, including smoking while using this product.
- Thoroughly wash exposed skin after working with this product.
- Only use this product in a well-ventilated area.
- Use spark-free tools.
- Empty containers may contain product residue and may be hazardous.
- Minimize generation of dust when sanding, grinding, and cutting the cured product.
- Routine housekeeping should be instituted to ensure that product dusts do not accumulate on surfaces.

7.2 Conditions for safe storage, including any incompatibilities

- Store in cool location away from ignition sources or open flames.
- Avoid prolonged exposure to temperatures in excess of 38°C (100°F).
- Store in original containers or in containers of the same construction material as original containers.

7.3 Specific end use(s)

- No additional data available.
-

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Epoxy phenol novolac resin
CAS No. 0028064-14-4

| Country | Occupational Exposure Limit (OEL) Values | | Legal Basis |
|---|--|---------------------|-------------|
| | Eight Hour TWA | Fifteen Minute STEL | |
| No OELs were found for this ingredient. | | | |

Crystalline silica (quartz) ^[1]
CAS No. 0014808-60-7

| Country | Occupational Exposure Limit (OEL) Values | | Legal Basis |
|---------------------------|---|---|--|
| | Eight Hour TWA | Fifteen Minute STEL | |
| Australia | 0.1 mg/m ³ | None established | Workplace Exposure Standards for Airborne Contaminants |
| Austria | 0.15 mg/m ³ (respirable aerosol) | None established | Maximum Workplace Concentrations (MAK) Technical Guidance Concentrations (TRK) |
| Belgium | 0.1 mg/m ³ | None established | limites d'exposition professionnelle – VLEP/ Grenswaarden voor beroepsmatige blootstelling – GWBB |
| Canada – Alberta | 0.025 mg/m ³ (respirable particulate) | None established | Occupational Safety and Health Code |
| Canada – British Columbia | 0.025 mg/m ³ | None established | Occupational Health and Safety Regulation, Table of Exposure Limits for Chemical and Biological Substances |
| Canada - Ontario | 0.1 mg/m ³ (respirable fraction) | None established | Regulation 883, Control of Exposure to Biological or Chemical Agents |
| Canada - Quebec | 0.1 mg/m ³ | None established | Regulation respecting occupational safety and health |
| Canada - Saskatchewan | 0.05 mg/m ³ (respirable fraction) | None established | The Occupational Safety and Health Regulations |
| China | 1 mg/m ³ (10-50% free SiO ₂) 0.7 mg/m ³ (50-80% free SiO ₂) 0.5 mg/m ³ (> 80% free SiO ₂) | None established | GBZ 2.1-2007, Occupational exposure limits for hazardous agents in the workplace |
| Denmark | 0.3 mg/m ³ (inhalable aerosol) 0.1 mg/m ³ (respirable aerosol) | 0.6 mg/m ³ (inhalable aerosol) 0.2 mg/m ³ (respirable aerosol) | Grænseværdier for stoffer og materialer |
| France | 0.1 mg/m ³ (respirable aerosol) | None established | Institut National de Recherche et de Sécurité (INRS) |
| Hungary | 0.15 mg/m ³ (respirable aerosol) | None established | Chemical Safety of Workplaces |
| Ireland | 0.1 mg/m ³ (respirable fraction) | None established | Code of Practice for the Safety, Health and Welfare at Work |

| | | | |
|-----------------|---|------------------|--|
| | | | (Chemical Agents) Regulations |
| New Zealand | 0.2 mg/m ³ (respirable fraction) | None established | Workplace Exposure Standards and Biological Exposure Indices |
| Singapore | 0.1 mg/m ³ (respirable aerosol) | None established | Workplace Safety and Health (General Provisions) Regulations |
| South Korea | 0.05 mg/m ³ | None established | [Need reference] |
| Spain | 0.1 mg/m ³ (respirable fraction) | None established | Instituto Nacional de Seguridad e Higiene en el Trabajo (INSHT) |
| Sweden | 0.1 mg/m ³ (respirable aerosol) | None established | Occupational Exposure Limit Values and Measures Against Air Contaminants (AFS 2005:17) |
| Switzerland | 0.15 mg/m ³ (respirable aerosol) | None established | Verordnung über die Verhütung von Unfällen und Berufskrankheiten (VUV)", Art. 50 Abs.3 |
| The Netherlands | 0.075 mg/m ³ (respirable dust) | None established | MAC-Values / Public limit values Dutch OEL Databank |
| USA (ACGIH) | 0.25 mg/m ³ (respirable aerosol) | None established | None |
| USA (NIOSH) | 0.05 mg/m ³ | None established | NIOSH Pocket Guide to Chemical Hazards (Recommendations Only) |
| USA (OSHA) | 30 / (% silica + 2) (total dust) 10 / (% silica + 2) (respirable dust) | None established | 29 CFR 1910 Subpart Z, Toxic and Hazardous Substances |

^[1] This material is incorporated into the adhesive mixture and exposure via inhalation is not likely to occur unless the cured product is subjected to finishing operations such as sanding, grinding, cutting, etc.

Particulates not otherwise classified/regulated (PNOC / PNOR) (may be generated if cured product is subjected to sanding, grinding, cutting, etc.)

CAS No. – Not applicable

| Country | Occupational Exposure Limit (OEL) Values | | Legal Basis |
|---------------------------|---|---------------------|--|
| | Eight Hour TWA | Fifteen Minute STEL | |
| Austria | 10 mg/m ³ (inhalable) | None established | Workplace Exposure Standards for Airborne Contaminants |
| Belgium | 10 mg/m ³ | None established | limites d'exposition professionnelle – VLEP/ Grenswaarden voor beroepsmatige blootstelling – GWBB |
| Canada - Alberta | 10 mg/m ³ (total) 3 mg/m ³ (respirable) | None established | Occupational Safety and Health Code |
| Canada – British Columbia | 10 mg/m ³ (total dust) 3 mg/m ³ (respirable) | None established | Occupational Health and Safety Regulation, Table of Exposure Limits for Chemical and Biological Substances |
| Canada - Manitoba | 10 mg/m ³ (inhalable) 3 mg/m ³ (respirable) | None established | Workplace Safety and Health Act, Part 36 |
| Canada - Ontario | 10 mg/m ³ (inhalable) 3 mg/m ³ (respirable) | None established | Regulation 883, Control of Exposure to Biological or Chemical Agents |
| Canada - Quebec | 10 mg/m ³ (total dust) | None established | Regulation respecting occupational safety and health |
| China | 3 mg/m ³ (fiberglass reinforced plastic dust) | None established | GBZ 2.1-2007, Occupational exposure limits for hazardous agents in the workplace |
| Ireland | 10 mg/m ³ (inhalable) 4 mg/m ³ (respirable) | None established | Code of Practice for the Safety, Health and Welfare at Work (Chemical Agents) Regulations |
| Malaysia | 10 mg/m ³ (inhalable) | None established | Occupational Safety and Health (Use |

| | | | |
|----------------|---|------------------|---|
| | 3 mg/m ³ (respirable) | | and Standards of Exposure of Chemicals Hazardous to Health) Regulations |
| New Zealand | 10 mg/m ³ (inhalable) 3 mg/m ³ (respirable) | None established | Workplace Exposure Standards and Biological Exposure Indices |
| Singapore | 10 mg/m ³ (nuisance) | None established | Workplace Safety and Health (General Provisions) Regulations |
| South Korea | 10 mg/m ³ | None established | [Need reference] |
| USA (ACGIH) | 10 mg/m ³ (inhalable) 3 mg/m ³ (respirable) | None established | None |
| USA (OSHA) | 15 mg/m ³ (total dust) 5 mg/m ³ (respirable) | None established | 29 CFR 1910 Subpart Z, Toxic and Hazardous Substances |
| United Kingdom | 10 mg/m ³ (inhalable) 4 mg/m ³ (respirable) | None established | EH40 Workplace exposure limits |

8.2 Exposure controls

Appropriate engineering controls

- Provide adequate general and local exhaust ventilation to control airborne concentrations to below the occupational exposure limit values.
- When sanding, cutting, grinding the cured product, it is recommended that all dust control equipment contain explosion relief vents or an explosion suppression system or an oxygen-deficient environment.

Personal protective equipment

- Eye and face protection
 - Approved safety glasses with side shields (e.g., ANSI Z87, EN166)
- Skin protection
 - Hand protection: Butyl rubber, Nitrile rubber or Neoprene gloves are generally recommended for epoxy resin. Different glove materials, thicknesses, and from different glove manufacturers may provide varying degrees of protection. Temperature and specific use can impact glove effectiveness. Some gloves may be intended to be used only once and then discarded, while others may be used for longer periods of time. The glove supplier should provide the user with information regarding permeability and breakthrough time. Gloves should be discarded and replaced if there is any indication of degradation or chemical breakthrough.
 - Other skin protection: Such clothing as to minimize or eliminate the chance of skin contact with the adhesive product.
- Respiratory protection
 - If ventilation is insufficient to keep airborne concentrations below the occupation exposure limit levels, full or half-mask respirator fitted with organic vapor cartridges and/or particulate filters (for sanding, grinding, cutting, etc. cured material). Filter masks may be of limited use in cases of high or unknown exposure.

Environmental exposure controls

- Do not flush into surface water or sanitary sewer system.
- Do not place directly onto ground.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

| | |
|--|--|
| - Appearance | Grey, viscous liquid |
| - Odor | Slight, epoxy |
| - Odor threshold | No data available |
| - pH | No data available |
| - Melting point/freezing point | No data available |
| - Initial boiling point and boiling range | No data available |
| - Flash point | > 240°C / > 482°F (Setaflash Closed Cup) |
| - Evaporation rate | No data available |
| - Flammability (solid, gas) | No data available |
| - Upper/lower flammability or explosive limits | No data available |
| - Vapor pressure | < 1 mmHg @ 20°C / 68°F (epoxy resin) |
| - Vapor density (air = 1) | Heavier than air (epoxy resin) |
| - Relative density | No data available |
| - Solubility(ies) | Negligible in water (epoxy resin) |
| - Partition coefficient: n-octanol/water | No data available |
| - Auto-ignition temperature | No data available |
| - Decomposition temperature | No data available |
| - Viscosity | No data available |
| - Explosive properties | Not explosive (epoxy resin) |
| - Oxidizing properties | Not oxidizing (epoxy resin) |

9.2 Other information

- No data available.
-

SECTION 10: Stability and reactivity

10.1 Reactivity

- No hazardous decomposition expected if product is stored and used as directed.
- Exothermic reactions, including polymerization, may occur in contact with amines, strong acids, strong bases, alcohols, strong oxidizing agents, and excessive heat.

10.2 Chemical stability

- Product is stable under normal conditions of storage and use.

10.3 Possibility of hazardous reactions

- Exothermic reactions, including polymerization, may occur in contact with amines, strong acids, strong bases, alcohols, strong oxidizing agents, and excessive heat.

10.4 Conditions to avoid

- Excessive heat, flames, and sparks.
- Avoid unintended mixing with amine catalyst.

10.5 Incompatible materials

- Avoid contact with oxidizing materials and unintended mixing with amine catalyst.

10.6 Hazardous decomposition products

- On combustion, may emit toxic fumes of carbon monoxide (CO), carbon dioxide (CO₂), aldehydes, and other products of incomplete combustion; phenolics..
-

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

- Data for ingredients not listed were not found or not sufficient for classification.

Epoxy phenol novolac resin (CAS No. 028064-14-4)

- | | | | |
|--------------|------|------|---------------|
| - Oral | Rat: | LD50 | > 2000 mg/kg |
| - Inhalation | — | — | No data found |
| - Dermal | Rat | LD50 | > 2000 mg/kg |

Crystalline silica (quartz) (CAS No. 0014808-60-7)

- | | | | |
|--------------|------|------|---------------|
| - Oral | Rat: | LD50 | 500 mg/kg |
| - Inhalation | — | — | No data found |
| - Dermal | — | — | No data found |

Skin corrosion/irritation

- Data for ingredients not listed were not found or not sufficient for classification.

Epoxy phenol novolac resin (CAS No. 028064-14-4)

- Rabbit Slightly to moderately irritating

Serious eye damage/irritation

- Data for ingredients not listed were not found or not sufficient for classification.

Epoxy phenol novolac resin (CAS No. 028064-14-4)

- Rabbit Slightly irritating

Respiratory or skin sensitization

- Data for ingredients not listed were not found or not sufficient for classification.

Epoxy phenol novolac resin (CAS No. 028064-14-4)

- | | | |
|--------------|------------|-----------------|
| - Inhalation | — | No data found |
| - Skin | Guinea pig | Not sensitizing |

Germ cell mutagenicity

- Data for ingredients were not found or not sufficient for classification.

Carcinogenicity

- Data for ingredients not listed were not found or not sufficient for classification.

Crystalline silica (quartz) (CAS No. 0014808-60-7)

- When inhaled:
 - IARC: Group 1 (carcinogenic to humans)
 - NTP: known to be a human carcinogen
 - ACGIH: suspected human carcinogen

Reproductive toxicity

- Data for ingredients were not found or not sufficient for classification.

STOT-single exposures

- Data for ingredients not listed were not found or not sufficient for classification.

Crystalline silica (quartz) (CAS No. 0014808-60-7)

- Respiratory system Irritation

STOT-repeated exposures

- Data for ingredients not listed were not found or not sufficient for classification.

Crystalline silica (quartz) (CAS No. 0014808-60-7)

- Respiratory system Silicosis

Aspiration hazard

- Data for ingredients were not found or not sufficient for classification.

SECTION 12: Ecological information

12.1 Toxicity

Acute toxicity

- Data for ingredients not listed were not found or not sufficient for classification.

Epoxy phenol novolac resin (CAS No. 028064-14-4)

- Fish: Unknown species. LC50 (96-hour) > 1-10 mg/L
- Crustacea Unknown species. EC50 (24-hour) > 1-10 mg/L
- Algae / Aquatic plants No data found.
- Bacteria No data found.

Crystalline silica (quartz) (CAS No. 0014808-60-7)

- Fish: No data found.
- Crustacea No data found.
- Algae / Aquatic plants No data found.
- Bacteria No data found.

Chronic toxicity

- Data for ingredients were not found or not sufficient for classification.

12.2 Persistence and degradability

- Data for ingredients were not found or not sufficient for classification.

12.3 Bioaccumulative potential

- Data for ingredients were not found or not sufficient for classification.

12.4 Mobility in soil

- Data for ingredients were not found or insufficient for classification.

12.5 Results of PBT and vPvB assessment

- None of the ingredients are listed.

12.6 Other adverse effects

- No additional data is available.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

- Must be disposed of in accordance with local regulatory requirements.
- Land disposal of uncured product is discouraged and illegal in many jurisdictions.
- Sewer disposal is discouraged.
- Empty containers may contain hazardous residue and must be disposed accordingly.

SECTION 14: Transport information

US Department of Transportation (Road and Rail)

- Not regulated

International Carriage of Dangerous Goods by Road (ADR)

International Carriage of Dangerous Goods by Rail (RID)

International Civil Aviation Organization (ICAO) Technical Instructions

- UN3077 ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Epoxy phenol novolac resin), 9, PG III

**International Maritime Dangerous Goods (IMDG) Code
International Carriage of Dangerous Goods by Inland Waterways**

- UN3077 ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Epoxy phenol novolac resin), 9, PG III, MARINE POLLUTANT

SECTION 15: Regulatory information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

The regulatory information provided below may not be comprehensive.

Canada

Controlled Products Regulation (CPR)

- This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all of the information required by the CPR.

Ingredient Disclosure List (IDL)

- All components of this mixture that are on the IDL above their specified concentration are disclosed in this SDS.

United States

| EPCRA | | | CERCLA | RCRA | CAA | OSHA |
|------------------------------------|------------------------|-------------|------------|-----------|-------------------|---------------------------|
| Section 302 (EHS) TPQ (LB/KG) | Section 304 RQ (LB/KG) | Section 313 | RQ (LB/KG) | P/U Codes | 112(r) TQ (LB/KG) | Highly Hazardous Chemical |
| None of the ingredients are listed | | | | | | |

15.2 Chemical safety assessment

- No chemical safety assessment has been carried out for this mixture by the supplier.

SECTION 16: Other information

Revision history

| Revision Number | Revision Date | Revision Description |
|-----------------|---------------|---|
| 1 | 21-AUG-2013 | Initial SDS creation in conformance with OSHA hazard communication standard (29 CFR 1910.1200), Regulation (EC) No. 1907/2006 (REACH), and UN Globally Harmonized System (GHS). |
| 2 | 27-MAY-2015 | Updated Section 14 – Transportation Information. |
| 3 | 27-JAN-2017 | Updated Section 14 – Transportation Information. |
| 4 | 18-FEB-2020 | General review. No changes. |

Legend to abbreviations and acronyms used

- ACGIH American Conference of Governmental Industrial Hygienists
- ANSI American National Standards Institute
- CAA Clean Air Act
- cP centipoise
- CFR Code of Federal Regulations (US)
- EPCRA Emergency Planning and Community Right-to-Know Act
- IARC International Agency for Research on Cancer
- IBC Code International Bulk Chemical Code
- MARPOL Marine Pollution
- NIOSH National Institute for Occupational Safety and Health
- NTP National Toxicological Program
- OSHA Occupational Safety and Health Administration (US)
- PBT Persistent Bioaccumulative and Toxic
- RCRA Resource Conservation and Recovery Act
- vPvB very Persistent and very Bioaccumulative

Key literature references and sources for data

- ESIS. European chemical Substances Information System. <http://esis.jrc.ec.europa.eu/>.
- IARC. 1997. IARC Monographs on the Evaluation of Carcinogenic Risks to Humans. Silica. Volume 68. 24 pages.
- NTP. 2011. Report on Carcinogens. U.S. Department of Health and Human Services. Twelfth Edition. 377-378.
- USEPA. 2006. List of Lists, Consolidated List of Chemicals Subject to the Emergency Planning and Community Right-To-Know Act (EPCRA) and Section 112(r) of the Clean Air Act. EPA 550-B-01-003. October 2006.

SAFETY DATA SHEET

Creation Date 11-Oct-2010

Revision Date 14-Feb-2020

Revision Number 2

1. Identification

Product Name Paraformaldehyde

Cat No. : A11313

CAS-No 30525-89-4
Synonyms Formaldehyde polymer; Polyoxymethylene; Polyformaldehyde

Recommended Use Laboratory chemicals.
Uses advised against Food, drug, pesticide or biocidal product use.
Details of the supplier of the safety data sheet

Company

Alfa Aesar
Thermo Fisher Scientific Chemicals, Inc.
30 Bond Street
Ward Hill, MA 01835-8099
Tel: 800-343-0660
Fax: 800-322-4757
Email: tech@alfa.com
www.alfa.com

Emergency Telephone Number

During normal business hours (Monday-Friday, 8am-7pm EST), call (800) 343-0660.
After normal business hours, call Carechem 24 at (866) 928-0789.

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

| | |
|--|------------|
| Flammable solids | Category 2 |
| Acute oral toxicity | Category 4 |
| Acute Inhalation Toxicity - Dusts and Mists | Category 4 |
| Skin Corrosion/Irritation | Category 2 |
| Serious Eye Damage/Eye Irritation | Category 1 |
| Skin Sensitization | Category 1 |
| Carcinogenicity | Category 2 |
| Specific target organ toxicity (single exposure) | Category 3 |
| Target Organs - Respiratory system. | |
| Combustible dust | Yes |

Label Elements

Signal Word
Danger

Hazard Statements

Flammable solid
May form combustible dust concentrations in air
Causes skin irritation
May cause an allergic skin reaction
Causes serious eye damage
May cause respiratory irritation
Suspected of causing cancer
Harmful if swallowed or if inhaled

**Precautionary Statements****Prevention**

Obtain special instructions before use
Do not handle until all safety precautions have been read and understood
Use personal protective equipment as required
Wash face, hands and any exposed skin thoroughly after handling
Do not eat, drink or smoke when using this product
Avoid breathing dust/fume/gas/mist/vapors/spray
Use only outdoors or in a well-ventilated area
Contaminated work clothing should not be allowed out of the workplace
Wear protective gloves
Keep away from heat/sparks/open flames/hot surfaces. - No smoking
Ground/bond container and receiving equipment
Use explosion-proof electrical/ventilating/lighting/equipment

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN: Wash with plenty of soap and water
Take off contaminated clothing and wash before reuse
If skin irritation or rash occurs: Get medical advice/attention

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
Immediately call a POISON CENTER or doctor/physician

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell
Rinse mouth

Fire

In case of fire: Use CO₂, dry chemical, or foam for extinction

Storage

Store locked up
Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

None identified

3. Composition/Information on Ingredients

| Component | CAS-No | Weight % |
|------------------|------------|----------|
| Paraformaldehyde | 30525-89-4 | >90 |

4. First-aid measures

| | |
|--|---|
| General Advice | If symptoms persist, call a physician. |
| Eye Contact | Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention. |
| Skin Contact | Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists, call a physician. |
| Inhalation | Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if symptoms occur. |
| Ingestion | Clean mouth with water and drink afterwards plenty of water. Get medical attention if symptoms occur. |
| Most important symptoms and effects | None reasonably foreseeable. Causes severe eye damage. May cause allergic skin reaction. Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing |
| Notes to Physician | Treat symptomatically |

5. Fire-fighting measures

| | |
|---|---|
| Suitable Extinguishing Media | Water spray, carbon dioxide (CO ₂), dry chemical, alcohol-resistant foam. Water mist may be used to cool closed containers. |
| Unsuitable Extinguishing Media | No information available |
| Flash Point | 71 °C / 159.8 °F |
| Method - | No information available |
| Autoignition Temperature | 300 °C / 572 °F |
| Explosion Limits | |
| Upper | 73% |
| Lower | 7.0% |
| Sensitivity to Mechanical Impact | No information available |
| Sensitivity to Static Discharge | No information available |

Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Fine dust dispersed in air may ignite. Combustible material.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO₂).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

| | | | |
|---------------|---------------------|--------------------|-------------------------|
| Health | Flammability | Instability | Physical hazards |
| 3 | 2 | 1 | N/A |

6. Accidental release measures

| | |
|---|--|
| Personal Precautions | Use personal protective equipment as required. Ensure adequate ventilation. Avoid dust formation. Remove all sources of ignition. Take precautionary measures against static discharges. |
| Environmental Precautions | Should not be released into the environment. |
| Methods for Containment and Clean Up | Sweep up and shovel into suitable containers for disposal. Keep in suitable, closed containers for disposal. Remove all sources of ignition. |

7. Handling and storage

| | |
|-----------------|---|
| Handling | Wear personal protective equipment/face protection. Avoid dust formation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Ensure adequate ventilation. Keep away from open flames, hot surfaces and sources of ignition. |
| Storage | Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat, sparks and flame. |

8. Exposure controls / personal protection

| | |
|--------------------------------------|---|
| Exposure Guidelines | This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies. |
| Engineering Measures | Use only under a chemical fume hood. Ensure that eyewash stations and safety showers are close to the workstation location. Use explosion-proof electrical/ventilating/lighting/equipment. Ensure adequate ventilation, especially in confined areas. |
| Personal Protective Equipment | |
| Eye/face Protection | Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166. Tight sealing safety goggles. |
| Skin and body protection | Wear appropriate protective gloves and clothing to prevent skin exposure. |
| Respiratory Protection | Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced. |
| Hygiene Measures | Handle in accordance with good industrial hygiene and safety practice. |

9. Physical and chemical properties

| | |
|---|-----------------------------|
| Physical State | Solid |
| Appearance | White |
| Odor | pungent |
| Odor Threshold | No information available |
| pH | 3.5-5.0 10% susp |
| Melting Point/Range | 120 - 170 °C / 248 - 338 °F |
| Boiling Point/Range | No information available |
| Flash Point | 71 °C / 159.8 °F |
| Evaporation Rate | Not applicable |
| Flammability (solid,gas) | No information available |
| Flammability or explosive limits | |
| Upper | 73% |
| Lower | 7.0% |
| Vapor Pressure | 1.2 mmHg @ 25 °C |

| | |
|--|----------------------------------|
| Vapor Density | Not applicable |
| Specific Gravity | 1.46 |
| Solubility | slightly soluble |
| Partition coefficient; n-octanol/water | No data available |
| Autoignition Temperature | 300 °C / 572 °F |
| Decomposition Temperature | No information available |
| Viscosity | Not applicable |
| Molecular Formula | (CH ₂ O) _n |

10. Stability and reactivity

| | |
|---|--|
| Reactive Hazard | Yes |
| Stability | Stable under normal conditions. |
| Conditions to Avoid | Excess heat. Avoid dust formation. Keep away from open flames, hot surfaces and sources of ignition. |
| Incompatible Materials | Strong oxidizing agents |
| Hazardous Decomposition Products | Carbon monoxide (CO), Carbon dioxide (CO ₂) |
| Hazardous Polymerization | Hazardous polymerization does not occur. |
| Hazardous Reactions | None under normal processing. |

11. Toxicological information

Acute Toxicity

Product Information

Oral LD50

Category 4. ATE = 300 - 2000 mg/kg.

Dermal LD50

Based on ATE data, the classification criteria are not met. ATE > 2000 mg/kg.

Mist LC50

Category 4. ATE = 1 - 5 mg/l.

Component Information

| Component | LD50 Oral | LD50 Dermal | LC50 Inhalation |
|------------------|--------------------------|-------------|---|
| Paraformaldehyde | LD50 = 800 mg/kg (Rat) | Not listed | LC50 = 1070 mg/m ³ (Rat) 4 h |

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes, respiratory system and skin

Sensitization May cause sensitization by skin contact

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

| Component | CAS-No | IARC | NTP | ACGIH | OSHA | Mexico |
|------------------|------------|------------|------------|------------|------------|------------|
| Paraformaldehyde | 30525-89-4 | Not listed | Not listed | Not listed | Not listed | Not listed |

Mutagenic Effects Mutagenic effects have occurred in experimental animals.

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system

STOT - repeated exposure None known

| | |
|---|--|
| Aspiration hazard | No information available |
| Symptoms / effects, both acute and delayed | Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing |
| Endocrine Disruptor Information | No information available |
| Other Adverse Effects | The toxicological properties have not been fully investigated. |

12. Ecological information

Ecotoxicity

Do not empty into drains. .

| Component | Freshwater Algae | Freshwater Fish | Microtox | Water Flea |
|------------------|------------------|-----------------|------------|--------------------|
| Paraformaldehyde | Not listed | >10 mg/L 96h | Not listed | EC50 = 42 mg/L 24h |

Persistence and Degradability May persist based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN2213
 Proper Shipping Name PARAFORMALDEHYDE
 Hazard Class 4.1
 Packing Group III

TDG

UN-No UN2213
 Proper Shipping Name PARAFORMALDEHYDE
 Hazard Class 4.1
 Packing Group III

IATA

UN-No UN2213
 Proper Shipping Name PARAFORMALDEHYDE
 Hazard Class 4.1
 Packing Group III

IMDG/IMO

UN-No UN2213
 Proper Shipping Name PARAFORMALDEHYDE
 Hazard Class 4.1
 Packing Group III

15. Regulatory information

United States of America Inventory

| Component | CAS-No | TSCA | TSCA Inventory notification - Active/Inactive | TSCA - EPA Regulatory Flags |
|------------------|------------|------|---|-----------------------------|
| Paraformaldehyde | 30525-89-4 | X | ACTIVE | - |

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

| Component | CAS-No | DSL | NDSL | EINECS | PICCS | ENCS | AICS | IECSC | KECL |
|------------------|------------|-----|------|--------|-------|------|------|-------|----------|
| Paraformaldehyde | 30525-89-4 | X | - | - | X | X | X | X | KE-27818 |

U.S. Federal Regulations

SARA 313 Not applicable

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

| Component | CWA - Hazardous Substances | CWA - Reportable Quantities | CWA - Toxic Pollutants | CWA - Priority Pollutants |
|------------------|----------------------------|-----------------------------|------------------------|---------------------------|
| Paraformaldehyde | X | 1000 lb | - | - |

Clean Air Act Not applicable

OSHA - Occupational Safety and Health Administration Not applicable

CERCLA This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

| Component | Hazardous Substances RQs | CERCLA EHS RQs |
|------------------|--------------------------|----------------|
| Paraformaldehyde | 1000 lb | - |

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

| Component | Massachusetts | New Jersey | Pennsylvania | Illinois | Rhode Island |
|------------------|---------------|------------|--------------|----------|--------------|
| Paraformaldehyde | X | X | X | - | X |

U.S. Department of Transportation

Reportable Quantity (RQ): N
 DOT Marine Pollutant N
 DOT Severe Marine Pollutant N

U.S. Department of Homeland Security This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade Moderate risk, Grade 2

16. Other information

Prepared By Health, Safety and Environmental Department
 Email: tech@alfa.com
 www.alfa.com

Creation Date 11-Oct-2010
Revision Date 14-Feb-2020
Print Date 14-Feb-2020
Revision Summary SDS authoring systems update, replaces ChemGes SDS No. 30525-89-4/2.

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET

K00879007

Section 1. Identification

Product name : RUST TOUGH® Rust Preventive Enamel (Aerosol)
Dark Machinery Gray (ASA-49)

Product code : K00879007

Other means of identification : Not available.

Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : Krylon Products Group
101 Prospect Avenue NW
Cleveland, OH 44115

Emergency telephone number of the company : US/Canada: (800) 424-9300
Mexico: CHEMTREC Mexico 01-800-681-9531. Available 24 hours and 365 days per year

Product Information Telephone Number : US/Canada: (800) 247-3266
Mexico: Not Available

Regulatory Information Telephone Number : US/Canada: (216) 566-2902
Mexico: Not Available

Transportation Emergency Telephone Number : US/Canada: (800) 424-9300
Mexico: SETIQ 01-800-00-214-00 / (52) 55-5559-1588 24 hours / 365 days a year

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).


Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SKIN CORROSION/IRRITATION - Category 2
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
SKIN SENSITIZATION - Category 1
CARCINOGENICITY - Category 2
TOXIC TO REPRODUCTION (Unborn child) - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
ASPIRATION HAZARD - Category 1
Percentage of the mixture consisting of ingredient(s) of unknown acute oral toxicity: 30.4%
Percentage of the mixture consisting of ingredient(s) of unknown acute dermal toxicity: 34.4%
Percentage of the mixture consisting of ingredient(s) of unknown acute inhalation toxicity: 34.4%

GHS label elements

| | | | |
|--|--|-------------------------|------|
| Date of issue/Date of revision : 11/27/2019 | Date of previous issue : 11/5/2019 | Version : 17 | 1/20 |
| K00879007 | RUST TOUGH® Rust Preventive Enamel (Aerosol) Dark Machinery Gray (ASA-49) | SHW-85-NA-GHS-US | 2538 |

Section 2. Hazards identification

Hazard pictograms

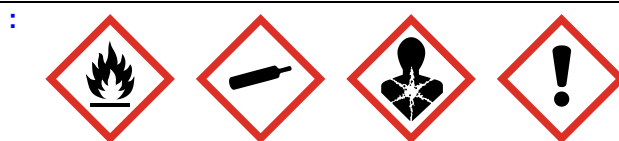

Signal word

: Danger

Hazard statements

: Extremely flammable aerosol.
Contains gas under pressure; may explode if heated.
Causes serious eye irritation.
Causes skin irritation.
May cause an allergic skin reaction.
Suspected of damaging the unborn child.
Suspected of causing cancer.
May be fatal if swallowed and enters airways.
May cause respiratory irritation.
May cause drowsiness or dizziness.
May cause damage to organs through prolonged or repeated exposure.

Precautionary statements

Prevention

: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Wash hands thoroughly after handling. Contaminated work clothing must not be allowed out of the workplace. Pressurized container: Do not pierce or burn, even after use.

Response

: Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting. IF ON SKIN: Wash with plenty of soap and water. Wash contaminated clothing before reuse. If skin irritation or rash occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage

: Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.

Disposal

: Dispose of contents and container in accordance with all local, regional, national and international regulations.

Supplemental label elements

DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. FOR INDUSTRIAL USE ONLY. Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.

Hazards not otherwise classified

: DANGER: Rags, steel wool, other waste soaked with this product, and sanding residue may spontaneously catch fire if improperly discarded. Immediately place rags, steel wool, other waste soaked with this product, and sanding residue in a sealed, water-filled, metal container. Dispose of in accordance with local fire regulations.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Other means of identification : Not available.

CAS number/other identifiers

| Ingredient name | % by weight | CAS number |
|--------------------------------------|-------------|------------|
| Propane | ≥10 - ≤25 | 74-98-6 |
| Acetone | ≥10 - ≤25 | 67-64-1 |
| n-Butyl Acetate | ≥10 - ≤25 | 123-86-4 |
| Lt. Aliphatic Hydrocarbon Solvent | ≥10 - ≤25 | 64742-89-8 |
| Butane | ≤10 | 106-97-8 |
| Titanium Dioxide | ≤10 | 13463-67-7 |
| Ethyl 3-Ethoxypropionate | ≤5 | 763-69-9 |
| Barium Sulfate | ≤3 | 7727-43-7 |
| Xylene, mixed isomers | ≤3 | 1330-20-7 |
| Ethylbenzene | <1 | 100-41-4 |
| Carbon Black | ≤0.3 | 1333-86-4 |
| Hydrotreated Heavy Petroleum Naphtha | ≤0.3 | 64742-48-9 |
| Unsaturated Fatty Acids | ≤0.3 | 85711-46-2 |
| Zirconium 2-Ethylhexanoate | ≤0.3 | 22464-99-9 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Wash with plenty of soap and water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. In the event of any complaints or symptoms, avoid further exposure. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Section 4. First aid measures

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : Causes skin irritation. May cause an allergic skin reaction.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
 - pain or irritation
 - watering
 - redness
- Inhalation** : Adverse symptoms may include the following:
 - respiratory tract irritation
 - coughing
 - nausea or vomiting
 - headache
 - drowsiness/fatigue
 - dizziness/vertigo
 - unconsciousness
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
 - irritation
 - redness
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
 - nausea or vomiting
 - reduced fetal weight
 - increase in fetal deaths
 - skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
sulfur oxides
phosphorus oxides
metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Section 6. Accidental release measures

Large spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Persons with a history of skin sensitization problems should not be employed in any process in which this product is used. Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|-----------------|---------|---|
| Propane | 74-98-6 | NIOSH REL (United States, 10/2016). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 3/2019). Oxygen Depletion [Asphyxiant]. Explosive potential. |
| Acetone | 67-64-1 | ACGIH TLV (United States, 3/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. NIOSH REL (United States, 10/2016). TWA: 250 ppm 10 hours. TWA: 590 mg/m ³ 10 hours. |

Section 8. Exposure controls/personal protection

| | | |
|---|--|--|
| Hydrotreated Heavy Petroleum Naphtha Unsaturated Fatty Acids Zirconium 2-Ethylhexanoate | 64742-48-9 85711-46-2 22464-99-9 | TWA: 0.1 mg of PAHs/cm ³ 10 hours. ACGIH TLV (United States, 3/2019). TWA: 3 mg/m ³ 8 hours. Form: Inhalable fraction OSHA PEL (United States, 5/2018). TWA: 3.5 mg/m ³ 8 hours. None. None. ACGIH TLV (United States, 3/2019). TWA: 5 mg/m ³ , (as Zr) 8 hours. STEL: 10 mg/m ³ , (as Zr) 15 minutes. NIOSH REL (United States, 10/2016). TWA: 5 mg/m ³ , (as Zr) 10 hours. STEL: 10 mg/m ³ , (as Zr) 15 minutes. OSHA PEL (United States, 5/2018). TWA: 5 mg/m ³ , (as Zr) 8 hours. |
|---|--|--|

Occupational exposure limits (Canada)

| Ingredient name | CAS # | Exposure limits |
|----------------------|----------|--|
| Normal propane | 74-98-6 | CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 1000 ppm 8 hours. TWAEV: 1800 mg/m ³ 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 1000 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 5/2019). Oxygen Depletion [Asphyxiant]. Explosive potential. |
| Acetone | 67-64-1 | CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1200 mg/m ³ 8 hours. 15 min OEL: 1800 mg/m ³ 15 minutes. 8 hrs OEL: 500 ppm 8 hours. 15 min OEL: 750 ppm 15 minutes. CA British Columbia Provincial (Canada, 5/2019). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. CA Ontario Provincial (Canada, 1/2018). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. CA Quebec Provincial (Canada, 1/2014). TWAEV: 500 ppm 8 hours. TWAEV: 1190 mg/m ³ 8 hours. STEV: 1000 ppm 15 minutes. STEV: 2380 mg/m ³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 750 ppm 15 minutes. TWA: 500 ppm 8 hours. |
| Normal butyl acetate | 123-86-4 | CA Alberta Provincial (Canada, 6/2018). 15 min OEL: 200 ppm 15 minutes. |

Section 8. Exposure controls/personal protection

| | | |
|------------------|------------|--|
| Butane | 106-97-8 | <p>15 min OEL: 950 mg/m³ 15 minutes. 8 hrs OEL: 150 ppm 8 hours. 8 hrs OEL: 713 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 5/2019). TWA: 20 ppm 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 150 ppm 8 hours. STEL: 200 ppm 15 minutes. CA Quebec Provincial (Canada, 1/2014). TWAEV: 150 ppm 8 hours. TWAEV: 713 mg/m³ 8 hours. STEV: 200 ppm 15 minutes. STEV: 950 mg/m³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 200 ppm 15 minutes. TWA: 150 ppm 8 hours.</p> <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 1000 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 800 ppm 8 hours. TWAEV: 1900 mg/m³ 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 800 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 1250 ppm 15 minutes. TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 5/2019). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |
| Titanium dioxide | 13463-67-7 | <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 3 mg/m³ 8 hours. Form: Respirable dust TWA: 10 mg/m³ 8 hours. Form: Total dust CA Quebec Provincial (Canada, 1/2014). TWAEV: 10 mg/m³ 8 hours. Form: Total dust. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 10 mg/m³ 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 10 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 20 mg/m³ 15 minutes. TWA: 10 mg/m³ 8 hours.</p> |
| Xylene | 1330-20-7 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 651 mg/m³ 15 minutes. 15 min OEL: 150 ppm 15 minutes. 8 hrs OEL: 434 mg/m³ 8 hours. CA British Columbia Provincial (Canada, 5/2019). TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes. CA Quebec Provincial (Canada, 1/2014).</p> |

Section 8. Exposure controls/personal protection

| | | |
|----------------------------|------------|---|
| Ethylbenzene | 100-41-4 | <p>TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 651 mg/m³ 15 minutes. CA Ontario Provincial (Canada, 1/2018). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 8 hrs OEL: 434 mg/m³ 8 hours. 15 min OEL: 543 mg/m³ 15 minutes. 15 min OEL: 125 ppm 15 minutes. CA British Columbia Provincial (Canada, 5/2019). TWA: 20 ppm 8 hours. CA Ontario Provincial (Canada, 1/2018). TWA: 20 ppm 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 125 ppm 15 minutes. STEV: 543 mg/m³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 125 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| Carbon black | 1333-86-4 | <p>CA British Columbia Provincial (Canada, 5/2019). TWA: 3 mg/m³ 8 hours. Form: Inhalable CA Ontario Provincial (Canada, 1/2018). TWA: 3 mg/m³ 8 hours. Form: Inhalable fraction. CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 3.5 mg/m³ 8 hours. CA Quebec Provincial (Canada, 1/2014). TWAEV: 3.5 mg/m³ 8 hours. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 7 mg/m³ 15 minutes. TWA: 3.5 mg/m³ 8 hours.</p> |
| Zirconium 2-Ethylhexanoate | 22464-99-9 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 5 mg/m³, (as Zr) 8 hours. 15 min OEL: 10 mg/m³, (as Zr) 15 minutes. CA British Columbia Provincial (Canada, 5/2019). TWA: 5 mg/m³, (as Zr) 8 hours. STEL: 10 mg/m³, (as Zr) 15 minutes. CA Quebec Provincial (Canada, 1/2014). TWAEV: 5 mg/m³, (as Zr) 8 hours. STEV: 10 mg/m³, (as Zr) 15 minutes. CA Ontario Provincial (Canada, 1/2018). STEL: 10 mg/m³, (as Zr) 15 minutes. TWA: 5 mg/m³, (as Zr) 8 hours.</p> |

Section 8. Exposure controls/personal protection

Occupational exposure limits (Mexico)

| | CAS # | Exposure limits |
|----------------------------|------------|---|
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Acetone | 67-64-1 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. |
| n-Butyl Acetate | 123-86-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 150 ppm 8 hours. STEL: 200 ppm 15 minutes. |
| Butane | 106-97-8 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Xylene, mixed isomers | 1330-20-7 | NOM-010-STPS-2014 (Mexico, 4/2016). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. |
| Ethylbenzene | 100-41-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |
| Zirconium 2-Ethylhexanoate | 22464-99-9 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 5 mg/m ³ , (as Zr) 8 hours. STEL: 10 mg/m ³ , (as Zr) 15 minutes. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Section 8. Exposure controls/personal protection

- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : 7
- Melting point/freezing point** : Not available.
- Boiling point/boiling range** : Not available.
- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 5.6 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 0.9%
Upper: 12.8%
- Vapor pressure** : 101.3 kPa (760 mm Hg) [at 20°C]
- Vapor density** : 1.55 [Air = 1]
- Relative density** : 0.77
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not available.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): <0.205 cm²/s (<20.5 cSt)
- Molecular weight** : Not applicable.
- Aerosol product**
- Type of aerosol** : Spray
- Heat of combustion** : 27.775 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : Avoid all possible sources of ignition (spark or flame).
- Incompatible materials** : No specific data.

Section 10. Stability and reactivity

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|--------------------------------------|-----------------------|---------|--------------------------|----------|
| Acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| n-Butyl Acetate | LD50 Dermal | Rabbit | >17600 mg/kg | - |
| | LD50 Oral | Rat | 10768 mg/kg | - |
| Butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| Ethyl 3-Ethoxypropionate | LD50 Oral | Rat | 3200 mg/kg | - |
| Xylene, mixed isomers | LC50 Inhalation Gas. | Rat | 5000 ppm | 4 hours |
| | LD50 Oral | Rat | 4300 mg/kg | - |
| Ethylbenzene | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |
| Carbon Black | LD50 Oral | Rat | >15400 mg/kg | - |
| Hydrotreated Heavy Petroleum Naphtha | LC50 Inhalation Vapor | Rat | 8500 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | >6 g/kg | - |
| Zirconium 2-Ethylhexanoate | LD50 Dermal | Rabbit | >5 g/kg | - |
| | LD50 Oral | Rat | >5 g/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|--------------------------|--------------------------|---------|-------|-------------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 ppm | - |
| | Eyes - Mild irritant | Rabbit | - | 10 UI | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 20 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| n-Butyl Acetate | Skin - Mild irritant | Rabbit | - | 395 mg | - |
| | Eyes - Moderate irritant | Rabbit | - | 100 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| Titanium Dioxide | Skin - Mild irritant | Human | - | 72 hours 300 ug l | - |
| Ethyl 3-Ethoxypropionate | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| Xylene, mixed isomers | Eyes - Mild irritant | Rabbit | - | 87 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 5 mg | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 UI | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| Ethylbenzene | Skin - Moderate irritant | Rabbit | - | 100 % | - |
| | Eyes - Severe irritant | Rabbit | - | 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 15 mg | - |

Sensitization

Not available.

Mutagenicity

Section 11. Toxicological information

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Titanium Dioxide | - | 2B | - |
| Xylene, mixed isomers | - | 3 | - |
| Ethylbenzene | - | 2B | - |
| Carbon Black | - | 2B | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|--|--|---|--|
| Propane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Acetone | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| n-Butyl Acetate Lt. Aliphatic Hydrocarbon Solvent | Category 3 Category 3 Category 3 | Not applicable. Not applicable. Not applicable. | Narcotic effects Narcotic effects Respiratory tract irritation |
| Butane | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Xylene, mixed isomers | Category 3 | Not applicable. | Respiratory tract irritation |
| Ethylbenzene | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |
| Hydrotreated Heavy Petroleum Naphtha | Category 3 Category 3 | Not applicable. Not applicable. | Narcotic effects Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|--------------------------------------|------------|-------------------|----------------|
| Propane | Category 2 | Not determined | Not determined |
| Acetone | Category 2 | Not determined | Not determined |
| Lt. Aliphatic Hydrocarbon Solvent | Category 2 | Not determined | Not determined |
| Butane | Category 2 | Not determined | Not determined |
| Xylene, mixed isomers | Category 2 | Not determined | Not determined |
| Ethylbenzene | Category 2 | Not determined | Not determined |
| Hydrotreated Heavy Petroleum Naphtha | Category 2 | Not determined | Not determined |

Aspiration hazard

Section 11. Toxicological information

| Name | Result |
|--------------------------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Lt. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Butane | ASPIRATION HAZARD - Category 1 |
| Xylene, mixed isomers | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |
| Hydrotreated Heavy Petroleum Naphtha | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : Causes skin irritation. May cause an allergic skin reaction.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
 pain or irritation
 watering
 redness
- Inhalation** : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
 irritation
 redness
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
 nausea or vomiting
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Long term exposure

Section 11. Toxicological information

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : May cause damage to organs through prolonged or repeated exposure. Once sensitized, a severe allergic reaction may occur when subsequently exposed to very low levels.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : Suspected of damaging the unborn child.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|--------------------|----------------|
| Oral | 44009.22 mg/kg |
| Dermal | 50641.61 mg/kg |
| Inhalation (gases) | 230189.12 ppm |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|-----------------------------------|---------------------------------------|---|----------|
| Acetone | Acute EC50 7200000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 6000000 µg/l Fresh water | Crustaceans - Gammarus pulex | 48 hours |
| | Acute LC50 6900 mg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| n-Butyl Acetate | Chronic NOEC 0.1 mg/l Fresh water | Fish - Fundulus heteroclitus | 4 weeks |
| | Acute LC50 32 mg/l Marine water | Crustaceans - Artemia salina | 48 hours |
| | Acute LC50 18000 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| Lt. Aliphatic Hydrocarbon Solvent | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| | Acute LC50 >1000000 µg/l Marine water | Fish - Fundulus heteroclitus | 96 hours |
| Titanium Dioxide | Acute EC50 634 mg/l Fresh water | Crustaceans - Cypris subglobosa | 48 hours |
| | Acute EC50 32 mg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| Barium Sulfate | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| Xylene, mixed isomers | Acute EC50 4600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 72 hours |
| | Acute EC50 3600 µg/l Fresh water | Algae - Pseudokirchneriella subcapitata | 96 hours |
| | Acute EC50 6.53 mg/l Marine water | Crustaceans - Artemia sp. - | 48 hours |

Section 12. Ecological information

| | | | |
|--|----------------------------------|---|----------|
| | Acute EC50 2.93 mg/l Fresh water | Nauplii Daphnia - Daphnia magna - Neonate | 48 hours |
| | Acute LC50 4200 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| n-Butyl Acetate | - | - | Readily |
| Xylene, mixed isomers | - | - | Readily |
| Ethylbenzene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|--------------------------------------|--------------------|-------------|-----------|
| Lt. Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Xylene, mixed isomers | - | 8.1 to 25.9 | low |
| Hydrotreated Heavy Petroleum Naphtha | - | 10 to 2500 | high |
| Zirconium 2-Ethylhexanoate | - | 2.96 | low |

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.






Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|--------------------------------|-----------------------|-----------------------|--------------------------|------------------------|----------|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS, flammable | AEROSOLS |
| | | | | | |

Section 14. Transport information

| | | | | | |
|-----------------------------------|--|--|--|--|--|
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - ERG No. 126 | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). ERG No. 126 | - ERG No. 126 | - | Emergency schedules F-D, S-U |

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

- Proper shipping name :** Not available.
- Ship type :** Not available.
- Pollution category :** Not available.

Section 15. Regulatory information

SARA 313

SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations

- International lists :**
- Australia inventory (AICS):** Not determined.
 - China inventory (IECSC):** Not determined.
 - Japan inventory (ENCS):** Not determined.
 - Japan inventory (ISHL):** Not determined.
 - Korea inventory (KECI):** Not determined.
 - New Zealand Inventory of Chemicals (NZIoC):** Not determined.
 - Philippines inventory (PICCS):** Not determined.
 - Taiwan Chemical Substances Inventory (TCSI):** Not determined.
 - Thailand inventory:** Not determined.
 - Turkey inventory:** Not determined.

Section 15. Regulatory information

Vietnam inventory: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | |
|---|---|
| Health * | 3 |
| Flammability | 4 |
| Physical hazards | 3 |
| | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| Classification | Justification |
|---|---|
| FLAMMABLE AEROSOLS - Category 1 GASES UNDER PRESSURE - Compressed gas SKIN CORROSION/IRRITATION - Category 2 SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A SKIN SENSITIZATION - Category 1 CARCINOGENICITY - Category 2 TOXIC TO REPRODUCTION (Unborn child) - Category 2 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 ASPIRATION HAZARD - Category 1 | On basis of test data Calculation method Calculation method Calculation method Calculation method Calculation method Calculation method Calculation method Calculation method Calculation method |

History

- Date of printing** : 11/27/2019
- Date of issue/Date of revision** : 11/27/2019
- Date of previous issue** : 11/5/2019
- Version** : 17
- Key to abbreviations** :
 - ATE = Acute Toxicity Estimate
 - BCF = Bioconcentration Factor
 - GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 - IATA = International Air Transport Association
 - IBC = Intermediate Bulk Container
 - IMDG = International Maritime Dangerous Goods
 - LogPow = logarithm of the octanol/water partition coefficient
 - MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 - N/A = Not available
 - SGG = Segregation Group
 - UN = United Nations

▀ Indicates information that has changed from previously issued version.

Notice to reader

| | | | |
|--|--|--|-------|
| <b style="color: blue;">Date of issue/Date of revision : 11/27/2019 | <b style="color: blue;">Date of previous issue : 11/5/2019 | <b style="color: blue;">Version : 17 | 19/20 |
| K00879007 RUST TOUGH® Rust Preventive Enamel (Aerosol) Dark Machinery Gray (ASA-49) | | <b style="color: blue;">SHW-85-NA-GHS-US | |

Section 16. Other information

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

MATERIAL SAFETY DATA SHEET

SPOTCHECK® PENETRANT SKL-SP1

1. **Company:** MAGNAFLUX
Address: 3624 West Lake Avenue, Glenview, Illinois 60026
Telephone No.: 847-657-5300 (Off-Hour Emergency Number - CHEMTREC - 1-800-424-9300).
Product Use: Visible inspection penetrant.
Packages: 1 gallon and 5 gallon pails, 20 gallon drums, 55 gallon drums, Totes, aerosols, pens
NFPA Rating: Health 1, Flammability 1, (Aerosol Flammability 4), Reactivity 0
PIN (Canada): None
Revision date: May 1st, 2012

2. HAZARDOUS INGREDIENTS

| <u>Ingredient</u> | <u>Wt./Wt.%</u> | <u>CAS #</u> | <u>TLV</u> | <u>PEL</u> | <u>LD₅₀</u> | <u>LC₅₀</u> |
|---|-----------------|----------------------------|---------------------|---------------------|------------------------|------------------------|
| White mineral oil (petroleum) | 60-80 | 8042-47-5 or 64742-47-8 | 5 mg/m ³ | 5 mg/m ³ | not avail. | not avail. |
| Phthalic Esters | 5-25 | 71888-89-5 | 5mg/m ³ | not avail. | not avail. | not avail. |
| Liquefied petroleum gasses (propellant, aerosol only)* | 30 | 68476-86-8 | not avail. | 1000 ppm | not avail. | not avail. |

*Aerosol Package Only

3. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW
Bland, oily liquid which may irritate the skin and eyes. Bulk material is difficult to ignite, but will burn vigorously if engulfed in fire. Aerosol is extremely flammable.

POTENTIAL HEALTH EFFECTS, AND SIGNS AND SYMPTOMS OF EXPOSURE:

- Skin contact:** Can irritate by removing natural skin oils on long or repeated exposures.
Eyes: May irritate.
Inhalation: Not significant at room temperatures. When heated or sprayed, vapors may cause dizziness and nausea.
Ingestion: Not significant in small (mouthful) amounts.
Medical conditions known to be aggravated by exposure to product: None

4. FIRST AID

- Skin Contact:** Wash off with soap and water. Use soothing lotion.
Eyes: Rinse carefully under upper and lower eyelids using plenty of water.
Inhalation: Remove to fresh air if dizzy or nauseated.
Ingestion: Do not induce vomiting. Accidental ingestion of a small mouthful is not expected to cause significant harm.
NOTE: In all severe cases, contact physician immediately. Local telephone operators can furnish number of regional poison control center.

5. FIRE HAZARD

- Conditions of flammability:** Aerosol: Spraying near an ignition source will ignite spray mist.
 Bulk: None unless heated over 200°F (93°C) near ignition source.
Flash point (Bulk): Min. 200°F (93°C) (Pensky-Martens closed cup)
Flammable limits in air: 1% to 6%
Extinguishing media: Carbon dioxide, foam
Special fire fighting procedures: Keep containers cool with water spray. Do not spray water directly on burning SKL-SP1. It may float and spread the fire.
Hazardous combustion products: Smoke, soot, oxides of carbon and nitrogen.
Unusual fire hazards: Aerosol cans may burst at temperatures over 130°F (54°C) and spray contents into a fire.

6. ACCIDENTAL RELEASE MEASURES

Mop up or sweep up with absorbent. (For disposal, see Section 13.)

7. HANDLING AND STORAGE

Store away from heat source. Avoid eye contact. Avoid repeated or prolonged skin contact. Avoid breathing spray mist. Do not spray around arcs or flames.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

- Controls:** None, unless sprayed. Use where ventilation will carry spray mist away from occupied areas.
Personal protection: Wear safety glasses to protect eyes. Wear nitrile rubber gloves if hand exposure is unavoidable. Respirator with filter if sprayed in enclosed unventilated space.

MAGNAFLUX

A Division of Illinois Tool Works Inc.
 3624 WEST LAKE AVENUE ■ GLENVIEW, ILLINOIS 60026
 TEL 847.657.5300 ■ FAX 847.657.5388
 www.magnaflux.com

9. **PHYSICAL PROPERTIES**

Initial boiling point (bulk) Min. 455°F (230°C) (ASTM D-86)
Vapor pressure: Aerosol: 60 psi @ 75°F (24°C) Bulk: <0.10 mm @ 70°F (21°C)
Percent volatile: None (30% in aerosol) *Vapor density:* Heavier than air
Density/sp. gravity: 0.89 *Evaporation rate:* Negligible
Water solubility: 0 *Appearance:* Dark red oily liquid
pH: Neutral *Odor:* Mild oily odor

10. **STABILITY AND REACTIVITY**

Stability: Stable
Incompatibility: None
Hazardous decomposition products: Soot, oxides of carbon and nitrogen when burning
Reactivity: None

11. **TOXICOLOGICAL INFORMATION**

Carcinogenicity: Contains no known or suspected carcinogens listed with OSHA, IARC, NTP, or ACGIH.
Threshold limited value: 5 mg/m³ for oily mist.
WHMIS information (Canada): No human information is available for teratogenicity, reproductive toxicity, and mutagenicity. No reports of toxicological synerism were located. The ingredients have not been found to show skin sensitization.

12. **ECOLOGICAL INFORMATION**

No data is available on SKL-SP1. It floats on water and can be skimmed off. Its low vapor pressure may exempt it from VOC restrictions. The hydrocarbon propellant is not an ozone depleter.

13. **DISPOSAL**

As a non-hazardous oil waste, incinerate or send to waste handler who can blend it into secondary fuels. Empty aerosol cans before disposal.

14. **TRANSPORTATION**

U.S. DOT: 49 CFR 172.101 Hazardous Materials Table

| | <u>1 gal, 5 gal</u> | <u>20 gal, 55 gal. & Totes</u> |
|----------------------------------|----------------------|------------------------------------|
| <u>Aerosol</u> | | |
| <i>Proper shipping name:</i> | None, not restricted | None, not restricted |
| Consumer commodity | | |
| <i>Hazard class or division:</i> | None | None |
| ORM-D | | |
| <i>Identification No.:</i> | None | None |
| None | | |
| <i>Packing Group:</i> | None | None |
| None | | |

IATA: List of Dangerous Goods

| | <u>1 gal, 5 gal</u> | <u>Bulk</u> |
|----------------------------------|----------------------|----------------------|
| <u>Aerosol</u> | | |
| <i>Proper shipping name:</i> | None, not restricted | None, not restricted |
| Aerosols, flammable | | |
| <i>Hazard class or division:</i> | None | None |
| 2.1 | | |
| <i>Identification No.:</i> | None | None |
| UN1950 | | |
| <i>Packing Group:</i> | None | None |
| - | | |

IMDG: General Index

| | <u>1 gal, 5 gal</u> | <u>Bulk</u> |
|----------------------------------|----------------------|----------------------|
| <u>Aerosol</u> | | |
| <i>Proper shipping name:</i> | None, not restricted | None, not restricted |
| AEROSOLS | | |
| <i>Hazard class or division:</i> | None | None |
| 2.1 | | |
| <i>Identification No.:</i> | None | None |
| UN1950 | | |
| <i>Packing Group:</i> | None | None |
| - | | |

15. **REGULATORY INFORMATION**

TSCA: All ingredients are listed in TSCA inventory

CERCLA: Not reportable.

SARA TITLE III, Section 313: No reportable ingredients.

WHMIS Class (Canada): Bulk: D-2A Aerosol: A, B-5, D-2A

Note: This MSDS has been prepared to meet WHMIS (Canada) requirements with the exception of using 16 headings.

16. **OTHER INFORMATION**

Revision Statement: Sections: 1, 2

Supersedes: 8/15/03

Prepared by: Shawn Kilty, Research Chemist



SAFETY DATA SHEET

Issuing Date 13-Sept-2013

Revision Date 22-Oct-2014

Revision Number 1

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND THE COMPANY/UNDERTAKING

GHS product identifier

Product Name SCRUBS® In-A-Bucket

Other means of identification

Product Code(s) 42201, 42210, 42225, 42230, 42256, 42272

Synonyms None

Recommended use of the chemical and restrictions on use

Recommended Use Heavy Duty Hand Cleaner

Uses advised against None reasonably foreseeable

Supplier's details

Supplier Address

ITW Pro Brands
805 E. Old 56 Highway
Olathe, KS 66061
TEL: 1-800-443-9536

Emergency telephone number

Emergency Telephone Number 800-535-5053 Infotrac

2. HAZARDS IDENTIFICATION

Classification

This chemical is not considered hazardous according to the OSHA Hazard Communication Standard 2012 (29 CFR 1910.1200).

GHS Label elements, including precautionary statements

Emergency Overview

Signal Word None

The product contains no substances which at their given concentration are considered to be hazardous to health

Appearance Colorless-blue/white

Physical State Liquid.

Odor Citrus

Precautionary Statements

Prevention

- None

General Advice

- None

Storage

- None

Disposal

- None

Hazard Not Otherwise Classified (HNOC)

Not applicable

Other information

Toxic to aquatic life. Harmful to aquatic life with long lasting effects

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS-No | Weight % | Trade secret |
|------------------------------------|------------|----------|--------------|
| Alcohols, C12-15, ethoxylated | 68131-39-5 | 1-5 | * |
| Isoparaffinic Hydrocarbon | 64742-47-8 | 1-5 | * |
| Dimethyl adipate | 627-93-0 | 1-5 | * |
| Diethylhexyl sodium sulfosuccinate | 577-11-7 | 1-5 | * |
| D-Limonene | 5989-27-5 | 1-5 | * |

**The exact percentage (concentration) of composition has been withheld as a trade secret.*

4. FIRST AID MEASURES

Description of necessary first-aid measures

| | |
|---------------------|--|
| Eye Contact | Rinse thoroughly with plenty of water, also under the eyelids. If symptoms persist, call a physician. |
| Skin Contact | None normally required. Material is designed for skin cleansing. Get medical attention if irritation develops and/or persists. |
| Inhalation | Move to fresh air. If symptoms persist, call a physician. |
| Ingestion | Not an expected route of exposure. If large quantities of this material are swallowed, call a physician immediately. |

Most important symptoms/effects, acute and delayed

Most Important Symptoms/Effects Not expected to give rise to an acute hazard under normal condition of use.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to Physician Treat symptomatically.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Dry chemical. Carbon dioxide (CO₂). Foam. Water spray or fog.

Unsuitable Extinguishing Media None

Specific Hazards Arising from the Chemical

None in particular

Hazardous Combustion Products Carbon dioxide (CO₂). Carbon monoxide. Hydrocarbons. Hydrogen sulfide. Sulfur dioxide. Soot.

Explosion Data

Sensitivity to Mechanical Impact None.

Sensitivity to Static Discharge None.

Protective Equipment and Precautions for Firefighters

Use water spray to cool surrounding containers.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal Precautions Use personal protective equipment.

Environmental Precautions

Environmental Precautions Prevent entry into waterways, sewers, basements or confined areas. Avoid release to the environment. See Section 12 for additional Ecological Information. Dispose of contents/container to an approved waste disposal plant.

Methods and materials for containment and cleaning up

Methods for Containment Prevent further leakage or spillage if safe to do so.

Methods for Cleaning Up Small spillage: Wipe up with absorbent material (e.g. cloth, fleece). Large spillage: Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Handling Avoid contact with eyes. Do not smoke. Handle in accordance with good industrial hygiene and safety practice.

Conditions for safe storage, including any incompatibilities

Storage Keep container closed when not in use. Keep container tightly closed in a dry and well-ventilated place. Keep away from heat and sources of ignition. Do not contaminate food or feed stuffs. Keep out of the reach of children.

Incompatible Products Strong oxidizing agents. Strong acids.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Control parameters

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.

Appropriate engineering controls

Engineering Measures Eyewash stations.

Individual protection measures, such as personal protective equipment

| | |
|---------------------------------|--|
| Eye/Face Protection | No special protective equipment required. |
| Skin and Body Protection | No special protective equipment required. |
| Respiratory Protection | None required under normal usage. If exposure limits are exceeded or irritation is experienced, NIOSH/MSHA approved respiratory protection should be worn. |
| Hygiene Measures | Handle in accordance with good industrial hygiene and safety practice. |

9. PHYSICAL AND CHEMICAL PROPERTIES**Information on basic physical and chemical properties**

| | | | |
|-----------------------|--------|-----------------------|--------------------------|
| Physical State | Liquid | Appearance | Colorless-blue/white |
| Odor | Citrus | Odor Threshold | No information available |

| <u>Property</u> | <u>Values</u> | <u>Remarks/ - Method</u> |
|---|---------------------|--------------------------|
| pH | 6 | None known |
| Melting Point/Range | No data available | None known |
| Boiling Point/Boiling Range | 212 °F | None known |
| Flash Point | No data available | None known |
| Evaporation rate | No data available | None known |
| Flammability (solid, gas) | No data available | None known |
| Flammability Limits in Air | | |
| upper flammability limit | No data available | |
| lower flammability limit | No data available | |
| Vapor Pressure | No data available | None known |
| Vapor Density | >1 | None known |
| Relative Density | No data available | None known |
| Specific Gravity | 0.995 | None known |
| Water Solubility | Miscible with water | None known |
| Solubility in other solvents | No data available | None known |
| Partition coefficient: n-octanol/water | No data available | None known |
| Autoignition Temperature | No data available | None known |
| Decomposition Temperature | No data available | None known |
| Viscosity | No data available | None known |

| | |
|-----------------------------|-------------------|
| Flammable Properties | Not flammable |
| Explosive Properties | No data available |
| Oxidizing Properties | No data available |

Other information

| | |
|------------------------|----|
| VOC Content (%) | 0% |
|------------------------|----|

10. STABILITY AND REACTIVITY**Reactivity**

Not reactive under normal conditions.

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

None under normal processing.

Conditions to avoid

Incompatible products.

Incompatible materials

Strong oxidizing agents. Strong acids.

Hazardous decomposition products

Carbon dioxide (CO₂). Carbon monoxide (CO). Hydrocarbons. Hydrogen sulfide. Sulfur dioxide. Soot.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure**Product Information**

| | |
|---------------------|---|
| Inhalation | Not an expected route of exposure |
| Eye Contact | Contact with eyes may cause irritation. |
| Skin Contact | May cause mild skin irritation. |
| Ingestion | Not an expected route of exposure. |

Symptoms related to the physical, chemical and toxicological characteristics

Symptoms No information available.

Delayed and immediate effects and also chronic effects from short and long term exposure

Sensitization No information available.
Mutagenic Effects No information available.
Carcinogenicity Contains no ingredients above reportable quantities listed as a carcinogen.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|---------------|-------|---------|-----|------|
| D-Limonene | | Group 3 | - | - |

IARC: (International Agency for Research on Cancer)

Group 3: Not Classifiable as to its Carcinogenicity to Humans

Reproductive Toxicity This product does not contain any known or suspected reproductive hazards.
STOT - single exposure None of the ingredients are known to cause specific target organ effects from a single exposure.
STOT - repeated exposure None of the ingredients are known to cause specific target organ effects through prolonged or repeated exposure.
Aspiration Hazard None of the ingredients are known to be an aspiration hazard.

Numerical measures of toxicity - Product

The following values are calculated based on chapter 3.1 of the GHS document:

LD50 Oral 42888 mg/kg; Acute toxicity estimate
LD50 Dermal 329859 mg/kg; Acute toxicity estimate

12. ECOLOGICAL INFORMATION

Ecotoxicity

Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

| Chemical Name | Toxicity to Algae | Toxicity to Fish | Toxicity to Microorganisms | Daphnia Magna (Water Flea) |
|---------------|-------------------|------------------|----------------------------|----------------------------|
| | | | | |

| | | | | |
|--|---|--|--|---|
| Isoparaffinic Hydrocarbon 64742-47-8 | | LC50 96 h: = 45 mg/L flow-through (Pimephales promelas) LC50 96 h: = 2.2 mg/L static (Lepomis macrochirus) LC50 96 h: = 2.4 mg/L static (Oncorhynchus mykiss) | | LC50 96 h: = 4720 mg/L (Den-dronereides heteropoda) |
| Diethylhexyl sodium sulfosuccinate 577-11-7 | | LC50 96 h: 20 - 40 mg/L semi-static (Oncorhynchus mykiss) LC50 96 h: < 24 mg/L static (Oncorhynchus mykiss) LC50 96 h: = 37 mg/L static (Lepomis macrochirus) | | EC50 48 h: = 36 mg/L (Daphnia magna) |
| D-Limonene 5989-27-5 | | LC50 96 h: 0.619 - 0.796 mg/L flow-through (Pimephales promelas) LC50 96 h: = 35 mg/L (Oncorhynchus mykiss) | | |
| Dimethyl glutarate 1119-40-0 | | LC50 96 h: 19.6-26.2 mg/L static (Pimephales promelas) | | EC50 48 h: 122.1 - 163.5 mg/L (Daphnia magna) |
| 1,3-Propanediol, 2,2-dimethyl- 126-30-7 | EC50 72 h: > 1000 mg/L (Pseudokirchneriella subcapitata) EC50 72 h: > 500 mg/L (Desmodesmus subspicatus) | LC50 96 h: > 1000 mg/L semi-static (Oryzias latipes) | | EC50 24 h: > 1000 mg/L (Daphnia magna) |
| Isopropyl myristate 110-27-0 | EC50 72 h: > 100 mg/L (Desmodesmus subspicatus) | LC50 96 h: = 8400 mg/L (Brachydanio rerio) LC50 96 h: = 8400 mg/L semi-static (Brachydanio rerio) | - | EC50 48 h: = 100 mg/L (Daphnia magna) |
| 2-Phenoxyethanol 122-99-6 | EC50 72 h: > 500 mg/L (Desmodesmus subspicatus) | LC50 96 h: 337 - 352 mg/L flow-through (Pimephales promelas) LC50 96 h: = 366 mg/L static (Pimephales promelas) LC50 96 h: 220 - 460 mg/L static (Leuciscus idus) | EC50 = 32.4 mg/L 5 min EC50 = 880 mg/L 17 h | EC50 48 h: > 500 mg/L (Daphnia magna) |
| Propylene glycol 57-55-6 | EC50 96 h: = 19000 mg/L (Pseudokirchneriella subcapitata) | LC50 96 h: = 51600 mg/L static (Oncorhynchus mykiss) LC50 96 h: 41 - 47 mL/L static (Oncorhynchus mykiss) LC50 96 h: = 51400 mg/L static (Pimephales promelas) LC50 96 h: = 710 mg/L (Pimephales promelas) | EC50 = 710 mg/L 30 min | EC50 24 h: > 10000 mg/L (Daphnia magna) EC50 48 h: > 1000 mg/L Static (Daphnia magna) |
| Glycerin 56-81-5 | - | LC50 96 h: 51 - 57 mL/L static (Oncorhynchus mykiss) | - | EC50 24 h: > 500 mg/L (Daphnia magna) |
| Iodopropynyl butylcarbamate 55406-53-6 | | LC50 96 h: 0.049-0.079 mg/L flow-through (Oncorhynchus mykiss) LC50 96 h: 0.05-0.089 mg/L (Oncorhynchus mykiss) LC50 96 h: 0.14-0.32 mg/L flow-through (Lepomis macrochirus) LC50 96 h: 0.18-0.23 mg/L flow-through (Pimephales promelas) | | |

Persistence and Degradability No information available.

Bioaccumulation No information available.

Other Adverse Effects
No information available.

13. DISPOSAL CONSIDERATIONS

Waste Disposal Methods This material, as supplied, is not a hazardous waste according to Federal regulations (40 CFR 261). This material could become a hazardous waste if it is mixed with or otherwise comes in contact with a hazardous waste, if chemical additions are made to this material, or if the material is processed or otherwise altered. Consult 40 CFR 261 to determine whether the altered material is a hazardous waste. Consult the appropriate state, regional, or local regulations for additional requirements.

Contaminated Packaging Do not re-use empty containers.

This product contains one or more substances that are listed with the State of California as a hazardous waste.

| Chemical Name | California Hazardous Waste |
|---------------|----------------------------|
| D-Limonene | Toxic |

14. TRANSPORT INFORMATION

DOT Not regulated

15. REGULATORY INFORMATION

International Inventories

Legend

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory. All components of this product are either listed or are exempt on the TSCA inventory.

DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

U.S. Federal Regulations

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

SARA 311/312 Hazard Categories

| | |
|--|----|
| Acute Health Hazard | No |
| Chronic Health Hazard | No |
| Fire Hazard | No |
| Sudden Release of Pressure Hazard | No |
| Reactive Hazard | No |

Clean Water Act

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42).

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level pertaining to releases of this material.

U.S. State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

This product does not contain any substances regulated by state right-to-know regulations.

U.S. EPA Label Information

EPA Pesticide Registration Number Not applicable

| 16. OTHER INFORMATION | | | | | | |
|-----------------------|---------------|---|--------------|---|-------------------|--|
| <u>NFPA</u> | Health Hazard | 1 | Flammability | 0 | Instability 0 | Physical and Chemical Hazards - Personal Protection X |
| <u>HMIS</u> | Health Hazard | 1 | Flammability | 0 | Physical Hazard 0 | |

**Indicates a chronic health hazard.*

Prepared By Product Stewardship
 23 British American Blvd.
 Latham, NY 12110
 1-800-572-6501

Issuing Date 13-Sep-2013
 Revision Date 13-Sep-2013
 Revision Note Initial Release.

General Disclaimer

The information provided on this SDS is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of Safety Data Sheet

Section 1: IDENTIFICATION**1.1 PRODUCT IDENTIFIER**

Product Name: SKD-S2 Aerosol
Product Code: Not available.

1.2 RECOMMENDED USE OF CHEMICAL AND RESTRICTIONS ON USE

Use: Non-Destructive Testing.

1.3 DETAILS OF THE SUPPLIER OF THE SAFETY DATA SHEET

Name/Address: Magnaflux
155 Harlem Avenue,
Glenview, Illinois
60025


Telephone Number: 847-657-5300

1.4 EMERGENCY TELEPHONE NUMBER

Emergency Telephone Number: CHEMTREC 800-424-9300
Date of Preparation: November 25, 2013 **Version #:** 1.1

Section 2: HAZARD(S) IDENTIFICATION**2.1 CLASSIFICATION OF THE CHEMICAL ACCORDING TO OSHA HAZCOM 2012****Hazard class**

Flammable Aerosol 1
Gases Under Pressure - Compressed Gas
Eye irritation 2A
Specific target organ toxicity - Single exposure 3
Specific target organ toxicity - Repeated exposure 1

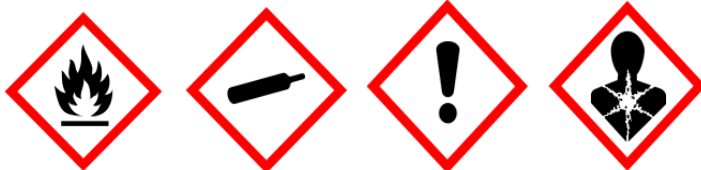2.2 LABEL ELEMENTS ACCORDING TO OSHA HAZCOM 2012**Hazard Pictogram:**

Signal Word: Danger

Hazard Statement: Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes serious eye irritation. May cause drowsiness or dizziness. Causes damage to lungs through prolonged or repeated exposure.

Prevention: Keep away from heat/sparks/open flames/hot surfaces. -No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Wash

Response: hands thoroughly after handling. Wear eye protection/face protection. Use only outdoors or in a well-ventilated area. Do not breathe dust/fume/gas/mist/vapors/spray. Do not eat, drink or smoke when using this product.
If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell.

Storage: Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Store locked up.

Disposal: Dispose of contents and container in accordance with all local, regional, national and international regulations.


2.3 ADDITIONAL INFORMATION

Hazards not otherwise classified: Not applicable.

2 % of the mixture consists of ingredient(s) of unknown acute toxicity.

This product is a hazardous chemical as defined by NOM-018-STPS-2000.

Mexico Classification:



Blue = Health Red = Flammability Yellow = Reactivity White = Special

Hazard Rating: 0 = minimal, 1 = slight, 2 = moderate, 3 = severe, 4 = extreme

WHMIS Classification(s):

- Class A - Compressed Gas
- Class B5 - Flammable Aerosol
- Class D2A - Chronic Toxic Effects
- Class D2B - Eye Irritant

WHMIS Hazard Symbols:



WHMIS Signal Word:

DANGER

Section 3: COMPOSITION/INFORMATION ON INGREDIENTS

3.1 MIXTURES

| Ingredient | UN # | H / F / R / * | CAS No | Wt. % |
|--|----------------|----------------|------------|---------|
| Isopropanol | UN1219 | 1/3/0 | 67-63-0 | 30 - 49 |
| Petroleum gases, liquefied, sweetened | UN1075 | Not available. | 68476-86-8 | 15 - 40 |
| Acetone | UN1090 | 1/3/0 | 67-64-1 | 10 - 30 |
| Ceramic materials and wares, chemicals | Not available. | Not available. | 66402-68-4 | 3 - 7 |
| Talc | Not available. | Not available. | 14807-96-6 | 1 - 5 |
| Silica, crystalline, quartz | Not available. | Not available. | 14808-60-7 | < 0.1 |

The exact percentage (concentration) of composition has been withheld as a trade secret in accordance with paragraph (i) of §1910.1200.

* Per NOM-018-STPS-2000

Section 4: FIRST- AID MEASURES

4.1 DESCRIPTION OF THE FIRST AID MEASURE

- Eye:** In case of contact, immediately flush eyes with plenty of water for at least 15 minutes, including under lids. If easy to do, remove contact lenses, if worn. Get medical attention immediately.
- Skin:** In case of contact, immediately flush skin with plenty of water. Call a physician if irritation develops and persists.
- Inhalation:** If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Get medical advice/attention if you feel unwell.
- Ingestion:** If swallowed, do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get immediate medical advice/attention.

4.2 MOST IMPORTANT SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED

- Eye:** Causes serious eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva.
- Skin:** May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.
- Inhalation:** May cause respiratory tract irritation. May cause drowsiness or dizziness.
- Ingestion:** May be harmful if swallowed. May cause stomach distress, nausea or vomiting.

4.3 INDICATION OF ANY IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENTS NEEDED

- Note to Physicians:** Symptoms may not appear immediately.
- Specific Treatments:** In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

Section 5: FIRE-FIGHTING MEASURES

5.1 FLAMMABILITY

Flammability: Flammable by WHMIS/OSHA/NOM-018-STPS-2000 criteria.

5.2 EXTINGUISHING MEDIA

Suitable Extinguishing Media: Water, foam, carbon dioxide.

Unsuitable Extinguishing Media: Not available.

5.3 SPECIAL HAZARDS ARISING FROM THE CHEMICAL

Products of Combustion: May include, and are not limited to: oxides of carbon.

Explosion Data:

Sensitivity to Mechanical Impact: Not available.

Sensitivity to Static Discharge: Not available.

5.4 SPECIAL PROTECTIVE EQUIPMENT AND PRECAUTIONS FOR FIRE FIGHTERS

Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Section 6: ACCIDENTAL RELEASE MEASURES

6.1 PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Eliminate sources of ignition.

6.2 METHODS AND MATERIALS FOR CONTAINMENT AND CLEANING - UP

Methods for Containment: Contain and/or absorb spill with inert material (e.g. sand, vermiculite), then place in a suitable container. Do not flush to sewer or allow to enter waterways. Use appropriate Personal Protective Equipment (PPE).

Methods for Cleaning-Up: Scoop up material and place in a disposal container. Provide ventilation.

Section 7: HANDLING AND STORAGE

7.1 PRECAUTIONS FOR SAFE HANDLING

Handling: Keep away from sources of ignition. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Container may explode if heated. Avoid contact with skin and eyes. Do not breathe dust/fume/gas/mist/vapors/spray. Do not swallow. Use only outdoors or in a well-ventilated area. When using do not eat, drink or smoke. Use non-sparking tools. (See section 8)

General Hygiene Advice: Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2 CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES

Storage: Keep out of the reach of children. Store locked up. Protect from sunlight. Do not store at temperatures above 50 °C / 122 °F. Store in a well-ventilated place. (See section 10)

Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 CONTROL PARAMETERS

Exposure Guidelines

| Occupational Exposure Limits | | |
|--|--|----------------------------|
| Ingredient | OSHA-PEL | ACGIH-TLV |
| Isopropanol | 400 ppm | 200 ppm |
| Petroleum gases, liquefied, sweetened | 1000 ppm | 1000 ppm |
| Acetone | 1000 ppm TWA; 2400 mg/m ³ TWA | 500 ppm |
| Ceramic materials and wares, chemicals | 5 mg/m ³ | Not available. |
| Talc | 20 mppcf | 2 mg/m ³ (resp) |
| Silica, crystalline, quartz | ((10 mg/m ³)/(%SiO ₂ +2) TWA (resp)) ((30 mg/m ³)/(%SiO ₂ +2) TWA (total)) ((250)/(%SiO ₂ +5) mppcf TWA (resp)) | 0.025 mg/m ³ |

8.2 EXPOSURE CONTROLS

Engineering Controls: Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits.

8.3 INDIVIDUAL PROTECTIVE MEASURES

Personal Protective Equipment:

Eye/Face Protection: Safety glasses or goggles are recommended when using product.

Skin Protection:

Hand Protection: Chemical-resistant gloves.

Body Protection: Wear suitable protective clothing.

Respiratory Protection: In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

General Health and Safety Measures: Do not eat, smoke or drink where material is handled, processed or stored. Wash hands carefully before eating or smoking. Handle according to established industrial hygiene and safety practices.

Section 9: PHYSICAL AND CHEMICAL PROPERTIES

9.1 INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES

| | |
|---|-------------------------|
| Appearance: | White liquid. |
| Color: | White. |
| Odor: | Alcohol. |
| Odor Threshold: | Not available. |
| Physical State: | Gas/Pressurized Liquid. |
| pH: | Neutral. |
| Melting Point/Freezing Point: | Not available. |
| Initial Boiling Point and Boiling Range: | ~ 55 °C (~ 132 °F) |

| | |
|--|------------------------|
| Flash Point: | Not applicable |
| Evaporation Rate: | 0.4 (Ether = 1) |
| Flammability: | Flammable. |
| Lower Flammability/Explosive Limit: | 2 % |
| Upper Flammability/Explosive Limit: | 15 % |
| Vapor Pressure: | 65 psi @ 24 °C (75 °F) |
| Vapor Density: | 3 |
| Relative Density/Specific Gravity: | 0.87 |
| Solubility: | Partial. |
| Partition coefficient: n-octanol/water: | Not available. |
| Auto-ignition Temperature: | Not available. |
| Decomposition Temperature: | Not available. |
| Viscosity: | Not available. |
| Oxidizing Properties: | Not available. |
| Explosive Properties: | Not available. |

Section 10: STABILITY AND REACTIVITY

10.1 REACTIVITY

No dangerous reaction known under conditions of normal use.

10.2 CHEMICAL STABILITY

Stable under normal storage conditions. Contents under pressure. Container may explode if heated. Do not pierce or burn, even after use.

10.3 POSSIBILITY OF HAZARDOUS REACTIONS

No dangerous reaction known under conditions of normal use.

10.4 CONDITIONS TO AVOID

Heat. Incompatible materials. Sources of ignition.

10.5 INCOMPATIBLE MATERIALS

Strong oxidizing agents.

10.6 HAZARDOUS DECOMPOSITION PRODUCTS

May include, and are not limited to: oxides of carbon.

Section 11: TOXICOLOGICAL INFORMATION

11.1 INFORMATION ON TOXICOLOGICAL EFFECTS

Likely Routes of Exposure: Skin contact, eye contact, inhalation, and ingestion.

Symptoms related to physical/chemical/toxicological characteristics:

Eye: Causes serious eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with marked redness and swelling of the conjunctiva.

Skin: May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.

Ingestion: May be harmful if swallowed. May cause stomach distress, nausea or vomiting.

Inhalation: May cause respiratory tract irritation. May cause drowsiness or dizziness.

Acute Toxicity:

| Ingredient | IDLH | LC50 | LD50 |
|--|--|--|---|
| Isopropanol | 2,000 ppm | Inhalation 72.6 mg/L 4h, rat | Oral 4396 mg/kg, rat Dermal 12800 mg/kg, rat Dermal 12870 mg/kg, rabbit |
| Petroleum gases, liquefied, sweetened | Not available. | Inhalation 658 mg/L 4h, rat | Not available. |
| Acetone | 2,500 ppm | Inhalation 50100 mg/m ³ 8h, rat | Oral 5800 mg/kg, rat |
| Ceramic materials and wares, chemicals | Not available. | Not available. | Oral > 2000 mg/kg, rat Dermal > 2500 mg/kg, rabbit |
| Talc | 1,000 mg/m ³ | Not available. | Not available. |
| Silica, crystalline, quartz | 25 mg/m ³ (Cristobalite & Tridymite) 50 mg/m ³ (Quartz & Tripoli) | Not available. | Oral 500 mg/kg, rat |

Calculated overall Chemical Acute Toxicity Values

| LC50 (inhalation) | LD50 (oral) | LD50 (dermal) |
|-------------------|-------------------|----------------------|
| > 5 mg/L 4h, rat | > 2000 mg/kg, rat | > 2000 mg/kg, rabbit |

| Ingredient | Chemical Listed as Carcinogen or Potential Carcinogen (NTP, IARC, OSHA, ACGIH, CP65)* |
|--|---|
| Isopropanol | G-A4, I-3 |
| Petroleum gases, liquefied, sweetened | Not listed. |
| Acetone | G-A4 |
| Ceramic materials and wares, chemicals | Not listed. |
| Talc | G-A4, I-3 |
| Silica, crystalline, quartz | G-A2, I-1, N-1, O, CP65 |

* See Section 15 for more information.

11.2 DELAYED, IMMEDIATE, AND CHRONIC EFFECTS OF SHORT- AND LONG-TERM EXPOSURE

Skin Corrosion/Irritation: Based on available data, the classification criteria are not met.

Serious Eye Damage/Irritation: Causes serious eye irritation.

Respiratory Sensitization: Based on available data, the classification criteria are not met.

Skin Sensitization: Based on available data, the classification criteria are not met.

STOT-Single Exposure: May cause drowsiness or dizziness.

Chronic Health Effects:

- Carcinogenicity:** Based on available data, the classification criteria are not met.
- Germ Cell Mutagenicity:** Based on available data, the classification criteria are not met.

Reproductive Toxicity:

- Developmental:** Based on available data, the classification criteria are not met.
- Teratogenicity:** Based on available data, the classification criteria are not met.
- Embryotoxicity:** Based on available data, the classification criteria are not met.
- Fertility:** Based on available data, the classification criteria are not met.

STOT-Repeated Exposure: Causes damage to lungs through prolonged or repeated exposure.

Aspiration Hazard: Based on available data, the classification criteria are not met.

Toxicologically Synergistic Materials: Not available.

Other Information: Not available.

Section 12: ECOLOGICAL INFORMATION

12.1 ECOTOXICITY

Acute/Chronic Toxicity: May cause long-term adverse effects in the aquatic environment.

12.2 PERSISTENCE AND DEGRADABILITY

Not available.

12.3 BIOACCUMULATIVE POTENTIAL

Bioaccumulation: Not available.

12.4 MOBILITY IN SOIL

Not available.

12.5 OTHER ADVERSE EFFECTS

Not available.

Section 13: DISPOSAL CONSIDERATIONS

13.1 WASTE TREATMENT METHODS

Disposal Method: This material must be disposed of in accordance with all local, state, provincial, and federal regulations.

Other disposal recommendations: Not available.

Section 14: TRANSPORT INFORMATION

| | |
|-----|-------------------------------|
| DOT | Consumables, Limited Quantity |
|-----|-------------------------------|

| | |
|------|---|
| IATA | UN 1950, Aerosols, Flammable, 2.1 |
| IMDG | UN 1950, Aerosols, 2.1 (Limited Quantity) |

Section 15: REGULATORY INFORMATION

15.1 SAFETY, HEALTH AND ENVIRONMENTAL REGULATIONS/ LEGISLATIONS SPECIFIC FOR THE CHEMICAL

Canada: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

US: MSDS prepared pursuant to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Mexico: MSDS prepared pursuant to NOM-018-STPS-2000.

| SARA Title III | | | | |
|--|---------------------------------|------------------------------|---------------------|-------------|
| Ingredient | Section 302 (EHS) TPQ (lbs.) | Section 304 EHS RQ (lbs.) | CERCLA RQ (lbs.) | Section 313 |
| Isopropanol | Not listed. | Not listed. | Not listed. | 313 |
| Petroleum gases, liquefied, sweetened | Not listed. | Not listed. | Not listed. | Not listed. |
| Acetone | Not listed. | Not listed. | 5,000 | Not listed. |
| Ceramic materials and wares, chemicals | Not listed. | Not listed. | Not listed. | Not listed. |
| Talc | Not listed. | Not listed. | Not listed. | Not listed. |
| Silica, crystalline, quartz | Not listed. | Not listed. | Not listed. | Not listed. |

State Regulations

California Proposition 65:

This product contains a chemical known to the State of California to cause cancer.

Global Inventories:

| Ingredient | Canada DSL/NDSL | USA TSCA |
|--|--------------------|-------------|
| Isopropanol | DSL | Yes. |
| Petroleum gases, liquefied, sweetened | DSL | Yes. |
| Acetone | DSL | Yes. |
| Ceramic materials and wares, chemicals | DSL | Yes. |
| Talc | DSL | Yes. |
| Silica, crystalline, quartz | DSL | Yes. |

NFPA-National Fire Protection Association:

| | |
|--------------------|---|
| Health: | 2 |
| Fire: | 4 |
| Reactivity: | 0 |

HMIS-Hazardous Materials Identification System:

| |
|--|
| |
|--|

| | |
|-------------------------|----|
| Health: | 2* |
| Fire: | 4 |
| Physical Hazard: | 0 |

Hazard Rating: 0 = minimal, 1 = slight, 2 = moderate, 3 = severe, 4 = extreme

SOURCE AGENCY CARCINOGEN CLASSIFICATIONS:

CP65 California Proposition 65

OSHA (O) Occupational Safety and Health Administration.

ACGIH (G) American Conference of Governmental Industrial Hygienists.

- A1 - Confirmed human carcinogen.
- A2 - Suspected human carcinogen.
- A3 - Animal carcinogen.
- A4 - Not classifiable as a human carcinogen.
- A5 - Not suspected as a human carcinogen.

IARC (I) International Agency for Research on Cancer.

- 1 - The agent (mixture) is carcinogenic to humans.
- 2A - The agent (mixture) is probably carcinogenic to humans; there is limited evidence of carcinogenicity in humans and sufficient evidence of carcinogenicity in experimental animals.
- 2B - The agent (mixture) is possibly carcinogenic to humans; there is limited evidence of carcinogenicity in humans in the absence of sufficient evidence of carcinogenicity in experimental animals.
- 3 - The agent (mixture, exposure circumstance) is not classifiable as to its carcinogenicity to humans.
- 4 - The agent (mixture, exposure circumstance) is probably not carcinogenic to humans.

NTP (N) National Toxicology Program.

- 1 - Known to be carcinogens.
- 2 - Reasonably anticipated to be carcinogens.

Section 16: OTHER INFORMATION

Date of Preparation: November 25, 2013

Expiry Date: November 25, 2016

Version: 1.1

Revision Date: June 9, 2015

Conforms to OSHA HazCom 2012, CPR & NOM-018-STPS-2000 Standards

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.

Prepared by: Nexreg Compliance Inc.
 Phone: (519) 488-5126
www.nexreg.com

Prepared for: Magnaflux

End of Safety Data Sheet

SPOTCHECK[®] SKC-S

1. IDENTIFICATION

Company: MAGNAFLUX
Address: 3624 West Lake Avenue, Glenview, Illinois 60026
Telephone No.: 847-657-5300 (Off-Hour Emergency Number - CHEMTREC - 1-800-424-9300).
Product Use: Nondestructive testing material
NFPA Rating: Health 1, Flammability 3, Reactivity 0
Revision Date: March 21, 2014

2. HAZARDOUS INGREDIENTS

| <u>Ingredient</u> | <u>Wt./Wt. %</u> | <u>CAS #</u> | <u>TLV</u> | <u>PEL</u> | <u>LD₅₀</u> | <u>LC₅₀</u> |
|--|------------------|--------------|------------|------------|------------------------|------------------------|
| | | 64742-89-8 | | | | |
| | | Or | 300ppm | | 5 g/kg | 3400 ppm |
| Light aliphatic solvent naphtha | 60-100 | 64742-49-0 | (8 hr.TWA) | not avail. | (oral/rat) | (4hrs/rat) |
| Carbon dioxide propellant (Aerosol Only) | 3-7 | 124-38-9 | not avail. | 5000 ppm | not avail. | not avail. |

3. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

Flammable liquid and aerosol. Vapor may cause flash fire. Harmful or fatal if swallowed. Mist or vapor may irritate the respiratory tract. Liquid contact may cause eye and skin irritation. Over- exposure may cause central nervous system (CNS) depression and target organ effects. Spills may create a slipping hazard.

POTENTIAL HEALTH EFFECTS & SIGNS AND SYMPTOMS OF EXPOSURE:

Skin Contact: Irritating to skin. Repeated exposure may cause skin dryness or cracking.
Eyes: Vapors may be irritating to the eye.
Inhalation: Vapors expected to be slightly irritating. Vapors may cause drowsiness and dizziness.
Ingestion: Harmful: may cause lung damage if swallowed.
Medical conditions known to be aggravated by exposure to product: Pre-existing medical conditions of the following organ(s) or organ system(s) may be aggravated by exposure to this material: Eyes, Skin, and Respiratory system.

4. FIRST AID

Skin Contact: Wash off with soap and water. Do not use ointments. Seek medical attention if tissue appears damaged or if pain or irritation persists.
Eyes: Rinse carefully under upper and lower eyelids using plenty of water. Rest eyes for 30 minutes. If redness, burning, blurred vision, or swelling persists, transport to the nearest medical facility for additional treatment.
Inhalation: Remove to fresh air if dizzy or nauseated. If rapid recovery does not occur, transport to nearest medical facility for additional treatment.
Ingestion: Do not induce vomiting. Transport to nearest medical facility for additional treatment. If vomiting occurs spontaneously, keep head below hips to prevent aspiration.

NOTE: In all severe cases, contact physician immediately. Local telephone operators can furnish number of regional poison control center.

5. FIRE HAZARD

Conditions of flammability: Bulk and aerosol: Readily ignited in presence of ignition sources.
Flash point: Min. 57°F (14°C) (Pensky-Martens) closed cup.
Flammable limits in air: 1% to 6%.
Extinguishing media: Carbon dioxide, foam
Special fire fighting procedures: Keep containers cool with water spray. Do not spray water directly on burning SKC-S. It will float and spread the fire.
Hazardous combustion products: Smoke, soot, oxides of carbon.
Unusual fire hazards: Aerosol cans may burst if heated above 130°F (54°C) and spray contents into a fire.

6. ACCIDENTAL RELEASE MEASURES

Flammable Liquid! Release causes an immediate fire or explosion hazard. Do not touch or walk through spilled material. Prevent spilled material from entering waterways, sewers, basements, or confined area.
 Mop up or sweep up with absorbent. Use only non-sparking tools to collect absorbed material. Avoid contact with spilled or released material. Immediately remove all contaminated clothing. (For disposal, see Section 13.)

7. **HANDLING AND STORAGE**

Avoid eye contact. Avoid repeated or prolonged skin contact. Avoid breathing spray mist. Do not spray near arcs or flames. Use only in well ventilated areas. Wash thoroughly after handling.
Storage Level 3 Aerosols per NFPA 30B

8. **EXPOSURE CONTROLS/PERSONAL PROTECTION**

Controls: Use where ventilation will carry spray mist away from occupied areas.
Personal protection: Wear safety glasses to protect eyes. Wear nitrile rubber gloves if hand exposure is unavoidable. Respirator with solvent vapor absorbing cartridge if used in enclosed, unventilated space.
Warning: Use of this material in spaces without adequate ventilation may result in generation of hazardous levels of flammable vapors and/or inadequate oxygen levels for breathing. Odor is an inadequate warning for hazardous conditions.

9. **PHYSICAL PROPERTIES**

| | | | |
|--------------------------------------|--------------------------------|--------------------------|--|
| Initial boiling point (bulk): | Min. 245°F (118°C) (ASTM D-86) | Vapor pressure: | 12 and 16 oz. Aerosol: 105psi @ 75°F(24°C) Bulk: 1.5 – 2.0 kPa at 20°C/68.0°F |
| VOC Content (EPA Method 24): | 750 g/L | Vapor density: | 4.1 |
| Density/sp. gravity: | 0.76 | Evaporation rate: | Fast |
| Water solubility: | 0 | Appearance: | Clear, colorless liquid |
| pH: | Neutral | Odor: | Naphtha odor |

10. **STABILITY AND REACTIVITY**

Stability: Stable under normal conditions of use
Incompatibility: Avoid heat, sparks, open flames and other ignition sources. Avoid strong oxidizing agents.
Hazardous decomposition products: A complex mixture of airborne solids, liquids, and gases, including carbon monoxide, carbon dioxide and other organic compounds will be evolved when this material undergoes combustion or thermal or oxidative degradation.
Reactivity: None

11. **TOXICOLOGICAL INFORMATION**

Carcinogenicity: Contains no known or suspected carcinogens listed with OSHA, IARC, NTP, or ACGIH.
Threshold limit value: 300 ppm
WHMIS information (Canada): According to available information, the ingredients have not been found to show reproductive toxicity, teratogenicity, mutagenicity, skin sensitization, or synergistic toxic effects with other materials.

12. **ECOLOGICAL INFORMATION**

No data is available on SKC-S. It floats on water. Components will evaporate rapidly.

13. **DISPOSAL**

All disposal practices must be in compliance with all Federal, State/Provincial and local laws and regulations. Regulations may vary in different locations. Waste characterizations and compliance with applicable laws are the responsibility solely of the waste generator.
U.S. EPA Waste Number: D001

14. **TRANSPORTATION**

U.S. DOT: 49 CFR 172.101 Hazardous Materials Table

| | <u>Non-Aerosol</u> | <u>Aerosol</u> |
|--------------------------------------|---|---------------------------------------|
| Proper shipping name: | Petroleum distillates, n.o.s. | Consumables |
| Hazard class or division: | 3 | None None |
| Identification No.: | UN1268 | None |
| Packing Group: | II | |
| IATA: List of Dangerous Goods | | |
| Proper shipping name: | <u>Non-Aerosol</u> Petroleum distillates, n.o.s. | <u>Aerosol</u> Aerosols, flammable |
| Hazard class or division: | 3 | 2.1 |
| Identification No.: | UN1268 | UN1950 |
| Packing Group: | II | - |

| | | |
|----------------------------------|-------------------------------|----------------|
| IMDG: General Index | <u>Non-Aerosol</u> | <u>Aerosol</u> |
| <i>Proper shipping name:</i> | PETROLEUM DISTILLATES, N.O.S. | AEROSOLS |
| <i>Hazard class of division:</i> | 3.2 | 2.1 |
| <i>Identification No.:</i> | UN1268 | UN1950 |
| <i>Packing Group:</i> | II | - |

15. **REGULATORY INFORMATION**

TSCA: All ingredients are listed in TSCA inventory. Canadian DSL: All ingredients are listed in the Canadian DSL

CERCLA: VM&P Naphtha (64742-89-8) Reportable Quantity 66,667 lbs.

SARA TITLE III, Section 313: Xylene, Mixed Isomer (1330-20-7) <0.13%; meta-Xylene (108-38-3) <0.05%; Ethylbenzene (100-41-4) <0.1%; Benzene (71-43-2) <0.005%; Toluene (108-88-3) <0.1%, Naphthalene: <0.002%

California Proposition 65: Warning: This material may contain trace amounts of chemicals known to the state of California to cause cancer and/or birth defects and/or reproductive harm.

WHMIS Class (Canada): Non-Aerosol: B-2, D-2B; Aerosol: A, B-5, D-2B

Note: This MSDS has been prepared to meet WHMIS (Canada) requirements with the exception of using 16 headings.



16. **OTHER INFORMATION**

Revision Statement: Section 1
Supersedes: April 1, 2013

1. Identification

| | |
|---|---|
| Product identifier | PVC All Weather Clear Cement |
| Other means of identification | |
| Product code | 1105E |
| Synonyms | Part Numbers: 31132, 31133, 31135, 31136 |
| Recommended use | Joining PVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | Oatey Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |

| | |
|--|--|
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|--------------------------|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 35-55 |
| Acetone | 67-64-1 | 10-25 |
| Polyvinyl chloride | 9002-86-2 | 12-20 |
| Cyclohexanone | 108-94-1 | 10-20 |
| Silica, amorphous, fumed | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |
| Fire fighting equipment/instructions | In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. |
| General fire hazards | Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age. |

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| Components | Type | Value |
|------------------------------------|------|-------|
| Polyvinyl chloride (CAS 9002-86-2) | STEL | 5 ppm |
| | TWA | 1 ppm |

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

| Components | Type | Value | Form |
|------------------------------------|------|------------|----------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 | |
| | | 1000 ppm | |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 | |
| | | 50 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 | |
| | | 200 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | PEL | 5 mg/m3 | Respirable fraction. |
| | | 15 mg/m3 | Total dust. |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|---|------|---------------------------|
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 0.8 mg/m3 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value | Form |
|------------------------------------|------|---------|----------------------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm | |
| | TWA | 500 ppm | |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm | |
| | TWA | 20 ppm | |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm | |
| | TWA | 50 ppm | |
| Polyvinyl chloride (CAS 9002-86-2) | TWA | 1 mg/m3 | Respirable fraction. |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|---|------|---------------------------------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | TWA | 250 ppm 590 mg/m3 200 ppm |
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 6 mg/m3 |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9) Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Face shield is recommended. Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing.

Respiratory protection If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid.

Form Translucent liquid.

Color Gray.

Odor Solvent.

Odor threshold Not available.

pH Not available.

Melting point/freezing point Not available.

Initial boiling point and boiling range 151 °F (66.11 °C)

Flash point -4.0 °F (-20.0 °C)

Evaporation rate 5.5 - 8

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) 1.8

Flammability limit - upper (%) 11.8

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure 145 mm Hg @ 20 C

Vapor density 2.5

Relative density 0.95 +/- 0.02

Solubility(ies)

Solubility (water) Negligible

Partition coefficient (n-octanol/water) Not available.

Auto-ignition temperature Not available.

Decomposition temperature Not available.

Viscosity 600 - 1500 cP

Other information

VOC (Weight %) 423 g/l SCAQMD 1168/M316A

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia. |

Symptoms related to the physical, chemical and toxicological characteristics Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|----------------|---------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | |
| Respiratory sensitization | Not available. |
| Skin sensitization | This product is not expected to cause skin sensitization. |
| Germ cell mutagenicity | No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. |

Carcinogenicity

In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

| | |
|--|---|
| Cyclohexanone (CAS 108-94-1) | 3 Not classifiable as to carcinogenicity to humans. |
| Polyvinyl chloride (CAS 9002-86-2) | 3 Not classifiable as to carcinogenicity to humans. |
| Silica, amorphous, fumed (CAS 112945-52-5) | 3 Not classifiable as to carcinogenicity to humans. |

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|--------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
|------------------------------------|--------|

| | |
|---|---|
| Reproductive toxicity | This product is not expected to cause reproductive or developmental effects. |
| Specific target organ toxicity - single exposure | Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation. |
| Specific target organ toxicity - repeated exposure | Not classified. |
| Aspiration hazard | May be fatal if swallowed and enters airways. |
| Chronic effects | Prolonged inhalation may be harmful. |

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|--|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (<i>Pimephales promelas</i>) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

| | |
|------------------------------|---|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquids, n.o.s. (Acetone RQ = 25934 LBS) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Label(s) | 3 |
| Packing group | II |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |
| Special provisions | IB2, T7, TP1, TP8, TP28 |
| Packaging exceptions | 150 |
| Packaging non bulk | 202 |
| Packaging bulk | 242 |

IATA

| | |
|------------------------------|---|
| UN number | UN1993 |
| UN proper shipping name | Flammable liquid, n.o.s. (Acetone) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | No. |
| ERG Code | 3H |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

IMDG

| | |
|------------------------------|---|
| UN number | UN1993 |
| UN proper shipping name | FLAMMABLE LIQUID, N.O.S. (Acetone) |
| Transport hazard class(es) | |
| Class | 3 |
| Subsidiary risk | - |
| Packing group | II |
| Environmental hazards | |
| Marine pollutant | No. |
| EmS | F-E, S-E |
| Special precautions for user | Read safety instructions, SDS and emergency procedures before handling. |

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

| | |
|------------------------------------|------------------------|
| Polyvinyl chloride (CAS 9002-86-2) | Cancer |
| | Central nervous system |
| | Liver |
| | Blood |
| | Flammability |

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories
Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)
Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Silica, amorphous, fumed (CAS 112945-52-5)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Silica, amorphous, fumed (CAS 112945-52-5)

US. Rhode Island RTK

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | No |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 27-May-2015
Revision date -
Version # 01
HMIS® ratings Health: 2
Flammability: 3
Physical hazard: 0

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.

Safety Data Sheet

Issue Date: 23-April-2015

Revision Date: N/A

Version 1

1. IDENTIFICATION

Product Identifier

Product Name Service Pro Motor Oil

Product Codes: SP17134, SPL17134, SPL27137, SPL37137, SPL57137, SPL00236, SPL00237, SP17205, SPL17205, SPL27205, SPL37205, SPL57205, SP17057, SPL17057, SPL27057, SPL37057, SPL57057, SPL00240, SPL00241, SP17058, SPL17058, SPL27058, SPL37058, SPL57058, SP00238, SPL00239

Other means of identification SAE 30, SAE 40, SAE 10W-40, SAE 20W-50
SDS # SP-015

Recommended use of the chemical and restrictions on use

Recommended Use Premium passenger car motor oil.

Details of the supplier of the safety data sheet

Supplier Address

Warren Oil Company
915 E. Jefferson Ave.
West Memphis, AR 72301

Manufactured for:

AIOD
P.O. BOX 1861
Montrose, CO 81402-1861
970-249-6336 www.service-pro.com

Emergency Telephone Number

Company Phone Number 1-800-428-9284
Emergency Telephone (24 hr) CHEMTREC 1-800-424-9300 (North America) 1-703-527-3887 (International)

2. HAZARDS IDENTIFICATION

Appearance Light amber, viscous liquid **Physical State** Viscous liquid **Odor** Typical petroleum

Classification

This chemical does not meet the hazardous criteria set forth by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200). However, this Safety Data Sheet (SDS) contains valuable information critical to the safe handling and proper use of this product. This SDS should be retained and available for employees and other users of this product.

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% |
|--|------------|----------|
| Petroleum distillates, hydrotreated heavy paraffinic | 64742-54-7 | 80-90 |

If Chemical Name/CAS No is "proprietary" and/or Weight-% is listed as a range, the specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. FIRST-AID MEASURES

First Aid Measures

| | |
|---------------------|---|
| Eye Contact | Flush eyes with large amounts of water, for at least 15 minutes, until irritation subsides. If irritation persists, get medical attention. |
| Skin Contact | No treatment is necessary under ordinary circumstances. Remove contaminated clothing if necessary. Wash contaminated area thoroughly with soap and water. If redness or irritation occurs and persists, seek medical attention. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should seek immediate medical attention. |
| Inhalation | Remove to fresh air. If not breathing, give artificial respiration, preferably mouth to mouth. If breathing is difficult give oxygen. Get medical attention. |
| Ingestion | If swallowed, do not induce vomiting. If victim exhibits signs of lung aspiration such as coughing or choking, seek immediate medical attention. |

Most important symptoms and effects

| | |
|-----------------|---|
| Symptoms | Expected to be a minor eye irritant. Repeated or prolonged skin contact may cause dermatitis. |
|-----------------|---|

Indication of any immediate medical attention and special treatment needed

| | |
|---------------------------|------------------------|
| Notes to Physician | Treat symptomatically. |
|---------------------------|------------------------|

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Use dry chemical, foam, carbon dioxide or water fog.

Unsuitable Extinguishing Media While carbon dioxide and inert will extinguish the fire, they can also displace oxygen. Use caution when applying carbon dioxide or inert gas in confined spaces.

Specific Hazards Arising from the Chemical

This material can burn but will not readily ignite. This material will release vapors when heated above the flashpoint temperature that can ignite when exposed to a source of ignition. In enclosed spaces, heated vapor can ignite with explosive force. Mists or sprays may burn at temperatures below the flashpoint. Dense smoke may be generated while burning.

Hazardous Combustion Products Carbon monoxide. Carbon dioxide (CO₂). Aldehydes. Ketones. Combustion products of sulfur and nitrogen.

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Avoid breathing smoke and vapor. Water may be used to cool containers exposed to heat or flame.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

- Personal Precautions** Use personal protective equipment as required.
- Environmental Precautions** See Section 12 for additional Ecological Information.

Methods and material for containment and cleaning up

- Methods for Containment** Remove sources of ignition. Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams.
- Methods for Clean-Up** Take up small spills with absorbent pads. Large spills may be taken up with pump or vacuum.

7. HANDLING AND STORAGE

Precautions for safe handling

- Advice on Safe Handling** Handle in accordance with good industrial hygiene and safety practice.

Conditions for safe storage, including any incompatibilities

- Storage Conditions** Store at ambient conditions. Store at atmospheric pressure. Keep container tightly closed. Store in a cool, well-ventilated place. Keep away from heat, sparks, and flame. Store away from incompatible materials. Empty containers retain product residues.
- Incompatible Materials** This product may react with strong oxidizing agents.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines

This product, as supplied, does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies

Appropriate engineering controls

- Engineering Controls** Use general ventilation and use local exhaust, where possible, in confined or enclosed spaces. If product is heated above 70 C (155 F) in the presence of water, hydrogen sulfide vapors may be released. Ventilation should be sufficient to keep hydrogen sulfide levels below recommended exposure limits. Eye wash fountains are recommended.

Individual protection measures, such as personal protective equipment

- Eye/Face Protection** Wear safety glasses. Wear chemical goggles or face shield if splash or mist occurs.
- Skin and Body Protection** Use impervious gloves for prolonged contact. Wear oil-impervious garments if contact is unavoidable.
- Respiratory Protection** If mist is generated (heating, spraying) and engineering controls are not sufficient, wear approved organic vapor respirator suitable for oil mist.
- General Hygiene Considerations** Use good hygiene when handling petroleum product. Launder contaminated clothing before reuse. Excessive misting may cause slippery floors - wear appropriate footwear.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | | | |
|-----------------------|-----------------------------|-----------------------|-------------------|
| Physical State | Viscous liquid | Odor | Typical petroleum |
| Appearance | Light amber, viscous liquid | Odor Threshold | Not available |
| Color | Light amber | | |

| <u>Property</u> | <u>Values</u> | <u>Remarks • Method</u> |
|------------------------------|-----------------------|-------------------------|
| pH | Not available | |
| Melting Point/Freezing Point | Not available | |
| Boiling Point/Boiling Range | Not available | |
| Flash Point | 204 °C / 400 °F | ASTM D-92 |
| Evaporation Rate | Not available | |
| Flammability (Solid, Gas) | Liquid-Not applicable | |
| Upper Flammability Limits | Not determined | |
| Lower Flammability Limit | Not determined | |
| Vapor Pressure | Not available | |
| Vapor Density | >1 | (Air=1) |
| Specific Gravity | 0.86 | |
| Water Solubility | insoluble | |
| Solubility in other solvents | Not determined | |
| Partition Coefficient | Not available | |
| Auto-ignition Temperature | No data available | |
| Decomposition Temperature | Not determined | |
| Kinematic Viscosity | Not determined | |
| Dynamic Viscosity | Not determined | |
| Explosive Properties | Not determined | |
| Oxidizing Properties | Not determined | |

10. STABILITY AND REACTIVITY

Reactivity
Not reactive under normal conditions.

Chemical Stability
Stable under recommended storage conditions.

Possibility of Hazardous Reactions
None under normal processing.

Hazardous Polymerization Under normal conditions of storage and use, hazardous polymerization will not occur.

Conditions to Avoid
Avoid formation of mists. Keep away from heat, sparks and open flame. Incompatible Materials.

Incompatible Materials
This product may react with strong oxidizing agents.

Hazardous Decomposition Products
Decomposition of this product may yield oxides of boron, calcium, magnesium, nitrogen, phosphorus, sulfur including hydrogen sulfide and zinc as well as carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Product Information

| | |
|---------------------|--------------------------|
| Eye Contact | Avoid contact with eyes. |
| Skin Contact | Avoid contact with skin. |
| Inhalation | Do not inhale. |
| Ingestion | Do not ingest. |

Component Information

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|---|----------------------|-------------------------|-----------------|
| Zinc alkyl dithiophosphate 2215-35-2 | = 2000 mg/kg (Rat) | > 3160 mg/kg (Rabbit) | - |

Information on physical, chemical and toxicological effects

Symptoms Please see section 4 of this SDS for symptoms.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Carcinogenicity Based on the information provided, this product does not contain any carcinogens or potential carcinogens as listed by OSHA, IARC or NTP.

Numerical measures of toxicity

Not determined

12. ECOLOGICAL INFORMATION

Ecotoxicity

The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Component Information

| Chemical Name | Algae/aquatic plants | Fish | Toxicity to microorganisms | Crustacea |
|---|---|---|----------------------------|--|
| Petroleum distillates, hydrotreated heavy paraffinic 64742-54-7 | | 5000: 96 h Oncorhynchus mykiss mg/L LC50 | | 1000: 48 h Daphnia magna mg/L EC50 |
| Zinc alkyl dithiophosphate 2215-35-2 | 1.0 - 5.0: 96 h Pseudokirchneriella subcapitata mg/L EC50 | 100: 96 h Pimephales promelas mg/L LC50 semi- static 25 - 50: 96 h Pimephales promelas mg/L LC50 static | | 4.0 - 6.0: 48 h Daphnia magna mg/L EC50 |

Persistence/Degradability

Not determined.

Bioaccumulation

Not determined.

Mobility

Not determined

Other Adverse Effects

Not determined

13. DISPOSAL CONSIDERATIONS

Waste Treatment Methods

- Disposal of Wastes** Disposal should be in accordance with applicable regional, national and local laws and regulations.
- Contaminated Packaging** Disposal should be in accordance with applicable regional, national and local laws and regulations.

14. TRANSPORT INFORMATION

- Note** Please see current shipping paper for most up to date shipping information, including exemptions and special circumstances.
- DOT** Not regulated
- IATA** Not regulated
- IMDG** Not regulated

15. REGULATORY INFORMATION

International Inventories

| Chemical Name | TSCA | DSL | NDSL | EINECS | ELINCS | ENCS | IECSC | KECL | PICCS | AICS |
|--|---------|-----|------|---------|--------|---------|-------|---------|-------|------|
| Petroleum distillates, hydrotreated heavy paraffinic | Present | X | | Present | | Present | X | Present | X | X |

Legend:

- TSCA - United States Toxic Substances Control Act Section 8(b) Inventory*
- DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List*
- EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances*
- ENCS - Japan Existing and New Chemical Substances*
- IECSC - China Inventory of Existing Chemical Substances*
- KECL - Korean Existing and Evaluated Chemical Substances*
- PICCS - Philippines Inventory of Chemicals and Chemical Substances*
- AICS - Australian Inventory of Chemical Substances*

US Federal Regulations

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355).

SARA 311/312 Hazard Categories

- Acute Health Hazard** No
- Chronic Health Hazard** No
- Fire Hazard** No
- Sudden Release of Pressure Hazard** No
- Reactive Hazard** No

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product does not contain any chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

CWA (Clean Water Act)

| Chemical Name | CWA - Reportable Quantities | CWA - Toxic Pollutants | CWA - Priority Pollutants | CWA - Hazardous Substances |
|----------------------------|-----------------------------|------------------------|---------------------------|----------------------------|
| Zinc alkyl dithiophosphate | | X | | |
| Zinc alkyl dithiophosphate | | X | | |

US State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania |
|---|------------|---------------|--------------|
| Zinc alkyl dithiophosphate 2215-35-2 | X | | X |
| Zinc alkyl dithiophosphate 113706-15-3 | X | | X |

16. OTHER INFORMATION

| | | | | |
|--------------------|-----------------------|---------------------|-------------------------|----------------------------|
| <u>NFPA</u> | Health Hazards | Flammability | Instability | Special Hazards |
| | 0 | 1 | 0 | Not determined |
| <u>HMIS</u> | Health Hazards | Flammability | Physical Hazards | Personal Protection |
| | 1 | 1 | 0 | Not determined |

Issue Date: 23-April-2015
 Revision Date: N/A
 Revision Note: N/A

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Material name : POWER SOLV 5000 LIQUID 4-1GL

Material number : 0000000000005524

Manufacturer or supplier's details

Company : Zep Inc.

Address : 350 Joe Frank Harris Parkway, SE
Emerson, GA 30137

Telephone : 404-352-1680

Emergency telephone numbers**For SDS Information** : Compliance Services 1-877-428-9937**For a Medical Emergency** : 877-541-2016 Toll Free - All Calls Recorded**For a Transportation** : CHEMTREC: 800-424-9300 - All Calls Recorded.**Emergency** : In the District of Columbia 202-483-7616**Recommended use of the chemical and restrictions on use**

Recommended use : Degreaser


SECTION 2. HAZARDS IDENTIFICATION**Emergency Overview**

| | |
|------------|-------------------|
| Appearance | liquid |
| Colour | colourless, clear |
| Odour | characteristic |

GHS Classification

Skin irritation : Category 2
 Eye irritation : Category 2A
 Carcinogenicity : Category 2
 Reproductive toxicity : Category 1B
 Specific target organ toxicity - single exposure : Category 3 (Respiratory system, Central nervous system)
 Specific target organ toxicity - repeated exposure (Inhalation) : Category 2

GHS label elements

Hazard pictograms : 

Signal word : Danger

Hazard statements : H315 Causes skin irritation.
 H319 Causes serious eye irritation.

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

H335 May cause respiratory irritation.
 H336 May cause drowsiness or dizziness.
 H351 Suspected of causing cancer.
 H360 May damage fertility or the unborn child.
 H373 May cause damage to organs through prolonged or repeated exposure if inhaled.

Precautionary statements : **Prevention:**
 P201 Obtain special instructions before use.
 P202 Do not handle until all safety precautions have been read and understood.
 P260 Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
 P264 Wash skin thoroughly after handling.
 P271 Use only outdoors or in a well-ventilated area.
 P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.
Response:
 P302 + P352 IF ON SKIN: Wash with plenty of soap and water.
 P304 + P340 + P312 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
 P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
 P308 + P313 IF exposed or concerned: Get medical advice/ attention.
 P332 + P313 If skin irritation occurs: Get medical advice/ attention.
 P337 + P313 If eye irritation persists: Get medical advice/ attention.
 P362 Take off contaminated clothing and wash before reuse.
Storage:
 P403 + P233 Store in a well-ventilated place. Keep container tightly closed.
Disposal:
 P501 Dispose of contents/container in accordance with local regulation.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Concentration [%] |
|-----------------|----------|-------------------|
| 1-bromopropane | 106-94-5 | >= 90 - <= 100 |
| propan-1-ol | 71-23-8 | >= 1 - < 5 |
| 1,2-epoxybutane | 106-88-7 | >= 1 - < 5 |

The exact percentages of disclosed substances are withheld as trade secrets.

SECTION 4. FIRST AID MEASURES

General advice : Move out of dangerous area.
 Consult a physician.

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

- Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : Consult a physician after significant exposure.
If unconscious, place in recovery position and seek medical advice.
- In case of skin contact : If skin irritation persists, call a physician.
Wash off immediately with plenty of water for at least 15 minutes.
Remove contaminated clothing and shoes.
Wash contaminated clothing before reuse.
- In case of eye contact : Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Remove contact lenses.
Protect unharmed eye.
Keep eye wide open while rinsing.
If eye irritation persists, consult a specialist.
- If swallowed : Keep respiratory tract clear.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.
Take victim immediately to hospital.
- Most important symptoms and effects, both acute and delayed : Effects are dependent on exposure (dose, concentration, contact time).
Effects are immediate and delayed.
Chronic effects are delayed and symptoms may not be observed during an exposure.
Symptoms may include irritation, redness, pain, and rash.
Causes serious eye damage.
Causes skin irritation.
Suspected of causing cancer.
Review section 2 of SDS to see all potential hazards.
- Notes to physician : Treat symptomatically. Symptoms may be delayed.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Alcohol-resistant foam
Carbon dioxide (CO₂)
Dry chemical
- Unsuitable extinguishing media : High volume water jet
- Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.
- Hazardous combustion products : Carbon dioxide (CO₂)
Carbon monoxide

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

- Smoke
Bromine compounds
- Specific extinguishing methods : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
- Further information : Collect contaminated fire extinguishing water separately. This must not be discharged into drains.
Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations.
For safety reasons in case of fire, cans should be stored separately in closed containments.
Use a water spray to cool fully closed containers.
- Special protective equipment for firefighters : Wear self-contained breathing apparatus for firefighting if necessary.

SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.
Ensure adequate ventilation.
Remove all sources of ignition.
Evacuate personnel to safe areas.
Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
- Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
If the product contaminates rivers and lakes or drains inform respective authorities.
- Methods and materials for containment and cleaning up : Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

SECTION 7. HANDLING AND STORAGE

- Technical measures : This product has no measured flash point and is non-flammable per OSHA, CPSC, and DOT regulations. However, the vapors of this product will form a flammable mixture in a narrow concentration range of 4.6 % to 8.5 % by volume in air based on n-propyl bromide. Do not weld or cut any drum with a torch that contains this product because residual vapors in the drum could be in the flammable range and an explosion could occur.
- Advice on safe handling : Avoid formation of aerosol.
Do not breathe vapours/dust.
Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

application area.

Take precautionary measures against static discharges.

Provide sufficient air exchange and/or exhaust in work rooms.

Open drum carefully as content may be under pressure.

Dispose of rinse water in accordance with local and national regulations.

- Conditions for safe storage : No smoking.
 Keep container tightly closed in a dry and well-ventilated place.
 Containers which are opened must be carefully resealed and kept upright to prevent leakage.
 Observe label precautions.
 Electrical installations / working materials must comply with the technological safety standards.
- Materials to avoid : Keep away from oxidizing agents and strongly acid or alkaline materials.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION
Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|-----------------|----------|----------------------------------|---|-----------|
| 1-bromopropane | 106-94-5 | TWA | 0.1 ppm | ACGIH |
| | | PEL | 5 ppm 25 mg/m ³ | CAL PEL |
| propan-1-ol | 71-23-8 | TWA | 100 ppm | ACGIH |
| | | TWA | 200 ppm 500 mg/m ³ | NIOSH REL |
| | | ST | 250 ppm 625 mg/m ³ | NIOSH REL |
| | | TWA | 200 ppm 500 mg/m ³ | OSHA Z-1 |
| | | STEL | 250 ppm 625 mg/m ³ | OSHA P0 |
| | | TWA | 200 ppm 500 mg/m ³ | OSHA P0 |
| 1,2-epoxybutane | 106-88-7 | PEL | 200 ppm 500 mg/m ³ | CAL PEL |
| | | STEL | 250 ppm 625 mg/m ³ | CAL PEL |
| 1,2-epoxybutane | 106-88-7 | TWA | 2 ppm | US WEEL |

Engineering measures : effective ventilation in all processing areas

Personal protective equipment

Respiratory protection : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines.

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

| | | |
|--------------------------|---|--|
| Hand protection | : | |
| Material | : | Protective gloves |
| Remarks | : | The suitability for a specific workplace should be discussed with the producers of the protective gloves. |
| Eye protection | : | Tightly fitting safety goggles Wear face-shield and protective suit for abnormal processing problems. Ensure that eyewash stations and safety showers are close to the workstation location. |
| Skin and body protection | : | Impervious clothing Choose body protection according to the amount and concentration of the dangerous substance at the work place. |
| Hygiene measures | : | When using do not eat or drink. When using do not smoke. Wash hands before breaks and at the end of workday. |

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

| | | |
|------------------------------|---|-------------------------|
| Appearance | : | liquid |
| Colour | : | colourless, clear |
| Odour | : | characteristic |
| Odour Threshold | : | No data available |
| pH | : | No data available |
| Melting point/freezing point | : | No data available |
| Boiling point | : | 70 °C |
| Flash point | : | does not flash |
| Evaporation rate | : | > 1 |
| Upper explosion limit | : | 8.5 %(V) |
| Lower explosion limit | : | 4.6 %(V) |
| Vapour pressure | : | 147.72 hPa |
| Relative vapour density | : | No data available |
| Density | : | 1.316 g/cm ³ |
| Bulk density | : | No data available |
| Solubility(ies) | : | |
| Water solubility | : | insoluble |
| Solubility in other solvents | : | insoluble |

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

| | | |
|--|---|--------------------------------|
| Partition coefficient: n-octanol/water | : | No data available |
| Auto-ignition temperature | : | No data available |
| Thermal decomposition | : | No data available |
| Viscosity | | |
| Viscosity, dynamic | : | No data available |
| Viscosity, kinematic | : | 2.1 mm ² /s (20 °C) |

SECTION 10. STABILITY AND REACTIVITY

| | | |
|------------------------------------|---|---|
| Reactivity | : | Stable |
| Chemical stability | : | Stable under normal conditions. |
| Possibility of hazardous reactions | : | No decomposition if stored and applied as directed. Vapours may form explosive mixture with air. |
| Conditions to avoid | : | Heat, flames and sparks. |
| Incompatible materials | : | Oxidizing agents Metals Acids Alkali metals Aluminium Zinc |
| Hazardous decomposition products | : | Carbon monoxide, carbon dioxide and unburned hydrocarbons (smoke). Bromine |

SECTION 11. TOXICOLOGICAL INFORMATION**Potential Health Effects**

| | | |
|------------------------------|---|---|
| Aggravated Medical Condition | : | None known. |
| Symptoms of Overexposure | : | Effects are dependent on exposure (dose, concentration, contact time). Effects are immediate and delayed. Chronic effects are delayed and symptoms may not be observed during an exposure. Symptoms may include irritation, redness, pain, and rash. |

Carcinogenicity:

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

| | | |
|--------------|--|----------|
| IARC | Group 2B: Possibly carcinogenic to humans | |
| ACGIH | 1,2-epoxybutane | 106-88-7 |
| | Confirmed animal carcinogen with unknown relevance to humans | |
| OSHA | 1-bromopropane | 106-94-5 |
| | No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens. | |
| NTP | Reasonably anticipated to be a human carcinogen | |
| | 1-bromopropane | 106-94-5 |

Acute toxicity**Components:****propan-1-ol:**

Acute dermal toxicity : LD50 Dermal Rabbit: 5,040 mg/kg

Skin corrosion/irritation**Product:**

Remarks: Irritating to skin.

Components:**propan-1-ol:**

Species: human skin

Exposure time: 24 h

Result: Mild skin irritation

Serious eye damage/eye irritation**Product:**

Remarks: Irritating to eyes.

Components:**propan-1-ol:**

Species: Rabbit

Exposure time: 24 h

Result: Moderate eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

STOT - repeated exposure

No data available

Aspiration toxicity

No data available

Further information**Product:**

Remarks: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting., Concentrations substantially above the TLV value may cause narcotic effects., Solvents may degrease the skin.

SECTION 12. ECOLOGICAL INFORMATION**Ecotoxicity**

No data available

Persistence and degradability

No data available

Bioaccumulative potential**Product:**

Partition coefficient: n-octanol/water : Remarks: No data available

Components:

1-bromopropane :
Partition coefficient: n-octanol/water : Pow: 2.1

1,2-epoxybutane :
Partition coefficient: n-octanol/water : Pow: 0.68

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Regulation 40 CFR Protection of Environment; Part 82 Protection of Stratospheric Ozone - CAA Section 602 Class I Substances

Remarks This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

Additional ecological information : No data available

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

SECTION 13. DISPOSAL CONSIDERATIONS**Disposal methods**

- Waste from residues : Do not dispose of waste into sewer.
Do not contaminate ponds, waterways or ditches with chemical or used container.
Dispose of in accordance with local regulations.
- Contaminated packaging : Empty remaining contents.
Dispose of as unused product.
Do not re-use empty containers.
The vapors of this product will form a flammable mixture in a narrow concentration range of 4.6 % to 8.5 % by volume in air based on n-propyl bromide. Do not weld or cut any drum with a torch that contains this product because residual vapors in the drum could be in the flammable range and an explosion could occur.

SECTION 14. TRANSPORT INFORMATION

Transportation Regulation: 49 CFR (USA):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

Transportation Regulation: IMDG (Vessel):
UN2344, BROMOPROPANES, 3, II

Transportation Regulation: IATA (Cargo Air):
UN2344, Bromopropanes, 3, II

Transportation Regulation: IATA (Passenger Air):
UN2344, Bromopropanes, 3, II

Transportation Regulation: TDG (Canada):
NOT REGULATED AS DANGEROUS GOODS OR HAZARDOUS MATERIAL

Transportation Notes

This product does not have a flashpoint that can be measured, therefore this product does not meet the criteria as a flammable liquid under the regulations of the US DOT special provisions (CFR 172.101 (c)(12)(iv)) and Canadian TDG (SOR/2017-137, 2.18 (1)(a)), and does not meet the definition of any other hazard class. Based on this information and conventions used by our supplier(s), this product is not regulated for transport in the United States and Canada. As noted above, a transport classification of UN2344 - Bromopropanes, should be used for shipments by air (IATA) or by sea (IMDG).

The product as delivered to the customer conforms to packaging requirements for shipment by road under US Department of Transportation (DOT) regulations. Additional transportation classifications

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

noted above are for reference only, and not a certification or warranty of the suitability of the packaging for shipment under these alternative transport regulations.

SECTION 15. REGULATORY INFORMATION

TSCA list : No substances are subject to a Significant New Use Rule.

No substances are subject to TSCA 12(b) export notification requirements.

EPCRA - Emergency Planning and Community Right-to-Know Act**CERCLA Reportable Quantity**

| Components | CAS-No. | Component RQ (lbs) | Calculated product RQ (lbs) |
|-----------------|----------|-----------------------|--------------------------------|
| 1,2-epoxybutane | 106-88-7 | 100 | * |

*: Calculated RQ exceeds reasonably attainable upper limit.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Skin corrosion or irritation
 Serious eye damage or eye irritation
 Carcinogenicity
 Reproductive toxicity
 Specific target organ toxicity (single or repeated exposure)

SARA 302 : No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 : The following components are subject to reporting levels established by SARA Title III, Section 313:

| | | |
|-----------------|----------|-----|
| 1,2-epoxybutane | 106-88-7 | 1 % |
|-----------------|----------|-----|

California Prop. 65

WARNING: This product can expose you to chemicals including 1-bromopropane, which is/are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

The components of this product are reported in the following inventories:

TSCA On TSCA Inventory
DSL All components of this product are on the Canadian DSL

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

For information on the country notification status for other regions please contact the manufacturer's regulatory group.


Inventory Acronym and Validity Area Legend:

TSCA (USA), DSL (Canada), NDSL (Canada)

SECTION 16. OTHER INFORMATION

Further information

NFPA:



HMIS III:

| | |
|------------------------|-----------|
| HEALTH | 2* |
| FLAMMABILITY | 0 |
| PHYSICAL HAZARD | 0 |

0 = not significant, 1 =Slight,
2 = Moderate, 3 = High
4 = Extreme, * = Chronic

OSHA - GHS Label Information:

Hazard pictograms :



Signal word :

Danger:

Hazard statements :

Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. Suspected of causing cancer. May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure if inhaled.

Precautionary statements :

Prevention: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not breathe dust/ fume/ gas/ mist/ vapours/ spray. Wash skin thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/ protective clothing/ eye protection/ face protection.
Response: IF ON SKIN: Wash with plenty of soap and water. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. IF exposed or concerned: Get medical advice/ attention. If skin irritation occurs: Get medical advice/ attention. If eye irritation persists: Get medical advice/ attention. Take off contaminated clothing and wash before reuse.
Storage: Store in a well-ventilated place. Keep container tightly closed.
Disposal: Dispose of contents/container in accordance with local regulation.

| | |
|----------------|------------|
| Version: | 3.1 |
| Revision Date: | 03/29/2018 |
| Print Date: | 02/18/2021 |

POWER SOLV 5000 LIQUID 4-1GL

Version 3.1

Revision Date 03/29/2018

Print Date 02/18/2021

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. Users should make their own investigations to determine the suitability and applicability of the information for their particular purposes. This SDS has been prepared by the Compliance Services organization supporting this manufacturer, supplier or distributor.

Zep Inc. markets products under well recognized and established brand names such as Zep®, Zep Commercial®, Zep Professional®, Enforcer®, National Chemical™, Selig™, Misty®, Next Dimension™, Petro®, i-Chem®, TimeMist®, TimeWick™, MicrobeMax®, Country Vet®, Konk®, Original Bike Spirits®, Blue Coral®, Black Magic®, Rain-X®, Niagara National™, FC Forward Chemicals®, Rexodan®, Mykal™, and a number of private labeled brands.



GHS SAFETY DATA SHEET

WELD-ON® C-65™ Low VOC Cleaner for Plastic Pipe

Date Revised: APR 2020
Supersedes: DEC 2019

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® C-65™ Low VOC Cleaner for Plastic Pipe
PRODUCT USE: Low VOC Cleaner for Plastic Pipe (PVC, CPVC, ABS and Styrene)
RESTRICTIONS ON USE: No relevant information available
SUPPLIER: **MANUFACTURER:** IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300 Email: EHSinfo@ipscorp.com
EMERGENCY: Transportation: CHEMTEL Tel. 800-255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800-255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | Environmental | Physical |
|---|--|-----------------------------|
| Acute Toxicity: Category 2 Skin Irritation: Category 3 Skin Sensitization: NO Carcinogenicity: Category 4 Eye Irritation: Category 2 STOT-Single Exposure Central nervous system: Category 3 | Acute Toxicity: None Known Chronic Toxicity: None Known | Flammable Liquid Category 2 |

GHS LABEL:   **Signal Word:** Danger

| Hazard Statements | Precautionary Statements |
|---|--|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H336: May cause drowsiness or dizziness | P201: Obtain special instructions before use P202: Do not handle until all safety precautions have been read and understood. P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P233 + P403: Keep container tightly closed. Store in a well-ventilated place. P240 + P241: Ground/bond container and receiving equipment. Use explosion-proof equipment. P242 + P243: Use only non-sparking tools. Take precautionary measures against static discharge. P261: Avoid breathing dust/fume/gas/mist/vapors/spray P270: Do not eat, drink or smoke when using this product. P280: Wear protective gloves/protective clothing/eye protection/face protection. P501: Dispose of contents/ container to an approved waste disposal plant. |
| P301+310: IF SWALLOWED: Immediately call a POISON CENTER/Medical Attention P331: Do NOT induce vomiting. P303+361+353: IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water [or shower]. | Response P304+340: IF INHALED: Remove person to fresh air and keep comfortable for breathing. P305+P351+P338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. P308+313: IF exposed or concerned: Get medical advice/attention. |

Physical Hazards Not Otherwise Classified (PNOC): May form explosive peroxides

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS | EINECS | REACH Registration Number | CONCENTRATION % by Weight |
|---------------|----------|-----------|------------------------------|------------------------------|
| Acetone | 67-64-1 | 200-662-2 | 01-2119471330-49-0000 | 75 - 100 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 01-2119453616-35-0000 | 2 - 15 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.
 * Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).
 # indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.
Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.
Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.
Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

SECTION 5 - FIREFIGHTING MEASURES

| | | | |
|--|--------------|-------------|------------|
| Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog. | HMIS | NFPA | 0-Minimal |
| Unsuitable Extinguishing Media: Water spray or stream. | Health | 2 | 1-Slight |
| Exposure Hazards: Inhalation and dermal contact | Flammability | 3 | 2-Moderate |
| Combustion Products: Oxides of carbon and smoke | Reactivity | 0 | 3-Serious |
| Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks. | PPE | B | 4-Severe |

Safety Glasses and Gloves

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).
Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.
Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.
Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.
Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH 8-hr TLV | ACGIH 15-min STEL | OSHA 8-hr PEL | OSHA 15 min STEL | OSHA PEL-Ceiling | CAL/OSHA 8-hr PEL | CAL/OSHA Ceiling | CAL/OSHA 15-min STEL |
|------------------|---------------|----------------------|-------------------------|---------------------|---------------------|---------------------|-------------------------|---------------------|-------------------------|
| | Acetone | 250 ppm | 500 ppm | 1000 ppm | N/E | N/E | 500 ppm | 3000 ppm | 750 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.
Monitoring: Maintain breathing zone airborne concentrations below exposure limits.
Personal Protective Equipment (PPE):
Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.
Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.
Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.



GHS SAFETY DATA SHEET

WELD-ON® C-65™ Low VOC Cleaner for Plastic Pipe

Date Revised: APR 2020
Supersedes: DEC 2019

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | | |
|---|---|-----------------------------------|---|
| Appearance: | Clear, thin liquid | Odor Threshold: | 0.88 ppm (Cyclohexanone) |
| Odor: | Ketone | Boiling Range: | 56°C (133°F) to 156°C (313°F) |
| pH: | Not Applicable | Evaporation Rate: | > 1.0 (BUAC = 1) |
| Melting/Freezing Point: | -95°C (-139°F) Based on first melting component: Acetone | Flammability: | Category 2 |
| Boiling Point: | 56°C (133°F) Based on first boiling component: Acetone | Flammability Limits: | LEL: 1.1% based on Cyclohexanone UEL: 12.8% based on Acetone |
| Flash Point: | -20°C (-4°F) T.C.C. based on Acetone | Vapor Pressure: | 190 mm Hg @ 20°C (68°F): Acetone |
| Specific Gravity: | 0.794 @23°C (73°F) | Vapor Density: | >2.0 (Air = 1) |
| Solubility: | Solvent portion soluble in water. | Other Data: Viscosity: | Water-thin |
| Partition Coefficient n-octanol/water: | Not Available | Decomposition Temperature: | Not Applicable |
| Auto-ignition Temperature: | 465°C (869°F): Acetone | | |
| VOC Content: | When applied as directed, per SCAQMD Rule 1171, VOC content is: = 25 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

Reactivity: Heating may cause a fire

Stability: Stable

Hazardous decomposition products: None in normal use. When forced to burn, this product gives off oxides of carbon and smoke.

Conditions to avoid: Keep away from heat, sparks, open flame and other ignition sources.

Incompatible Materials: Oxidizers, strong acids and bases, amines, ammonia

SECTION 11 - TOXICOLOGICAL INFORMATION

Likely Routes of Exposure: Inhalation, Eye and Skin Contact

Acute symptoms and effects:

Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.

Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.

Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.

Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.

Chronic (long-term) effects: Defatting dermatitis with prolonged use. In humans, passes the placental barrier, detected in maternal milk. (Based on Acetone) Repeated exposure may cause skin dryness and cracking

Health Hazards Not Otherwise Classified: This material may cause defatting and irritation of skin (Dermatitis) upon prolonged or repeated contact.

Respiratory or Skin Sensitization: Not Applicable

| | | | | | |
|-----------------------------|-----------------------|---------------------|-----------------------|---------------------------------|-----------------------------|
| Carcinogenicity: | Not Established | | | | |
| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

| | | | |
|------------------|--|--|--|
| Toxicity: | LD50 (Oral) | LD50 (Dermal) | LC50 (Inhalation) |
| | Acetone 5800 mg/kg (rat) Cyclohexanone 1535 mg/kg (rat) | 20000 mg/kg (rabbit) 948 mg/kg (rabbit) | 50,100 mg/m3 (rat) 4 hrs. 8,000 PPM (rat) |

| | |
|--------------------------|---|
| Acute Toxicity | Category 2 |
| Calculated (ATEs) | Acute (Oral) Toxicity: Category 2 Acute (Dermal) Toxicity: Category 2 Acute (Inhalation) Toxicity: Category 2 |

| | | | |
|---|--------------------------------------|--------------------------|-------------------------------|
| Specific Target Exposure Toxicity (Single Exposure): | Category | Route of Exposure | Affected Organs |
| | Acetone 3 Cyclohexanone N/E | Inhalation N/E | Central Nervous System N/E |

Specific Target Exposure Toxicity (Repeated Exposure): No Data Available

Aspiration Hazard: Based on available data, the classification criteria are not met.

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity:

| | | | |
|-------------------------------|--|--|---|
| Acute Aquatic Toxicity | LC50 Fish | EC50 Crustacea | ErC50 Algae |
| | Pimephales promelas (fathead minnow); 96-hour | Daphnia magna (water flea); 48-hour | Desmodesmus subspicatus (algae); 72-hour; static |
| Acetone Cyclohexanone | No Data Available > 100 mg/L | 7630 > 100 mg/L | No Data Available > 100 mg/L |

Mobility in Soil: If released into the environment, this product can move rapidly through the soil.

Degradability: Does not degrade rapidly based on quantitative tests. (Tetrahydrofuran)

Bioaccumulation: This product and its degradation products are not known to bioaccumulate..

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Dispose of waste and containers in compliance with applicable Federal, State, and Local Regulations. Consult disposal expert. Do not reuse empty containers.

SECTION 14 - TRANSPORT INFORMATION

| | |
|--|--|
| Proper Shipping Name: Flammable Liquid, n.o.s. (Acetone, Cyclohexanone) | EXCEPTION for Ground Shipping |
| Hazard Class: 3 | DOT Limited Quantity: Up to 1L per inner packaging, 30 kg gross weight per package. |
| Secondary Risk: None | Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as ORM-D |
| Identification Number: UN 1993 | TDG INFORMATION |
| Packing Group: PG II | TDG CLASS: FLAMMABLE LIQUID 3 |
| Label Required: Class 3 Flammable Liquid | SHIPPING NAME: Flammable Liquid, n.o.s. (Acetone, Cyclohexanone) |
| Marine Pollutant: NO | UN NUMBER/PACKING GROUP: UN 1993, PG II |

SECTION 15 - REGULATORY INFORMATION

Precautionary Label Information: Highly Flammable, Irritant
F, Xi

Symbols:

Ingredient Listings: USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS)

Compliance Statement: This SDS was prepared to be in accordance with:
US OSHA Hazard Communication Standard 29 CFR 1910.1200 (Rev 2012)
Canadian Workplace Hazardous Materials Information System (WHMIS) 2015
European Regulation (EC) No (EU) 2015/830 on classification, labelling and packaging of substances and mixtures

SECTION 16 - OTHER INFORMATION

Specification Information:

Department issuing data sheet: IPS, Safety Health & Environmental Affairs
E-mail address: <EHSinfo@ipscorp.com>

Training necessary: Yes, training in practices and procedures contained in product literature.

Reissue date / reason for reissue: 4/3/2020 / Updated GHS Standard Format

Intended Use of Product: Cleaner for Plastic Pipe (PVC, CPVC, ABS and Styrene)

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.

SAFETY DATA SHEET

Section 1 – Product & Company Identification

Product Name:
RIDGID Endura-Clear Thread Cutting Oil

Product Catalog No.:
32803, 32808, 32813, 32818

Recommended Use:
Thread Cutting

Restrictions on Use:
Use in the manufacturing process only

Company Information:

North America
Ridge Tool Company
400 Clark Street
Elyria, Ohio 44035-6001
1-800-519-3456
(8:00 am – 5:00 pm EST, M-F)
Emergency Telephone
call 9-1-1 or local emergency number
www.RIDGID.com

Issue Date: March 30, 2017

Section 2 – Hazards Identification

This product is classified as not hazardous per US OSHA 29CFR 1910.1200 (HazCom 2012) and Canada's Hazardous Products Regulations (WHMIS 2015).

GHS Label Elements: Not applicable

Section 3 – Composition / Information On Ingredients

| <u>Component:</u> | <u>CAS #</u> | <u>% By Weight</u> |
|-------------------|--------------|--------------------|
| Mineral Oil | Confidential | 60-100% |
| Zinc Compound | Confidential | 1-5% |

This product does not contain silicone or chlorinated additives.

Specific chemical identities and/or exact percentages have been withheld as trade secrets.

Product Name : RIDGID Endura-Clear Thread Cutting Oil

Section 4 – First Aid Measures

INGESTION:

Rinse mouth thoroughly. Call a Poison Center or doctor if you feel unwell. Do NOT induce vomiting.

INHALATION:

Move to fresh air. Call a Poison Center or doctor if you feel unwell.

SKIN CONTACT:

Remove contaminated/saturated clothing and shoes. Wash contact areas with soap and water. If skin irritation occurs: Get medical advice/attention.

EYE CONTACT:

Flush thoroughly with water. If irritation occurs, get medical assistance. Continue to rinse for at least 15 minutes.

MOST IMPORTANT SYMPTOMS/EFFECTS, ACUTE AND DELAYED

Symptoms:

No data available.

INDICATION OF IMMEDIATE MEDICAL ATTENTION AND SPECIAL TREATMENT NEEDED

Treatment:

Get medical attention as appropriate or if symptoms persist

Section 5 – Fire Fighting Measures

GENERAL FIRE HAZARDS:

No unusual fire or explosion hazards noted.

SUITABLE (AND UNSUITABLE) EXTINGUISHING MEDIA

Suitable extinguishing media:

No data available.

Unsuitable extinguishing media:

Do not use water jet as an extinguisher, as this will spread the fire.

SPECIFIC HAZARDS ARISING FROM THE CHEMICAL:

Heat may cause the containers to pressurize and possibly rupture. During fire, gases hazardous to health may be formed.

Product Name: RIDGID Endura-Clear Thread Cutting Oil

SPECIAL PROTECTIVE EQUIPMENT AND PRECAUTIONS FOR FIREFIGHTERS

Special firefighting procedures:

No data available.

Special protective equipment for fire-fighters:

Firefighters must use standard protective equipment appropriate for Industrial fires.

Section 6 – Accidental Release Measures

PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES:

See Section 8 of the SDS for Personal Protective Equipment. Do not handle damaged containers or spilled material unless wearing appropriate protective clothing. Keep unauthorized personnel away. Ensure adequate ventilation.

METHODS AND MATERIAL FOR CONTAINMENT AND CLEANING UP:

Absorb with sand or other inert absorbent. Stop the flow of material, if this is without risk.

ENVIRONMENTAL PRECAUTIONS:

Avoid release to the environment. Do not contaminate water sources or sewer. Prevent further leakage or spillage if safe to do so and protect against releases into the environment. Remediate as appropriate.

Section 7 – Handling And Storage

PRECAUTIONS FOR SAFE HANDLING:

Observe good industrial hygiene practices. Wear appropriate personal protective equipment. Do not expose to intense heat as product may expand and pressurize container.

CONDITIONS FOR SAFE STORAGE, INCLUDING ANY INCOMPATIBILITIES:

Store in original tightly closed container. Avoid contact with oxidizing agents. Store away from incompatible materials.

SHELF LIFE:

720 days

Product Name : RIDGID Endura-Clear Thread Cutting Oil

Section 8 – Exposure Controls / Personal Protection

EXPOSURE LIMITS:

| Chemical name | type | Exposure Limit Values | Source |
|---------------------|------|-----------------------|---|
| Mineral oil - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |

PROTECTIVE MEASURES:

Use personal protective equipment as required.

RESPIRATORY PROTECTION:

In case of inadequate ventilation use suitable respirator. Seek advice from supervisor on the company's respiratory protection standards.

EYE PROTECTION:

Wear safety glasses with side shields (or goggles).

SKIN AND BODY PROTECTION:

Wear protective clothing appropriate for the risk of exposure. Contact health and safety professional or manufacturer for specific information.

HYGIENE MEASURES:

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing to remove contaminants. Contaminated work clothing should not be allowed out of the workplace. Discard contaminated footwear that cannot be cleaned. Avoid contact with skin, eyes, and clothing.

Product Name : RIDGID Endura-Clear Thread Cutting Oil

Section 9 – Physical And Chemical Properties

| | |
|---|---|
| Appearance | |
| Physical State | Liquid |
| Form | No data available |
| Color | Amber |
| Odor | Mild petroleum |
| Odor Threshold | No data available |
| pH | No data available |
| Melting point/freezing point | No data available |
| Initial boiling point and boiling range | No data available |
| Flash point | 177 °C (351 °F) |
| Evaporation rate | No data available |
| Flammability (solid, gas) | No data available |
| Upper/lower limit on flammability or explosive limits | |
| Flammability limit - upper (%) | No data available |
| Flammability limit - lower (%) | No data available |
| Explosive limit – upper (%) | No data available |
| Explosive limit – lower (%) | No data available |
| Vapor pressure | No data available |
| Vapor density | No data available |
| Relative density | 0.9297 |
| Solubility(ies) | |
| Solubility in water | Insoluble |
| Solubility (other) | No data available |
| Partition coefficient (n-octanol/water) | No data available |
| Auto-ignition temperature | No data available |
| Decomposition temperature | No data available |
| Viscosity | 44.5 mm ² /s (40 °C, measured) |
| VOC | 1.1 g/l |

Product Name : RIDGID Endura-Clear Thread Cutting Oil

Section 10 – Stability And Reactivity

REACTIVITY:

Not reactive during normal use.

CHEMICAL STABILITY:

No data available.

POSSIBILITY OF HAZARDOUS REACTIONS:

None under normal conditions.

CONDITIONS TO AVOID:

Avoid heat or contamination.

INCOMPATIBLE MATERIALS:

No data available.

HAZARDOUS DECOMPOSITION PRODUCTS:

Contains a component which may release flammable substances, including trimethylpentene, by distillation in systems with solvent recovery. This may lead to accumulation in the solvent circuit.

Section 11 – Toxicological Information

INFORMATION ON LIKELY ROUTES OF EXPOSURE

Ingestion:

May be ingested by accident. Ingestion may cause irritation and malaise.

Inhalation:

Inhalation is the primary route of exposure. In high concentrations, vapors, fumes or mists may irritate nose, throat and mucus membranes.

Skin Contact:

Prolonged skin contact may cause redness and irritation.

Eye contact:

Eye contact is possible and should be avoided.

Product Name : RIDGID Endura-Clear Thread Cutting Oil

SYMPTOMS RELATED TO THE PHYSICAL, CHEMICAL AND TOXICOLOGICAL CHARACTERISTICS

Ingestion:

No data available.

Inhalation:

No data available.

Skin Contact:

No data available.

Eye contact:

No data available.

INFORMATION ON TOXICOLOGICAL EFFECTS

Acute toxicity

Oral Product:

ATEmix (): 2000 - 5000 mg/kg

Dermal Product:

ATEmix (): 2000 - 5000 mg/kg

Inhalation Product:

Not classified for acute toxicity based on available data.

Repeated dose toxicity Product:

No data available.

Skin Corrosion/Irritation Product:

No data available.

Serious Eye Damage/Eye Irritation Product:

No data available.

Respiratory or Skin Sensitization Product:

No data available.

Carcinogenicity Product: No data available.

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):

No carcinogenic components identified

Germ Cell Mutagenicity

In vitro Product:

No data available.

In vivo Product:

No data available.

Product Name : RIDGID Endura-Clear Thread Cutting Oil

Reproductive toxicity Product:

No data available.

Specific Target Organ Toxicity - Single Exposure Product:

No data available.

Specific Target Organ Toxicity - Repeated Exposure Product:

No data available.

Aspiration Hazard Product:

No data available.

Other effects:

No data available

Section 12 – Ecological Information

GENERAL INFORMATION:

This product has not been evaluated for ecological toxicity or other environmental effects.

Section 13 – Disposal Consideration

DISPOSAL INSTRUCTIONS:

Discharge, treatment, or disposal may be subject to national, state, or local laws. Dispose of waste at an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal. It is the responsibility of the product user or owner to determine at the time of disposal, which waste regulations must be applied.

CONTAMINATED PACKAGING:

Empty containers should be taken to an approved waste handling site for recycling or disposal.

Section 14 – Transportation Information

This material is not subject to transport regulations.

Product Name : RIDGID Endura-Clear Thread Cutting Oil

Section 15 – Regulatory Information

US FEDERAL REGULATIONS

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)
None present or none present in regulated quantities.

Superfund Amendments and Reauthorization Act of 1986 (SARA)
Hazard categories - None
SARA 313 (TRI Reporting)

| Chemical Identity | Reported threshold for other users | Reported threshold for other users |
|-------------------|------------------------------------|------------------------------------|
| zinc compound | 10000 lbs | 25000 lbs |

US STATE REGULATIONS

US. California Proposition 65
No component is regulated by CA Prop 65.

Section 16 – Other Information

Prepared by: Ridge Tool Company (Operating Standard 6-123)

Issue Date: March 30, 2017

Last Revision Date: June 23, 2015

RIDGE TOOL BELIEVES THE STATEMENTS, TECHNICAL INFORMATION AND RECOMMENDATIONS CONTAINED HEREIN ARE RELIABLE BUT THEY ARE GIVEN WITHOUT WARRANTY OR GUARANTEE OF ANY KIND, EXPRESSED OR IMPLIED, AND WE ASSUME NO RESPONSIBILITY FOR ANY LOSS, DAMAGE OR EXPENSE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THEIR USE.



Safety Data Sheet

May be used to comply with

OSHA's Hazard Communication Standard 29 CFR 1910.1200.

This standard must be consulted for specific requirements.

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

Product Name: Hawg Wash

Drawing Number: 58-97-1000

Issue Date: March 2015

Supersedes Date: July 2011

Milwaukee Electric Tool Corporation

13135 West Lisbon Road

Brookfield, Wisconsin 53005

www.milwaukeeetool.com

Company Phone Number: 262-781-3600 or

1-800-729-3878

Emergency Contact Number: 1-800-424-9300

Chemtrec: United States only

Recommended intended purpose to be used as a lubricant

SECTION 2: HAZARDS IDENTIFICATION

| Health | Environmental | Physical |
|--|--|--|
| Eye Irritation: No classified hazards | Acute Toxicity: No classified hazards | Flammable liquid: No classified hazards |
| Skin Irritation: No classified hazards | Chronic Toxicity: No classified hazards | |
| Skin Sensitisation: Category 1 | | |
| Acute Toxicity, Oral: No classified hazards | | |
| Acute Toxicity, Inhalation: No classified hazards | | |

GHS Label



| Hazard Statements | Precautionary Statements |
|-------------------------------------|--|
| May cause eye irritation | IF IN EYES: rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. |
| | IF eye irritation persists: get medical advice/attention. |
| May cause an allergic skin reaction | Wash skin/hands thoroughly after handling. |
| | IF skin irritation occurs: get medical advice/attention. |
| | Avoid breathing dust/fume/gas/mist/vapours/spray. |
| | Contaminated work clothing must not be allowed out of the workplace. |
| | Wear protective gloves/protective clothing/eye protection/face protection. |
| | Wash contaminated clothing before reuse. |
| May be harmful if swallowed | IF SWALLOWED: call a POISON CENTER or doctor/physician if you feel unwell. |
| May be harmful if inhaled | IF INHALED: call a POISON CENTER or doctor/physician if you feel unwell. |
| | Use personal protective equipment as required. |

Classified Hazards

This material is not hazardous under the criteria of the Federal OSHA Hazard Communication Standard 29CFR 1910.1200. This SDS contains valuable information for the safe handling and proper use of this product. Save this SDS for future reference.

Other Hazards

None known

SECTION 3: COMPOSITION / INFORMATION ON INGREDIENTS

Components listed in this section may contribute to the potential hazards associated with exposure to the concentrate. The product may contain additional non-hazardous or trade-secret components.

Chemical characterization

Lubricating grease: thickening agent, additives and solid lubricants in highly-refined mineral oil

| Chemical Name | CAS # | Concentration ¹ |
|--|----------|----------------------------|
| Hexylene glycol | 107-41-5 | < 10 |
| Triethanolamine | 102-71-6 | < 10 |
| Non-hazardous or trade secret materials | N/A | Balance |
| Note: This product has been evaluated and does not require any hazard warning label under the OSHA Hazard Communication Standard. | | |

¹ All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume

Carcinogenic Components: This product contains no carcinogens.

SECTION 4: FIRST AID MEASURES**EYE CONTACT:**

Hold eyelids open and flush with a steady, gentle stream of water for at least 15 minutes. If symptoms persist, contact a physician.

SKIN CONTACT:

Remove product from the skin by washing with a mild soap and water. Contaminated clothing should be removed to prevent prolonged exposure. If symptoms of exposure persist, contact physician. If product is injected into or under the skin, seek treatment immediately. (see Note to Physician)

INHALATION:

If signs or symptoms of overexposure occur, remove the person to fresh air. If symptoms persist, seek medical attention.

INGESTION:

First aid is not normally required; however, if symptoms of ingestion persist, seek medical attention.

NOTE TO PHYSICIAN:

When using high-pressure equipment, injection of product under the skin can occur. In this case, the casualty should be sent immediately to hospital. Do not wait for symptoms to develop. High-pressure hydrocarbon injection injuries may produce substantial necrosis of underlying tissue despite an innocuous appearing external wound. These injuries often require extensive emergency surgical debridement and all injuries should be evaluated by a specialist in order to assess the extent of injury. Early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

SECTION 5: FIRE FIGHTING MEASURES

NFPA 704 Hazard Class

No Data

HMIS



0 (Minimal)
1 (Slight)
2 (Moderate)
3 (Serious)
4 (Severe)

EXTINGUISHING MEDIA:

In accordance with NFPA guidance, dry chemical, foam, or CO₂ fire extinguishers are all acceptable. Note that while water fog extinguishers are also acceptable, **DO NOT** apply a direct stream of water onto burning product because it may cause spreading and increase fire intensity.

UNUSUAL FIRE & EXPLOSION HAZARDS:

No further data known.

FIRE-FIGHTING PROCEDURES AND EQUIPMENT:

Emergency responders in the danger area should wear bunker gear and self-contained breathing apparatus for fires beyond the incipient stage. See Section 8 of the MSDS for other PPE to be worn as conditions warrant.

See Section 9 for Flammable Properties including Flash Point and Flammable (explosive) limits.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Clean-Up Measures:

Important: As with any spill or leak, before responding ensure that you are familiar with the potential hazards and recommendations of the MSDS. Appropriate personal protective equipment must be worn. See Section 8 of this MSDS for PPE recommendations.

If possible, safely contain the spill with dikes or other spill response equipment appropriate for petroleum or organic material releases. Take measures to prevent spreading of product. Note that while product will ignite it will not readily burn. However, as a precaution eliminate ignition sources. Prevent from entering sewers or waterways. Large volumes may be transferred to an appropriate container for proper disposal. Small volumes or residues may be soaked up with absorbents. Spill response materials should be collected for proper disposal.

SECTION 7: HANDLING AND STORAGE

HANDLING:

As with any industrial chemical, handle the product in a manner that minimizes exposure to practicable levels. Prior to handling, consult Section 8 of this MSDS to evaluate personal protective equipment needs. Open containers slowly to relieve any pressure. Follow all other standard industrial hygiene practices.

Empty containers may contain product residue. All safety precautions taken when handling this product should also be taken when handling empty drums and containers. Keep containers closed when not in use.

Product residue in empty containers is combustible but will not readily burn. NOTE however, that excessive heating or cutting of empty containers may create an ignition source sufficient to start a fire and in extreme cases, cause an explosion.

STORAGE:

Protect product quality by storing indoors and away from extreme temperatures. Close all containers when not in use.

SPECIAL COMMENTS:

Do not mix with nitrites. This product contains an amine that may react, under certain conditions, with nitrites to form nitrosamines.

No further data known.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Selection of personal protective equipment should be based upon the anticipated exposure and made in accordance with OSHA's Personal Protective Equipment Standard found in 29 CFR 1910 Subpart I. The following information may be used to assist in PPE selection.

| Chemical Name | OSHA PEL | ACGIH TLV | California Prop 65 Reg. Y/N | IARC/NTP Y/N |
|--|-----------------------------|-----------|-----------------------------|--------------|
| Hexylene glycol | 25 ppm | 25 ppm | N | N |
| Triethanolamine | TWA 5mg/m ³ * | | N | N |
| Note: This product has been evaluated and does not require any hazard warning label under the OSHA Hazard Communication Standard. | | | | |
| * As oil mist, if generating | | | | |

EYE PROTECTION

Wear eye protection appropriate to prevent eye exposure. Where splashing is not likely, chemical safety glasses with side shields are recommended. Where splashing may occur, chemical goggles or full face shield is recommended.

SKIN PROTECTION:

Gloves are not normally needed during normal conditions of use. If health effects are experienced, oil or chemical resistant gloves such as butyl or nitrile are recommended.

Where splashing or soaking is likely, wear oil or chemical resistant clothing to prevent exposure.

RESPIRATORY PROTECTION:

A respirator may be worn to reduce exposure to vapors, dust, or mist. Select a NIOSH/MSHA approved respirator appropriate for the type and physical character of the airborne material. A self-contained breathing apparatus is recommended in all situations where airborne contaminant concentration has not been confirmed to be below safe levels. Respirator use should comply with the OSHA Respirator Protection Standard found in CFR 1910.134.

ENGINEERING CONTROLS:

Normal general ventilation is expected to be adequate. It is recommended that ventilation be designed in all instances to maintain airborne concentrations at lowest practicable levels. Ventilation should at a minimum, prevent airborne concentrations from exceeding any exposure limits listed in Section 2 of this MSDS.

The user may wish to refer to 29 CFR 1910.1000 (d) (2) and the ACGIH "Threshold Limit Values for Chemical Substances and Physical Agents Biological Exposure Indices" (Appendix C) for the determination of exposure limits of mixtures. An industrial hygienist or similar professional may be consulted to confirm that the calculated exposure limits apply.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

Data represent typical values and are not intended to be specifications. NA=Not Applicable; ND=No Data

| | |
|---|--|
| Physical state: Liquid | Flammability (solid, gas): ND |
| Colour: Hazy Dark Brown | Upper Explosive Limits (vol % in air): ND |
| Odor: Sassafras | Lower Explosive Limits (vol % in air): ND |
| Odor Threshold: ND | Vapor pressure: ND |
| pH: ND | Vapor density: ND |
| Melting/Freezing Point: ND | Relative density: ND |
| VOC Content: ND | Solubility: Complete |
| Boiling Point: 217 °F (105 °C) | Partition Coefficient: ND |
| Flash Point: NA | Auto-ignition Temperature: ND |
| Evaporation Rate: ND | Decomposition Temperature: ND |
| Specific Gravity: 1.033 | Viscosity: ND |

SECTION 10: STABILITY AND REACTIVITY

INCOMPATIBLE MATERIALS:

This product is incompatible with strong oxidizing agents.

DECOMPOSITION PRODUCTS MAY INCLUDE:

Thermal decomposition products are dependent on combustion conditions. A complex mixture of airborne solid, liquid, particulates and gasses may evolve when the material burns. Combustion by-products may include: oxides of carbon, ammonia and oxides of nitrogen, incompletely burned hydrocarbons as fumes and smoke.

CONDITIONS TO AVOID:

Avoid contact with incompatible materials and exposure to extreme temperatures.

POLYMERIZATION:

This product is not expected to polymerize.

CHEMICAL STABILITY:

This product is stable.

REACTIVITY:

Stable under normal ambient and anticipated conditions of use.

SECTION 11: TOXICOLOGY INFORMATION

LIKELY ROUTES OF EXPOSURE: **Inhalation, Eye and Skin contact**

ACUTE SYMPTOMS AND EFFECTS:

| | |
|----------------------|---|
| Inhalation: | No further toxicological data known |
| Eye contact: | No further toxicological data known |
| Skin contact: | Contact with a component of this product may cause an allergic skin reaction in a small percentage of the population. |
| Ingestion: | No further toxicological data known |

OTHER:

Unknown toxicity (%): Oral 29.3; Dermal 35.3; Inhal (dust/mist) 42.9; Inhal (vapor) 100.

SECTION 12: ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION:

This product has not been evaluated for ecotoxicity. As with any industrial chemical, exposure to the environment should be prevented and minimized wherever possible.

TOXICITY:

No data available

PERSISTENCE AND DEGRADABILITY (BIOPERSISTENCY & BIODEGRADABILITY):

No data available

POTENTIAL OF BIOACCUMULATION:

No data available

MOBILITY IN SOIL:

No data available

OTHER ADVERSE EFFECTS:

No data available

SECTION 13: DISPOSAL CONSIDERATIONS

WASTE DISPOSAL:

Ensure that collection, transport, treatment, and disposal of waste product, containers and rinsate complies with all applicable laws and regulations. Note that use, mixture, processing, or contamination of the product may cause the material to be classified as a hazardous waste. It is the responsibility of the product user or owner to determine at the time of disposal, whether the product is regulated as a hazardous waste.

SECTION 14: TRANSPORT INFORMATION

DOT HAZARDOUS MATERIAL INFORMATION:

Not otherwise DOT regulated.

SECTION 15: REGULATORY INFORMATION

FEDERAL REGULATIONS:

SARA 313:

This product contains NONE of the substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR Part 372.

Clean Water Act / Oil Pollution Act:

This product contains mineral oil and is subject to regulation by Section 311 of the Clean Water Act and the Oil Pollution Act. Releases of the product into or leading to surface waters must be reported to the National Response Center at 1-800-424-8802.

CERCLA Reportable Quantity:

Any components listed below have been assigned a reportable quantity (RQ) by the Federal EPA. Releases of the product into the environment that exceed the RQ for a particular component must be reported to the National Response Center at 1-800-424-8802.

Toxic Substance Control Act:

The components of this product are listed on the TSCA Inventory.

Ozone Depleting Substances:

This product contains no ozone depleting substances as defined by the Clean Air Act.

Hazardous Air Pollutants:

Any components listed below are defined by the Federal EPA as hazardous air pollutants.

STATE REGULATIONS:

This product contains mineral oil, and as used, may be regulated by the state used oil regulations. Check with the appropriate state agency to determine whether such a regulation exists.

No further data known.

SECTION 16: OTHER INFORMATION

ABBREVIATIONS:

- TSCA Toxic Substance Control Act
- ICAO International Civil Aviation Organization
- IMDG International Maritime Dangerous
- OSHA Occupational Safety and Health
- IARC/NTP International Agency for Research on Cancer/National Toxicology Program
- SARA Superfund Amendments and Reauthorization Act of 1986
- ACGIH American Conference of Governmental Industrial Hygienists
- NIOSH/MSHA National Institute for Occupational Safety Health/
Mine Safety and Health Administration
- WHMIS Workplace Hazardous Materials Information System

Prepared by: Milwaukee Electric Tool Corporation

The information and recommendations set forth are made in good faith and believed to be accurate as of the date of preparation. **MILWAUKEE ELECTRIC TOOL CORPORATION** makes no warranty, expressed or implied, regarding the accuracy of this data or the results to be obtained from the use thereto. All risks associated with product use are assumed by the user.

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product form : Mixture
 Trade name : CIP 200[®] Acid-Based Process and Research Cleaner
 Product code : 1D20

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Acid-Based Process and Research Cleaner

1.3. Details of the supplier of the safety data sheet

STERIS Corporation
 P. O. Box 147, St. Louis, MO 63166, US
 Telephone Number for Information: 1-800-444-9009 (Customer Service-Scientific Products)

1.4. Emergency telephone number

Emergency number : US Emergency Telephone No.1-314-535-1395 (STERIS); 1-800-424-9300 (CHEMTREC)

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

| | |
|-------------------------------------|------|
| Met. Corr. 1 | H290 |
| Acute Tox. 4 (Oral) | H302 |
| Acute Tox. 4 (Inhalation:dust,mist) | H332 |
| Skin Corr. 1B | H314 |
| Eye Dam. 1 | H318 |

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US) :



GHS05

GHS07

Signal word (GHS-US) : Danger

Hazard statements (GHS-US) : H290 - May be corrosive to metals
 H302+H332 - Harmful if swallowed or if inhaled
 H314 - Causes severe skin burns and eye damage

Precautionary statements (GHS-US) : P234 - Keep only in original container
 P260 - Do not breathe mist, spray, vapors
 P261 - Avoid breathing mist, spray, vapors
 P264 - Wash hands thoroughly after handling
 P270 - Do not eat, drink or smoke when using this product
 P280 - Wear protective gloves/protective clothing and eye/face protection
 P301+P312 - IF SWALLOWED: Call a doctor if you feel unwell
 P301+P330+P331 - IF SWALLOWED: Rinse mouth. Do NOT induce vomiting
 P303+P361+P353 - IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower
 P304+P340 - IF INHALED: Remove person to fresh air and keep comfortable for breathing
 P305+P351+P338 - IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
 P406 - Store in corrosive resistant container with a resistant inner liner
 P501 - Dispose of contents/container to comply with applicable local, national and international regulation.

2.3. Other hazards

No additional information available.

SECTION 3: Composition/information on ingredients

3.1. Substance

Not applicable.

Full text of H-phrases: see section 16.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

3.2. Mixture

| Name | Product identifier | % | GHS-US classification |
|-----------------|--|---------|--|
| Phosphoric acid | (CAS No) 7664-38-2 (REACH No) 01-2119485924-24-0098 | 30 - 60 | Met. Corr. 1, H290 Acute Tox. 4 (Oral), H302 Acute Tox. 3 (Inhalation:dust,mist), H331 Skin Corr. 1B, H314 |
| Citric acid | (CAS No) 77-92-9 (REACH No) 01-2119457026-42-0067 | 3 - 7 | Eye Irrit. 2A, H319 |

SECTION 4: First aid measures

4.1. Description of first aid measures

- First-aid measures general : Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).
- First-aid measures after inhalation : Remove to fresh air and keep at rest in a position comfortable for breathing. If not breathing, give artificial respiration. Get medical attention.
- First-aid measures after skin contact : Immediately flush skin with plenty of water for at least 15 minutes. Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. Get medical advice/attention.
- First-aid measures after eye contact : In case of contact with eyes flush immediately with plenty of flowing water for 10 to 15 minutes holding eyelids apart and consult an ophthalmologist. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately get medical attention.
- First-aid measures after ingestion : If victim completely conscious/alert. Rinse mouth. Do NOT induce vomiting. Immediately call a POISON CENTER or doctor/physician. Give water or milk if the person is fully conscious.

4.2. Most important symptoms and effects, both acute and delayed

- Symptoms/injuries : Symptoms may be delayed. Corrosive to eyes and skin. Causes severe skin burns and eye damage.
- Symptoms/injuries after inhalation : Toxic if inhaled.
- Symptoms/injuries after skin contact : Corrosive to eyes and skin.
- Symptoms/injuries after eye contact : Causes serious eye damage.
- Symptoms/injuries after ingestion : Swallowing a small quantity of this material will result in serious health hazard. Irritating to the respiratory system, may cause throat pain and cough.

4.3. Indication of any immediate medical attention and special treatment needed

No additional information available.

SECTION 5: Firefighting measures

5.1. Extinguishing media

- Suitable extinguishing media : Use extinguishing media appropriate for surrounding fire. Foam. Dry powder. Carbon dioxide. Sand.
- Unsuitable extinguishing media : Do not use a heavy water stream.

5.2. Special hazards arising from the substance or mixture

- Hazardous decomposition products in case of fire : Thermal decomposition generates: Fume. Carbon monoxide. Carbon dioxide. Phosphorous oxide

5.3. Advice for firefighters

- Firefighting instructions : Exercise caution when fighting any chemical fire. Prevent fire-fighting water from entering environment.
- Protective equipment for firefighters : Use self-contained breathing apparatus. Do not enter fire area without proper protective equipment, including respiratory protection.
- Other information : Very flammable gas (hydrogen) may be formed on contact with metals.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

- General measures : Do not breathe fumes, vapors. Avoid contact with skin, eyes and clothes.

6.1.1. For non-emergency personnel

- Protective equipment : Wear protective gloves and eye/face protection. For further information refer to Section 8: Exposure-controls/personal protection.
- Emergency procedures : Stop leak if safe to do so. Evacuate unnecessary personnel.

6.1.2. For emergency responders

- Protective equipment : Equip cleanup crew with proper protection.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

Emergency procedures : Ventilate area.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams. Leftovers: Neutralize with sodium bicarbonate. Neutralize with dry sodium carbonate. Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. Absorb spillage to prevent material damage. Collect spillage. Store away from other materials. Comply with applicable local, national and international regulation.

6.4. Reference to other sections

See Heading 8. Exposure controls and personal protection.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Additional hazards when processed : May be corrosive to metals.
Precautions for safe handling : Product for industrial use only. Read label before use. Provide good ventilation in process area to prevent formation of vapor. Avoid all eye and skin contact and do not breathe vapor and mist. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.
Hygiene measures : Take care for general good hygiene and housekeeping. Wash hands thoroughly after handling. Do not eat, drink or smoke when using this product.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Provide adequate ventilation. A washing facility/water for eye and skin cleaning purposes should be present.
Storage conditions : Keep only in the original container in a cool, well ventilated place. Keep container closed when not in use.
Incompatible materials : Strong oxidizing agents. Strong bases. Aluminium.
Storage area : Store in dry, cool, well-ventilated area.
Special rules on packaging : Correctly labelled.
Packaging materials : Keep only in the original container. Store in corrosive resistant container with a resistant inner liner.

7.3. Specific end use(s)

No additional information available.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Phosphoric acid (7664-38-2) | | |
|-----------------------------|-------------------------------------|---------------------|
| USA ACGIH | ACGIH TWA (mg/m ³) | 1 mg/m ³ |
| USA ACGIH | ACGIH STEL (mg/m ³) | 3 mg/m ³ |
| USA OSHA | OSHA PEL (TWA) (mg/m ³) | 1 mg/m ³ |

8.2. Exposure controls

Appropriate engineering controls : Ensure adequate ventilation. Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure.
Personal protective equipment : Avoid all unnecessary exposure. Personal protective equipment should be selected based upon the conditions under which this product is handled or used. Protective clothing. Gloves. Protective goggles.



Hand protection : Wear rubber gloves of suitable material, such as butyl, natural, neoprene, nitrile, polyethylene, polyvinyl chloride
Eye protection : Wear chemical splash goggle.
Skin and body protection : Wear suitable protective clothing. Wear long sleeves. Boots.
Respiratory protection : Work in well-ventilated zones or use proper respiratory protection. Wear appropriate mask.
Other information : Do not eat, drink or smoke during use.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|--|----------------------------------|
| Physical state | : Liquid |
| Appearance | : Clear to hazy |
| Color | : Colorless |
| Odor | : Mild odor, characteristic |
| Odor threshold | : No data available |
| pH | : No data available |
| pH solution | : Approximately 2 (1% solution) |
| Relative evaporation rate (butylacetate=1) | : No data available |
| Melting point | : No data available |
| Freezing point | : No data available |
| Boiling point | : No data available |
| Flash point | : >198°F (92.2°C) |
| Self ignition temperature | : No data available |
| Decomposition temperature | : No data available |
| Flammability (solid, gas) | : No data available |
| Vapor pressure | : No data available |
| Relative vapor density at 20 °C | : No data available |
| Relative density | : No data available |
| Density | : ca. 1.34 g/ml Specific Gravity |
| Solubility | : Water: Completely soluble |
| Log Pow | : No data available |
| Log Kow | : No data available |
| Viscosity, kinematic | : No data available |
| Viscosity, dynamic | : No data available |
| Explosive properties | : No data available |
| Oxidising properties | : No data available |
| Explosive limits | : No data available. |

9.2. Other information

No additional information available.

SECTION 10: Stability and reactivity

10.1. Reactivity

No additional information available.

10.2. Chemical stability

Stable under normal conditions of use.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Extremely high or low temperatures.

10.5. Incompatible materials

Strong oxidizers. Strong bases. Aluminium.

10.6. Hazardous decomposition products

Thermal decomposition generates: Corrosive vapors. Phosphorous oxide. Fume. Carbon monoxide. Carbon dioxide.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Harmful if swallowed. Harmful if inhaled.

| CIP 200 [®] Acid-Based Process and Research Cleaner | |
|--|---------------|
| LD50 oral rat | > 1000 mg/kg |
| ATE (dust,mist) | 1.500 mg/l/4h |

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

| Phosphoric acid (7664-38-2) | |
|-----------------------------|----------------------------------|
| LD50 oral rat | 1530 mg/kg |
| LD50 dermal rabbit | 2730 mg/kg |
| LC50 inhalation rat (mg/l) | > 0.85 mg/l (Exposure time: 1 h) |
| ATE (oral) | 1530.000 mg/kg bodyweight |
| ATE (dermal) | 2730.000 mg/kg bodyweight |
| ATE (dust,mist) | 0.850 mg/l/4h |

| | |
|--|--|
| Skin corrosion/irritation | : Causes severe skin burns and eye damage pH: 2 |
| Serious eye damage/irritation | : Causes serious eye damage pH: 2 |
| Respiratory or skin sensitisation | : Not classified Based on available data, the classification criteria are not met |
| Germ cell mutagenicity | : Not classified Based on available data, the classification criteria are not met |
| Carcinogenicity | : Not classified Based on available data, the classification criteria are not met |
| Reproductive toxicity | : Not classified Based on available data, the classification criteria are not met |
| Specific target organ toxicity (single exposure) | : Not classified Based on available data, the classification criteria are not met |
| Specific target organ toxicity (repeated exposure) | : Not classified Based on available data, the classification criteria are not met |
| Aspiration hazard | : Not classified Based on available data, the classification criteria are not met |
| Potential Adverse human effects and symptoms | : Harmful if swallowed. |

SECTION 12: Ecological information

12.1. Toxicity

| Citric acid (77-92-9) | |
|-----------------------------|---|
| LC50 fishes 1 | 1516 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [Static]) |
| EC50 Daphnia 1 | 120 mg/l (Exposure time: 72 h - Species: Daphnia magna) |
| Phosphoric acid (7664-38-2) | |
| LC50 fishes 1 | 3 - 3.5 mg/l (Exposure time: 96 h - Species: Gambusia affinis) |
| EC50 Daphnia 1 | 4.6 mg/l (Exposure time: 12 h - Species: Daphnia magna) |

12.2. Persistence and degradability

| CIP 200 [®] Acid-Based Process and Research Cleaner | |
|--|--|
| Persistence and degradability | The surfactant(s) contained in this preparation complies(comply) with the biodegradability criteria as laid down in Regulation (EC) No. 648/2004 on detergents. Data to support this assertion are held at the disposal of the competent authorities of the Member States and will be made available to them, at their direct request or at the request of a detergent manufacturer. |

12.3. Bioaccumulative potential

| CIP 200 [®] Acid-Based Process and Research Cleaner | |
|--|------------------|
| Bioaccumulative potential | Not established |
| Citric acid (77-92-9) | |
| Log Pow | -1.72 (at 20 °C) |

12.4. Mobility in soil

No additional information available.

12.5. Other adverse effects

Other information : Avoid release to the environment.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste disposal recommendations : Dispose in a safe manner in accordance with local/national regulations.
Additional information : Unused product : Hazardous waste (corrosive) based on pH.
Ecology - waste materials : Avoid release to the environment.

SECTION 14: Transport information

In accordance with DOT /ADR / RID / IMDG / IATA / ADN

14.1. UN number

UN-No : 1805
UN-No.(IATA) : 1805
UN-No. (IMDG) : 1805

14.2. UN proper shipping name

Proper Shipping Name : PHOSPHORIC ACID, LIQUID
Transport document description : UN 1805 PHOSPHORIC ACID, LIQUID, 8, III

14.3. Transport hazard class(es)

Class (UN) : 8
Class (IMDG) : 8
Hazard labels (UN) : 8



14.4. Packing group

Packing group (UN) : III

14.5. Environmental hazards

Other information : Corrosive.

14.6. Special precautions for user

Special transport precautions : 4 x 1 gal package not approved for air shipment.

14.6.1. Overland transport

Hazard identification number (Kemler No.) : 80
Classification code (UN) : C1
Orange plates :



Transport category (ADR) : 3
Tunnel restriction code : E
Limited quantities (ADR) : 5L
Excepted quantities (ADR) : E1
EAC code : 2R

14.6.2. Transport by sea

No additional information available.

14.6.3. Air transport

No additional information available.

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable.

CIP 200[®] Acid-Based Process and Research Cleaner

Safety Data Sheet

according to the federal final rule of hazard communication revised on 2012 (HazCom 2012)

SECTION 15: Regulatory information

15.1. US Federal regulations

Citric acid (77-92-9)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Phosphoric acid (7664-38-2)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

15.2. US State regulations

Not applicable.

SECTION 16: Other information

Revision Date : 09/26/2018

Full text of H-phrases:

| | |
|-------------------------------------|---|
| Acute Tox. 3 (Inhalation:dust,mist) | Acute toxicity (inhalation:dust,mist), Category 3 |
| Acute Tox. 4 (Inhalation:dust,mist) | Acute toxicity (inhalation:dust,mist), Category 4 |
| Acute Tox. 4 (Oral) | Acute toxicity (oral), Category 4 |
| Eye Dam. 1 | Serious eye damage/eye irritation, Category 1 |
| Eye Irrit. 2 | Serious eye damage/eye irritation, Category 2 |
| Met. Corr. 1 | Corrosive to metals, Category 1 |
| Skin Corr. 1B | Skin corrosion/irritation, Category 1A |
| H290 | May be corrosive to metals |
| H302 | Harmful if swallowed |
| H314 | Causes severe skin burns and eye damage |
| H318 | Causes serious eye damage |
| H319 | Causes serious eye irritation |
| H331 | Toxic if inhaled |
| H332 | Harmful if inhaled |

NFPA health hazard


: 2 - Intense or continued exposure could cause temporary incapacitation or possible residual injury unless prompt medical attention is given

NFPA fire hazard

: 0 - Materials that will not burn.

NFPA reactivity

: 1 - Normally stable, but can become unstable at elevated temperatures and pressures or may react with water with some release of energy, but not violently



SDS US (GHS HazCom 2012)

The information on this sheet is not a specification and does not guarantee specific properties. The information is intended to provide general knowledge as to health and safety based upon our knowledge of the handling, storage and use of the product. It is not applicable to unusual or non-standard uses of the product or where instruction or recommendations are not followed.

HIT-HY 200-R

Safety information for 2-Component-products

Date of issue: 15/10/2018

Revision date: 15/10/2018

Supersedes: 25/09/2015

Version: 3.7

SECTION 1: Kit identification

1.1 Product identifier

Product name

HIT-HY 200-R



Product code

BU Anchor

1.2 Details of the supplier of the Safety information for 2-Component-products

Hilti, Inc.
Legacy Tower, Suite 1000
7250 Dallas Parkway
TX 75024 Plano - USA
T +1 9724035800
1-800-879-8000 toll free - F +1 918 254 0522

SECTION 2: General information

Storage

Storage temperature : 5 - 25 °C

A SDS for each of these components is included. Please do not separate any component SDS from this cover page

This Kit should be handled in accordance with good laboratory practices and appropriate personal protective equipment should be used

SECTION 3: Kit contents

Classification of the Product

GHS-US classification

Eye Irrit. 2 H319 - Causes serious eye irritation
Skin Sens. 1 H317 - May cause an allergic skin reaction

Label elements

GHS-US labeling

Hazard pictograms (GHS-US)



GHS07

Signal word (GHS-US)

Warning

Hazardous ingredients

methacrylates, dibenzoyl peroxide

Hazard statements (GHS-US)

May cause an allergic skin reaction
Causes serious eye irritation

Precautionary statements (GHS-US)

Avoid breathing dust/fume/gas/mist/vapors/spray.
Wash hands, forearms and face thoroughly after handling.
Contaminated work clothing must not be allowed out of the workplace
Wear protective gloves/protective clothing/eye protection/face protection.
If on skin: Wash with plenty of water
If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
Specific treatment (see supplemental first aid instruction on this label)


HIT-HY 200-R

Safety information for 2-Component-products

If skin irritation or rash occurs: Get medical advice/attention.
 If eye irritation persists: Get medical advice/attention.
 Wash contaminated clothing before reuse.
 Dispose of contents/container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulation

Additional information

2-Component-foilpack, contains:
 Component A: Urethane methacrylate resin, inorganic filler
 Component B: Dibenzoyl peroxide, phlegmatized



| Name | General description | Quantity | Unit | GHS-US classification |
|-----------------|---------------------|----------|--------------|--|
| HIT-HY 200-R, A | | 1 | pcs (pieces) | Skin Sens. 1, H317 |
| HIT-HY 200-R, B | | 1 | pcs (pieces) | Eye Irrit. 2, H319 Skin Sens. 1, H317 |

SECTION 4: General advice

General advice: Restricted to professional users

SECTION 5: Safe handling advice

| | |
|-------------------------------|--|
| General measures | Spilled material may present a slipping hazard |
| Environmental precautions | Prevent entry to sewers and public waters Notify authorities if liquid enters sewers or public waters |
| Storage conditions | Keep cool. Protect from sunlight |
| Precautions for safe handling | Wear personal protective equipment Avoid contact with skin and eyes Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work Provide good ventilation in process area to prevent formation of vapor |
| Methods for cleaning up | This material and its container must be disposed of in a safe way, and as per local legislation Mechanically recover the product Store away from other materials. |
| For containment | Collect spillage. |
| Incompatible materials | Sources of ignition Direct sunlight |
| Incompatible products | Strong bases Strong acids |

SECTION 6: First aid measures

| | |
|--------------------------------------|---|
| First-aid measures after eye contact | Rinse immediately with plenty of water Remove contact lenses, if present and easy to do. Continue rinsing. Obtain medical attention if pain, blinking or redness persists |
| First-aid measures after ingestion | Rinse mouth. Drink plenty of water Get medical advice/attention. Do not induce vomiting Obtain emergency medical attention |

HIT-HY 200-R

Safety information for 2-Component-products

| | |
|---------------------------------------|--|
| First-aid measures after inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Allow victim to breathe fresh air Allow the victim to rest |
| First-aid measures after skin contact | Wash contaminated clothing before reuse. Wash with plenty of soap and water. If skin irritation or rash occurs: Get medical advice/attention. |
| First-aid measures general | Remove/Take off immediately all contaminated clothing. Never give anything by mouth to an unconscious person If you feel unwell, seek medical advice (show the label where possible) |
| Symptoms/effects after eye contact | May cause severe irritation |
| Symptoms/effects after skin contact | May cause an allergic skin reaction |
| Other medical advice or treatment | Treat symptomatically |

SECTION 7: Fire fighting measures

| | |
|--|--|
| Firefighting instructions | Use water spray or fog for cooling exposed containers Exercise caution when fighting any chemical fire Prevent fire-fighting water from entering environment |
| Protection during firefighting | Self-contained breathing apparatus Do not enter fire area without proper protective equipment, including respiratory protection |
| Hazardous decomposition products in case of fire | Thermal decomposition generates : Carbon dioxide Carbon monoxide |

SECTION 8: Other information

No data available

HIT-HY 200-R, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Date of issue: 10/15/2018

Revision date: 05/04/2018

Supersedes: 12/08/2015

Version: 3.6

SECTION 1: Identification

1.1. Identification

| | |
|--------------|-----------------|
| Product form | Mixture |
| Product name | HIT-HY 200-R, B |
| Product code | BU Anchor |

1.2. Relevant identified uses of the substance or mixture and uses advised against

| | |
|------------------------------|---|
| Use of the substance/mixture | Composite mortar component for fasteners in the construction industry |
|------------------------------|---|

1.3. Details of the supplier of the safety data sheet

Supplier

Hilti, Inc.
Legacy Tower, Suite 1000
7250 Dallas Parkway
TX 75024 Plano - USA
T +1 9724035800
1-800-879-8000 toll free - F +1 918 254 0522

Department issuing data specification sheet

Hilti Entwicklungsgesellschaft mbH
Hiltistraße 6
86916 Kaufering - Deutschland
T +49 8191 906310 - F +49 8191 90176310
anchor.hse@hilti.com

1.4. Emergency telephone number

| | |
|------------------|---|
| Emergency number | Chem-Trec Tel.: 1 800 424 9300 (USA, PR, Virgin Islands, Canada) Tel.: 703 527 3887 (Other countries) +1 918 8723000 1-800-879-8000 toll free |
|------------------|---|

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

Eye Irrit. 2 H319 - Causes serious eye irritation
Skin Sens. 1 H317 - May cause an allergic skin reaction
Full text of H statements : see section 16

2.2. Label elements

GHS-US labeling

Hazard pictograms (GHS-US)



GHS07

Signal word (GHS-US)

Warning

Hazard statements (GHS-US)

H317 - May cause an allergic skin reaction
H319 - Causes serious eye irritation

Precautionary statements (GHS-US)

P280 - Wear eye protection, protective clothing, protective gloves.
P262 - Do not get in eyes, on skin, or on clothing.
P305+P351+P338 - If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
P333+P313 - If skin irritation or rash occurs: Get medical advice/attention.
P337+P313 - If eye irritation persists: Get medical advice/attention.
P302+P352 - If on skin: Wash with plenty of water

HIT-HY 200-R, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/Information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

| Name | Product identifier | % | GHS-US classification |
|----------------------------|----------------------|---------|--|
| Quartz (SiO ₂) | (CAS-No.) 14808-60-7 | 40 - 60 | Carc. 1A, H350 |
| dibenzoyl peroxide | (CAS-No.) 94-36-0 | 10 - 25 | Org. Perox. B, H241 Eye Irrit. 2A, H319 Skin Sens. 1, H317 |

Full text of H-phrases: see section 16

SECTION 4: First aid measures

4.1. Description of first aid measures

| | |
|---------------------------------------|--|
| First-aid measures general | Remove/Take off immediately all contaminated clothing. Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible). |
| First-aid measures after inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Allow victim to breathe fresh air. Allow the victim to rest. |
| First-aid measures after skin contact | Wash contaminated clothing before reuse. Wash with plenty of soap and water. If skin irritation or rash occurs: Get medical advice/attention. |
| First-aid measures after eye contact | Rinse immediately with plenty of water. Remove contact lenses, if present and easy to do. Continue rinsing. Obtain medical attention if pain, blinking or redness persists. |
| First-aid measures after ingestion | Rinse mouth. Drink plenty of water. Get medical advice/attention. Do not induce vomiting. Obtain emergency medical attention. |

4.2. Most important symptoms and effects (acute and delayed)

| | |
|---|---|
| Potential Adverse human health effects and symptoms | Based on available data, the classification criteria are not met. |
| Symptoms/effects after skin contact | May cause an allergic skin reaction. |
| Symptoms/effects after eye contact | May cause severe irritation. |

4.3. Immediate medical attention and special treatment, if necessary

Treat symptomatically.

SECTION 5: Firefighting measures

5.1. Extinguishing media

| | |
|--------------------------------|--|
| Suitable extinguishing media | Water spray. Carbon dioxide. Dry powder. Foam. Sand. |
| Unsuitable extinguishing media | Do not use a heavy water stream. |

5.2. Special hazards arising from the substance or mixture

No additional information available

5.3. Advice for firefighters

| | |
|---------------------------|---|
| Firefighting instructions | Use water spray or fog for cooling exposed containers. Exercise caution when fighting any chemical fire. Prevent fire-fighting water from entering environment. |
|---------------------------|---|

HIT-HY 200-R, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Protection during firefighting

Self-contained breathing apparatus. Do not enter fire area without proper protective equipment, including respiratory protection.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures Spilled material may present a slipping hazard.

6.1.1. For non-emergency personnel

Emergency procedures Evacuate unnecessary personnel.

6.1.2. For emergency responders

Protective equipment Use personal protective equipment as required. Equip cleanup crew with proper protection.

Emergency procedures Ventilate area.

6.2. Environmental precautions

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

For containment Collect spillage.

Methods for cleaning up This material and its container must be disposed of in a safe way, and as per local legislation. Mechanically recover the product. Store away from other materials.

Other information Dispose of materials or solid residues at an authorized site.

6.4. Reference to other sections

For further information refer to section 8: "Exposure controls/personal protection". For further information refer to section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling Wear personal protective equipment. Avoid contact with skin and eyes. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work. Provide good ventilation in process area to prevent formation of vapor.

Hygiene measures Do not eat, drink or smoke when using this product. Always wash hands after handling the product. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before reuse.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions Keep cool. Protect from sunlight.

Incompatible products Strong bases. Strong acids.

Incompatible materials Sources of ignition. Direct sunlight.

Storage temperature 5 - 25 °C

Heat-ignition Keep away from heat and direct sunlight.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

| Quartz (SiO ₂) (14808-60-7) | | |
|---|--------------------------------|---------------------|
| OSHA | Remark (OSHA) | (3) See Table Z-3. |
| dibenzoyl peroxide (94-36-0) | | |
| ACGIH | ACGIH TWA (mg/m ³) | 5 mg/m ³ |
| ACGIH | Remark (ACGIH) | URT & skin irr |

HIT-HY 200-R, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| dibenzoyl peroxide (94-36-0) | | |
|------------------------------|-------------------------------------|---------------------|
| OSHA | OSHA PEL (TWA) (mg/m ³) | 5 mg/m ³ |

Additional information The product has a pasty consistency. Exposure limit values for respirable dusts are not relevant for this product.

8.2. Exposure controls

Personal protective equipment

Safety glasses. Gloves. Protective clothing. Avoid all unnecessary exposure.



Hand protection

Wear protective gloves. The permeation time is not the maximum wearing time! Generally speaking, it must be reduced. Contact with either mixtures of substances or different substances may shorten the protective function's effective duration.

Eye protection

Wear security glasses which protect from splashes.

Skin and body protection

Wear suitable protective clothing.

Environmental exposure controls

Avoid release to the environment.

Consumer exposure controls

Avoid contact during pregnancy/while nursing.

Other information

Do not eat, drink or smoke during use.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

| | |
|---|---------------------------|
| Physical state | Solid |
| Appearance | Thixotropic paste. |
| Color | white |
| Odor | characteristic |
| Odor threshold | Not determined |
| pH | No data available |
| Melting point | No data available |
| Freezing point | No data available |
| Boiling point | No data available |
| Flash point | No data available |
| Relative evaporation rate (butyl acetate=1) | No data available |
| Flammability (solid, gas) | No data available |
| Explosion limits | No data available |
| Explosive properties | Product is not explosive. |
| Oxidizing properties | No data available |
| Vapor pressure | No data available |
| Relative density | No data available |
| Relative vapor density at 20 °C | No data available |
| Specific gravity / density | 1.9 g/ml AW 4.3.23 |
| Solubility | No data available |
| Log Pow | No data available |
| Auto-ignition temperature | Not self-igniting |
| Decomposition temperature | No data available |
| Viscosity | No data available |
| Viscosity, kinematic | No data available |
| Viscosity, dynamic | 40 Pa.s HN-0333 |

HIT-HY 200-R, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

9.2. Other information

SADT 65 °C

SECTION 10: Stability and reactivity

10.1. Reactivity

No additional information available

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

No additional information available.

10.4. Conditions to avoid

Direct sunlight. Extremely high or low temperatures.

10.5. Incompatible materials

Strong acids. Strong bases.

10.6. Hazardous decomposition products

fume. Carbon monoxide. Carbon dioxide. Under normal conditions of storage and use, hazardous decomposition products should not be produced.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

| | |
|-----------------------------------|--|
| Acute toxicity | Not classified |
| Skin corrosion/irritation | Not classified |
| Serious eye damage/irritation | Causes serious eye irritation. |
| Respiratory or skin sensitization | May cause an allergic skin reaction. |
| Germ cell mutagenicity | Not classified |
| | Based on available data, the classification criteria are not met |
| Carcinogenicity | Not classified |

| Quartz (SiO ₂) (14808-60-7) | |
|---|---|
| IARC group | 1 - Carcinogenic to humans |
| Reproductive toxicity | Not classified |
| | Based on available data, the classification criteria are not met |
| Specific target organ toxicity – single exposure | Not classified |
| Specific target organ toxicity – repeated exposure | Not classified |
| Aspiration hazard | Not classified |
| Potential Adverse human health effects and symptoms | Based on available data, the classification criteria are not met. |
| Symptoms/effects after skin contact | May cause an allergic skin reaction. |
| Symptoms/effects after eye contact | May cause severe irritation. |

HIT-HY 200-R, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

| ADR | IMDG | IATA | RID |
|---|---------------|---------------|---------------|
| 14.1. UN number | | | |
| Not regulated | Not regulated | Not regulated | Not regulated |
| 14.2. UN proper shipping name | | | |
| Not regulated | Not regulated | Not regulated | Not regulated |
| 14.3. Transport hazard class(es) | | | |
| Not regulated | Not regulated | Not regulated | Not regulated |
| 14.4. Packing group | | | |
| Not regulated | Not regulated | Not regulated | Not regulated |
| 14.5. Environmental hazards | | | |
| Not regulated | Not regulated | Not regulated | Not regulated |
| Environmentally hazardous substances derogation applies (quantity of liquids ≤ 5 litres or net mass of solids ≤ 5 kg) | | | |
| No supplementary information available | | | |

14.6. Special precautions for user

- Overland transport

Special provision (ADR) 375

- Transport by sea

Special provision (IMDG) IMDG-Code 2.10.2.7

- Air transport

Special provision (IATA) A197

- Rail transport

Carriage prohibited (RID) No

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory

Chemical(s) subject to the reporting requirements of Section 313 or Title III of the Superfund Amendments and Reauthorization Act (SARA) of 1986 and 40 CFR Part 372.

| | | |
|--------------------|-----------------|----------|
| dibenzoyl peroxide | CAS-No. 94-36-0 | 10 - 25% |
|--------------------|-----------------|----------|

15.2. International regulations

CANADA

Quartz (SiO₂) (14808-60-7)

Listed on the Canadian DSL (Domestic Substances List)

EU-Regulations

No additional information available

HIT-HY 200-R, B

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

National regulations

| |
|--|
| Quartz (SiO₂) (14808-60-7) |
| Listed on IARC (International Agency for Research on Cancer) |

15.3. US State regulations

California Proposition 65 - This product does not contain any substances known to the state of California to cause cancer, developmental and/or reproductive harm

| Component | State or local regulations |
|--|----------------------------|
| Quartz (SiO ₂)(14808-60-7) | |
| dibenzoyl peroxide(94-36-0) | |


SECTION 16: Other information

Revision date 05/04/2018
 Other information None.

Full text of H-phrases:

| | |
|------|---------------------------------------|
| H241 | Heating may cause a fire or explosion |
| H317 | May cause an allergic skin reaction |
| H319 | Causes serious eye irritation |
| H350 | May cause cancer |

NFPA health hazard 1 - Materials that, under emergency conditions, can cause significant irritation.
 NFPA fire hazard 1 - Materials that must be preheated before ignition can occur.
 NFPA reactivity 0 - Material that in themselves are normally stable, even under fire conditions.



SDS_US_Hilti

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Revision Date 07/02/2018

Version 1.2

SECTION 1. Identification**Product identifier**

| | |
|----------------|--------------------|
| Product number | AX0115 |
| Product name | Acetone HPLC Grade |
| CAS-No. | 67-64-1 |

Relevant identified uses of the substance or mixture and uses advised against

| | |
|-----------------|----------------------|
| Identified uses | Reagent for analysis |
|-----------------|----------------------|

Details of the supplier of the safety data sheet

| | |
|---------|---|
| Company | EMD Millipore Corporation 400 Summit Drive Burlington Massachusetts 01803 United States of America General Inquiries: +1 800-645-5476 Monday to Friday, 9:00 AM to 4:00 PM Eastern Time (GMT-5) MilliporeSigma is a business of Merck KGaA, Darmstadt, Germany. |
|---------|---|

| | |
|----------------------------|--|
| Emergency telephone | 800-424-9300 CHEMTREC (USA) +1-703-527-3887 CHEMTREC (International) 24 Hours/day; 7 Days/week |
|----------------------------|--|

SECTION 2. Hazards identification**GHS Classification**

Flammable liquid, Category 2, H225
Eye irritation, Category 2A, H319
Specific target organ systemic toxicity - single exposure, Category 3, Central nervous system, H336
For the full text of the H-Statements mentioned in this Section, see Section 16.

GHS-Labeling*Hazard pictograms**Signal Word*

Danger

Hazard Statements

H225 Highly flammable liquid and vapor.
H319 Causes serious eye irritation.
H336 May cause drowsiness or dizziness.

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number AX0115
Product name Acetone HPLC Grade

Version 1.2

Precautionary Statements

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233 Keep container tightly closed.
P240 Ground/bond container and receiving equipment.
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242 Use only non-sparking tools.
P243 Take precautionary measures against static discharge.
P261 Avoid breathing dust/ fume/ gas/ mist/ vapors/ spray.
P264 Wash skin thoroughly after handling.
P271 Use only outdoors or in a well-ventilated area.
P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353 IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P312 Call a POISON CENTER/doctor if you feel unwell.
P337 + P313 If eye irritation persists: Get medical advice/ attention.
P370 + P378 In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233 Store in a well-ventilated place. Keep container tightly closed.
P403 + P235 Store in a well-ventilated place. Keep cool.
P405 Store locked up.
P501 Dispose of contents/ container to an approved waste disposal plant.

Other hazards

None known.

SECTION 3. Composition/information on ingredients

| | | |
|------------|-----------------------------------|--|
| Formula | CH ₃ COCH ₃ | C ₃ H ₆ O (Hill) |
| Molar mass | 58.08 g/mol | |

Hazardous ingredients

Chemical name (Concentration)

CAS-No.

acetone (>= 90 % - <= 100 %)

67-64-1

Exact percentages are being withheld as a trade secret.

SECTION 4. First aid measures

Description of first-aid measures

Inhalation

After inhalation: fresh air. Call in physician.

Skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower.

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number
Product name

AX0115
Acetone HPLC Grade

Version 1.2

Eye contact

After eye contact: rinse out with plenty of water. Call in ophthalmologist. Remove contact lenses.

Ingestion

After swallowing: caution if victim vomits. Risk of aspiration! Keep airways free. Pulmonary failure possible after aspiration of vomit. Call a physician immediately.

Never give anything by mouth to an unconscious person.

Most important symptoms and effects, both acute and delayed

Risk of corneal clouding.

Drying-out effect resulting in rough and chapped skin.

irritant effects, Drowsiness, Dizziness, narcosis, Nausea, Vomiting, Stomach/intestinal disorders, Headache, somnolence, Salivation, Coma

Indication of any immediate medical attention and special treatment needed

No information available.

SECTION 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media

Foam, Carbon dioxide (CO₂), Dry powder

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

Special hazards arising from the substance or mixture

Combustible.

Pay attention to flashback.

Forms explosive mixtures with air at ambient temperatures.

Vapors are heavier than air and may spread along floors.

Development of hazardous combustion gases or vapors possible in the event of fire.

Advice for firefighters

Special protective equipment for fire-fighters

In the event of fire, wear self-contained breathing apparatus.

Further information

Remove container from danger zone and cool with water. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Advice for non-emergency personnel: Do not breathe vapors, aerosols. Avoid substance contact.

Ensure adequate ventilation. Keep away from heat and sources of ignition. Evacuate the danger area, observe emergency procedures, consult an expert.

Advice for emergency responders:

Protective equipment see section 8.

Environmental precautions

Do not let product enter drains. Risk of explosion.

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number AX0115
Product name Acetone HPLC Grade

Version 1.2

Methods and materials for containment and cleaning up

Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up with liquid-absorbent material (e.g. Chemizorb®). Dispose of properly. Clean up affected area.

SECTION 7. Handling and storage

Precautions for safe handling

Observe label precautions.

Work under hood. Do not inhale substance/mixture. Avoid generation of vapors/aerosols.

Advice on protection against fire and explosion

Keep away from open flames, hot surfaces and sources of ignition. Take precautionary measures against static discharge.

Conditions for safe storage, including any incompatibilities

Protected from light.

Keep container tightly closed in a dry and well-ventilated place. Keep away from heat and sources of ignition.

Store at room temperature.

SECTION 8. Exposure controls/personal protection

Exposure limit(s)

Ingredients

| Basis | Value | Threshold limits | Remarks |
|------------------------|-----------------------------------|--------------------------------------|---------|
| <i>acetone 67-64-1</i> | | | |
| NIOSH/GUIDE | Recommended exposure limit (REL): | 250 ppm 590 mg/m ³ | |
| OSHA_TRANS | PEL: | 1,000 ppm 2,400 mg/m ³ | |
| Z1A | Time Weighted Average (TWA): | 750 ppm 1,800 mg/m ³ | |
| | Short Term Exposure Limit (STEL): | 1,000 ppm 2,400 mg/m ³ | |
| ACGIH | Short Term Exposure Limit (STEL): | 500 ppm | |
| | Time Weighted Average (TWA): | 250 ppm | |

Engineering measures

Technical measures and appropriate working operations should be given priority over the use of personal protective equipment.

Individual protection measures

Protective clothing should be selected specifically for the workplace, depending on concentration and quantity of the hazardous substances handled. The chemical resistance of the protective equipment should be inquired at the respective supplier.

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number AX0115
Product name Acetone HPLC Grade

Version 1.2

Hygiene measures

Change contaminated clothing. Preventive skin protection recommended. Wash hands after working with substance.

Eye/face protection

Safety glasses

Hand protection

full contact:

| | |
|---------------------|--------------|
| Glove material: | butyl-rubber |
| Glove thickness: | 0.7 mm |
| Break through time: | 480 min |

splash contact:

| | |
|---------------------|---------------|
| Glove material: | natural latex |
| Glove thickness: | 0.6 mm |
| Break through time: | 10 min |

The protective gloves to be used must comply with the specifications of EC Directive 89/686/EEC and the related standard EN374, for example KCL 898 Butoject® (full contact), KCL 706 Lapren® (splash contact).

The breakthrough times stated above were determined by KCL in laboratory tests acc. to EN374 with samples of the recommended glove types.

This recommendation applies only to the product stated in the safety data sheet and supplied by us as well as to the purpose specified by us. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: www.kcl.de).

Other protective equipment:

Flame retardant antistatic protective clothing.

Respiratory protection

required when vapors/aerosols are generated.

Recommended Filter type: Filter AX (EN 371)

The entrepreneur has to ensure that maintenance, cleaning and testing of respiratory protective devices are performed according to the instructions of the producer. These measures have to be properly documented.

SECTION 9. Physical and chemical properties

| | |
|----------------|--------------------------------------|
| Physical state | liquid |
| Color | colorless |
| Odor | fruity |
| Odor Threshold | 0.1 - 662.5 ppm |
| pH | 5 - 6 at 395 g/l 68 °F (20 °C) |
| Melting point | -139.7 °F (-95.4 °C) |

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number
Product nameAX0115
Acetone HPLC Grade

Version 1.2

| | |
|--|---|
| Boiling point/boiling range | 133.2 °F (56.2 °C) at 1,013 hPa |
| Flash point | < -4 °F (< -20 °C) Method: DIN 51755 Part 1 |
| Evaporation rate | No information available. |
| Flammability (solid, gas) | No information available. |
| Lower explosion limit | 2.6 %(V) |
| Upper explosion limit | 12.8 %(V) |
| Vapor pressure | 233 hPa at 68 °F (20 °C) |
| Relative vapor density | 2.01 |
| Density | 0.79 g/cm ³ at 68 °F (20 °C) |
| Relative density | No information available. |
| Water solubility | at 68 °F (20 °C) soluble |
| Partition coefficient: n-octanol/water | log Pow: -0.24 (experimental) Bioaccumulation is not expected. (Lit.) |
| Autoignition temperature | No information available. |
| Decomposition temperature | Distillable in an undecomposed state at normal pressure. |
| Viscosity, dynamic | 0.32 mPa.s at 68 °F (20 °C) |
| Explosive properties | Not classified as explosive. |
| Oxidizing properties | none |
| Ignition temperature | 869 °F (465 °C) DIN 51794 |
| Conductivity | 0.01 µS/cm at 68 °F(20 °C) |

SECTION 10. Stability and reactivity**Reactivity**

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number AX0115
Product name Acetone HPLC Grade

Version 1.2

Vapors may form explosive mixture with air.

Chemical stability

Sensitivity to light
Sensitive to air.

Possibility of hazardous reactions

Risk of ignition or formation of inflammable gases or vapors with:
chromosulfuric acid, chromyl chloride, ethanalamine, Fluorine, Strong oxidizing agents, strong reducing agents, Nitric acid, chromium(VI) oxide

Risk of explosion with:

nonmetallic oxyhalides, halogen-halogen compounds, Chloroform, nitrating acid, nitrosyl compounds, hydrogen peroxide, halogen oxides, organic nitro compounds, peroxy compounds

Exothermic reaction with:

Bromine, Alkali metals, alkali hydroxides, Halogenated hydrocarbon, Sulfur dichloride, phosphorous oxichloride

Conditions to avoid

Warming.

Incompatible materials

rubber, various plastics

Hazardous decomposition products

no information available

SECTION 11. Toxicological information

Information on toxicological effects

Likely route of exposure

Inhalation, Eye contact, Skin contact

Target Organs

Eyes

Skin

Respiratory system

Central nervous system

Acute oral toxicity

LD50 Rat: 5,800 mg/kg (ECHA)

Symptoms: Stomach/intestinal disorders, Risk of aspiration upon vomiting., Pulmonary failure possible after aspiration of vomit.

Acute inhalation toxicity

LC50 Rat: 76 mg/l; 4 h ; vapor

(Lit.)

Symptoms: mucosal irritations

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number AX0115
Product name Acetone HPLC Grade

Version 1.2

Acute dermal toxicity

LD50 Rabbit: 20,000 mg/kg
(IUCLID)

Skin irritation

Rabbit
Result: No irritation
(External MSDS)

Repeated exposure may cause skin dryness or cracking.

Eye irritation

Rabbit
Result: Eye irritation
(External MSDS)

Causes serious eye irritation.

Risk of corneal clouding.

Sensitization

Maximization Test Guinea pig
Result: negative

(ECHA)

Genotoxicity in vivo

Micronucleus test
Result: negative
(National Toxicology Program)

Genotoxicity in vitro

Mutagenicity (mammal cell test): chromosome aberration.
Result: negative
Method: OECD Test Guideline 473

Ames test

Salmonella typhimurium
Result: negative
Method: OECD Test Guideline 471

Carcinogenicity

Did not show carcinogenic effects in animal experiments. (IUCLID)

Specific target organ systemic toxicity - single exposure

May cause drowsiness or dizziness.
Target Organs: Central nervous system

Specific target organ systemic toxicity - repeated exposure

The substance or mixture is not classified as specific target organ toxicant, repeated exposure.

Aspiration hazard

Regarding the available data the classification criteria are not fulfilled.

Carcinogenicity

IARC

No ingredient of this product present at levels greater than or

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number
Product name

AX0115
Acetone HPLC Grade

Version 1.2

| | |
|-------|---|
| | equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC. |
| OSHA | No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens. |
| NTP | No ingredient of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP. |
| ACGIH | No ingredient of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH. |

Further information

After absorption:

Headache, Salivation, Nausea, Vomiting, Dizziness, narcosis, Coma

Other dangerous properties can not be excluded.

Handle in accordance with good industrial hygiene and safety practice.

SECTION 12. Ecological information

Ecotoxicity

Toxicity to fish

LC50 *Oncorhynchus mykiss* (rainbow trout): 5,540 mg/l; 96 h (Lit.)

Toxicity to daphnia and other aquatic invertebrates

EC50 *Daphnia magna* (Water flea): 6,100 mg/l; 48 h (Lit.)

EC5 *E.sulcatum*: 28 mg/l; 72 h (maximum permissible toxic concentration) (Lit.)

Toxicity to algae

NOEC *M.aeruginosa*: 530 mg/l; 8 d

Analytical monitoring: no

DIN 38412 (maximum permissible toxic concentration) (IUCLID)

Toxicity to bacteria

EC50 activated sludge: 59 - 67.4 mg/l; 30 min (Lit.)

EC5 *Pseudomonas putida*: 1,700 mg/l; 16 h (maximum permissible toxic concentration) (IUCLID)

Persistence and degradability

Biodegradability

91 %; 28 d

(IUCLID)

Readily biodegradable.

Biochemical Oxygen Demand (BOD)

1,850 mg/g (5 d)

(IUCLID)

Chemical Oxygen Demand (COD)

2,070 mg/g

(IUCLID)

SAFETY DATA SHEET

according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number AX0115
Product name Acetone HPLC Grade

Version 1.2

Theoretical oxygen demand (ThOD)
2,200 mg/g
(Lit.)

Bioaccumulative potential

Partition coefficient: n-octanol/water
log Pow: -0.24
(experimental)
Bioaccumulation is not expected. (Lit.)

Mobility in soil

No information available.

SECTION 13. Disposal considerations

The information presented only applies to the material as supplied. The identification based on characteristic(s) or listing may not apply if the material has been used or otherwise contaminated. It is the responsibility of the waste generator to determine the toxicity and physical properties of the material generated to determine the proper waste identification and disposal methods in compliance with applicable regulations. Disposal should be in accordance with applicable regional, national and local laws and regulations.

SECTION 14. Transport information

Land transport (DOT)

UN number UN 1090
Proper shipping name ACETONE
Class 3
Packing group II
Environmentally hazardous --

Air transport (IATA)

UN number UN 1090
Proper shipping name ACETONE
Class 3
Packing group II
Environmentally hazardous --
Special precautions for user no

Sea transport (IMDG)

UN number UN 1090
Proper shipping name ACETONE
Class 3
Packing group II
Environmentally hazardous --
Special precautions for user yes
EmS F-E S-D

SAFETY DATA SHEET
according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number AX0115
Product name Acetone HPLC Grade

Version 1.2

SECTION 15. Regulatory information

United States of America

SARA 313

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 302

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Clean Water Act

This product does not contain any Hazardous Substances listed under the U.S. CleanWater Act, Section 311, Table 116.4A.

This product does not contain any Hazardous Chemicals listed under the U.S. CleanWater Act, Section 311, Table 117.3.

DEA List I

Not listed

DEA List II

Listed

Ingredients

acetone

67-64-1

US State Regulations

Massachusetts Right To Know

Ingredients

acetone

Pennsylvania Right To Know

Ingredients

acetone

New Jersey Right To Know

Ingredients

acetone

California Prop 65 Components

This product does not contain any chemicals known to the State of California to cause cancer, birth, or any other reproductive defects.

Notification status

TSCA: All components of the product are listed in the TSCA-inventory.

DSL: All components of this product are on the Canadian DSL

SAFETY DATA SHEET
according to the (US) Hazard Communication Standard (29 CFR 1910.1200)

Product number AX0115
Product name Acetone HPLC Grade

Version 1.2

SECTION 16. Other information

Training advice

Provide adequate information, instruction and training for operators.

Labeling

Hazard pictograms



Signal Word

Danger

Hazard Statements

H225 Highly flammable liquid and vapor.

H319 Causes serious eye irritation.

H336 May cause drowsiness or dizziness.

EUH066 Repeated exposure may cause skin dryness or cracking.

Precautionary Statements

Prevention

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P240 Ground/bond container and receiving equipment.

Response

P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

Storage

P403 + P233 Store in a well-ventilated place. Keep container tightly closed.

Full text of H-Statements referred to under sections 2 and 3.

H225 Highly flammable liquid and vapor.

H319 Causes serious eye irritation.

H336 May cause drowsiness or dizziness.

Key or legend to abbreviations and acronyms used in the safety data sheet

Used abbreviations and acronyms can be looked up at www.wikipedia.org.

Revision Date 07/02/2018

The information contained herein is based on the present state of our knowledge. It characterizes the product with regard to appropriate safety precautions. It does not represent a warranty of any product properties and we assume no liability for any loss or injury which may result from the use of this information. Users should conduct their own investigations to determine the suitability of the information.

All rights reserved. Millipore and the "M" Mark are registered trademarks of Merck KGaA, Darmstadt, Germany.

Product Name: MOBIL 1 10W-30
Revision Date: 09 May 2019
Page 1 of 11

SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL 1 10W-30
Product Description: Synthetic Base Stocks and Additives
Product Code: 2015101010J2, 481176-00, 972273
Intended Use: Engine oil

COMPANY IDENTIFICATION

Supplier: EXXON MOBIL CORPORATION
22777 Springwoods Village Parkway
Spring, TX 77389 USA

24 Hour Health Emergency 609-737-4411
Transportation Emergency Phone 800-424-9300 or 703-527-3887 CHEMTREC
Product Technical Information 800-662-4525
MSDS Internet Address www.exxon.com, www.mobil.com

SECTION 2 HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

Other hazard information:

HAZARD NOT OTHERWISE CLASSIFIED (HNOC): None as defined under 29 CFR 1910.1200.

PHYSICAL / CHEMICAL HAZARDS

No significant hazards.

HEALTH HAZARDS

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

ENVIRONMENTAL HAZARDS

No significant hazards.

| | | | |
|------------------------|-----------|-----------------|---------------|
| NFPA Hazard ID: | Health: 0 | Flammability: 1 | Reactivity: 0 |
| HMIS Hazard ID: | Health: 0 | Flammability: 1 | Reactivity: 0 |

Product Name: MOBIL 1 10W-30

Revision Date: 09 May 2019

Page 2 of 11

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

| | |
|------------------|---|
| SECTION 3 | COMPOSITION / INFORMATION ON INGREDIENTS |
|------------------|---|

This material is defined as a mixture.

Hazardous Substance(s) or Complex Substance(s) required for disclosure

| Name | CAS# | Concentration* | GHS Hazard Codes |
|--|-------------|----------------|------------------|
| 1-DECENE, HOMOPOLYMER HYDROGENATED | 68037-01-4 | 1 - < 5% | H304 |
| DISTILLATES, HEAVY, C18-50 - BRANCHED, CYCLIC AND LINEAR | 848301-69-9 | 5 - < 10% | H304 |

* All concentrations are percent by weight unless material is a gas. Gas concentrations are in percent by volume.

As per paragraph (i) of 29 CFR 1910.1200, formulation is considered a trade secret and specific chemical identity and exact percentage (concentration) of composition may have been withheld. Specific chemical identity and exact percentage composition will be provided to health professionals, employees, or designated representatives in accordance with applicable provisions of paragraph (i).

| | |
|------------------|---------------------------|
| SECTION 4 | FIRST AID MEASURES |
|------------------|---------------------------|

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

| | |
|------------------|-------------------------------|
| SECTION 5 | FIRE FIGHTING MEASURES |
|------------------|-------------------------------|

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO2) to extinguish flames.

Product Name: MOBIL 1 10W-30

Revision Date: 09 May 2019

Page 3 of 11

Inappropriate Extinguishing Media: Straight Streams of Water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulfur oxides

FLAMMABILITY PROPERTIES

Flash Point [Method]: 232°C (450°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6

ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

SPILL MANAGEMENT

Land Spill: Stop leak if you can do it without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be

Product Name: MOBIL 1 10W-30
 Revision Date: 09 May 2019
 Page 4 of 11

consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

| | |
|------------------|-----------------------------|
| SECTION 7 | HANDLING AND STORAGE |
|------------------|-----------------------------|

HANDLING

Avoid contact with used product. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or ground procedures. However, bonding and grounds may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

Static Accumulator: This material is a static accumulator.

STORAGE

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

| | |
|------------------|--|
| SECTION 8 | EXPOSURE CONTROLS / PERSONAL PROTECTION |
|------------------|--|

EXPOSURE LIMIT VALUES

Exposure limits/standards (Note: Exposure limits are not additive)

| Substance Name | Form | Limit / Standard | | | NOTE | Source |
|------------------------------------|------------------------------|------------------|---------------------|--|------|------------|
| 1-DECENE, HOMOPOLYMER HYDROGENATED | Aerosols (thoracic fraction) | TWA | 5 mg/m ³ | | N/A | ExxonMobil |

Exposure limits/standards for materials that can be formed when handling this product: When mists/aerosols can occur the following are recommended: 5 mg/m³ - ACGIH TLV (inhalable fraction), 5 mg/m³ - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

No biological limits allocated.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Liquid
Color: Amber
Odor: Characteristic
Odor Threshold: N/D

Product Name: MOBIL 1 10W-30
 Revision Date: 09 May 2019
 Page 6 of 11

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15.6 °C): 0.86
Flammability (Solid, Gas): N/A
Flash Point [Method]: 232°C (450°F) [ASTM D-92]
Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0
Autoignition Temperature: N/D
Boiling Point / Range: > 316°C (601°F)
Decomposition Temperature: N/D
Vapor Density (Air = 1): > 2 at 101 kPa
Vapor Pressure: < 0.013 kPa (0.1 mm Hg) at 20 °C
Evaporation Rate (n-butyl acetate = 1): N/D
pH: N/A
Log Pow (n-Octanol/Water Partition Coefficient): > 3.5
Solubility in Water: Negligible
Viscosity: 66.1 cSt (66.1 mm²/sec) at 40 °C | 10.4 cSt (10.4 mm²/sec) at 100°C
Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D
Melting Point: N/A
Pour Point: -42°C (-44°F) [ASTM D97]

SECTION 10 STABILITY AND REACTIVITY

REACTIVITY: See sub-sections below.

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

POSSIBILITY OF HAZARDOUS REACTIONS: Hazardous polymerization will not occur.

SECTION 11 TOXICOLOGICAL INFORMATION

INFORMATION ON TOXICOLOGICAL EFFECTS

| Hazard Class | Conclusion / Remarks |
|---|--|
| Inhalation | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Irritation: No end point data for material. | Negligible hazard at ambient/normal handling temperatures. |
| Ingestion | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |
| Skin | |
| Acute Toxicity: No end point data for material. | Minimally Toxic. Based on assessment of the components. |

Product Name: MOBIL 1 10W-30

Revision Date: 09 May 2019

Page 7 of 11

| | |
|--|--|
| Skin Corrosion/Irritation: No end point data for material. | Negligible irritation to skin at ambient temperatures. Based on assessment of the components. |
| Eye | |
| Serious Eye Damage/Irritation: No end point data for material. | May cause mild, short-lasting discomfort to eyes. Based on assessment of the components. |
| Sensitization | |
| Respiratory Sensitization: No end point data for material. | Not expected to be a respiratory sensitizer. |
| Skin Sensitization: No end point data for material. | Not expected to be a skin sensitizer. Based on assessment of the components. |
| Aspiration: Data available. | Not expected to be an aspiration hazard. Based on physico-chemical properties of the material. |
| Germ Cell Mutagenicity: No end point data for material. | Not expected to be a germ cell mutagen. Based on assessment of the components. |
| Carcinogenicity: No end point data for material. | Not expected to cause cancer. Based on assessment of the components. |
| Reproductive Toxicity: No end point data for material. | Not expected to be a reproductive toxicant. Based on assessment of the components. |
| Lactation: No end point data for material. | Not expected to cause harm to breast-fed children. |
| Specific Target Organ Toxicity (STOT) | |
| Single Exposure: No end point data for material. | Not expected to cause organ damage from a single exposure. |
| Repeated Exposure: No end point data for material. | Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components. |

OTHER INFORMATION

For the product itself:

Diesel engine oils: Not carcinogenic in animals tests. Used and unused diesel engine oils did not produce any carcinogenic effects in chronic mouse skin painting studies.

Oils that are used in gasoline engines may become hazardous and display the following properties: Carcinogenic in animal tests. Caused mutations in vitro. Possible allergen and photoallergen. Contains polycyclic aromatic compounds (PAC) from combustion products of gasoline and/or thermal degradation products.

Contains:

Synthetic base oils: Not expected to cause significant health effects under conditions of normal use, based on laboratory studies with the same or similar materials. Not mutagenic or genotoxic. Not sensitizing in test animals and humans.

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC

3 = IARC 1

5 = IARC 2B

2 = NTP SUS

4 = IARC 2A

6 = OSHA CARC

SECTION 12

ECOLOGICAL INFORMATION

Product Name: MOBIL 1 10W-30
Revision Date: 09 May 2019
Page 8 of 11

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.
Expected to partition to sediment and wastewater solids.

| | |
|-------------------|--------------------------------|
| SECTION 13 | DISPOSAL CONSIDERATIONS |
|-------------------|--------------------------------|

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. **DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.**

| | |
|-------------------|------------------------------|
| SECTION 14 | TRANSPORT INFORMATION |
|-------------------|------------------------------|

LAND (DOT): Not Regulated for Land Transport

LAND (TDG): Not Regulated for Land Transport

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

Product Name: MOBIL 1 10W-30
 Revision Date: 09 May 2019
 Page 9 of 11

Marine Pollutant: No

AIR (IATA): Not Regulated for Air Transport

| SECTION 15 | REGULATORY INFORMATION |
|------------|------------------------|
|------------|------------------------|

OSHA HAZARD COMMUNICATION STANDARD: This material is not considered hazardous in accordance with OSHA HazCom 2012, 29 CFR 1910.1200.

Listed or exempt from listing/notification on the following chemical inventories: AICS, DSL, ENCS, KECI, PICCS, TCSI, TSCA

Special Cases:

| Inventory | Status |
|-----------|--------------------|
| IECSC | Restrictions Apply |

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302

SARA (311/312) REPORTABLE GHS HAZARD CLASSES: None.

SARA (313) TOXIC RELEASE INVENTORY: This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The following ingredients are cited on the lists below:

| Chemical Name | CAS Number | List Citations |
|--|------------|----------------|
| 2-PENTANOL, 4-METHYL-, HYDROGEN PHOSPHORODITHIOATE, ZINC SALT | 2215-35-2 | 15 |
| PHOSPHORODITHIOIC ACID, MIXED 0,0 BIS (1,3-DIMETHYLBUTYL AND ISO-PR)ESTERS, ZINC SALTS | 84605-29-8 | 15 |
| SEVERELY HYDROTREATED HEAVY PARAFFINIC DISTILLATE | 64742-54-7 | 17, 18, 19 |

--REGULATORY LISTS SEARCHED--

| | | | |
|---------------|--------------|-------------------|-------------|
| 1 = ACGIH ALL | 6 = TSCA 5a2 | 11 = CA P65 REPRO | 16 = MN RTK |
| 2 = ACGIH A1 | 7 = TSCA 5e | 12 = CA RTK | 17 = NJ RTK |

Product Name: MOBIL 1 10W-30

Revision Date: 09 May 2019

Page 10 of 11

| | | | |
|--------------|------------------|-------------|-------------|
| 3 = ACGIH A2 | 8 = TSCA 6 | 13 = IL RTK | 18 = PA RTK |
| 4 = OSHA Z | 9 = TSCA 12b | 14 = LA RTK | 19 = RI RTK |
| 5 = TSCA 4 | 10 = CA P65 CARC | 15 = MI 293 | |

Code key: CARC=Carcinogen; REPRO=Reproductive

| | |
|-------------------|--------------------------|
| SECTION 16 | OTHER INFORMATION |
|-------------------|--------------------------|

N/D = Not determined, N/A = Not applicable

KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):

H304: May be fatal if swallowed and enters airways; Aspiration, Cat 1

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

- Composition: Component Table information was modified.
- Section 01: Company Contact Methods information was modified.
- Section 01: Company Mailing Address information was modified.
- Section 09: Boiling Point C(F) information was modified.
- Section 09: Flash Point C(F) information was modified.
- Section 09: n-Octanol/Water Partition Coefficient information was modified.
- Section 09: Pour Point C(F) information was modified.
- Section 09: Relative Density information was modified.
- Section 09: Viscosity information was modified.
- Section 12: information was modified.
- Section 13: Disposal Considerations - Disposal Recommendations information was modified.
- Section 15: List Citations Table information was modified.
- Section 15: National Chemical Inventory Listing information was modified.
- Section 15: SARA (311/312) REPORTABLE GHS HAZARD CLASSES information was added.
- Section 15: SARA (311/312) REPORTABLE HAZARD CATEGORIES information was deleted.
- Section 15: Special Cases Table information was modified.
- Section 16: HCode Key information was modified.
- Section 16: MSN, MAT ID information was modified.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0B, 0B, 0, 0, 0, 0

PPEC: A

Product Name: MOBIL 1 10W-30
Revision Date: 09 May 2019
Page 11 of 11

DGN: 7004362XUS (1027593)

Copyright 2002 Exxon Mobil Corporation, All rights reserved

Common Name: ABC DRY CHEMICAL FIRE EXTINGUISHANT

Manufacturer: BUCKEYE FIRE EQUIPMENT

SDS Revision Date: 4/1/2015

SDS Format: GHS-US

Grainger Item Number(s): 2LBP1, 31CA37, 35WT05, 35WT06, 35WT07, 35WT08, 35WT09, 35WT10, 35WT11, 35WT41, 35WT42, 35WT43, 35WT44, 3GRW5, 3GRW6, 3GRW7, 3GRW8, 3GRY3, 3GRY4, 3GRY5, 3GRY6, 3GRY7, 3GRY8, 3GRZ4, 44YZ28, 44YZ29, 44YZ30, 44YZ31, 44YZ33, 44YZ35

Manufacturer Model Number(s):

SDS Table of Contents

Click the desired link below to jump directly to that section in the SDS.

[SECTION I. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION](#)

[SECTION II. HAZARD IDENTIFICATION](#)

[SECTION III. COMPOSITION/INFORMATION ON INGREDIENTS](#)

[SECTION IV. FIRST AID MEASURES](#)

[SECTION V. FIREFIGHTING MEASURES](#)

[SECTION VI. ACCIDENTAL RELEASE MEASURES](#)

[SECTION VII. HANDLING AND STORAGE](#)

[SECTION VIII. EXPOSURE CONTROLS AND PERSONAL PROTECTION](#)

[SECTION IX. PHYSICAL AND CHEMICAL PROPERTIES](#)

[SECTION X. STABILITY AND REACTIVITY](#)

[SECTION XI. TOXICOLOGICAL INFORMATION](#)

[SECTION XII. ECOLOGICAL INFORMATION](#)

[SECTION XIII. DISPOSAL CONSIDERATION](#)

[SECTION XIV. TRANSPORTATION INFORMATION](#)

[SECTION XV. REGULATORY INFORMATION](#)

[SECTION XVI. OTHER INFORMATION](#)

SAFETY DATA SHEET

ABC DRY CHEMICAL

SECTION I. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION



PRODUCT NAME: ABC DRY CHEMICAL FIRE EXTINGUISHANT

SYNONYM: MULTI-PURPOSE DRY CHEMICAL

MANUFACTURER:

BUCKEYE FIRE EQUIPMENT COMPANY

110 KINGS ROAD

KINGS MOUNTAIN, NC 28086

TELEPHONE: 704.739.7415

WEB ADDRESS: WWW.BUCKEYEFIRE.COM

EMAIL ADDRESS: BFEC@BUCKEYEF.COM

RECOMMENDED USE: FIRE SUPPRESSION, NOT FOR HUMAN OR ANIMAL DRUG USE.

EMERGENCY:

CHEMTREC: 1.800.424.9300

REVISION DATE: 04/2015

SECTION II. HAZARD IDENTIFICATION



GHS - CLASSIFICATION:

EYE IRRITATION: CLASS 2B

SKIN IRRITATION: CLASS 3

INHALATION: CLASS 5

GHS LABEL ELEMENTS:

HAZARD SYMBOLS: EXCLAMATION MARK

SIGNAL WORD: WARNING

HAZARD STATEMENTS:

H313: MAY BE HARMFUL IN CONTACT WITH SKIN.

H320: CAUSES EYE IRRITATION

H333: MAY BE HARMFUL IF INHALED.

PRECAUTIONARY STATEMENTS:

P101:

IF MEDICAL ADVICE IS NEEDED, HAVE PRODUCT CONTAINER OR LABEL AT HAND.

P102: KEEP OUT OF REACH OF CHILDREN.

P234: KEEP IN ORIGINAL CONTAINER.

P251: PRESSURIZED CONTAINER; DO NOT PIERCE OR BURN, EVEN AFTER USE

P261: AVOID BREATHING DUST

P264: WASH HANDS AND FACE THOROUGHLY AFTER HANDLING

P270: DO NOT EAT, DRINK, OR SMOKE WHEN USING THIS PRODUCT

P281: USE PERSONAL PROTECTIVE EQUIPMENT AS REQUIRED

P285: IN CASE OF INADEQUATE VENTILATION, WEAR RESPIRATORY PROTECTION

P301+322+331:

IF SWALLOWED, DRINK 2-3 GLASSES OF WATER AND DO NOT INDUCE VOMITING

302+352: IF ON SKIN, WASH WITH SOAP AND WATER

304+313+341:

IF INHALED, AND IF DISTRESS OCCURS, REMOVE VICTIM TO FRESH AIR AND KEEP AT REST IN A POSITION COMFORTABLE FOR BREATHING. SEEK MEDICAL ADVICE/ATTENTION.

305+351+338:

IF IN EYES, RINSE CAUTIOUSLY WITH WATER FOR SEVERAL MINUTES. REMOVE CONTACT LENSES IF PRESENT AND EASY TO DO, AND CONTINUE TO RINSE.

337+313: IF EYE IRRITATION PERSISTS, GET MEDICAL ADVICE/ATTENTION.

P401+402+403:

STORE IN ORIGINAL CONTAINER OR EXTINGUISHER IN A DRY, WELL VENTILATED PLACE.

SECTION III. COMPOSITION/INFORMATION ON INGREDIENTS



THIS PRODUCT IS A MIXTURE.

| CHEMICAL NAME | WEIGHT %* | CAS # |
|------------------------|-----------|------------|
| MONOAMMONIUM PHOSPHATE | 85 | 7722-76-1 |
| BARIUM SULFATE | 10 | 7727-43-7 |
| MICA | <3 | 12001-26-2 |
| SILICA | <2 | 7631-86-9 |
| STANNOUS OCTOATE | <.3 | 301-10-0 |
| SILICONE | <.1 | 63148-57-2 |
| PIGMENT | <.1 | 6358-31-2 |

* % IS ROUNDED TO THE NEAREST APPROPRIATE NUMBER. VALUES ARE NOT TO BE CONSIDERED PRODUCT SPECIFICATIONS

SECTION IV. FIRST AID MEASURES



EYE EXPOSURE:

FLUSH EYES WITH WATER UNTIL PAIN-FREE. IF IRRITATION DEVELOPS OR PERSISTS, SEEK MEDICAL ATTENTION.

SKIN EXPOSURE:

WASH WITH PLENTY OF SOAP AND WATER. IF IRRITATION DEVELOPS OR PERSISTS, SEEK MEDICAL ATTENTION.

INHALATION:

MOVE VICTIM TO FRESH AIR. IF IRRITATION DEVELOPS OR PERSISTS, SEEK MEDICAL ATTENTION.

INGESTION:

IF VICTIM IS CONSCIOUS AND ALERT, GIVE 2-3 GLASSES OF WATER TO DRINK. DO NOT INDUCE VOMITING. IF VOMITING OCCURS AND THE VICTIM IS CONSCIOUS, GIVE ADDITIONAL WATER TO FURTHER DILUTE THE CHEMICAL. PREVENT ASPIRATION OF SWALLOWED PRODUCT BY LAYING VICTIM ON SIDE WITH HEAD LOWER THAN THEIR WAIST. SEEK MEDICAL ATTENTION. DO NOT LEAVE VICTIM UNATTENDED.

MEDICAL CONDITIONS POSSIBLY AGGRAVATED BY EXPOSURE:

INHALATION OF THE PRODUCT MAY AGGRAVATE EXISTING CHRONIC RESPIRATORY CONDITIONS SUCH AS ASTHMA, EMPHYSEMA, OR BRONCHITIS. CONTACT WITH THE SKIN MAY AGGRAVATE AN EXISTING SKIN DISEASE. CHRONIC OVEREXPOSURE MAY CAUSE PNEUMOCONIOSIS ("DUSTY LUNG" DISEASE).

SECTION V. FIREFIGHTING MEASURES



EXTINGUISHING MEDIA:

N/A. THIS PRODUCT IS AN EXTINGUISHING AGENT. IT IS NONFLAMMABLE AND NONCOMBUSTIBLE.

SPECIAL FIREFIGHTING PROCEDURES: N/A

UNUSUAL FIRE AND EXPLOSION HAZARDS:

THIS PRODUCT MAY DECOMPOSE IN FIRE AND RELEASE OXIDES OF CARBON, POTASSIUM, AND NITROGEN (REFER TO SECTION X).

SENSITIVITY TO MECHANICAL IMPACT OR STATIC DISCHARGE: NONE

SECTION VI. ACCIDENTAL RELEASE MEASURES



IN CASE OF ACCIDENTAL RELEASE, USE THE APPROPRIATE RESPIRATORY PROTECTION. CLEAN UP THE PRODUCT USING A VACUUM OR WET SWEEP AND SHOVEL TO MINIMIZE THE GENERATION OF DUST. BAG OR DRUM THE PRODUCT FOR DISPOSAL. IF THE PRODUCT IS USED AND/OR CONTAMINATED, USE PERSONAL PROTECTIVE EQUIPMENT AND CONTAINMENT MEANS THAT ARE APPROPRIATE FOR THE COMPOSITION OF THE MIXTURE. PRODUCT SHOULD BE PREVENTED FROM ENTERING WATERWAYS.

SECTION VII. HANDLING AND STORAGE



AVOID EYE, RESPIRATORY, AND SKIN EXPOSURE. USE THE APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT WHEN HANDLING. WASH THOROUGHLY AFTER HANDLING (REFER TO SECTION VIII). PRODUCT SHOULD BE STORED IN ITS ORIGINAL CONTAINER OR EXTINGUISHER. WHEN THE PRODUCT IS CONTAINED UNDER PRESSURE (E.G., AN EXTINGUISHER), INSPECT THE CONTAINER FOR RUST OR DAMAGE THAT MAY COMPROMISE THE CONTAINER INTEGRITY. DO NOT STORE THE PRODUCT IN HIGH HUMIDITY AND DO NOT MIX WITH OTHER EXTINGUISHING AGENTS, PARTICULARLY POTASSIUM BICARBONATE BASED AGENTS.

SECTION VIII. EXPOSURE CONTROLS AND PERSONAL PROTECTION



EXPOSURE GUIDELINES:

| | OSHA PEL | ACGIH TLV |
|-----------------------|---------------------------------------|---------------------------------------|
| MONOAMONIUM PHOSPHATE | PARTICULATES NOT OTHERWISE CLASSIFIED | PARTICULATES NOT OTHERWISE CLASSIFIED |
| | TOTAL DUST: 15 MG/M3 | TOTAL DUST: 10 MG/M3 |
| | RESPIRABLE FRACTION: 5 MG/M3 | RESPIRABLE FRACTION: 3 MG/M3 |
| BARIUM SULFATE | PARTICULATES NOT OTHERWISE CLASSIFIED | PARTICULATES NOT OTHERWISE CLASSIFIED |
| | TOTAL DUST: 15 MG/M3 | TOTAL DUST: 10 MG/M3 |
| | RESPIRABLE FRACTION: 5 MG/M3 | RESPIRABLE FRACTION: 3 MG/M3 |
| MICA | 6 MG/M3 | 3 MG/M3 |

| | | |
|------------------|---------------|---------------|
| SILICA | 6 MG/M3 | 10 MG/M3 |
| STANNOUS OCTOATE | .1 MG/M3 | .1 MG/M3 |
| SILICONE | NOT REGULATED | NOT REGULATED |
| PIGMENT | NOT REGULATED | NOT REGULATED |

DURING THE USE OF THIS PRODUCT ON FIRES, EXHAUST GASES AND PRODUCTS OF INCOMPLETE COMBUSTION ARE THE MAIN RESPIRATORY HAZARDS. IN THE MANUFACTURE OF THIS PRODUCT, EMPLOYERS AND EMPLOYEES MUST USE THEIR COLLECTIVE JUDGMENT IN DETERMINING THE ON-THE-JOB SETTINGS WHERE THE USE OF A DUST MASK OR RESPIRATOR IS PRUDENT. THE NEED FOR RESPIRATORY PROTECTION IS NOT LIKELY FOR SHORT-TERM USE IN WELL-VENTILATED AREAS.

RESPIRATORY PROTECTION:

USE AN N-95 DUST MASK FOR LIMITED EXPOSURES AND USE AIR-PURIFYING RESPIRATORS WITH HIGH EFFICIENCY PARTICULATE AIR FILTERS (HEPA FILTERS) FOR PROLONGED EXPOSURES.

EYE PROTECTION:

WEAR CHEMICAL GOGGLES OR FULL-FACE AIR-PURIFYING RESPIRATOR.

SKIN PROTECTION:

USE NITRILE, LATEX, OR SIMILAR GLOVES AND COVERALLS. GOOD PERSONAL HYGIENE PRACTICES ARE ESSENTIAL. AFTER HANDLING THE PRODUCT, AVOID FOOD, TOBACCO PRODUCTS, OR OTHER MEANS OF TRANSFERRING THE PRODUCT FROM HAND TO MOUTH UNTIL AFTER THOROUGHLY WASHING.

SECTION IX. PHYSICAL AND CHEMICAL PROPERTIES



APPEARANCE AND ODOR: LIGHT YELLOW FINE POWDER THAT IS ODORLESS.

APPARENT DENSITY: 0.82

SOLUBILITY:

THE PRODUCT IS COATED WITH WATER REPELLANT SILICONE. NOT IMMEDIATELY SOLUBLE IN WATER.

PH: APPROXIMATELY 4 -5

FLASH POINT: N/A

FLAMMABILITY: N/A

VAPOR PRESSURE: N/A

BOILING POINT: N/A

EXPLOSIVE OR OXIDIZING PROPERTIES: NONE

SECTION X. STABILITY AND REACTIVITY



STABILITY: STABLE

INCOMPATIBLES:

MAGNESIUM, STRONG OXIDIZERS SUCH AS CALCIUM HYPOCHLORITE (POOL CHLORINE), STRONG ALKALIS, AND ISOCYANURIC ACIDS.

DECOMPOSITION PRODUCTS:

THIS PRODUCT MAY DECOMPOSE IN FIRE AND RELEASE CARBON MONOXIDE, CARBON DIOXIDE, AND SULFUR DIOXIDE. OXIDES OF PHOSPHOROUS AND AMMONIA HAVE BEEN REPORTED.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR

HAZARDOUS REACTIONS: NONE

SECTION XI. TOXICOLOGICAL INFORMATION



ACUTE TOXICITY:

MONOAMMONIUM PHOSPHATE LD50 (RAT): >1000 MG/KG BODY WEIGHT.

TARGET ORGANS IN HUMANS:

RESPIRATORY SYSTEM, EYES, AND SKIN. THIS PRODUCT IS AN IRRITANT TO EPITHELIAL TISSUE AND MAY AGGRAVATE DERMATITIS. NO INDICATION THAT THE PRODUCT CAUSES SENSITIZATION.

CHRONIC TOXICITY:

PNEUMOCONIOSIS, OR "DUSTY LUNG" DISEASE, MAY RESULT FROM CHRONIC EXPOSURE TO ANY DUST.

REPRODUCTIVE TOXICITY:

THIS PRODUCT IS NOT KNOWN TO HAVE ANY REPRODUCTIVE EFFECTS.

SECTION XII. ECOLOGICAL INFORMATION



ECOTOXICITY:

NEGATIVE EFFECTS ARE UNKNOWN. PROVIDES NUTRIENT NITROGEN AND PHOSPHOROUS TO PLANT LIFE.

DEGRADABILITY: DEGRADES RAPIDLY IN WET OR HUMID ENVIRONMENT.

BIOACCUMULATION: UNKNOWN EXTENT.

MOBILITY IN SOIL: WATER-SOLUBLE. MAY LEECH IN TO GROUNDWATER.

SECTION XIII. DISPOSAL CONSIDERATION



THIS PRODUCT IS NOT A RCRA CHARACTERISTICALLY HAZARDOUS OR LISTED HAZARDOUS WASTE. DISPOSE OF ACCORDING TO STATE OR LOCAL LAWS, WHICH MAY BE MORE RESTRICTIVE THAN FEDERAL REGULATIONS. BE AWARE THAT PRODUCT USED ON A FIRE MAY BE ALTERED OR CONTAMINATED AND THEREBY REQUIRE DIFFERENT DISPOSAL CONSIDERATIONS.

SECTION XIV. TRANSPORTATION INFORMATION



THIS PRODUCT IS NOT DEFINED AS A HAZARDOUS MATERIAL UNDER U.S. DEPARTMENT OF TRANSPORTATION 49 CFR 172, OR BY TRANSPORT CANADA "TRANSPORTATION OF DANGEROUS GOODS" REGULATIONS.

PLEASE NOTE:

ALTHOUGH THIS MATERIAL IS NOT CONSIDERED HAZARDOUS, WHEN CONTAINED IN A STORED PRESSURE FIRE EXTINGUISHER PRESSURIZED WITH A NONFLAMMABLE GAS, THE EXTINGUISHER ITSELF IS CONSIDERED A HAZARDOUS MATERIAL BY THE U.S. DEPARTMENT OF TRANSPORTATION (USDOT) AND TRANSPORT CANADA (TC). THE PROPER SHIPPING NAME SHALL BE FIRE EXTINGUISHER AND THE UN IDENTIFICATION NUMBER IS UN 1044. THE USDOT HAZARD CLASS IS LIMITED QUANTITY WHEN PRESSURIZED TO LESS THAN 241 PSIG AND WHEN SHIPPED VIA HIGHWAY OR RAIL. USE CLASS 2.2, NON-FLAMMABLE GAS, WHEN SHIPPING VIA AIR.

SECTION XV. REGULATORY INFORMATION



INTERNATIONAL INVENTORY STATUS:

ALL INGREDIENTS ARE ON THE FOLLOWING INVENTORIES

| COUNTRY | AGENCY |
|-------------|---------------|
| U.S.A. | TSCA |
| CANADA | DSL |
| EUROPE | EINECS/ELINCS |
| AUSTRALIA | AICS |
| JAPAN | MITI |
| SOUTH KOREA | KECL |

EUROPEAN RISK AND SAFETY PHRASES:

EU CLASSIFICATION: HARMFUL

R PHRASES:

22: HARMFUL IF SWALLOWED

36/37/38: IRRITATING TO EYES, RESPIRATORY SYSTEM, AND SKIN.

S PHRASES:

26:

IN CASE OF CONTACT WITH EYES, RINSE IMMEDIATELY WITH PLENTY OF WATER AND SEEK MEDICAL ADVICE

36: WEAR SUITABLE PROTECTIVE CLOTHING

U.S. FEDERAL REGULATORY INFORMATION:

NONE OF THE CHEMICALS IN THIS PRODUCT ARE UNDER SARA REPORTING REQUIREMENTS OR HAVE SARA THRESHOLD PLANNING QUANTITIES OR CERCLA REPORTABLE QUANTITIES, OR ARE REGULATED UNDER TSCA 8(D).

STATE REGULATORY INFORMATION:

CHEMICALS IN THIS PRODUCT ARE COVERED UNDER THE SPECIFIC STATE REGULATIONS NOTED:

ALASKA:

DESIGNATED TOXIC AND HAZARDOUS SUBSTANCES: NONE

CALIFORNIA:

PERMISSIBLE EXPOSURE LIMITS FOR CHEMICAL CONTAMINANTS: NONE

FLORIDA:

SUBSTANCE LIST: MICA DUST

ILLINOIS:

TOXIC SUBSTANCE LIST: NONE

KANSAS:

SECTION 302/303 LIST: NONE

MASSACHUSETTS:

SUBSTANCE LIST: MICA DUST

MINNESOTA:

LIST OF HAZARDOUS SUBSTANCES: NONE

MISSOURI:

EMPLOYER INFORMATION/TOXIC SUBSTANCE LIST: NONE

NEW JERSEY:

RIGHT TO KNOW HAZARDOUS SUBSTANCE LIST: NONE

NORTH DAKOTA:

LIST OF HAZARDOUS CHEMICALS, REPORTABLE QUANTITIES: NONE

PENNSYLVANIA:

HAZARDOUS SUBSTANCE LIST: NONE

RHODE ISLAND:

HAZARDOUS SUBSTANCE LIST: MICA DUST

TEXAS:

HAZARDOUS SUBSTANCE LIST: NO

WEST VIRGINIA:

HAZARDOUS SUBSTANCE LIST: NONE

WISCONSIN:

TOXIC AND HAZARDOUS SUBSTANCES: NONE

CALIFORNIA PROPOSITION 65:

NO COMPONENT IS LISTED ON THE CALIFORNIA PROPOSITION 65 LIST

SECTION XVI. OTHER INFORMATION



THIS SAFETY DATA SHEET PREPARED IN ACCORDANCE WITH OSHA'S HAZARD COMMUNICATION STANDARD (29 CFR 1910.1200) AND THE GLOBALLY HARMONIZED SYSTEM OF CLASSIFICATION AND LABELLING OF CHEMICALS (GHS)

HMIS RATINGS:

HEALTH

1

FLAMMABILITY

0

REACTIVITY

0

PERSONAL PROTECTIVE EQUIPMENT USE N-95 DUST MASK (SEE SECTION 8)

WHMIS (CANADIAN WORKPLACE HAZARDOUS MATERIALS IDENTIFICATION):

D2B: MAY IRRITATE EYES, MUCOUS MEMBRANES, AND/OR SKIN

THE INFORMATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH AS TYPICAL VALUES AND NOT AS PRODUCT SPECIFICATIONS. NO WARRANTY, EITHER EXPRESSED OR IMPLIED, IS HEREBY MADE.

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: WELD-ON® 702™ Low VOC PVC Plastic Pipe Cement

PRODUCT USE: Low VOC Solvent Cement for PVC Plastic Pipe

SUPPLIER:
MANUFACTURER: IPS Corporation
 17109 South Main Street, Gardena, CA 90248-3127
 P.O. Box 379, Gardena, CA 90247-0379
 Tel. 1-310-898-3300

EMERGENCY: Transportation: CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International) **Medical:** CHEMTEL Tel. 800.255-3924, +1 813-248-0585 (International)

SECTION 2 - HAZARDS IDENTIFICATION

GHS CLASSIFICATION:

| Health | | Environmental | | Physical | |
|---------------------|------------|-------------------|------------|------------------|------------|
| Acute Toxicity: | Category 4 | Acute Toxicity: | None Known | Flammable Liquid | Category 2 |
| Skin Irritation: | Category 3 | Chronic Toxicity: | None Known | | |
| Skin Sensitization: | NO | | | | |
| Eye: | Category 2 | | | | |

GHS LABEL:

Signal Word:
Danger
WHMIS CLASSIFICATION: CLASS B, DIVISION 2
 CLASS D, DIVISION 1B

| Hazard Statements | Precautionary Statements |
|--|---|
| H225: Highly flammable liquid and vapor H319: Causes serious eye irritation H332: Harmful if inhaled H335: May cause respiratory irritation H336: May cause drowsiness or dizziness H351: Suspected of causing cancer EUH019: May form explosive peroxides | P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking P261: Avoid breathing dust/fume/gas/mist/vapors/spray P280: Wear protective gloves/protective clothing/eye protection/face protection P304+P340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing P403+P233: Store in a well ventilated place. Keep container tightly closed P501: Dispose of contents/container in accordance with local regulation |

SECTION 3 - COMPOSITION/INFORMATION ON INGREDIENTS

| | CAS# | EINECS # | REACH | CONCENTRATION |
|---------------------------|----------|-----------|-------------------------|---------------|
| | | | Pre-registration Number | % by Weight |
| Tetrahydrofuran (THF) | 109-99-9 | 203-726-8 | 05-2116297729-22-0000 | 20 - 40 |
| Methyl Ethyl Ketone (MEK) | 78-93-3 | 201-159-0 | 05-2116297728-24-0000 | 30 - 45 |
| Cyclohexanone | 108-94-1 | 203-631-1 | 05-2116297718-25-0000 | 15 - 25 |

All of the constituents of this adhesive product are listed on the TSCA inventory of chemical substances maintained by the US EPA, or are exempt from that listing.

* Indicates this chemical is subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986 (40CFR372).

indicates that this chemical is found on Proposition 65's List of chemicals known to the State of California to cause cancer or reproductive toxicity.

SECTION 4 - FIRST AID MEASURES

Contact with eyes: Flush eyes immediately with plenty of water for 15 minutes and seek medical advice immediately.

Skin contact: Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water. If irritation develops, seek medical advice.

Inhalation: Remove to fresh air. If breathing is stopped, give artificial respiration. If breathing is difficult, give oxygen. Seek medical advice.

Ingestion: Rinse mouth with water. Give 1 or 2 glasses of water or milk to dilute. Do not induce vomiting. Seek medical advice immediately.

Likely Routes of Exposure: Inhalation, Eye and Skin Contact

Acute symptoms and effects:

Inhalation: Severe overexposure may result in nausea, dizziness, headache. Can cause drowsiness, irritation of eyes and nasal passages.

Eye Contact: Vapors slightly uncomfortable. Overexposure may result in severe eye injury with corneal or conjunctival inflammation on contact with the liquid.

Skin Contact: Liquid contact may remove natural skin oils resulting in skin irritation. Dermatitis may occur with prolonged contact.

Ingestion: May cause nausea, vomiting, diarrhea and mental sluggishness.

Chronic (long-term) effects: Category 2 Carcinogen

SECTION 5 - FIREFIGHTING MEASURES

Suitable Extinguishing Media: Dry chemical powder, carbon dioxide gas, foam, Halon, water fog.

Unsuitable Extinguishing Media: Water spray or stream.

Exposure Hazards: Inhalation and dermal contact

Combustion Products: Oxides of carbon, hydrogen chloride and smoke

| | HMIS | NFPA | |
|--------------|------|------|------------|
| Health | 2 | 2 | 0-Minimal |
| Flammability | 3 | 3 | 1-Slight |
| Reactivity | 0 | 0 | 2-Moderate |
| PPE | B | | 3-Serious |
| | | | 4-Severe |

Protection for Firefighters: Self-contained breathing apparatus or full-face positive pressure airline masks.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep away from heat, sparks and open flame.
 Provide sufficient ventilation, use explosion-proof exhaust ventilation equipment or wear suitable respiratory protective equipment.
 Prevent contact with skin or eyes (see section 8).

Environmental Precautions: Prevent product or liquids contaminated with product from entering sewers, drains, soil or open water course.

Methods for Cleaning up: Clean up with sand or other inert absorbent material. Transfer to a closable steel vessel.

Materials not to be used for clean up: Aluminum or plastic containers

SECTION 7 - HANDLING AND STORAGE

Handling: Avoid breathing of vapor, avoid contact with eyes, skin and clothing.
 Keep away from ignition sources, use only electrically grounded handling equipment and ensure adequate ventilation/fume exhaust hoods.
 Do not eat, drink or smoke while handling.

Storage: Store in ventilated room or shade below 44°C (110°F) and away from direct sunlight.
 Keep away from ignition sources and incompatible materials: caustics, ammonia, inorganic acids, chlorinated compounds, strong oxidizers and isocyanates.
 Follow all precautionary information on container label, product bulletins and solvent cementing literature.

SECTION 8 - PRECAUTIONS TO CONTROL EXPOSURE / PERSONAL PROTECTION

| EXPOSURE LIMITS: | Component | ACGIH TLV | ACGIH STEL | OSHA PEL | OSHA STEL | OSHA PEL-Ceiling | CAL/OSHA PEL | CAL/OSHA Ceiling | CAL/OSHA STEL |
|------------------|---------------------------|-----------------------|------------|----------|-----------|------------------|--------------|------------------|---------------|
| | | Tetrahydrofuran (THF) | 50 ppm | 100 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E |
| | Methyl Ethyl Ketone (MEK) | 200 ppm | 300 ppm | 200 ppm | N/E | N/E | 200 ppm | N/E | 300 ppm |
| | Cyclohexanone | 20 ppm | 50 ppm | 50 ppm | N/E | N/E | 25 ppm | N/E | N/E |

Engineering Controls: Use local exhaust as needed.

Monitoring: Maintain breathing zone airborne concentrations below exposure limits.

Personal Protective Equipment (PPE):

Eye Protection: Avoid contact with eyes, wear splash-proof chemical goggles, face shield, safety glasses (spectacles) with brow guards and side shields, etc. as may be appropriate for the exposure.

Skin Protection: Prevent contact with the skin as much as possible. Butyl rubber gloves should be used for frequent immersion.
 Use of solvent-resistant gloves or solvent-resistant barrier cream should provide adequate protection when normal adhesive application practices and procedures are used for making structural bonds.

Respiratory Protection: Prevent inhalation of the solvents. Use in a well-ventilated room. Open doors and/or windows to ensure airflow and air changes. Use local exhaust ventilation to remove airborne contaminants from employee breathing zone and to keep contaminants below levels listed above.
 With normal use, the Exposure Limit Value will not usually be reached. When limits approached, use respiratory protection equipment.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

| | | |
|--|--|---|
| Appearance: Clear, regular syrupy liquid | | Odor Threshold: 0.88 ppm (Cyclohexanone) |
| Odor: Ketone | | |
| pH: Not Applicable | | |
| Melting/Freezing Point: -108°C (-162°F) Based on first melting component: THF | | Boiling Range: 66°C (151°F) to 156°C (313°F) |
| Boiling Point: 67°C (151°F) Based on first boiling component: THF | | Evaporation Rate: > 1.0 (BUAC = 1) |
| Flash Point: -14°C (7°F) TCC based on THF | | Flammability: Category 2 |
| Specific Gravity: 0.934 @23°C (73°F) | | Flammability Limits: LEL: 1.1% based on Cyclohexanone |
| Solubility: Solvent portion soluble in water. Resin portion separates out. | | UEL: 11.8% based on THF |
| Partition Coefficient n-octanol/water: Not Available | | Vapor Pressure: 129 mm Hg @ 20°C (68°F) based on THF |
| Auto-ignition Temperature: 321°C (609.8°F) based on THF | | Vapor Density: >2 (Air = 1) |
| Decomposition Temperature: Not Applicable | | Other Data: Viscosity: Regular bodied |
| VOC Content: When applied as directed, per SCAQMD Rule 1168, Test Method 316A, VOC content is: ≤ 510 g/l. | | |

SECTION 10 - STABILITY AND REACTIVITY

| | |
|---|--|
| Stability: Stable | |
| Hazardous decomposition products: None in normal use. When forced to burn, this product gives off oxides of carbon, hydrogen chloride and smoke. | |
| Conditions to avoid: Keep away from heat, sparks, open flame and other ignition sources. | |
| Incompatible Materials: Oxidizers, strong acids and bases, amines, ammonia | |

SECTION 11 - TOXICOLOGICAL INFORMATION

| Toxicity: | LD50 | LC50 | Target Organs |
|---------------------------|---|--|---------------|
| Tetrahydrofuran (THF) | Oral: 2842 mg/kg (rat) | Inhalation 3 hrs. 21,000 mg/m ³ (rat) | STOT SE3 |
| Methyl Ethyl Ketone (MEK) | Oral: 2737 mg/kg (rat), Dermal: 6480 mg/kg (rabbit) | Inhalation 8 hrs. 23,500 mg/m ³ (rat) | STOT SE3 |
| Cyclohexanone | Oral: 1535 mg/kg (rat), Dermal: 948 mg/kg (rabbit) | Inhalation 4 hrs. 8,000 PPM (rat) | |

| Reproductive Effects | Teratogenicity | Mutagenicity | Embryotoxicity | Sensitization to Product | Synergistic Products |
|----------------------|-----------------|-----------------|-----------------|--------------------------|----------------------|
| Not Established | Not Established | Not Established | Not Established | Not Established | Not Established |

SECTION 12 - ECOLOGICAL INFORMATION

| | |
|--|--|
| Ecotoxicity: None Known | |
| Mobility: In normal use, emission of volatile organic compounds (VOC's) to the air takes place, typically at a rate of ≤ 510 g/l. | |
| Degradability: Not readily biodegradable | |
| Bioaccumulation: Minimal to none. | |

SECTION 13 - WASTE DISPOSAL CONSIDERATIONS

Follow local and national regulations. Consult disposal expert.

SECTION 14 - TRANSPORT INFORMATION

| | |
|---|--|
| Proper Shipping Name: Adhesives | |
| Hazard Class: 3 | |
| Secondary Risk: None | |
| Identification Number: UN 1133 | |
| Packing Group: PG II | |
| Label Required: Class 3 Flammable Liquid | |
| Marine Pollutant: NO | |

EXCEPTION for Ground Shipping

DOT Limited Quantity: Up to 5L per inner packaging, 30 kg gross weight per package.
Consumer Commodity: Depending on packaging, these quantities may qualify under DOT as "ORM-D" .

| TDG INFORMATION | |
|--------------------------|--------------------|
| TDG CLASS: | FLAMMABLE LIQUID 3 |
| SHIPPING NAME: | ADHESIVES |
| UN NUMBER/PACKING GROUP: | UN 1133, PG II |

SECTION 15 - REGULATORY INFORMATION

| | |
|---|---|
| Precautionary Label Information: Highly Flammable, Irritant, Carc. Cat. 2 | Ingredient Listings: USA TSCA, Europe EINECS, Canada DSL, Australia AICS, Korea ECL/TCCL, Japan MITI (ENCS) |
| Symbols: F, Xi | |
| Risk Phrases: R11: Highly flammable. R20: Harmful by inhalation. R36/37: Irritating to eyes and respiratory system. | R66: Repeated exposure may cause skin dryness or cracking R67: Vapors may cause drowsiness and dizziness |
| Safety Phrases: S9: Keep container in a well-ventilated place. S16: Keep away from sources of ignition - No smoking. S25: Avoid contact with eyes. | S26: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S33: Take precautionary measures against static discharges. S46: If swallowed, seek medical advise immediately and show this container or label. |

SECTION 16 - OTHER INFORMATION

| | | |
|---|--|--|
| Specification Information: | | |
| Department issuing data sheet: | IPS, Safety Health & Environmental Affairs | All ingredients are compliant with the requirements of the European Directive on RoHS (Restriction of Hazardous Substances). |
| E-mail address: | <EHSinfo@ipscorp.com> | |
| Training necessary: | Yes, training in practices and procedures contained in product literature. | |
| Reissue date / reason for reissue: | 6/21/2018 / Updated GHS Standard Format | |
| Intended Use of Product: | Solvent Cement for PVC Plastic Pipe | |

This product is intended for use by skilled individuals at their own risk. The information contained herein is based on data considered accurate based on current state of knowledge and experience. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof.



Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950
US GHS

Synonyms: Hess Conventional (Oxygenated and Non-oxygenated) Gasoline; Reformulated Gasoline (RFG); Reformulated Gasoline Blendstock for Oxygenate Blending (RBOB); Unleaded Motor or Automotive Gasoline

*** Section 1 - Product and Company Identification ***

Manufacturer Information

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

Phone: 732-750-6000 Corporate EHS
Emergency # 800-424-9300 CHEMTREC
www.hess.com (Environment, Health, Safety Internet Website)

*** Section 2 - Hazards Identification ***

GHS Classification:

Flammable Liquid - Category 2
Skin Corrosion/Irritation - Category 2
Germ Cell Mutagenicity - Category 1B
Carcinogenicity - Category 1B
Toxic to Reproduction - Category 1A
Specific Target Organ Toxicity (Single Exposure) - Category 3 (respiratory irritation, narcosis)
Specific Target Organ Toxicity (Repeat Exposure) - Category 1 (liver, kidneys, bladder, blood, bone marrow, nervous system)
Aspiration Hazard - Category 1
Hazardous to the Aquatic Environment – Acute Hazard - Category 3

GHS LABEL ELEMENTS

Symbol(s)



Signal Word

DANGER

Hazard Statements

Highly flammable liquid and vapour.
Causes skin irritation.
May cause genetic defects.
May cause cancer.
May damage fertility or the unborn child.
May cause respiratory irritation.
May cause drowsiness or dizziness.
Causes damage to organs (liver, kidneys, bladder, blood, bone marrow, nervous system) through prolonged or repeated exposure.
May be fatal if swallowed and enters airways.
Harmful to aquatic life.

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Precautionary Statements

Prevention

Keep away from heat/sparks/open flames/hot surfaces. No smoking
Keep container tightly closed.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ventilating/lighting/equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Wear protective gloves/protective clothing/eye protection/face protection.
Wash hands and forearms thoroughly after handling.
Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Do not breathe mist/vapours/spray.
Use only outdoors or in well-ventilated area.
Do not eat, drink or smoke when using this product.
Avoid release to the environment.

Response

In case of fire: Use water spray, fog, dry chemical fire extinguishers or hand held fire extinguisher.
IF ON SKIN (or hair): Wash with plenty of soap and water. Remove/Take off immediately all contaminated clothing and wash before reuse. If skin irritation occurs, get medical advice/attention.
IF exposed or concerned: Get medical advice/attention.
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a poison center or doctor/physician if you feel unwell.
Get medical advice/attention if you feel unwell.
IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Do not induce vomiting.

Storage

Store in a well-ventilated place.
Keep cool. Keep container tightly closed.
Store locked up.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

* * * Section 3 - Composition / Information on Ingredients * * *

| CAS # | Component | Percent |
|------------|------------------------------|---------|
| 86290-81-5 | Gasoline, motor fuel | 100 |
| 108-88-3 | Toluene | 1-25 |
| 106-97-8 | Butane | <10 |
| 1330-20-7 | Xylenes (o-, m-, p- isomers) | 1-15 |
| 95-63-6 | Benzene, 1,2,4-trimethyl- | <6 |
| 64-17-5 | Ethyl alcohol | 0-10 |
| 100-41-4 | Ethylbenzene | <3 |
| 71-43-2 | Benzene | 0.1-4.9 |

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

| | | |
|----------|--------|-------|
| 110-54-3 | Hexane | 0.5-4 |
|----------|--------|-------|

A complex blend of petroleum-derived normal and branched-chain alkane, cycloalkane, alkene, and aromatic hydrocarbons. May contain antioxidant and multifunctional additives. Non-oxygenated Conventional Gasoline and RBOB do not have oxygenates (Ethanol). Oxygenated Conventional and Reformulated Gasoline will have oxygenates for octane enhancement or as legally required.

* * * Section 4 - First Aid Measures * * *

First Aid: Eyes

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

First Aid: Skin

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or with waterless hand cleanser. Obtain medical attention if irritation or redness develops.

First Aid: Ingestion

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Monitor for breathing difficulties. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

First Aid: Inhalation

Remove person to fresh air. If person is not breathing, provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

* * * Section 5 - Fire Fighting Measures * * *

General Fire Hazards

See Section 9 for Flammability Properties.

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. Flowing product may be ignited by self-generated static electricity. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

Hazardous Combustion Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke). Contact with nitric and sulfuric acids will form nitroresols that can decompose violently.

Extinguishing Media

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, or gaseous extinguishing agent.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

Firefighting foam suitable for polar solvents is recommended for fuel with greater than 10% oxygenate concentration.

Unsuitable Extinguishing Media

None

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Fire Fighting Equipment/Instructions

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment. Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing. Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

* * * Section 6 - Accidental Release Measures * * *

Recovery and Neutralization

Carefully contain and stop the source of the spill, if safe to do so.

Materials and Methods for Clean-Up

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal. Caution, flammable vapors may accumulate in closed containers.

Emergency Measures

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Personal Precautions and Protective Equipment

Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

Environmental Precautions

Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Prevention of Secondary Hazards

None

* * * Section 7 - Handling and Storage * * *

Handling Procedures

USE ONLY AS A MOTOR FUEL.
DO NOT SIPHON BY MOUTH

Handle as a flammable liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents."

Storage Procedures

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

Incompatibilities

Keep away from strong oxidizers.

* * * Section 8 - Exposure Controls / Personal Protection * * *

Component Exposure Limits

Gasoline, motor fuel (86290-81-5)

ACGIH: 300 ppm TWA
500 ppm STEL

Toluene (108-88-3)

ACGIH: 20 ppm TWA
OSHA: 200 ppm TWA; 375 mg/m³ TWA
150 ppm STEL; 560 mg/m³ STEL
NIOSH: 100 ppm TWA; 375 mg/m³ TWA
150 ppm STEL; 560 mg/m³ STEL

Butane (106-97-8)

ACGIH: 1000 ppm TWA (listed under Aliphatic hydrocarbon gases: Alkane C1-4)
OSHA: 800 ppm TWA; 1900 mg/m³ TWA
NIOSH: 800 ppm TWA; 1900 mg/m³ TWA

Xylenes (o-, m-, p- isomers) (1330-20-7)

ACGIH: 100 ppm TWA
150 ppm STEL
OSHA: 100 ppm TWA; 435 mg/m³ TWA
150 ppm STEL; 655 mg/m³ STEL

Benzene, 1,2,4-trimethyl- (95-63-6)

NIOSH: 25 ppm TWA; 125 mg/m³ TWA

Ethyl alcohol (64-17-5)

ACGIH: 1000 ppm STEL
OSHA: 1000 ppm TWA; 1900 mg/m³ TWA
NIOSH: 1000 ppm TWA; 1900 mg/m³ TWA

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Ethylbenzene (100-41-4)

ACGIH: 20 ppm TWA
OSHA: 100 ppm TWA; 435 mg/m³ TWA
125 ppm STEL; 545 mg/m³ STEL
NIOSH: 100 ppm TWA; 435 mg/m³ TWA
125 ppm STEL; 545 mg/m³ STEL

Benzene (71-43-2)

ACGIH: 0.5 ppm TWA
2.5 ppm STEL
Skin - potential significant contribution to overall exposure by the cutaneous route
OSHA: 5 ppm STEL (Cancer hazard, Flammable, See 29 CFR 1910.1028, 15 min); 0.5 ppm Action Level; 1 ppm TWA
NIOSH: 0.1 ppm TWA
1 ppm STEL

Hexane (110-54-3)

ACGIH: 50 ppm TWA
Skin - potential significant contribution to overall exposure by the cutaneous route
OSHA: 500 ppm TWA; 1800 mg/m³ TWA
NIOSH: 50 ppm TWA; 180 mg/m³ TWA

Engineering Measures

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

Personal Protective Equipment: Respiratory

A NIOSH/MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

Personal Protective Equipment: Hands

Gloves constructed of nitrile, neoprene, or PVC are recommended.

PERSONAL PROTECTIVE EQUIPMENT

Personal Protective Equipment: Eyes

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

Personal Protective Equipment: Skin and Body

Chemical protective clothing such as of E.I. DuPont TyChem®, Saranex® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

*** Section 9 - Physical & Chemical Properties ***

| | | | |
|--|---|--|--|
| Appearance: | Translucent, straw-colored or light yellow | Odor: | Strong, characteristic aromatic hydrocarbon odor. Sweet-ether like |
| Physical State: | Liquid | pH: | ND |
| Vapor Pressure: | 6.4 - 15 RVP @ 100 °F (38 °C) (275-475 mm Hg @ 68 °F (20 °C) | Vapor Density: | AP 3-4 |
| Boiling Point: | 85-437 °F (39-200 °C) | Melting Point: | ND |
| Solubility (H2O): | Negligible to Slight | Specific Gravity: | 0.70-0.78 |
| Evaporation Rate: | 10-11 | VOC: | ND |
| Percent Volatile: | 100% | Octanol/H2O Coeff.: | ND |
| Flash Point: | -45 °F (-43 °C) | Flash Point Method: | PMCC |
| Upper Flammability Limit (UFL): | 7.6% | Lower Flammability Limit (LFL): | 1.4% |
| Burning Rate: | ND | Auto Ignition: | >530°F (>280°C) |

*** Section 10 - Chemical Stability & Reactivity Information ***

Chemical Stability

This is a stable material.

Hazardous Reaction Potential

Will not occur.

Conditions to Avoid

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources.

Incompatible Products

Keep away from strong oxidizers.

Hazardous Decomposition Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke). Contact with nitric and sulfuric acids will form nitrocresols that can decompose violently.

*** Section 11 - Toxicological Information ***

Acute Toxicity

A: General Product Information

Harmful if swallowed.

B: Component Analysis - LD50/LC50

Gasoline, motor fuel (86290-81-5)

Inhalation LC50 Rat >5.2 mg/L 4 h; Oral LD50 Rat 14000 mg/kg; Dermal LD50 Rabbit >2000 mg/kg

Toluene (108-88-3)

Inhalation LC50 Rat 12.5 mg/L 4 h; Inhalation LC50 Rat >26700 ppm 1 h; Oral LD50 Rat 636 mg/kg; Dermal LD50 Rabbit 8390 mg/kg; Dermal LD50 Rat 12124 mg/kg

Butane (106-97-8)

Inhalation LC50 Rat 658 mg/L 4 h

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Xylenes (o-, m-, p- isomers) (1330-20-7)

Inhalation LC50 Rat 5000 ppm 4 h; Inhalation LC50 Rat 47635 mg/L 4 h; Oral LD50 Rat 4300 mg/kg; Dermal LD50 Rabbit >1700 mg/kg

Benzene, 1,2,4-trimethyl- (95-63-6)

Inhalation LC50 Rat 18 g/m³ 4 h; Oral LD50 Rat 3400 mg/kg; Dermal LD50 Rabbit >3160 mg/kg

Ethyl alcohol (64-17-5)

Oral LD50 Rat 7060 mg/kg; Inhalation LC50 Rat 124.7 mg/L 4 h

Ethylbenzene (100-41-4)

Inhalation LC50 Rat 17.2 mg/L 4 h; Oral LD50 Rat 3500 mg/kg; Dermal LD50 Rabbit 15354 mg/kg

Benzene (71-43-2)

Inhalation LC50 Rat 13050-14380 ppm 4 h; Oral LD50 Rat 1800 mg/kg

Hexane (110-54-3)

Inhalation LC50 Rat 48000 ppm 4 h; Oral LD50 Rat 25 g/kg; Dermal LD50 Rabbit 3000 mg/kg

Potential Health Effects: Skin Corrosion Property/Stimulativeness

Practically non-toxic if absorbed following acute (single) exposure. May cause skin irritation with prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are repeatedly exposed.

Potential Health Effects: Eye Critical Damage/ Stimulativeness

Moderate irritant. Contact with liquid or vapor may cause irritation.

Potential Health Effects: Ingestion

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.

Potential Health Effects: Inhalation

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

Respiratory Organs Sensitization/Skin Sensitization

This product is not reported to have any skin sensitization effects.

Generative Cell Mutagenicity

This product may cause genetic defects.

Carcinogenicity

A: General Product Information

May cause cancer.

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

IARC has determined that gasoline and gasoline exhaust are possibly carcinogenic in humans. Inhalation exposure to completely vaporized unleaded gasoline caused kidney cancers in male rats and liver tumors in female mice. The U.S. EPA has determined that the male kidney tumors are species-specific and are irrelevant for human health risk assessment. The significance of the tumors seen in female mice is not known. Exposure to light hydrocarbons in the same boiling range as this product has been associated in animal studies with effects to the central and peripheral nervous systems, liver, and kidneys. The significance of these animal models to predict similar human response to gasoline is uncertain.

This product contains benzene. Human health studies indicate that prolonged and/or repeated overexposure to benzene may cause damage to the blood-forming system (particularly bone marrow), and serious blood disorders such as aplastic anemia and leukemia. Benzene is listed as a human carcinogen by the NTP, IARC, OSHA and ACGIH.

B: Component Carcinogenicity

Gasoline, motor fuel (86290-81-5)

ACGIH: A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans

Toluene (108-88-3)

ACGIH: A4 - Not Classifiable as a Human Carcinogen

IARC: Monograph 71 [1999]; Monograph 47 [1989] (Group 3 (not classifiable))

Xylenes (o-, m-, p- isomers) (1330-20-7)

ACGIH: A4 - Not Classifiable as a Human Carcinogen

IARC: Monograph 71 [1999]; Monograph 47 [1989] (Group 3 (not classifiable))

Ethyl alcohol (64-17-5)

ACGIH: A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans

IARC: Monograph 100E [in preparation] (in alcoholic beverages); Monograph 96 [2010] (in alcoholic beverages) (Group 1 (carcinogenic to humans))

Ethylbenzene (100-41-4)

ACGIH: A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans

IARC: Monograph 77 [2000] (Group 2B (possibly carcinogenic to humans))

Benzene (71-43-2)

ACGIH: A1 - Confirmed Human Carcinogen

OSHA: 5 ppm STEL (Cancer hazard, Flammable, See 29 CFR 1910.1028, 15 min); 0.5 ppm Action Level; 1 ppm TWA

NIOSH: potential occupational carcinogen

NTP: Known Human Carcinogen (Select Carcinogen)

IARC: Monograph 100F [in preparation]; Supplement 7 [1987]; Monograph 29 [1982] (Group 1 (carcinogenic to humans))

Reproductive Toxicity

This product is suspected of damaging fertility or the unborn child.

Specified Target Organ General Toxicity: Single Exposure

This product may cause drowsiness or dizziness.

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Specified Target Organ General Toxicity: Repeated Exposure

This product causes damage to organs through prolonged or repeated exposure.

Aspiration Respiratory Organs Hazard

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

* * * Section 12 - Ecological Information * * *

Ecotoxicity

A: General Product Information

Very toxic to aquatic life with long lasting effects. Keep out of sewers, drainage areas and waterways. Report spills and releases, as applicable, under Federal and State regulations.

B: Component Analysis - Ecotoxicity - Aquatic Toxicity

Gasoline, motor fuel (86290-81-5)

| Test & Species | Conditions |
|--|-------------------|
| 96 Hr LC50 Alburnus alburnus | 119 mg/L [static] |
| 96 Hr LC50 Cyprinodon variegatus | 82 mg/L [static] |
| 72 Hr EC50 Pseudokirchneriella subcapitata | 56 mg/L |
| 24 Hr EC50 Daphnia magna | 170 mg/L |

Toluene (108-88-3)

| Test & Species | Conditions | |
|--|---------------------------------|-----------|
| 96 Hr LC50 Pimephales promelas | 15.22-19.05 mg/L [flow-through] | 1 day old |
| 96 Hr LC50 Pimephales promelas | 12.6 mg/L [static] | |
| 96 Hr LC50 Oncorhynchus mykiss | 5.89-7.81 mg/L [flow-through] | |
| 96 Hr LC50 Oncorhynchus mykiss | 14.1-17.16 mg/L [static] | |
| 96 Hr LC50 Oncorhynchus mykiss | 5.8 mg/L [semi-static] | |
| 96 Hr LC50 Lepomis macrochirus | 11.0-15.0 mg/L [static] | |
| 96 Hr LC50 Oryzias latipes | 54 mg/L [static] | |
| 96 Hr LC50 Poecilia reticulata | 28.2 mg/L [semi-static] | |
| 96 Hr LC50 Poecilia reticulata | 50.87-70.34 mg/L [static] | |
| 96 Hr EC50 Pseudokirchneriella subcapitata | >433 mg/L | |
| 72 Hr EC50 Pseudokirchneriella subcapitata | 12.5 mg/L [static] | |
| 48 Hr EC50 Daphnia magna | 5.46 - 9.83 mg/L [Static] | |
| 48 Hr EC50 Daphnia magna | 11.5 mg/L | |

Xylenes (o-, m-, p- isomers) (1330-20-7)

| Test & Species | Conditions |
|--------------------------------|--------------------------|
| 96 Hr LC50 Pimephales promelas | 13.4 mg/L [flow-through] |

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

| | |
|--------------------------------|----------------------------------|
| 96 Hr LC50 Oncorhynchus mykiss | 2.661-4.093 mg/L [static] |
| 96 Hr LC50 Oncorhynchus mykiss | 13.5-17.3 mg/L |
| 96 Hr LC50 Lepomis macrochirus | 13.1-16.5 mg/L [flow-through] |
| 96 Hr LC50 Lepomis macrochirus | 19 mg/L |
| 96 Hr LC50 Lepomis macrochirus | 7.711-9.591 mg/L [static] |
| 96 Hr LC50 Pimephales promelas | 23.53-29.97 mg/L [static] |
| 96 Hr LC50 Cyprinus carpio | 780 mg/L [semi- static] |
| 96 Hr LC50 Cyprinus carpio | >780 mg/L |
| 96 Hr LC50 Poecilia reticulata | 30.26-40.75 mg/L [static] |
| 48 Hr EC50 water flea | 3.82 mg/L |
| 48 Hr LC50 Gammarus lacustris | 0.6 mg/L |

Benzene, 1,2,4-trimethyl- (95-63-6)

Test & Species

| | |
|--------------------------------|----------------------------------|
| 96 Hr LC50 Pimephales promelas | 7.19-8.28 mg/L [flow-through] |
| 48 Hr EC50 Daphnia magna | 6.14 mg/L |

Conditions

Ethyl alcohol (64-17-5)

Test & Species

| | |
|--------------------------------|--------------------------------------|
| 96 Hr LC50 Oncorhynchus mykiss | 12.0 - 16.0 mL/L [static] |
| 96 Hr LC50 Pimephales promelas | >100 mg/L [static] |
| 96 Hr LC50 Pimephales promelas | 13400 - 15100 mg/L [flow-through] |
| 48 Hr LC50 Daphnia magna | 9268 - 14221 mg/L |
| 24 Hr EC50 Daphnia magna | 10800 mg/L |
| 48 Hr EC50 Daphnia magna | 2 mg/L [Static] |

Conditions

Ethylbenzene (100-41-4)

Test & Species

| | |
|---|---------------------------------|
| 96 Hr LC50 Oncorhynchus mykiss | 11.0-18.0 mg/L [static] |
| 96 Hr LC50 Oncorhynchus mykiss | 4.2 mg/L [semi- static] |
| 96 Hr LC50 Pimephales promelas | 7.55-11 mg/L [flow- through] |
| 96 Hr LC50 Lepomis macrochirus | 32 mg/L [static] |
| 96 Hr LC50 Pimephales promelas | 9.1-15.6 mg/L [static] |
| 96 Hr LC50 Poecilia reticulata | 9.6 mg/L [static] |
| 72 Hr EC50 Pseudokirchneriella subcapitata | 4.6 mg/L |
| 96 Hr EC50 Pseudokirchneriella subcapitata | >438 mg/L |
| 72 Hr EC50 Pseudokirchneriella subcapitata | 2.6 - 11.3 mg/L [static] |

Conditions

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

| | |
|--|-------------------------|
| 96 Hr EC50 Pseudokirchneriella subcapitata | 1.7 - 7.6 mg/L [static] |
| 48 Hr EC50 Daphnia magna | 1.8 - 2.4 mg/L |

Benzene (71-43-2)

Test & Species

Conditions

| | |
|--|-------------------------------|
| 96 Hr LC50 Pimephales promelas | 10.7-14.7 mg/L [flow-through] |
| 96 Hr LC50 Oncorhynchus mykiss | 5.3 mg/L [flow-through] |
| 96 Hr LC50 Lepomis macrochirus | 22.49 mg/L [static] |
| 96 Hr LC50 Poecilia reticulata | 28.6 mg/L [static] |
| 96 Hr LC50 Pimephales promelas | 22330-41160 µg/L [static] |
| 96 Hr LC50 Lepomis macrochirus | 70000-142000 µg/L [static] |
| 72 Hr EC50 Pseudokirchneriella subcapitata | 29 mg/L |
| 48 Hr EC50 Daphnia magna | 8.76 - 15.6 mg/L [Static] |
| 48 Hr EC50 Daphnia magna | 10 mg/L |

Hexane (110-54-3)

Test & Species

Conditions

| | |
|--------------------------------|------------------------------|
| 96 Hr LC50 Pimephales promelas | 2.1-2.98 mg/L [flow-through] |
| 24 Hr EC50 Daphnia magna | >1000 mg/L |

Persistence/Degradability

No information available.

Bioaccumulation

No information available.

Mobility in Soil

No information available.

* * * Section 13 - Disposal Considerations * * *

Waste Disposal Instructions

See Section 7 for Handling Procedures. See Section 8 for Personal Protective Equipment recommendations.

Disposal of Contaminated Containers or Packaging

Dispose of contents/container in accordance with local/regional/national/international regulations.

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

*** Section 14 - Transportation Information ***

Component Marine Pollutants

This material contains one or more of the following chemicals required by US DOT to be identified as marine pollutants.

| Component | CAS # | |
|----------------------|------------|--------------------------------|
| Gasoline, motor fuel | 86290-81-5 | DOT regulated marine pollutant |

DOT Information

Shipping Name: Gasoline

UN #: 1203 Hazard Class: 3 Packing Group: II

Placard:



*** Section 15 - Regulatory Information ***

Regulatory Information

A: Component Analysis

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65) and/or CERCLA (40 CFR 302.4).

Toluene (108-88-3)

SARA 313: 1.0 % de minimis concentration
CERCLA: 1000 lb final RQ; 454 kg final RQ

Xylenes (o-, m-, p- isomers) (1330-20-7)

SARA 313: 1.0 % de minimis concentration
CERCLA: 100 lb final RQ; 45.4 kg final RQ

Benzene, 1,2,4-trimethyl- (95-63-6)

SARA 313: 1.0 % de minimis concentration

Ethylbenzene (100-41-4)

SARA 313: 0.1 % de minimis concentration
CERCLA: 1000 lb final RQ; 454 kg final RQ

Benzene (71-43-2)

SARA 313: 0.1 % de minimis concentration
CERCLA: 10 lb final RQ (received an adjusted RQ of 10 lbs based on potential carcinogenicity in an August 14, 1989 final rule); 4.54 kg final RQ (received an adjusted RQ of 10 lbs based on potential carcinogenicity in an August 14, 1989 final rule)

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Hexane (110-54-3)

SARA 313: 1.0 % de minimis concentration

CERCLA: 5000 lb final RQ; 2270 kg final RQ

SARA Section 311/312 – Hazard Classes

Acute Health

X

Chronic Health

X

Fire

X

Sudden Release of Pressure

--

Reactive

--

Component Marine Pollutants

This material contains one or more of the following chemicals required by US DOT to be identified as marine pollutants.

| Component | CAS # | |
|----------------------|------------|--------------------------------|
| Gasoline, motor fuel | 86290-81-5 | DOT regulated marine pollutant |

State Regulations

Component Analysis - State

The following components appear on one or more of the following state hazardous substances lists:

| Component | CAS | CA | MA | MN | NJ | PA | RI |
|------------------------------|------------|-----|-----|-----|-----|-----|----|
| Gasoline, motor fuel | 86290-81-5 | No | No | No | No | Yes | No |
| Toluene | 108-88-3 | Yes | Yes | Yes | Yes | Yes | No |
| Butane | 106-97-8 | Yes | Yes | Yes | Yes | Yes | No |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | Yes | Yes | Yes | Yes | Yes | No |
| Benzene, 1,2,4-trimethyl- | 95-63-6 | No | Yes | Yes | Yes | Yes | No |
| Ethyl alcohol | 64-17-5 | Yes | Yes | Yes | Yes | Yes | No |
| Ethylbenzene | 100-41-4 | Yes | Yes | Yes | Yes | Yes | No |
| Benzene | 71-43-2 | Yes | Yes | Yes | Yes | Yes | No |
| Hexane | 110-54-3 | No | Yes | Yes | Yes | Yes | No |

The following statement(s) are provided under the California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65):

WARNING! This product contains a chemical known to the state of California to cause cancer.

WARNING! This product contains a chemical known to the state of California to cause reproductive/developmental effects.

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Component Analysis - WHMIS IDL

The following components are identified under the Canadian Hazardous Products Act Ingredient Disclosure List:

| Component | CAS # | Minimum Concentration |
|---------------------------|----------|-----------------------|
| Toluene | 108-88-3 | 1 % |
| Butane | 106-97-8 | 1 % |
| Benzene, 1,2,4-trimethyl- | 95-63-6 | 0.1 % |
| Ethyl alcohol | 64-17-5 | 0.1 % |
| Ethylbenzene | 100-41-4 | 0.1 % |
| Benzene | 71-43-2 | 0.1 % |
| Hexane | 110-54-3 | 1 % |

Additional Regulatory Information


Component Analysis - Inventory

| Component | CAS # | TSCA | CAN | EEC |
|------------------------------|------------|------|-----|--------|
| Gasoline, motor fuel | 86290-81-5 | No | DSL | EINECS |
| Toluene | 108-88-3 | Yes | DSL | EINECS |
| Butane | 106-97-8 | Yes | DSL | EINECS |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | Yes | DSL | EINECS |
| Benzene, 1,2,4-trimethyl- | 95-63-6 | Yes | DSL | EINECS |
| Ethyl alcohol | 64-17-5 | Yes | DSL | EINECS |
| Ethylbenzene | 100-41-4 | Yes | DSL | EINECS |
| Benzene | 71-43-2 | Yes | DSL | EINECS |
| Hexane | 110-54-3 | Yes | DSL | EINECS |

*** Section 16 - Other Information ***

NFPA® Hazard Rating

| | |
|------------|---|
| Health | 2 |
| Fire | 3 |
| Reactivity | 0 |



HMIS® Hazard Rating

| | | |
|----------|---|----------|
| Health | 2 | Moderate |
| Fire | 3 | Serious |
| Physical | 0 | Minimal |

*Chronic

Key/Legend

EPA = Environmental Protection Agency; TSCA = Toxic Substance Control Act; ACGIH = American Conference of Governmental Industrial Hygienists; IARC = International Agency for Research on Cancer; NIOSH = National Institute for Occupational Safety and Health; NTP = National Toxicology Program; OSHA = Occupational Safety and Health Administration., NJTSR = New Jersey Trade Secret Registry.

Literature References

None

Safety Data Sheet

Material Name: Gasoline All Grades

SDS No. 9950

Other Information

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.

End of Sheet



SAFETY DATA SHEET

Revision Date 03-May-2019

Version 8

1. IDENTIFICATION

Product identifier

Product Name 51D PIPE JOINT COMPOUND 16.2 FL.OZ

Other means of identification

Product Code 80045

Recommended use of the chemical and restrictions on use

Recommended Use Sealant

Uses advised against No information available

Details of the supplier of the safety data sheet

Manufacturer Address

ITW Permatex
6875 Parkland Blvd.
Solon, Ohio 44139 USA
Telephone: 1-87-Permatex
(866) 732-9502

24-hour emergency phone number

Chem-Tel: 800-255-3924
International Emergency:
00+1+ 813-248-0585
Contract Number: MIS0003453

May Also Be Distributed by:

ITW Permatex Canada
101-2360 Bristol Circle
Oakville, ON Canada L6H 6M5
Telephone: (800) 924-6994

E-mail address: mail@permatex.com

2. HAZARDS IDENTIFICATION

Classification

OSHA Regulatory Status

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

| | |
|--------------------|------------|
| Skin sensitization | Category 1 |
| Flammable liquids | Category 3 |

Label elements

Emergency Overview

Signal word

Warning

May cause an allergic skin reaction
Flammable liquid and vapor

**Appearance** Black**Physical state** Paste**Odor** Alcohol**Precautionary Statements - Prevention**

Avoid breathing dust/fume/gas/mist/vapors/spray
 Contaminated work clothing should not be allowed out of the workplace
 Wear protective gloves
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking
 Keep container tightly closed
 Use non-sparking tools
 Take precautionary measures against static discharge

Precautionary Statements - Response

Specific treatment (see supplemental first aid instructions on this label)

IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower
 If skin irritation or rash occurs: Get medical advice/attention
 Wash contaminated clothing before reuse
 In case of fire: Use CO₂, dry chemical, or foam to extinguish.

Precautionary Statements - Storage

Store in a well-ventilated place. Keep cool

Precautionary Statements - Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Not applicable

Other Information

Not applicable

Unknown acute toxicity

2.0155 % of the mixture consists of ingredient(s) of unknown toxicity

3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | CAS No | Weight-% |
|------------------------|-----------|----------|
| ROSIN | 8050-09-7 | 10 - 30 |
| ETHANOL | 64-17-5 | 7 - 13 |
| 2-PROPANOL | 67-63-0 | 1 - 5 |
| METHANOL | 67-56-1 | 0.1 - 1 |
| METHYL ISOBUTYL KETONE | 108-10-1 | 0.1 - 1 |

4. FIRST AID MEASURES

Description of first aid measures**General advice**

Get medical advice/attention if you feel unwell.

Eye contact

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical

advice/attention.

| | |
|---|--|
| Skin contact | IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. Wash with soap and water. If skin irritation or rash occurs: Get medical advice/attention. Wash contaminated clothing before reuse. |
| Inhalation | IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If symptoms persist, call a physician. |
| Ingestion | IF SWALLOWED: Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Call a physician. |
| Self-protection of the first aider | Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves. |

Most important symptoms and effects, both acute and delayed

Symptoms See section 2 for more information.

Indication of any immediate medical attention and special treatment needed

Note to physicians Treat symptomatically.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

Carbon dioxide (CO₂), Dry chemical, Foam

Unsuitable extinguishing media

None

Specific hazards arising from the chemical

Flammable. Risk of ignition. Vapors may form explosive mixtures with air.

Explosion data

Sensitivity to Mechanical Impact None.

Sensitivity to Static Discharge None.

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal precautions Ensure adequate ventilation, especially in confined areas. Avoid contact with skin, eyes or clothing. Use personal protective equipment as required. Remove all sources of ignition. Take precautionary measures against static discharges.

Environmental precautions

Environmental precautions Do not flush into surface water or sanitary sewer system.

Methods and material for containment and cleaning up

Methods for containment Prevent further leakage or spillage if safe to do so.

Methods for cleaning up Eliminate all ignition sources if safe to do so. Ensure adequate ventilation. Soak up with inert absorbent material. Sweep up and shovel into suitable containers for disposal.

Prevention of secondary hazards Clean contaminated objects and areas thoroughly observing environmental regulations.

7. HANDLING AND STORAGE

Precautions for safe handling

Advice on safe handling

Handle in accordance with good industrial hygiene and safety practice. Avoid breathing vapors or mists. Avoid contact with skin, eyes or clothing. Wash thoroughly after handling. Wash contaminated clothing before reuse. Use personal protective equipment as required. Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

Conditions for safe storage, including any incompatibilities

Storage Conditions

Keep containers tightly closed in a cool, well-ventilated place.

Incompatible materials

Strong oxidizing agents

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure Guidelines

| Chemical Name | ACGIH TLV | OSHA PEL | NIOSH IDLH |
|------------------------------------|-------------------------------------|--|---|
| ROSIN 8050-09-7 | - | (vacated) TWA: 0.1 mg/m ³ Formaldehyde | TWA: 0.1 mg/m ³ Formaldehyde |
| ETHANOL 64-17-5 | STEL: 1000 ppm | TWA: 1000 ppm TWA: 1900 mg/m ³ (vacated) TWA: 1000 ppm (vacated) TWA: 1900 mg/m ³ | IDLH: 3300 ppm TWA: 1000 ppm TWA: 1900 mg/m ³ |
| 2-PROPANOL 67-63-0 | STEL: 400 ppm TWA: 200 ppm | TWA: 400 ppm TWA: 980 mg/m ³ (vacated) TWA: 400 ppm (vacated) TWA: 980 mg/m ³ (vacated) STEL: 500 ppm (vacated) STEL: 1225 mg/m ³ | IDLH: 2000 ppm TWA: 400 ppm TWA: 980 mg/m ³ STEL: 500 ppm STEL: 1225 mg/m ³ |
| METHANOL 67-56-1 | STEL: 250 ppm TWA: 200 ppm S* | TWA: 200 ppm TWA: 260 mg/m ³ (vacated) TWA: 200 ppm (vacated) TWA: 260 mg/m ³ (vacated) STEL: 250 ppm (vacated) STEL: 325 mg/m ³ (vacated) S* | IDLH: 6000 ppm TWA: 200 ppm TWA: 260 mg/m ³ STEL: 250 ppm STEL: 325 mg/m ³ |
| METHYL ISOBUTYL KETONE 108-10-1 | STEL: 75 ppm TWA: 20 ppm | TWA: 100 ppm TWA: 410 mg/m ³ (vacated) TWA: 50 ppm (vacated) TWA: 205 mg/m ³ (vacated) STEL: 75 ppm (vacated) STEL: 300 mg/m ³ | IDLH: 500 ppm TWA: 50 ppm TWA: 205 mg/m ³ STEL: 75 ppm STEL: 300 mg/m ³ |

NIOSH IDLH *Immediately Dangerous to Life or Health*

Other Information

Vacated limits revoked by the Court of Appeals decision in AFL-CIO v. OSHA, 965 F.2d 962 (11th Cir., 1992).

Appropriate engineering controls

Engineering Controls

Showers
Eyewash stations
Ventilation systems

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin and body protection

Wear protective natural rubber, nitrile rubber, Neoprene™ or PVC gloves.

Respiratory protection Use NIOSH-approved air-purifying respirator with organic vapor cartridge or canister, as appropriate.

General Hygiene Considerations Handle in accordance with good industrial hygiene and safety practice. Regular cleaning of equipment, work area and clothing is recommended.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1. Information on basic physical and chemical properties

Physical state Paste
Appearance Black
Odor Alcohol
Odor threshold No information available

| <u>Property</u> | <u>Values</u> | <u>Remarks • Method</u> |
|---|--------------------------|-------------------------|
| pH | No information available | |
| Melting point / freezing point | No information available | |
| Boiling point / boiling range | 82 °C / 180 °F | |
| Flash point | 25 °C / 77 °F | Tag Closed Cup |
| Evaporation rate | < 1 | Butyl acetate = 1 |
| Flammability (solid, gas) | No information available | |
| Flammability Limit in Air | | |
| Upper flammability limit: | 12.7% | |
| Lower flammability limit: | 2.3% | |
| Vapor pressure | 33 mm Hg @ 68°F | |
| Vapor density | >1 | Air = 1 |
| Relative density | 1.25-1.32 | |
| Water solubility | Partially soluble | |
| Solubility(ies) | No information available | |
| Partition coefficient | No information available | |
| Autoignition temperature | No information available | |
| Decomposition temperature | No information available | |
| Kinematic viscosity | No information available | |
| Dynamic viscosity | No information available | |
| Explosive properties | No information available | |
| Oxidizing properties | No information available | |
| <u>Other Information</u> | | |
| Softening point | No information available | |
| Molecular weight | No information available | |
| VOC Content (%) | 14.2% | |
| Density | No information available | |
| Bulk density | No information available | |
| SADT (self-accelerating decomposition temperature) | No information available | |

10. STABILITY AND REACTIVITY

Reactivity
 No information available

Chemical stability
 Stable under normal conditions

Possibility of Hazardous Reactions
 None under normal processing.

Conditions to avoid
 Heat, flames and sparks.

Incompatible materials

Strong oxidizing agents

Hazardous Decomposition Products

Carbon oxides
Aldehydes
Carboxylic acids

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May cause irritation of respiratory tract. |
| Eye contact | Contact with eyes may cause irritation. May cause redness and tearing of the eyes. |
| Skin contact | May cause skin irritation and/or dermatitis. May cause sensitization by skin contact. |
| Ingestion | Ingestion may cause irritation to mucous membranes. |

| Chemical Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|------------------------------------|---|---|---|
| ROSIN 8050-09-7 | = 7600 mg/kg (Rat) = 3000 mg/kg (Rat) | > 2500 mg/kg (Rabbit) | = 1.5 mg/L (Rat) 4 h |
| ETHANOL 64-17-5 | = 7060 mg/kg (Rat) | - | = 124.7 mg/L (Rat) 4 h |
| 2-PROPANOL 67-63-0 | 5050 mg/kg | 12800 mg/kg | = 72600 mg/m ³ (Rat) 4 h |
| METHANOL 67-56-1 | = 6200 mg/kg (Rat) | = 15800 mg/kg (Rabbit) = 15840 mg/kg (Rabbit) | = 64000 ppm (Rat) 4 h = 22500 ppm (Rat) 8 h |
| METHYL ISOBUTYL KETONE 108-10-1 | = 2080 mg/kg (Rat) | = 3000 mg/kg (Rabbit) | 2000 - 4000 ppm (Rat) 4 h |

Information on toxicological effects

Symptoms No information available.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Sensitization No information available.

Germ cell mutagenicity No information available.

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

| Chemical Name | ACGIH | IARC | NTP | OSHA |
|---------------------------------------|-------|----------|-------|------|
| ETHANOL 64-17-5 | A3 | Group 1 | Known | X |
| METHYL ISOBUTYL KETONE 108-10-1 | A3 | Group 2B | - | X |

ACGIH (American Conference of Governmental Industrial Hygienists)

A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

IARC (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2B - Possibly Carcinogenic to Humans

Not classifiable as a human carcinogen

NTP (National Toxicology Program)

Known - Known Carcinogen

OSHA (Occupational Safety and Health Administration of the US Department of Labor)

X - Present

Chronic toxicity May cause adverse effects on the bone marrow and blood-forming system. May cause adverse liver effects. Contains a known or suspected reproductive toxin.

Target Organ Effects Blood, Central nervous system, Central Vascular System (CVS), Eyes, Liver, Reproductive System, Respiratory system, Skin, Thyroid.

The following values are calculated based on chapter 3.1 of the GHS document .

ATEmix (oral) 11916 mg/kg

ATEmix (dermal) 9640 mg/kg
 ATEmix (inhalation-dust/mist) 78.3 mg/l

12. ECOLOGICAL INFORMATION

Ecotoxicity

2.6355 % of the mixture consists of component(s) of unknown hazards to the aquatic environment

Persistence and degradability

No information available.

Bioaccumulation

No information available.

Mobility

No information available.

| Chemical Name | Partition coefficient |
|------------------------------------|-----------------------|
| ETHANOL 64-17-5 | -0.32 |
| 2-PROPANOL 67-63-0 | 0.05 |
| METHANOL 67-56-1 | -0.77 |
| METHYL ISOBUTYL KETONE 108-10-1 | 1.19 |

Other adverse effects

No information available

13. DISPOSAL CONSIDERATIONS

Waste treatment methods

Disposal of wastes This material, as supplied, is a hazardous waste according to federal regulations (40 CFR 261).

Contaminated packaging Do not reuse container.

US EPA Waste Number D001

This product contains one or more substances that are listed with the State of California as a hazardous waste.

| Chemical Name | California Hazardous Waste Status |
|-----------------------|-----------------------------------|
| ETHANOL 64-17-5 | Toxic Ignitable |
| 2-PROPANOL 67-63-0 | Toxic Ignitable |
| METHANOL 67-56-1 | Toxic Ignitable |

14. TRANSPORT INFORMATION

DOT

UN/ID No 1866
Proper shipping name: Resin, solution, flammable, Limited Quantity (LQ)
Hazard Class 3
Packing Group III

Emergency Response Guide Number 127

IATA

UN/ID No ID8000
Proper shipping name: Consumer commodity
Hazard Class 9
ERG Code 9L

IMDG

UN/ID No 1866
Proper shipping name: Resin, solution, flammable, Limited Quantity (LQ)
Hazard Class 3
Packing Group III
EmS-No F-E, S-E

15. REGULATORY INFORMATION**International Inventories**

TSCA Complies
DSL/NDSL Complies
EINECS/ELINCS Complies
ENCS Not determined
IECSC Complies
KECL Complies
PICCS Complies
AICS Complies

Legend:

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory
DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List
EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances
ENCS - Japan Existing and New Chemical Substances
IECSC - China Inventory of Existing Chemical Substances
KECL - Korean Existing and Evaluated Chemical Substances
PICCS - Philippines Inventory of Chemicals and Chemical Substances
AICS - Australian Inventory of Chemical Substances

US Federal Regulations**SARA 313**

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

| Chemical Name | SARA 313 - Threshold Values % |
|----------------------|-------------------------------|
| 2-PROPANOL - 67-63-0 | 1.0 |

SARA 311/312 Hazard Categories

Acute health hazard Yes
Chronic Health Hazard No
Fire hazard Yes
Sudden release of pressure hazard No
Reactive Hazard No

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

| Chemical Name | Hazardous Substances RQs | CERCLA/SARA RQ | Reportable Quantity (RQ) |
|---------------|--------------------------|----------------|--------------------------|
|---------------|--------------------------|----------------|--------------------------|

| | | | |
|------------------------------------|---------|---|--|
| METHANOL 67-56-1 | 5000 lb | - | RQ 5000 lb final RQ RQ 2270 kg final RQ |
| METHYL ISOBUTYL KETONE 108-10-1 | 5000 lb | - | RQ 5000 lb final RQ RQ 2270 kg final RQ |

US State Regulations

California Proposition 65

This product contains the following Proposition 65 chemicals

| Chemical Name | California Proposition 65 |
|-----------------------------------|--|
| ETHANOL - 64-17-5 | Carcinogen Developmental |
| METHANOL - 67-56-1 | Developmental |
| TITANIUM DIOXIDE - 13463-67-7 | *Carcinogen (airborne, unbound particles of respirable size) |
| CARBON BLACK - 1333-86-4 | *Carcinogen (airborne, unbound particles of respirable size) |
| SILICA, QUARTZ - 14808-60-7 | *Carcinogen (airborne particles of respirable size only) |
| METHYL ISOBUTYL KETONE - 108-10-1 | Carcinogen Developmental |

- *The asterisked chemical(s) listed are not subject to Proposition 65 because they are not airborne in the finished product
- Ethanol has been shown to be carcinogenic in long-term studies only when consumed as alcoholic beverage
- Ethanol has been shown to be a reproductive toxin only when consumed as an alcoholic beverage

U.S. State Right-to-Know Regulations

| Chemical Name | New Jersey | Massachusetts | Pennsylvania |
|------------------------------------|------------|---------------|--------------|
| KAOLIN 1332-58-7 | X | X | X |
| ETHANOL 64-17-5 | X | X | X |
| TALC 14807-96-6 | X | X | X |
| 2-PROPANOL 67-63-0 | X | X | X |
| METHANOL 67-56-1 | X | X | X |
| TITANIUM DIOXIDE 13463-67-7 | X | X | X |
| CARBON BLACK 1333-86-4 | X | X | X |
| SILICA, QUARTZ 14808-60-7 | X | X | X |
| METHYL ISOBUTYL KETONE 108-10-1 | X | X | X |

U.S. EPA Label Information

EPA Pesticide Registration Number Not applicable

WHMIS Hazard Class

B2 - Flammable liquid, D2B - Toxic materials

16. OTHER INFORMATION, INCLUDING DATE OF PREPARATION OF THE LAST REVISION

| | | | | |
|-------------|------------------|----------------|--------------------|-----------------------|
| NFPA | Health hazards 2 | Flammability 3 | Instability 0 | - |
| HMIS | Health hazards 2 | Flammability 3 | Physical hazards 0 | Personal protection B |

NFPA (National Fire Protection Association)
HMIS (Hazardous Material Information System)

Revision Date 03-May-2019

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information

relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet

Safety Data Sheet



1. Identification

| | | | |
|-----------------------------|--|-------------------------|--|
| Product Name: | PRO +LSPR 6PK GLOSS WHITE | Revision Date: | 4/11/2019 |
| Product Identifier: | 7592838 | Supercedes Date: | 5/12/2017 |
| Recommended Use: | Topcoat/Aerosols | | |
| Supplier: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA | Manufacturer: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA |
| Preparer: | Regulatory Department | | |
| Emergency Telephone: | 24 Hour Hotline: 847-367-7700 | | |

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

30% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|--|
| Carcinogenicity, category 2 | H351 | Suspected of causing cancer. |
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Eye Irritation, category 2A | H319 | Causes serious eye irritation. |
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| STOT, repeated exposure, category 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|-----------|--|
| P201 | Obtain special instructions before use. |
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P260 | Do not breathe dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |

| | |
|----------------|--|
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P308+P313 | IF exposed or concerned: Get medical advice/attention. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|----------------------------------|----------------|-----------------------|-----------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| n-Butyl Acetate | 123-86-4 | 10-25 | GHS02-GHS07 | H226-336 |
| Titanium Dioxide | 13463-67-7 | 10-25 | Not Available | Not Available |
| n-Butane | 106-97-8 | 2.5-10 | GHS04 | H280 |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 2.5-10 | GHS02-GHS07 | H226-315-319-332 |
| Ethylbenzene | 100-41-4 | 1.0-2.5 | GHS02-GHS07- GHS08 | H225-304-332-351-373 |
| Propylene Glycol Monobutyl Ether | 5131-66-8 | 1.0-2.5 | GHS07 | H302-315-319 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|----------------------------------|------------|-----------------------|-------------------|--------------------|--------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 20.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 15.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| Titanium Dioxide | 13463-67-7 | 15.0 | 10 mg/m3 | N.E. | 15 mg/m3 | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 10.0 | 100 ppm | 150 ppm | 100 ppm | N.E. |
| Ethylbenzene | 100-41-4 | 5.0 | 20 ppm | N.E. | 100 ppm | N.E. |
| Propylene Glycol Monobutyl Ether | 5131-66-8 | 5.0 | N.E. | N.E. | N.E. | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Relative Density: | 0.832 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 1.0 - 13.0 |
| Boiling Range, °C: | -37 - 537 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: May cause skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010)

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|----------------------------------|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 13463-67-7 | Titanium Dioxide | >10000 mg/kg Rat | 2500 mg/kg | N.E. |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 1330-20-7 | Xylenes (o-, m-, p- isomers) | 3500 mg/kg Rat | >4350 mg/kg Rabbit | 29.08 mg/L Rat |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |
| 5131-66-8 | Propylene Glycol Monobutyl Ether | 1900 mg/kg Rat | N.E. | N.E. |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|---|-----------------------------|---------------------|---------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint and Related Spray Products in Ltd Qty | Aerosols | Aerosols, flammable | Aerosols |
| Hazard Class: | N.A. | 2 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Carcinogenicity, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure)

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------------|----------------|
| Xylenes (o-, m-, p- isomers) | 1330-20-7 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65:

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

16. Other Information**HMIS RATINGS**

Health: 2* **Flammability:** 4 **Physical Hazard:** 0 **Personal Protection:** X

NFPA RATINGS

Health: 2 **Flammability:** 4 **Instability:** 0

Volatile Organic Compounds: 527 g/L

SDS REVISION DATE: 4/11/2019

REASON FOR REVISION: Revision Description Changed
Product Composition Changed
Substance and/or Product Properties Changed in Section(s):
02 - Hazard Identification
14 - Transport Information
15 - Regulatory Information
16 - Other Information
Revision Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.

SAFETY DATA SHEET



Date of issue/Date of revision 16 November 2019

Version 8.01

Section 1. Identification

Product name : 55-653 PITT BULL SPRAY COLD GALVANIZING
Product code : 00356944
Other means of identification : Not available.
Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Product use : Consumer applications, Professional applications.
Use of the substance/mixture : Coating.
Uses advised against : Not applicable.

Manufacturer : PPG Industries, Inc.
One PPG Place
Pittsburgh, PA 15272
Emergency telephone number : (412) 434-4515 (U.S.)
(514) 645-1320 (Canada)
01-800-00-21-400 or + 52 55 5559 1588 (Mexico)

Technical Phone Number : 1-800-441-9695 (8:00 am to 5:00 pm EST)

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SKIN IRRITATION - Category 2
EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 2
TOXIC TO REPRODUCTION (Unborn child) - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
Percentage of the mixture consisting of ingredient(s) of unknown acute toxicity: 56.6% (Oral), 56.6% (Dermal), 31.8% (Inhalation)

GHS label elements

United States

Page: 1/17

Section 2. Hazards identification

Hazard pictograms

:

**Signal word**

: Danger

Hazard statements

: Extremely flammable aerosol.
Contains gas under pressure; may explode if heated.
Causes serious eye irritation.
Causes skin irritation.
Suspected of damaging the unborn child.
Suspected of causing cancer.
May cause drowsiness or dizziness.
May cause damage to organs through prolonged or repeated exposure.

Precautionary statements**General**

: Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention

: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Wash hands thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.

Response

: Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage

: Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place.

Disposal

: Dispose of contents and container in accordance with all local, regional, national and international regulations.

Supplemental label elements

: Contents under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode. Do not puncture or incinerate. Keep away from heat and direct sunlight. Sanding and grinding dusts may be harmful if inhaled. Avoid contact with skin and clothing. Wash thoroughly after handling. Emits toxic fumes when heated. DANGER - RAGS, STEEL WOOL OR WASTE SOAKED WITH THIS PRODUCT MAY SPONTANEOUSLY CATCH FIRE IF IMPROPERLY DISCARDED. IMMEDIATELY AFTER EACH USE, PLACE RAGS, STEEL WOOL OR WASTE IN A SEALED WATER-FILLED METAL CONTAINER.

Hazards not otherwise classified

: Prolonged or repeated contact may dry skin and cause irritation.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture
Product name : 55-653 PITT BULL SPRAY COLD GALVANIZING

| Ingredient name | % | CAS number |
|---|-------------|------------|
| acetone | ≥20 - ≤50 | 67-64-1 |
| toluene | ≥10 - ≤20 | 108-88-3 |
| propane | ≥10 - ≤20 | 74-98-6 |
| butane | ≥10 - ≤20 | 106-97-8 |
| xylene | ≥1.0 - ≤5.0 | 1330-20-7 |
| Solvent naphtha (petroleum), light aromatic | ≥1.0 - ≤5.0 | 64742-95-6 |
| ethylbenzene | <1.0 | 100-41-4 |

SUB codes represent substances without registered CAS Numbers.

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

If ingestion, irritation, any type of overexposure or symptoms of overexposure occur during or persists after use of this product, contact a POISON CONTROL CENTER, EMERGENCY ROOM OR PHYSICIAN immediately; have Safety Data Sheet information available. Never give anything by mouth to an unconscious or convulsing person.

Description of necessary first aid measures

- Eye contact** : Remove contact lenses, irrigate copiously with clean, fresh water, holding the eyelids apart for at least 10 minutes and seek immediate medical advice.
- Inhalation** : Remove to fresh air. Keep person warm and at rest. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel.
- Skin contact** : Remove contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognized skin cleanser. Do NOT use solvents or thinners.
- Ingestion** : If swallowed, seek medical advice immediately and show this container or label. Keep person warm and at rest. Do NOT induce vomiting.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness.
- Skin contact** : Causes skin irritation. Defatting to the skin.
- Ingestion** : Can cause central nervous system (CNS) depression.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness

Section 4. First aid measures

- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
dryness
cracking
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Extremely flammable aerosol. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed. Runoff to sewer may create fire or explosion hazard. This material is toxic to aquatic life with long lasting

Section 5. Fire-fighting measures

- effects. Fire water contaminated with this material must be contained and prevented from being discharged to any waterway, sewer or drain.
- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon oxides
metal oxide/oxides
- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.
- Special precautions** : Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Vapors are heavier than air and may spread along floors. Materials such as cleaning rags, paper wipes and protective clothing, which are contaminated with the product may spontaneously self-ignite some hours later. To avoid the risks of fires, all contaminated materials should be stored in purpose-built containers or in metal containers with tight-fitting, self-closing lids. Contaminated materials should be removed from the workplace at the end of each working day and be stored outside. If this material is part of a multiple component system, read the Safety Data Sheet(s) for the other component or components before blending as the resulting mixture may have the hazards of all of its parts.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Do not store above the following temperature: 50°C (122°F). Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|-----------------|---|
| acetone | ACGIH TLV (United States, 3/2019). STEL: 500 ppm 15 minutes. TWA: 250 ppm 8 hours. OSHA PEL (United States, 5/2018). TWA: 2400 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. |
| toluene | OSHA PEL Z2 (United States, 2/2013). AMP: 500 ppm 10 minutes. CEIL: 300 ppm TWA: 200 ppm 8 hours. ACGIH TLV (United States, 3/2019). TWA: 20 ppm 8 hours. |

Section 8. Exposure controls/personal protection

| | |
|--|---|
| propane | <p>OSHA PEL (United States, 5/2018). TWA: 1800 mg/m³ 8 hours. TWA: 1000 ppm 8 hours. ACGIH TLV (United States, 3/2019). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> |
| butane | <p>ACGIH TLV (United States, 3/2019). Explosive potential. STEL: 1000 ppm 15 minutes.</p> |
| xylene | <p>ACGIH TLV (United States, 3/2019). STEL: 651 mg/m³ 15 minutes. STEL: 150 ppm 15 minutes. TWA: 434 mg/m³ 8 hours. TWA: 100 ppm 8 hours.</p> |
| Solvent naphtha (petroleum), light aromatic ethylbenzene | <p>OSHA PEL (United States, 5/2018). TWA: 435 mg/m³ 8 hours. TWA: 100 ppm 8 hours. None. ACGIH TLV (United States, 3/2019). TWA: 20 ppm 8 hours. OSHA PEL (United States, 5/2018). TWA: 435 mg/m³ 8 hours. TWA: 100 ppm 8 hours.</p> |

Key to abbreviations

| | |
|--|---|
| A = Acceptable Maximum Peak | S = Potential skin absorption |
| ACGIH = American Conference of Governmental Industrial Hygienists. | SR = Respiratory sensitization |
| C = Ceiling Limit | SS = Skin sensitization |
| F = Fume | STEL = Short term Exposure limit values |
| IPEL = Internal Permissible Exposure Limit | TD = Total dust |
| OSHA = Occupational Safety and Health Administration. | TLV = Threshold Limit Value |
| R = Respirable | TWA = Time Weighted Average |
| Z = OSHA 29 CFR 1910.1200 Subpart Z - Toxic and Hazardous Substances | |

Consult local authorities for acceptable exposure limits.

Recommended monitoring procedures : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment. Reference should be made to appropriate monitoring standards. Reference to national guidance documents for methods for the determination of hazardous substances will also be required.

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Section 8. Exposure controls/personal protection

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Chemical splash goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Gloves** : For prolonged or repeated handling, use the following type of gloves:

Recommended: butyl rubber, polyvinyl alcohol (PVA), Viton®
May be used: nitrile rubber
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. If workers are exposed to concentrations above the exposure limit, they must use appropriate, certified respirators. Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Characteristic.
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : Not available.
- Boiling point** : <35°C (<95°F)
- Flash point** : Closed cup: -60°C (-76°F)
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.

Section 9. Physical and chemical properties

| | |
|--|--|
| Evaporation rate | : Not available. |
| Vapor pressure | : Not available. |
| Vapor density | : Not available. |
| Relative density | : 1.07 |
| Density (lbs / gal) | : 8.93 |
| Solubility | : Insoluble in the following materials: cold water. |
| Partition coefficient: n-octanol/water | : Not available. |
| Viscosity | : Kinematic (40°C (104°F)): >0.21 cm ² /s (>21 cSt) |
| Volatility | : 46% (v/v), 76% (w/w) |
| % Solid. (w/w) | : 24 |
| Aerosol product | |
| Type of aerosol | : Spray |
| Heat of combustion | : 26.85 kJ/g |

Section 10. Stability and reactivity

| | |
|------------------------------------|--|
| Reactivity | : No specific test data related to reactivity available for this product or its ingredients. |
| Chemical stability | : The product is stable. |
| Possibility of hazardous reactions | : Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | : When exposed to high temperatures may produce hazardous decomposition products. Refer to protective measures listed in sections 7 and 8. |
| Incompatible materials | : Keep away from the following materials to prevent strong exothermic reactions: oxidizing agents, strong alkalis, strong acids. |
| Hazardous decomposition products | : Decomposition products may include the following materials: carbon monoxide, carbon dioxide, smoke, oxides of nitrogen. |

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Section 11. Toxicological information

| Product/ingredient name | Result | Species | Dose | Exposure |
|--|-----------------------|---------|--------------------------|----------|
| acetone | LC50 Inhalation Vapor | Rat | 76000 mg/m ³ | 4 hours |
| | LD50 Dermal | Rabbit | 15.8 g/kg | - |
| | LD50 Oral | Rat | 5800 mg/kg | - |
| toluene | LC50 Inhalation Vapor | Rat | 49 g/m ³ | 4 hours |
| | LD50 Dermal | Rabbit | 8.39 g/kg | - |
| | LD50 Oral | Rat | 5580 mg/kg | - |
| butane | LC50 Inhalation Vapor | Rat | 658000 mg/m ³ | 4 hours |
| xylene | LD50 Dermal | Rabbit | >1.7 g/kg | - |
| | LD50 Oral | Rat | 4.3 g/kg | - |
| Solvent naphtha (petroleum), light aromatic | LD50 Dermal | Rabbit | 3.48 g/kg | - |
| | LD50 Oral | Rat | 8400 mg/kg | - |
| ethylbenzene | LC50 Inhalation Vapor | Rat | 17.8 mg/l | 4 hours |
| | LD50 Dermal | Rabbit | 17.8 g/kg | - |
| | LD50 Oral | Rat | 3.5 g/kg | - |

Conclusion/Summary : There are no data available on the mixture itself.

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-----------------|-------------|
| xylene | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |

Conclusion/Summary

Skin : There are no data available on the mixture itself.

Eyes : There are no data available on the mixture itself.

Respiratory : There are no data available on the mixture itself.

Sensitization**Conclusion/Summary**

Skin : There are no data available on the mixture itself.

Respiratory : There are no data available on the mixture itself.

Mutagenicity

Conclusion/Summary : There are no data available on the mixture itself.

Carcinogenicity

Conclusion/Summary : There are no data available on the mixture itself.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| toluene | - | 3 | - |
| xylene | - | 3 | - |
| ethylbenzene | - | 2B | - |

Carcinogen Classification code:

IARC: 1, 2A, 2B, 3, 4

NTP: Known to be a human carcinogen; Reasonably anticipated to be a human carcinogen

OSHA: +

Not listed/not regulated: -

Reproductive toxicity

Section 11. Toxicological information

Conclusion/Summary : There are no data available on the mixture itself.

Teratogenicity

Conclusion/Summary : There are no data available on the mixture itself.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|---|------------|-------------------|------------------------------|
| acetone | Category 3 | Not applicable. | Narcotic effects |
| toluene | Category 3 | Not applicable. | Narcotic effects |
| xylene | Category 3 | Not applicable. | Respiratory tract irritation |
| Solvent naphtha (petroleum), light aromatic | Category 3 | Not applicable. | Narcotic effects |
| | Category 3 | Not applicable. | Respiratory tract irritation |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|--------------|------------|-------------------|----------------|
| toluene | Category 2 | Not determined | Not determined |
| propane | Category 2 | Not determined | Not determined |
| butane | Category 2 | Not determined | Not determined |
| ethylbenzene | Category 2 | Not determined | hearing organs |

Target organs : Contains material which causes damage to the following organs: brain, central nervous system (CNS).
Contains material which may cause damage to the following organs: blood, kidneys, lungs, the nervous system, the reproductive system, liver, heart, gastrointestinal tract, upper respiratory tract, skin, eye, lens or cornea.

Aspiration hazard

| Name | Result |
|---|--------------------------------|
| toluene | ASPIRATION HAZARD - Category 1 |
| xylene | ASPIRATION HAZARD - Category 1 |
| Solvent naphtha (petroleum), light aromatic | ASPIRATION HAZARD - Category 1 |
| ethylbenzene | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness.
- Skin contact** : Causes skin irritation. Defatting to the skin.
- Ingestion** : Can cause central nervous system (CNS) depression.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness

Section 11. Toxicological information

Inhalation : Adverse symptoms may include the following:
 respiratory tract irritation
 coughing
 nausea or vomiting
 headache
 drowsiness/fatigue
 dizziness/vertigo
 unconsciousness
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Skin contact : Adverse symptoms may include the following:
 irritation
 redness
 dryness
 cracking
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Ingestion : Adverse symptoms may include the following:
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Conclusion/Summary : There are no data available on the mixture itself. Exposure to component solvent vapor concentrations in excess of the stated occupational exposure limit may result in adverse health effects such as mucous membrane and respiratory system irritation and adverse effects on the kidneys, liver and central nervous system. Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and, in extreme cases, loss of consciousness. Solvents may cause some of the above effects by absorption through the skin. There is some evidence that repeated exposure to organic solvent vapors in combination with constant loud noise can cause greater hearing loss than expected from exposure to noise alone. If splashed in the eyes, the liquid may cause irritation and reversible damage. Ingestion may cause nausea, diarrhea and vomiting. This takes into account, where known, delayed and immediate effects and also chronic effects of components from short-term and long-term exposure by oral, inhalation and dermal routes of exposure and eye contact.

Short term exposure

Potential immediate effects : There are no data available on the mixture itself.

Potential delayed effects : There are no data available on the mixture itself.

Long term exposure

Potential immediate effects : There are no data available on the mixture itself.

Potential delayed effects : There are no data available on the mixture itself.

Potential chronic health effects

General : May cause damage to organs through prolonged or repeated exposure. Prolonged or repeated contact can defat the skin and lead to irritation, cracking and/or dermatitis.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Section 11. Toxicological information

- Mutagenicity** : No known significant effects or critical hazards.
Teratogenicity : Suspected of damaging the unborn child.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Product/ingredient name | Oral (mg/kg) | Dermal (mg/kg) | Inhalation (gases) (ppm) | Inhalation (vapors) (mg/l) | Inhalation (dusts and mists) (mg/l) |
|---|--------------|----------------|--------------------------|----------------------------|-------------------------------------|
| 55-653 PITT BULL SPRAY COLD GALVANIZING | 82942.2 | 16121.8 | N/A | 333.2 | 45.4 |
| acetone | 5800 | 15800 | N/A | 76 | N/A |
| toluene | 5580 | 8390 | N/A | 49 | N/A |
| butane | N/A | N/A | N/A | 658 | N/A |
| xylene | 4300 | 1100 | N/A | 11 | 1.5 |
| Solvent naphtha (petroleum), light aromatic | 8400 | 3480 | N/A | N/A | N/A |
| ethylbenzene | 3500 | 17800 | N/A | 17.8 | 1.5 |

Section 12. Ecological information

Toxicity

| Product/ingredient name | Result | Species | Exposure |
|---|--|---------|----------|
| Solvent naphtha (petroleum), light aromatic | Acute LC50 8.2 mg/l | Fish | 96 hours |
| ethylbenzene | Acute LC50 150 to 200 mg/l Fresh water | Fish | 96 hours |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| acetone | - | - | Readily |
| toluene | - | - | Readily |
| xylene | - | - | Readily |
| ethylbenzene | - | - | Readily |

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-------------|-----------|
| acetone | -0.24 | 3 | low |
| toluene | 2.73 | 8.32 | low |
| propane | 2.36 | - | low |
| butane | 2.89 | - | low |
| xylene | 3.16 | 7.4 to 18.5 | low |
| ethylbenzene | 3.15 | 79.43 | low |

Mobility in soil

Section 12. Ecological information

Soil/water partition coefficient (K_{oc}) : Not available.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees. Section 6. Accidental release measures

14. Transport information

| | DOT | IMDG | IATA |
|------------------------------------|-------------------|---|--|
| UN number | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | Aerosols, flammable |
| Transport hazard class (es) | 2.1 | 2.1 | 2.1 |
| Packing group | - | - | - |
| Environmental hazards | No. | Yes. | Yes. The environmentally hazardous substance mark is not required. |
| Marine pollutant substances | Not applicable. | (Zinc powder - zinc dust (stabilized), Solvent naphtha (petroleum), light aromatic) | Not applicable. |
| Product RQ (lbs) | 4444.4 | Not applicable. | Not applicable. |
| RQ substances | (xylene, toluene) | Not applicable. | Not applicable. |

Additional information

- DOT** : Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements.
- IMDG** : The marine pollutant mark is not required when transported in sizes of ≤5 L or ≤5 kg.
- IATA** : The environmentally hazardous substance mark may appear if required by other transportation regulations.

14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Section 15. Regulatory information

United States

United States inventory (TSCA 8b) : All components are listed or exempted.

SARA 302/304

SARA 304 RQ : Not applicable.

Composition/information on ingredients

No products were found.

SARA 311/312

Classification : FLAMMABLE AEROSOLS - Category 1
 GASES UNDER PRESSURE - Compressed gas
 SKIN IRRITATION - Category 2
 EYE IRRITATION - Category 2A
 CARCINOGENICITY - Category 2
 TOXIC TO REPRODUCTION (Unborn child) - Category 2
 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
 SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
 HNOC - Defatting irritant

Composition/information on ingredients

| Name | % | Classification |
|---------|-----------|--|
| acetone | ≥20 - ≤50 | FLAMMABLE LIQUIDS - Category 2 EYE IRRITATION - Category 2A SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 HNOC - Defatting irritant |
| toluene | ≥10 - ≤20 | FLAMMABLE LIQUIDS - Category 2 SKIN IRRITATION - Category 2 TOXIC TO REPRODUCTION (Unborn child) - Category 2 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 ASPIRATION HAZARD - Category 1 |
| propane | ≥10 - ≤20 | HNOC - Defatting irritant FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Compressed gas SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 |
| butane | ≥10 - ≤20 | FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Compressed gas SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 |

Section 15. Regulatory information

| | | |
|---|-------------|--|
| xylene | ≥1.0 - ≤5.0 | FLAMMABLE LIQUIDS - Category 3 ACUTE TOXICITY (dermal) - Category 4 ACUTE TOXICITY (inhalation) - Category 4 SKIN IRRITATION - Category 2 EYE IRRITATION - Category 2A SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 ASPIRATION HAZARD - Category 1 |
| Solvent naphtha (petroleum), light aromatic | ≥1.0 - ≤5.0 | FLAMMABLE LIQUIDS - Category 3 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 ASPIRATION HAZARD - Category 1 |
| ethylbenzene | <1.0 | HNOC - Defatting irritant FLAMMABLE LIQUIDS - Category 2 ACUTE TOXICITY (inhalation) - Category 4 CARCINOGENICITY - Category 2 SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (hearing organs) - Category 2 ASPIRATION HAZARD - Category 1 HNOC - Defatting irritant |

SARA 313

| Supplier notification | Chemical name | CAS number | Concentration |
|-----------------------|--------------------------------------|------------|---------------|
| | toluene | 108-88-3 | 10 - 30 |
| | Zinc powder - zinc dust (stabilized) | 7440-66-6 | 10 - 30 |
| | xylene | 1330-20-7 | 1 - 5 |
| | ethylbenzene | 100-41-4 | 0.1 - 1 |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

Additional environmental information is contained on the Environmental Data Sheet for this product, which can be obtained from your PPG representative.

California Prop. 65

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

Health : 2 * **Flammability :** 4 **Physical hazards :** 1

(*) - Chronic effects

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on MSDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)

Health : 2 **Flammability :** 4 **Instability :** 1

Product code 00356944

Date of issue 16 November 2019 **Version** 8.01

Product name 55-653 PITT BULL SPRAY COLD GALVANIZING

Section 16. Other information

Date of previous issue : 3/7/2019

Organization that prepared the MSDS : EHS

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- N/A = Not available
- SGG = Segregation Group
- UN = United Nations

✔ Indicates information that has changed from previously issued version.

Disclaimer

The information contained in this data sheet is based on present scientific and technical knowledge. The purpose of this information is to draw attention to the health and safety aspects concerning the products supplied by PPG, and to recommend precautionary measures for the storage and handling of the products. No warranty or guarantee is given in respect of the properties of the products. No liability can be accepted for any failure to observe the precautionary measures described in this data sheet or for any misuse of the products.

COMPANY IDENTITY: BERNARD LABORATORIES
PRODUCT IDENTITY: SNAKE-OIL CLASSIC

SDS DATE: 02/13/2017
ORIGINAL: 02/13/2014

SAFETY DATA SHEET

This Safety Data Sheet conforms to ANSI Z400.5, and to the format requirements and the International Chemical Safety Cards of the Global Harmonizing System.

THIS SDS COMPLIES WITH 29 CFR 1910.1200 (HAZARD COMMUNICATION STANDARD)

IMPORTANT: Read this SDS before handling & disposing of this product.

Pass this information on to employees, customers, & users of this product.

SECTION 1. IDENTIFICATION OF THE SUBSTANCE OR MIXTURE AND OF THE SUPPLIER

PRODUCT IDENTITY: RUST INHIBITOR 100
PRODUCT USES: Rust Inhibitor

COMPANY IDENTITY: BERNARD LABORATORIES
COMPANY ADDRESS: 1738 Townsend St.
COMPANY CITY: Cincinnati, OH 45223
COMPANY PHONE: 1-513-681-7373
EMERGENCY PHONES: CHEMTREC: 1-800-424-9300 (USA)
CANUTEC: 1-613-996-6666 (CANADA)

SECTION 2. HAZARDS IDENTIFICATION

WARNING!!



2.1 HAZARD STATEMENTS: (CAT = Hazard Category)

H100s = General, H200s = Physical, H300s = Health, H400s = Environmental

H315 Causes skin irritation.(CAT:2)

H320 Causes eye irritation.(CAT:2)

2.2 PRECAUTIONARY STATEMENTS:

P100s = General, P200s = Prevention, P300s = Response, P400s = Storage, P500s = Disposal

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P260 Do not breathe dust/fume/gas/mist/vapors/spray.

P262 Do not get in eyes, on skin, or on clothing.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

| MATERIAL | CAS# | EINECS# | WT % |
|--------------------------|---------------|---------|--------|
| Hydraulic Oil | Mixture | - | 90-100 |
| Nonhazardous Nonvolatile | Proprietary | - | 0- 5 |
| Citropine Scent | Not Available | - | 0- 5 |
| Zinc Compounds | Mixture | - | 0- 1 |

TRACE COMPONENTS: Trace ingredients (if any) are present in < 1% concentration, (< 0.1% for potential carcinogens, reproductive toxins, respiratory tract mutagens, and sensitizers). None of the trace ingredients contribute significant additional hazards at the concentrations that may be present in this product. All pertinent hazard information has been provided in this document, per the requirements of the Federal Occupational Safety and Health Administration Standard (29 CFR 1910.1200), U.S. State equivalents, and Canadian Hazardous Materials Identification System Standard (CPR 4).

SEE SECTIONS 8, 11 & 12 FOR TOXICOLOGICAL INFORMATION.

COMPANY IDENTITY: BERNARD LABORATORIES
PRODUCT IDENTITY: SNAKE-OIL CLASSIC

SDS DATE: 02/13/2017
ORIGINAL: 02/13/2014

SECTION 4. FIRST AID MEASURES

4.1 EYE CONTACT:

For eyes, flush with plenty of water for 15 minutes & get medical attention.

4.2 SKIN CONTACT:

In case of contact with skin immediately remove contaminated clothing.
Wash thoroughly with soap & water. Wash contaminated clothing before reuse.

4.3 INHALATION:

After high vapor exposure, remove to fresh air. If breathing is difficult, give oxygen. If breathing has stopped, trained personnel should immediately begin artificial respiration. If the heart has stopped, trained personnel should immediately begin cardiopulmonary resuscitation (CPR).

4.4 SWALLOWING:

Rinse mouth. Do NOT induce vomiting. GET MEDICAL ATTENTION IMMEDIATELY.
Do NOT give liquids to an unconscious or convulsing person.

SECTION 5. FIRE FIGHTING MEASURES

5.1 FIRE & EXPLOSION PREVENTIVE MEASURES

Isolate from oxidizers, extreme heat, sparks, and open flame.

5.2 EXTINGUISHING MEDIA

Use dry chemical, carbon dioxide, foam, or water spray extinguishing media. Water or foam may cause frothing of materials heated above 100 C / 212 F. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces.

5.3 SPECIAL FIRE FIGHTING PROCEDURES

Water spray may be ineffective on fire but can protect fire-fighters & cool closed containers. Use fog nozzles if water is used.
Do not enter confined fire-space without full bunker gear.
(Helmet with face shield, bunker coats, gloves & rubber boots).

5.4 UNUSUAL EXPLOSION AND FIRE PROCEDURES

Closed containers may explode if exposed to extreme heat.
Applying to hot surfaces requires special precautions.

SECTION 6. ACCIDENTAL RELEASE MEASURES

6.1 SPILL AND LEAK RESPONSE AND ENVIRONMENTAL PRECAUTIONS:

Uncontrolled releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a spill, clear the affected area, protect people, and respond with trained personnel. ELIMINATE all ignition sources (no smoking, flares, sparks, or flames in immediate area).

6.2 PERSONAL PROTECTIVE EQUIPMENT

The proper personal protective equipment for incidental releases (such as: 1 Liter of the product released in a well-ventilated area), use impermeable gloves, they should be Level B: **triple-gloves (rubber gloves and nitrile gloves over latex gloves), chemical resistant suit and boots, hard-hat, and Self-Contained Breathing Apparatus** specific for the material handled, goggles, face shield, and appropriate body protection. In the event of a large release, use impermeable gloves, specific for the material handled, chemically resistant suit and boots, and hard hat. Self-Contained Breathing Apparatus or respirator may be required where engineering controls are not adequate or conditions for potential exposure exist. When respirators are required, select NIOSH/MSHA approved based on actual or potential airborne concentrations in accordance with latest OSHA and/or ANSI recommendations.

6.3 ENVIRONMENTAL PRECAUTIONS:

Stop spill at source. Construct temporary dikes of dirt, sand, or any appropriate readily available material to prevent spreading of the material. Close or cap valves and/or block or plug hole in leaking container and transfer to another container. Keep from entering storm sewers and ditches which lead to waterways, and if necessary, call the local fire or police department for immediate emergency assistance.

COMPANY IDENTITY: BERNARD LABORATORIES
PRODUCT IDENTITY: SNAKE-OIL CLASSIC

SDS DATE: 02/13/2017
ORIGINAL: 02/13/2014

SECTION 6. ACCIDENTAL RELEASE MEASURES (CONTINUED)

6.4 CONTAINMENT AND CLEAN-UP MEASURES:

Absorb spilled liquid with polypads or other suitable absorbent materials. If necessary, neutralize using suitable buffering material, (acid with soda ash or base with phosphoric acid), and test area with litmus paper to confirm neutralization. Clean up with non-combustible absorbent (such as: sand, soil, and so on). Shovel up and place all spill residue in suitable containers. dispose of at an appropriate waste disposal facility according to current applicable laws and regulations and product characteristics at time of disposal (see Section 13 - Disposal Considerations).

SECTION 7. HANDLING AND STORAGE

7.1 HANDLING

Use only with adequate ventilation. Avoid prolonged or repeated contact with skin. Wear OSHA Standard goggles or face shield. Consult Safety Equipment Supplier. Wear goggles, face shield, gloves, apron & footwear impervious to material. Wash clothing before reuse.

7.2 STORAGE

Do not store above 49 C/120 F.
Keep container tightly closed & upright when not in use to prevent leakage.

7.3 NONBULK: CONTAINERS:

Store containers in a cool, dry location, away from direct sunlight, sources of intense heat, or where freezing is possible. Material should be stored in secondary containers or in a diked area, as appropriate. Store containers away from incompatible chemicals (see Section 10, Stability and Reactivity). Post warning and "NO SMOKING" signs in storage and use areas, as appropriate. Empty containers should be handled with care. Never store food, feed, or drinking water in containers which held this product.

7.4 BULK CONTAINERS:

All tanks and pipelines which contain this material must be labeled. Perform routine maintenance on tanks or pipelines which contain this product. Report all leaks immediately to the proper personnel.

7.5 TANK CAR SHIPMENTS:

Tank cars carrying this product should be loaded and unloaded in strict accordance with tank-car manufacturer's recommendation and all established on-site safety procedures. Appropriate personal protective equipment must be used (see Section 8, Engineering Controls and Personal Protective Equipment.). All loading and unloading equipment must be inspected, prior to each use. Loading and unloading operations must be attended, at all times. Tank cars must be level, brakes must be set or wheels must be locked or blocked prior to loading or unloading. Tank car (for loading) or storage tanks (for unloading) must be verified to be correct for receiving this product and be properly prepared, prior to starting the transfer operations. Hoses must be verified to be in the correct positions, before starting transfer operations. A sample (if required) must be taken and verified (if required) prior to starting transfer operations. All lines must be blown-down and purged before disconnecting them from the tank car or vessel.

7.6 PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT:

Follow practices indicated in Section 6 (Accidental Release Measures). Make certain application equipment is locked and tagged-out safely. Always use this product in areas where adequate ventilation is provided. Collect all rinsates and dispose of according to applicable Federal, State, Provincial, or local procedures.

7.7 EMPTY CONTAINER WARNING:

Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. **DO NOT PRESSURIZE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY BURST AND CAUSE INJURY OR DEATH.**

COMPANY IDENTITY: BERNARD LABORATORIES
 PRODUCT IDENTITY: SNAKE-OIL CLASSIC

SDS DATE: 02/13/2017
 ORIGINAL: 02/13/2014

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

| MATERIAL | CAS# | EINECS# | TWA (OSHA) | TLV (ACGIH) |
|--------------------------|---------------|---------|---------------------|---------------------|
| Hydraulic Oil | Mixture | - | 5 mg/m ³ | 5 mg/m ³ |
| Nonhazardous Nonvolatile | Proprietary | - | None Known | None Known |
| Citropine Scent | Not Available | - | None Known | None Known |
| Zinc Compounds | Mixture | - | None Known | None Known |

This product contains no EPA Hazardous Air Pollutants (HAP) in amounts > 0.1%.

8.1 RESPIRATORY EXPOSURE CONTROLS

A respiratory protection program that meets OSHA 29 CFR 1910.134 and ANSI Z86.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant a respirator's use. A NIOSH certified air purifying respirator with a Type 95 (R or P) particulate filter may be used under conditions where airborne concentrations are expected to exceed exposure limits. If adequate ventilation is not available or there is potential for airborne exposure above the exposure limits, a respirator may be worn up to the respirator exposure limitations, check with respirator equipment manufacturer's recommendations / limitations. For a higher level of protection, use positive pressure supplied air respiration protection or Self-Contained Breathing Apparatus or if oxygen levels are below 19.5% or are unknown.

8.2 EMERGENCY OR PLANNED ENTRY INTO UNKNOWN CONCENTRATIONS OR IDLH CONDITIONS

Positive pressure, full-face piece Self-Contained Breathing Apparatus; or positive pressure, full-face piece Self-Contained Breathing Apparatus with an auxiliary positive pressure Self-Contained Breathing Apparatus.

8.3 VENTILATION

LOCAL EXHAUST: Necessary MECHANICAL (GENERAL): Necessary
 SPECIAL: None OTHER: None
 Please refer to ACGIH document, "Industrial Ventilation, A Manual of Recommended Practices", most recent edition, for details.

8.4 EYE PROTECTION:

Splash goggles or safety glasses. Face-shields are recommended when the operation can generate splashes, sprays or mists.

8.5 HAND PROTECTION:

Use gloves chemically resistant to this material. Preferred examples: Butyl rubber, Chlorinated Polyethylene, Polyethylene, Ethyl vinyl alcohol laminate ("EVAL"), Polyvinyl alcohol ("PVA"). Examples of acceptable glove barrier materials include: Natural rubber ("latex"), Neoprene, Nitrile/butadiene rubber ("nitrile") or ("NBR"), Polyvinyl chloride ("PVC") or "vinyl"), Viton. NOTICE: The selection of a specific glove for a particular application and duration of use in a workplace should also take into account all relevant workplace factors such as, but not limited to: Other chemicals which may be handled, physical requirements (cut/puncture protection, dexterity, thermal protection), potential body reactions to glove materials, as well as the instructions/specifications provided by the glove supplier.

8.6 BODY PROTECTION:

Use body protection appropriate for task. Cover-all, rubber aprons, or chemical protective clothing made from impervious materials are generally acceptable, depending on the task.

8.7 WORK & HYGIENIC PRACTICES:

Provide readily accessible eye wash stations & safety showers. Wash at end of each shift & before eating, smoking or using the toilet. Remove clothing that becomes contaminated. Destroy contaminated leather articles. Launder or discard contaminated clothing.

COMPANY IDENTITY: BERNARD LABORATORIES
 PRODUCT IDENTITY: SNAKE-OIL CLASSIC

SDS DATE: 02/13/2017
 ORIGINAL: 02/13/2014

SECTION 9. PHYSICAL & CHEMICAL PROPERTIES

| | |
|--|--|
| APPEARANCE: | Liquid, Clear and bright |
| ODOR: | Mild Petroleum |
| ODOR THRESHOLD: | Not Available |
| pH (Neutrality): | Not Available |
| MELTING POINT/FREEZING POINT: | < -33 C / < -27 F |
| BOILING RANGE (IBP,50%,Dry Point): | Not Available |
| FLASH POINT (TEST METHOD): | > 196 C / > 384 F (COC) |
| EVAPORATION RATE (n-Butyl Acetate=1): | Not Applicable |
| FLAMMABILITY CLASSIFICATION: | Class III-B |
| LOWER FLAMMABLE LIMIT IN AIR (% by vol): | Not Applicable |
| UPPER FLAMMABLE LIMIT IN AIR (% by vol): | Not Available |
| VAPOR PRESSURE (mm of Hg)@20 C | 0.0 |
| VAPOR DENSITY (air=1): | Not Applicable |
| GRAVITY @ 68/68F / 20/20C: | |
| DENSITY: | 0.854 - 0.870 |
| SPECIFIC GRAVITY (Water=1): | 0.855 - 0.871 |
| POUNDS/GALLON: | 7.122 - 7.255 |
| WATER SOLUBILITY: | Negligible |
| PARTITION COEFFICIENT (n-Octane/Water): | Not Available |
| AUTO IGNITION TEMPERATURE: | Not Applicable |
| DECOMPOSITION TEMPERATURE: | Not Available |
| VISCOSITY (ASTM D445): | 22 - 68 cSt @ 40 C / 4.3 - 8.7 cSt @ 100 C |

* Using CARB (California Air Resources Board Rules).

SECTION 10. STABILITY & REACTIVITY

10.1 STABILITY

Stable under normal conditions.

10.2 CONDITIONS TO AVOID

Extended exposure to high temperatures can cause decomposition.

10.3 MATERIALS TO AVOID

Isolate from strong oxidizing agents.

10.4 HAZARDOUS DECOMPOSITION PRODUCTS

Carbon Oxides, Nitrogen Oxides, Sulfur Oxides, Phosphorus Oxide, and Zinc Oxide from heating.

10.5 HAZARDOUS POLYMERIZATION

Will not occur.

COMPANY IDENTITY: BERNARD LABORATORIES
PRODUCT IDENTITY: SNAKE-OIL CLASSIC

SDS DATE: 02/13/2017
ORIGINAL: 02/13/2014

SECTION 11. TOXICOLOGICAL INFORMATION

11.1 ACUTE HAZARDS

11.11 EYE & SKIN CONTACT:

Primary irritation to skin, defatting, dermatitis.
Primary irritation to eyes, redness, tearing, blurred vision.
Liquid can cause eye irritation. Wash thoroughly after handling.

11.12 INHALATION:

Vapor harmful.

11.13 SWALLOWING:

Swallowing can cause abdominal irritation, nausea, vomiting & diarrhea.

11.2 SUBCHRONIC HAZARDS/CONDITIONS AGGRAVATED

CONDITIONS AGGRAVATED:

None Known.

11.3 CHRONIC HAZARDS

11.31 CANCER, REPRODUCTIVE & OTHER CHRONIC HAZARDS:

This product has no carcinogens listed by IARC, NTP, NIOSH, OSHA or ACGIH, as of this date, greater or equal to 0.1%.

11.32 IRRITANCY OF PRODUCT: This product is irritating to contaminated tissue.

11.33 SENSITIZATION TO THE PRODUCT: No component of this product is known as a sensitizer.

11.34 MUTAGENICITY: No known reports of mutagenic effects in humans.

11.35 EMBRYOTOXICITY: No known reports of embryotoxic effects in humans.

11.36 TERATOGENICITY: No known reports of teratogenic effects in humans.

11.37 REPRODUCTIVE TOXICITY: No known reports of reproductive effects in humans.

A mutagen is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generational lines. An embryotoxin is a chemical which causes damage to a developing embryo (such as: within the eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A teratogen is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A reproductive toxin is any substance which interferes in any way with the reproductive process.

11.4 MAMMALIAN TOXICITY INFORMATION

No mammalian information is available on this product.

COMPANY IDENTITY: BERNARD LABORATORIES
PRODUCT IDENTITY: SNAKE-OIL CLASSIC

SDS DATE: 02/13/2017
ORIGINAL: 02/13/2014

SECTION 12. ECOLOGICAL INFORMATION

12.1 ALL WORK PRACTICES MUST BE AIMED AT ELIMINATING ENVIRONMENTAL CONTAMINATION.

12.2 EFFECT OF MATERIAL ON PLANTS AND ANIMALS:

This product may be harmful or fatal to plant and animal life if released into the environment. Refer to Section 11 (Toxicological Information) for further data on the effects of this product's components on test animals.

12.3 EFFECT OF MATERIAL ON AQUATIC LIFE:

No aquatic environmental information is available on this product.

12.4 MOBILITY IN SOIL

Mobility of this material has not been determined.

12.5 DEGRADABILITY

This product is completely biodegradable.

12.6 ACCUMULATION

Bioaccumulation of this product has not been determined.

SECTION 13. DISPOSAL CONSIDERATIONS

The generation of waste should be avoided or minimized wherever possible. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers and liners may retain some product residues. Vapor from some product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Processing, use or contamination may change the waste disposal requirements. Do not dispose of on land, in surface waters, or in storm drains. Waste should be recycled or disposed of in accordance with regulations. Large amounts should be collected for reuse or consigned to licensed hazardous waste haulers for disposal. While being recycled, used oil is regulated by 40 CFR 279. Use resulting in chemical or physical change or contamination may also subject it to regulation as hazardous waste. Under United States Federal regulations, used oil is a solid waste managed under 40 CFR 279. However, in California, used oil is managed as hazardous waste until tested to show it is not hazardous. Consult state and local regulations regarding the proper handling of used oil. **ALL DISPOSAL MUST BE IN ACCORDANCE WITH ALL FEDERAL, STATE, PROVINCIAL, AND LOCAL REGULATIONS. IF IN DOUBT, CONTACT PROPER AGENCIES. RECYCLE ALL USED OIL.**

SECTION 14. TRANSPORT INFORMATION

MARINE POLLUTANT: No
DOT/TDG SHIP NAME: Not Regulated
DRUM LABEL: None
IATA / ICAO: Not Regulated
IMO / IMDG: Not Regulated
EMERGENCY RESPONSE GUIDEBOOK NUMBER: None

SECTION 15. REGULATORY INFORMATION

15.1 EPA REGULATION:

SARA SECTION 311/312 HAZARDS: None Known

All components of this product are on the TSCA list.

This material contains no known products restricted under SARA Title III, Section 313 in amounts greater or equal to 1%.

COMPANY IDENTITY: BERNARD LABORATORIES
PRODUCT IDENTITY: SNAKE-OIL CLASSIC

SDS DATE: 02/13/2017
ORIGINAL: 02/13/2014

SECTION 15. REGULATORY INFORMATION (CONTINUED)

15.2 STATE REGULATIONS:

CALIFORNIA SAFE DRINKING WATER & TOXIC ENFORCEMENT ACT (PROPOSITION 65):

This product contains no chemicals known to the State of California to cause cancer or reproductive toxicity.

15.3 INTERNATIONAL REGULATIONS

The identified components of this product are listed on the chemical inventories of the following countries:

Australia (AICS), Canada (DSL or NDSL), China (IECSC), Europe (EINECS, ELINCS), Japan (METI/CSCL, MHLW/ISHL), South Korea (KECI), New Zealand (NZIoC), Philippines (PICCS), Switzerland (SWISS), Taiwan (NECSI), USA (TSCA).

15.4 CANADA: WORKPLACE HAZARDOUS MATERIALS INFORMATION SYSTEM (WHMIS)

D2B: Irritating to skin / eyes.

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations (CPR) and the SDS contains all information required by the CPR.

SECTION 16. OTHER INFORMATION

16.1 HAZARD RATINGS:

HEALTH (NFPA): 1, HEALTH (HMIS): 1, FLAMMABILITY: 1, PHYSICAL HAZARD: 0
(Personal Protection Rating to be supplied by user based on use conditions.)

This information is intended solely for the use of individuals trained in the NFPA & HMIS hazard rating systems.

16.2 EMPLOYEE TRAINING

See Section 2 for Risk & Safety Statements. Employees should be made aware of all hazards of this material (as stated in this SDS) before handling it.

16.3 SDS DATE: 02/13/2017

NOTICE

The supplier disclaims all expressed or implied warranties of merchantability or fitness for a specific use, with respect to the product or the information provided herein, except for conformation to contracted specifications. All information appearing herein is based upon data obtained from manufacturers and/or recognized technical sources. While the information is believed to be accurate, we make no representations as to its accuracy or sufficiency.

Conditions of use are beyond our control, and therefore users are responsible for verifying the data under their own operating conditions to determine whether the product is suitable for their particular purposes and they assume all risks of their handling, and disposal of the product. Users also assume all risks in regards to the publication or use of, or reliance upon information contained herein.

This information relates only to the product designated herein, and does not relate to its use in combination with any other material or process.

Unless updated, the Safety Data Sheet is valid until 02/13/2020.

SAFETY DATA SHEET

SUPERIOR NO. 9H

DATE REVISED: January 1, 2016

Product Name: Superior No. 9H

Manufacturer: Superior Flux & Mfg. Co. 6615 Parkland Blvd. Cleveland, OH 44139

Emergency Phone Number: 1-800-424-9300 (CHEMTREC)

Other Information Calls: (440) 349-3000

To the Purchaser: This MSDS contains important environmental, health, and toxicology information for your employees who have ordered this product. Please be sure this information is given to them. If you resell this product, a copy of the MSDS should be given to the buyer.

H.M.I.S. INFORMATION: HEALTH = 2 FLAMMABILITY = 0 REACTIVITY = 1

SECTION I - IDENTIFICATION

Common Name: Superior No. 9H

Chemical Family: Back-Up Welding Powder Flux

CAS Number: NA

Chemical Name: NA

Formula: See below

SECTION II – HAZARDS IDENTIFICATION

Classification of Substance or Mixture:

Classification (CLP): NA

Label Elements (CLP): NA



Risk Phrases: R36/37/38

Safety Phrases: S-26, S-27, S-36/37/39, S-45

See section XVI for full text description of S and R phrases

Other Hazards: None if used properly

SECTION III- COMPOSITION INFORMATION

| Components | CAS Number | % | OSHA PEL |
|-------------------|------------|-------|-----------------------|
| Calcium Fluoride | 7789-75-5 | 15-30 | 2.5 mg/m ³ |
| Lithium Fluoride | 7789-24-4 | 2-5 | 2.5 mg/m ³ |
| Boric Acid | 10043-35-3 | 4-10 | 10 mg/m ³ |
| Silicon Dioxide | 7631-86-9 | 10-30 | 10 mg/m ³ |
| Titanium Dioxide | 1317-80-2 | 5-20 | 10 mg/m ³ |
| Manganese Dioxide | 1313-13-9 | 5-10 | 5 mg/m ³ |
| Wollastonite | 10101-39-0 | 30-50 | 10 mg/m ³ |
| Black Iron Oxide | 12227-89-3 | 2-4 | 5 mg/m ³ |

Unlisted percentages are non-hazardous stabilizers, and water. None of the materials in this product are listed in NTP, IARC, or OSHA as carcinogens.

SECTION IV – FIRST AID MEASURES

Inhalation: Remove to fresh air
Eyes: Flush with water for fifteen (15) Minutes. Call physician.
Skin: Wash thoroughly with soap and water.
Ingestion: If patient is fully conscious, give large amounts of water. Obtain medical attention immediately.

Most Important Symptoms and effects, both acute and delayed

Primary Routes of Entry into Body: Fume inhalation, ingestion, skin, and eyes.

Symptoms of Overexposure: Salivation, coughing, choking, chills, may cause weight loss, brittle bones, anemia, and stiff joints.

Medical Conditions Generally Aggravated by Exposure: Any weakness of the lungs, kidneys or liver will be aggravated.

Chemical Listed as Carcinogen or Potential Carcinogen: None

OSHA Permissible Exposure Limit (PEL): 1 mg/m³

ACGIH Threshold Limit Value (TLV): 1 mg/m³

SECTION V - FIRE AND EXPLOSION HAZARD DATA

Flash Point: NA

Flammable Limits: NA

Extinguishing Media: Not necessary

Auto Ignition Temperature: None

Special Fire Fighting Procedures: Normal cautions when dealing with chemicals

Unusual Fire and Explosion Hazards: Fluorides

SECTION VI - ACCIDENTAL RELEASE MEASURES

Steps to be taken in case material is spilled: Clean up powder and flush remaining material with lots of water.

SECTION VII - HANDLING AND STORAGE

Storage Requirements: Store in plastic containers in cool area, away from heat.

Handling Precautions: Safe precautionary practices to avoid spills and exposure to skin and fumes.

Other Precautions: NA

SECTION VIII - CONTROL MEASURES

Respiratory Protection (TYPE): NIOSH approved respirator.

Ventilation: Yes

Mechanical (General): Yes

Local Exhaust: Yes

Protective Gloves: Recommended, NIOSH approved

Other Protective Clothing or Equipment: Rubber apron is recommended

Eye Protection: Safety Glasses

SECTION IX - PHYSICAL AND CHEMICAL CHARACTERISTICS

Boiling Point: NA
Percent Volatile by Volume: 0.5%
Vapor Pressure (mm Hg): NA
Evaporation Rate (Butyl Acetate = 1): NA
Vapor Density (Air = 1): NA
Solubility in Water: Sparingly Soluble
Melting Point: ~1250°C/2282°F
Appearance and Odor: Dark gray odorless powder
Reactivity in Water: None

SECTION X - STABILITY AND REACTIVITY

Stability: Product is stable (Conditions to Avoid): Metals
Incompatibility: Alkaline, strong oxidizing or reducing materials, cyanides or combustible materials.
Hazardous Decomposition Products: HCl, zinc chloride, zinc oxide, ammonium.
Hazardous Polymerization: Will not occur (Conditions to Avoid): Excessive heat or cold

SECTION XI - TOXICOLOGICAL INFORMATION

Acute Toxicity Data

- 1) **Oral:** LD-50 (rat): Not available
- 2) **Inhalation:** LC-50 (rat): Not available
- 3) **Dermal:** LD-50 (rabbit): Not available
- 4) **Skin Irritation:** (rabbit): Not available

Chronic Toxicity Data

- 1) **Repeated Skin Application:** (rat): Not available
 - 2) **Eye Irritation:** (rabbit): Not available
-

SECTION XII - ECOLOGICAL INFORMATION

This material has not been tested for environmental effects.

SECTION XIII - DISPOSAL CONSIDERATIONS

Waste Disposal Method: Dispose of in accordance with EPA regulations

SECTION XIV- TRANSPORTATION

D.O.T. Proper Shipping Name: Non-Hazardous
Hazard Class: NA
Identification Number: NA
Packing Group: NA
Type D.O.T Label Required Information: NA
Waste Disposal Method: Dispose of in accordance with EPA regulations

SECTION XV - REGULATORY INFORMATION

OSHA Hazardous Chemical According to 29 CFR 1910.1200: NA

Carcinogenicity Classification: (Components Present at 0.1% or More)

International Agency for Research on Cancer (IARC): NA

American Conference of Governmental Industrial Hygienists (ACGIH): NA

National Toxicology Program (NTP): NA

Occupational Safety and Health Administration (OSHA): NA

All Components of this Product are Listed on the U.S. Toxic Substances Control Act Inventory or Otherwise Comply with TSCA Pre-manufacture Notification Requirements.

This product is RoHS compliant.

SECTION XVI - OTHER INFORMATION

The labeling of this product is indicated in Section II. The full text of all abbreviations indicated by codes in the MSDS are as follows:

| | |
|------------|---|
| R36 | Irritating to eyes |
| R37 | Irritating to respiratory system |
| R38 | Irritating to skin |
| | |
| S-26 | In case of eye contact, rinse thoroughly and get medical attention |
| S-27 | Take off immediately contaminated clothing |
| S-36/37/39 | Wear suitable protective clothing, gloves, and eye/face protection |
| S-45 | In case of accident or if feel unwell call medical advice immediately |

Further information:

Judgments as to the suitability of information herein or the purchaser's purposes are necessarily the purchaser's responsibility. Reasonable care has been taken in the preparation of this material, but there are **NO WARRANTIES, NO REPRESENTATIONS AND NO RESPONSIBILITY AS TO THE ACCURACY OR THE SUITABILITY OF THIS INFORMATION FOR ANY PURCHASER'S USE OR FOR ANY CONSEQUENCE TO USE.**

SAFETY DATA SHEET



Section 1. Identification

Product name BP Unleaded Gasolines
SDS # 12631
Code 12631

Relevant identified uses of the substance or mixture and uses advised against

Product use USE AS MOTOR FUEL ONLY.

Supplier BP Products North America Inc.
150 West Warrenville Road
Naperville, Illinois 60563-8460
USA

EMERGENCY HEALTH INFORMATION: 1 (800) 447-8735
Outside the US: +1 703-527-3887 (CHEMTREC)

EMERGENCY SPILL INFORMATION: 1 (800) 424-9300 CHEMTREC (USA)

OTHER PRODUCT INFORMATION 1 (866) 4 BP - MSDS
(866-427-6737 Toll Free - North America)
email: bpcares@bp.com

2743

Section 2. Hazards identification

OSHA/HCS status This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture
FLAMMABLE LIQUIDS - Category 1
SKIN IRRITATION - Category 2
EYE IRRITATION - Category 2A
GERM CELL MUTAGENICITY - Category 1B
CARCINOGENICITY - Category 1A
TOXIC TO REPRODUCTION (Unborn child) - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
ASPIRATION HAZARD - Category 1

GHS label elements

Hazard pictograms



Signal word

Danger

Hazard statements

Extremely flammable liquid and vapor.
Causes serious eye irritation.
Causes skin irritation.
May cause genetic defects.
May cause cancer.
Suspected of damaging the unborn child.
May be fatal if swallowed and enters airways.
May cause drowsiness and dizziness.

Precautionary statements

| | | | | | |
|--------------|-----------------------|---------------|-------------|----------|----------------------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 1/21 |
| Version | 1 | Date of issue | 12/16/2014. | Format | US (US) |
| | | | | Language | ENGLISH (ENGLISH) |

Section 2. Hazards identification

| | |
|---|---|
| Prevention | Obtain special instructions before use. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Take precautionary measures against static discharge. Avoid breathing vapor. Wash thoroughly after handling. Avoid release to the environment. |
| Response | IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. |
| Storage | Store in well-ventilated place. Keep container tightly closed. |
| Disposal | Dispose of contents and container in accordance with all local, regional, national and international regulations. |
| Hazards not otherwise classified | Contains Benzene. Prolonged or repeated exposure to benzene can cause anaemia and other blood diseases, including leukemia. See toxicological information (Section 11). |

2744

Section 3. Composition/information on ingredients

| Substance/mixture | Mixture | | |
|------------------------|------------|----------|--|
| Ingredient name | CAS number | % | |
| Gasoline | Mixture | 90 - 100 | |
| Ethanol | 64-17-5 | 0 - 10 | |
| Contains: | | | |
| Benzene | 71-43-2 | 0 - 3 | |
| Cyclohexane | 110-82-7 | 0 - 1 | |
| Ethylbenzene | 100-41-4 | 0 - 2 | |
| Toluene | 108-88-3 | 4 - 11 | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 0 - 3 | |
| xylene | 1330-20-7 | 4 - 11 | |
| Naphthalene | 91-20-3 | 0 - 0.5 | |

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

| | |
|---------------------|---|
| Eye contact | In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Eyelids should be held away from the eyeball to ensure thorough rinsing. Check for and remove any contact lenses. Get medical attention. |
| Skin contact | In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention. |
| Inhalation | If inhaled, remove to fresh air. Get medical attention. If exposure to vapor, mists or fumes causes drowsiness, headache, blurred vision or irritation of the eyes, nose or throat, remove immediately to fresh air. Keep patient warm and at rest. If any symptoms persist obtain medical advice. |
| Ingestion | Do not induce vomiting. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Aspiration hazard if swallowed. Can enter lungs and cause damage. Get medical attention immediately. |

| | | |
|---|---------------------------|--------------------------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 2/21 |
| Version 1 Date of issue 12/16/2014. | Format US (US) | Language ENGLISH (ENGLISH) |

Section 4. First aid measures

Protection of first-aiders No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

Most important symptoms/effects, acute and delayed

See Section 11 for more detailed information on health effects and symptoms.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician Treatment should in general be symptomatic and directed to relieving any effects. Product can be aspirated on swallowing or following regurgitation of stomach contents, and can cause severe and potentially fatal chemical pneumonitis, which will require urgent treatment. Because of the risk of aspiration, induction of vomiting and gastric lavage should be avoided. Gastric lavage should be undertaken only after endotracheal intubation. Monitor for cardiac dysrhythmias.

Specific treatments No specific treatment.

2745

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media In case of fire, use foam, dry chemical or carbon dioxide extinguisher or spray. This substance will float and can be reignited on surface water.

Unsuitable extinguishing media Do not use water jet. Never use water.

Specific hazards arising from the chemical Flammable liquid and vapor. Vapor may cause flash fire. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Runoff to sewer may create fire or explosion hazard.

Hazardous combustion products Combustion products may include the following:
carbon dioxide
carbon monoxide
other hazardous substances.

Special protective actions for fire-fighters Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters Fire-fighters should wear positive pressure self-contained breathing apparatus (SCBA) and full turnout gear.

Special remarks on fire hazards Do not use water jet.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel Immediately contact emergency personnel. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Put on appropriate personal protective equipment. Floors may be slippery; use care to avoid falling. Eliminate all ignition sources. Entry into a confined space or poorly ventilated area contaminated with vapor, mist or fume is extremely hazardous without the correct respiratory protective equipment and a safe system of work. Wear self-contained positive pressure breathing apparatus (SCBA).

| | | |
|---|---------------------------|--------------------------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 3/21 |
| Version 1 Date of issue 12/16/2014. | Format US (US) | Language ENGLISH (ENGLISH) |

Section 6. Accidental release measures

For emergency responders Entry into a confined space or poorly ventilated area contaminated with vapor, mist or fume is extremely hazardous without the correct respiratory protective equipment and a safe system of work. Wear self-contained breathing apparatus. Wear a suitable chemical protective suit. Chemical resistant boots. See also the information in "For non-emergency personnel".

Environmental precautions Liquid leaks generate large volumes of flammable vapor, heavier than air, which may travel to remote sources of ignition (eg. along drainage systems). Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill Eliminate all ignition sources. Stop leak if without risk. Move containers from spill area. Absorb with an inert material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. The method and equipment used must be in conformance with appropriate regulations and industry practice on explosive atmospheres.

Large spill Eliminate all ignition sources. Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Dike spill area and do not allow product to reach sewage system and surface or ground water. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations. Use spark-proof tools and explosion-proof equipment. Contaminated absorbent material may pose the same hazard as the spilled product. The method and equipment used must be in conformance with appropriate regulations and industry practice on explosive atmospheres. Dispose of via a licensed waste disposal contractor.

2746

Section 7. Handling and storage

Precautions for safe handling

Protective measures Put on appropriate personal protective equipment (see Section 8). Do not get in eyes or on skin or clothing. Avoid breathing vapor or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Take precautionary measures against electrostatic discharges. Empty containers retain product residue and can be hazardous. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Do not reuse container. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Avoid exposure during pregnancy. Do not swallow. Aspiration hazard if swallowed. Can enter lungs and cause damage. Never siphon by mouth.

To avoid fire or explosion, dissipate static electricity during transfer by grounding and bonding containers and equipment before transferring material.

Advice on general occupational hygiene Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Wash thoroughly after handling. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Store and use only in equipment/containers designed for use with this product. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

| | | |
|---|---------------------------|--------------------------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 4/21 |
| Version 1 Date of issue 12/16/2014. | Format US (US) | Language ENGLISH (ENGLISH) |

Section 7. Handling and storage

Light hydrocarbon vapors can build up in the headspace of tanks. These can cause flammability/explosion hazards even at temperatures below the normal flash point (note: flash point must not be regarded as a reliable indicator of the potential flammability of vapor in tank headspaces). Tank headspaces should always be regarded as potentially flammable and care should be taken to avoid static electrical discharge and all ignition sources during filling, ullaging and sampling from storage tanks. Do not enter storage tanks. If entry to vessels is necessary, follow permit to work procedures. Entry to any tanks or other confined space requires a full risk assessment and appropriate control measures to be put in place in conformance with appropriate regulations and industry practice on confined space entry. When the product is pumped (e.g. during filling, discharge or ullaging) and when sampling, there is a risk of static discharge. Ensure equipment used is properly earthed or bonded to the tank structure. Electrical equipment should not be used unless it is intrinsically safe (i.e. will not produce sparks). Explosive air/vapor mixtures may form at ambient temperature. If product comes into contact with hot surfaces, or leaks occur from pressurized fuel pipes, the vapor or mists generated will create a flammability or explosion hazard. Product contaminated rags, paper or material used to absorb spillages, represent a fire hazard, and should not be allowed to accumulate. Dispose of safely immediately after use.

Do not enter storage tanks without breathing apparatus unless the tank has been well ventilated and the tank atmosphere has been shown to contain hydrocarbon vapor concentrations of less than 1% of the lower flammability limit and an oxygen concentration of at least 20% volume.

Light hydrocarbon vapors can build up in the headspace of tanks. These can cause flammability/explosion hazards even at temperatures below the normal flash point (note: flash point must not be regarded as a reliable indicator of the potential flammability of vapor in tank headspaces). Tank headspaces should always be regarded as potentially flammable and care should be taken to avoid static electrical discharge and all ignition sources during filling, ullaging and sampling from storage tanks. When the product is pumped (e.g. during filling, discharge or ullaging) and when sampling, there is a risk of static discharge. Ensure equipment used is properly earthed or bonded to the tank structure. Electrical equipment should not be used unless it is intrinsically safe (i.e. will not produce sparks).

2747

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|-----------------|--|
| Gasoline | ACGIH TLV (United States). TWA: 300 ppm 8 hours. Issued/Revised: 5/1996 TWA: 890 mg/m ³ 8 hours. Issued/Revised: 5/1996 STEL: 500 ppm 15 minutes. Issued/Revised: 5/1996 STEL: 1480 mg/m ³ 15 minutes. Issued/Revised: 5/1996 |
| Ethanol | ACGIH TLV (United States). STEL: 1000 ppm 15 minutes. Issued/Revised: 11/2008 OSHA PEL (United States). TWA: 1900 mg/m ³ 8 hours. Issued/Revised: 6/1993 TWA: 1000 ppm 8 hours. Issued/Revised: 6/1993 |
| Benzene | ACGIH TLV (United States). Absorbed through skin. STEL: 8 mg/m ³ 15 minutes. Issued/Revised: 5/1997 STEL: 2.5 ppm 15 minutes. Issued/Revised: |

Product name BP Unleaded Gasolines

Product code 12631

Page: 5/21

Version 1 Date of issue 12/16/2014.

Format US

Language ENGLISH

(US)

(ENGLISH)

Section 8. Exposure controls/personal protection

| | |
|------------------------|---|
| xylene | <p>5/1997 TWA: 1.6 mg/m³ 8 hours. Issued/Revised: 5/1997 TWA: 0.5 ppm 8 hours. Issued/Revised: 5/1997 OSHA PEL (United States). STEL: 5 ppm 15 minutes. Issued/Revised: 6/1993 TWA: 1 ppm 8 hours. Issued/Revised: 6/1993 OSHA PEL Z2 (United States). AMP: 50 ppm 10 minutes. Issued/Revised: 6/1993 CELL: 25 ppm Issued/Revised: 6/1993 TWA: 10 ppm 8 hours. Issued/Revised: 6/1993</p> <p>ACGIH TLV (United States). STEL: 651 mg/m³ 15 minutes. Issued/Revised: 5/1996 STEL: 150 ppm 15 minutes. Issued/Revised: 5/1996 TWA: 434 mg/m³ 8 hours. Issued/Revised: 5/1996 TWA: 100 ppm 8 hours. Issued/Revised: 5/1996 OSHA PEL (United States). TWA: 435 mg/m³ 8 hours. Issued/Revised: 6/1993 TWA: 100 ppm 8 hours. Issued/Revised: 6/1993</p> |
| toluene | <p>OSHA PEL Z2 (United States). AMP: 500 ppm 10 minutes. Issued/Revised: 6/1993 CELL: 300 ppm Issued/Revised: 6/1993 TWA: 200 ppm 8 hours. Issued/Revised: 6/1993 ACGIH TLV (United States). TWA: 20 ppm 8 hours. Issued/Revised: 11/2006</p> |
| 1,2,4-Trimethylbenzene | <p>ACGIH TLV (United States). TWA: 123 mg/m³ 8 hours. Issued/Revised: 9/1994 TWA: 25 ppm 8 hours. Issued/Revised: 9/1994</p> |
| ethylbenzene | <p>ACGIH TLV (United States). TWA: 20 ppm 8 hours. Issued/Revised: 12/2010 OSHA PEL (United States). TWA: 435 mg/m³ 8 hours. Issued/Revised: 6/1993 TWA: 100 ppm 8 hours. Issued/Revised: 6/1993</p> |
| cyclohexane | <p>ACGIH TLV (United States). TWA: 100 ppm 8 hours. Issued/Revised: 1/2002 OSHA PEL (United States). TWA: 1050 mg/m³ 8 hours. Issued/Revised: 6/1993 TWA: 300 ppm 8 hours. Issued/Revised: 6/1993</p> |
| naphthalene | <p>ACGIH TLV (United States). Absorbed</p> |

2748

Section 8. Exposure controls/personal protection

through skin.

TWA: 52 mg/m³ 8 hours. Issued/Revised: 5/1996

TWA: 10 ppm 8 hours. Issued/Revised: 5/1996

OSHA PEL (United States).

TWA: 50 mg/m³ 8 hours. Issued/Revised: 6/1993

TWA: 10 ppm 8 hours. Issued/Revised: 6/1993

While specific OELs for certain components may be shown in this section, other components may be present in any mist, vapor or dust produced. Therefore, the specific OELs may not be applicable to the product as a whole and are provided for guidance only.

Appropriate engineering controls

All activities involving chemicals should be assessed for their risks to health, to ensure exposures are adequately controlled. Personal protective equipment should only be considered after other forms of control measures (e.g. engineering controls) have been suitably evaluated. Personal protective equipment should conform to appropriate standards, be suitable for use, be kept in good condition and properly maintained. Your supplier of personal protective equipment should be consulted for advice on selection and appropriate standards. For further information contact your national organisation for standards.

Provide exhaust ventilation or other engineering controls to keep the relevant airborne concentrations below their respective occupational exposure limits.

The final choice of protective equipment will depend upon a risk assessment. It is important to ensure that all items of personal protective equipment are compatible.

Environmental exposure controls

Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period.

Appropriate techniques should be used to remove potentially contaminated clothing.

Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

Chemical splash goggles.

Skin protection

Hand protection

Wear chemical resistant gloves. Gloves made from fluoroelastomer resistant to hydrocarbons and a wide range of chemicals. Nitrile gloves.

Do not re-use gloves. Protective gloves must give suitable protection against mechanical risks (i.e. abrasion, blade cut and puncture). Protective gloves will deteriorate over time due to physical and chemical damage. Inspect and replace gloves on a regular basis. The frequency of replacement will depend upon the circumstances of use.

Consult your supervisor or Standard Operating Procedure (S.O.P) for special handling instructions.

Body protection

Use of protective clothing is good industrial practice. Cotton or polyester/cotton overalls will only provide protection against light superficial contamination that will not soak through to the skin. Overalls should be laundered on a regular basis. When the risk of skin exposure is high (e.g. when cleaning up spillages or if there is a risk of splashing) then chemical resistant aprons and/or impervious chemical suits and boots will be required. Wear suitable protective clothing. Footwear highly resistant to chemicals. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For greatest effectiveness against static electricity, overalls, boots and gloves should all be anti-static. When there is a risk of ignition wear inherently fire resistant protective clothes and gloves. Work clothing / overalls should be laundered on a regular basis. Laundering of contaminated work clothing should only be done by professional cleaners who have been told about the hazards of the contamination. Always keep contaminated work clothing away from uncontaminated work clothing and uncontaminated personal

| | | | | | |
|--------------|---------------------------|--------------|-------|----------|-----------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 7/21 |
| Version 1 | Date of issue 12/16/2014. | Format | US | Language | ENGLISH |
| | | | (US) | | (ENGLISH) |

Section 8. Exposure controls/personal protection

clothes. When the risk of skin exposure is high (from experience this could apply to the following tasks: cleaning work, maintenance and service, filling and transfer, taking samples and cleaning up spillages) then a chemical protective suit and boots will be required. Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection

Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection

Use only with adequate ventilation. Do not breathe vapor or mist. If ventilation is inadequate, use a NIOSH certified respirator with an organic vapor cartridge and P95 particulate filter.

If operating conditions cause high vapor concentrations or the TLV is exceeded, use NIOSH-certified, supplied-air respirator.

Use with adequate ventilation.

In case of insufficient ventilation, wear suitable respiratory equipment.

If there is a requirement for the use of a respiratory protective device, but the use of breathing apparatus (independent of ambient atmosphere) is not required, then a suitable filtering device must be worn.

The filter class must be suitable for the maximum contaminant concentration (gas/vapor/aerosol/particulates) that may arise when handling the product.

The correct choice of respiratory protection depends upon the chemicals being handled, the conditions of work and use, and the condition of the respiratory equipment. Safety procedures should be developed for each intended application. Respiratory protection equipment should therefore be chosen in consultation with the supplier/manufacturer and with a full assessment of the working conditions.

2750

Section 9. Physical and chemical properties

Appearance

| | |
|--|---|
| Physical state | Liquid. |
| Color | Clear |
| Odor | Hydrocarbon. |
| Odor threshold | Not available. |
| pH | Not available. |
| Melting point | Not available. |
| Boiling point | 26.67 to 221°C (80 to 430°F) |
| Flash point | Closed cup: -42.778°C (-45°F) |
| Evaporation rate | Not available. |
| Flammability (solid, gas) | Not applicable. Based on - Physical state |
| Lower and upper explosive (flammable) limits | Lower: 1.3% Upper: 7.6% (Estimated.) |
| Vapor pressure | 48.134 to 103.146 kPa (361.97 to 775.66 mm Hg) |
| Vapor density | 3 to 4 [Air = 1] |
| Density | 750 kg/m ³ (0.75 g/cm ³) |
| Solubility | Very slightly soluble in water |
| Solubility | Very slightly soluble in the following materials: cold water. |
| Partition coefficient: n-octanol/water | >3 |
| Auto-ignition temperature | 257°C (494.6°F) |
| Decomposition temperature | Not available. |
| Viscosity | Not available. |

Product name BP Unleaded Gasolines

Product code 12631

Page: 8/21

Version 1 Date of issue 12/16/2014.

Format US

Language ENGLISH

(US)

(ENGLISH)

Section 10. Stability and reactivity

| | |
|---|---|
| Reactivity | No specific test data available for this product. Refer to Conditions to avoid and Incompatible materials for additional information. |
| Chemical stability | The product is stable. |
| Possibility of hazardous reactions | Under normal conditions of storage and use, hazardous reactions will not occur. Under normal conditions of storage and use, hazardous polymerization will not occur. |
| Conditions to avoid | Keep away from heat, sparks and flame. Avoid all possible sources of ignition (spark or flame). |
| Incompatible materials | Reactive or incompatible with the following materials: oxidizing materials. Chlorine and Fluorine |
| Hazardous decomposition products | Under normal conditions of storage and use, hazardous decomposition products should not be produced. |

2751

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Test | Species | Result | Exposure | Remarks |
|---------------------------|-----------------------|---------|-----------------------------------|----------|-------------------|
| Gasoline | LC50 Inhalation Vapor | Rat | >5610 g/m ³ analytical | 4 hours | Based on Gasoline |
| | LC50 Inhalation Vapor | Rat | >7630 mg/m ³ Nominal | 4 hours | Based on Gasoline |
| | LD50 Dermal | Rabbit | >2000 mg/kg | - | Based on Gasoline |
| | LD50 Oral | Rat | >5000 mg/kg | - | Based on Gasoline |
| Ethanol | LC50 Inhalation Vapor | Rat | 124.7 mg/l | 4 hours | Based on Ethanol |
| | LC50 Inhalation Vapor | Rat | 116.9 mg/l | 4 hours | Based on Ethanol |
| | LC50 Inhalation Vapor | Rat | 133.8 mg/l | 4 hours | Based on Ethanol |
| | LD50 Oral | Rat | 10470 mg/kg | - | Based on Ethanol |
| Conclusion/Summary | Not available. | | | | |

Irritation/Corrosion

| Product/ingredient name | Species | Result | Score | Exposure | Observation | Conc. | Remarks |
|-------------------------|---------|------------------------------------|-------|----------|-------------|-------|-------------------|
| Gasoline | Rabbit | Skin - Irritant | - | - | - | - | Based on Gasoline |
| | Rabbit | Eyes - Non-irritating to the eyes. | - | - | - | - | Based on Gasoline |
| Ethanol | Rabbit | Skin - Non-irritant to skin. | - | - | - | - | Based on Ethanol |

| | | | | | |
|---------------------|-----------------------|----------------------|-------------|-----------------|-----------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 9/21 |
| Version | 1 | Date of issue | 12/16/2014. | Format | US |
| | | | (US) | Language | ENGLISH |
| | | | | | (ENGLISH) |

Section 11. Toxicological information

| | | | | | | |
|--------|-----------------------|---|---|---|---|------------------|
| Rabbit | Eyes - Cornea opacity | - | - | - | - | Based on Ethanol |
| Rabbit | Eyes - Iris lesion | - | - | - | - | Based on Ethanol |
| Rabbit | Eyes - Irritant | - | - | - | - | Based on Ethanol |

Sensitizer

| Product/ingredient name | Route of exposure | Species | Result | Remarks |
|-------------------------|-------------------|------------|-----------------|-------------------|
| Gasoline | skin | Guinea pig | Not sensitizing | Based on Gasoline |

Mutagenicity

| Product/ingredient name | Test | Experiment | Result | Remarks |
|-------------------------|------------------------|---|----------|------------------------------------|
| Gasoline | Equivalent to OECD 476 | Experiment: In vitro Subject: Mammal - species unspecified | Negative | Based on Gasoline |
| | Equivalent to OECD 471 | Experiment: In vitro Subject: Non-mammalian species | Negative | Based on Gasoline |
| | EPA OPPTS 870.5395 | Experiment: In vivo Subject: Unspecified Cell: Germ | Negative | Based on Gasoline vapor condensate |
| | Equivalent to OECD 475 | Experiment: In vivo Subject: Unspecified Cell: Germ | Negative | Based on Gasoline |
| Ethanol | Equivalent to OECD 476 | Experiment: In vitro Subject: Mammal - species unspecified | Negative | Based on Ethanol |
| | Equivalent to OECD 473 | Experiment: In vitro Subject: Non-mammalian species | Negative | Based on Ethanol |
| | Equivalent to OECD 478 | Experiment: In vivo Subject: Unspecified Cell: Germ | Negative | Based on Ethanol |

Conclusion/Summary May cause genetic defects.

Carcinogenicity

| Product/ingredient name | Test | Species | Route | Duration | Result | Remarks |
|-------------------------|------------------------|---------|------------|-----------|-------------------------------------|-------------------|
| Gasoline | Equivalent to OECD 451 | Rat | Inhalation | 113 weeks | Negative - Inhalation - Unspecified | Based on Gasoline |
| | Equivalent to OECD 451 | Mouse | Dermal | 102 weeks | Negative - Dermal - Unspecified | Based on Gasoline |
| Ethanol | EPA OPPTS 870.4200 | Mouse | Oral | 105 weeks | Positive - Oral - Unspecified | Based on Ethanol |

2752

Section 11. Toxicological information

Equivalent - Rat Oral 104 weeks Negative - Based on
to OECD Oral - Ethanol
Unspecified

Conclusion/Summary May cause cancer

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|--|
| Gasoline | - | 2B | - |
| toluene | - | 3 | - |
| xylene | - | 3 | - |
| Benzene | + | 1 | Known to be a human carcinogen. |
| ethylbenzene | - | 2B | - |
| naphthalene | - | 2B | Reasonably anticipated to be a human carcinogen. |

IARC :

- 1 - Carcinogenic to human.
- 2B - Possible carcinogen to human.
- 3 - Not classifiable as a human carcinogen.

NTP :

- Proven - Known to be human carcinogens.
- Possible - Reasonably anticipated to be human carcinogens.

OSHA :

- + Potential occupational carcinogen

Reproductive toxicity

| Product/ingredient name | Maternal toxicity | Fertility | Development toxin | Species | Result | Exposure |
|-------------------------|-------------------|-----------|-------------------|---------|------------|--------------|
| Gasoline | - | Negative | - | Rat | Inhalation | 2 generation |
| | - | - | Negative | Rat | Inhalation | 14 days |
| Ethanol | - | Positive | - | Rat | Oral | 2 generation |
| | - | - | Negative | Rat | Inhalation | 18 days |

Conclusion/Summary Development: Suspected of damaging the unborn child.
Fertility: Not classified. Based on available data, the classification criteria are not met.
Effects on or via lactation: Not classified. Based on available data, the classification criteria are not met.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|------------------------|------------|-------------------|------------------------------|
| Gasoline | Category 3 | Not applicable. | Narcotic effects |
| xylene | Category 3 | Not applicable. | Respiratory tract irritation |
| toluene | Category 3 | Not applicable. | Narcotic effects |
| 1,2,4-Trimethylbenzene | Category 3 | Not applicable. | Respiratory tract irritation |
| ethylbenzene | Category 3 | Not applicable. | Respiratory tract irritation |
| cyclohexane | Category 3 | Not applicable. | Narcotic effects |

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|---------|------------|-------------------|---------------|
| toluene | Category 2 | Not determined | ears |
| Benzene | Category 1 | Not determined | blood system |

Aspiration hazard

| | | | | | |
|--------------|-----------------------|---------------|-------------|----------|-----------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 11/21 |
| Version | 1 | Date of issue | 12/16/2014. | Format | US |
| | | | | Language | ENGLISH |
| | | | (US) | | (ENGLISH) |

Section 11. Toxicological information

| Name | Result |
|--------------|--------------------------------|
| Gasoline | ASPIRATION HAZARD - Category 1 |
| xylene | ASPIRATION HAZARD - Category 1 |
| toluene | ASPIRATION HAZARD - Category 1 |
| Benzene | ASPIRATION HAZARD - Category 1 |
| ethylbenzene | ASPIRATION HAZARD - Category 1 |
| cyclohexane | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure

Routes of entry anticipated: Oral, Dermal, Inhalation.

Potential acute health effects

| | |
|--------------|--|
| Eye contact | Causes serious eye irritation. |
| Skin contact | Causes skin irritation. |
| Inhalation | Can cause central nervous system (CNS) depression. May cause drowsiness and dizziness. |
| Ingestion | Can cause central nervous system (CNS) depression. Irritating to mouth, throat and stomach. Aspiration hazard if swallowed – harmful or fatal if liquid is aspirated into lungs. |

Symptoms related to the physical, chemical and toxicological characteristics

| | |
|--------------|--|
| Eye contact | Adverse symptoms may include the following: pain or irritation watering redness |
| Skin contact | Adverse symptoms may include the following: irritation redness reduced fetal weight increase in fetal deaths skeletal malformations |
| Inhalation | Adverse symptoms may include the following: nausea or vomiting headache drowsiness/fatigue dizziness/vertigo unconsciousness |
| Ingestion | Adverse symptoms may include the following: nausea or vomiting reduced fetal weight increase in fetal deaths skeletal malformations |

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

| | |
|-----------------------------|----------------|
| Potential immediate effects | Not available. |
| Potential delayed effects | Not available. |

Long term exposure

| | |
|-----------------------------|----------------|
| Potential immediate effects | Not available. |
| Potential delayed effects | Not available. |

Potential chronic health effects

| | |
|-----------------------|---|
| General | Solvent "sniffing" (abuse) or intentional overexposure to vapors can produce serious central nervous system effects, including unconsciousness, and possibly death. |
| Carcinogenicity | May cause cancer. Risk of cancer depends on duration and level of exposure. |
| Mutagenicity | May cause genetic defects. |
| Teratogenicity | Suspected of damaging the unborn child. |
| Developmental effects | No known significant effects or critical hazards. |

| | | | | | |
|--------------|-----------------------|---------------|-------------|--------|-----------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 12/21 |
| Version | 1 | Date of issue | 12/16/2014. | Format | US |
| | | | | (US) | Language |
| | | | | | ENGLISH |
| | | | | | (ENGLISH) |

Section 11. Toxicological information

Fertility effects No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Other information

Aspiration of this product into the lungs can cause chemical pneumonia and can be fatal. Aspiration into the lungs can occur while vomiting after ingestion of this product. Do not siphon by mouth.

Additional information

Gasoline - Excess exposure to vapors may produce headaches, dizziness, nausea, drowsiness, irritation of eyes, nose and throat and central nervous system depression. Aspiration of this material into the lungs can cause chemical pneumonia and can be fatal. Aspiration into the lungs can occur while vomiting after ingestion of this product. Inhalation of unleaded gasoline vapors did not produce birth defects in laboratory animals. Ingestion of this material can cause gastrointestinal irritation and diarrhea.

In a long-term inhalation study of whole unleaded gasoline vapors, exposure-related kidney damage and kidney tumors were observed in male rats. Similar kidney effects were not seen in female rats or in mice. At the highest exposure level (2056 ppm), female mice had an increased incidence of liver tumors. Results from subsequent scientific studies have shown that a broad variety of chemicals cause these kidney effects only in the male rat. Further studies have discovered the means by which the physiology of the male rat uniquely predispose it to these effects. Consequently, the Risk Assessment Forum of the Environmental Protection Agency has recognized that these responses are not predictive of a human health hazard. The liver tumors that were increased in the high-dose female mice are likewise of questionable significance because of their high spontaneous occurrence even without chemical exposure and because the rate of their occurrence is accelerated by a broad spectrum of chemicals not commonly considered to be carcinogens (e.g., phenobarbital). Thus, the significance of the mouse liver tumor response in terms of human health is questionable.

Gasoline is a complex mixture of hydrocarbons and contains benzene (typically no more than 2 volume%), toluene, and xylene. Chronic exposure to high levels of benzene has been shown to cause cancer (leukemia) in humans and other adverse blood effects (anemia). Benzene is considered a human carcinogen by IARC, NTP and OSHA. Over exposure to xylene and toluene can cause irritation to the upper respiratory tract, headache and narcosis. Some liver damage and lung inflammation were seen in chronic studies on xylene in guinea pigs but not in rats.

Solvent "sniffing" (abuse) or intentional overexposure to vapors can produce serious central nervous system effects, including unconsciousness, and possibly death.

Gasoline as a mixture is classified as a 2B (possible human) carcinogen by IARC.

Gasoline engine exhaust is classified as possibly carcinogenic to humans by IARC (2B). This classification is based primarily on animal and in vitro studies of gasoline engine exhaust condensates/extracts. Studies of the gaseous exhaust stream in animals did not provide sufficient evidence for classification as a carcinogen.

Gasoline: Additional toxicity information on the components:

Benzene: Acute toxicity of benzene results primarily from depression of the central nervous system (CNS). Inhalation of concentrations over 50 ppm can produce headache, lassitude, weariness, dizziness, drowsiness, or excitation. Exposure to very high levels can result in unconsciousness and death.

2755

| | | | | | |
|---------------------|----------------------------------|---------------------|------------|-----------------|----------------------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 13/21 |
| Version 1 | Date of issue 12/16/2014. | Format | US (US) | Language | ENGLISH (ENGLISH) |

Section 11. Toxicological information

Benzene: Long-term overexposure to benzene has been associated with certain types of leukemia in humans. In addition, the International Agency for Research on Cancer (IARC), the National Toxicology Program, and OSHA consider benzene to be a human carcinogen. Chronic exposures to high levels of benzene have been reported to cause adverse blood effects including anemia. Benzene exposure can occur by inhalation and absorption through the skin.

Inhalation and forced feeding studies of benzene in laboratory animals have produced a carcinogenic response in a variety of organs, including possibly leukemia, other adverse effects on the blood, chromosomal changes and some effects on the immune system. Exposure to benzene at levels up to 300 ppm did not produce birth defects in animal studies; however, exposure to higher dosage levels resulted in a reduction of body weight of the rat pups (fetotoxicity). Changes in the testes have been observed in mice exposed to benzene at 300 ppm, but reproductive performance was not altered in rats exposed to benzene at the same level. Aspiration of this material into the lungs can cause chemical pneumonia and can be fatal. Aspiration into the lungs can occur while vomiting after ingestion of this material.

Toluene: Aspiration of this material into the lungs can cause chemical pneumonia and can be fatal. Aspiration into the lungs can occur while vomiting after ingestion of this material. Deliberate inhalation of high concentrations of toluene has been linked to damage of the brain, liver and kidney. Inhalation of very high concentrations of toluene, such as in cases of solvent abuse, has resulted in sudden death which may be a result of cardiac arrhythmia or central nervous system depression. Mental and/or growth retardation has been reported in children of women who deliberately inhale toluene during pregnancy (usually at thousands of ppm). Fetal developmental toxicity was observed when pregnant rats were exposed to toluene at levels of 1500 ppm. Maternal toxicity was also observed at this concentration. Prolonged, high level exposure to toluene in laboratory animals has resulted in hearing loss. Exposure studies in rats have resulted in adverse effects on the kidney, liver and central nervous system. Studies in occupationally exposed individuals indicate that toluene exposure has been associated with impaired color vision and decreased performance in some neurobehavioral tests. There are occupational studies which report an association between inhalation exposure to toluene and adverse effects on reproduction including spontaneous abortion. The methodology of these studies and the reliability of the results have been questioned. In a two-generation study in rats, inhalation of toluene at levels up to 2000 ppm did not produce adverse effects on fertility or reproductive performance.

Xylenes: Xylene has been reported to cause central nervous system effects at concentrations above the recommended exposure limit. Xylene vapor becomes irritating at relatively high levels. In one study, eye irritation was reported at exposures of 460 ppm and in one person at 230 ppm after 15 minutes. In another study, no one reported eyes, nose and throat irritation at mixed xylene exposures up to 230 ppm for 30 minutes. Dermal LD50 is expected to be greater than 10g/kg in rabbits, based on test results from similar materials.

Mixed xylenes caused slight hearing loss in rats exposed to 800 ppm in the air for 14 hours/day for six weeks. There is no information available for lower concentrations; however, similar chemicals that have caused these hearing effects at similar concentrations have not caused effects at lower concentrations.

Pregnant animals exposed to xylene or its isomers have been reported to cause development toxicity in rodents when exposed by inhalation. The developmental effects observed consisted of delayed development and minor skeletal variations, but no malformations. Because of the high exposure levels used in these studies, we do not believe that these results imply an increased risk of reproductive toxicity to workers exposed to xylene levels at or below the exposure limits.

Xylene and its isomers are not genotoxic.

Technical grade xylene has been tested in a National Toxicology Program carcinogenicity study in rats and mice dosed orally for two years. There was no evidence of carcinogenicity.

Ethylbenzene: The National Toxicology Program (NTP) conducted a 13-week inhalation study with male and female rats and mice at exposure concentrations ranging from 100

2756

| | | | | | |
|---------------------|-----------------------|----------------------|-------------|-----------------|-----------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 14/21 |
| Version | 1 | Date of issue | 12/16/2014. | Format | US |
| | | | | Language | ENGLISH |
| | | | | | (ENGLISH) |

Section 11. Toxicological information

to 1000 ppm ethylbenzene. No rats or mice died during the study. Kidney, liver, and lung weights were increased in the exposed rats, while weight increases were observed only in the livers of exposed mice. Treatment-related histopathologic changes were not observed in any tissues of rats and mice.

NTP also exposed male and female rats and mice by inhalation to 0, 75, 250, or 750 ppm ethylbenzene for 2 years. There was a statistically significant increase in the number of kidney tumors in male and female rats at 750 ppm. There were also increased incidences of lung tumors in male mice and liver tumors in female mice that were statistically significant at 750 ppm. Except for the male rat kidney tumors, the incidence of the tumors were within the range observed for non-exposed animals from other studies conducted by NTP. The significance of these findings to humans is unknown. Ethylbenzene is not genotoxic. The International Agency for Research on Cancer (IARC) has evaluated ethylbenzene and found it to be possibly carcinogenic to humans (Group 2B).

Ethylbenzene is not genotoxic.

This product contains trimethylbenzenes. These compounds cause irritation to the eyes, nose and respiratory tract. Repeated dermal exposure can defat and irritate the skin. Inhalation may cause dizziness and drowsiness. Studies in laboratory animals with mixtures of C9 aromatic hydrocarbons produced adverse effects on development such as increased fetal mortality, reduced fetal weight, and delayed ossification at high exposure concentrations. Effects were reduced if exposure was terminated prior to delivery. There was no evidence of reproductive toxicity.

Naphthalene has been reported to cause developmental toxicity in mice after oral exposure to relatively high dose levels, but developmental toxicity was not observed in NTP (National Toxicology Program) sponsored studies in rats and rabbits. Ingestion or inhalation of naphthalene can result in hemolysis and other blood abnormalities, and individuals (and infants) deficient in glucose-6-phosphate dehydrogenase may be especially susceptible to these effects. Inhalation of naphthalene may cause headache and nausea. Airborne exposure can result in eye irritation. Naphthalene exposure has been associated with cataracts in animals and humans.

Ethanol - Human data: In humans excessive consumption of alcoholic beverages during pregnancy is associated with the induction of Fetal Alcohol Syndrome in the offspring. Reduced birth weight and physical and mental defects occur. There is no evidence that such effects might be caused by exposures other than direct ingestion of alcoholic drinks. In humans high lifetime consumption of alcoholic beverages can be associated with certain cancers and effects on the liver. There is no evidence that these can be caused by exposure other than direct ingestion of alcoholic drinks (IARC 1988).

Section 12. Ecological information

Toxicity

No testing has been performed by the manufacturer.

| Product/ingredient name | Species | Test/Result | Exposure | Effects | Remarks |
|-------------------------|----------------|---|----------|-------------------|--------------------------------------|
| Gasoline | Micro-organism | Acute EC50 15.41 mg/l Nominal Fresh water | 40 hours | growth inhibition | - |
| | Algae | Acute EL50 3.1 mg/l Nominal Fresh water | 72 hours | (growth rate) | Based on Gasoline |
| | Algae | Acute EL50 3.7 mg/l Nominal Fresh water | 96 hours | (growth rate) | Based on Gasoline |
| | Daphnia | Acute EL50 4.5 mg/l Nominal Fresh water | 48 hours | Mobility | Based on straight-run light gasoline |
| | Fish | Acute LL50 10 mg/l Nominal | 96 hours | Mortality | Based on Naphtha |

| | | | | | |
|--------------|---------------------------|--------------|------------|----------|----------------------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 15/21 |
| Version 1 | Date of issue 12/16/2014. | Format | US (US) | Language | ENGLISH (ENGLISH) |

Section 12. Ecological information

| | | | | | |
|--------------|--|----------------|---------------|---|---|
| | Fresh water | | | | (petroleum), isomerisation |
| Fish | Acute LL50 8.2 mg/l Nominal Fresh water | 96 hours | Mortality | | Based on Naphtha (petroleum), light alkylate |
| Algae | Acute NOELR 0. 5 mg/l Nominal Fresh water | 72 hours | (growth rate) | | Based on Gasoline |
| Daphnia | Acute NOELR 0. 5 mg/l Nominal Fresh water | 48 hours | Mobility | | Based on Straight run gas oil |
| Daphnia | Chronic EL50 10 mg/l Nominal Fresh water | 21 days | Reproduction | | Based on Naphtha (petroleum), light alkylate |
| Daphnia | Chronic EL50 >40 mg/l Nominal Fresh water | 21 days | Mobility | | Based on Naphtha (petroleum), light alkylate |
| Fish | Chronic EL50 10 mg/l Nominal Fresh water | 21 days | Reproduction | | Based on: Naphtha (petroleum), light alkylate; read across between species |
| Fish | Chronic LL50 5.2 mg/l Nominal Fresh water | 14 days | Mortality | | Based on Naphtha (petroleum), light catalytic reformed |
| Daphnia | Chronic NOELR 2.6 mg/l Nominal Fresh water | 21 days | Reproduction | | Based on Naphtha (petroleum), light alkylate |
| Daphnia | Chronic NOELR 16 mg/l Nominal Fresh water | 21 days | Mobility | | Based on Naphtha (petroleum), light alkylate |
| Fish | Chronic NOELR 2.6 mg/l Nominal Fresh water | 14 days | Mortality | | Based on Naphtha (petroleum), light catalytic reformed |
| Fish | Chronic NOELR 2.6 mg/l Nominal Fresh water | 21 days | Reproduction | | Based on: Naphtha (petroleum), light alkylate; read across between species |
| soil, plants | Chronic PNEC >0. 4 mg/kg | - | - | | - |
| Ethanol | Algae | EC50 675 mg/l | 4 days | - | Based on Ethanol |
| | Aquatic plants | EC50 4432 mg/l | 7 days | - | Based on Ethanol |

2758

Section 12. Ecological information

| | | | | |
|---------|-----------------------|----------|---|------------------|
| Daphnia | Acute LC50 5012 mg/l | 48 hours | - | Based on Ethanol |
| Fish | Acute LC50 153 g/l | 96 hours | - | Based on Ethanol |
| Fish | Acute LC50 14.2 g/l | 96 hours | - | Based on Ethanol |
| Daphnia | Chronic LC50 2 mg/l | 10 days | - | Based on Ethanol |
| Daphnia | Chronic LC50 9.6 mg/l | 9 days | - | Based on Ethanol |

Conclusion/Summary Not available.

Persistence and degradability

Partially biodegradable.

| Product/ingredient name | Test | Result | Remarks |
|-------------------------|------|--------------------------|------------------|
| Ethanol | EPA | 95 % - Readily - 15 days | Based on Ethanol |
| | EPA | 84 % - Readily - 20 days | Based on Ethanol |
| | EPA | 74 % - Readily - 5 days | Based on Ethanol |
| | EPA | 74 % - Readily - 10 days | Based on Ethanol |

Conclusion/Summary Not available.

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|-------------------------|-------------------|------------|------------------|
| Ethanol | - | - | Readily |

Bioaccumulative potential

This product is not expected to bioaccumulate through food chains in the environment.

Mobility in soil

Soil/water partition coefficient (K_{oc}) Not available.

Mobility Spillages may penetrate the soil causing ground water contamination.

Other ecological information Spills may form a film on water surfaces causing physical damage to organisms. Oxygen transfer could also be impaired.

Section 13. Disposal considerations

Disposal methods The generation of waste should be avoided or minimized wherever possible. Significant quantities of waste product residues should not be disposed of via the foul sewer but processed in a suitable effluent treatment plant. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.






United States - RCRA Toxic hazardous waste "U" List

| | | |
|---|---------------------------|--------------------------------------|
| Product name BP Unleaded Gasolines | Product code 12631 | Page: 17/21 |
| Version 1 Date of issue 12/16/2014. | Format US (US) | Language ENGLISH (ENGLISH) |

Section 13. Disposal considerations

| Ingredient | CAS # | Status | Reference number |
|--|-----------|--------|------------------|
| Xylene | 1330-20-7 | Listed | U239 |
| Toluene; Benzene, methyl- | 108-88-3 | Listed | U220 |
| Benzene (I,T) | 71-43-2 | Listed | U019 |
| Cyclohexane (I); Benzene, hexahydro- (I) | 110-82-7 | Listed | U056 |

Section 14. Transport information

| | DOT Classification | TDG Classification | IMDG | IATA |
|----------------------------|---|--|--|---|
| UN number | UN1203 | UN1203 | UN1203 | UN1203 |
| UN proper shipping name | GASOLINE | GASOLINE | MOTOR SPIRIT or GASOLINE or PETROL MARINE POLLUTANT | Motor spirit or Gasoline or Petrol |
| Transport hazard class(es) | 3  | 3  | 3   | 3  |
| Packing group | II | II | II | ---- |
| Environmental hazards | No. | No. | Yes. | No. |
| Additional information | <p>Reportable quantity 333.33 lbs / 151.33 kg [53.304 gal / 201.78 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements.</p> <p>Limited quantity Yes.</p> <p>Packaging instruction Passenger aircraft Quantity</p> | <p>The marine pollutant mark is not required when transported by road or rail.</p> <p>Explosive Limit and Limited Quantity Index 30</p> <p>Passenger Carrying Ship Index 100</p> <p>Passenger Carrying Road or Rail Index 5</p> <p>Special provisions 17, 82, 88</p> | <p>The marine pollutant mark is not required when transported in sizes of ≤5 L or ≤5 kg.</p> <p>Emergency schedules (EmS) F-E, S-E</p> <p>Special provisions 243</p> | <p>The environmentally hazardous substance mark may appear if required by other transportation regulations.</p> <p>Passenger and Cargo Aircraft Quantity limitation: 5 L Packaging instructions: 353</p> <p>Cargo Aircraft Only Quantity limitation: 60 L Packaging instructions: 364</p> <p>Limited Quantities - Passenger Aircraft</p> |

2760

Section 14. Transport information

| | | |
|--|--|-----------------------------------|
| limitation: 5 L | | Quantity limitation: 1 L |
| Cargo aircraft Quantity limitation: 60 L | | Packaging instructions: Y341 |
| Special provisions 144, 177, B1, B33, IB2, T4, TP1 | | Special provisions A100 |

Special precautions for user Not available.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Proper shipping name MARPOL Annex 1 rules apply for bulk shipments by sea.
Category: gasoline and spirits

Section 15. Regulatory information

U.S. Federal regulations

United States inventory (TSCA 8b) All components are listed or exempted.

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 311/312

Classification

Fire hazard
Immediate (acute) health hazard
Delayed (chronic) health hazard

SARA 313

| | Product name | CAS number | Concentration |
|--|------------------------|------------|---------------|
| Form R - Reporting requirements | toluene | 108-88-3 | 4 - 11 |
| | xylene | 1330-20-7 | 4 - 11 |
| | Benzene | 71-43-2 | 0 - 3 |
| | 1,2,4-Trimethylbenzene | 95-63-6 | 0 - 3 |
| | ethylbenzene | 100-41-4 | 0 - 2 |
| | cyclohexane | 110-82-7 | 0 - 1 |
| | naphthalene | 91-20-3 | 0 - 0.5 |
| Supplier notification | toluene | 108-88-3 | 4 - 11 |
| | xylene | 1330-20-7 | 4 - 11 |
| | Benzene | 71-43-2 | 0 - 3 |
| | 1,2,4-Trimethylbenzene | 95-63-6 | 0 - 3 |
| | ethylbenzene | 100-41-4 | 0 - 2 |
| | cyclohexane | 110-82-7 | 0 - 1 |
| | naphthalene | 91-20-3 | 0 - 0.5 |

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts

The following components are listed: XYLENE; TOLUENE; ETHYL ALCOHOL; BENZENE; PSEUDOCUMENE; ETHYL BENZENE; CYCLOHEXANE

New Jersey

The following components are listed: XYLENES; BENZENE, DIMETHYL-; TOLUENE; BENZENE, METHYL-; ETHYL ALCOHOL; ALCOHOL; BENZENE; PSEUDOCUMENE; 1, 2,4-TRIMETHYL BENZENE; ETHYL BENZENE; BENZENE, ETHYL-; CYCLOHEXANE; NAPHTHALENE; MOTH FLAKES

| | | | | | |
|--------------|-----------------------|---------------|-------------|----------|-----------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 19/21 |
| Version | 1 | Date of issue | 12/16/2014. | Format | US |
| | | | (US) | Language | ENGLISH |
| | | | | | (ENGLISH) |

Section 15. Regulatory information

Pennsylvania

The following components are listed: GASOLINE; BENZENE, DIMETHYL-; BENZENE, METHYL-; DENATURED ALCOHOL; BENZENE; PSEUDOCUMENE; BENZENE, ETHYL-; CYCLOHEXANE; NAPHTHALENE

California Prop. 65

WARNING: This product contains a chemical known to the State of California to cause cancer.
ethylbenzene; naphthalene; cumene

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.
toluene

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.
Benzene

Other Prop 65 chemicals will result under certain conditions from the use of this material. For example, burning fuels produces combustion products including carbon monoxide, a Prop 65 reproductive toxin.

Other regulations

Australia inventory (AICS)

At least one component is not listed.

Canada inventory

All components are listed or exempted.

China inventory (IECSC)

At least one component is not listed.

Japan inventory (ENCS)

At least one component is not listed.

Korea inventory (KECI)

At least one component is not listed.

Philippines inventory (PICCS)

At least one component is not listed.

Taiwan inventory (CSNN)

REACH Status

For the REACH status of this product please consult your company contact, as identified in Section 1.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|---------------------|---|---|
| Health | * | 2 |
| Flammability | | 3 |
| Physical hazards | | 0 |
| Personal protection | | X |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

National Fire Protection Association (U.S.A.)



History

Date of issue/Date of revision

12/16/2014.

Date of previous issue

No previous validation.

Product name BP Unleaded Gasolines

Product code 12631

Page: 20/21

Version 1 Date of issue 12/16/2014.

Format US

Language ENGLISH

(US)

(ENGLISH)

Section 16. Other information

Key to abbreviations

ACGIH = American Conference of Industrial Hygienists
ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
CAS Number = Chemical Abstracts Service Registry Number
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
OEL = Occupational Exposure Limit
SDS = Safety Data Sheet
STEL = Short term exposure limit
TWA = Time weighted average
UN = United Nations
UN Number = United Nations Number, a four digit number assigned by the United Nations Committee of Experts on the Transport of Dangerous Goods.

✔ Indicates information that has changed from previously issued version.

Notice to reader

All reasonably practicable steps have been taken to ensure this data sheet and the health, safety and environmental information contained in it is accurate as of the date specified below. No warranty or representation, express or implied is made as to the accuracy or completeness of the data and information in this data sheet.

The data and advice given apply when the product is sold for the stated application or applications. You should not use the product other than for the stated application or applications without seeking advice from BP Group.

It is the user's obligation to evaluate and use this product safely and to comply with all applicable laws and regulations. The BP Group shall not be responsible for any damage or injury resulting from use, other than the stated product use of the material, from any failure to adhere to recommendations, or from any hazards inherent in the nature of the material. Purchasers of the product for supply to a third party for use at work, have a duty to take all necessary steps to ensure that any person handling or using the product is provided with the information in this sheet. Employers have a duty to tell employees and others who may be affected of any hazards described in this sheet and of any precautions that should be taken. You can contact the BP Group to ensure that this document is the most current available. Alteration of this document is strictly prohibited.

2763

| | | | | | |
|--------------|-----------------------|---------------|-------------|----------|----------------------|
| Product name | BP Unleaded Gasolines | Product code | 12631 | Page: | 21/21 |
| Version | 1 | Date of issue | 12/16/2014. | Format | US (US) |
| | | | | Language | ENGLISH (ENGLISH) |

The first part of the document discusses the importance of maintaining accurate records of all transactions. It emphasizes that every entry should be clearly documented, including the date, amount, and purpose of the transaction. This ensures transparency and allows for easy reconciliation of accounts.

In the second section, the author outlines the various methods used to collect and analyze data. These methods include direct observation, interviews, and the use of specialized software tools. Each method is described in detail, highlighting its strengths and limitations.

The third section focuses on the results of the study. It presents a series of tables and graphs that illustrate the findings. The data shows a clear trend of increasing activity over the period studied, which is attributed to several key factors discussed in the text.

Finally, the document concludes with a series of recommendations for future research and practice. It suggests that further studies should be conducted to explore the underlying causes of the observed trends and to develop more effective strategies for managing the data.

Safety Data Sheet



1. Identification

| | | | |
|-----------------------------|--|-------------------------|--|
| Product Name: | PRO +LSPR 6PK SAFETY RED | Revision Date: | 1/3/2019 |
| Product Identifier: | 7564838 | Supercedes Date: | 5/22/2017 |
| Recommended Use: | Topcoat/Aerosols | | |
| Supplier: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA | Manufacturer: | Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061 USA |
| Preparer: | Regulatory Department | | |
| Emergency Telephone: | 24 Hour Hotline: 847-367-7700 | | |

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

31% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

| | | |
|---------------------------------------|------|--|
| Compressed Gas | H280 | Contains gas under pressure; may explode if heated. |
| Eye Irritation, category 2 | H319 | Causes serious eye irritation. |
| Flammable Aerosol, category 1 | H222 | Extremely flammable aerosol. |
| STOT, repeated exposure, category 2 | H373 | May cause damage to organs through prolonged or repeated exposure. |
| STOT, single exposure, category 3, NE | H336 | May cause drowsiness or dizziness. |
| Skin Sensitizer, category 1 | H317 | May cause an allergic skin reaction. |

GHS LABEL PRECAUTIONARY STATEMENTS

| | |
|-----------|--|
| P210 | Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| P211 | Do not spray on an open flame or other ignition source. |
| P251 | Do not pierce or burn, even after use. |
| P260 | Do not breathe dust/fume/gas/mist/vapors/spray. |
| P264 | Wash hands thoroughly after handling. |
| P271 | Use only outdoors or in a well-ventilated area. |
| P272 | Contaminated work clothing should not be allowed out of the workplace. |
| P280 | Wear protective gloves/protective clothing/eye protection/face protection. |
| P302+P352 | IF ON SKIN: Wash with plenty of soap and water. |
| P304+P340 | IF INHALED: Remove person to fresh air and keep comfortable for breathing. |

| | |
|----------------|--|
| P305+P351+P338 | IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. |
| P312 | Call a POISON CENTER or doctor/physician if you feel unwell. |
| P321 | For specific treatment see label |
| P333+P313 | If skin irritation or rash occurs: Get medical advice/attention. |
| P337+P313 | If eye irritation persists: Get medical advice/attention. |
| P403+P233 | Store in a well-ventilated place. Keep container tightly closed. |
| P405 | Store locked up. |
| P410+P403 | Protect from sunlight. Store in a well-ventilated place. |
| P410+P412 | Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. |
| P501 | Dispose of contents/container in accordance with local, regional and national regulations. |

GHS SDS PRECAUTIONARY STATEMENTS

P363 Wash contaminated clothing before reuse.

3. Composition / Information On Ingredients

HAZARDOUS SUBSTANCES

| <u>Chemical Name</u> | <u>CAS-No.</u> | <u>Wt.% Range</u> | <u>GHS Symbols</u> | <u>GHS Statements</u> |
|------------------------------|----------------|-------------------|--------------------|-----------------------|
| Acetone | 67-64-1 | 25-50 | GHS02-GHS07 | H225-319-332-336 |
| Propane | 74-98-6 | 10-25 | GHS04 | H280 |
| n-Butyl Acetate | 123-86-4 | 10-25 | GHS02-GHS07 | H226-336 |
| n-Butane | 106-97-8 | 2.5-10 | GHS04 | H280 |
| Barium Sulfate | 7727-43-7 | 2.5-10 | GHS07 | H332 |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 2.5-10 | GHS02-GHS07 | H226-315-319-332 |
| Ethylbenzene | 100-41-4 | 1.0-2.5 | GHS02-GHS07-GHS08 | H225-304-332-373 |
| Ethyl 3-Ethoxypropionate | 763-69-9 | 0.1-1.0 | GHS06 | H331 |
| Methyl ethyl ketoxime | 96-29-7 | 0.1-1.0 | GHS05-GHS06 | H302-312-317-318-331 |

4. First-Aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-Fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Special Fire and Explosion Hazard (Combustible Dust): No Information

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Follow all SDS and label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing.

STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of flammable aerosols. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

Advice on Safe Handling of Combustible Dust: No Information

8. Exposure Controls / Personal Protection

| Chemical Name | CAS-No. | Weight % Less Than | ACGIH TLV- TWA | ACGIH TLV- STEL | OSHA PEL-TWA | OSHA PEL- CEILING |
|------------------------------|-----------|-----------------------|---------------------|--------------------|----------------------|----------------------|
| Acetone | 67-64-1 | 30.0 | 250 ppm | 500 ppm | 1000 ppm | N.E. |
| Propane | 74-98-6 | 20.0 | N.E. | N.E. | 1000 ppm | N.E. |
| n-Butyl Acetate | 123-86-4 | 20.0 | 50 ppm | 150 ppm | 150 ppm | N.E. |
| n-Butane | 106-97-8 | 10.0 | N.E. | 1000 ppm | N.E. | N.E. |
| Barium Sulfate | 7727-43-7 | 10.0 | 5 mg/m ³ | N.E. | 15 mg/m ³ | N.E. |
| Xylenes (o-, m-, p- isomers) | 1330-20-7 | 5.0 | 100 ppm | 150 ppm | 100 ppm | N.E. |
| Ethylbenzene | 100-41-4 | 5.0 | 20 ppm | N.E. | 100 ppm | N.E. |
| Ethyl 3-Ethoxypropionate | 763-69-9 | 1.0 | N.E. | N.E. | N.E. | N.E. |
| Methyl ethyl ketoxime | 96-29-7 | 1.0 | 10 ppm | N.E. | N.E. | N.E. |

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Engineering Measures for Combustible Dust: No Information

9. Physical and Chemical Properties

| | | | |
|---------------------------------|---------------------|---|------------|
| Appearance: | Aerosolized Mist | Physical State: | Liquid |
| Odor: | Solvent Like | Odor Threshold: | N.E. |
| Relative Density: | 0.793 | pH: | N.A. |
| Freeze Point, °C: | N.D. | Viscosity: | N.D. |
| Solubility in Water: | Slight | Partition Coefficient, n-octanol/ water: | N.D. |
| Decomposition Temp., °C: | N.D. | Explosive Limits, vol%: | 1.0 - 13.0 |
| Boiling Range, °C: | -37 - 260 | Flash Point, °C: | -96 |
| Flammability: | Supports Combustion | Auto-ignition Temp., °C: | N.D. |
| Evaporation Rate: | Faster than Ether | Vapor Pressure: | N.D. |
| Vapor Density: | Heavier than Air | | |

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological Information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: May cause skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B).

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

| <u>CAS-No.</u> | <u>Chemical Name</u> | <u>Oral LD50</u> | <u>Dermal LD50</u> | <u>Vapor LC50</u> |
|----------------|------------------------------|------------------|---------------------|-------------------|
| 67-64-1 | Acetone | 5800 mg/kg Rat | >15700 mg/kg Rabbit | 50.1 mg/L Rat |
| 123-86-4 | n-Butyl Acetate | 10768 mg/kg Rat | >17600 mg/kg Rabbit | > 21 mg/L Rat |
| 106-97-8 | n-Butane | N.E. | N.E. | 658 mg/L Rat |
| 7727-43-7 | Barium Sulfate | 307000 mg/kg Rat | N.E. | N.E. |
| 1330-20-7 | Xylenes (o-, m-, p- isomers) | 3500 mg/kg Rat | >4350 mg/kg Rabbit | 29.08 mg/L Rat |
| 100-41-4 | Ethylbenzene | 3500 mg/kg Rat | 15400 mg/kg Rabbit | 17.4 mg/L Rat |
| 763-69-9 | Ethyl 3-Ethoxypropionate | 5000 mg/kg Rat | >9500 mg/kg Rabbit | >5.96 mg/L Rat |
| 96-29-7 | Methyl ethyl ketoxime | 930 mg/kg Rat | 1100 mg/kg Rabbit | >4.83 mg/L Rat |

N.E. - Not Established

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Do not incinerate closed containers. This product as supplied is a USEPA defined ignitable hazardous waste. Dispose of unusable product as a hazardous waste (D001) in accordance with local, state, and federal regulation.

14. Transport Information

| | <u>Domestic (USDOT)</u> | <u>International (IMDG)</u> | <u>Air (IATA)</u> | <u>TDG (Canada)</u> |
|------------------------------|---|-----------------------------|---------------------|---------------------|
| UN Number: | N.A. | 1950 | 1950 | N.A. |
| Proper Shipping Name: | Paint and Related Spray Products in Ltd Qty | Aerosols | Aerosols, flammable | Aerosols |
| Hazard Class: | N.A. | 2 | 2.1 | N.A. |
| Packing Group: | N.A. | N.A. | N.A. | N.A. |
| Limited Quantity: | Yes | Yes | Yes | Yes |

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Gas under pressure, Respiratory or Skin Sensitization, Serious eye damage or eye irritation, Specific target organ toxicity (single or repeated exposure)

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

| <u>Chemical Name</u> | <u>CAS-No.</u> |
|------------------------------|----------------|
| Xylenes (o-, m-, p- isomers) | 1330-20-7 |
| Ethylbenzene | 100-41-4 |

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

U.S. State Regulations:

California Proposition 65:

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

16. Other Information**HMIS RATINGS**

Health: 2 Flammability: 4 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: N.E. Flammability: 4 Instability: 0

Volatile Organic Compounds 531 g/L

SDS REVISION DATE: 1/3/2019

REASON FOR REVISION: Revision Description Changed
Product Composition Changed
Substance and/or Product Properties Changed in Section(s):
02 - Hazard Identification
09 - Physical & Chemical Properties
14 - Transport Information
15 - Regulatory Information
16 - Other Information
Revision Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.



SAFETY DATA SHEET

Section 1. PRODUCT AND COMPANY IDENTIFICATION

Product Name: ABC Dry Chemical Fire Extinguishant
 Other Identifiers: Multi-purpose Dry Chemical
 Product Code(s): CH555, F13, F11
 Model Code(s) of Extinguishers: 402, IS 18ABC, IS35ABC, IS 45ABC, 13ABC, V25ABC, VH25ABC, V30ABC, VH30ABC, V50ABC, VS50ABC, VS75ABC, V250ABC
 Recommended Use: Fire suppression, not for human or animal drug use.
 Manufacturer: AMEREX CORPORATION
 Internet Address: www.amerex-fire.com
 Address: 7595 Gadsden Highway, P.O. Box 81
 Trussville, AL 35173-0081
 Company Telephone: (205) 655-3271
 E-mail Address: info@amerex-fire.com
 Emergency Contacts: Chemtrec 1(800) 424-9300 or (703) 527-3887
 Revised: March 13, 2018

Section 2. HAZARDS IDENTIFICATION

GHS – Classification

| Health | Environmental | Physical |
|---------------------------------------|---------------|----------|
| Acute Toxicity: Category 5 | None | None |
| Skin Corrosion/Irritation: Category 3 | None | None |
| Skin Sensitization: NO | None | None |
| Eye: Category 2A | None | Warning |
| STOT – Category 3 | None | Warning |
| Carcinogen: Category None | None | None |

GHS – Label Symbol(s):

If Pressurized: Gas Under Pressure

GHS – Words(s): Warning

Other Hazards Not Resulting in Classification: Mica may contain small quantities of quartz (crystalline silica). Prolonged exposure to respirable crystalline silica dust at concentrations exceeding the occupational exposure limits may increase the risk of developing a disabling

lung disease known as silicosis. IARC found limited evidence for pulmonary carcinogenicity of crystalline silica in humans. In the case of normal use of this product, exposure to silica should be nil.

The attapulgite clay used in this product has a fiber length of less than 5µm; therefore, the clay is not considered to be carcinogenic in animals or humans.

GHS – Hazard Phrases

| GHS Hazard | GHS Codes(s) | Code Phrase(s) |
|-----------------------|--|--|
| Physical | H229 | *- Contents under pressure; may explode if heated. |
| Health | H303 315 319 335 | May be harmful if swallowed Causes skin irritation Causes serious eye irritation May cause respiratory irritation |
| Environmental | None | |
| Precautionary: | | |
| General | P101 | If medical advice is needed, have product container or label at hand |
| Prevention | P251 261 264 280 | Do not pierce or burn, even after use. Avoid breathing dust/fumes/gas/mist/vapours/spray. Wash exposed skin thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. |
| Response | P312 321 362 302+352 304+340 305+351+338 332+313 342+311 337+313 | Call a doctor if you feel unwell. Specific treatment (see Section 4. First Aid Measures) Take off contaminated clothing. IF ON SKIN: Wash with plenty of water. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do – continue rinsing. If skin irritation occurs: Get medical advice/attention. If experiencing respiratory symptoms: Call a doctor. If eye irritation persists get medical advice/attention. |
| Storage | P410 +403 | *- Protect from sunlight. Store in well-ventilated place. |
| Disposal | P501 | Dispose of contents through a licensed disposal company. Contaminated container should be disposed of as unused product. |

*- If under pressure

Section 3. COMPOSITION/INFORMATION ON INGREDIENTS

| Chemical Name | EC No. | REACH Reg. No. | CAS-No. | Weight % | Classification |
|---|-----------|-----------------------|------------|----------|----------------|
| Mono-ammonium phosphate | 231-764-5 | 01-2119488166-29 | 7722-76-1 | 80-98 | NA |
| Attapulgite clay | 601-805-5 | Not Available | 12174-11-7 | 3-16 | NA |
| Mica-potassium aluminum silicate | 310-1276 | Not Available | 12001-26-2 | 1-2 | NA |
| Silicone oil methyl hydrogen polysiloxane | 613-152-3 | Not Available | 63148-57-2 | <1 | NA |
| Calcium carbonate | 207-439-9 | Not Available | 1317-65-3 | <1 | NA |
| Amorphous silica precipitated synthetic zeolite | 231-545-4 | 01-2119379499-16-0036 | 7631-86-9 | <1 | NA |
| Yellow 14 pigment – di-azo dye | 226-789-3 | Not Available | 5468-75-7 | <1 | NA |

Emergency overview:

Light yellow, fine solid powder, odorless.

Adverse health effects and symptoms:

Mild irritant to the respiratory system. Irritant to eyes, and skin. Symptoms may include coughing,

shortness of breath, and irritation of the lungs, eyes, and skin. Ingestion, although unlikely, may cause cramps, nausea and diarrhea.

Section 4. FIRST AID MEASURES

| | |
|---|---|
| Eye Exposure: | May cause irritation. Irrigate eyes with water and repeat until pain free. Seek medical attention if irritation develops, or if vision changes occur. |
| Skin Exposure: | May cause skin irritation. In case of contact, wash with plenty of soap and water. Seek medical attention if irritation persists. |
| Inhalation: | May cause irritation, along with coughing. If respiratory irritation or distress occurs remove victim to fresh air. Seek medical attention if irritation persists. |
| Ingestion: | Overdose symptoms may include numbness or tingling in hands or feet, uneven heart rate, paralysis, feeling faint, chest pain or heavy feeling, pain spreading to the arm or shoulder, nausea, diarrhea, sweating, general ill feeling, or seizure (convulsions). If victim is conscious and alert, give 2-3 glasses of water to drink. If conscious, do not induce vomiting. Seek immediate medical attention. Do not leave victim unattended. To prevent aspiration of swallowed product, lay victim on side with head lower than waist. |
| Medical conditions possibly aggravated by exposure: | Inhalation of product may aggravate existing chronic respiratory problems such as asthma, emphysema, or bronchitis. Skin contact may aggravate existing skin disease. Chronic overexposure may cause pneumoconiosis ("dusty lung" disease). |

Section 5. FIRE-FIGHTING MEASURES

| | |
|--------------------------------|---|
| Flammable Properties: | Not flammable |
| Flash Point: | Not determined |
| Suitable Extinguishing Media: | Non-combustible. Use extinguishing media suitable for surrounding conditions. |
| Hazardous Combustion Products: | Carbon oxides |

Explosion Data:

| | |
|--|---|
| Sensitivity to Mechanical Impact: | Not sensitive |
| Sensitivity to Static Discharge: | Not sensitive |
| Unusual fire/explosion hazards: | In a fire this material may decompose, releasing oxides of carbon, potassium and nitrogen (see Section 10). |
| Protective Equipment and Precautions for Firefighters: | As in any fire, wear self-contained breathing apparatus pressure-demand. NIOSH (approved or equivalent) and full protective gear. |

Section 6. ACCIDENTAL RELEASE MEASURES

| | |
|--------------------------------|--|
| Personal Precautions: | Avoid contact with skin, eyes, and clothing. |
| Personal Protective Equipment: | Minimum - safety glasses, gloves, and a dust respirator. |
| Emergency Procedures: | NA |
| Methods for Containment: | Prevent further leakage or spillage if safe to do so. |
| Methods for Clean Up: | Avoid dust formation; clean up released material using vacuum or wet sweep and shovel to minimize generation of dust. Bag and transfer to properly labeled containers. Ventilate area and wash spill site after material pickup is complete. |
| Other: | If product is contaminated, use PPE and containment appropriate to the nature of the most toxic chemical/material in the mixture. |

Section 7. HANDLING AND STORAGE

| | |
|------------------------------|---|
| Personal Precautions: | Use appropriate PPE when handling or maintaining equipment, and wash thoroughly after handling (see Section 8). |
| Conditions for Safe Storage: | Keep product in original container or extinguisher. Contents may be under pressure – inspect for extinguisher rust periodically to ensure container integrity. |
| Incompatible Products: | Do not mix with other extinguishing agents, particularly potassium bicarbonate and sodium bicarbonate. Incompatible with strong oxidizing agents and strong acids. Do not store in high humidity. Do not combine with chlorine compounds. |

Section 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

| Chemical Name | OSHA PEL | ACGIH TLV | DFG MAK * | EU BLV |
|-------------------------|--|--|---|--------|
| Mono-ammonium phosphate | PNOC** Total dust, 15 mg/m ³ Respirable fraction, 5 mg/m ³ | PNOC Total dust, 10 mg/m ³ Respirable fraction, 3 mg/m ³ | PNOC Total dust, 4 mg/m ³ Respirable fraction, 1.5 mg/m ³ | NA |
| Mica | 6 mg/m ³ | 3 mg/m ³ | ----- | NA |
| Attapulgite clay | PNOC** Total dust, 15 mg/m ³ Respirable fraction, 5 mg/m ³ | PNOC Total dust, 10 mg/m ³ Respirable fraction, 3 mg/m ³ | PNOC Total dust, 4 mg/m ³ Respirable fraction, 1.5 mg/m ³ | |
| Silicone oil | NR** | NR | | |
| Calcium carbonate | PNOC Total dust, 15 mg/m ³ Respirable fraction, 5 mg/m ³ | PNOC Total dust, 10 mg/m ³ Respirable fraction, 3 mg/m ³ | ----- | NA |
| Amorphous silica | 20mppcf 80 mg/m ³ or % SiO ₂ | 10 mg/m ³ | 4 mg/m ³ | NA |
| Yellow 14 pigment | NR | NR | NR | NA |

*German regulatory limits **PNOC = Particulates not otherwise classified (ACGIH) also known as Particulates not otherwise regulated (OSHA) *** NR = Not Regulated. All values are 8 hour time weighted average concentrations.

Engineering Controls:

Showers
Eyewash stations
Ventilation systems

Personal Protective Equipment – PPE Code E:

The need for respiratory protection is not probable during short-term exposure. During production, the manufacturer should use judgement concerning the need for PPE.



Eye/Face Protection:
Skin and Body Protection:
Respiratory Protection:

Tightly fitting safety goggles
Wear protective gloves/coveralls
If exposure limits are exceeded or irritation is experienced, NIOSH approved respiratory protection should be worn. Use P100 respirators for limited exposure. Use air-purifying respirator (APR) with high efficiency particulate air (HEPA) filters for prolonged

exposure. Positive-pressure supplied air respirators may be required for high airborne contaminant concentrations. Respiratory protection must be provided in accordance with current local regulations. The need for respiratory protection is not likely for short-term use in well ventilated areas.

Hygiene Measures:

Good personal hygiene practices essential, such as avoiding food, tobacco products, or other hand-to-mouth contact when handling. Wash thoroughly after handling.

Section 9. PHYSICAL AND CHEMICAL PROPERTIES

| | |
|--|---|
| Appearance: | Light yellow powder, finely divided odorless solid |
| Molecular Weight: | NH ₄ H ₂ PO ₄ : 115.03 |
| Odor: | Odorless |
| Odor Threshold: | No information available |
| Decomposition Temperature °C: | 100 - 120 |
| Freezing Point °C: | No information available |
| Initial Boiling Point °C: | No information available |
| Physical State: | Crystalline Powder |
| pH: | Approximately 4.4 to 4.9 |
| Flash Point °C: | None |
| Autoignition Temperature °C: | None |
| Boiling Point/Range °C: | No information available |
| Melting Point/Range °C: | NH ₄ H ₂ PO ₄ : 190 |
| Flammability/Explosion Limits in Air °C: | Upper – None; Lower-None |
| Explosive Properties: | None |
| Oxidizing Properties: | None |
| Volatile Component (%vol) | Not applicable |
| Evaporation Rate: | No information available |
| Vapor Density: | No information available |
| Vapor Pressure: | NH ₄ H ₂ PO ₄ : 1.41 mm/Hg |
| Specific gravity at 25 °C: | NH ₄ H ₂ PO ₄ : 1.80 |
| Solubility: | 40.4 g/100 ml |
| Partition Coefficient: | NH ₄ H ₂ PO ₄ Est: -4.11 |
| Viscosity: | No information available |

NOTE: NH₄H₂PO₄ – Monoammonium Phosphate

Section 10. STABILITY AND REACTIVITY

| | |
|-------------------------------------|--|
| Stability: | Stable under recommended storage and handling conditions. |
| Incompatibles: | Strong oxidizing agents; Strong acids; sodium hypochlorite and chlorine compounds. Protect from moisture |
| Conditions to Avoid: | Storage or handling near incompatibles. |
| Hazardous Decomposition Products: | Carbon, nitrogen, and potassium oxides. Heat of fire may release carbon monoxide. |
| Possibility of Hazardous Reactions: | None |
| Hazardous Polymerization | Does not occur |

Section 11. TOXICOLOGICAL INFORMATION

| | |
|----------------------------|---|
| Likely Routes of Exposure: | Inhalation, skin and eye contact. |
| Symptoms: | |
| Inhalation: | Irritation, coughing. |
| Eyes: | Irritation. |
| Skin: | Irritation. |
| Acute Toxicity: | Relatively non-toxic. |
| Chronic Toxicity: | |
| Short-term Exposure: | None known. |
| Long-term Exposure: | As with all dusts, pneumoconiosis, or "dusty lung" disease, may result from chronic exposure. |

Acute Toxicity Values - Health

| Chemical Name | LD50 | | LC50 (Inhalation) |
|-------------------------|--------------------|-----------------------|-------------------|
| | Oral | Dermal | |
| Mono-ammonium phosphate | 5750 mg/kg (rat) | >7940 mg/kg (rabbit) | Not available |
| Mica | None | None | None |
| Attapulgite clay | None | None | None |
| Silicone oil | None | None | None |
| Calcium carbonate | 6450 mg/kg (rat) | 500 mg/24 hr (rabbit) | Not available |
| Amorphous silica | >5000 mg/kg (rat) | >2000 mg/kg (rabbit) | >2.2 mg/L (rat) |
| Yellow 14 pigment | >17000 mg/kg (rat) | >3000 mg/kg (rat) | >4448 mg/m3 (rat) |

| | |
|-----------------------------------|---|
| Reproductive Toxicity: | This product's ingredients are not known to have reproductive or teratogenic effects. |
| Target Organs and Effects (TOST): | Respiratory system (mild irritant). This product is a mild irritant to epithelial tissue, (eyes, mucous membranes, skin) and may aggravate dermatitis. No information was found indicating the product causes sensitization. |

Other Toxicity Categories

| Chemical Name | Germ Cell Mutagenicity | Carcinogenicity | Reproductive | TOST Single Exp | TOST Repeated Exp | Aspiration |
|-------------------------|------------------------|-----------------|--------------|-----------------|-------------------|------------|
| Mono-ammonium phosphate | None | None | None | Cat 3 | None | None |
| Attapulgite clay | None | None | None | None | None | None |
| Mica | None | None | None | None | None | None |
| Silicone oil | None | None | None | None | None | None |
| Calcium carbonate | None | None | None | None | None | None |
| Amorphous silica | None | None | None | None | None | None |
| Yellow 14 pigment | None | None | None | None | None | None |

Section 12. ECOLOGICAL INFORMATION

| | |
|--|--|
| Ecotoxicity: | Negative effects unknown. Provides nutrient nitrogen and phosphorus to plant life. |
| Persistence/Degradability: | Degrades rapidly in humid/wet environment. |
| Probability of rapid biodegradation: | NH ₄ H ₂ PO ₄ Est: 0.693 (Rapid); (NH ₄) ₂ SO ₄ : Est: 0.684 (Rapid) |
| Anaerobic biodegradation probability: | NH ₄ H ₂ PO ₄ Est: 0.398 (Slow); (NH ₄) ₂ SO ₄ : Est: 0.398 (Slow) |
| Bioaccumulation potential: | Low. |
| Bioconcentration factor: | NH ₄ H ₂ PO ₄ : 3.16 L/kg (wet weight) (Low BCF) |
| Bioaccumulation factor: | NH ₄ H ₂ PO ₄ : 63.04 L/kg (wet weight) |
| Mobility in soil: | Slow evaporation rate; water soluble, may leach to groundwater |
| Log Koc: | NH ₄ H ₂ PO ₄ Est: -1.25 |
| Log Koa: | NH ₄ H ₂ PO ₄ Est: 16.72 |
| Log Kaw: | NH ₄ H ₂ PO ₄ Est: -20.86 |
| NOTE: NH ₄ H ₂ PO ₄ – Mono-ammonium Phosphate | |

Other Adverse Ecological Effects: No other known effects at this time

Aquatic Toxicity Values – Environment – Research

| Chemical Name | Acute (LC50) | Chronic (LC50) |
|-------------------------|--------------|----------------|
| Mono-ammonium phosphate | N/A | N/A |
| Mica | N/A | N/A |
| Attapulgite clay | N/A | N/A |
| Silicone oil | N/A | N/A |
| Calcium carbonate | N/A | N/A |
| Amorphous silica | N/A | N/A |
| Yellow 14 pigment | N/A | N/A |

Aquatic Toxicity Values – Environment – Estimates

| Chemical Name | Acute (LC50) | EC50 |
|-------------------------|--|-------------------------------|
| Mono-ammonium phosphate | 2,91e+07 mg/L Fish 96 hr; 9.4e+06 mg/l Daphnid 48 hr; | 6.70e+05 mg/L Gr. Algae 96 hr |
| Mica | N/A | N/A |
| Attapulgite clay | N/A | N/A |
| Silicone oil | N/A | N/A |
| Calcium carbonate | N/A | N/A |
| Amorphous silica | N/A | N/A |
| Yellow 14 pigment | N/A | N/A |

Section 13. DISPOSAL CONSIDERATIONS

Safe Handling

Use appropriate PPE when handling, and wash thoroughly after handling (see Section 8).

Waste Disposal Considerations

Dispose in accordance with federal, state, and local regulations.

Contaminated Packaging

Dispose in accordance with federal, state, and local regulations.

NOTES:

This product is not a RCRA characteristically hazardous or listed hazardous waste. Dispose of according to state or local laws, which may be more restrictive than federal laws or regulations. Used product may be altered or contaminated, creating different disposal considerations.

Section 14. TRANSPORT INFORMATION

UN Number: NA
 UN Proper Shipping Name: NA
 Transport Hazard Class: NA
 Packing Group: NA
 Marine Pollutant?: NO

IATA Not regulated

DOT Not regulated

NOTES:

This product is not defined as a hazardous material under U.S. Department of Transportation (DOT) 49 CFR 172, or by Transport Canada "Transportation of Dangerous Goods" regulations.

Special Precautions for Shipping:

The transportation information above covers the ABC 555 dry chemical extinguisher agent as shipped in bulk containers and not when contained in fire extinguishers or fire extinguisher systems. If shipped in a stored pressure-type fire extinguisher, and pressurized with a non-flammable, non-toxic

inert expellant gas, the fire extinguisher is considered a hazardous material by the US Department of Transportation and Transport Canada. The proper shipping name shall be FIRE EXTINGUISHER and the UN designation is UN 1044. The DOT hazard class/division is LIMITED QUANTITY when pressurized to less than 241 psig and when shipped via highway or rail. UN Class 2.2. Non-Flammable Gas, when shipping via air. Packing Group – N/A

Section 15. REGULATORY INFORMATION

International Inventory Status: All ingredients are on the following inventories

| Country(ies) | Agency | Status |
|--------------------------|---------------|--------|
| United States of America | TSCA | Yes |
| Canada | DSL | Yes |
| Europe | EINECS/ELINCS | Yes |
| Australia | AICS | Yes |
| Japan | MITI | Yes |
| South Korea | KECL | Yes |

REACH Title XVII Restrictions: No information available

| Chemical Name | Dangerous Substances | Organic Solvents | Harmful Substances Whose Names Are to be Indicated on Label | Pollution Release and Transfer Registry (Class II) | Pollution Release and Transfer Registry (Class I) | Poison and Deleterious Substances Control Law |
|------------------------|----------------------|------------------|---|--|---|---|
| Monoammonium Phosphate | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable |

| Component | ISHA – Harmful Substances Prohibited for Manufacturing, Importing, Transferring, or Supplying | ISHA – Harmful Substances Requiring Permission | Toxic Chemical Classification Listing (TCCL) – Toxic Chemicals | Toxic Release Inventory (TRI) – Group I | Toxic Release Inventory (TRI) – Group II |
|--|---|--|--|---|--|
| Monoammonium Phosphate 7722-76-1 | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable |
| Attapulgitte clay 12174-11-7 (>3) | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable |
| Mica-potassium aluminum silicate 120001-26-2 (>2) | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable |
| Calcium carbonate 471-34-1 | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable |
| Amorphous silica 69012-64-2 | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable |
| Yellow 14 pigment 5468-75-7 | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable |

European Risk and Safety phrases:

| | | |
|--------------------|---------------|---|
| EU Classification: | Xn - Irritant | |
| R Phrases: | 20 | Harmful by inhalation. |
| | 36/37/38 | Irritating to eyes, respiratory system and skin. |
| S Phrases: | 22 | Do not breath dust. |
| | 24/25 | Avoid contact with skin and eyes |
| | 26 | In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. |
| | 36 | Wear suitable protective clothing. |

U.S. Federal Regulatory Information:

SARA 313:

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA) - This product does not contain and chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

None of the chemicals in this product are under SARA reporting requirements or have SARA threshold planning quantities (TPQs) or CERCLA reportable quantities (RQs), or are regulated under TSCA 8(d).

SARA 311/312 Hazard Categories:

| | |
|-------------------------------------|-----|
| Acute Health Hazard | Yes |
| Chronic Health Hazard | No |
| Fire Hazard | No |
| *-Sudden Release of Pressure Hazard | Yes |
| Reactive Hazard | No |

* - Only applicable if material is in a pressurized extinguisher.

Clean Water/Clean Air Acts:

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42) or Clean Air Act, Section 112 Hazardous Air Pollutants (HAPs) (see 40 CFR 61) and Section 112 of the Clean Air Act Amendments of 1990.

U.S. State Regulatory Information:

Chemicals in this product are covered under specific State regulations, as denoted below:

Alaska - Designated Toxic and Hazardous Substances: None

California – Permissible Exposure Limits for Chemical Contaminants: None

Florida – Substance List: Mica Dust

Illinois – Toxic Substance List: None

Kansas – Section 302/303 List: None

Massachusetts – Substance List: Mica Dust

Minnesota – List of Hazardous Substances: None
Missouri – Employer Information/Toxic Substance List: None
New Jersey – Right to Know Hazardous Substance List: None
North Dakota – List of Hazardous Chemicals, Reportable Quantities: None
Pennsylvania – Hazardous Substance List: None
Rhode Island – Hazardous Substance List: Mica Dust
Texas – Hazardous Substance List: No
West Virginia – Hazardous Substance List: None
Wisconsin – Toxic and Hazardous Substances: None

California Proposition 65: No component is listed on the California Proposition 65 list.

Other:

| | |
|-----------------------------|---------------------|
| Mexico – Grade | No component listed |
| Canada – WHMIS Hazard Class | No component listed |

| |
|--------------------------------------|
| Section 16. OTHER INFORMATION |
|--------------------------------------|

This SDS conforms to requirements under U.S., U.K., Canadian, Australian, and EU regulations or standards, and conforms to the proposed 2003 ANSI Z400.1 format.

| | |
|----------------|---------------|
| Issuing Date | 17-June-2012 |
| Revision Date | 13-March-2018 |
| Revision Notes | None |

The information herein is given in good faith but no warranty, expressed or implied, is made.
Updated by William F. Garvin, CIH.


SAFETY DATA SHEET

Propane

Section 1. Identification

| | |
|--------------------------------------|---|
| GHS product identifier | : Propane |
| Chemical name | : propane |
| Other means of identification | : Propyl hydride; n-Propane; Dimethyl methane; Bottled gas; propane in gaseous state; propane liquefied, n-Propane; Dimethylmethane; Freon 290; Liquefied petroleum gas; Lpg; Propyl hydride; R 290; C3H8; UN 1075; UN 1978; A-108; Hydrocarbon propellant. |
| Product type | : Liquefied gas |
| Product use | : Synthetic/Analytical chemistry. |
| Synonym | : Propyl hydride; n-Propane; Dimethyl methane; Bottled gas; propane in gaseous state; propane liquefied, n-Propane; Dimethylmethane; Freon 290; Liquefied petroleum gas; Lpg; Propyl hydride; R 290; C3H8; UN 1075; UN 1978; A-108; Hydrocarbon propellant. |
| SDS # | : 001045 |
| Supplier's details | : Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253 |
| 24-hour telephone | : 1-866-734-3438 |

Section 2. Hazards identification

| | |
|---|--|
| OSHA/HCS status | : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200). |
| Classification of the substance or mixture | : FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Liquefied gas |
| GHS label elements | |
| Hazard pictograms | :  |
| Signal word | : Danger |
| Hazard statements | : Extremely flammable gas. May form explosive mixtures with air. Contains gas under pressure; may explode if heated. May cause frostbite. May displace oxygen and cause rapid suffocation. |
| Precautionary statements | |
| General | : Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. Always keep container in upright position. Approach suspected leak area with caution. |
| Prevention | : Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. |
| Response | : Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so. |
| Storage | : Protect from sunlight. Store in a well-ventilated place. |

Section 2. Hazards identification

- Disposal** : Not applicable.
- Hazards not otherwise classified** : Liquid can cause burns similar to frostbite.

Section 3. Composition/information on ingredients

- Substance/mixture** : Substance
- Chemical name** : propane
- Other means of identification** : Propyl hydride; n-Propane; Dimethyl methane; Bottled gas; propane in gaseous state; propane liquefied, n-Propane; Dimethylmethane; Freon 290; Liquefied petroleum gas; Lpg; Propyl hydride; R 290; C3H8; UN 1075; UN 1978; A-108; Hydrocarbon propellant.
- Product code** : 001045

CAS number/other identifiers

- CAS number** : 74-98-6

| Ingredient name | % | CAS number |
|-----------------|-----|------------|
| Propane | 100 | 74-98-6 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Wash contaminated skin with soap and water. Remove contaminated clothing and shoes. To avoid the risk of static discharges and gas ignition, soak contaminated clothing thoroughly with water before removing it. Get medical attention if symptoms occur. In case of contact with liquid, warm frozen tissues slowly with lukewarm water and get medical attention. Do not rub affected area. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if adverse health effects persist or are severe. Ingestion of liquid can cause burns similar to frostbite. If frostbite occurs, get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. As this product rapidly becomes a gas when released, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Liquid can cause burns similar to frostbite.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.

Section 4. First aid measures

Frostbite : Try to warm up the frozen tissues and seek medical attention.

Ingestion : Ingestion of liquid can cause burns similar to frostbite.

Over-exposure signs/symptoms

Eye contact : Adverse symptoms may include the following:, frostbite

Inhalation : No specific data.

Skin contact : Adverse symptoms may include the following:, frostbite

Ingestion : Adverse symptoms may include the following:, frostbite

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

Specific treatments : No specific treatment.

Protection of first-aiders : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media : Use an extinguishing agent suitable for the surrounding fire.

Unsuitable extinguishing media : None known.

Specific hazards arising from the chemical : Contains gas under pressure. Extremely flammable gas. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. The vapor/gas is heavier than air and will spread along the ground. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool. If involved in fire, shut off flow immediately if it can be done without risk. If this is impossible, withdraw from area and allow fire to burn. Fight fire from protected location or maximum possible distance. Eliminate all ignition sources if safe to do so.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode. For incidents involving large quantities, thermally insulated undergarments and thick textile or leather gloves should be worn.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : Accidental releases pose a serious fire or explosion hazard. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

Section 6. Accidental release measures

For emergency responders : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment.

Large spill : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Do not get in eyes or on skin or clothing. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement. Use only non-sparking tools. Empty containers retain product residue and can be hazardous. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Eliminate all ignition sources. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F). Keep container tightly closed and sealed until ready for use. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

| Ingredient name | Exposure limits |
|-----------------|---|
| Propane | <p>NIOSH REL (United States, 10/2016). TWA: 1800 mg/m³ 10 hours. TWA: 1000 ppm 10 hours.</p> <p>OSHA PEL (United States, 6/2016). TWA: 1800 mg/m³ 8 hours. TWA: 1000 ppm 8 hours.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 1800 mg/m³ 8 hours. TWA: 1000 ppm 8 hours.</p> <p>ACGIH TLV (United States, 3/2017). Oxygen Depletion [Asphyxiant].</p> |

Section 8. Exposure controls/personal protection

- Appropriate engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. If contact with the liquid is possible, insulated gloves suitable for low temperatures should be worn. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.
- Thermal hazards** : If there is a risk of contact with the liquid, all protective equipment worn should be suitable for use with extremely low temperature materials.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Gas. [Compressed gas.]
- Color** : Colorless.
- Odor** : Odorless.BUT MAY HAVE SKUNK ODOR ADDED.
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : -187.6°C (-305.7°F)
- Boiling point** : -161.48°C (-258.7°F)

Section 9. Physical and chemical properties

| | |
|---|---|
| Critical temperature | : 96.55°C (205.8°F) |
| Flash point | : Closed cup: -104°C (-155.2°F) Open cup: -104°C (-155.2°F) |
| Evaporation rate | : Not available. |
| Flammability (solid, gas) | : Extremely flammable in the presence of the following materials or conditions: open flames, sparks and static discharge and oxidizing materials. |
| Lower and upper explosive (flammable) limits | : Lower: 1.8% Upper: 8.4% |
| Vapor pressure | : 109 (psig) |
| Vapor density | : 1.6 (Air = 1) |
| Specific Volume (ft³/lb) | : 8.6206 |
| Gas Density (lb/ft³) | : 0.116 (25°C / 77 to °F) |
| Relative density | : Not applicable. |
| Solubility | : Not available. |
| Solubility in water | : 0.02 g/l |
| Partition coefficient: n-octanol/water | : 1.09 |
| Auto-ignition temperature | : 287°C (548.6°F) |
| Decomposition temperature | : Not available. |
| Viscosity | : Not applicable. |
| Flow time (ISO 2431) | : Not available. |
| Molecular weight | : 44.11 g/mole |
| <u>Aerosol product</u> | |
| Heat of combustion | : -46012932 J/kg |

Section 10. Stability and reactivity

| | |
|---|--|
| Reactivity | : No specific test data related to reactivity available for this product or its ingredients. |
| Chemical stability | : The product is stable. |
| Possibility of hazardous reactions | : Under normal conditions of storage and use, hazardous reactions will not occur. |
| Conditions to avoid | : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Do not allow gas to accumulate in low or confined areas. |
| Incompatible materials | : Oxidizers |
| Hazardous decomposition products | : Under normal conditions of storage and use, hazardous decomposition products should not be produced. |
| Hazardous polymerization | : Under normal conditions of storage and use, hazardous polymerization will not occur. |

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Liquid can cause burns similar to frostbite.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
- Ingestion** : Ingestion of liquid can cause burns similar to frostbite.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:, frostbite
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:, frostbite
- Ingestion** : Adverse symptoms may include the following:, frostbite

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Section 11. Toxicological information

Potential chronic health effects

Not available.

| | |
|------------------------------|---|
| General | : No known significant effects or critical hazards. |
| Carcinogenicity | : No known significant effects or critical hazards. |
| Mutagenicity | : No known significant effects or critical hazards. |
| Teratogenicity | : No known significant effects or critical hazards. |
| Developmental effects | : No known significant effects or critical hazards. |
| Fertility effects | : No known significant effects or critical hazards. |

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|-------------------------|--------------------|-----|-----------|
| Propane | 1.09 | - | low |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT | TDG | Mexico | IMDG | IATA |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1978 | UN1978 | UN1978 | UN1978 | UN1978 |
| UN proper shipping name | PROPANE | PROPANE | PROPANE | PROPANE | PROPANE |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Additional information

DOT Classification : Limited quantity
Yes.

Packaging instruction
Passenger aircraft
Quantity limitation: Forbidden.

Cargo aircraft
Quantity limitation: 150 kg

Special provisions
19, T50

For domestic transportation only, UN1075 may be substituted for the UN number shown as long as the substitution is consistent on package markings, shipping papers, and emergency response information. See 49 CFR 172.102 Special Provision 19.

Containers of NON-ODORIZED liquefied petroleum gas must be marked either NON-ODORIZED or NOT ODORIZED as of September 30, 2006. [49 CFR 172.301(f), 326(d), 330(c) and 338(e)]

TDG Classification : Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2).
Explosive Limit and Limited Quantity Index 0.125
ERAP Index 3000
Passenger Carrying Ship Index 65
Passenger Carrying Road or Rail Index Forbidden
Special provisions 29, 42

IATA : **Quantity limitation** Passenger and Cargo Aircraft: Forbidden. Cargo Aircraft Only: 150 kg.

Special precautions for user : **Transport within user’s premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) CDR Exempt/Partial exemption: Not determined
Clean Air Act (CAA) 112 regulated flammable substances: propane

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Refer to Section 2: Hazards Identification of this SDS for classification of substance.

State regulations

Massachusetts : This material is listed.

New York : This material is not listed.

New Jersey : This material is listed.

Pennsylvania : This material is listed.

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

Inventory list

Australia : This material is listed or exempted.

Canada : This material is listed or exempted.

China : This material is listed or exempted.

Europe : This material is listed or exempted.

Japan : **Japan inventory (ENCS):** This material is listed or exempted.
Japan inventory (ISHL): This material is listed or exempted.

Malaysia : This material is listed or exempted.

New Zealand : This material is listed or exempted.

Philippines : This material is listed or exempted.

Republic of Korea : This material is listed or exempted.

Section 15. Regulatory information

| | |
|----------------------|--|
| Taiwan | : This material is listed or exempted. |
| Thailand | : Not determined. |
| Turkey | : This material is listed or exempted. |
| United States | : This material is listed or exempted. |
| Viet Nam | : Not determined. |

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | / | 2 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

| Classification | Justification |
|--------------------------------------|-----------------|
| FLAMMABLE GASES - Category 1 | Expert judgment |
| GASES UNDER PRESSURE - Liquefied gas | Expert judgment |

History

| | |
|---------------------------------------|-------------|
| Date of printing | : 5/6/2018 |
| Date of issue/Date of revision | : 5/6/2018 |
| Date of previous issue | : 6/28/2017 |
| Version | : 1 |

Key to abbreviations

| |
|--|
| : ATE = Acute Toxicity Estimate |
| : BCF = Bioconcentration Factor |
| : GHS = Globally Harmonized System of Classification and Labelling of Chemicals |
| : IATA = International Air Transport Association |
| : IBC = Intermediate Bulk Container |
| : IMDG = International Maritime Dangerous Goods |
| : LogPow = logarithm of the octanol/water partition coefficient |
| : MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 |

Section 16. Other information

as modified by the Protocol of 1978. ("Marpol" = marine pollution)
UN = United Nations

References

: Not available.

Other special considerations

: The information below is given to call attention to the issue of "Naturally occurring radioactive materials". Although Radon-222 levels in the product represented by this MSDS do not present any direct Radon exposure hazard, customers should be aware of the potential for Radon daughter build up within their processing systems, whatever the source of their product streams. Radon-222 is a naturally occurring radioactive gas which can be a contaminant in natural gas. During subsequent processing, Radon tends to be concentrated in Liquefied Petroleum Gas streams and in product streams having a similar boiling point range. Industry experience has shown that this product may contain small amounts of Radon-222 and its radioactive decay products, called Radon "daughters". The actual concentration of Radon-222 and radioactive daughters in the delivered product is dependent on the geographical source of the natural gas and storage time prior to delivery. Process equipment (i.e. lines, filters, pumps and reaction units) may accumulate significant levels of radioactive daughters and show a gamma radiation reading during operation. A potential external radiation hazard exists at or near any pipe valve or vessel containing a Radon enriched stream, or containing internal deposits of radioactive material due to the transmission of gamma radiation through its wall. Field studies reported in the literature have not shown any conditions that subject workers to cumulative exposures in excess of general population limits. Equipment emitting gamma radiation should be presumed to be internally contaminated with alpha emitting decay products which may be a hazard if inhaled or ingested. Protective equipment such as coveralls, gloves, and respirator (NIOSH/MHSA approved for high efficiency particulates and radionuclides, or supplied air) should be worn by personnel entering a vessel or working on contaminated process equipment to prevent skin contamination, ingestion, or inhalation of any residues containing alpha radiation. Airborne contamination may be minimized by handling scale and/or contaminated materials in a wet state.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

LOW PRESSURE POLYURETHANE FOAM SEALANTS (HC)



SECTION 1- PRODUCT AND COMPANY IDENTIFICATION

1.1 Product Identifier

Product Name: Handi-Foam® HC Gun Foam, Handi-Foam® HC Straw Foam, Handi-Foam® Fireblock, Handi-Foam® Fireblock West, Handi-Foam® Black, Handi-Foam® Extreme, Fast Foam™ Fireblock, Fast Foam™ Window & Door, Fast Foam™ Extreme, Handi-Seal® Extreme Window & Door and Handi-Foam® Extreme Window & Door Polyurethane Foam Sealants

SDS ID Number **A16186**

REACH Registration: No data available

1.2 Relevant identified uses of the substance or mixture and uses advised against

General Use One Component Polyurethane Foam Sealant HC

Uses advised against

1.3 Details of the supplier and of the safety data sheet

Manufacturer Fomo Products Inc.
2775 Barber Road
Norton, Ohio 44203
In Ohio: 330-753-4585; 1-800-321-5585 (Monday-Friday 8:00am-5:00pm EST)

1.4 Emergency telephone numbers

In the U.S.A CHEMTREC (24 hours) 1-800-424-9300

International Emergency CHEMTREC (24 hours) 1-703-527-3887

SECTION 2- HAZARDS IDENTIFICATION

2.1 Classification of substance or mixture

Product definition: Mixture

Classification: Flammable Aerosol- Category 1
Gases Under Pressure- Compressed Gas
Acute Toxicity Inhalation- Category 4
Skin Irritation- Category 2
Serious Eye Irritation- Category 2A
Respiratory Sensitizing- Category 1
Skin Sensitization – Category 1
Specific Target Organ Toxicity SE 3
Specific Target Organ Toxicity RE 2

2.2 Label elements

Hazard Symbols:



Signal Word: **DANGER**

Hazard Statements: H222- Extremely flammable aerosol
H280- Contains gas under pressure; may explode if heated
H315- Causes Skin Irritation
H317- May cause an allergic skin reaction
H319- Causes Serious Eye Irritation
H332- Harmful if inhaled
H334- May cause allergy or asthma symptoms or breathing difficulties if inhaled
H335- May cause respiratory irritation
H373- May cause damage to organs through prolonged or repeated exposure

Prevention: P102- Keep Out of Reach of Children
P202- Do not handle until all safety precautions have been read and understood
P210- Keep away from heat/sparks/open flames/hot surfaces-No Smoking
P211- Do not spray on an open flame or other ignition source
P251- Pressurized Container: Do not pierce or burn, even after use
P261- Avoid breathing vapors or fumes
P262- Do not get in eyes, on skin, or on clothing
P264- Wash hands and other skin areas exposed to material thoroughly after handling
P271- Use only outdoors or in a well-ventilated area
P280- Wear protective gloves, protective clothing and eye protection

Response: P285- In case of inadequate ventilation wear respiratory protection
P302+P352+P333+P313 IF ON SKIN: Wash with plenty of soap and water. If skin irritation or rash occurs: Get medical attention
P304+P341 IF INHALED: If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing
P305+P351+P338- IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P314- Get medical advice if you feel unwell
P342+P311- If experiencing respiratory symptoms: Call a POISON CENTER or doctor
P381- Eliminate all ignition sources if safe to do so

Storage: P403+P405- Store in a well-ventilated place. Store locked up.
P410- Protect from sunlight
P412- Do not expose to temperatures exceeding 50°C/122°F.

Disposal: P501 Dispose of contents/container in accordance with applicable local/regional/national/international regulations.

SECTION 3- COMPOSITION/INFORMATION ON INGREDIENTS

| % by Weight | Ingredient | CAS No. | EC Number | Annex Number | EC Classification |
|-------------|---|-------------|-----------|--------------|---|
| 60-100 | Urethane Pre-Polymer Blend (Non-Hazardous Polyol Blend) | Proprietary | | | |
| 5-10 | 4,4' Diphenylmethane diisocyanate (MDI) | 101-68-8 | 202-966-0 | 615-005-00-9 | Car. Cat 3, R40; Xn R20, R48/20; Xi R36/37/37, R42/43 |
| 5-10 | Polymethylene polyphenyl isocyanate (PMDI) | 9016-87-9 | 500-079-6 | | |
| 3-7 | Isobutane | 75-28-5 | 200-857-2 | 601-004-00-0 | F+, R12 |
| 3-7 | Dimethyl ether | 115-10-6 | 204-065-8 | 603-019-00-8 | F+, R12 |
| 1-5 | Propane | 74-98-6 | 200-827-9 | 601-003-00-5 | F+, R12 |

There are not additional ingredients present which, within the current knowledge of the supplier and in the concentration applicable, are classified as hazardous to the health or environment and hence require reporting in this section.

SECTION 4- FIRST AID MEASURES

4.1 Description of first aid measures

Eye: Immediately flush eyes with large amounts of water for at least 15 minutes, holding the eyes open with fingers and occasionally lifting the upper and lower lids. Use lukewarm water if possible. If present and easy to do so, remove contact lenses, If irritation persists, get medical attention.

Skin: In case of contact, immediately flush skin with plenty of soap and water. Foam will stick to skin, gently wipe product from skin with a damp cloth and wash with plenty of soap and water. Remove contaminated clothing and shoes. Wash clothing before reuse. Call a physician if irritation persists.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Obtain medical attention.

Ingestion: If swallowed, do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical advice/attention.

4.2 Most important symptoms and effects, both acute and delayed

Eye: May cause eye irritation.

Skin: May cause skin irritation. Symptoms may include redness, edema, drying, defatting and cracking of the skin. May cause an allergic reaction.

Inhalation: May be harmful if inhaled. May cause respiratory irritation. May cause allergy or asthma symptoms or breathing difficulties if inhaled.

Ingestion: May be harmful if swallowed. May cause gastrointestinal irritation: stomach distress, nausea, or vomiting.

4.3 Notes to the physician

Symptoms may not appear immediately. If case of an accident or if you feel unwell, seek medical advice immediately (show label or SDS if possible).

SECTION 5- FIRE FIGHTING MEASURES

5.1 Extinguishing media

Suitable methods of extinction: Use dry chemical, carbon dioxide, foam, Halon 1211 and water spray or fog.

Unsuitable methods of extinction: Do not use water jets and high pressure water as these may spread the fire

5.2 Special hazards arising from the substance or mixture

Contains flammable propellant. Eliminate all ignition sources. Closed containers may explode due to buildup of pressure when exposed to extreme heat. Aerosol cans exposed to fire or high temperature can rupture and rocket. Cured foam will burn in the presence of heat, oxygen and an ignition source.

5.3 Advice to firefighters

Products of combustion: May include and are not limited to: oxides of carbon, oxides of nitrogen, hydrogen fluoride, and traces of hydrogen cyanide.

Keep upwind of fire. Wear full fire-fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Use water spray to keep fire-exposed containers cool. Containers may explode if heated.

SECTION 6- ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Eliminate sources of ignition.

6.2 Environmental precautions

Do not allow to enter sewers, drains, or waterways

6.3 Methods and materials for containment and cleaning up

Method for containment: Uncured product is very sticky; carefully remove the bulk of the foam by scraping it up and then immediately remove the residue with a rag and solvent such as Handi-Cleaner, mineral spirits, acetone (nail polish remover), paint thinner, etc. Once the product is cured it can only be removed mechanically by scraping, buffing, etc. Use appropriate PPE.

Methods for cleaning up: Scoop up material and place in a disposal container. Dispose of as plastic waste in accordance with all applicable guidelines and regulations. Vapors can accumulate in low areas. Provide ventilation

6.4 Reference to other sections

For indications about waste treatment, see Section 13

SECTION 7- HANDLING AND STORAGE

7.1 Precautions for safe handling

Keep away from sources of ignition- No smoking. Do not spray on an open flame or other ignition source. Pressurized container: do not pierce or burn, even after use. Container may explode if heated. Avoid contact with skin and eyes. Do not breathe dust/fume/gas/mist/vapors/spray. Do not swallow. Use only in a well-ventilated area or outdoors. Avoid welding or other "hot work" in the vicinity of exposed cured foam. When using do not eat, drink or smoke. (See section 8)

General hygiene advice: Launder contaminated clothing before reuse. Wash hands before eating, drinking or smoking.

7.2 Conditions for safe storage including any incompatibilities

Store in a dry place. Ideal use temperature is 65°F to 80°F (18°C to 27°C). Do not expose aerosol cans to open flame or temperatures above 122°F (50°C). Excessive heat can cause premature aging of components resulting in a shorter shelf life. Storage below 55°F (12.7°C) may affect foam quality if chemicals are not warmed to room temperature before using. Protect containers from physical abuse. Keep containers upright. **Keep away from children.**

SECTION 8- EXPOSURE CONTROLS/ PERSONAL PROTECTION

8.1 Control Parameters

| CAS No. | Ingredient | OSHA-PEL TWA | ACGIH-TLV | NIOSH |
|----------|-----------------------------------|--|--|--|
| 101-68-8 | 4,4' Diphenylmethane diisocyanate | 0.02 PPM; 0.2 mg/m ³ Ceiling | 0.005 ppm; 0.051 mg/ m ³ (8 hours) TWA | 0.005 ppm; 0.050 mg/m ³ TWA 0.02 ppm; 0.2 mg/m ³ CEIL |
| 75-28-5 | Isobutane | | 1,000 ppm TWA | 800 ppm; 1,900 mg/m ³ TWA |
| 115-10-6 | Dimethyl ether | | | |
| 74-98-6 | Propane | 1,000 ppm; 1,800 mg/m ³ TWA | 1,000 ppm; 1,000 ppm; 1,800 mg/m ³ TWA | 1,000 ppm; 1,800 mg/m ³ TWA |

8.2 Exposure Controls:

Engineering measures: Use ventilation adequate to keep exposures below recommended exposure limits.

Eye/face Protection: Wear protective safety glasses with side shields or goggles.

Hand Protection: Use chemically resistant gloves (i.e. Nitrile gloves). Nitrile/butadiene rubber, butyl rubber, polyethylene, PVC (vinyl), or neoprene gloves are also effective. Glove selection should take into account potential body reactions to certain materials and manufacturer's instructions for use. Break through time of selected gloves must be greater than the intended use period.

Other Protective Equipment: Use clothing that protects against dermal exposure. Appropriate protective clothing varies depending on the potential for exposure. To ensure proper skin protection, wear PPE in such a manner that no skin is exposed.

Respiratory Protection: If atmospheric levels are expected to exceed the exposure levels, use a NIOSH approved air purifying respirator equipped with an organic vapor cartridge and particulate filter. If atmospheric levels exceed 10 times the TLV or PEL level for which an air-purifying respirator is effective, use a powered air purifying respirator (PAPR). The type of respiratory protection selected must comply with the requirements set forth in OSHA's Respiratory Protection Standard (29 CFR 1910.134).

Hygiene Measures: An eye wash station or portable eye wash station should be in the area. Wash hands thoroughly after use, before eating, drinking or using the lavatory. Employees/Users should be educated and trained in the safe use and handling of this product.

SECTION 9- Physical and chemical properties

9.1 Information on basic physical and chemical properties

| | |
|---|---|
| General Physical Form | Viscous liquid which forms off-white to yellowish foam upon release. |
| Color | Crème. Some products contain a dye or colorant i.e. Fireblock is orange. |
| Odor | Slight hydrocarbon odor during curing stage |
| Odor Threshold: | No data available |
| Physical State: | Gas/Pressurized Liquid/Semi-Solid |
| pH: | No data available |
| Melting Point/Freezing Point | No data available |
| Initial Boiling Point and Boiling Range | No data available |
| Flash Point: | -156°F (-68.9°C), estimated based on liquefied petroleum gas (Hydrocarbon HC) |
| Evaporation Rate: | No data available |
| Flammability: | Flammable |
| Lower Flammability/Explosive Limit: | No data available |
| Upper Flammability/Explosive Limit: | No data available |
| Vapor Pressure | Aerosol product > 50 psig/ 345 kPa Final product (sprayed): Very low (not determined) |
| Vapor Density: | Not available |
| Relative Density/Specific Gravity: | ~ 1.1 (Water = 1) |
| Solubility: | Insoluble; reacts slowly with water during cure, liberating traces of CO ₂ |
| Partition coefficient: n-octanol/water: | No data available |
| Auto-ignition Temperature: | No data available |
| Decomposition Temperature; | No data available |
| Viscosity: | No data available |
| Explosive Properties: | May be sensitive to mechanical impact or static discharge. Vapor released during and immediately after dispensing may accumulate and ignite explosively if proper ventilation is not employed. Extinguish or remove all sources of ignition during dispensing, until product becomes tack free or skins over. |
| Oxidizing Properties: | No data available |
| VOC Content (calculated minus exempt compounds and water) | 165 g/l (Handi-Foam Fireblock West and Handi-Seal Extreme Window & Door 160 g/l) |

SECTION 10- STABILITY AND REACTIVITY

10.1 Reactivity

No dangerous reaction known under conditions of normal use.

10.2 Chemical Stability

Stable under normal storage conditions. Contents under pressure. Container may explode if heated. Do not pierce or burn, even after use. Avoid temperatures below 40°F (4°C). For longest shelf life, avoid storage above 100°F (38°C).

10.3 Possibility of Hazardous Reactions

Elevated temperatures can cause product to decompose, releasing carbon dioxide. Flammable propellant. Contents are under pressure and exposure to high temperature can cause containers to rupture or explode.

10.4 Conditions To Avoid

Heat. Incompatible materials. Sources of ignition. Avoid temperatures below 40°F (4°C) or temperatures above 100°F (38°C).

10.5 Incompatible Materials

Alcohols, strong bases, amines, metal compounds, ammonia, and strong oxidizers.

10.6 Hazardous Decomposition Products

May include, and are not limited to: oxides of carbon, oxides of nitrogen, hydrogen fluoride and traces of hydrogen cyanide.

SECTION 11- TOXICOLOGICAL INFORMATION

11.1 Information on Toxicological effects:**Acute Oral Toxicity**

Expected to have low acute oral toxicity

Acute inhalation toxicity

Expected to have low acute inhalation toxicity

Acute dermal toxicity

Expected to have low acute dermal toxicity

Skin irritation

Causes skin irritation

Eye irritation

Causes serious eye irritation

Sensitization

May cause skin and respiratory sensitization

Genotoxicity

Genetic toxicity data for MDI is inconclusive. Some in-vitro studies yielded positive results, while other test data was negative

Mutagenicity

Test data using laboratory animals was predominately negative

Specific organ toxicity- single exposure

May cause respiratory irritation

Specific organ toxicity- repeated exposure

May cause damage to the lungs, central nervous system and skin

Aspiration hazard

No data available

11.2 Delayed, Immediate, and Chronic Effects of Short and Long Term Exposure

MDI and PMDI: IARC Group 3 carcinogen- Not classifiable as to its carcinogenicity to humans. Not listed as a carcinogen by ACGIH, OSHA or NTP. MDI/PMDI did not cause birth defects in laboratory animals; fetal effects occurred only at high doses which were toxic to the mother. Lung tumors have been observed in laboratory animals exposed to respirable aerosol droplets of MDI/PMDI (6mg/m³) for their lifetime. Tumors occurred concurrently with respiratory irritation and lung injury. Current exposure guidelines are expected to protect against these effects.

SECTION 12- ECOLOGICAL INFORMATION

12.1 Ecotoxicity

The aquatic toxicity of this product has not been experimentally determined. However, it is expected to have low acute aquatic toxicity based on the acute aquatic toxicity of the individual components and their concentration in this mixture.

12.2 Persistence and degradability

Product is not readily biodegradable. In aquatic and terrestrial environments, this material reacts with water

12.3 Bioaccumulative potential

Bioaccumulation potential is low

12.4 Mobility in soil

Expected to have low mobility based on product's reactivity with water

12.5 Other Adverse Effects

No data available

SECTION 13- DISPOSAL CONSIDERATIONS

13.1 Waste Treatment Methods**Methods of disposal**

Before disposing of containers, relieve container of any remaining foam and pressure. Allow dispensed product to fully cure before disposing. Never discard in a liquid state. This material must be disposed of in accordance with all local, regional, national, international regulations.

Other disposal recommendations:

Do not puncture or incinerate containers. Use appropriate Personal Protective Equipment.

SECTION 14- TRANSPORTATIONShipping Information**Containers 1000 cu. cm. (1 liter) or less:**

| | | |
|---------------|---|---|
| | | Due to changes in December 2020: See shipping papers for exact 49 CFR descriptions. |
| Ground | Consumer Commodity ORM-D | Limited Quantity |
| Air | UN1950 Aerosols, Flammable 2.1 (Flammable Gas Label) LIMITED QUANTITY Packing Instructions (Cargo & Passenger) 203 | UN1950 Aerosols, Flammable 2.1 (Flammable Gas Label) LIMITED QUANTITY Packing Instructions (Cargo & Passenger) 203 |
| Water | UN1950 Aerosols, Flammable 2.1 (Flammable Gas Label) LIMITED QUANTITY | UN1950 Aerosols, Flammable 2.1 (Flammable Gas Label) LIMITED QUANTITY |

SECTION 15- REGULATORY**15.1 Safety, health, and environmental regulations/ legislations specific for the substance or mixture****U.S. Federal Regulations**

OSHA Hazard Communication Standard: This material is classified as a hazardous in accordance with OSHA 29 CFR 1910-1200

TSCA Status: All components of this product are listed on the Toxic Substance Control Act (TSCA) Inventory. This product is not subject to TSCA 12(b) Export Notification.

Superfund Amendments and Reauthorization Act (SARA)

SARA Section 311/312 Hazard Categories: Acute Health Hazard, Chronic Health Hazard, Fire Hazard, Reactive Hazard, Sudden Release of Pressure Hazard

SARA 313 Information: MDI and PMDI are subject to reporting levels established by Section 313 of the Emergency Planning and Community Right-to-Know Act of 1986.

SARA 302/304 Extremely Hazardous Substance: No components of the product exceed the threshold (de minimis) reporting levels established by these sections of the Title III of SARA.

SARA 302/304 Emergency Planning & Notification: No components of the product exceed the threshold (de minimis) report levels established by these sections of the Title III of SARA.

Comprehensive Response Compensation and Liability Act (CERCLA): This product contains the following CERCLA reportable substances: 4,4'- Diphenylmethane diisocyanate (CAS #101-68-8), RQ- 2,268 kg (5,000 lbs).

Clean Air Act (CAA) - 4,4'- Diphenylmethane diisocyanate (CAS #101-68-8) is listed as a Hazardous Air Pollutant (HAP) designated in CAA Section 112 (b). This product does not contain any Class 1 or Class 2 Ozone depletors.

Clean Water Act (CWA) - 4,4'- Diphenylmethane diisocyanate (CAS #101-68-8) is listed as a Hazardous Substance under the CWA. None of the chemicals in these products are listed as Priority Pollutants under the CWA. None of the chemicals listed in these products are listed as Toxic Pollutants under the CWA.

U.S. State Regulations:

California Prop 65, Safe Drinking Water and Toxic Enforcement Act of 1986: This product contains trace amount of substances known to the State of California to cause cancer or other reproductive harm.

Other U.S. State Inventories:

4, 4'- Diphenylmethane diisocyanate (CAS #101-68-8) is listed on the following State Hazardous Substance Inventories, Right-to-Know lists and/or Air Quality/air Pollutants lists: CA, DE, ID, IL, ME, MA, MN, NJ, PA, WA, WI

Polymeric MDI (CAS #9016-87-9) is listed on the following State Hazardous Substance Inventories, Right-to-Know lists and/or Air Quality/Air Pollutants lists: DE, NJ, MN

Isobutane (CAS #75-28-5) is listed on the following State Hazardous Substance Inventories, Right-to-Know lists and/or Air Quality/Air Pollutants lists: DE, ME, MA, MN, NJ, PA

Dimethyl ether (CAS #115-10-6) is listed on the following State Hazardous Substance Inventories, Right-to-Know lists and/or Air Quality/Air Pollutants lists: DE, ME, MA, MN, NJ, PA

Propane (CAS #74-98-6) is listed on the following State Hazardous Substance Inventories, Right-to-Know lists and/or Air Quality/Air Pollutants lists: DE, MA, MN, NJ, PA, WA

Canada**WHMIS Hazard Symbol and Classification:**

A- Compressed Gas



B1- Flammable Gas



D2A- Very toxic material causing other toxic effects (Respiratory Sensitizer)

D2B- Toxic Material causing other toxic effects (Skin Sensitizer) (Skin/Eye Irritant)

Canada**Consumer Chemicals & Containers Regulation Hazard Symbols:**

Flammable



Pressurized Container

Canada Controlled Product Regulations (CPR): This product has been classified in accordance with the hazard criteria of the Controlled Products Regulation, and the SDS contains all the information required by the Controlled Products Regulations.

Canadian Ingredient Disclosure List (IDL): 4,4'- Diphenylmethane diisocyanate (CAS #101-68-8) is listed on the IDL.

Canadian National Pollutant Release Inventory (NPRI): MDI and PMDI are listed on the NPRI

European Economic Community**Labeling (67/548/EEC or 1999/45/EC)**

F- Flammable



Xn- Harmful

Risk Phrases:

R20- Harmful by inhalation

R36/37/38- Irritating to eyes, respiratory system and skin

R40- Limited evidence of carcinogenic effect

R42/43- May cause sensitization by inhalation and skin contact

R48/20- Harmful: danger or serious damage to health by prolonged exposure through inhalation.

Safety**Phrases:**

S1/2- Keep locked up and out of reach of children

S23- Do not breathe fumes, vapor, or mist

S36/37- Wear suitable protective clothing and gloves

S45- In case of accident or if you feel unwell, seek medical advice immediately (show the label or this SDS where possible).

WGK, Germany (Water danger/protection): 1**Global Chemical Inventory Lists:**

United States: Toxic Substance Control Act (TSCA)- Yes

Canada: Domestic Substances List (DSL)- Yes

Canada: Non-Domestic Substances List (NDSL)- No

Europe: Inventory of New and Existing Chemicals- (EINECS)- Yes

Australia: Australian Inventory of Chemical Substances (AICS)- Yes

New Zealand: New Zealand Inventory of Chemicals (NZLoC)- Yes

China: Inventory of Existing Chemical Substances in China (IECSC)- Yes

Japan: Inventory of Existing and New Chemical Substances (ENCS)- Yes

Korea: Existing Chemicals List (ECL)- Yes

15.2 Chemical safety assessment: For this product a chemical safety assessment was not carried out

SECTION 16- OTHER



NFPA: Health Hazard 2; Flammability 3; Reactivity 1

HMIS: Health Hazard 2; Flammability 3; Physical Hazard 1

Hazard Rating: 0=minimal, 1= slight, 2=moderate, 3=severe, 4= extreme

The information and recommendations set forth herein are presented in good faith and believed to be correct as of the date hereof. The manufacturer makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will the manufacturer be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information. No representations or warranties, either expressed or implied, of merchantability or fitness for a particular use are made hereunder with respect to this information or the product to which information refers.

Information contained herein is deemed to be reliable, conservative and accurate. Fomo Products, Inc. reserves the right to change the design, specifications or any other features at any time and without notice, while otherwise maintaining regulatory compliance.

Revision-January 12, 2015 Version 2.0 (Replaces Version 1.7- July 24, 2014)



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

1.) Identification of the Mixture and of the Company

Product identifier: **Matte clear acrylic coating**

Product name: **120 Matte clear acrylic coating**

Relevant identified uses of the substance: Use on brass fixtures, tubing, machine parts, whenever a protective film can be used to prevent oxidation. It will adhere to metals, wood, and paper.
Uses advised against: Not an automobile finish. Do not apply to energized equipment. .

| | |
|-----------------------------|---|
| CAS No: | Not Applicable (mixture) |
| EC No: | Not Applicable (mixture) |
| Index No: | Not Applicable (mixture) |
| Manufacturer/Supplier: | Aervoe Industries Incorporated |
| Street address/P.O. Box: | 1100 Mark Circle |
| Country ID/Postcode/Place: | Gardnerville, Nevada 89410 |
| Telephone number: | 1-775-782-0100 |
| e-mail: | mailbox@aervoe.com |
| National contact: | Aervoe Industries Incorporated |
| For Product Information: | 1-800-227-0196 |
| Emergency telephone number: | 1-800-424-9300 (CHEMTREC – 24 hrs) |

2. Hazards identification

Classifications

Physical Hazards: Aerosol - Category 1
 Flam. Gas. 1
 Press. Gas
 Flam. Liq. 2
 Flam. Liq. 3

Health Hazards: Car 1B
 Muta 1B
 Asp Tox. 1
 Eye Irrit. - 2
 STOT SE3

Environmental Hazards: N/AV

Labeling

Signal Word: Danger

Hazard Statements: H220 – Extremely flammable gas



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

- H222 – Extremely flammable aerosol
- H225 – Highly flammable liquid and vapour.
- H226 – Flammable liquid and vapour.
- H229 - Pressurized container: may burst if heated
- H304 – May be fatal if swallowed and enters airways.
- H319 – Causes serious eye irritation.
- H336 – May cause drowsiness or dizziness.
- H340 – May cause genetic defects
- H350 – May cause cancer

- Precautionary Statements:
- P101 - If medical advice is needed, have product container or label at hand
 - P102 - Keep out of reach of children
 - P103 - Read label before use
 - P210 - Keep away from heat/sparks/open flames/hot surfaces - no smoking
 - P211 - Do not spray on an open flame or other ignition source
 - P251 - Pressurized container: Do not pierce or burn, even after use
 - P261 - Avoid breathing dust/fume/gas/mist/vapours/spray
 - P262 - Do not get in eyes, on skin, or on clothing
 - P264 - Wash ... thoroughly after handling
 - P280 - Wear protective gloves/eye protection/face protection

 - P303+P361+P353 - If on skin or hair, remove/takeoff immediately all contaminated clothing. Rinse skin with water/shower.
 - P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F
 - P501 - Dispose of contents/container in accordance with local/regional/national/international regulation



Symbols/Pictograms:

3. Composition / Information on Ingredients

Composition

| Chemical | Synonyms | CAS Number | EINECS Number | Weight Percent | Hazard Category | H-Code |
|---------------------------------|-----------------|------------|---------------|----------------|---|------------------------|
| Acetone | Propanone | 67-64-1 | 200-662-2 | 30-60% | Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 | H225, H319, H336 |
| Hydrocarbon Propellant | LPG | 68476-86-8 | 270-705-8 | 10-30% | Press. Gas Flam. Gas 1 | H220 H229 |
| n-Butyl Acetate | n-Butyl Ester | 123-86-4 | 204-658-1 | 7-13% | Flam. Liq. 3 STOT SE 3 | H226 H336 |
| Aliphatic Petroleum Distillates | Solvent Naphtha | 64742-89-8 | 265-192-2 | 7-13% | Carc. 1B Muta. 1B Asp. Tox. 1 | H350 H340 H304 |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

Other Product Information

Chemical Identity: Mixture

4.) First Aid Measures

| | |
|---|---|
| General Advice: | If symptoms persist, always call a doctor. |
| Inhalation First Aid: | Remove victim to fresh air and provide oxygen if breathing is difficult. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention immediately. |
| Skin Contact First Aid: | Wash with soap and water. Remove contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. |
| Eye Contact First Aid: | If contact with eyes, immediately flush eyes with plenty of water for at least 15 minutes, while holding eyelids open. Get medical attention immediately. |
| Ingestion First Aid: | If swallowed, wash out mouth with water provided the person is conscious. Do not induce vomiting. Never give anything by mouth to an unconscious person. Get medical attention immediately. |
| Most Important Symptoms/Effects: | Exposure may cause slight irritation to the skin, eyes, and respiratory tract. Excessive exposure may cause central nervous system effects. |

5. Fire Fighting Measures

| | |
|--|---|
| Flammable Properties: | Aerosol |
| Auto Ignition Temperature: | Not Available |
| Suitable extinguishing media: | Carbon dioxide, dry chemical, water spray. |
| Unsuitable extinguishing media: | None known |
| Special hazards arising from the substance or mixture: | None known |
| Hazardous combustion products: | Carbon dioxide, Carbon monoxide |
| Fire & Explosion Hazards: | Closed Containers may rupture due to the buildup of pressure from extreme temperatures. |
| Precautions for fire-fighters: | Use water spray to cool containers exposed to heat or fire to prevent pressure build up. In the event of a fire, wear full protective clothing and NIOSH- approved self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode. |

6. Accidental Release Measures

PERSONAL PRECAUTIONARY MEASURES:

- 1) Follow personal protective equipment recommendations found in section 8.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

2) Maintain adequate ventilation.

SPILL CLEAN-UP PROCEDURES:

- 1.) Evacuate unprotected personnel from the area.
- 2.) Remove sources of ignition if safe to do so.
- 3.) Pickup spilled materials using non-sparking tools and place in an appropriate container for disposal.
- 4.) Contain spill to prevent material from entering sewage or ground water systems.
- 5.) Always dispose of waste materials in accordance with all EU, National and Local Regulations.

7. Handling and Storage

Handling:

Flammable Aerosol, use in a well ventilated area.
 Do not use near sources of ignition.
 Do not to eat, drink and smoke while working with this material.
 Wash hands after use.

Conditions for safe storage, including any incompatibilities:

Store out of direct sunlight.
 Storage Temperature: 32° to 120°F (0° to 49°C).
 No known incompatibilities.

8. Exposure Controls / Personal Protection

Appropriate engineering controls:

Ensure adequate ventilation. A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits.
 Keep away from sources of ignition.
 Take precautionary measures against static discharge.

Personal Protection:

Eye & face protection devices such as safety glasses, safety goggles or face shield are recommended.

Skin protection

Wear the appropriate protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Respiratory protection:

Use only in an adequately ventilated area. For unknown vapor concentrations use a positive-pressure, pressure-demand, self-contained breathing apparatus (SCBA).

| Hazardous Ingredient | CAS Number | ACGIH TLV (TWA) | ACGIH TLV (STEL) | OSHA PEL (TWA) | OSHA PEL (STEL) |
|------------------------|------------|-----------------|------------------|----------------|-----------------|
| Acetone | 67-64-1 | 500ppm | 750ppm | 1000ppm | N/AV |
| Hydrocarbon Propellant | 68476-86- | N/AV | N/AV | N/AV | N/AV |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

| | | | | | |
|---------------------------------|------------|--------|--------|--------|------|
| | 8 | | | | |
| Aliphatic Petroleum Distillates | 64742-89-8 | N/AV | N/AV | N/AV | N/AV |
| n-Butyl Acetate | 123-86-4 | 150ppm | 200ppm | 150ppm | N/AV |

***Values are based on the 2014 Guide to Occupational Exposure Values by ACGIH**

9. Information on Basic Physical and Chemical Properties

| | |
|--|---|
| Appearance: Clear | Odor: Ketone odor |
| Odor Threshold: N/AV | pH: Not Applicable (solvent Base) |
| Melting Point: N/AV | Freezing Point: N/AV |
| Initial Boiling Point: N/AV | Boiling Point Range: N/AV |
| Flash Point: <0° F (-18° C) | Evaporation Rate: Faster than n-Butyl Acetate |
| Flammability Solid/Gas: Flammable gas | LEL: 0.8% UEL: 13% |
| Vapor Pressure: N/AV | Vapor Density: Heavier Than Air |
| Relative Density: N/AV | Solubility: Negligible |
| Partition Coefficient: n-octanol/ water: N/AV | Auto-ignition Temperature: N/AV |
| Decomposition Temperature: N/AV | Viscosity: N/AV |
| Explosive Properties: N/AV | Oxidizing Properties: N/AV |

10. Stability & Reactivity

Possibility of hazardous reactions: Hazardous polymerization will not occur under normal conditions

Chemical stability: Stable under normal conditions

Conditions to avoid: Heat and ignition sources

Incompatible materials: Strong Oxidizing Agents

Hazardous decomposition products: Will not occur

11. Toxicological Information

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage. Repeated overexposure can also damage kidneys, lungs, liver, heart and blood

Routes of exposure: Eyes, skin, ingestion, and/or inhalation

Acute toxicological data: (Acetone) Acute oral LD50: 5800mg/kg(rat)
(Acetone) LC50: 21000 ppm / 8 hr (rat)

Eye irritation data: N/AV

Skin irritation/sensitization/absorption data: N/AV



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

Reproductive toxicity data: N/AV

Mutagenicity data: Muta 1B

Symptoms associated with physical contact: N/AV

Acute/chronic effects from short/long term exposure: Irritating to skin. Prolonged/repeated contact may cause defatting of the skin which can lead to dermatitis. Not expected to be a skin sensitizer.

Known reportable carcinogens via the following agencies:

NTP: N/AV
IARC: IARC3:Classification not possible from current data
OSHA: TLV-A4

* Petroleum distillates may contain chemical carcinogens in limited quantities (< 0.01%). These quantities are determined by the supplier/fraction/purity of the distillate during the manufacturing process. Chemicals that may be present within distillates are listed on California's prop 65 list such as ETHYLBENZENE, BENZENE, and TOLUENE.

12. Ecological Information

Ecotoxicity: **No Data Available**
Persistence and degradability: **No Data Available**
Bioaccumulative potential: **No Data Available**
Mobility in soil: **No Data Available**
Results of PBT and vPvB assessment: **No Data Available**
Other adverse effects: **No Data Available**

13. Disposal Considerations

Waste Disposal: Dispose of material in accordance with EU, national and local requirements. For proper disposal of used material, an assessment must be completed to determine the proper and permissible waste management options permitted under applicable rules, regulations and/or laws governing your location.
Product / Packaging disposal: Dispose of packaging in accordance with federal, state and local requirements, regulations and/or laws governing your location.

14. Transportation Information

US DOT

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|--------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference 49 CFR 172.101 |



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

IMDG

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|----------------------------|
| UN1950 | Aerosols | 2.1 | Not Applicable | Not Applicable | Reference IMDG code part 3 |

IATA:

| UN Number | Proper Shipping Name | Hazard Class | Packing Group | Marine Pollutant | Special Provisions |
|-----------|----------------------|--------------|----------------|------------------|---|
| UN1950 | Aerosols, Flammable | 2.1 | Not Applicable | Not Applicable | Reference IATA Dangerous Goods Regulation |

15. Regulatory Information

Workplace classification:

This product is considered hazardous under the OSHA Hazard Communication Standard (29 CFR 1910.1200). The Occupational Safety and Health Administration's interpretation of the product's hazard to workers.

SARA Title 3:

Section 311/312 Categorizations (40 CFR 372): This product is a hazardous chemical under 29 CFR 1910.1200, and is categorized as an immediate and delayed health, and flammability physical hazard. Superfund Amendment and Reauthorization Act (SARA) category. SARA requires reporting any spill of any hazardous substance.

TSCA status: All chemicals in this product are listed, or are exempt from listing, on the TSCA Inventory.

WHMIS: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the (M)SDS contains all of the information required by the CPR.

PROP 65 (CA): WARNING: Cancer and Reproductive Harm– www.P65Warnings.ca.gov

16. Other Information

This SDS has been completed in accordance with GHS Rev04 (2011): U.S OSHA, CMA, ANSI, Canadian WHMIS standards, and European Directives.

Date of Preparation/Revision: 12/4/18

Supersedes: 8/7/2015

To the best of our knowledge, the information contained herein is believed to be accurate. However, the above data does not imply any guarantee or warranty of any kind, expressed or implied. The final determination of the suitability of any material is the sole responsibility of the user. All materials made present un-known hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee these are the only hazards existing.



Safety Data Sheet (SDS)

Date Prepared/Revised: 12/4/18 Version no.: 03 Supersedes: (8/7/2015)

SAFETY DATA SHEET

Prepared according to U.S. OSHA, CMA, ANSI, Canadian WHMIS regulations

METALCLAD SpeedAlloy QS Base

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

| | |
|-------------------------------|--|
| PRODUCT NAME: | METALCLAD SpeedAlloy QS Base |
| CHEMICAL FAMILY NAME: | Mixture |
| U.N. NUMBER: | UN3082 |
| U.N. DANGEROUS GOODS CLASS: | Environmentally Hazardous Substances, Liquid, n.o.s (Diglycidyl Ether Bisphenol A Polymer), Class 9, PGIII |
| SUPPLIER/MANUFACTURER'S NAME: | ENECON Corporation |
| ADDRESS: | 6 Platinum Court, Medford, New York 11763-2251 |
| EMERGENCY PHONE: | 800-255-3924 (U.S.A.) 813-248-0585 (International) |
| BUSINESS PHONE: | 516-349-0022 |
| BUSINESS FAX: | 516-349-5522 |
| DATE OF PREPARATION: | February 17, 2016 |

SECTION 2 - HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW: This product is a gray paste with a mild odor. Exposure to this product can be irritating to eyes, respiratory system and skin. It is a non-flammable liquid with a flash point >200°C. The environmental effects of this product have not been investigated, however it may cause adverse effects.

US DOT SYMBOLS



GHS HAZARD SYMBOLS



NFPA RATING SYSTEM



Signal Word: Warning!

This product does meet the definition of a hazardous substance or preparation as defined by 29 CFR 1910. 1200

COMPONENTS DETERMINING HAZARDS:

Trimethylolpropane Triacrylate, Epoxy Resin

GHS HAZARD CLASSIFICATION(S):

- Skin Sensitizer Category 1
- Skin Irritant Category 2
- Eye Irritant Category 2

HAZARD STATEMENTS:

- May cause an allergic skin reaction
- Causes skin irritation
- Causes serious eye irritation

PRECAUTIONARY STATEMENTS:

- Wash hands thoroughly after handling.
- Wear protective gloves/clothing/eye/face protection.
- Avoid breathing dust/fume/gas/mist/vapours/spray.
- Contaminated work clothing should not be allowed out of the workplace.

HEALTH HAZARDS OR RISKS FROM EXPOSURE:

ACUTE:

INHALATION: Inhalation of vapors from heated materials may cause irritation to respiratory tract

EYE CONTACT: Direct contact may cause irritation with pain, burning and tearing.

SKIN CONTACT: Prolonged or repeated contact may cause skin irritation or dermatitis. Possible sensitization.

INGESTION: Not a normal route of entry in normal application, however Ingestion of this product will cause gastrointestinal irritation.

CHRONIC: Prolonged or repeated exposure may cause dermatitis to the skin.

TARGET ORGANS:

ACUTE: Eye, Skin

CHRONIC: Skin

SAFETY DATA SHEET

METALCLAD SpeedAlloy QS Base

SECTION 3 - COMPOSITION and INFORMATION ON INGREDIENTS

| HAZARDOUS INGREDIENTS: | CAS # | EINECS # | ICSC # | WT % | HAZARD CLASSIFICATION |
|---|------------|--------------------|------------|----------|--|
| Trimethylolpropane Triacrylate | 15625-89-5 | 239-701-3 | Not Listed | 40 – 50% | SKIN IRRITANT 2, EYE IRRITANT 2, SKIN SENSITIZER 1 |
| Barium Sulfate | 7727-43-7 | 231-784-4 | 0827 | 30 – 40% | NOT CLASSIFIED |
| Epoxy Resin | 25036-25-3 | Not Listed in ESIS | Not Listed | 10 – 20% | SKIN IRRITANT 2, EYE IRRITANT 2, SKIN SENSITIZER 1 |
| Silicon Dioxide – Non Crystalline | 67762-90-7 | Not Listed in ESIS | Not Listed | 1 - 5% | NOT CLASSIFIED |
| Titanium Dioxide | 13463-67-7 | 236-675-5 | 0338 | <1% | NOT CLASSIFIED |
| Balance of other ingredients are non-hazardous or less than 1% in concentration (or 0.1% for carcinogens, reproductive toxins, or respiratory sensitizers). | | | | | |

SECTION 4 - FIRST-AID MEASURES

Contaminated individuals of chemical exposure must be taken for medical attention if any adverse effect occurs. Rescuers should be taken for medical attention, if necessary. Take copy of label and SDS to health professional with contaminated individual.

EYE CONTACT: If product enters the eyes, open eyes while under gentle running water for at least 15 minutes. Seek medical attention if irritation persists.

SKIN CONTACT: Wash skin thoroughly after handling. Seek medical attention if irritation develops and persists. Remove contaminated clothing. Launder before re-use.

INHALATION: If breathing becomes difficult, remove victim to fresh air. If necessary, use artificial respiration to support vital functions. Seek medical attention if breathing difficulty continues.

INGESTION: If product is swallowed, call physician or poison control center for most current information. If professional advice is not available, do not induce vomiting. Never induce vomiting or give diluents (milk or water) to someone who is unconscious, having convulsions, or who cannot swallow. Seek medical advice. Take a copy of the label and/or SDS with the victim to the health professional.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Pre-existing skin, or eye problems may be aggravated by prolonged contact.

RECOMMENDATIONS TO PHYSICIANS: Treat symptoms and reduce over-exposure.

SECTION 5 - FIRE-FIGHTING MEASURES

FLASH POINT: >200°C

FLAMMABILITY CLASS: 111B

AUTOIGNITION TEMPERATURE: Not Established

FLAMMABLE LIMITS (in air by volume, %): Lower (LEL): NA Upper (UEL): NA

FIRE EXTINGUISHING MATERIALS: As appropriate for surrounding fire. Carbon dioxide, foam, dry chemical, halon, or water spray.

UNUSUAL FIRE AND EXPLOSION HAZARDS: None known

Explosion Sensitivity to Mechanical Impact: Not Sensitive.

Explosion Sensitivity to Static Discharge: Not Sensitive

SPECIAL FIRE-FIGHTING PROCEDURES: Incipient fire responders should wear eye protection. Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment. Isolate materials not yet involved in the fire and protect personnel. Move containers from fire area if this can be done without risk; otherwise, cool with carefully applied water spray. If possible, prevent runoff water from entering storm drains, bodies of water, or other environmentally sensitive areas.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

SPILL AND LEAK RESPONSE: Personnel should be trained for spill response operations.

SPILLS: Contain spill if safe to do so. Prevent entry into drains, sewers, and other waterways. Soak up with an absorbent material and place in an appropriate container for disposal. Dispose of in accordance with applicable Federal, State, and local procedures (see Section 13, Disposal Considerations).

SECTION 7 - HANDLING and STORAGE

WORK PRACTICES AND HYGIENE PRACTICES: As with all chemicals, avoid getting this product ON YOU or IN YOU. Wash thoroughly after handling this product. Do not eat, drink, smoke, or apply cosmetics while handling this product. Avoid breathing dusts generated by this product. Use in a well-ventilated location. Remove contaminated clothing immediately.

STORAGE AND HANDLING PRACTICES: Containers of this product must be properly labeled. Store containers in a cool, dry location. Keep container tightly closed when not in use. Store away from strong acids or oxidizers.

SAFETY DATA SHEET

METALCLAD SpeedAlloy QS Base

SECTION 8 - EXPOSURE CONTROLS - PERSONAL PROTECTION

EXPOSURE LIMITS/GUIDELINES:

| Chemical Name | CAS# | ACGIH TWA | OSHA TWA |
|-----------------------------------|------------|----------------------|----------------------|
| Trimethylolpropane Triacrylate | 15625-89-5 | Not Listed | Not Listed |
| Barium Sulfate | 7727-43-7 | Not Listed | Not Listed |
| Epoxy Resin | 25036-25-3 | Not Listed | Not Listed |
| Silicon Dioxide – Non Crystalline | 67762-90-7 | 10 mg/m ³ | 6 mg/m ³ |
| Titanium Dioxide | 13463-67-7 | 10 mg/m ³ | 15 mg/m ³ |

Currently, International exposure limits are not established for all the components of this product. Please check with competent authority in each country for the most recent limits in place.

VENTILATION AND ENGINEERING CONTROLS: Use with adequate ventilation to ensure exposure levels are maintained below the limits provided above. Use local exhaust ventilation to control airborne vapor. Ensure eyewash/safety shower stations are available near areas where this product is used.

The following information on appropriate Personal Protective Equipment is provided to assist employers in complying with OSHA regulations found in 29 CFR Subpart I (beginning at 1910.132) or equivalent standard of Canada. Please reference applicable regulations and standards for relevant details.

RESPIRATORY PROTECTION: Maintain airborne contaminant concentrations below guidelines listed above, if applicable. If necessary, use only respiratory protection authorized in the U.S. Federal OSHA Respiratory Protection Standard (29 CFR 1910.134), equivalent U.S. State standards, Canadian CSA Standard Z94.4-93.

EYE PROTECTION: Safety glasses or chemical goggles where splashing is possible. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.

SKIN PROTECTION: Use chemical resistant gloves to prevent skin contact. Use body protection appropriate to prevent skin contact (e.g. lab coat, overalls). If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.

SECTION 9 - PHYSICAL and CHEMICAL PROPERTIES

| | |
|--|----------------------------|
| PHYSICAL STATE: | Liquid |
| APPEARANCE & ODOR: | Gray paste with mild odor. |
| ODOR THRESHOLD (PPM): | None |
| VAPOR PRESSURE (mmHg): | Not Available |
| VAPOR DENSITY (AIR=1): | Not Available |
| BY WEIGHT: | Not Available |
| EVAPORATION RATE (nBuAc = 1): | Not Available |
| BOILING POINT (C°): | >200°C |
| FREEZING POINT (C°): | Not Available |
| pH: | Not Available |
| SPECIFIC GRAVITY 20°C: (WATER =1) | 1.5 |
| SOLUBILITY IN WATER (%) | Non-Soluble |
| PRODUCT VOC: | 115 g/L |

SECTION 10 - STABILITY and REACTIVITY

STABILITY: Product is stable

DECOMPOSITION PRODUCTS: When heated to decomposition this product may form carbon dioxide, carbon monoxide and acrid smoke / fumes as products of incomplete combustion.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Strong acids and strong oxidizing agents. Uncontrolled reactions with amines and bases.

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials.

SECTION 11 - TOXICOLOGICAL INFORMATION

TOXICITY DATA: Toxicity data is available for the following components:

CAS# 67762-90-7 Oral LD50 >5000 mg/m³ Rat

SUSPECTED CANCER AGENT: One or more of the ingredients are found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, IARC and therefore is considered to be, or suspected to be a cancer-causing agent by these agencies.

Titanium Dioxide CAS# 13463-67-7 IARC Group 2B (possible carcinogen to humans)

IRRITANCY OF PRODUCT: Contact with this product can be irritating to exposed skin, eyes and respiratory system.

SENSITIZATION OF PRODUCT: This product is considered a sensitizer.

REPRODUCTIVE TOXICITY INFORMATION: No information concerning the effects of this product and its components on the human reproductive system.

SECTION 12 - ECOLOGICAL INFORMATION

ALL WORK PRACTICES MUST BE AIMED AT ELIMINATING ENVIRONMENTAL CONTAMINATION.

ENVIRONMENTAL STABILITY: No Data available at this time.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on this product's effects on plants or animals, however release of this product may have long term adverse effects to the environment.

2813

SAFETY DATA SHEET

METALCLAD SpeedAlloy QS Base

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on this product's effects on aquatic life, however release of this product may have long term adverse effects to the environment.

SECTION 13 - DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations, those of Canada, Australia, EU Member States and Japan.

SECTION 14 - TRANSPORTATION INFORMATION

US DOT; IATA; IMO; ADR:

THIS PRODUCT IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Environmentally Hazardous Substances, Liquid, n.o.s (Diglycidyl ether bisphenol A polymer)

HAZARD CLASS NUMBER and DESCRIPTION: Class 9, Environmentally Hazardous Substance

UN IDENTIFICATION NUMBER: UN3082

PACKING GROUP: PGIII

DOT LABEL(S) REQUIRED: Class 9, Environmentally Hazardous Substance

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2004): 171

MARINE POLLUTANT: None of the ingredients are classified by the DOT as a Marine Pollutant (as defined by 49 CFR 172.101, Appendix B)

U.S. DEPARTMENT OF TRANSPORTATION (DOT) SHIPPING REGULATIONS:

This product is classified as dangerous goods, per U.S. DOT regulations, under 49 CFR 172.101.

TRANSPORT CANADA, TRANSPORTATION OF DANGEROUS GOODS REGULATIONS:

This product is classified as Dangerous Goods, per regulations of Transport Canada.

INTERNATIONAL AIR TRANSPORT ASSOCIATION (IATA):

This product is classified as Dangerous Goods, by rules of IATA:

INTERNATIONAL MARITIME ORGANIZATION (IMO) DESIGNATION:

This product is classified as Dangerous Goods by the International Maritime Organization.

SECTION 15 - REGULATORY INFORMATION

UNITED STATES REGULATIONS

SARA REPORTING REQUIREMENTS: This product is subject to the reporting requirements of Sections 302, 304 and 313 of Title III of the Superfund Amendments and Reauthorization Act., as follows: None

TSCA: All components in this product are listed on the US Toxic Substances Control Act (TSCA) inventory of chemicals.

SARA 311/312:

Acute Health: Yes Chronic Health: No Fire: No Reactivity: No

U.S. SARA THRESHOLD PLANNING QUANTITY: There are no specific Threshold Planning Quantities for this product. The default Federal SDS submission and inventory requirement filing threshold of 10,000 lb (4,540 kg) may apply, per 40 CFR 370.20.

U.S. CERCLA REPORTABLE QUANTITY (RQ): None

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): One or more of the ingredients are on the California Proposition 65 lists.
Titanium Dioxide CAS# 13463-67-7

CANADIAN REGULATIONS:

CANADIAN DSL/NDL INVENTORY STATUS: All of the components of this product are on the DSL Inventory

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: No component of this product is on the CEPA First Priorities Substance Lists.

CANADIAN WHMIS CLASSIFICATION and SYMBOLS: This is considered to be a hazardous material under the Hazardous Products Act as defined by the Controlled Products Regulations and is therefore subject to the labeling and SDS requirements of the Workplace Hazardous Materials Information System (WHMIS). Class D Division 2B

INTERNATIONAL CHEMICAL INVENTORIES:

Listing of the components on individual country Chemical Inventories is as follows:

| | |
|---|------------------|
| Asia-Pac: | Listed or Exempt |
| Australian Inventory of Chemical Substances (AICS): | Listed or Exempt |
| Korean Existing Chemicals List (ECL): | Listed or Exempt |
| Japanese Existing National Inventory of Chemical Substances (ENCS): | Listed or Exempt |
| Philippines Inventory of Chemicals and Chemical Substances (PICCS): | Listed or Exempt |
| Swiss Giftlist List of Toxic Substances: | Listed or Exempt |
| U.S. TSCA: | Listed |

SECTION 16 - OTHER INFORMATION

PREPARED BY: Chris Eigbrett

MSDS to GHS Compliance

Disclaimer: To the best of ENECON Corporation's knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness is not guaranteed and no warranties of any type either express or implied are provided. The information contained herein relates only to this specific product.

SAFETY DATA SHEET

Prepared according to U.S. OSHA, CMA, ANSI, Canadian WHMIS regulations

METALCLAD SpeedAlloy QS Activator

SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: METALCLAD SpeedAlloy QS Activator
CHEMICAL FAMILY NAME: Mixture
U.N. NUMBER: UN2735
U.N. DANGEROUS GOODS CLASS: Polyamines liquid, Corrosive, n.o.s. (Contains Nonylphenol, Aminoethylpiperazine, Triethylenetetramine), Class 8, PGIII
SUPPLIER/MANUFACTURER'S NAME: ENECON Corporation
ADDRESS: 6 Platinum Court, Medford, New York 11763-2251
EMERGENCY PHONE: 800-255-3924 (U.S.A.)
813-248-0585 (International)
516-349-0022
BUSINESS PHONE: 516-349-5522
BUSINESS FAX: 516-349-5522
DATE OF PREPARATION: February 17, 2016

SECTION 2 - HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW: This product is a white paste with an amine odor. Corrosive: may cause severe eye damage. Vapors may be irritating to eyes. May be toxic if absorbed through skin. Inhalation of vapors can be irritating to the respiratory tract. It is a non-flammable liquid with a flash point >115°C. The environmental effects of this product have not been investigated, however this product may cause adverse effects.

US DOT SYMBOLS



GHS HAZARD SYMBOLS



NFPA RATING SYSTEM



Signal Word: Danger!

This product does meet the definition of a hazardous substance or preparation as defined by 29 CFR 1910. 1200

COMPONENTS DETERMINING HAZARDS:

Fibrous Glass, Nonylphenol, Aminoethyl Piperazine, Triethylenetetramine

GHS HAZARD CLASSIFICATION(S):

- Acute Toxicity Category 4 (Oral)
- Acute Toxicity Category 4 (Dermal)
- Skin Corrosion Category 1B
- Eye Damage Category 1
- Skin Sensitization Category 1
- Aquatic Chronic Category 2
- Aquatic Acute Category 2
- Reproductive Toxicity Category 2

HAZARD STATEMENTS:

- Causes severe skin burns and eye damage
- May cause an allergic skin reaction
- Causes serious eye damage
- Harmful if swallowed
- Harmful in contact with skin
- Suspected of damaging fertility or the unborn child
- Toxic to aquatic life
- Toxic to aquatic life with long lasting effects

PRECAUTIONARY STATEMENTS:

- Obtain special instructions before use.
- Do not handle until all safety precautions have been read and understood.
- Contaminated work clothing should not be allowed out of the workplace.
- Avoid breathing dust/fume/gas/mist/vapours/spray.
- Wear protective gloves.
- Wear eye protection/face protection.
- Use only outdoors or in a well-ventilated area.
- Wash thoroughly after handling.
- Do not eat, drink or smoke when using this product.
- Avoid release to the environment.

HEALTH HAZARDS OR RISKS FROM EXPOSURE:

ACUTE:

INHALATION: Inhalation of mists or vapors may cause irritation to respiratory tract

EYE CONTACT: Corrosive to the eye and may cause severe damage. Vapors may be irritating to eyes.

SKIN CONTACT: May be toxic if absorbed through skin. Sensitization may occur. Corrosive to the skin.

INGESTION: Not a normal route of entry in normal application, however ingestion of this product will cause burns to mouth and throat.

CHRONIC: Prolonged or repeated exposure may cause dermatitis to the skin.

SAFETY DATA SHEET

METALCLAD SpeedAlloy QS Activator

TARGET ORGANS:

ACUTE: Eye, Skin

CHRONIC: Skin

SECTION 3 - COMPOSITION and INFORMATION ON INGREDIENTS

| HAZARDOUS INGREDIENTS: | CAS # | EINECS # | ICSC # | WT % | HAZARD CLASSIFICATION |
|---|------------|--------------------|------------|----------|---|
| Fibrous Glass | 65997-17-3 | 266-046-0 | Not Listed | 55 – 65% | Eye Irritant 2 |
| Aminoethyl piperazine | 140-31-8 | 205-411-0 | Not Listed | 15 -25% | Acute Toxicity 4 (Oral, Dermal), Skin Corrosive 1B, Skin Sensitizer 1, Aquatic Chronic 3 |
| Nonylphenol | 25154-52-3 | 246-672-0 | 0309 | 5 – 15% | Acute Toxicity 4 (Oral), Skin Corrosive 1B, Reproductive Toxicity 2, Aquatic Acute 1, Aquatic Chronic 1 |
| Triethylenetetramine | 112-24-3 | 203-950-6 | 1123 | 5 – 15% | Acute Toxicity 4 (Dermal), Skin Corrosive 1B, Skin Sensitizer 1, Aquatic Chronic 3 |
| Silicon Dioxide – Non Crystalline | 67762-90-7 | Not Listed in ESIS | Not Listed | 1 - 5% | NOT CLASSIFIED |
| Titanium Dioxide | 13463-67-7 | 236-675-5 | 0338 | 0.5 – 1% | NOT CLASSIFIED |
| Balance of other ingredients are non-hazardous or less than 1% in concentration (or 0.1% for carcinogens, reproductive toxins, or respiratory sensitizers). | | | | | |

SECTION 4 - FIRST-AID MEASURES

Contaminated individuals of chemical exposure must be taken for medical attention if any adverse effect occurs. Rescuers should be taken for medical attention, if necessary. Take copy of label and SDS to health professional with contaminated individual.

EYE CONTACT: If product enters the eyes, open eyes while under gentle running water for at least 15 minutes. Seek medical attention if irritation persists.

SKIN CONTACT: Wash skin thoroughly after handling. Seek medical attention if irritation develops and persists. Remove contaminated clothing. Launder before re-use.

INHALATION: If breathing becomes difficult, remove victim to fresh air. If necessary, use artificial respiration to support vital functions. Seek medical attention if breathing difficulty continues.

INGESTION: If product is swallowed, call physician or poison control center for most current information. If professional advice is not available, do not induce vomiting. Never induce vomiting or give diluents (milk or water) to someone who is unconscious, having convulsions, or who cannot swallow. Seek medical advice. Take a copy of the label and/or SDS with the victim to the health professional.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Pre-existing skin, or eye problems may be aggravated by prolonged contact.

RECOMMENDATIONS TO PHYSICIANS: Treat symptoms and reduce over-exposure.

SECTION 5 - FIRE-FIGHTING MEASURES

FLASH POINT: >115°C

FLAMMABILITY CLASS: 111B

AUTOIGNITION TEMPERATURE: Not Established

FLAMMABLE LIMITS (in air by volume, %): Lower (LEL): NA Upper (UEL): NA

FIRE EXTINGUISHING MATERIALS: As appropriate for surrounding fire. Carbon dioxide, foam, dry chemical, halon, or water spray.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Oxides of nitrogen and nitrogen containing organic compounds may be formed during combustion. Combustion products may be toxic.

Explosion Sensitivity to Mechanical Impact: Not Sensitive.

Explosion Sensitivity to Static Discharge: Not Sensitive

SPECIAL FIRE-FIGHTING PROCEDURES: Incipient fire responders should wear eye protection. Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment. Isolate materials not yet involved in the fire and protect personnel. Move containers from fire area if this can be done without risk; otherwise, cool with carefully applied water spray. If possible, prevent runoff water from entering storm drains, bodies of water, or other environmentally sensitive areas.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

SPILL AND LEAK RESPONSE: Personnel should be trained for spill response operations.

SPILLS: Contain spill if safe to do so. Prevent entry into drains, sewers, and other waterways. Soak up with an absorbent material and place in an appropriate container for disposal. Dispose of in accordance with applicable Federal, State, and local procedures (see Section 13, Disposal Considerations).

SECTION 7 - HANDLING and STORAGE

WORK PRACTICES AND HYGIENE PRACTICES: As with all chemicals, avoid getting this product ON YOU or IN YOU. Wash thoroughly after handling this product. Do not eat, drink, smoke, or apply cosmetics while handling this product. Avoid breathing dusts generated by this product. Use in a well-ventilated location. Remove contaminated clothing immediately.

SAFETY DATA SHEET

METALCLAD SpeedAlloy QS Activator

STORAGE AND HANDLING PRACTICES: Containers of this product must be properly labeled. Store containers in a cool, dry location. Keep container tightly closed when not in use. Store away from strong acids or oxidizers and reactive materials.

SECTION 8 - EXPOSURE CONTROLS - PERSONAL PROTECTION

EXPOSURE LIMITS/GUIDELINES:

| Chemical Name | CAS# | ACGIH TWA | OSHA TWA |
|-----------------------------------|------------|----------------------|----------------------|
| Fibrous Glass | 65997-17-3 | Not Listed | Not Listed |
| Aminoethylpiperazine | 140-31-8 | Not Listed | Not Listed |
| Nonylphenol | 25154-52-3 | Not Listed | Not Listed |
| Triethylenetetramine | 112-24-3 | Not Listed | Not Listed |
| Silicon Dioxide – Non Crystalline | 67762-90-7 | 10 mg/m ³ | 6 mg/m ³ |
| Titanium Dioxide | 13463-67-7 | 10 mg/m ³ | 15 mg/m ³ |

Currently, International exposure limits are not established for all the components of this product. Please check with competent authority in each country for the most recent limits in place.

VENTILATION AND ENGINEERING CONTROLS: Use with adequate ventilation to ensure exposure levels are maintained below the limits provided above. Use local exhaust ventilation to control airborne vapors. Ensure eyewash/safety shower stations are available near areas where this product is used.

The following information on appropriate Personal Protective Equipment is provided to assist employers in complying with OSHA regulations found in 29 CFR Subpart I (beginning at 1910.132) or equivalent standard of Canada. Please reference applicable regulations and standards for relevant details.

RESPIRATORY PROTECTION: Maintain airborne contaminant concentrations below guidelines listed above, if applicable. If necessary, use only respiratory protection authorized in the U.S. Federal OSHA Respiratory Protection Standard (29 CFR 1910.134), equivalent U.S. State standards, Canadian CSA Standard Z94.4-93.

EYE PROTECTION: Safety glasses or chemical goggles where splashing is possible. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.

SKIN PROTECTION: Use chemical resistant gloves to prevent skin contact. Use body protection appropriate to prevent skin contact (e.g. lab coat, overalls). If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.

SECTION 9 - PHYSICAL and CHEMICAL PROPERTIES

| | |
|--|-----------------------------------|
| PHYSICAL STATE: | Paste |
| APPEARANCE & ODOR: | White paste with an ammonia odor. |
| ODOR THRESHOLD (PPM): | None |
| VAPOR PRESSURE (mmHg): | Not Available |
| VAPOR DENSITY (AIR=1): | Not Available |
| BY WEIGHT: | Not Available |
| EVAPORATION RATE (nBuAc = 1): | Not Available |
| BOILING POINT (C°): | >200°C |
| FREEZING POINT (C°): | Not Available |
| pH: | Not Available |
| SPECIFIC GRAVITY 20°C: (WATER =1) | 1.50 |
| SOLUBILITY IN WATER (%) | Non-Soluble |
| PRODUCT VOC: | 115 g/L |

SECTION 10 - STABILITY and REACTIVITY

STABILITY: Product is stable

DECOMPOSITION PRODUCTS: When heated to decomposition this product may form carbon dioxide, carbon monoxide, oxides of nitrogen and unidentified organic compounds.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Strong acids and strong oxidizing agents.

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials.

SECTION 11 - TOXICOLOGICAL INFORMATION

TOXICITY DATA: Toxicity data is available for the following components:

CAS# 67762-90-7 Oral LD50 >5000 mg/kg Rat

SUSPECTED CANCER AGENT One or more of the ingredients are found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, IARC and therefore is considered to be, or suspected to be a cancer-causing agent by these agencies.

Titanium Dioxide CAS# 13463-67-7 IARC Group 2B (possible carcinogen to humans)

IRRITANCY OF PRODUCT: Contact with this product can be irritating to exposed skin, eyes and respiratory system.

SENSITIZATION OF PRODUCT: This product is considered a sensitizer.

REPRODUCTIVE TOXICITY INFORMATION: No information concerning the effects of this product and its components on the human reproductive system.

SECTION 12 - ECOLOGICAL INFORMATION

ALL WORK PRACTICES MUST BE AIMED AT ELIMINATING ENVIRONMENTAL CONTAMINATION.

ENVIRONMENTAL STABILITY: No Data available at this time.

SAFETY DATA SHEET

METALCLAD SpeedAlloy QS Activator

EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on this product's effects on plants or animals, however release of this product may cause significant adverse effects.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on this product's effects on aquatic life, however release of this product may cause significant adverse effects.

SECTION 13 - DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations, those of Canada, Australia, EU Member States and Japan.

SECTION 14 - TRANSPORTATION INFORMATION

US DOT; IATA; IMO; ADR:

THIS PRODUCT IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Polyamines liquid, Corrosive, n.o.s. (Contains Nonylphenol, Aminoethylpiperazine, Triethylenetetramine)

HAZARD CLASS NUMBER and DESCRIPTION: Class 8 Corrosive

UN IDENTIFICATION NUMBER: UN2735

PACKING GROUP: PGIII

DOT LABEL(S) REQUIRED: Corrosive

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2004): 153

MARINE POLLUTANT: One of the ingredients are classified by the DOT as a Marine Pollutant (as defined by 49 CFR 172.101, Appendix B)

U.S. DEPARTMENT OF TRANSPORTATION (DOT) SHIPPING REGULATIONS:

This product is classified as dangerous goods, per U.S. DOT regulations, under 49 CFR 172.101.

TRANSPORT CANADA, TRANSPORTATION OF DANGEROUS GOODS REGULATIONS:

This product is classified as Dangerous Goods, per regulations of Transport Canada.

INTERNATIONAL AIR TRANSPORT ASSOCIATION (IATA):

This product is classified as Dangerous Goods, by rules of IATA:

INTERNATIONAL MARITIME ORGANIZATION (IMO) DESIGNATION:

This product is classified as Dangerous Goods by the International Maritime Organization.

SECTION 15 - REGULATORY INFORMATION

UNITED STATES REGULATIONS

SARA REPORTING REQUIREMENTS: This product is subject to the reporting requirements of Sections 302, 304 and 313 of Title III of the Superfund Amendments and Reauthorization Act., as follows: None

TSCA: All components in this product are listed on the US Toxic Substances Control Act (TSCA) inventory of chemicals.

SARA 311/312:

Acute Health: Yes Chronic Health: No Fire: No Reactivity: No

U.S. SARA THRESHOLD PLANNING QUANTITY: There are no specific Threshold Planning Quantities for this product. The default Federal SDS submission and inventory requirement filing threshold of 10,000 lb (4,540 kg) may apply, per 40 CFR 370.20.

U.S. CERCLA REPORTABLE QUANTITY (RQ): None

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): One or more of the ingredients are on the California Proposition 65 lists.
Titanium Dioxide CAS# 13463-67-7

CANADIAN REGULATIONS:

CANADIAN DSL/NDL INVENTORY STATUS: All of the components of this product are on the DSL Inventory

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: No component of this product is on the CEPA First Priorities Substance Lists.

CANADIAN WHMIS CLASSIFICATION and SYMBOLS: This is considered to be a hazardous material under the Hazardous Products Act Class D Division 2 and Class E, as defined by the Controlled Products Regulations and is therefore subject to the labeling and SDS requirements of the Workplace Hazardous Materials Information System (WHMIS).

INTERNATIONAL CHEMICAL INVENTORIES:

Listing of the components on individual country Chemical Inventories is as follows:

| | |
|---|------------------|
| Asia-Pac: | Listed or Exempt |
| Australian Inventory of Chemical Substances (AICS): | Listed or Exempt |
| Korean Existing Chemicals List (ECL): | Listed or Exempt |
| Japanese Existing National Inventory of Chemical Substances (ENCS): | Listed or Exempt |
| Philippines Inventory of Chemicals and Chemical Substances (PICCS): | Listed or Exempt |
| Swiss Giftlist List of Toxic Substances: | Listed or Exempt |
| U.S. TSCA: | Listed |

SECTION 16 - OTHER INFORMATION

PREPARED BY: Chris Eigbrett

MSDS to GHS Compliance

Disclaimer: To the best of ENECON Corporation's knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness is not guaranteed and no warranties of any type either express or implied are provided. The information contained herein relates only to this specific product.

Product Name: MOBIL RARUS 427
Revision Date: 15Jun2007
Page 1 of 8

MATERIAL SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL RARUS 427
Product Description: Base Oil and Additives
Product Code: 606202-00, 970996
Intended Use: Compressor oil

COMPANY IDENTIFICATION

Supplier: EXXON MOBIL CORPORATION
3225 GALLOWS RD.
FAIRFAX, VA. 22037 USA

24 Hour Health Emergency 609-737-4411
Transportation Emergency Phone 800-424-9300
ExxonMobil Transportation No. 281-834-3296
MSDS Requests 713-613-3661
Product Technical Information 800-662-4525, 800-947-9147
MSDS Internet Address <http://www.exxon.com>, <http://www.mobil.com>

SECTION 2 COMPOSITION / INFORMATION ON INGREDIENTS

No Reportable Hazardous Substance(s) or Complex Substance(s).

SECTION 3 HAZARDS IDENTIFICATION

This material is not considered to be hazardous according to regulatory guidelines (see (M)SDS Section 15).

POTENTIAL HEALTH EFFECTS

Low order of toxicity. Excessive exposure may result in eye, skin, or respiratory irritation. High-pressure injection under skin may cause serious damage.

| | | | |
|------------------------|-----------|-----------------|---------------|
| NFPA Hazard ID: | Health: 0 | Flammability: 1 | Reactivity: 0 |
| HMIS Hazard ID: | Health: 0 | Flammability: 1 | Reactivity: 0 |

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 4 FIRST AID MEASURES

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use

Product Name: MOBIL RARUS 427

Revision Date: 15Jun2007

Page 2 of 8

mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 5 FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight Streams of Water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Smoke, Fume, Aldehydes, Oxides of carbon, Sulfur oxides, Incomplete combustion products

FLAMMABILITY PROPERTIES

Flash Point [Method]: >210C (410F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6 ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

SPILL MANAGEMENT

Land Spill: Stop leak if you can do it without risk. Recover by pumping or with suitable absorbent.

Product Name: MOBIL RARUS 427

Revision Date: 15Jun2007

Page 3 of 8

Water Spill: Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted.

Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

This material is not intended for use in air compressors for breathing applications. Prevent small spills and leakage to avoid slip hazard.

Static Accumulator: This material is a static accumulator.

STORAGE

Do not store in open or unlabelled containers.

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure limits/standards for materials that can be formed when handling this product: When mists / aerosols can occur, the following are recommended: 5 mg/m³ - ACGIH TLV, 10 mg/m³ - ACGIH STEL, 5 mg/m³ - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use,

Product Name: MOBIL RARUS 427

Revision Date: 15Jun2007

Page 4 of 8

and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Work conditions can greatly affect glove durability; inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

See Sections 6, 7, 12, 13.

SECTION 9

PHYSICAL AND CHEMICAL PROPERTIES

Typical physical and chemical properties are given below. Consult the Supplier in Section 1 for additional data.

GENERAL INFORMATION

Physical State: Liquid

Color: Amber

Odor: Characteristic

Odor Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 C): 0.879

Flash Point [Method]: >210C (410F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

Boiling Point / Range: > 316C (600F)

Vapor Density (Air = 1): > 2 at 101 kPa

Vapor Pressure: < 0.013 kPa (0.1 mm Hg) at 20 C

Evaporation Rate (n-butyl acetate = 1): N/D

pH: N/A

Log Pow (n-Octanol/Water Partition Coefficient): > 3.5

Solubility in Water: Negligible

Viscosity: 100 cSt (100 mm²/sec) at 40 C

Product Name: MOBIL RARUS 427

Revision Date: 15Jun2007

Page 5 of 8

Oxidizing Properties: See Sections 3, 15, 16.

OTHER INFORMATION

Freezing Point: N/D

Melting Point: N/A

Pour Point: -9°C (16°F)

DMSO Extract (mineral oil only), IP-346: < 3 %wt

| | |
|-------------------|---------------------------------|
| SECTION 10 | STABILITY AND REACTIVITY |
|-------------------|---------------------------------|

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

HAZARDOUS POLYMERIZATION: Will not occur.

| | |
|-------------------|----------------------------------|
| SECTION 11 | TOXICOLOGICAL INFORMATION |
|-------------------|----------------------------------|

ACUTE TOXICITY

| <u>Route of Exposure</u> | <u>Conclusion / Remarks</u> |
|--------------------------------------|---|
| Inhalation | |
| Toxicity (Rat): LC50 > 5000 mg/m3 | Minimally Toxic. Based on test data for structurally similar materials. |
| Irritation: No end point data. | Negligible hazard at ambient/normal handling temperatures. Based on assessment of the components. |
| Ingestion | |
| Toxicity (Rat): LD50 > 2000 mg/kg | Minimally Toxic. Based on test data for structurally similar materials. |
| Skin | |
| Toxicity (Rabbit): LD50 > 2000 mg/kg | Minimally Toxic. Based on test data for structurally similar materials. |
| Irritation (Rabbit): Data available. | Negligible irritation to skin at ambient temperatures. Based on test data for structurally similar materials. |
| Eye | |
| Irritation (Rabbit): Data available. | May cause mild, short-lasting discomfort to eyes. Based on test data for structurally similar materials. |

CHRONIC/OTHER EFFECTS

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

Additional information is available by request.

The following ingredients are cited on the lists below: None.

Product Name: MOBIL RARUS 427

Revision Date: 15Jun2007

Page 6 of 8

--REGULATORY LISTS SEARCHED--

1 = NTP CARC

3 = IARC 1

5 = IARC 2B

2 = NTP SUS

4 = IARC 2A

6 = OSHA CARC

SECTION 12

ECOLOGICAL INFORMATION

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

SECTION 13

DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

Product Name: MOBIL RARUS 427
 Revision Date: 15Jun2007
 Page 7 of 8

| | |
|-------------------|------------------------------|
| SECTION 14 | TRANSPORT INFORMATION |
|-------------------|------------------------------|

LAND (DOT) : Not Regulated for Land Transport

LAND (TDG) : Not Regulated for Land Transport

SEA (IMDG) : Not Regulated for Sea Transport according to IMDG-Code

AIR (IATA) : Not Regulated for Air Transport

| | |
|-------------------|-------------------------------|
| SECTION 15 | REGULATORY INFORMATION |
|-------------------|-------------------------------|

OSHA HAZARD COMMUNICATION STANDARD: When used for its intended purposes, this material is not classified as hazardous in accordance with OSHA 29 CFR 1910.1200.

NATIONAL CHEMICAL INVENTORY LISTING: AICS, IECSC, DSL, EINECS, KECI, PICCS, TSCA
Special Cases:

| Inventory | Status |
|-----------|--------------------|
| ENCS | Restrictions Apply |

EPCRA: This material contains no extremely hazardous substances.

SARA (311/312) REPORTABLE HAZARD CATEGORIES: None.

SARA (313) TOXIC RELEASE INVENTORY: This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The Following Ingredients are Cited on the Lists Below:

| Chemical Name | CAS Number | List Citations |
|---------------|------------|----------------|
| DIPHENYLAMINE | 122-39-4 | 5 |

--REGULATORY LISTS SEARCHED--

- | | | | |
|---------------|------------------|-------------------|-------------|
| 1 = ACGIH ALL | 6 = TSCA 5a2 | 11 = CA P65 REPRO | 16 = MN RTK |
| 2 = ACGIH A1 | 7 = TSCA 5e | 12 = CA RTK | 17 = NJ RTK |
| 3 = ACGIH A2 | 8 = TSCA 6 | 13 = IL RTK | 18 = PA RTK |
| 4 = OSHA Z | 9 = TSCA 12b | 14 = LA RTK | 19 = RI RTK |
| 5 = TSCA 4 | 10 = CA P65 CARC | 15 = MI 293 | |

Code key: CARC=Carcinogen; REPRO=Reproductive

| | |
|-------------------|--------------------------|
| SECTION 16 | OTHER INFORMATION |
|-------------------|--------------------------|

N/D = Not determined, N/A = Not applicable

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

Product Name: MOBIL RARUS 427

Revision Date: 15Jun2007

Page 8 of 8

No revision information is available.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0, 0, 0, 0, 0, 0

PPEC: A

DGN: 2008423XUS (1013559)

Copyright 2002 Exxon Mobil Corporation, All rights reserved



SAFETY DATA SHEET

1. Identification

| | |
|---|--|
| Product identifier | Oatey CPVC Flowguard Gold One-Step Yellow Cement |
| Other means of identification | |
| Product code | 1203E |
| Synonyms | Part Numbers: 31910(TV), 31911(TV), 31912, 31913, 31914, 31656, 31657, 32200, 32201, 32202, 32203, 31660, 31661, 31662, 31663, 31152, 31664, 31665, 31666, 31667 |
| Recommended use | Joining CPVC Pipes |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Company Name | Oatey Co. |
| Address | 4700 West 160th St. Cleveland, OH 44135 |
| Telephone | 216-267-7100 |
| E-mail | info@oatey.com |
| Transport Emergency | Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887) |
| Emergency First Aid | 1-877-740-5015 |
| Contact person | MSDS Coordinator |

2. Hazard(s) identification

| | | |
|-----------------------------|---|---|
| Physical hazards | Flammable liquids | Category 2 |
| Health hazards | Acute toxicity, oral | Category 4 |
| | Skin corrosion/irritation | Category 2 |
| | Serious eye damage/eye irritation | Category 2A |
| | Specific target organ toxicity, single exposure | Category 3 respiratory tract irritation |
| | Specific target organ toxicity, single exposure | Category 3 narcotic effects |
| | Aspiration hazard | Category 1 |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--------------------------------|--|
| Signal word | Danger |
| Hazard statement | Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. |

| | |
|--|--|
| Response | If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish. |
| Storage | Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. |
| Disposal | Dispose of contents/container in accordance with local/regional/national/international regulations. |
| Hazard(s) not otherwise classified (HNOC) | Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen. |
| Supplemental information | Not applicable. |

3. Composition/information on ingredients

Mixtures

| Chemical name | CAS number | % |
|---|-------------|-------|
| Furan, Tetrahydro- | 109-99-9 | 30-60 |
| Methyl ethyl ketone | 78-93-3 | 10-30 |
| Ethene, chloro-, homopolymer, chlorinated | 68648-82-8 | 10-20 |
| Acetone | 67-64-1 | 5-15 |
| Cyclohexanone | 108-94-1 | 5-15 |
| Silica, amorphous, fumed | 112945-52-5 | 1-5 |

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

| | |
|---|--|
| Inhalation | Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. |
| Skin contact | Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. |
| Eye contact | Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. |
| Ingestion | Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis. |
| Most important symptoms/effects, acute and delayed | Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed. |
| General information | Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Self-contained breathing apparatus and full protective clothing must be worn in case of fire. |

Fire fighting equipment/instructions

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards

Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures**Personal precautions, protective equipment and emergency procedures**

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Stop the flow of material, if this is without risk. Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage**Precautions for safe handling**

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

| Components | Type | Value |
|-----------------------------------|------|------------------------|
| Acetone (CAS 67-64-1) | PEL | 2400 mg/m3 1000 ppm |
| Cyclohexanone (CAS 108-94-1) | PEL | 200 mg/m3 50 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | PEL | 590 mg/m3 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | PEL | 590 mg/m3 200 ppm |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|--|------|-----------|
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 0.8 mg/m3 |

US. OSHA Table Z-3 (29 CFR 1910.1000)

| Components | Type | Value |
|------------|------|----------|
| | | 20 mppcf |

US. ACGIH Threshold Limit Values

| Components | Type | Value |
|-----------------------------------|------|---------|
| Acetone (CAS 67-64-1) | STEL | 750 ppm |
| | TWA | 500 ppm |
| Cyclohexanone (CAS 108-94-1) | STEL | 50 ppm |
| | TWA | 20 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 100 ppm |
| | TWA | 50 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 300 ppm |
| | TWA | 200 ppm |

US. NIOSH: Pocket Guide to Chemical Hazards

| Components | Type | Value |
|--|------|-----------|
| Acetone (CAS 67-64-1) | TWA | 590 mg/m3 |
| | | 250 ppm |
| Cyclohexanone (CAS 108-94-1) | TWA | 100 mg/m3 |
| | | 25 ppm |
| Furan, Tetrahydro- (CAS 109-99-9) | STEL | 735 mg/m3 |
| | | 250 ppm |
| | TWA | 590 mg/m3 |
| | | 200 ppm |
| Methyl ethyl ketone (CAS 78-93-3) | STEL | 885 mg/m3 |
| | | 300 ppm |
| | TWA | 590 mg/m3 |
| | | 200 ppm |
| Silica, amorphous, fumed (CAS 112945-52-5) | TWA | 6 mg/m3 |

Biological limit values

ACGIH Biological Exposure Indices

| Components | Value | Determinant | Specimen | Sampling Time |
|-----------------------------------|---------|--------------------------------------|----------|---------------|
| Acetone (CAS 67-64-1) | 50 mg/l | Acetone | Urine | * |
| Cyclohexanone (CAS 108-94-1) | 80 mg/l | 1,2-Cyclohexanediol, with hydrolysis | Urine | * |
| | 8 mg/l | Cyclohexanol, with hydrolysis | Urine | * |
| Furan, Tetrahydro- (CAS 109-99-9) | 2 mg/l | Tetrahydrofuran | Urine | * |
| Methyl ethyl ketone (CAS 78-93-3) | 2 mg/l | MEK | Urine | * |

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1)

Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment**Eye/face protection**

Face shield is recommended. Wear safety glasses with side shields (or goggles).

Skin protection**Hand protection**

Wear appropriate chemical resistant gloves.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If engineering controls do not maintain airborne concentrations below recommended exposure limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance****Physical state**

Liquid.

Form

Translucent liquid.

Color

Yellow / Gold

Odor

Solvent.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

Not available.

Initial boiling point and boiling range

151 °F (66.11 °C)

Flash point

14.0 - 23.0 °F (-10.0 - -5.0 °C)

Evaporation rate

5.5 - 8

Flammability (solid, gas)

Not available.

Upper/lower flammability or explosive limits**Flammability limit - lower (%)**

1.8

Flammability limit - upper (%)

11.8

Explosive limit - lower (%)

Not available.

Explosive limit - upper (%)

Not available.

Vapor pressure

145 mm Hg @ 20 C

Vapor density

2.5

Relative density

0.94 +/- 0.02

Solubility(ies)**Solubility (water)**

Negligible

Partition coefficient (n-octanol/water)

Not available.

Auto-ignition temperature

Not available.

| | |
|----------------------------------|-----------------------------|
| Decomposition temperature | Not available. |
| Viscosity | 500 - 1500 cP |
| Other information | |
| Bulk density | 7.8 lb/gal |
| VOC (Weight %) | < 490 g/l SQACMD 1168/M316A |

10. Stability and reactivity

| | |
|---|--|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | No dangerous reaction known under conditions of normal use. |
| Conditions to avoid | Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics. |
| Hazardous decomposition products | No hazardous decomposition products are known. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|---|
| Inhalation | May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. |
| Skin contact | Causes skin irritation. |
| Eye contact | Causes serious eye irritation. |
| Ingestion | May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed. Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia. |

Symptoms related to the physical, chemical and toxicological characteristics Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

| Components | Species | Test Results |
|------------------------------|---------|-------------------|
| Acetone (CAS 67-64-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 20 ml/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 50 mg/l, 8 Hours |
| <i>Oral</i> | | |
| LD50 | Rat | 5800 mg/kg |
| Cyclohexanone (CAS 108-94-1) | | |
| Acute | | |
| <i>Dermal</i> | | |
| LD50 | Rabbit | 948 mg/kg |
| <i>Inhalation</i> | | |
| LC50 | Rat | 8000 ppm, 4 hours |
| <i>Oral</i> | | |
| LD50 | Rat | 1540 mg/kg |

* Estimates for product may be based on additional component data not shown.

| | |
|--|--------------------------------|
| Skin corrosion/irritation | Causes skin irritation. |
| Serious eye damage/eye irritation | Causes serious eye irritation. |

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity In 2012 USEPA Integrated Risk Information System (IRIS) reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

Cyclohexanone (CAS 108-94-1) 3 Not classifiable as to carcinogenicity to humans.

Silica, amorphous, fumed (CAS 112945-52-5) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|------------------------------|---------|---|
| Acetone (CAS 67-64-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) > 100 mg/l, 96 hours |
| Cyclohexanone (CAS 108-94-1) | | |
| Aquatic | | |
| Fish | LC50 | Fathead minnow (Pimephales promelas) 481 - 578 mg/l, 96 hours |

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

| | |
|-----------------------------------|-------|
| Acetone (CAS 67-64-1) | -0.24 |
| Cyclohexanone (CAS 108-94-1) | 0.81 |
| Furan, Tetrahydro- (CAS 109-99-9) | 0.46 |
| Methyl ethyl ketone (CAS 78-93-3) | 0.29 |

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

UN number UN1133
UN proper shipping name Adhesives
Transport hazard class(es)
 Class 3
 Subsidiary risk -
 Label(s) 3
Packing group II
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Special provisions T11, TP1, TP8, TP27
Packaging exceptions 150
Packaging non bulk 201
Packaging bulk 243

IATA

UN number UN1133
UN proper shipping name Adhesives
Transport hazard class(es)
 Class 3
 Subsidiary risk -
Packing group II
Environmental hazards No.
ERG Code 3L
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1133
UN proper shipping name ADHESIVES
Transport hazard class(es)
 Class 3
 Subsidiary risk -
Packing group II
Environmental hazards
 Marine pollutant No.
EmS F-E, S-D
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not available.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | LISTED |
| Cyclohexanone (CAS 108-94-1) | LISTED |
| Furan, Tetrahydro- (CAS 109-99-9) | LISTED |
| Methyl ethyl ketone (CAS 78-93-3) | LISTED |

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - No
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

| | |
|-----------------------------------|--------|
| Acetone (CAS 67-64-1) | 35 %WV |
| Methyl ethyl ketone (CAS 78-93-3) | 35 %WV |

DEA Exempt Chemical Mixtures Code Number

| | |
|-----------------------------------|------|
| Acetone (CAS 67-64-1) | 6532 |
| Methyl ethyl ketone (CAS 78-93-3) | 6714 |

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Silica, amorphous, fumed (CAS 112945-52-5)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)
Silica, amorphous, fumed (CAS 112945-52-5)

US. Rhode Island RTK

Acetone (CAS 67-64-1)
Cyclohexanone (CAS 108-94-1)
Furan, Tetrahydro- (CAS 109-99-9)
Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|----------------------|--------------------------------|------------------------|
| Canada | Domestic Substances List (DSL) | Yes |

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|---|------------------------|
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

| | |
|---------------|--|
| Issue date | 27-May-2015 |
| Revision date | - |
| Version # | 01 |
| HMIS® ratings | Health: 2 Flammability: 3 Physical hazard: 0 |

NFPA ratings



Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. Oatey Co. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.



SAFETY DATA SHEET

Section 1 – Product & Company Identification

Product Name:
RIDGID Dark Thread Cutting Oil (United States)

Product Catalog No.:
11471, 11491, 41590, 41600, 41610, 70830

Recommended Use:
Thread Cutting

Restrictions on Use:
Industrial use only

Company Information:

| <u>North America</u> | <u>Australia</u> |
|--|--|
| Ridge Tool Company 400 Clark Street Elyria, Ohio 44035-6001 1-800-519-3456 (8:00 am – 5:00 pm EST, M-F) Emergency Telephone call 9-1-1 or local emergency number www.RIDGID.com | Ridge Tool Australia 127 Metrolink Circuit Campbellfield, VIC 3061 1-800-743-443 (8:30 am – 5:00 pm AEST, M-F) Emergency Telephone call 000 or local emergency number www.RIDGID.com.au |

Issue Date: May 2, 2018

Revision: I

• Français – 11
• Castellano – pág. 21



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 2 – Hazards Identification

Hazard Classification

This product is classified as not hazardous per US OSHA 29CFR 1910.1200 (HazCom 2012)

Label Elements

Hazard Symbol: No symbol

Signal Word: No signal word.

Hazard Statement: Not applicable

Precautionary Statements: Not applicable

Other hazards which do not result in GHS classification: None.

Section 3 – Composition / Information On Ingredients

General information: This product does not contain silicone or chlorinated additives.

Hazardous Component(s):

| Chemical name | CAS-No. | Concentration |
|---------------|--------------|---------------|
| Mineral oil | Confidential | 20 - <50% |
| Paraffin oils | Confidential | 20 - <50% |

Specific chemical identities and/or exact percentages have been withheld as trade secrets.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 4 – First Aid Measures

Ingestion: Rinse mouth thoroughly. Call a POISON CENTER/doctor if you feel unwell. Do NOT induce vomiting.

Inhalation: Move to fresh air. Call a POISON CENTER/doctor if you feel unwell.

Skin Contact: Remove contaminated clothing and shoes. Wash contact areas with soap and water. If skin irritation occurs: Get medical advice/attention.

Eye contact: Flush thoroughly with water. If irritation occurs, get medical assistance. Continue to rinse for at least 15 minutes.

Most important symptoms/effects, acute and delayed

Symptoms: No data available.

Indication of immediate medical attention and special treatment needed

Treatment: Get medical attention if symptoms occur.

Section 5 – Fire Fighting Measures

General Fire Hazards: No unusual fire or explosion hazards noted.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Water spray, fog, CO₂, dry chemical, or regular foam. Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical: Heat may cause the containers to explode. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: No data available.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 6 – Accidental Release Measures

| | |
|---|--|
| Personal precautions, protective equipment and emergency procedures: | See Section 8 of the SDS for Personal Protective Equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep unauthorized personnel away. Ensure adequate ventilation. |
| Methods and material for containment and cleaning up: | Absorb with sand or other inert absorbent. Stop the flow of material, if this is without risk. |
| Environmental Precautions: | Avoid release to the environment. Do not contaminate water sources or sewer. Prevent further leakage or spillage if safe to do so. |

Section 7 – Handling And Storage

| | |
|--|--|
| Precautions for safe handling: | End-users should follow industry best practices for handling and using this product. Guidance may be found using the current version of ASTM Standard E1497-05: Standard Practice for Selection and Safe Use of Water-Miscible and Straight Oil Metal Removal Fluids Observe good industrial hygiene practices. Wear appropriate personal protective equipment. Do not expose to intense heat as product may expand and pressurize container. |
| Conditions for safe storage, including any incompatibilities: | Store in original tightly closed container. Avoid contact with oxidizing agents. Store away from incompatible materials. Shelf Life: 720 Days |



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 8 – Exposure Controls / Personal Protection

Exposure Limits

| Chemical name | Type | Exposure Limit Values | Source |
|-------------------------------------|------|-----------------------|---|
| Mineral oil - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (01 2017) |
| Mineral oil - Mist. | TWA | 5 mg/m ³ | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |
| Paraffin oils - Inhalable fraction. | TWA | 5 mg/m ³ | US. ACGIH Threshold Limit Values (03 2014) |
| Paraffin oils - Mist. | PEL | 5 mg/m ³ | US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000) (02 2006) |
| Paraffin oils - Mist. | TWA | 5 mg/m ³ | US. OSHA Table Z-1-A (29 CFR 1910.1000) (1989) |

- Protective Measures:** Use personal protective equipment as required.
- Respiratory Protection:** In case of inadequate ventilation use suitable respirator. Seek advice from supervisor on the company's respiratory protection standards.
- Eye Protection:** Wear safety glasses with side shields (or goggles).
- Skin and Body Protection:** Wear protective clothing appropriate for the risk of exposure. Be aware of other hazards such as rotating parts. Contact health and safety professional or manufacturer for specific information.
- Hygiene measures:** Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing to remove contaminants. Discard contaminated footwear that cannot be cleaned.

Section 9 – Physical And Chemical Properties

Appearance

- Physical state:** Liquid
- Form:** No data available.
- Color:** Black
- Odor:** Mild petroleum/solvent
- Odor threshold:** No data available.
- pH:** No data available.
- Melting point/freezing point:** No data available.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

| | |
|--|---|
| Initial boiling point and boiling range: | No data available. |
| Flash Point: | 196.11 °C (385.00 °F) |
| Evaporation rate: | No data available. |
| Flammability (solid, gas): | No data available. |
| Upper/lower limit on flammability or explosive limits | |
| Flammability limit - upper (%): | No data available. |
| Flammability limit - lower (%): | No data available. |
| Explosive limit - upper (%): | No data available. |
| Explosive limit - lower (%): | No data available. |
| Vapor pressure: | No data available. |
| Vapor density: | No data available. |
| Relative density: | 0.878 |
| Solubility(ies) | |
| Solubility in water: | Insoluble |
| Solubility (other): | No data available. |
| Partition coefficient (n-octanol/water): | No data available. |
| Auto-ignition temperature: | No data available. |
| Decomposition temperature: | No data available. |
| Viscosity: | 42.5 mm ² /s (40 °C, Measured) |
| Other information | |
| VOC: | 1.99 g/l (ASTM E 1868-10) |

Section 10 – Stability And Reactivity

| | |
|--|---|
| Reactivity: | Not reactive during normal use. |
| Chemical Stability: | Material is stable under normal conditions. |
| Possibility of hazardous reactions: | None under normal conditions. |
| Conditions to avoid: | Avoid heat or contamination. |
| Incompatible Materials: | No data available. |
| Hazardous Decomposition Products: | Thermal decomposition or combustion may liberate carbon oxides and other toxic gases or vapors. |

Section 11 – Toxicological Information

Information on likely routes of exposure

Ingestion: May be ingested by accident. Ingestion may cause irritation and malaise.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Inhalation: Inhalation is the primary route of exposure. In high concentrations, vapors, fumes or mists may irritate nose, throat and mucus membranes.

Skin Contact: Prolonged skin contact may cause redness and irritation.

Eye contact: Eye contact is possible and should be avoided.

Symptoms related to the physical, chemical and toxicological characteristics

Ingestion: No data available.

Inhalation: No data available.

Skin Contact: No data available.

Eye contact: No data available.

Information on toxicological effects

Acute toxicity (list all possible routes of exposure)

Oral

Product: Not classified for acute toxicity based on available data.

Dermal

Product: Not classified for acute toxicity based on available data.

Inhalation

Product: Not classified for acute toxicity based on available data.

Repeated dose toxicity

Product: No data available.

Skin Corrosion/Irritation

Product: No data available.

Serious Eye Damage/Eye Irritation

Product: No data available.

Respiratory or Skin Sensitization

Product: No data available.

Carcinogenicity

Product: No data available.

IARC Monographs on the Evaluation of Carcinogenic Risks to Humans

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified



Product Name: RIDGID Dark Thread Cutting Oil (United States)

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

No carcinogenic components identified

Germ Cell Mutagenicity

In vitro

Product: No data available.

In vivo

Product: No data available.

Reproductive toxicity

Product: No data available.

Specific Target Organ Toxicity - Single Exposure

Product: No data available.

Specific Target Organ Toxicity - Repeated Exposure

Product: No data available.

Aspiration Hazard

Product: No data available.

Other effects: No data available.

Section 12 – Ecological Information

General information: This product has not been evaluated for ecological toxicity or other environmental effects.

Section 13 – Disposal Consideration

Disposal instructions: Discharge, treatment, or disposal may be subject to national, state, or local laws. Dispose of waste at an appropriate treatment and disposal facility in accordance with applicable laws and regulations, and product characteristics at time of disposal. It is the responsibility of the product user or owner to determine at the time of disposal, which waste regulations must be applied.

Contaminated Packaging: Empty containers should be taken to an approved waste handling site for recycling or disposal.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 14 – Transportation Information

DOT

Not regulated.

IMDG

Not regulated.

IATA

Not regulated.

Section 15 – Regulatory Information

US Federal Regulations

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

None present or none present in regulated quantities.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

This product is classified as not hazardous per US OSHA 29CFR 1910.1200 (HazCom 2012)

SARA 313 (TRI Reporting)

None present or none present in regulated quantities.

US State Regulations

US. California Proposition 65

No ingredient regulated by CA Prop 65 present.



Product Name: RIDGID Dark Thread Cutting Oil (United States)

Section 16 – Other Information

Prepared by: Ridge Tool Company (Operating Standard 6-103)

Issue Date: May 2, 2018

Last Revision Date: March 27, 2017

RIDGE TOOL BELIEVES THE STATEMENTS, TECHNICAL INFORMATION AND RECOMMENDATIONS CONTAINED HEREIN ARE RELIABLE BUT THEY ARE GIVEN WITHOUT WARRANTY OR GUARANTEE OF ANY KIND, EXPRESSED OR IMPLIED, AND WE ASSUME NO RESPONSIBILITY FOR ANY LOSS, DAMAGE OR EXPENSE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THEIR USE.

FICHE SANTÉ/SÉCURITÉ

1 – Identification du produit et du fournisseur

Produit:
RIDGID Dark Thread Cutting Oil (Etats-Unis)

Réf. catalogue:
11471, 11491, 41590, 41600, 41610, 70830

Emploi recommandé:
Filetage mécanique

Restrictions d'utilisation:
Usage industriel seulement

Fournisseur:

| |
|--|
| <p><u>North America</u> Ridge Tool Company 400 Clark Street Elyria, Ohio 44035-6001 1-800-519-3456 (Etats-Unis) (du lundi au vendredi de 8h à 17h EST) Téléphone d'urgence: composer le 9-1-1 ou appeler les services d'urgences appropriés www.RIDGID.com</p> |
|--|

Date de publication: le 2 mai 2018

Révision I

Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)

2 – Identification des risques

Classe de Danger

Ce produit est classé comme non dangereux selon la norme américaine OSHA 29CFR 1910.1200 (HazCom 2012)

Éléments d'Étiquetage

| | |
|---------------------------------|-----------------------|
| Symbole de Danger: | Aucun symbole |
| Mention d'Avertissement: | Aucun mot indicateur. |
| Mention de Danger: | Non applicable |
| Conseils de Prudence | Non applicable |

Autres dangers ne donnant pas lieu à classement selon le SGH: Aucun(e).

3 – Composition du produit et renseignements sur ses ingrédients

Informations générales: Ce produit ne contient pas de silicone ou d'additifs chlorés.

Composant(s) dangereux:

| Désignation chimique | N° CAS | Concentration |
|----------------------|--------------|---------------|
| Mineral oil | Confidentiel | 20 - <50% |
| Paraffin oils | Confidentiel | 20 - <50% |

Les identités chimiques spécifiques et/ou les pourcentages exacts ont été refusées comme les secrets commerciaux.

4 – Premiers soins

| | |
|------------------------------|--|
| Ingestion: | Rincer soigneusement la bouche. Appeler un CENTRE ANTIPOISON/un médecin en cas de malaise. NE PAS faire vomir. |
| Inhalation: | Transporter à l'air frais. Appeler un CENTRE ANTIPOISON/un médecin en cas de malaise. |
| Contact avec la Peau: | Enlever les vêtements et les chaussures contaminés. Laver les zones de contact à l'eau et au savon. En cas d'irritation cutanée: consulter un médecin. |

Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)

Contact oculaire: Rincer avec soin à l'eau. En cas d'irritation, consulter un médecin. Continuer à rincer pendant au moins 15 minutes.

Symptômes/effets les plus importants, aigus et différés

Symptômes: Aucune information disponible.

Indication d'un besoin médical immédiat et traitement spécial requis

Traitement: Consulter un médecin en cas de symptômes.

5 – Lutte contre les incendies

Dangers d'Incendie Généraux: Aucun risque exceptionnel d'incendie et d'explosion.

Moyens d'extinction appropriés (et inappropriés)

Moyens d'extinction appropriés: Eau pulvérisée, brouillard, CO₂, agent chimique sec ou mousse standard. Choisir le moyen d'extinction de l'incendie en tenant compte d'autres produits chimiques éventuels.

Moyens d'extinction inappropriés: Ne pas lutter contre l'incendie au jet d'eau pour ne pas propager les flammes.

Dangers spécifiques dus au produit chimique: La chaleur peut provoquer l'explosion des récipients. En cas d'incendie, des gaz dangereux pour la santé peuvent se former.

Équipement de protection spécial et précautions pour les pompiers

Procédures spéciales de lutte contre l'incendie: Aucune information disponible.

Équipement de protection spécial pour le personnel préposé à la lutte contre le feu: Les pompiers doivent porter un équipement de protection standard, notamment vêtement ignifuge, casque à masque facial, gants, bottes en caoutchouc et, dans les espaces clos, un appareil respiratoire autonome.

Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)

6 – Lutte contre les déversements accidentels

Précautions individuelles, équipement de protection et procédures d'urgence:

Voir l'équipement de protection individuelle à la Section 8. Ne pas toucher les récipients endommagés ou le produit déversé à moins de porter les vêtements de protection appropriés. Maintenir à distance le personnel non autorisé. Assurer une ventilation adéquate.

Méthodes et matériel de confinement et de nettoyage:

Absorber le produit avec du sable ou un autre absorbant inerte. Arrêter le débit de matière, si ceci est sans risque.

Précautions pour la Protection de l'Environnement:

Éviter le rejet dans l'environnement. Ne pas contaminer les sources d'eau ou les égouts. Endiguer la fuite ou le déversement si cela peut être fait sans danger.

7 – Manipulation et stockage

Précautions à prendre pour une manipulation sans danger:

Les utilisateurs finaux devraient respecter les meilleures pratiques de l'industrie lors de la manipulation et l'utilisation de ce produit.

Les conseils peuvent être trouvés en utilisant la version actuelle de ASTM Standard E1497-05: Standard Practice for Selection and Safe Use of Water-Miscible and Straight Oil Metal Removal Fluids

Se conformer aux bonnes pratiques d'hygiène industrielle. Porter un équipement de protection personnelle approprié. N'exposez pas à la chaleur intense comme le produit peut développer et pressuriser le récipient.

Conditions d'un stockage sûr, y compris d'éventuelles incompatibilités:

Conserver dans le récipient d'origine hermétiquement fermé. Éviter tout contact avec des agents comburants. Conserver à l'écart des matières incompatibles. Durée de conservation: 720 jours

Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)

8 – Risques d'exposition et protection individuelle

Limites d'Exposition

| Désignation chimique | Type | Valeurs Limites d'Exposition | Source |
|-------------------------------------|------|------------------------------|---|
| Mineral oil - Brouillard | PEL | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (01 2017) |
| Mineral oil - Brouillard | TWA | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (1989) |
| Paraffin oils - Fraction inhalable. | TWA | 5 mg/m ³ | Les Etats-Unis. Valeurs de Limite de Seuil d'ACGIH (03 2014) |
| Paraffin oils - Brouillard | PEL | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (02 2006) |
| Paraffin oils - Brouillard | TWA | 5 mg/m ³ | Les Etats-Unis. La Table d'OSHA z-1 les Limites pour les Polluants Aériens (29 CFR 1910.1000) (1989) |

Mesures de protection:

Utiliser l'équipement de protection individuel requis.

Protection respiratoire:

En cas de ventilation insuffisante, porter un appareil respiratoire approprié. Demander l'avis du superviseur sur les normes de protection respiratoire de la société.

Protection des Yeux:

Porter des lunettes de sécurité à écrans latéraux ou des lunettes étanches.

Protection de la peau et du corps:

Porter des vêtements de protection appropriés au risque d'exposition. Soyez conscient des autres dangers tels que les pièces en rotation. Contacter un professionnel de la santé et de la sécurité ou un fabricant pour obtenir des informations spécifiques.

Mesures d'hygiène:

Toujours adopter de bonnes pratiques d'hygiène personnelle, telles que lavage après manipulation de la substance et avant de manger, de boire ou de fumer. Laver régulièrement la tenue de travail pour éliminer les contaminants. Mettre au rebut les chaussures qui ne peuvent pas être lavées.

Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)**9 – Caractéristiques physiques et chimiques****Aspect****État:**

Liquide

Forme:

Aucune information disponible.

Couleur:

Noir

Odeur:

Légère, Pétrole/solvant

Seuil de perception de l'odeur:

Aucune information disponible.

pH:

Aucune information disponible.

Point de fusion/point de congélation:

Aucune information disponible.

Température d'ébullition initiale et intervalle d'ébullition:

Aucune information disponible.

Point d'éclair:

196.11 °C (385.00 °F)

Taux d'évaporation:

Aucune information disponible.

Inflammabilité (solide, gaz):

Aucune information disponible.

Limites supérieures/inférieures d'inflammabilité ou d'explosivité**Limites d'inflammabilité - supérieure (%):**

Aucune information disponible.

Limites d'inflammabilité - inférieure (%):

Aucune information disponible.

Limites d'explosivité - supérieure (%) :

Aucune information disponible.

Limites d'explosivité - inférieure (%):

Aucune information disponible.

Pression de vapeur:

Aucune information disponible.

Densité de vapeur:

Aucune information disponible.

Densité relative:

0.878

Solubilités**Solubilité dans l'eau:**

Insoluble

Solubilité (autre):

Aucune information disponible.

Coefficient de partition (n-octanol/eau):

Aucune information disponible.

Température d'auto-inflammation:

Aucune information disponible.

Température de décomposition:

Aucune information disponible.

Viscosité:42.5 mm²/s (40 °C, Mesurée)**AUTRES INFORMATIONS****VOC:**

1.99 g/l (ASTM E 1868-10)

Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)

10 – Stabilité et réactivité

| | |
|--|---|
| Réactivité: | Non réactif pendant l'utilisation normale. |
| Stabilité Chimique: | Ce produit est stable dans des conditions normales. |
| Possibilité de Réactions Dangereuses: | Aucun(e)s dans les conditions normales. |
| Conditions à Éviter: | Éviter tout chauffage ou contamination. |
| Matières Incompatibles: | Aucune information disponible. |
| Produits de Décomposition Dangereux: | La décomposition thermique ou la combustion peut libérer des oxydes de carbone et d'autres gaz ou vapeurs toxiques. |

11 – Données toxicologiques

Informations sur les voies d'exposition probables

| | |
|------------------------------|---|
| Ingestion: | Peut être ingéré par accident. L'ingestion peut provoquer irritation et malaises. |
| Inhalation: | L'inhalation est la principale voie d'exposition. À concentration élevée, les vapeurs, émanations ou brouillards peuvent être irritants pour le nez, la gorge et les muqueuses. |
| Contact avec la Peau: | Le contact prolongé avec la peau peut entraîner des rougeurs et de l'irritation. |
| Contact oculaire: | Le contact oculaire est possible ; il doit être évité. |

Symptômes liés aux caractéristiques physiques, chimiques et toxicologiques

| | |
|------------------------------|--------------------------------|
| Ingestion: | Aucune information disponible. |
| Inhalation: | Aucune information disponible. |
| Contact avec la Peau: | Aucune information disponible. |
| Contact oculaire: | Aucune information disponible. |

Informations sur les effets toxicologiques

Toxicité aiguë (répertoire toutes les voies d'exposition possibles)

| | |
|-------------------------------|---|
| Ingestion Produit: | Non classé comme présentant une toxicité aiguë d'après les données disponibles. |
|-------------------------------|---|

Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)

Contact avec la peau**Produit:**

Non classé comme présentant une toxicité aiguë d'après les données disponibles.

Inhalation**Produit:**

Non classé comme présentant une toxicité aiguë d'après les données disponibles.

Toxicité à dose répétée**Produit:**

Aucune information disponible.

Corrosion ou Irritation de la Peau**Produit:**

Aucune information disponible.

Blessure ou Irritation Grave des Yeux**Produit:**

Aucune information disponible.

Sensibilisation Respiratoire ou Cutanée**Produit:**

Aucune information disponible.

Cancérogénicité**Produit:**

Aucune information disponible.

Monographies du CIRC sur l'évaluation des risques de cancérogénicité pour l'homme :

Aucun composant cancérigène identifié

États-Unis. Rapport du NTP (National Toxicology Program) sur les cancérogènes :

Aucun composant cancérigène identifié

ÉTATS-UNIS. Substances spécialement réglementées par l'OSHA (29 CFR 1910.1001-1050)

Aucun composant cancérigène identifié

Mutagénicité des Cellules Germinales**In vitro****Produit:**

Aucune information disponible.

In vivo**Produit:**

Aucune information disponible.

Toxicité pour la reproduction**Produit:**

Aucune information disponible.

Toxicité Spécifique au Niveau de l'Organe Cible- Exposition Unique**Produit:**

Aucune information disponible.

Toxicité Spécifique au Niveau de l'Organe Cible- Expositions répétées**Produit:**

Aucune information disponible.

Risque d'Aspiration**Produit:**

Aucune information disponible.

Autres effets:

Aucune information disponible.



Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)

12 – Données écologiques

Informations générales: Ce produit n'a pas été évalué pour la toxicité écologique ou d'autres effets de l'environnement.

13 – Recyclage

Instructions pour l'élimination: Le rejet, le traitement et l'élimination peuvent être soumis à des lois nationales, régionales ou locales. Éliminer les déchets dans une installation de traitement et d'élimination des déchets appropriée conformément aux lois et aux réglementations en vigueur et en fonction des caractéristiques du produit au moment de l'élimination. C'est la responsabilité de l'utilisateur de produit ou du propriétaire pour déterminer au moment de la disposition, qui se perdent les règlements doivent être appliqués.

Emballages Contaminés: Les conteneurs vides doivent être acheminés vers un site agréé pour le traitement des déchets à des fins de recyclage ou d'élimination.

14 – Transport

Ministère des transports des États-Unis (Department of Transportation, DOT)
Non réglementé.

IMDG
Non réglementé.

IATA
Non réglementé.

15 – Réglementation

Réglementations Fédérales des Etats-Unis

ÉTATS-UNIS. Substances spécialement réglementées par l'OSHA (29 CFR 1910.1001-1050)
Aucun présent ou aucun présent dans des quantités réglementées.

Superfund Amendments and Reauthorization Act de 1986 (SARA)

Catégories de danger

Ce produit est classé comme non dangereux selon la norme américaine OSHA 29CFR 1910.1200 (HazCom 2012)

SARA 313 (Déclaration au TRI)

Aucun présent ou aucun présent dans des quantités réglementées.

États-Unis - Réglementation des États

États-Unis - Proposition 65 de la Californie

Aucun composant réglementé par la Proposition 65 de la Californie n'est présent.

Produit: RIDGID Dark Thread Cutting Oil (Etats-Unis)

16 – Renseignements divers

Rédaction : Ridge Tool Company (OPSTD 6-103)

Date de publication : le 2 mai 2018

Dernière révision : le 27 mars 2017

Quoi que la société Ridge Tool estime que les affirmations, informations techniques et recommandations ci-présentes sont dignes de confiance, celles-ci ne sont données qu'à titre indicatif, sans aucune garantie expresse ou implicite, et ne sauraient engager la responsabilité civile de la société en cas de pertes, dommages et intérêts, voire frais directs ou indirects relevant de leur application.



HOJA DE DATOS DE SEGURIDAD

Sección 1 – Identificación del producto y la compañía

Nombre del producto:
RIDGID Dark Thread Cutting Oil (Estados Unidos)

No. de catálogo:
11471, 11491, 41590, 41600, 41610, 70830

Uso recomendado:
Para cortar roscas

Restricciones de utilización:
Uso industria seulement

Nombre de la compañía:

| |
|---|
| <p><u>North America</u> Ridge Tool Company 400 Clark Street Elyria, Ohio 44035-6001, EE. UU. Teléfono 1-800-519-3456 (EE. UU.) (8:00 a 17:00 hora estándar del este, lunes a viernes) Teléfono de emergencia: Llame al 9-1-1 o al teléfono de emergencia local www.RIDGID.com</p> |
|---|

Fecha de publicación: 2 de mayo de 2018

Révision: I



Producto: RIDGID Dark Thread Cutting Oil (Estados Unidos)

Sección 2 – Identificación de peligros

Clasificación de Peligro

Este producto está clasificado como no peligroso según la norma OSHA 29CFR 1910.1200 (HazCom 2012)

Elementos de la Etiqueta

- Símbolo de Peligro:** No hay símbolo
- Palabra de Advertencia:** No hay palabra de advertencia.
- Indicación de Peligro:** No aplicable
- Consejos de Prudencia** No aplicable

Otros peligros que no dan lugar a clasificación SGA: Ninguno.

Sección 3 – Composición e información sobre ingredientes

Información general: Este producto no contiene silicona o aditivos clorados.

Componente(s) peligroso(s):

| Determinación química | No. CAS | Concentración |
|-----------------------|--------------|---------------|
| Mineral oil | Confidencial | 20 - <50% |
| Paraffin oils | Confidencial | 20 - <50% |

Las identidades químicas específicas y/o los porcentajes exactos han sido retenidos como secretos de fabricación.

Sección 4 – Primeros auxilios

- Ingestión:** Enjuagar a fondo la boca. Llamar a un CENTRO DE TOXICOLOGÍA / médico si la persona se encuentra mal. NO provocar el vómito.
- Inhalación:** Trasladar al aire libre. Llamar a un CENTRO DE TOXICOLOGÍA / médico si la persona se encuentra mal.
- Contacto con la Piel:** Quitar ropa y zapatos contaminados. Lave las áreas de contacto con agua y jabón. En caso de irritación cutánea: Consultar a un médico.
- Contacto con los ojos:** Lave con abundante agua. Si aparece irritación, busque asistencia médica. Continuar enjuagando durante al menos 15 minutos.



Producto: RIDGID Dark Thread Cutting Oil (Estados Unidos)

Los síntomas y efectos más importantes, tanto los agudos como los retardados

Síntomas: No hay datos disponibles.

Indicación de asistencia médica inmediata y tratamiento especial necesario

Tratamiento: Obtenga atención médica en caso de síntomas.

Sección 5 – Medidas contra incendios

Riesgos Generales de Incendio: Ningún riesgo excepcional de incendio o explosión señalado.

Medios de extinción adecuados (y no adecuados)

Medios de extinción apropiados: Agua pulverizada, neblina, CO₂, polvos químicos, o espuma normal. Seleccione el medio de extinción más apropiado, teniendo en cuenta la posible presencia de otros productos químicos.

Medios de extinción no apropiados: No utilice chorro de agua, pues extendería el fuego.

Peligros específicos derivados de la sustancia química: El calor puede ocasionar explosión de los recipientes. En caso de incendio se pueden formar gases nocivos.

Equipo especial de protección y medias de precaución para los bomberos

Medidas especiales de lucha contra incendios: No hay datos disponibles.

Equipos de protección especial que debe llevar el personal de lucha contra incendios: Los bomberos deben utilizar un equipo de protección estándar incluyendo chaqueta ignífuga, casco con careta, guantes, botas de goma, y, en espacios cerrados, equipo de respiración autónomo (SCBA, según sus siglas en inglés).

Sección 6 – Medidas en caso de liberación accidental

Precauciones personales, equipo de protección y procedimientos de emergencia: Consulte la sección 8 de la FDS sobre equipo de protección personal. No toque los recipientes dañados o el material derramado a menos que esté usando ropa protectora adecuada. Mantener alejado al personal no autorizado. Asegúrese una ventilación apropiada.

Métodos y material de contención y de limpieza: Absorber con arena u otro absorbente inerte. Detenga el flujo del material, si esto no representa un riesgo.

Precauciones Relativas al Medio Ambiente: Evitar su liberación al medio ambiente. No contamine el drenaje o el alcantarillado. Impedir nuevos escapes o derrames de forma segura.



Producto: RIDGID Dark Thread Cutting Oil (Estados Unidos)

Sección 7 – Manipulación y almacenamiento

Precauciones para una manipulación segura:

Los usuarios finales deben seguir las mejores prácticas de la industria para el manejo y uso de este producto.

La dirección puede ser encontrada usando la versión corriente de ASTM Standard E1497-05: Standard Practice for Selection and Safe Use of Water-Miscible and Straight Oil Metal Removal Fluids

Respete las normas para una manipulación correcta de productos químicos. Use equipo protector personal adecuado. No exponga al calor intenso cuando el producto puede ampliar y presurizar el contenedor.

Condiciones de almacenamiento seguro, incluidas posibles incompatibilidades:

Guárdese en el recipiente original bien cerrado. Evite el contacto con agentes reductores. Consérvese alejado de materiales incompatibles. Vida útil: 720 días

Sección 8 – Controles contra la exposición: protección personal

Valores Límite

| Determinación química | Tipo | Valores Límite de Exposición | Fuente |
|------------------------------------|------|------------------------------|---|
| Mineral oil - Niebla | PEL | 5 mg/m3 | NOS. OSHA la tabla Z-1 límites para contaminantes del aire (29 CFR 1910.1000) (01 2017) |
| Mineral oil - Niebla | TWA | 5 mg/m3 | NOS. OSHA la Tabla Z-1-A (29 CFR 1910.1000) (1989) |
| Paraffin oils - Fracción inhalable | TWA | 5 mg/m3 | EE.UU. ACGIH Valores umbrales límite (03 2014) |
| Paraffin oils - Niebla | PEL | 5 mg/m3 | NOS. OSHA la tabla Z-1 límites para contaminantes del aire (29 CFR 1910.1000) (02 2006) |
| Paraffin oils - Niebla | TWA | 5 mg/m3 | NOS. OSHA la Tabla Z-1-A (29 CFR 1910.1000) (1989) |

Medidas de protección:

Utilizar los equipos de protección individual según las necesidades.

Protección respiratoria:

En caso de ventilación insuficiente, utilice un equipo respiratorio adecuado. Consulte al supervisor sobre la norma de la compañía de protección respiratoria.

Protección de los Ojos:

Use gafas de seguridad con protectores laterales (o gafas estancas).

Protección de la Piel y del Cuerpo:

Use ropa protectora apropiada para el riesgo de exposición. Tenga en cuenta otros peligros, como las piezas giratorias. Comuníquese con el profesional o fabricante de salud y seguridad para obtener información específica.

Producto: RIDGID Dark Thread Cutting Oil (Estados Unidos)

Medidas de higiene: Seguir siempre buenas medidas de higiene personal, como lavarse después de manipular el material y antes de comer, beber y/o fumar. Lave rutinariamente la ropa de trabajo para eliminar los contaminantes. Deseche el calzado contaminado que no se pueda limpiar.

Sección 9 – Propiedades físicas y químicas

Aspecto

| | |
|--|---|
| Forma/estado: | Líquido |
| Forma/Figura: | No hay datos disponibles. |
| Color: | Negro |
| Olor: | Ligero, petróleo/solvente |
| Umbral de olor: | No hay datos disponibles. |
| pH: | No hay datos disponibles. |
| Punto de fusión / Punto de congelación: | No hay datos disponibles. |
| Punto inicial de ebullición e intervalo de ebullición: | No hay datos disponibles. |
| Punto de inflamación: | 196.11 °C (385.00 °F) |
| Tasa de evaporación: | No hay datos disponibles. |
| Inflamabilidad (sólido, gas): | No hay datos disponibles. |
| Límites superior/inferior de inflamabilidad o de explosividad | |
| Límite superior de inflamabilidad (LSI) (%): | No hay datos disponibles. |
| Límite inferior de inflamabilidad (LII) (%): | No hay datos disponibles. |
| Límite superior de explosividad (%): | No hay datos disponibles. |
| Límite inferior de explosividad (%): | No hay datos disponibles. |
| Presión de vapor: | No hay datos disponibles. |
| Densidad del vapor: | No hay datos disponibles. |
| Densidad relativa: | 0.878 |
| Solubilidad(es) | |
| Solubilidad en agua: | Insoluble |
| Solubilidad (otra): | No hay datos disponibles. |
| Coefficiente de reparto (n-octanol/agua): | No hay datos disponibles. |
| Temperatura de autoignición: | No hay datos disponibles. |
| Temperatura de descomposición: | No hay datos disponibles. |
| Viscosidad: | 42.5 mm ² /s (40 °C, medido) |
| OTRA INFORMACIÓN | |
| VOC: | 1.99 g/l (ASTM E 1868-10) |

Producto: RIDGID Dark Thread Cutting Oil (Estados Unidos)

Sección 10 – Estabilidad y reactividad

| | |
|--|--|
| Reactividad: | No reactivo durante uso normal. |
| Estabilidad Química: | El material es estable bajo condiciones normales. |
| Posibilidad de Reacciones Peligrosas: | Ningunos en circunstancias normales. |
| Condiciones que Deben Evitarse: | Evite el calor o la contaminación. |
| Materiales Incompatibles: | No hay datos disponibles. |
| Productos de Descomposición Peligrosos: | La descomposición térmica o la combustión pueden liberar óxido de carbono u otros gases o vapores tóxicos. |

Sección 11 – Información toxicológica

Información sobre posibles vías de exposición

| | |
|-------------------------------|--|
| Ingestión: | Puede ingerirse accidentalmente. La ingestión puede causar irritación y malestar. |
| Inhalación: | La inhalación es la principal vía de exposición. En concentraciones altas, los vapores, humos o neblinas pueden irritar la nariz, la garganta y las membranas mucosas. |
| Contacto con la Piel: | El contacto prolongado con la piel puede causar rubor e irritación. |
| Contacto con los ojos: | El contacto con los ojos es posible y debe evitarse. |

Síntomas relacionados a las características físicas, químicas y toxicológicas

| | |
|-------------------------------|---------------------------|
| Ingestión: | No hay datos disponibles. |
| Inhalación: | No hay datos disponibles. |
| Contacto con la Piel: | No hay datos disponibles. |
| Contacto con los ojos: | No hay datos disponibles. |

Información sobre los efectos toxicológicos

Toxicidad aguda (listar todas las vías de exposición posibles)

| | |
|----------------------------|---|
| Ingestión Producto: | No clasificado en cuanto a toxicidad aguda con los datos disponibles. |
|----------------------------|---|

Producto: RIDGID Dark Thread Cutting Oil (Estados Unidos)

Contacto dermal

Producto: No clasificado en cuanto a toxicidad aguda con los datos disponibles.

Inhalación

Producto: No clasificado en cuanto a toxicidad aguda con los datos disponibles.

Toxicidad por dosis repetidas

Producto: No hay datos disponibles.

Corrosión/Irritación Cutáneas

Producto: No hay datos disponibles.

Lesiones Oculares Graves/Irritación Ocular

Producto: No hay datos disponibles.

Sensibilización de la Piel o Respiratoria

Producto: No hay datos disponibles.

Carcinogenicidad

Producto: No hay datos disponibles.

Monografías de IARC sobre la evaluación de los riesgos carcinogénicos para los humanos

No se identificaron componentes carcinogénicos

Programa Nacional de Toxicología de EUA (NTP). Reporte sobre carcinógenos

No se identificaron componentes carcinogénicos

EEUU. OSHA Sustancias específicamente reguladas (29 CFR 1910.1001-1050)

No se identificaron componentes carcinogénicos

Mutagenicidad en Células Germinales

En vitro

Producto: No hay datos disponibles.

En vivo

Producto: No hay datos disponibles.

Toxicidad para la reproducción

Producto: No hay datos disponibles.

Toxicidad Sistémica Específica de Órganos Diana- Exposición Única

Producto: No hay datos disponibles.

Toxicidad Sistémica Específica de Órganos Diana- Exposiciones Repetidas

Producto: No hay datos disponibles.

Peligro por Aspiración

Producto: No hay datos disponibles.

Otros síntomas: No hay datos disponibles.



Producto: RIDGID Dark Thread Cutting Oil (Estados Unidos)

Sección 12 – Información ecológica

Información general: Este producto no ha sido evaluado para la toxicidad ecológica u otros efectos ambientales.

Sección 13 – Consideraciones relativas a la eliminación

Instrucciones para la eliminación: Las actividades de descarga, tratamiento o eliminación pueden estar sujetos a leyes nacionales, estatales o locales. Elimine el residuo en una instalación adecuada de tratamiento y eliminación de acuerdo con las leyes y reglamentos correspondientes y características del producto en el momento de la eliminación. Es responsabilidad del usuario del producto o propietario para determinar en el momento de la disposición, que las regulaciones de residuos debe ser aplicado.

Envases Contaminados: Los contenedores vacíos deben ser llevados a un sitio de manejo aprobado para desechos, para el reciclado o eliminación.

Sección 14 – Información de transporte

DOT
No reglamentado.

IMDG
No reglamentado.

IATA
No reglamentado.

Sección 15 – Información sobre reglamentos

Reglamentos Federales de EE.UU.

EEUU. OSHA Sustancias específicamente reguladas (29 CFR 1910.1001-1050)
No están presentes, o no están presentes en las cantidades reguladas.

Ley de Enmiendas y Reautorización del Superfondo de 1986 (SARA)

Categorías de peligro
Este producto está clasificado como no peligroso según la norma OSHA 29CFR 1910.1200 (HazCom 2012)

SARA 313 (Reporte TRI, Acerca del Inventario de Liberación de Sustancias Tóxicas)
No están presentes, o no están presentes en las cantidades reguladas.



Producto: RIDGID Dark Thread Cutting Oil (Estados Unidos)

Regulaciones de un Estado de EUA

Proposición 65 del Estado de California, EUA

No hay presencia de ningún ingrediente regulado por CA Prop 65.

Sección 16 – Información adicional

Preparado por: Ridge Tool Company (OPSTD 6-103)

Fecha de emisión: 2 de mayo de 2018

Fecha de la última revisión: 27 de marzo de 2017

RIDGE TOOL CONSIDERA QUE TODAS LAS DECLARACIONES, INFORMACIÓN TÉCNICA Y RECOMENDACIONES EN EL PRESENTE DOCUMENTO SON CONFIABLES, PERO SE PRESENTAN SIN GARANTÍA ALGUNA, SEA EXPRESA O IMPLÍCITA, Y NO ASUMIMOS RESPONSABILIDAD ALGUNA POR PÉRDIDAS, DAÑOS O GASTOS, DIRECTOS O CONSECUENTES, QUE SURJAN DE SU USO.



Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909
US GHS

Synonyms: Ultra Low Sulfur Diesel; Low Sulfur Diesel; No. 2 Diesel; Motor Vehicle Diesel Fuel; Non-Road Diesel Fuel; Locomotive/Marine Diesel Fuel

*** Section 1 - Product and Company Identification ***

Manufacturer Information

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

Phone: 732-750-6000 Corporate EHS
Emergency # 800-424-9300 CHEMTREC
www.hess.com (Environment, Health, Safety Internet Website)

*** Section 2 - Hazards Identification ***

GHS Classification:

Flammable Liquids - Category 3
Skin Corrosion/Irritation – Category 2
Germ Cell Mutagenicity – Category 2
Carcinogenicity - Category 2
Specific Target Organ Toxicity (Single Exposure) - Category 3 (respiratory irritation, narcosis)
Aspiration Hazard – Category 1
Hazardous to the Aquatic Environment, Acute Hazard – Category 3

GHS LABEL ELEMENTS

Symbol(s)



Signal Word

DANGER

Hazard Statements

Flammable liquid and vapor.
Causes skin irritation.
Suspected of causing genetic defects.
Suspected of causing cancer.
May cause respiratory irritation.
May cause drowsiness or dizziness.
May be fatal if swallowed and enters airways.
Harmful to aquatic life.

Precautionary Statements

Prevention

Keep away from heat/sparks/open flames/hot surfaces. No smoking
Keep container tightly closed.
Ground/bond container and receiving equipment.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Use explosion-proof electrical/ventilating/lighting/equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Wear protective gloves/protective clothing/eye protection/face protection.
Wash hands and forearms thoroughly after handling.
Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Avoid breathing fume/mist/vapours/spray.

Response

In case of fire: Use water spray, fog or foam to extinguish.
IF ON SKIN (or hair): Wash with plenty of soap and water. Remove/Take off immediately all contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical advice/attention.
IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell.
If swallowed: Immediately call a poison center or doctor. Do NOT induce vomiting.
IF exposed or concerned: Get medical advice/attention.

Storage

Store in a well-ventilated place. Keep cool.
Keep container tightly closed.
Store locked up.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

* * * Section 3 - Composition / Information on Ingredients * * *

| CAS # | Component | Percent |
|------------|----------------------|---------|
| 68476-34-6 | Fuels, diesel, no. 2 | 100 |
| 91-20-3 | Naphthalene | <0.1 |

A complex mixture of hydrocarbons with carbon numbers in the range C9 and higher.

* * * Section 4 - First Aid Measures * * *

First Aid: Eyes

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

First Aid: Skin

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or with waterless hand cleanser. Obtain medical attention if irritation or redness develops. Thermal burns require immediate medical attention depending on the severity and the area of the body burned.

First Aid: Ingestion

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Monitor for breathing difficulties. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

First Aid: Inhalation

Remove person to fresh air. If person is not breathing, provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

* * * Section 5 - Fire Fighting Measures * * *

General Fire Hazards

See Section 9 for Flammability Properties.

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

Hazardous Combustion Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

Extinguishing Media

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, and other gaseous agents.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

Unsuitable Extinguishing Media

None

Fire Fighting Equipment/Instructions

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment. Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing. Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

* * * Section 6 - Accidental Release Measures * * *

Recovery and Neutralization

Carefully contain and stop the source of the spill, if safe to do so.

Materials and Methods for Clean-Up

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal. Caution, flammable vapors may accumulate in closed containers.

Emergency Measures

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Personal Precautions and Protective Equipment

Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

Environmental Precautions

Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Prevention of Secondary Hazards

None

* * * Section 7 - Handling and Storage * * *

Handling Procedures

Handle as a combustible liquid. Keep away from heat, sparks, excessive temperatures and open flame! No smoking or open flame in storage, use or handling areas. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents."

Storage Procedures

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks."

Incompatibilities

Keep away from strong oxidizers.

* * * Section 8 - Exposure Controls / Personal Protection * * *

Component Exposure Limits

Fuels, diesel, no. 2 (68476-34-6)

ACGIH: 100 mg/m³ TWA (inhalable fraction and vapor, as total hydrocarbons, listed under Diesel fuel)
Skin - potential significant contribution to overall exposure by the cutaneous route (listed under Diesel fuel)

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Naphthalene (91-20-3)

ACGIH: 10 ppm TWA
15 ppm STEL
Skin - potential significant contribution to overall exposure by the cutaneous route
OSHA: 10 ppm TWA; 50 mg/m³ TWA
NIOSH: 10 ppm TWA; 50 mg/m³ TWA
15 ppm STEL; 75 mg/m³ STEL

Engineering Measures

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

Personal Protective Equipment: Respiratory

A NIOSH/MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

Personal Protective Equipment: Hands

Gloves constructed of nitrile, neoprene, or PVC are recommended.

Personal Protective Equipment: Eyes

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

Personal Protective Equipment: Skin and Body

Chemical protective clothing such as of E.I. DuPont TyChem®, Saranex® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

* * * Section 9 - Physical & Chemical Properties * * *

| | | | |
|--|-------------------------------|--|---------------------------------|
| Appearance: | Clear, straw-yellow. | Odor: | Mild, petroleum distillate odor |
| Physical State: | Liquid | pH: | ND |
| Vapor Pressure: | 0.009 psia @ 70 °F (21 °C) | Vapor Density: | >1.0 |
| Boiling Point: | 320 to 690 °F (160 to 366 °C) | Melting Point: | ND |
| Solubility (H₂O): | Negligible | Specific Gravity: | 0.83-0.876 @ 60°F (16°C) |
| Evaporation Rate: | Slow; varies with conditions | VOC: | ND |
| Percent Volatile: | 100% | Octanol/H₂O Coeff.: | ND |
| Flash Point: | >125 °F (>52 °C) minimum | Flash Point Method: | PMCC |
| Upper Flammability Limit (UFL): | 7.5 | Lower Flammability Limit (LFL): | 0.6 |
| Burning Rate: | ND | Auto Ignition: | 494°F (257°C) |

* * * Section 10 - Chemical Stability & Reactivity Information * * *

Chemical Stability

This is a stable material.

Hazardous Reaction Potential

Will not occur.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Conditions to Avoid

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources.

Incompatible Products

Keep away from strong oxidizers.

Hazardous Decomposition Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

* * * Section 11 - Toxicological Information * * *

Acute Toxicity

A: General Product Information

Harmful if swallowed.

B: Component Analysis - LD50/LC50

Naphthalene (91-20-3)

Inhalation LC50 Rat >340 mg/m³ 1 h; Oral LD50 Rat 490 mg/kg; Dermal LD50 Rat >2500 mg/kg; Dermal LD50 Rabbit >20 g/kg

Potential Health Effects: Skin Corrosion Property/Stimulativeness

Practically non-toxic if absorbed following acute (single) exposure. May cause skin irritation with prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are repeatedly exposed.

Potential Health Effects: Eye Critical Damage/ Stimulativeness

Contact with eyes may cause mild irritation.

Potential Health Effects: Ingestion

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.

Potential Health Effects: Inhalation

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

Respiratory Organs Sensitization/Skin Sensitization

This product is not reported to have any skin sensitization effects.

Generative Cell Mutagenicity

This material has been positive in a mutagenicity study.

Carcinogenicity

A: General Product Information

Suspected of causing cancer.

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Studies have shown that similar products produce skin tumors in laboratory animals following repeated applications without washing or removal. The significance of this finding to human exposure has not been determined. Other studies with active skin carcinogens have shown that washing the animal's skin with soap and water between applications reduced tumor formation.

B: Component Carcinogenicity

Fuels, diesel, no. 2 (68476-34-6)

ACGIH: A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans (listed under Diesel fuel)

Naphthalene (91-20-3)

ACGIH: A4 - Not Classifiable as a Human Carcinogen

NTP: Reasonably Anticipated To Be A Human Carcinogen (Possible Select Carcinogen)

IARC: Monograph 82 [2002] (Group 2B (possibly carcinogenic to humans))

Reproductive Toxicity

This product is not reported to have any reproductive toxicity effects.

Specified Target Organ General Toxicity: Single Exposure

This product is not reported to have any specific target organ general toxicity single exposure effects.

Specified Target Organ General Toxicity: Repeated Exposure

This product is not reported to have any specific target organ general toxicity repeat exposure effects.

Aspiration Respiratory Organs Hazard

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

* * * Section 12 - Ecological Information * * *

Ecotoxicity

A: General Product Information

Keep out of sewers, drainage areas and waterways. Report spills and releases, as applicable, under Federal and State regulations.

B: Component Analysis - Ecotoxicity - Aquatic Toxicity

Fuels, diesel, no. 2 (68476-34-6)

Test & Species

| Test & Species | Conditions |
|--------------------------------|------------------------|
| 96 Hr LC50 Pimephales promelas | 35 mg/L [flow-through] |

Conditions

Naphthalene (91-20-3)

Test & Species

| Test & Species | Conditions |
|--------------------------------|-------------------------------|
| 96 Hr LC50 Pimephales promelas | 5.74-6.44 mg/L [flow-through] |
| 96 Hr LC50 Oncorhynchus mykiss | 1.6 mg/L [flow-through] |
| 96 Hr LC50 Oncorhynchus mykiss | 0.91-2.82 mg/L [static] |
| 96 Hr LC50 Pimephales promelas | 1.99 mg/L [static] |

Conditions

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

| | |
|---------------------------------|-----------------------------|
| 96 Hr LC50 Lepomis macrochirus | 31.0265 mg/L [static] |
| 72 Hr EC50 Skeletonema costatum | 0.4 mg/L |
| 48 Hr LC50 Daphnia magna | 2.16 mg/L |
| 48 Hr EC50 Daphnia magna | 1.96 mg/L [Flow through] |
| 48 Hr EC50 Daphnia magna | 1.09 - 3.4 mg/L [Static] |

Persistence/Degradability

No information available.

Bioaccumulation

No information available.

Mobility in Soil

No information available.

*** Section 13 - Disposal Considerations ***

Waste Disposal Instructions

See Section 7 for Handling Procedures. See Section 8 for Personal Protective Equipment recommendations.

Disposal of Contaminated Containers or Packaging

Dispose of contents/container in accordance with local/regional/national/international regulations.

*** Section 14 - Transportation Information ***

DOT Information

Shipping Name: Diesel Fuel

NA #: 1993 Hazard Class: 3 Packing Group: III

Placard:



*** Section 15 - Regulatory Information ***

Regulatory Information

Component Analysis

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65) and/or CERCLA (40 CFR 302.4).

Naphthalene (91-20-3)

CERCLA: 100 lb final RQ; 45.4 kg final RQ

SARA Section 311/312 – Hazard Classes

| | | | | |
|---------------------|-----------------------|-------------|-----------------------------------|-----------------|
| <u>Acute Health</u> | <u>Chronic Health</u> | <u>Fire</u> | <u>Sudden Release of Pressure</u> | <u>Reactive</u> |
| X | X | X | -- | -- |

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

SARA SECTION 313 - SUPPLIER NOTIFICATION

This product may contain listed chemicals below the de minimis levels which therefore are not subject to the supplier notification requirements of Section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372. If you may be required to report releases of chemicals listed in 40 CFR 372.28, you may contact Hess Corporate Safety if you require additional information regarding this product.

State Regulations

Component Analysis - State

The following components appear on one or more of the following state hazardous substances lists:

| Component | CAS | CA | MA | MN | NJ | PA | RI |
|----------------------|------------|-----|-----|-----|-----|-----|----|
| Fuels, diesel, no. 2 | 68476-34-6 | No | No | No | Yes | No | No |
| Naphthalene | 91-20-3 | Yes | Yes | Yes | Yes | Yes | No |

The following statement(s) are provided under the California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65):

WARNING! This product contains a chemical known to the state of California to cause cancer.

Component Analysis - WHMIS IDL

No components are listed in the WHMIS IDL.

Additional Regulatory Information


Component Analysis - Inventory

| Component | CAS # | TSCA | CAN | EEC |
|----------------------|------------|------|-----|--------|
| Fuels, diesel, no. 2 | 68476-34-6 | Yes | DSL | EINECS |
| Naphthalene | 91-20-3 | Yes | DSL | EINECS |

*** Section 16 - Other Information ***

NFPA® Hazard Rating

| | |
|------------|---|
| Health | 1 |
| Fire | 2 |
| Reactivity | 0 |



HMIS® Hazard Rating

| | | |
|----------|----|----------|
| Health | 1* | Slight |
| Fire | 2 | Moderate |
| Physical | 0 | Minimal |

*Chronic

Safety Data Sheet

Material Name: Diesel Fuel, All Types

SDS No. 9909

Key/Legend

ACGIH = American Conference of Governmental Industrial Hygienists; ADG = Australian Code for the Transport of Dangerous Goods by Road and Rail; ADR/RID = European Agreement of Dangerous Goods by Road/Rail; AS = Standards Australia; DFG = Deutsche Forschungsgemeinschaft; DOT = Department of Transportation; DSL = Domestic Substances List; EEC = European Economic Community; EINECS = European Inventory of Existing Commercial Chemical Substances; ELINCS = European List of Notified Chemical Substances; EU = European Union; HMIS = Hazardous Materials Identification System; IARC = International Agency for Research on Cancer; IMO = International Maritime Organization; IATA = International Air Transport Association; MAK = Maximum Concentration Value in the Workplace; NDSL = Non-Domestic Substances List; NFPA = National Fire Protection Association; NOHSC = National Occupational Health & Safety Commission; NTP = National Toxicology Program; STEL = Short-term Exposure Limit; TDG = Transportation of Dangerous Goods; TLV = Threshold Limit Value; TSCA = Toxic Substances Control Act; TWA = Time Weighted Average

Literature References

None

Other Information

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.

End of Sheet

SYNTHETIC LUBRICANTS, INC

1411 Callaghan Drive
Greenville, MI 48838

MATERIAL SAFETY DATA SHEET

Date of Preparation: February 09, 2012
Revision Number: 1
Emergency Telephone Number: (616) 754-1050

Product Name

THREADZIT™

Section I: Ingredients

Name of Ingredient: Proprietary Mixture

It should be noted, none of the constituents of the product are regarded as carcinogenic by any reference cited by OSHA under 29 CFR 1910.1200

Section II: Physical Data

| | |
|--------------------------------|--|
| Boiling Point: As Water | Vapor Density: As Water |
| Specific Gravity: 1.3 kg/l | Odor: Slight |
| Voltiles: Not Determined | pH Level: Slightly alkaline, pH 8.0 to 8.6 |
| Vapor Pressure: As Water | Solubility in Water: Completely Misable |
| Appearance: Clear Green Liquid | Freezing Point: 32° F |
| Evaporation Rate: As Water | |

Section III: Fire & Explosion Data

Flash Point: None
Flammable Limits: LFL & UFL Not Determined
Fire Fighting Equip: This water-based product will not burn. It will produce irritating and potentially toxic fumes containing oxides of nitrogen if exposed to extreme heat in air. If fire situation, respiratory protection should be considered.
Method Used: N/A
Extinguishing Media: Water based product

Section IV: Reactivity Data

Stability: (Conditions to Avoid) Stable under normal use conditions and in final use concentration.
Incompatibility: (Materials to Avoid) Product concentrate behaves as an aqueous solution. Product may be degraded by exposure to acid materials. Some components of the product concentrate are reactive with oxidizing or reducing materials but in the diluted working solution, this should not be a problem. Use on Magnesium is not recommended, therefore, Synthetic Lubricants, Inc is not responsible for customers that use this product on Magnesium.
Hazardous Decomposition Products: Under proper use conditions, this product is a very dilute solution of the active ingredients. Extremely small amount of oxides of nitrogen and carbon is released as the product is subjected to combustion situations.
Hazardous Polymerization: Will not occur.

Section V: Environmental & Disposal

Leaks & Spills: Dilute small spills with quantities of water and discard to the sanitary sewer. This product contains trace amount of residual alkanolamines. Large spills, contain with absorbent materials and institute clean-up efforts to recover the spilled liquid outlined in facility control plan.

Disposal Method: Follow all local, State, and Federal regulations.

Section VI: Health Hazard Data

Eyes: While the working solution is very dilute, the mixture may cause irritation to eyes. Eye contact should be avoided.

Skin Contact: Prolonged or repeated exposure to the stock solution may cause mild skin irritation in sensitive skin.

Ingestion: This product should not be taken internally. Provide the victim with large quantities of water and seek medical assistance.

Inhalation: Vapors may be released if stock solution of this product, as supplied, is heated above room temperature. The vapors may be irritating to respiratory passages and should be avoided.

Section VII: First Aid

Eyes: Irrigate with flowing water immediately for at least 15 minutes. Consult medical assistance.

Skin: Wash off stock solution residues with running water. Remove contaminated clothing and wash thoroughly before re-use.

Ingestion: If the victim has ingested the stock solution, administer large amounts of water and consider medical treatment.

Inhalation: If effects occur, remove to fresh air. Consult medical authorities. In vapor situations, use eye protection.

Section VIII: Handling Precautions

Exposure Guideline: OSHA has established an exposure standard for the active alkanolamine salts ingredient in the air which is: Threshold Limit Value (TLV): 3.00ppm

Under normal use conditions, this product is a very dilute aqueous solution which makes it unlikely that any user will experience the concentration level of alkanolamine derivatives approaching this OSHA limit.

Ventilation: General good ventilation should be acceptable for most situations. If vapors are generated in use conditions, local exhaust should be considered.

Respiratory Protection: None should be needed.

Skin Protection: Under normal use none should be needed. However, for sensitive individuals, gloves may be indicated when mixing solution.

Eye Protection: Eye contact with the stock product should be avoided. Wear appropriate eye protection.

Storage: Do not store the stock solution under freezing conditions. Store drums in a dry place in a temperature range of 40° to 100°Fahrenheit.

Transportation: Is not regulated as a hazardous material

Section IX: Additional Information

Avoid unnecessary skin and eye contact with stock product, as supplied. Avoid breathing any vapors that are generated by stock product. Do not contaminate food or drink. This product is not thought to be a serious carcinogenic threat. The active ingredient in this product has not been listed by OSHA, ACGIH, National Cancer Institute (NC), National Toxicology Program (NTC), the Environmental Protection Agency (USEPA) or the International Agency for Research on Cancer (IARC) as a carcinogen. While the concentrated form of the active ingredient in this product is a skin and inhalation irritant, the actual concentration found in the eventual working solution are very dilute reducing the hazard potential of the active alkanolamine ingredients to the level of insignificant.

Section X: Comments


The information in this MSDS was obtained from sources that we believe are reliable. However, this information is provided without any representation or warranty, express or implied, regarding the accuracy or correctness of this information.

The conditions or methods of handling, storage, use and disposal of this product are beyond our control and may be beyond our knowledge. For these and other reasons, we do not assume responsibility and expressly disclaim liability for loss, damage, or expense arising out of or in any way connected with the handling, storage, use or disposal of this product once sold and delivered.

HMIS III:

| | |
|---|----------------------|
| 1 | HEALTH |
| 0 | FLAMMABILITY |
| 0 | PHYSICAL HAZARD |
| C | PROTECTIVE EQUIPMENT |

NFPA HAZARD RATINGS:

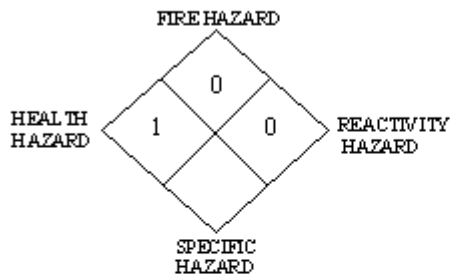

NFPA 704 ratings are subject to interpretation and are only intended for general identification of the level of the specific hazard. All information must be considered for proper safe handling of the material.

1. Identification

| | |
|---|--|
| Product identifier | LPS® Heavy-Duty Silicone (Aerosol) |
| Other means of identification | |
| Part Number | 01516, 51516 |
| Recommended use | An industrial lubricant designed to reduce mechanical wear and to extend equipment life of machinery where rubber and plastics are involved and where silicone can be tolerated. |
| Recommended restrictions | None known. |
| Manufacturer/Importer/Supplier/Distributor information | |
| Manufacturer | |
| Manufacturer | |
| Company name | ITW Pro Brands |
| Address | 4647 Hugh Howell Rd. Tucker, GA 30084 |
| Country | (U.S.A.) Tel: +1 770-243-8800 |
| In Case of Emergency | 1-800-424-9300 (inside U.S.) +001 703-527-3887 (outside U.S.) |
| Website | www.lpslabs.com |
| E-mail | lpssds@itwprobrands.com |

2. Hazard(s) identification

| | | |
|------------------------------|----------------------|---------------|
| Physical hazards | Flammable aerosols | Category 2 |
| | Gases under pressure | Liquefied gas |
| Health hazards | Not classified. | |
| Environmental hazards | Not classified. | |
| OSHA defined hazards | Not classified. | |

Label elements



| | |
|--|--|
| Signal word | Warning |
| Hazard statement | Flammable aerosol. Contains gas under pressure; may explode if heated. |
| Precautionary statement | |
| Prevention | Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. |
| Response | Wash hands after handling. |
| Storage | Protect from sunlight. Store in a well-ventilated place. Do not expose to temperatures exceeding 50°C/122°F. |
| Disposal | Dispose of waste and residues in accordance with local authority requirements. |
| Hazard(s) not otherwise classified (HNOC) | None known. |
| Supplemental information | None known. |

3. Composition/information on ingredients

Mixtures

| Chemical name | Common name and synonyms | CAS number | % |
|--|--------------------------|------------|---------|
| Naphtha, Petroleum, Hydrotreated Heavy | | 64742-48-9 | 10 - 20 |
| Petroleum Gases, Liquefied, Sweetened | | 68476-86-8 | 14.91 |
| 4-chloro-3-methylphenol Sodium Salt | | 15733-22-9 | 0.1 - 1 |
| Sodium Benzoate | | 532-32-1 | 0.1 - 1 |
| Sorbitan monooleate | | 1338-43-8 | 0.1 - 1 |

4. First-aid measures

| | |
|---|---|
| Inhalation | Move to fresh air. Call a physician if symptoms develop or persist. |
| Skin contact | Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse. |
| Eye contact | Rinse with water. Get medical attention if irritation develops and persists. |
| Ingestion | Not likely, due to the form of the product. In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth. |
| Most important symptoms/effects, acute and delayed | Skin irritation. May cause redness and pain. |
| Indication of immediate medical attention and special treatment needed | Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed. |
| General information | Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. |

5. Fire-fighting measures

| | |
|--|--|
| Suitable extinguishing media | Water spray. Water fog. Alcohol resistant foam. Dry chemical powder. Carbon dioxide (CO ₂). |
| Unsuitable extinguishing media | Do not use water jet as an extinguisher, as this will spread the fire. |
| Specific hazards arising from the chemical | Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed. |
| Special protective equipment and precautions for firefighters | Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. |
| Fire fighting equipment/instructions | In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions. ALWAYS stay away from tanks engulfed in flame. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out. |
| Specific methods | Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. Cool containers exposed to flames with water until well after the fire is out. In the event of fire and/or explosion do not breathe fumes. |
| General fire hazards | Flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame. |

6. Accidental release measures

| | |
|--|--|
| Personal precautions, protective equipment and emergency procedures | Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. |
|--|--|

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Use water spray to reduce vapors or divert vapor cloud drift. Isolate area until gas has dispersed. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in water.

Large Spills: Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Scoop up used absorbent into drums or other appropriate container. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use.

Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. When moving cylinders, even for short distances, use a cart (trolley, hand truck, etc.) designed to transport cylinders. Suck back of water into the container must be prevented. Do not allow backfeed into the container. Purge air from system before introducing gas. Use only properly specified equipment which is suitable for this product, its supply pressure and temperature. Contact your gas supplier if in doubt. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Level 1 Aerosol.

Conditions for safe storage, including any incompatibilities

Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Keep away from heat, sparks and open flame. This material can accumulate static charge which may cause spark and become an ignition source. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store in a well-ventilated place. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Stored containers should be periodically checked for general condition and leakage.

8. Exposure controls/personal protection

Occupational exposure limits

This mixture has no ingredients that have PEL, TLV, or other recommended exposure limit.

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves.

Other

Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Respiratory protection

In case of insufficient ventilation, wear suitable respiratory equipment.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state

Gas.

| | |
|---|---|
| Form | Aerosol. |
| Color | White. |
| Odor | Mild. |
| Odor threshold | Not established |
| pH | 9.1 |
| Melting point/freezing point | Not available. |
| Initial boiling point and boiling range | 212 °F (100 °C) |
| Flash point | 142.0 °F (61.1 °C) Tag Closed Cup |
| Evaporation rate | < 1 BuAc |
| Flammability (solid, gas) | Flammable gas. |
| Upper/lower flammability or explosive limits | |
| Flammability limit - lower (%) | 1.3 % |
| Flammability limit - upper (%) | 9.5 |
| Explosive limit - lower (%) | Not available. |
| Explosive limit - upper (%) | Not available. |
| Vapor pressure | 17.5 mm Hg @ 20°C |
| Vapor density | > 1 |
| Relative density | Not available. |
| Solubility(ies) | |
| Solubility (water) | Emulsifies |
| Partition coefficient (n-octanol/water) | < 1 |
| Auto-ignition temperature | > 572 °F (> 300 °C) |
| Decomposition temperature | Not available. |
| Viscosity | 2000 - 12000 cP @ 25°C |
| Other information | |
| Density | 7.82 |
| Explosive properties | Not explosive. |
| Heat of combustion | < 20 kJ/g |
| Oxidizing properties | Not oxidizing. |
| Percent volatile | Not established |
| Specific gravity | 0.92 - 0.94 |
| VOC | CARB 20 % per U.S. State and Federal Consumer Product Regulations. |

10. Stability and reactivity

| | |
|---|---|
| Reactivity | The product is stable and non-reactive under normal conditions of use, storage and transport. |
| Chemical stability | Material is stable under normal conditions. |
| Possibility of hazardous reactions | Hazardous polymerization does not occur. |
| Conditions to avoid | Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials. |
| Incompatible materials | Strong oxidizing agents. |
| Hazardous decomposition products | Carbon oxides. |

11. Toxicological information

Information on likely routes of exposure

| | |
|---------------------|--|
| Inhalation | Prolonged inhalation may be harmful. |
| Skin contact | No adverse effects due to skin contact are expected. |
| Eye contact | Direct contact with eyes may cause temporary irritation. |

Ingestion Expected to be a low ingestion hazard.
Symptoms related to the physical, chemical and toxicological characteristics Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity

| Components | Species | Test Results |
|---|---------|------------------------|
| Naphtha, Petroleum, Hydrotreated Heavy (CAS 64742-48-9) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 1900 mg/kg, 24 Hours |
| Inhalation | | |
| <i>Vapor</i> | | |
| LC50 | Rat | > 5 mg/l, 4 Hours |
| Oral | | |
| LD50 | Rat | 4800 mg/kg |
| Sodium Benzoate (CAS 532-32-1) | | |
| Acute | | |
| Dermal | | |
| LD50 | Rabbit | > 2000 mg/kg, 24 Hours |
| Oral | | |
| LD50 | Rat | 3500 mg/kg |

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.

Serious eye damage/eye irritation Direct contact with eyes may cause temporary irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not listed.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

Further information None known.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

| Components | Species | Test Results |
|--|---|----------------------------|
| Poly (Dimethylsiloxane) (CAS 63148-62-9) | | |
| Aquatic | | |
| Fish | LC50 Channel catfish (<i>Ictalurus punctatus</i>) | 2.36 - 4.15 mg/l, 96 hours |

| Components | Species | Test Results |
|------------|---------|--------------|
|------------|---------|--------------|

Sodium Benzoate (CAS 532-32-1)

Aquatic

Fish LC50 Fathead minnow (Pimephales promelas) > 100 mg/l, 96 hours

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

LPS® Heavy-Duty Silicone (Aerosol) < 1

Mobility in soil Not established.

Other adverse effects None known.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
D003: Waste Reactive material

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number UN1950
UN proper shipping name Aerosols, flammable
Transport hazard class(es)
Class 2.1
Subsidiary risk -
Label(s) 2.1
Packing group Not available.
Special precautions for user Not available.
Special provisions N82
Packaging exceptions 306

IATA

UN number UN1950
UN proper shipping name Aerosols, flammable
Transport hazard class(es)
Class 2.1
Subsidiary risk -
Label(s) 2.1
Packing group Not available.
Environmental hazards No.
Special precautions for user Not available.

IMDG

UN number UN1950
UN proper shipping name Aerosols, flammable
Transport hazard class(es)
Class 2.1
Subsidiary risk -
Label(s) 2.1
Packing group Not available.
Environmental hazards
Marine pollutant No.
EmS Not available.

Special precautions for user Not available.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

DOT



IATA; IMDG



General information

Avoid transport on vehicles where the load space is not separated from the driver's compartment. Ensure vehicle driver is aware of the potential hazards of the load and knows what to do in the event of an accident or an emergency. Before transporting product containers: Ensure that containers are firmly secured. Ensure cylinder valve is closed and not leaking. Ensure valve outlet cap nut or plug (where provided) is correctly fitted. Ensure valve protection device (where provided) is correctly fitted. Ensure adequate ventilation. Ensure compliance with applicable regulations.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical

Yes

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

California Proposition 65

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Naphtha, Petroleum, Hydrotreated Heavy (CAS 64742-48-9)
Petroleum Gases, Liquefied, Sweetened (CAS 68476-86-8)

International Inventories

| Country(s) or region | Inventory name | On inventory (yes/no)* |
|-----------------------------|--|-------------------------------|
| Australia | Australian Inventory of Chemical Substances (AICS) | Yes |
| Canada | Domestic Substances List (DSL) | Yes |
| Canada | Non-Domestic Substances List (NDSL) | No |
| China | Inventory of Existing Chemical Substances in China (IECSC) | Yes |
| Europe | European Inventory of Existing Commercial Chemical Substances (EINECS) | Yes |
| Europe | European List of Notified Chemical Substances (ELINCS) | No |
| Japan | Inventory of Existing and New Chemical Substances (ENCS) | No |
| Korea | Existing Chemicals List (ECL) | Yes |
| New Zealand | New Zealand Inventory | Yes |
| Philippines | Philippine Inventory of Chemicals and Chemical Substances (PICCS) | Yes |
| Taiwan | Taiwan Chemical Substance Inventory (TCSI) | Yes |
| United States & Puerto Rico | Toxic Substances Control Act (TSCA) Inventory | Yes |

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision


Issue date 10-15-2015

Revision date 08-27-2019

Version # 04

Disclaimer ITW Pro Brands cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Revision information Product and Company Identification: Disclosure Overrides
Physical & Chemical Properties: Multiple Properties

| | | |
|---|--|---------------------------|
|  | | Page: 1 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL VV838 | | Version: 1.9 |

29 CFR 1910.1200 (OSHA HazCom 2012)

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product identifier

Trade name : Valvoline™ SAE 80W-90
HP GEAR OIL


| | |
|---|---|
| <p>Details of the supplier of the safety data sheet Valvoline LLC 100 Valvoline Way Lexington, KY 40509 United States of America (USA) 1-800-TEAMVAL (1-800-832-6825)</p> <p>SDS@valvoline.com</p> | <p>Emergency telephone number 1-800-VALVOLINE (1-800-825-8654)</p> <p>Regulatory Information Number 1-800-TEAMVAL (1-800-832-6825)</p> <p>Product Information 1-800-TEAMVAL (1-800-832-6825)</p> |
|---|---|

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Skin sensitization : Category 1

GHS label elements

Hazard pictograms : 

Signal Word : Warning

Hazard Statements : May cause an allergic skin reaction.

Precautionary Statements : **Prevention:**
Avoid breathing dust/ fume/ gas/ mist/ vapors/ spray.
Contaminated work clothing must not be allowed out of the workplace.
Wear protective gloves.
Response:
IF ON SKIN: Wash with plenty of soap and water.
If skin irritation or rash occurs: Get medical advice/ attention.
Wash contaminated clothing before reuse.
Disposal:

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

Dispose of contents/ container to an approved waste disposal plant.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

| Chemical name | CAS-No. | Classification | Concentration (%) |
|--|------------|--|-------------------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | Not a hazardous substance or mixture. | >=60.00 - < 70.00 |
| OLEFINSULFIDE | 68937-96-2 | Skin Sens. 1B; H317 | >=1.50 - < 5.00 |
| React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched) | | Flam. Liq. 4; H227 Acute Tox. 4; H302 Eye Dam. 1; H318 Skin Sens. 1; H317 | >=0.50 - < 1.00 |

SECTION 4. FIRST AID MEASURES

- General advice : Move out of dangerous area.
Show this safety data sheet to the doctor in attendance.
Do not leave the victim unattended.
- If inhaled : If breathed in, move person into fresh air.
If unconscious, place in recovery position and seek medical advice.
If symptoms persist, call a physician.
- In case of skin contact : Remove contaminated clothing. If irritation develops, get medical attention.
If on skin, rinse well with water.
First aid is not normally required. However, it is recommended that exposed areas be cleaned by washing with soap and water.
Wash contaminated clothing before re-use.
- In case of eye contact : Flush eyes with water as a precaution.



| | |
|--|---------------------------|
| SAFETY DATA SHEET | Revision Date: 09/07/2018 |
| | Print Date: 10/28/2020 |
| | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL VV838 | Version: 1.9 |

Remove contact lenses.
Protect unharmed eye.
If eye irritation persists, consult a specialist.

If swallowed : Do not give milk or alcoholic beverages.
Never give anything by mouth to an unconscious person.
If symptoms persist, call a physician.

Most important symptoms and effects, both acute and delayed : No symptoms known or expected.
May cause an allergic skin reaction.

Notes to physician : No hazards which require special first aid measures.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Water spray
Foam
Carbon dioxide (CO2)
Dry chemical

Unsuitable extinguishing media : High volume water jet

Specific hazards during firefighting : Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous combustion products : carbon dioxide and carbon monoxide
Hydrocarbons
Sulphur oxides

Specific extinguishing methods :

Product is compatible with standard fire-fighting agents.

Further information : Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations.

Special protective equipment for firefighters : In the event of fire, wear self-contained breathing apparatus.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and : Use personal protective equipment.
Persons not wearing protective equipment should be excluded

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

- emergency procedures : from area of spill until clean-up has been completed.
- Environmental precautions : Prevent product from entering drains.
Prevent further leakage or spillage if safe to do so.
If the product contaminates rivers and lakes or drains inform respective authorities.
- Methods and materials for containment and cleaning up : Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust).
Keep in suitable, closed containers for disposal.
- Other information : Comply with all applicable federal, state, and local regulations.

SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Do not breathe vapours/dust.
Do not smoke.
Persons susceptible to skin sensitisation problems or asthma, allergies, chronic or recurrent respiratory disease should not be employed in any process in which this mixture is being used.
Container hazardous when empty.
Avoid exposure - obtain special instructions before use.
Avoid contact with skin and eyes.
Smoking, eating and drinking should be prohibited in the application area.
For personal protection see section 8.
Dispose of rinse water in accordance with local and national regulations.
- Conditions for safe storage : Keep container tightly closed in a dry and well-ventilated place.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

| Components | CAS-No. | Value type (Form of exposure) | Control parameters / Permissible concentration | Basis |
|--|------------|-------------------------------|--|----------|
| DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC | 64742-54-7 | TWA | 5 mg/m3 Mist | OSHA Z-1 |
| | | TWA | 5 mg/m3 | ACGIH |

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

| | | | | |
|--|--|-----|------------------------|-----------|
| | | | Inhalable fraction | |
| | | TWA | 5 mg/m3 Mist | OSHA P0 |
| | | TWA | 5 mg/m3 Mist | NIOSH REL |
| | | ST | 10 mg/m3 Mist | NIOSH REL |
| | | PEL | 5 mg/m3 particulate | CAL PEL |

Engineering measures : Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Personal protective equipment

Respiratory protection : Respiratory protection is not required under normal conditions of use.

Hand protection

Remarks : The suitability for a specific workplace should be discussed with the producers of the protective gloves.

Eye protection : Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.

Skin and body protection : Wear as appropriate:
Impervious clothing
Safety shoes
Choose body protection according to the amount and concentration of the dangerous substance at the work place.
Discard gloves that show tears, pinholes, or signs of wear.
Wear resistant gloves (consult your safety equipment supplier).

Hygiene measures : Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Physical state : liquid
 Colour : amber
 Odour : No data available
 Odour Threshold : No data available
 pH : No data available

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

| | |
|--|---|
| Melting point/freezing point | : No data available |
| Boiling point/boiling range | : > 424.9 °F / 218.3 °C (1013.333 hPa) |
| Flash point | : 394 - 480 °F / 201 - 249 °C Method: Cleveland open cup |
| Evaporation rate | : > 1 Ethyl Ether |
| Flammability (solid, gas) | : No data available |
| Upper explosion limit | : No data available |
| Lower explosion limit | : No data available |
| Vapour pressure | : < 0.1000000 mmHg |
| Relative vapour density | : > 1AIR=1 |
| Relative density | : 0.89 (60.00 °F) |
| Density | : 0.8916 g/cm ³ (15.56 °C) |
| Solubility(ies) | |
| Water solubility | : No data available |
| Solubility in other solvents | : No data available |
| Partition coefficient: n-octanol/water | : No data available |
| Thermal decomposition | : No data available |
| Viscosity | |
| Viscosity, dynamic | : No data available |
| Viscosity, kinematic | : 146 mm ² /s (40 °C) |
| Oxidizing properties | : No data available |

SECTION 10. STABILITY AND REACTIVITY

| | |
|--------------------|---|
| Reactivity | : No decomposition if stored and applied as directed. |
| Chemical stability | : Stable under recommended storage conditions. |

| | |
|--|---------------------------|
| SAFETY DATA SHEET | Revision Date: 09/07/2018 |
| | Print Date: 10/28/2020 |
| | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL VV838 | Version: 1.9 |

Possibility of hazardous reactions : Product will not undergo hazardous polymerization.

Conditions to avoid : None known.

Incompatible materials : Strong oxidizing agents

Hazardous decomposition products : carbon dioxide and carbon monoxide
Sodium oxides

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Inhalation
Skin contact
Eye Contact
Ingestion

Acute toxicity

Not classified based on available information.

Product:

Acute dermal toxicity : Acute toxicity estimate: > 5,000 mg/kg
Method: Calculation method

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Acute oral toxicity : LD50 (Rat): > 15 g/kg

Acute dermal toxicity : LD50 (Rabbit): > 5 g/kg


OLEFINSULFIDE:

Acute oral toxicity : LD50 (Rat): > 2,000 mg/kg
Method: OECD Test Guideline 401
Assessment: Not classified as acutely toxic by ingestion under GHS.
Remarks: No mortality observed at this dose.

Acute dermal toxicity : LD50 (Rat): > 2,000 mg/kg
Method: OECD Test Guideline 402
Assessment: Not classified as acutely toxic by dermal absorption under GHS.
Remarks: No mortality observed at this dose.

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Acute oral toxicity : LD50 (Rat): ca. 2,000 mg/kg
Method: OECD Test Guideline 401
Assessment: The component/mixture is classified as acute

| | | |
|--|--|---------------------------|
|  | | Page: 8 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL | | Version: 1.9 |
| VV838 | | |

oral toxicity, category 4.

Skin corrosion/irritation

Not classified based on available information.

Product:

Remarks : May cause skin irritation in susceptible persons.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Assessment : Slight, transient irritation
 Result : Slight, transient irritation

OLEFINSULFIDE:

Result : Mild skin irritation

Serious eye damage/eye irritation

Not classified based on available information.

Product:

Remarks : Vapours may cause irritation to the eyes, respiratory system and the skin.

Remarks : Unlikely to cause eye irritation or injury.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Result : No eye irritation
 Assessment : No eye irritation

OLEFINSULFIDE:

Result : Slight, transient irritation

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Result : Corrosive

Respiratory or skin sensitisation

Skin sensitisation

May cause an allergic skin reaction.

Respiratory sensitisation

Not classified based on available information.


Product:

Remarks : May cause allergic skin reaction.

Components:

OLEFINSULFIDE:

Test Type : Maximisation Test
 Species : Guinea pig
 Assessment : The product is a skin sensitiser, sub-category 1B.
 Method : OECD Test Guideline 406

| | | |
|--|--|---------------------------|
|  | | Page: 9 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL | | Version: 1.9 |
| VV838 | | |

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Test Type : Local lymph node assay
Species : Mouse
Method : OECD Test Guideline 429
Result : May cause sensitisation by skin contact.

Germ cell mutagenicity

Not classified based on available information.

Components:

OLEFINSULFIDE:

Genotoxicity in vitro : Test Type: in vitro assay
Result: Positive results were obtained in some in vitro tests.

Genotoxicity in vivo : Test Type: Micronucleus test
Species: Mouse
Cell type: Bone marrow
Method: OECD Test Guideline 474
Result: negative

Carcinogenicity

Not classified based on available information.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Carcinogenicity - Assessment : Classified based on DMSO extract content < 3% (Regulation (EC) 1272/2008, Annex VI, Part 3, Note L)

IARC No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

OSHA No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

NTP No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

Reproductive toxicity

Not classified based on available information.

STOT - single exposure

Not classified based on available information.

STOT - repeated exposure

Not classified based on available information.

Aspiration toxicity

Not classified based on available information.

Product:

No aspiration toxicity classification

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

No aspiration toxicity classification

**SAFETY DATA SHEET**

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

Further information**Product:**

Remarks : No data available

SECTION 12. ECOLOGICAL INFORMATION**Ecotoxicity****Product:**

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Acute aquatic toxicity Category 3; Harmful to aquatic life.

Long-term (chronic) aquatic hazard : Chronic aquatic toxicity Category 3; Harmful to aquatic life with long lasting effects.

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Toxicity to fish : LL50 (Fish): > 100 mg/l
Exposure time: 96 hToxicity to daphnia and other aquatic invertebrates : EL50 (Aquatic invertebrates): > 10,000 mg/l
Exposure time: 48 hToxicity to algae : EL50 (Algae, algal mat (Algae)): > 100 mg/l
Exposure time: 72 h

Toxicity to fish (Chronic toxicity) : NOEC (Fish): 10 mg/l

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Aquatic invertebrates): 10 mg/l

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Not classified based on available information.

Long-term (chronic) aquatic hazard : Not classified based on available information.

OLEFINSULFIDE:

Ecotoxicology Assessment

Short-term (acute) aquatic hazard : Harmful to aquatic life.

Long-term (chronic) aquatic hazard : Harmful to aquatic life with long lasting effects.

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Toxicity to fish : LL50 (Oncorhynchus mykiss (rainbow trout)): ca. 24 mg/l
 Exposure time: 96 h
 Test Type: static test
 Test substance: WAF
 Method: OECD Test Guideline 203

Toxicity to daphnia and other aquatic invertebrates : EL50 (Daphnia magna (Water flea)): ca. 91.4 mg/l
 Exposure time: 48 h
 Test Type: static test
 Test substance: WAF
 Method: OECD Test Guideline 202

Toxicity to algae : ErC50 (Pseudokirchneriella subcapitata (green algae)): 15 mg/l
 End point: Growth inhibition
 Exposure time: 96 h
 Test Type: static test
 Method: OECD Test Guideline 201

NOEC (Pseudokirchneriella subcapitata (green algae)): 3.3 mg/l
 End point: Growth inhibition
 Exposure time: 96 h
 Test Type: static test
 Method: OECD Test Guideline 201

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : NOEC (Daphnia magna (Water flea)): 0.12 mg/l
 Exposure time: 21 d
 End point: Reproduction Test
 Test Type: semi-static test
 Test substance: WAF
 Method: OECD Test Guideline 211

Ecotoxicology Assessment Short-term (acute) aquatic hazard : Toxic to aquatic life.


Long-term (chronic) aquatic hazard : Toxic to aquatic life with long lasting effects.

Persistence and degradability

Components:

OLEFINSULFIDE:

Biodegradability : Result: Not readily biodegradable.
 Biodegradation: 13 %
 Exposure time: 28 d
 Method: OECD Test Guideline 301B

| | | |
|--|--|---------------------------|
|  | | Page: 12 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL VV838 | | Version: 1.9 |

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Biodegradability : Result: Not readily biodegradable.
 Biodegradation: 7.4 %
 Exposure time: 28 d
 Method: Modified Sturm Test

No data available

Bioaccumulative potential

Components:

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAFFINIC:

Partition coefficient: n-octanol/water : log Pow: Expected > 7

React. prod. of bis(2-methylpentan-2-yl)dithiophosphoricacid + phosphorus oxide, propylene oxide and amines, C12-14-alkyl (branched):

Partition coefficient: n-octanol/water : Remarks: No data available

No data available

Mobility in soil

Components:

No data available

Other adverse effects

No data available

Product:

Additional ecological information : An environmental hazard cannot be excluded in the event of unprofessional handling or disposal., Harmful to aquatic life with long lasting effects.

Components:

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

General advice : The product should not be allowed to enter drains, water courses or the soil.
 Do not contaminate ponds, waterways or ditches with chemical or used container.
 Send to a licensed waste management company.

Dispose of in accordance with all applicable local, state and federal regulations.

Contaminated packaging : Empty remaining contents.
 Dispose of as unused product.
 Empty containers should be taken to an approved waste handling site for recycling or disposal.
 Do not re-use empty containers.



SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437

Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

SECTION 14. TRANSPORT INFORMATION

International transport regulations

REGULATION

| ID NUMBER | PROPER SHIPPING NAME | *HAZARD CLASS | SUBSIDIARY HAZARDS | PACKING GROUP | MARINE POLLUTANT / LTD. QTY. |
|-----------|----------------------|---------------|--------------------|---------------|------------------------------|
| | | | | | |

U.S. DOT - ROAD

| |
|---------------------|
| Not dangerous goods |
| |

CFR_RAIL_C

| |
|---------------------|
| Not dangerous goods |
| |

U.S. DOT - INLAND WATERWAYS

| |
|---------------------|
| Not dangerous goods |
| |

TDG_ROAD_C

| |
|---------------------|
| Not dangerous goods |
| |

TDG_RAIL_C

| |
|---------------------|
| Not dangerous goods |
| |

TDG_INWT_C

| |
|---------------------|
| Not dangerous goods |
| |

INTERNATIONAL MARITIME DANGEROUS GOODS

| |
|---------------------|
| Not dangerous goods |
| |

INTERNATIONAL AIR TRANSPORT ASSOCIATION - CARGO

| |
|---------------------|
| Not dangerous goods |
| |


INTERNATIONAL AIR TRANSPORT ASSOCIATION - PASSENGER

| |
|---------------------|
| Not dangerous goods |
| |

MX_DG

| |
|---------------------|
| Not dangerous goods |
| |

*ORM = ORM-D, CBL = COMBUSTIBLE LIQUID

| | | |
|---|--|---------------------------|
|  | | Page: 14 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL | | Version: 1.9 |
| VV838 | | |

| | |
|------------------|----|
| Marine pollutant | no |
|------------------|----|

Dangerous goods descriptions (if indicated above) may not reflect quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Respiratory or skin sensitisation

California Prop. 65

This product contains a chemical that is at or below California Propositions 65's "safe harbor level" for carcinogenicity as determined via a risk assessment. Therefore, the chemical is not required to be listed as a Prop 65 chemical on the SDS or label.

This product contains a chemical that is at or below California Propositions 65's "safe harbor level" for reproductive/developmental toxicity as determined via a risk assessment. Therefore, the chemical is not required to be listed as a Prop 65 chemical on the SDS or label.

The components of this product are reported in the following inventories:

- DSL : All components of this product are on the Canadian DSL
- AICS : On the inventory, or in compliance with the inventory
- ENCS : On the inventory, or in compliance with the inventory
- KECI : On the inventory, or in compliance with the inventory
- PICCS : On the inventory, or in compliance with the inventory
- IECSC : On the inventory, or in compliance with the inventory
- TSCA : On TSCA Inventory

TSCA list

No substances are subject to TSCA 12(b) export notification requirements.

SECTION 16. OTHER INFORMATION

SAFETY DATA SHEET

Revision Date: 09/07/2018

Print Date: 10/28/2020

SDS Number: R0091437


Valvoline™ SAE 80W-90 HP GEAR OIL

Version: 1.9

VV838

Further information

Revision Date: 09/07/2018
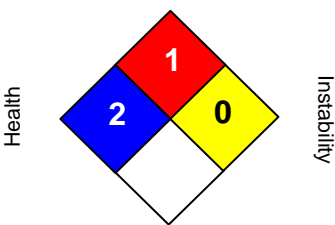
| NFPA: | HMIS III: | | | | | | |
|--|---|---------------|----------|---------------------|----------|------------------------|----------|
| <p style="text-align: center;">Flammability</p>  <p style="text-align: center;">Special hazard.</p> | <table border="1"> <tr> <td style="background-color: blue; color: white;">HEALTH</td> <td style="text-align: center;">2</td> </tr> <tr> <td style="background-color: red; color: white;">FLAMMABILITY</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="background-color: yellow; color: black;">PHYSICAL HAZARD</td> <td style="text-align: center;">0</td> </tr> </table> <p>0 = not significant, 1 = Slight, 2 = Moderate, 3 = High 4 = Extreme, * = Chronic</p> | HEALTH | 2 | FLAMMABILITY | 1 | PHYSICAL HAZARD | 0 |
| HEALTH | 2 | | | | | | |
| FLAMMABILITY | 1 | | | | | | |
| PHYSICAL HAZARD | 0 | | | | | | |

NFPA Flammable and Combustible Liquids Classification

Combustible Liquid Class IIIB

Full text of H-Statements

- H227 Combustible liquid.
- H302 Harmful if swallowed.
- H317 May cause an allergic skin reaction.
- H318 Causes serious eye damage.

Sources of key data used to compile the Safety Data Sheet

Valvoline internal data including own and sponsored test reports

The UNECE administers regional agreements implementing harmonised classification for labelling (GHS) and transport.

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This SDS has been prepared by Valvoline's Environmental Health and Safety Department (1-800-VALVOLINE).


List of abbreviations and acronyms that could be, but not necessarily are, used in this safety data sheet :

ACGIH : American Conference of Industrial Hygienists

BEI : Biological Exposure Index

CAS : Chemical Abstracts Service (Division of the American Chemical Society).

CMR : Carcinogenic, Mutagenic or Toxic for Reproduction

| | | |
|---|--|---------------------------|
|  | | Page: 16 |
| SAFETY DATA SHEET | | Revision Date: 09/07/2018 |
| | | Print Date: 10/28/2020 |
| | | SDS Number: R0091437 |
| Valvoline™ SAE 80W-90 HP GEAR OIL | | Version: 1.9 |
| VV838 | | |

FG : Food grade
 GHS : Globally Harmonized System of Classification and Labeling of Chemicals.
 H-statement : Hazard Statement
 IATA : International Air Transport Association.
 IATA-DGR : Dangerous Goods Regulation by the "International Air Transport Association" (IATA).

ICAO : International Civil Aviation Organization
 ICAO-TI (ICAO) : Technical Instructions by the "International Civil Aviation Organization"
 IMDG : International Maritime Code for Dangerous Goods
 ISO : International Organization for Standardization
 logPow : octanol-water partition coefficient
 LCxx : Lethal Concentration, for xx percent of test population
 LDxx : Lethal Dose, for xx percent of test population.
 ICxx : Inhibitory Concentration for xx of a substance
 Ecxx : Effective Concentration of xx
 N.O.S.: Not Otherwise Specified
 OECD : Organization for Economic Co-operation and Development
 OEL : Occupational Exposure Limit
 P-Statement : Precautionary Statement
 PBT : Persistent , Bioaccumulative and Toxic
 PPE : Personal Protective Equipment
 STEL : Short-term exposure limit
 STOT : Specific Target Organ Toxicity
 TLV : Threshold Limit Value
 TWA : Time-weighted average
 vPvB : Very Persistent and Very Bioaccumulative
 WEL : Workplace Exposure Level

CERCLA : Comprehensive Environmental Response, Compensation, and Liability Act
 DOT : Department of Transportation
 FIFRA : Federal Insecticide, Fungicide, and Rodenticide Act
 HMIRC : Hazardous Materials Information Review Commission
 HMIS : Hazardous Materials Identification System
 NFPA : National Fire Protection Association
 NIOSH : National Institute for Occupational Safety and Health
 OSHA : Occupational Safety and Health Administration
 PMRA : Health Canada Pest Management Regulatory Agency
 RTK : Right to Know
 WHMIS : Workplace Hazardous Materials Information System



SAFETY DATA SHEET

SDS ID NO.: 0127MAR019
Revision Date: 05/14/2015

1. IDENTIFICATION

Product Name: Marathon Petroleum Regular Unleaded Gasoline
Synonym: Conventional Regular Unleaded Gasoline
Chemical Family: Complex Hydrocarbon Substance
Recommended Use: Fuel.
Use Restrictions: All others.

Supplier Name and Address:
MARATHON PETROLEUM COMPANY LP
539 South Main Street
Findlay, OH 45840

SDS information: 1-419-421-3070
Emergency Telephone: 1-877-627-5463

2. HAZARD IDENTIFICATION

Classification

OSHA Regulatory Status

This chemical is considered hazardous according to the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

| | |
|--|-------------|
| Flammable liquids | Category 1 |
| Skin corrosion/irritation | Category 2 |
| Germ cell mutagenicity | Category 1B |
| Carcinogenicity | Category 1B |
| Reproductive toxicity | Category 2 |
| Specific target organ toxicity (single exposure) | Category 3 |
| Aspiration toxicity | Category 1 |
| Acute aquatic toxicity | Category 2 |
| Chronic aquatic toxicity | Category 2 |

Hazards Not Otherwise Classified (HNOC)

Static accumulating flammable liquid

Label elements

EMERGENCY OVERVIEW

Danger

EXTREMELY FLAMMABLE LIQUID AND VAPOR
May accumulate electrostatic charge and ignite or explode

May be fatal if swallowed and enters airways
Causes skin irritation
May cause genetic defects
May cause cancer
Suspected of damaging fertility or the unborn child
May cause respiratory irritation
May cause drowsiness or dizziness
Toxic to aquatic life with long lasting effects



Appearance Clear or Colored Liquid

Physical State Liquid

Odor Strong Hydrocarbon

Precautionary Statements - Prevention

Keep away from heat/sparks/open flames/hot surfaces. — No smoking
Keep container tightly closed
Ground/bond container and receiving equipment
Use explosion-proof electrical/ventilating/lighting/equipment
Use only non-sparking tools
Take precautionary measures against static discharge
Obtain special instructions before use
Do not handle until all safety precautions have been read and understood
Wear protective gloves/protective clothing/eye protection/face protection
Do not eat, drink or smoke when using this product
Do not breathe mist/vapors/spray
Use only outdoors or in a well-ventilated area
Wash hands thoroughly after handling
Avoid release to the environment

Precautionary Statements - Response

IF exposed or concerned: Get medical attention
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
If skin irritation occurs: Get medical attention
Wash contaminated clothing before reuse
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Call a POISON CENTER or doctor if you feel unwell
IF SWALLOWED: Immediately call a POISON CENTER or doctor
Do NOT induce vomiting
In case of fire: Use water spray, fog or regular foam for extinction

Precautionary Statements - Storage

Store in a well-ventilated place. Keep container tightly closed
Keep cool
Store locked up

Precautionary Statements - Disposal

Dispose of contents/container at an approved waste disposal plant

3. COMPOSITION/INFORMATION ON INGREDIENTS

Gasoline is a complex combination of hydrocarbons consisting of paraffins, cycloparaffins, aromatic and olefinic hydrocarbons having molecular chains ranging in length from four to ten carbons. May contain small amounts of dye and other additives (>0.02%) which are not considered hazardous at the concentrations used.

Composition Information:

| Name | CAS Number | Weight % |
|------------------------|------------|----------|
| Gasoline | 86290-81-5 | 100 |
| Toluene | 108-88-3 | 1-15 |
| Xylene (mixed isomers) | 1330-20-7 | 2-10 |
| 1,2,4-Trimethylbenzene | 95-63-6 | 1-5 |
| Benzene | 71-43-2 | 0.5-3.5 |
| n-Hexane | 110-54-3 | 0-3 |
| Ethylbenzene | 100-41-4 | 0.5-2.0 |
| Naphthalene | 91-20-3 | 0.1-0.5 |

4. FIRST AID MEASURES

First Aid Measures

- General advice** In case of accident or if you feel unwell, seek medical advice immediately (show directions for use or safety data sheet if possible).
- Inhalation:** Remove to fresh air. If not breathing, institute rescue breathing. If breathing is difficult, ensure airway is clear, give oxygen and continue to monitor. If heart has stopped, immediately begin cardiopulmonary resuscitation (CPR). Keep affected person warm and at rest. GET IMMEDIATE MEDICAL ATTENTION.
- Skin Contact:** Immediately wash exposed skin with plenty of soap and water while removing contaminated clothing and shoes. May be absorbed through the skin in harmful amounts. Get medical attention if irritation persists. Any injection injury from high pressure equipment should be evaluated immediately by a physician as potentially serious (See NOTES TO PHYSICIAN).

Place contaminated clothing in closed container until cleaned or discarded. If clothing is to be laundered, inform the person performing the operation of contaminant's hazardous properties. Destroy contaminated, non-chemical resistant footwear.
- Eye Contact:** Flush immediately with large amounts of water for at least 15 minutes. Eyelids should be held away from the eyeball to ensure thorough rinsing. Gently remove contacts while flushing. Get medical attention if irritation persists.
- Ingestion:** Do not induce vomiting because of danger of aspirating liquid into lungs, causing serious damage and chemical pneumonitis. If spontaneous vomiting occurs, keep head below hips, or if patient is lying down, turn body and head to side to prevent aspiration and monitor for breathing difficulty. Never give anything by mouth to an unconscious person. Keep affected person warm and at rest. GET IMMEDIATE MEDICAL ATTENTION.

Most important signs and symptoms, both short-term and delayed with overexposure

- Adverse Effects:** Acute: Headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue. Delayed: Dry skin and possible irritation with repeated or prolonged exposure.

Indication of any immediate medical attention and special treatment needed

NOTES TO PHYSICIAN:

INHALATION: This material (or a component) sensitizes the myocardium to the effects of sympathomimetic amines. Epinephrine and other sympathomimetic drugs may initiate cardiac arrhythmias in individuals exposed to this material. Administration of sympathomimetic drugs should be avoided.

SKIN: Leaks or accidents involving high-pressure equipment may inject a stream of material through the skin and initially produce an injury that may not appear serious. Only a small puncture wound may appear on the skin surface but, without proper treatment and depending on the nature, original pressure, volume, and location of the injected material, can compromise blood supply to an affected body part. Prompt surgical debridement of the wound may be necessary to prevent irreversible loss of function and/or the affected body part. High pressure injection injuries may be **SERIOUS SURGICAL EMERGENCIES**.

INGESTION: This material represents a significant aspiration and chemical pneumonitis hazard. Induction of emesis is not recommended.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

For small fires, Class B fire extinguishing media such as CO₂, dry chemical, foam (AFFF/ATC) or water spray can be used. For large fires, water spray, fog or foam (AFFF/ATC) can be used. Firefighting should be attempted only by those who are adequately trained and equipped with proper protective equipment.

Unsuitable extinguishing media

Do not use straight water streams to avoid spreading fire.

Specific hazards arising from the chemical

This product has been determined to be an extremely flammable liquid per the OSHA Hazard Communication Standard and should be handled accordingly. May accumulate electrostatic charge and ignite or explode. Vapors may travel along the ground or be moved by ventilation and ignited by many sources such as pilot lights, sparks, electric motors, static discharge, or other ignition sources at locations distant from material handling. Flashback can occur along vapor trail. For additional fire related information, see NFPA 30 or the North American Emergency Response Guide 128.

Hazardous combustion products

Smoke, carbon monoxide, and other products of incomplete combustion.

Explosion data

Sensitivity to Mechanical Impact No.

Sensitivity to Static Discharge Yes.

Special protective equipment and precautions for firefighters

Firefighters should wear full protective clothing and positive-pressure self-contained breathing apparatus (SCBA) with a full face-piece, as appropriate. Avoid using straight water streams. Water may be ineffective in extinguishing low flash point fires, but can be used to cool exposed surfaces. Avoid excessive water spray application. Water spray and foam (AFFF/ATC) must be applied carefully to avoid frothing and from as far a distance as possible. Keep run-off water out of sewers and water sources.

NFPA: Health 1 Flammability 3 Instability 0 Special Hazards -

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions: Keep public away. Isolate and evacuate area. Shut off source if safe to do so. Eliminate all ignition sources.

Protective Equipment: Use personal protection measures as recommended in Section 8.

Emergency Procedures: Advise authorities and National Response Center (800-424-8802) if the product has entered a water course or sewer. Notify local health and pollution control agencies, if appropriate.

Environmental precautions: Avoid release to the environment. Avoid subsoil penetration.

Methods and materials for containment: Contain liquid with sand or soil.

Methods and materials for cleaning up: Use suitable absorbent materials such as vermiculite, sand, or clay to clean up residual liquids. Recover and return free product to proper containers. When recovering free liquids ensure all equipment is grounded and bonded. Use only non-sparking tools.

7. HANDLING AND STORAGE

Safe Handling Precautions: NEVER SIPHON THIS PRODUCT BY MOUTH. Use appropriate grounding and bonding practices. Static accumulating flammable liquid. Bonding and grounding may be insufficient to eliminate the hazard from static electricity. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. No smoking. Avoid repeated and prolonged skin contact. Use personal protection measures as recommended in Section 8. Use only non-sparking tools. Do not cut, drill, grind or weld on empty containers since explosive residues may remain. Refer to applicable EPA, OSHA, NFPA and consistent state and local requirements.

Hydrocarbons are basically non-conductors of electricity and can become electrostatically charged during mixing, filtering, pumping at high flow rates or loading and transfer operations. If this charge reaches a sufficiently high level, sparks can form that may ignite the vapors of flammable liquids. Sudden release of hot organic chemical vapors or mists from process equipment operating under elevated temperature and pressure, or sudden ingress of air into vacuum equipment may result in ignition of vapors or mists without the presence of obvious ignition sources. Nozzle spouts must be kept in contact with the containers or tank during the entire filling operation.

Portable containers should never be filled while in or on a motor vehicle or marine craft. Containers should be placed on the ground. Static electric discharge can ignite fuel vapors when filling non-grounded containers or vehicles on trailers. The nozzle spout must be kept in contact with the container before and during the entire filling operation. Use only approved containers.

A buildup of static electricity can occur upon re-entry into a vehicle during fueling especially in cold or dry climate conditions. The charge is generated by the action of dissimilar fabrics (i.e., clothing and upholstery) rubbing across each other as a person enters/exits the vehicle. A flash fire can result from this discharge if sufficient flammable vapors are present. Therefore, do not get back in your vehicle while refueling.

Cellular phones and other electronic devices may have the potential to emit electrical charges (sparks). Sparks in potentially explosive atmospheres (including fueling areas such as gas stations) could cause an explosion if sufficient flammable vapors are present. Therefore, turn off cellular phones and other electronic devices when working in potentially explosive atmospheres or keep devices inside your vehicle during refueling.

High-pressure injection of any material through the skin is a serious medical emergency even though the small entrance wound at the injection site may not initially appear serious. These injection injuries can occur from high-pressure equipment such as paint spray or grease or guns, fuel injectors, or pinhole leaks in hoses or hydraulic lines and should all be considered serious. High pressure injection injuries may be SERIOUS SURGICAL EMERGENCIES (See First Aid Section 4).

Storage Conditions: Store in properly closed containers that are appropriately labeled and in a cool, well-ventilated area.

Incompatible materials Strong oxidizing agents.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

| Name | ACGIH TLV | OSHA PELs: | OSHA - Vacated PELs | NIOSH IDLH |
|-------------------------------------|---|--|---|------------|
| Gasoline 86290-81-5 | 300 ppm TWA 500 ppm STEL | - | 300 ppm TWA 900 mg/m ³ TWA 500 ppm STEL 1500 mg/m ³ STEL | - |
| Toluene 108-88-3 | 20 ppm TWA | TWA: 200 ppm Ceiling: 300 ppm | 100 ppm TWA 375 mg/m ³ TWA 150 ppm STEL 560 mg/m ³ STEL | 500 ppm |
| Xylene (mixed isomers) 1330-20-7 | 100 ppm TWA 150 ppm STEL | TWA: 100 ppm TWA: 435 mg/m ³ | 100 ppm TWA 435 mg/m ³ TWA 150 ppm STEL 655 mg/m ³ STEL | 900 ppm |
| 1,2,4-Trimethylbenzene 95-63-6 | 25 ppm TWA | - | 25 ppm TWA 125 mg/m ³ TWA | - |
| Benzene 71-43-2 | 0.5 ppm TWA 2.5 ppm STEL Skin - potential significant contribution to overall exposure by the cutaneous route | TWA: 10 ppm (applies to industry segments exempt from the benzene standard at 29 CFR 1910.1028) TWA: 1 ppm STEL: 5 ppm (see 29 CFR 1910.1028) | 25 ppm Ceiling 1 ppm TWA 5 ppm STEL | 500 ppm |
| n-Hexane 110-54-3 | 50 ppm TWA Skin - potential significant contribution to overall exposure by the cutaneous route | TWA: 500 ppm TWA: 1800 mg/m ³ | 50 ppm TWA 180 mg/m ³ TWA | 1100 ppm |
| Ethylbenzene 100-41-4 | 20 ppm TWA | TWA: 100 ppm TWA: 435 mg/m ³ | 100 ppm TWA 435 mg/m ³ TWA 125 ppm STEL 545 mg/m ³ STEL | 800 ppm |
| Naphthalene 91-20-3 | 10 ppm TWA Skin - potential significant contribution to overall exposure by the cutaneous route | TWA: 10 ppm TWA: 50 mg/m ³ | 10 ppm TWA 50 mg/m ³ TWA 15 ppm STEL 75 mg/m ³ STEL | 250 ppm |

Notes: The manufacturer has voluntarily elected to provide exposure limits contained in OSHA's 1989 air contaminants standard in its SDSs, even though certain of those exposure limits were vacated in 1992.

Engineering measures: Local or general exhaust required in an enclosed area or when there is inadequate ventilation. Use mechanical ventilation equipment that is explosion-proof.

Personal protective equipment

Eye protection: Use goggles or face-shield if the potential for splashing exists.

Skin and body protection: Use nitrile rubber, viton or PVA gloves for repeated or prolonged skin exposure. Glove suitability is based on workplace conditions and usage. Contact the glove manufacturer for specific advice on glove selection and breakthrough times.

Respiratory protection: Approved organic vapor chemical cartridge or supplied air respirators should be worn for exposures to any components exceeding the established exposure limits. Observe respirator assigned protection factors (APFs) criteria cited in federal OSHA 29 CFR 1910.134. Self-contained breathing apparatus should be used for fire fighting.

Hygiene measures: Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes and clothing.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

| | |
|-----------------------|-------------------------|
| Physical State | Liquid |
| Appearance | Clear or Colored Liquid |
| Color | Clear or Colored |
| Odor | Strong Hydrocarbon |
| Odor Threshold | No available data. |

| <u>Property</u> | <u>Values (Method)</u> |
|--|------------------------|
| Melting Point / Freezing Point | No available data. |
| Initial Boiling Point / Boiling Range | 32-225 °C / 90-437 °F |
| Flash Point | -45.5 °C / -50 °F |
| Evaporation Rate | No available data. |
| Flammability (solid, gas) | Not applicable. |
| Flammability Limit in Air (%) | |
| Upper Flammability Limit: | 7.6 |
| Lower Flammability Limit: | 1.4 |
| Vapor Pressure | 403-776 mm Hg@ 100°F |
| Vapor Density | 3-4 |
| Specific Gravity / Relative Density | 0.70-0.77 |
| Water Solubility | Negligible |
| Solubility in other solvents | No available data. |
| Partition Coefficient | 2.13-4.5 |
| Decomposition temperature: | No available data. |
| pH: | Not applicable |
| Autoignition Temperature | C.A. 257 °C / 495 °F |
| Kinematic Viscosity | No available data. |
| Dynamic Viscosity | No available data. |
| Explosive Properties | No available data. |
| Softening Point | No available data. |
| VOC Content (%) | 100% |
| Density | 5.9-6.3 lbs/gal |
| Bulk Density | Not applicable. |

10. STABILITY AND REACTIVITY

| | |
|--|--|
| <u>Reactivity</u> | The product is non-reactive under normal conditions. |
| <u>Chemical stability</u> | The material is stable at 70°F, 760 mmHg pressure. |
| <u>Possibility of hazardous reactions</u> | None under normal processing. |
| <u>Hazardous polymerization</u> | Will not occur. |
| <u>Conditions to avoid</u> | Excessive heat, sources of ignition, open flame. |
| <u>Incompatible materials</u> | Strong oxidizing agents. |
| <u>Hazardous decomposition products</u> | None known under normal conditions of use. |

11. TOXICOLOGICAL INFORMATION

Potential short-term adverse effects from overexposures

| | |
|--------------------|---|
| Inhalation | Irritating to the respiratory system. May cause drowsiness or dizziness. Breathing high concentrations of this material in a confined space or by intentional abuse can cause irregular heartbeats which can cause death. |
| Eye contact | Causes mild eye irritation. |

Skin contact Causes skin irritation. Effects may become more serious with repeated or prolonged contact. May be absorbed through the skin in harmful amounts.

Ingestion May be fatal if swallowed or vomited and enters airways. May cause irritation of the mouth, throat and gastrointestinal tract.

Acute Toxicological data

| Name | Oral LD50 | Dermal LD50 | Inhalation LC50 |
|-------------------------------------|--------------------|-----------------------|------------------------------------|
| Gasoline 86290-81-5 | 14000 mg/kg (Rat) | > 2000 mg/kg (Rabbit) | > 5.2 mg/L (Rat) 4 h |
| Toluene 108-88-3 | > 2000 mg/kg (Rat) | 8390 mg/kg (Rabbit) | 12.5 mg/L (Rat) 4 h |
| Xylene (mixed isomers) 1330-20-7 | > 2000 mg/kg (Rat) | > 2000 mg/kg (Rabbit) | > 5.04 mg/L (Rat) 4 h |
| 1,2,4-Trimethylbenzene 95-63-6 | 3280 mg/kg (Rat) | > 3160 mg/kg (Rabbit) | 18,000 mg/m ³ (Rat) 4 h |
| Benzene 71-43-2 | > 2000 mg/kg (Rat) | > 5000 mg/kg (Rabbit) | > 20 mg/l (Rat) 4 h |
| n-Hexane 110-54-3 | 15000 mg/kg (Rat) | 3000 mg/kg (Rabbit) | 48000 ppm (Rat) 4 h |
| Ethylbenzene 100-41-4 | > 2000 mg/kg (Rat) | > 2000 mg/kg (Rabbit) | 17.2 mg/L (Rat) 4 h |
| Naphthalene 91-20-3 | 490 mg/kg (Rat) | > 2000 mg/kg (Rabbit) | > 340 mg/m ³ (Rat) 1 h |

Delayed and immediate effects as well as chronic effects from short and long-term exposure

BENZENE: Studies of workers exposed to benzene show clear evidence that overexposure can cause cancer and other diseases of the blood forming organs including Acute Myelogenous Leukemia (AML), and Aplastic Anemia (AA), an often fatal disease. Some studies suggest overexposure to benzene may also be associated with Myelodysplastic Syndrome (MDS). Findings from a case control study of workers exposed to benzene was reported during the 2009 Benzene Symposium in Munich included an increase in Acute Myeloid Leukemias and Non-Hodgkins Lymphoid Neoplasms (NHLN) of the subtype follicular lymphoma (FL) in some occupational categories. Some studies of workers exposed to benzene have shown an association with increased rates of chromosome aberrations in circulating lymphocytes. One study of women workers exposed to benzene suggested a weak association with irregular menstruation. However, other studies of workers exposed to benzene have not demonstrated clear evidence of an effect on fertility or reproductive outcome in humans. Benzene can cross the placenta and affect the developing fetus. Cases of AA have been reported in the offspring of persons severely overexposed to benzene. Studies in laboratory animals indicate that prolonged, repeated exposure to high levels of benzene vapor can cause bone marrow suppression and cancer in multiple organ systems. Studies in laboratory animals show evidence of adverse effects on male reproductive organs following high levels of exposure but no significant effects on reproduction have been observed. Embryotoxicity has been reported in studies of laboratory animals but effects were limited to reduced fetal weight and minor skeletal variations. Benzene has been classified as a proven human carcinogen by OSHA and a Group 1 (Carcinogenic to Humans) material by IARC. The current proposed IARC classification for benzene is summarized as follows: Sufficient evidence for Acute Myeloid Leukemia; limited evidence for Acute Lymphatic Leukemia, Chronic Lymphatic Leukemia, Non-Hodgkin Lymphoma, and Multiple Myeloma.

NAPHTHAS: In a large epidemiological study on over 15,000 employees at several petroleum refineries and amongst residents located near these refineries, no increased risk of kidney cancer was observed in association with gasoline exposures (a similar material). In a similar study, no increased risk of kidney cancer was observed among petroleum refinery workers, but there was a slight trend in the incidence of kidney cancers among service station employees, especially after a 30-year latency period. Altered mental state, drowsiness, peripheral motor neuropathy, irreversible brain damage (so-called Petrol Sniffer's Encephalopathy), delirium, seizures, and sudden death have been reported from repeated overexposure to some hydrocarbon solvents, naphthas, and gasoline.

ISOPARAFFINS: Studies in laboratory animals have shown that long-term exposure to similar materials (isoparaffins) can cause kidney damage and kidney cancer in male laboratory rats. However, in-depth research indicates that these findings are unique to the male rat, and that these effects are not relevant to humans.

TOLUENE: Case studies of persons abusing toluene suggest isolated incidences of adverse effects on the fetus including birth defects. Abuse of toluene at high concentrations (e.g., glue sniffing and solvent abuse) has been associated with adverse effects on the liver, kidney and nervous system, and can cause CNS depression, cardiac arrhythmias, and death. Studies of workers indicate longterm exposure may be related to impaired color vision and hearing. Some studies of workers suggest longterm exposure may be related to neurobehavioral and cognitive changes. Some of these effects have been observed in laboratory animals following repeated exposure to high levels of toluene. Several studies of workers suggest longterm exposure may be related to small increases in spontaneous abortions and changes in some gonadotropic hormones. However, the weight of evidence does not indicate toluene is a reproductive hazard to humans. Studies in laboratory animals indicate some changes in reproductive organs following high levels of exposure, but no significant effects on mating performance or reproduction were observed. Case studies of persons abusing toluene suggest isolated incidences of adverse effects on the fetus including birth defects. Findings in laboratory animals have been largely negative. Positive findings include small increases in minor skeletal and visceral malformations and developmental delays following very high levels of maternal exposure. Studies of workers indicate long-term exposure may be related to effects on the liver, kidney and blood, but these appear to be limited to changes in serum enzymes and decreased leukocyte counts. Adverse effects on the liver, kidney, thymus and nervous system were observed in animal

studies following very high levels of exposure. The relevance of these findings to humans is not clear at this time.

ETHYLBENZENE: Findings from a 2-year inhalation study in rodents conducted by NTP were as follows: Effects were observed only at the highest exposure level (750 ppm). At this level the incidence of renal tumors was elevated in male rats (tubular carcinomas) and female rats (tubular adenomas). The incidence of tumors was also elevated in male mice (alveolar and bronchiolar carcinomas) and female mice (hepatocellular carcinomas). IARC has classified ethyl benzene as "possibly carcinogenic to humans" (Group 2B). Studies in laboratory animals indicate some evidence of post-implantation deaths following high levels of maternal exposure. The relevance of these findings to humans is not clear at this time. Studies in laboratory animals indicate limited evidence of renal malformations, resorptions, and developmental delays following high levels of maternal exposure with evidence of maternal toxicity. The relevance of these findings to humans is not clear at this time. Studies in laboratory animals have demonstrated evidence of ototoxicity (hearing loss) following exposure levels as low as 300 ppm for 5 days. Studies in laboratory animals indicate some evidence of adverse effects on the liver, kidney, thyroid, and pituitary gland.

XYLENES, ALL ISOMERS: Overexposure to xylene may cause upper respiratory tract irritation, headache, cyanosis, blood serum changes, nervous system damage and narcosis. Effects may be increased by the use of alcoholic beverages. Evidence of liver and kidney impairment were reported in workers recovering from a gross overexposure. Effects from Prolonged or Repeated Exposure: Impaired neurological function was reported in workers exposed to solvents including xylene. Studies in laboratory animals have shown evidence of impaired hearing following high levels of exposure. Studies in laboratory animals suggest some changes in reproductive organs following high levels of exposure but no significant effects on reproduction were observed. Studies in laboratory animals indicate skeletal and visceral malformations, developmental delays, and increased fetal resorptions following extremely high levels of maternal exposure with evidence of maternal toxicity. The relevance of these observations to humans is not clear at this time. Adverse effects on the liver, kidney, bone marrow (changes in blood cell parameters) were observed in laboratory animals following high levels of exposure. The relevance of these observations to humans is not clear at this time.

C9 AROMATIC HYDROCARBONS: A developmental inhalation study was conducted in laboratory mice. Increased implantation losses, reduced fetal weights, delayed ossification and an increased incidence of cleft palate were observed at the highest exposure level (1,500 ppm). This exposure level was extremely toxic to pregnant female mice (44% mortality). Reduced fetal body weights were also observed at 500 ppm. A multi-generation reproduction inhalation study was conducted in laboratory rats. Reductions in pup weights, pup weight gain, litter size, and pup survival were observed at 1,500 ppm, an exposure level at which significant maternal toxicity was observed. Reduced pup weight gain was also observed at 500 ppm.

NAPHTHALENE: Severe jaundice, neurotoxicity (kernicterus) and fatalities have been reported in young children and infants as a result of hemolytic anemia from overexposure to naphthalene. Persons with glucose 6-phosphate dehydrogenase (G6PD) deficiency are more prone to the hemolytic effects of naphthalene. Adverse effects on the kidney have been reported in persons overexposed to naphthalene but these effects are believed to be a consequence of hemolytic anemia, and not a direct effect. Hemolytic anemia has been observed in laboratory animals exposed to naphthalene. Laboratory rodents exposed to naphthalene vapor for 2 years (lifetime studies) developed non-neoplastic and neoplastic tumors and inflammatory lesions of the nasal and respiratory tract. Cataracts and other adverse effects on the eye have been observed in laboratory animals exposed to high levels of naphthalene. Findings from a large number of bacterial and mammalian cell mutation assays have been negative. A few studies have shown chromosomal effects (elevated levels of Sister Chromatid Exchange or chromosomal aberrations) in vitro. Naphthalene has been classified as Possibly Carcinogenic to Humans (2B) by IARC, based on findings from studies in laboratory animals.

N-HEXANE: Long-term or repeated exposure to n-hexane can cause peripheral nerve

damage. Initial symptoms are numbness of the fingers and toes. Also, motor weakness can occur in the digits, but may also involve muscles of the arms, thighs and forearms. The onset of these symptoms may be delayed for several months to a year after the beginning of exposure. Testicular atrophy and partial to full loss of the germ cell line were observed in sub-chronic high-dose inhalation studies of laboratory rodents. These effects appeared irreversible. Rodent reproduction studies have shown evidence of reduced fetal weight but no frank malformations.

PENTANES: Studies of pentane isomers in laboratory animals indicate exposure to extremely high levels (roughly 10 vol.%) may induce cardiac arrhythmias (irregular heartbeats) which may be serious or fatal.

CARBON MONOXIDE: is a chemical asphyxiant with no warning properties (such as odor). At 400-500 ppm for 1 hour headache and dyspnea may occur. If activity is increased, symptoms of overexposure may include nausea, irritability, increased respiration, tinnitus, sweating, chest pain, confusion, impaired judgement, dizziness, weakness, drowsiness, ataxia, irregular heart beat, cyanosis and pallor. Levels in excess of 1000 ppm can result in collapse, loss of consciousness, respiratory failure and death. Extremely high concentrations (12,800 ppm) can cause immediate unconsciousness and death in 1-3 minutes. Repeated anoxia can lead to central nervous system damage and peripheral neuropathy, with loss of sensation in the fingers, amnesia, and mental deterioration and possible congestive heart failure. Damage may also occur to the fetus, lung, liver, kidney, spleen, cardiovascular system and other organs.

COMBUSTION ENGINE EXHAUST: Chronic inhalation studies of gasoline engine exhaust in mice, rats and hamsters did not produce any carcinogenic effects. Condensates/extracts of gasoline engine exhaust produced an increase in tumors compared to controls when testing by skin painting, subcutaneous injection, intratracheal instillation or implantation into the lungs.

Adverse effects related to the physical, chemical and toxicological characteristics

Signs & Symptoms Nausea, vomiting, signs of nervous system depression: headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue.

Sensitization Not expected to be a skin or respiratory sensitizer.

Mutagenic effects May cause genetic defects.

Carcinogenicity Cancer designations are listed in the table below.

| Name | ACGIH (Class) | IARC (Class) | NTP | OSHA |
|-------------------------------------|----------------------------------|--------------------------------|---|------------------|
| Gasoline 86290-81-5 | Confirmed animal carcinogen (A3) | Possibly Carcinogenic (2B) | Not Listed | Not Listed |
| Toluene 108-88-3 | Not Classifiable (A4) | Not Classifiable (3) | Not Listed | Not Listed |
| Xylene (mixed isomers) 1330-20-7 | Not Classifiable (A4) | Not Classifiable (3) | Not Listed | Not Listed |
| 1,2,4-Trimethylbenzene 95-63-6 | Not Listed | Not Listed | Not Listed | Not Listed |
| Benzene 71-43-2 | Confirmed human carcinogen (A1) | Carcinogenic to humans (1) | Known to be human carcinogen | Known carcinogen |
| n-Hexane 110-54-3 | Not Listed | Not Listed | Not Listed | Not Listed |
| Ethylbenzene 100-41-4 | Confirmed animal carcinogen (A3) | Possible human carcinogen (2B) | Not Listed | Not Listed |
| Naphthalene 91-20-3 | Confirmed animal carcinogen (A3) | Possible human carcinogen (2B) | Reasonably anticipated to be a human carcinogen | Not Listed |

Reproductive toxicity Suspected of damaging fertility or the unborn child.

Specific Target Organ Toxicity (STOT) - single exposure Respiratory system. Central nervous system.

Specific Target Organ Toxicity (STOT) - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed or vomited and enters airways.

12. ECOLOGICAL INFORMATION

Ecotoxicity This product should be considered toxic to aquatic organisms, with the potential to cause long lasting adverse effects in the aquatic environment.

| Name | Algae/aquatic plants | Fish | Toxicity to Microorganisms | Crustacea |
|-------------------------------------|------------------------------------|--|----------------------------|--|
| Gasoline 86290-81-5 | 72-hr EC50 = 56 mg/l Algae | 96-hr LC50 = 11 mg/l Rainbow trout (static) | - | 48-hr LC50 = 7.6 mg/l Daphnia magna |
| Toluene 108-88-3 | 72-hr EC50 = 12.5 mg/l Algae | 96-hr LC50 <= 10 mg/l Rainbow trout | - | 48-hr EC50 = 5.46-9.83 mg/l Daphnia magna 48-hr EC50 = 11.5 mg/l Daphnia magna (Static) |
| Xylene (mixed isomers) 1330-20-7 | 72-hr EC50 = 11 mg/l Algae | 96-hr LC50 = 8 mg/l Rainbow trout | - | 48-hr LC50 = 3.82 mg/l Daphnia magna |
| 1,2,4-Trimethylbenzene 95-63-6 | - | 96-hr LC50 = 7.19-8.28 mg/l Fathead minnow (flow-through) | - | 48-hr EC50 = 6.14 mg/L Daphnia magna |
| Benzene 71-43-2 | 72-hr EC50 = 29 mg/l Algae | 96-hr LC50 = 5.3 mg/l Rainbow trout (flow-through) | - | 48-hr EC50 = 8.76-15.6 mg/l Daphnia magna (Static) |
| n-Hexane 110-54-3 | - | 96-hr LC50 = 2.5 mg/l Fathead minnow | - | - |
| Ethylbenzene 100-41-4 | 72-hr EC50 = 1.7-7.6 mg/l Algae | 96-hr LC50 = 4 mg/L Rainbow trout | - | 48-hr EC50 = 1-4 mg/L Daphnia magna |
| Naphthalene 91-20-3 | - | 96-hr LC50 = 0.91-2.82 mg/l Rainbow trout (static) 96-hr LC50 = 1.99 mg/l Fathead minnow (static) | - | 48-hr LC50 = 1.6 mg/l Daphnia magna |

Persistence and degradability Expected to be inherently biodegradable.

Bioaccumulation Has the potential to bioaccumulate.

Mobility in soil May partition into air, soil and water.

Other adverse effects No information available.

13. DISPOSAL CONSIDERATIONS

Description of Waste Residues

This material may be a flammable liquid waste.

Safe Handling of Wastes

Handle in accordance with applicable local, state, and federal regulations. Use personal protection measures as required. Use appropriate grounding and bonding practices. Use only non-sparking tools. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. No smoking.

Disposal of Wastes / Methods of Disposal

The user is responsible for determining if any discarded material is a hazardous waste (40 CFR 262.11). Dispose of in accordance with federal, state and local regulations.

Methods of Contaminated Packaging Disposal

Empty containers should be completely drained and then discarded or recycled, if possible. Do not cut, drill, grind or weld on empty containers since explosive residues may be present. Dispose of in accordance with federal, state and local regulations.

14. TRANSPORT INFORMATION

DOT (49 CFR 172.101):

UN Proper shipping name: Gasoline
 UN/Identification No: UN 1203
 Transport Hazard Class(es): 3
 Packing group: II

TDG (Canada):

UN Proper shipping name: Gasoline
 UN/Identification No: UN 1203
 Transport Hazard Class(es): 3
 Packing group: II

15. REGULATORY INFORMATION

US Federal Regulatory Information:

US TSCA Chemical Inventory Section 8(b): This product and/or its components are listed on the TSCA Chemical Inventory.

EPA Superfund Amendment & Reauthorization Act (SARA):

SARA Section 302: This product does not contain any component(s) included on EPA's Extremely Hazardous Substance (EHS) List.

| Name | CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs |
|------------------------|---|
| Gasoline | NA |
| Toluene | NA |
| Xylene (mixed isomers) | NA |
| 1,2,4-Trimethylbenzene | NA |
| Benzene | NA |
| n-Hexane | NA |
| Ethylbenzene | NA |
| Naphthalene | NA |

SARA Section 304: This product may contain component(s) identified either as an EHS or a CERCLA Hazardous substance which in case of a spill or release may be subject to SARA reporting requirements:

| Name | CERCLA/SARA - Hazardous Substances and their Reportable Quantities |
|------------------------|--|
| Gasoline | NA |
| Toluene | 1000 lb final RQ 454 kg final RQ |
| Xylene (mixed isomers) | 100 lb final RQ 45.4 kg final RQ |
| 1,2,4-Trimethylbenzene | NA |
| Benzene | 10 lb final RQ 4.54 kg final RQ |
| n-Hexane | 5000 lb final RQ 2270 kg final RQ |
| Ethylbenzene | 1000 lb final RQ 454 kg final RQ |

| | |
|-------------|-------------------------------------|
| Naphthalene | 100 lb final RQ 45.4 kg final RQ |
|-------------|-------------------------------------|

SARA: The following EPA hazard categories apply to this product:

- Acute Health Hazard
- Chronic Health Hazard
- Fire Hazard

SARA Section 313: This product may contain component(s), which if in exceedance of the de minimus threshold, may be subject to the reporting requirements of SARA Title III Section 313 Toxic Release Reporting (Form R).

| Name | CERCLA/SARA 313 Emission reporting: |
|------------------------|-------------------------------------|
| Gasoline | None |
| Toluene | 1.0 % de minimis concentration |
| Xylene (mixed isomers) | 1.0 % de minimis concentration |
| 1,2,4-Trimethylbenzene | None |
| Benzene | 0.1 % de minimis concentration |
| n-Hexane | 1.0 % de minimis concentration |
| Ethylbenzene | 0.1 % de minimis concentration |
| Naphthalene | 0.1 % de minimis concentration |

State and Community Right-To-Know Regulations:

The following component(s) of this material are identified on the regulatory lists below:

Gasoline

- Louisiana Right-To-Know: Not Listed.
- California Proposition 65: Not Listed.
- New Jersey Right-To-Know: SN 0957
- Pennsylvania Right-To-Know: Present
- Massachusetts Right-To Know: Present
- Florida Substance List: Not Listed.
- Rhode Island Right-To-Know: Not Listed.
- Michigan Critical Materials Register List: Not Listed.
- Massachusetts Extraordinarily Hazardous Substances: Not Listed.
- California - Regulated Carcinogens: Not Listed.
- Pennsylvania RTK - Special Hazardous Substances: Not Listed.
- New Jersey - Special Hazardous Substances: Carcinogen; Flammable - third degree
- New Jersey - Environmental Hazardous Substances List: SN 0957 TPQ: 10000 lb (Under N.J.A.C. 7:1G, environmental hazardous substances in mixtures such as gasoline or new and used petroleum oil may be reported under these categories)
- Illinois - Toxic Air Contaminants: Present
- New York - Reporting of Releases Part 597 - List of Hazardous Substances: Not Listed.

Toluene

- Louisiana Right-To-Know: Not Listed.
- California Proposition 65: Developmental toxicity, initial date 1/1/91
Female reproductive toxicity, initial date 8/7/09
- New Jersey Right-To-Know: SN 1866
- Pennsylvania Right-To-Know: Environmental hazard
- Massachusetts Right-To Know: Present
- Florida Substance List: Not Listed.
- Rhode Island Right-To-Know: Toxic (skin); Flammable (skin)
- Michigan Critical Materials Register List: 100 lb Annual usage threshold
- Massachusetts Extraordinarily Hazardous Substances: Not Listed.
- California - Regulated Carcinogens: Not Listed.
- Pennsylvania RTK - Special Hazardous Substances: Not Listed.
- New Jersey - Special Hazardous Substances: Flammable - third degree; Teratogen

| | |
|---|--|
| New Jersey - Environmental Hazardous Substances List: | SN 1866 TPQ: 500 lb |
| Illinois - Toxic Air Contaminants | Present |
| New York - Reporting of Releases Part 597 - List of Hazardous Substances: | 1000 lb RQ (air); 1 lb RQ (land/water) |
| Xylene (mixed isomers) | |
| Louisiana Right-To-Know: | Not Listed. |
| California Proposition 65: | Not Listed. |
| New Jersey Right-To-Know: | SN 2014 |
| Pennsylvania Right-To-Know: | Environmental hazard |
| Massachusetts Right-To Know: | Present |
| Florida Substance List: | Not Listed. |
| Rhode Island Right-To-Know: | Toxic (skin); Flammable (skin) |
| Michigan Critical Materials Register List: | 100 lb Annual usage threshold all isomers |
| Massachusetts Extraordinarily Hazardous Substances: | Not Listed. |
| California - Regulated Carcinogens: | Not Listed. |
| Pennsylvania RTK - Special Hazardous Substances: | Not Listed. |
| New Jersey - Special Hazardous Substances: | Flammable - third degree |
| New Jersey - Environmental Hazardous Substances List: | SN 2014 TPQ: 500 lb |
| Illinois - Toxic Air Contaminants | Present |
| New York - Reporting of Releases Part 597 - List of Hazardous Substances: | 1000 lb RQ (air); 1 lb RQ (land/water) |
| 1,2,4-Trimethylbenzene | |
| Louisiana Right-To-Know: | Not Listed. |
| California Proposition 65: | Not Listed. |
| New Jersey Right-To-Know: | SN 1929 |
| Pennsylvania Right-To-Know: | Present |
| Massachusetts Right-To Know: | Present |
| Florida Substance List: | Not Listed. |
| Rhode Island Right-To-Know: | Toxic |
| Michigan Critical Materials Register List: | Not Listed. |
| Massachusetts Extraordinarily Hazardous Substances: | Not Listed. |
| California - Regulated Carcinogens: | Not Listed. |
| Pennsylvania RTK - Special Hazardous Substances: | Not Listed. |
| New Jersey - Special Hazardous Substances: | Not Listed. |
| New Jersey - Environmental Hazardous Substances List: | Not Listed. |
| Illinois - Toxic Air Contaminants | Present |
| New York - Reporting of Releases Part 597 - List of Hazardous Substances: | Not Listed. |
| Benzene | |
| Louisiana Right-To-Know: | Not Listed. |
| California Proposition 65: | Carcinogen, initial date 2/27/87 Developmental toxicity, initial date 12/26/97 Male reproductive toxicity, initial date 12/26/97 |
| New Jersey Right-To-Know: | SN 0197 |
| Pennsylvania Right-To-Know: | Environmental hazard; Special hazardous substance |
| Massachusetts Right-To Know: | Carcinogen; Extraordinarily hazardous |
| Florida Substance List: | Not Listed. |
| Rhode Island Right-To-Know: | Toxic (skin); Flammable (skin); Carcinogen (skin) |
| Michigan Critical Materials Register List: | 100 lb Annual usage threshold |
| Massachusetts Extraordinarily Hazardous Substances: | Carcinogen; Extraordinarily hazardous |
| California - Regulated Carcinogens: | Not Listed. |
| Pennsylvania RTK - Special Hazardous Substances: | Present |
| New Jersey - Special Hazardous Substances: | Carcinogen; Flammable - third degree; Mutagen |
| New Jersey - Environmental Hazardous Substances List: | SN 0197 TPQ: 500 lb |

| | |
|---|--|
| Illinois - Toxic Air Contaminants | Present |
| New York - Reporting of Releases Part 597 - List of Hazardous Substances: | 10 lb RQ (air); 1 lb RQ (land/water) |
| n-Hexane | |
| Louisiana Right-To-Know: | Not Listed. |
| California Proposition 65: | Not Listed. |
| New Jersey Right-To-Know: | SN 1340 |
| Pennsylvania Right-To-Know: | Present |
| Massachusetts Right-To Know: | Present |
| Florida Substance List: | Not Listed. |
| Rhode Island Right-To-Know: | Toxic; Flammable |
| Michigan Critical Materials Register List: | Not Listed. |
| Massachusetts Extraordinarily Hazardous Substances: | Not Listed. |
| California - Regulated Carcinogens: | Not Listed. |
| Pennsylvania RTK - Special Hazardous Substances: | Not Listed. |
| New Jersey - Special Hazardous Substances: | Flammable - third degree |
| New Jersey - Environmental Hazardous Substances List: | SN 1340 TPQ: 500 lb |
| Illinois - Toxic Air Contaminants | Present |
| New York - Reporting of Releases Part 597 - List of Hazardous Substances: | 1 lb RQ (air); 1 lb RQ (land/water) |
| Ethylbenzene | |
| Louisiana Right-To-Know: | Not Listed. |
| California Proposition 65: | Carcinogen, initial date 6/11/04 |
| New Jersey Right-To-Know: | SN 0851 |
| Pennsylvania Right-To-Know: | Environmental hazard |
| Massachusetts Right-To Know: | Present |
| Florida Substance List: | Not Listed. |
| Rhode Island Right-To-Know: | Toxic; Flammable |
| Michigan Critical Materials Register List: | Not Listed. |
| Massachusetts Extraordinarily Hazardous Substances: | Not Listed. |
| California - Regulated Carcinogens: | Not Listed. |
| Pennsylvania RTK - Special Hazardous Substances: | Not Listed. |
| New Jersey - Special Hazardous Substances: | Carcinogen; flammable - Third degree |
| New Jersey - Environmental Hazardous Substances List: | SN 0851 TPQ: 500 lb |
| Illinois - Toxic Air Contaminants | Present |
| New York - Reporting of Releases Part 597 - List of Hazardous Substances: | 1000 lb RQ (air); 1 lb RQ (land/water) |
| Naphthalene | |
| Louisiana Right-To-Know: | Not Listed. |
| California Proposition 65: | Carcinogen, initial date 4/19/02 |
| New Jersey Right-To-Know: | SN 1322 SN 3758 |
| Pennsylvania Right-To-Know: | Environmental hazard Present (particulate) |
| Massachusetts Right-To Know: | Present |
| Florida Substance List: | Not Listed. |
| Rhode Island Right-To-Know: | Toxic; Flammable |
| Michigan Critical Materials Register List: | Not Listed. |
| Massachusetts Extraordinarily Hazardous Substances: | Not Listed. |
| California - Regulated Carcinogens: | Not Listed. |
| Pennsylvania RTK - Special Hazardous Substances: | Not Listed. |
| New Jersey - Special Hazardous Substances: | Carcinogen |
| New Jersey - Environmental Hazardous Substances List: | SN 1322 TPQ: 500 lb (Reportable at the de minimis quantity of >0.1%) |
| Illinois - Toxic Air Contaminants | Present |
| New York - Reporting of Releases Part 597 - List of Hazardous Substances: | 100 lb RQ (air); 1 lb RQ (land/water) |

Canada DSL/NDSL Inventory: This product and/or its components are listed either on the Domestic Substances List (DSL) or are exempt.

Canadian Regulatory Information: "This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the (M)SDS contains all the information required by the Controlled Products Regulations."

| Name | Canada - WHMIS: Classifications of Substances: | Canada - WHMIS: Ingredient Disclosure: |
|------------------------|--|--|
| Gasoline | B2,D2A,D2B | 0.1% |
| Toluene | B2,D2A,D2B | 0.1% |
| Xylene (mixed isomers) | B2,D2A,D2B | m-, o-isomers 1.0%; p-isomer 0.1% |
| 1,2,4-Trimethylbenzene | B3 | 1 |
| Benzene | B2,D2A,D2B | 0.1% |
| n-Hexane | B2,D2A,D2B | 1% |
| Ethylbenzene | B2,D2A,D2B | 0.1% |
| Naphthalene | B4,D2A | 0.1% |



NOTE: Not Applicable.

16. OTHER INFORMATION

Prepared By Toxicology and Product Safety
Revision Date: 05/14/2015

Revision Note:

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information is intended as guidance for safe handling, use, processing, storage, transportation, accidental release, clean-up and disposal and is not considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

1406

Section 1. Identification

Product name : KRYLON® Metallic Spray Paint
Bright Silver

Product code : 1406

Other means of identification : Not available.

Product type : Aerosol.

Relevant identified uses of the substance or mixture and uses advised against

Paint or paint related material.

Manufacturer : Krylon Products Group
101 W. Prospect Avenue
Cleveland, OH 44115

Emergency telephone number of the company : US / Canada: (216) 566-2917
Mexico: SETIQ 800-00-214-00 / 55-5559-1588 Available 24 hours and 365 days a year

Product Information Telephone Number : US / Canada: (800) 457-9566
Mexico: Not Available

Regulatory Information Telephone Number : US / Canada: (216) 566-2902
Mexico: Not Available

Transportation Emergency Telephone Number : US / Canada: (216) 566-2917
Mexico: SETIQ 800-00-214-00 / 55-5559-1588 Available 24 hours and 365 days a year

Section 2. Hazards identification


OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE AEROSOLS - Category 1
GASES UNDER PRESSURE - Compressed gas
SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A
CARCINOGENICITY - Category 2
TOXIC TO REPRODUCTION - Category 2
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2
ASPIRATION HAZARD - Category 1

Percentage of the mixture consisting of ingredient(s) of unknown acute toxicity: 40.3% (oral), 48.5% (dermal), 40.3% (inhalation) ▲

GHS label elements

Hazard pictograms

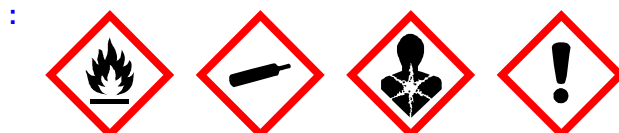

Signal word : Danger

Date of issue/Date of revision : 11/10/2021

Date of previous issue : 9/18/2021

Version : 18

1/19

1406 KRYLON® Metallic Spray Paint
Bright Silver

SHW-85-NA-GHS-US

2920

Section 2. Hazards identification

- Hazard statements** : Extremely flammable aerosol.
Contains gas under pressure; may explode if heated.
May be fatal if swallowed and enters airways.
Causes serious eye irritation.
May cause respiratory irritation.
May cause drowsiness or dizziness.
Suspected of causing cancer.
Suspected of damaging fertility or the unborn child.
May cause damage to organs through prolonged or repeated exposure.
- Precautionary statements**
- General** : Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.
- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves, protective clothing and eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Use only outdoors or in a well-ventilated area. Do not breathe dust or mist. Wash thoroughly after handling. Pressurized container: Do not pierce or burn, even after use.
- Response** : IF exposed or concerned: Get medical advice or attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor if you feel unwell. IF SWALLOWED: Immediately call a POISON CENTER or doctor. Do NOT induce vomiting. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice or attention.
- Storage** : Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Keep container tightly closed.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Supplemental label elements** DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Please refer to the SDS for additional information. Keep out of reach of children. Keep upright in a cool, dry place. Do not discard empty can in trash compactor.
- Hazards not otherwise classified** : DANGER: Rags, steel wool, other waste soaked with this product, and sanding residue may spontaneously catch fire if improperly discarded. Immediately place rags, steel wool, other waste soaked with this product, and sanding residue in a sealed, water-filled, metal container. Dispose of in accordance with local fire regulations.

Section 3. Composition/information on ingredients

- Substance/mixture** : Mixture
- Other means of identification** : Not available.
- CAS number/other identifiers**

Section 3. Composition/information on ingredients

| Ingredient name | % by weight | CAS number |
|--------------------------------------|-------------|------------|
| Acetone | ≥25 - ≤50 | 67-64-1 |
| Propane | ≥10 - ≤25 | 74-98-6 |
| Lt. Aliphatic Hydrocarbon Solvent | ≥10 - ≤25 | 64742-89-8 |
| Aluminum | ≤10 | 7429-90-5 |
| Toluene | ≤6.4 | 108-88-3 |
| Xylene, mixed isomers | ≤3.5 | 1330-20-7 |
| Light Aromatic Hydrocarbons | ≤3 | 64742-95-6 |
| Hydrotreated Heavy Petroleum Naphtha | ≤3 | 64742-48-9 |
| Hydrotreated Heavy Petroleum Naphtha | <1 | 64742-48-9 |
| Ethylbenzene | <1 | 100-41-4 |

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Get medical attention immediately. Call a poison center or physician. Wash out mouth with water. Remove dentures if any. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Aspiration hazard if swallowed. Can enter lungs and cause damage. Do not induce vomiting. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Over-exposure signs/symptoms

Section 4. First aid measures

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Skin contact** : Adverse symptoms may include the following:
reduced fetal weight
increase in fetal deaths
skeletal malformations
- Ingestion** : Adverse symptoms may include the following:
nausea or vomiting
reduced fetal weight
increase in fetal deaths
skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Extremely flammable aerosol. Runoff to sewer may create fire or explosion hazard. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Gas may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back, causing fire or explosion. Bursting aerosol containers may be propelled from a fire at high speed.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
metal oxide/oxides

Section 5. Fire-fighting measures

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. In the case of aerosols being ruptured, care should be taken due to the rapid escape of the pressurized contents and propellant. If a large number of containers are ruptured, treat as a bulk material spillage according to the instructions in the clean-up section. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not swallow. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous.

Section 7. Handling and storage

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Protect from sunlight. Store locked up. Eliminate all ignition sources. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits (OSHA United States)

| Ingredient name | CAS # | Exposure limits |
|---|-------------------------|---|
| Acetone | 67-64-1 | ACGIH TLV (United States, 1/2021). TWA: 250 ppm 8 hours. STEL: 500 ppm 15 minutes. NIOSH REL (United States, 10/2020). TWA: 250 ppm 10 hours. TWA: 590 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 2400 mg/m ³ 8 hours. |
| Propane | 74-98-6 | NIOSH REL (United States, 10/2020). TWA: 1000 ppm 10 hours. TWA: 1800 mg/m ³ 10 hours. OSHA PEL (United States, 5/2018). TWA: 1000 ppm 8 hours. TWA: 1800 mg/m ³ 8 hours. ACGIH TLV (United States, 1/2021). Oxygen Depletion [Asphyxiant]. Explosive potential. None. |
| Lt. Aliphatic Hydrocarbon Solvent Aluminum | 64742-89-8 7429-90-5 | NIOSH REL (United States, 10/2020). TWA: 5 mg/m ³ 10 hours. Form: Respirable fraction TWA: 10 mg/m ³ 10 hours. Form: Total OSHA PEL (United States, 5/2018). TWA: 5 mg/m ³ , (as Al) 8 hours. Form: Respirable fraction TWA: 15 mg/m ³ , (as Al) 8 hours. Form: Total dust ACGIH TLV (United States, 1/2021). TWA: 1 mg/m ³ 8 hours. Form: Respirable fraction |
| Toluene | 108-88-3 | OSHA PEL Z2 (United States, 2/2013). TWA: 200 ppm 8 hours. CEIL: 300 ppm AMP: 500 ppm 10 minutes. NIOSH REL (United States, 10/2020). TWA: 100 ppm 10 hours. TWA: 375 mg/m ³ 10 hours. STEL: 150 ppm 15 minutes. STEL: 560 mg/m ³ 15 minutes. |

Section 8. Exposure controls/personal protection

| | | |
|--------------|-----------|--|
| Toluene | 108-88-3 | <p>TWA: 1000 ppm 8 hours. CA British Columbia Provincial (Canada, 1/2021). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> <p>CA Ontario Provincial (Canada, 6/2019). Oxygen Depletion [Asphyxiant]. Explosive potential.</p> <p>CA Alberta Provincial (Canada, 6/2018). Absorbed through skin. 8 hrs OEL: 50 ppm 8 hours. 8 hrs OEL: 188 mg/m³ 8 hours.</p> <p>CA British Columbia Provincial (Canada, 1/2021). TWA: 20 ppm 8 hours.</p> <p>CA Ontario Provincial (Canada, 6/2019). TWA: 20 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 7/2019). Absorbed through skin. TWAEV: 50 ppm 8 hours. TWAEV: 188 mg/m³ 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). Absorbed through skin. STEL: 60 ppm 15 minutes. TWA: 50 ppm 8 hours.</p> |
| Xylene | 1330-20-7 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 15 min OEL: 651 mg/m³ 15 minutes. 15 min OEL: 150 ppm 15 minutes. 8 hrs OEL: 434 mg/m³ 8 hours.</p> <p>CA British Columbia Provincial (Canada, 1/2021). TWA: 100 ppm 8 hours. STEL: 150 ppm 15 minutes.</p> <p>CA Quebec Provincial (Canada, 7/2019). TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m³ 8 hours. STEV: 150 ppm 15 minutes. STEV: 651 mg/m³ 15 minutes.</p> <p>CA Ontario Provincial (Canada, 6/2019). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> <p>CA Saskatchewan Provincial (Canada, 7/2013). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours.</p> |
| Ethylbenzene | 100-41-4 | <p>CA Alberta Provincial (Canada, 6/2018). 8 hrs OEL: 100 ppm 8 hours. 8 hrs OEL: 434 mg/m³ 8 hours. 15 min OEL: 543 mg/m³ 15 minutes. 15 min OEL: 125 ppm 15 minutes.</p> <p>CA British Columbia Provincial (Canada, 1/2021). TWA: 20 ppm 8 hours.</p> <p>CA Ontario Provincial (Canada, 6/2019). TWA: 20 ppm 8 hours.</p> <p>CA Quebec Provincial (Canada, 7/2019).</p> |

Section 8. Exposure controls/personal protection

| | | |
|--|--|---|
| | | TWAEV: 100 ppm 8 hours. TWAEV: 434 mg/m ³ 8 hours. STEV: 125 ppm 15 minutes. STEV: 543 mg/m ³ 15 minutes. CA Saskatchewan Provincial (Canada, 7/2013). STEL: 125 ppm 15 minutes. TWA: 100 ppm 8 hours. |
|--|--|---|

Occupational exposure limits (Mexico)

| | CAS # | Exposure limits |
|-----------------------|--------------|--|
| Acetone | 67-64-1 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 500 ppm 8 hours. STEL: 750 ppm 15 minutes. |
| Propane | 74-98-6 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 1000 ppm 8 hours. |
| Toluene | 108-88-3 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |
| Xylene, mixed isomers | 1330-20-7 | NOM-010-STPS-2014 (Mexico, 4/2016). STEL: 150 ppm 15 minutes. TWA: 100 ppm 8 hours. |
| Ethylbenzene | 100-41-4 | NOM-010-STPS-2014 (Mexico, 4/2016). TWA: 20 ppm 8 hours. |

Appropriate engineering controls : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Section 8. Exposure controls/personal protection

- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use.

Section 9. Physical and chemical properties

The conditions of measurement of all properties are at standard temperature and pressure unless otherwise indicated.

Appearance

- Physical state** : Liquid.
- Color** : Not available.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : Not applicable.
- Melting point/freezing point** : Not available.
- Boiling point, initial boiling point, and boiling range** : Not available.
- Flash point** : Closed cup: -29°C (-20.2°F) [Pensky-Martens Closed Cup]
- Evaporation rate** : 5.6 (butyl acetate = 1)
- Flammability** : Not available.
- Lower and upper explosion limit/flammability limit** : Lower: 0.7%
Upper: 12.8%
- Vapor pressure** : 101.3 kPa (760 mm Hg)
- Relative vapor density** : 1.55 [Air = 1]
- Relative density** : 0.76
- Solubility** : Not available.
- Partition coefficient: n-octanol/water** : Not applicable.
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.
- Viscosity** : Kinematic (40°C (104°F)): <20.5 mm²/s (<20.5 cSt)
- Molecular weight** : Not applicable.
- Aerosol product**
 - Type of aerosol** : Spray
 - Heat of combustion** : 30.659 kJ/g

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : Avoid all possible sources of ignition (spark or flame).
- Incompatible materials** : No specific data.
- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

| Product/ingredient name | Result | Species | Dose | Exposure |
|--------------------------------------|-----------------------|---------|------------------------|----------|
| Acetone | LD50 Oral | Rat | 5800 mg/kg | - |
| Toluene | LC50 Inhalation Vapor | Rat | 49 g/m ³ | 4 hours |
| Xylene, mixed isomers | LD50 Oral | Rat | 636 mg/kg | - |
| | LC50 Inhalation Gas. | Rat | 6700 ppm | 4 hours |
| Light Aromatic Hydrocarbons | LD50 Oral | Rat | 4300 mg/kg | - |
| | LD50 Oral | Rat | 8400 mg/kg | - |
| Hydrotreated Heavy Petroleum Naphtha | LC50 Inhalation Vapor | Rat | 8500 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | >6 g/kg | - |
| Hydrotreated Heavy Petroleum Naphtha | LC50 Inhalation Vapor | Rat | 8500 mg/m ³ | 4 hours |
| | LD50 Oral | Rat | >6 g/kg | - |
| Ethylbenzene | LD50 Oral | Rat | >6 g/kg | - |
| | LD50 Dermal | Rabbit | >5000 mg/kg | - |
| | LD50 Oral | Rat | 3500 mg/kg | - |

Irritation/Corrosion

| Product/ingredient name | Result | Species | Score | Exposure | Observation |
|-------------------------|--------------------------|---------|-------|-----------------|-------------|
| Acetone | Eyes - Mild irritant | Human | - | 186300 ppm | - |
| | Eyes - Mild irritant | Rabbit | - | 10 uL | - |
| | Eyes - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |
| Toluene | Eyes - Severe irritant | Rabbit | - | 20 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 395 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 0.5 minutes | - |
| | Eyes - Mild irritant | Rabbit | - | 100 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 870 ug | - |
| | Skin - Mild irritant | Pig | - | 24 hours 2 mg | - |
| Toluene | Skin - Mild irritant | Rabbit | - | 24 hours 250 uL | - |
| | Skin - Mild irritant | Rabbit | - | 435 mg | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 20 mg | - |

Section 11. Toxicological information

| | | | | | |
|-----------------------------|--------------------------|--------|---|-----------------|---|
| Xylene, mixed isomers | Skin - Moderate irritant | Rabbit | - | 500 mg | - |
| | Eyes - Mild irritant | Rabbit | - | 87 mg | - |
| | Eyes - Severe irritant | Rabbit | - | 24 hours 5 mg | - |
| | Skin - Mild irritant | Rat | - | 8 hours 60 uL | - |
| | Skin - Moderate irritant | Rabbit | - | 24 hours 500 mg | - |
| Light Aromatic Hydrocarbons | Skin - Moderate irritant | Rabbit | - | 100 % | - |
| | Eyes - Mild irritant | Rabbit | - | 24 hours 100 uL | - |
| Ethylbenzene | Eyes - Severe irritant | Rabbit | - | 500 mg | - |
| | Skin - Mild irritant | Rabbit | - | 24 hours 15 mg | - |

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

| Product/ingredient name | OSHA | IARC | NTP |
|-------------------------|------|------|-----|
| Toluene | - | 3 | - |
| Xylene, mixed isomers | - | 3 | - |
| Ethylbenzene | - | 2B | - |

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

| Name | Category | Route of exposure | Target organs |
|--------------------------------------|------------|-------------------|------------------------------|
| Acetone | Category 3 | - | Respiratory tract irritation |
| Propane | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Lt. Aliphatic Hydrocarbon Solvent | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Toluene | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Xylene, mixed isomers | Category 3 | - | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |
| Light Aromatic Hydrocarbons | Category 3 | - | Respiratory tract irritation |
| Hydrotreated Heavy Petroleum Naphtha | Category 3 | - | Narcotic effects |
| | Category 3 | | Narcotic effects |
| | Category 3 | | Respiratory tract irritation |

Section 11. Toxicological information

| | | | |
|--------------|--|---|--|
| Ethylbenzene | Category 3 Category 3 Category 3 | - | Narcotic effects Respiratory tract irritation Narcotic effects |
|--------------|--|---|--|

Specific target organ toxicity (repeated exposure)

| Name | Category | Route of exposure | Target organs |
|--------------------------------------|------------|-------------------|---------------|
| Acetone | Category 2 | - | - |
| Propane | Category 2 | - | - |
| Lt. Aliphatic Hydrocarbon Solvent | Category 2 | - | - |
| Toluene | Category 2 | - | - |
| Xylene, mixed isomers | Category 2 | - | - |
| Light Aromatic Hydrocarbons | Category 2 | - | - |
| Hydrotreated Heavy Petroleum Naphtha | Category 2 | - | - |
| Ethylbenzene | Category 2 | - | - |

Aspiration hazard

| Name | Result |
|--------------------------------------|--------------------------------|
| Propane | ASPIRATION HAZARD - Category 1 |
| Lt. Aliphatic Hydrocarbon Solvent | ASPIRATION HAZARD - Category 1 |
| Toluene | ASPIRATION HAZARD - Category 1 |
| Xylene, mixed isomers | ASPIRATION HAZARD - Category 1 |
| Light Aromatic Hydrocarbons | ASPIRATION HAZARD - Category 1 |
| Hydrotreated Heavy Petroleum Naphtha | ASPIRATION HAZARD - Category 1 |
| Hydrotreated Heavy Petroleum Naphtha | ASPIRATION HAZARD - Category 1 |
| Ethylbenzene | ASPIRATION HAZARD - Category 1 |

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness or dizziness. May cause respiratory irritation.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
reduced fetal weight
increase in fetal deaths
skeletal malformations

Section 11. Toxicological information

Skin contact : Adverse symptoms may include the following:
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Ingestion : Adverse symptoms may include the following:
 nausea or vomiting
 reduced fetal weight
 increase in fetal deaths
 skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : May cause damage to organs through prolonged or repeated exposure.

Carcinogenicity : Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : Suspected of damaging the unborn child.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

| Route | ATE value |
|---------------------|----------------|
| Oral | 5609.19 mg/kg |
| Dermal | 16261.24 mg/kg |
| Inhalation (gases) | 114954.51 ppm |
| Inhalation (vapors) | 252.77 mg/l |

Section 12. Ecological information

Toxicity

Section 12. Ecological information

| Product/ingredient name | Result | Species | Exposure |
|-----------------------------------|--------------------------------------|---|----------|
| Acetone | Acute EC50 7200000 µg/l Fresh water | Algae - Selenastrum sp. | 96 hours |
| | Acute LC50 4.42589 ml/L Marine water | Crustaceans - Acartia tonsa - Copepodid | 48 hours |
| | Acute LC50 7460000 µg/l Fresh water | Daphnia - Daphnia cucullata | 48 hours |
| | Acute LC50 5600 ppm Fresh water | Fish - Poecilia reticulata | 96 hours |
| | Chronic NOEC 4.95 mg/l Marine water | Algae - Ulva pertusa | 96 hours |
| | Chronic NOEC 0.016 ml/L Fresh water | Crustaceans - Daphniidae | 21 days |
| | Chronic NOEC 0.1 ml/L Fresh water | Daphnia - Daphnia magna - Neonate | 21 days |
| Lt. Aliphatic Hydrocarbon Solvent | Chronic NOEC 5 µg/l Marine water | Fish - Gasterosteus aculeatus - Larvae | 42 days |
| | Acute LC50 >100000 ppm Fresh water | Fish - Oncorhynchus mykiss | 96 hours |
| Aluminum | Acute LC50 38000 µg/l Fresh water | Daphnia - Daphnia magna | 48 hours |
| | Acute LC50 120 µg/l Fresh water | Fish - Oncorhynchus mykiss - Embryo | 96 hours |
| | Chronic NOEC 9 mg/l Fresh water | Aquatic plants - Ceratophyllum demersum | 3 days |
| Toluene | Acute EC50 >433 ppm Marine water | Algae - Skeletonema costatum | 96 hours |
| | Acute EC50 11600 µg/l Fresh water | Crustaceans - Gammarus pseudolimnaeus - Adult | 48 hours |
| | Acute EC50 6000 µg/l Fresh water | Daphnia - Daphnia magna - Juvenile (Fledgling, Hatchling, Weanling) | 48 hours |
| | Acute LC50 5500 µg/l Fresh water | Fish - Oncorhynchus kisutch - Fry | 96 hours |
| Xylene, mixed isomers | Chronic NOEC 1000 µg/l Fresh water | Daphnia - Daphnia magna | 21 days |
| | Acute LC50 8500 µg/l Marine water | Crustaceans - Palaemonetes pugio | 48 hours |
| Ethylbenzene | Acute LC50 13400 µg/l Fresh water | Fish - Pimephales promelas | 96 hours |
| | Acute EC50 4900 µg/l Marine water | Algae - Skeletonema costatum | 72 hours |
| | Acute EC50 7700 µg/l Marine water | Algae - Skeletonema costatum | 96 hours |
| | Acute EC50 6.53 mg/l Marine water | Crustaceans - Artemia sp. - Nauplii | 48 hours |
| | Acute EC50 2.93 mg/l Fresh water | Daphnia - Daphnia magna - Neonate | 48 hours |
| | Acute LC50 4200 µg/l Fresh water | Fish - Oncorhynchus mykiss | 96 hours |

Persistence and degradability

| Product/ingredient name | Aquatic half-life | Photolysis | Biodegradability |
|--------------------------------------|-------------------|------------|------------------|
| Acetone | - | - | Readily |
| Toluene | - | - | Readily |
| Xylene, mixed isomers | - | - | Readily |
| Light Aromatic Hydrocarbons | - | - | Readily |
| Hydrotreated Heavy Petroleum Naphtha | - | - | Readily |
| Ethylbenzene | - | - | Readily |

Bioaccumulative potential

Section 12. Ecological information

| Product/ingredient name | LogP _{ow} | BCF | Potential |
|--------------------------------------|--------------------|-------------|-----------|
| Lt. Aliphatic Hydrocarbon Solvent | - | 10 to 2500 | high |
| Toluene | - | 90 | low |
| Xylene, mixed isomers | - | 8.1 to 25.9 | low |
| Light Aromatic Hydrocarbons | - | 10 to 2500 | high |
| Hydrotreated Heavy Petroleum Naphtha | - | 10 to 2500 | high |
| Hydrotreated Heavy Petroleum Naphtha | - | 10 to 2500 | high |

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

| | DOT Classification | TDG Classification | Mexico Classification | IATA | IMDG |
|-----------------------------------|--|--|--|--|--|
| UN number | UN1950 | UN1950 | UN1950 | UN1950 | UN1950 |
| UN proper shipping name | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS | AEROSOLS |
| Transport hazard class(es) | 2.1  | 2.1  | 2.1  | 2.1  | 2.1  |
| Packing group | - | - | - | - | - |
| Environmental hazards | No. | No. | No. | No. | No. |
| Additional information | - | Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: | - | - | Emergency schedules F-D, S-U |

Date of issue/Date of revision : 11/10/2021

Date of previous issue : 9/18/2021

Version : 18

16/19

1406

KRYLON® Metallic Spray Paint
Bright Silver

SHW-85-NA-GHS-US

2935

Section 14. Transport information

| | | | | | |
|--|---|---|---|---|---|
| | <u>ERG No.</u> 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | <u>ERG No.</u> 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | <u>ERG No.</u> 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | <u>ERG No.</u> 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. | <u>ERG No.</u> 126 Dependent upon container size, this product may ship under the Limited Quantity shipping exception. |
|--|---|---|---|---|---|

Special precautions for user : Multi-modal shipping descriptions are provided for informational purposes and do not consider container sizes. The presence of a shipping description for a particular mode of transport (sea, air, etc.), does not indicate that the product is packaged suitably for that mode of transport. All packaging must be reviewed for suitability prior to shipment, and compliance with the applicable regulations is the sole responsibility of the person offering the product for transport. People loading and unloading dangerous goods must be trained on all of the risks deriving from the substances and on all actions in case of emergency situations.

Transport in bulk according to IMO instruments : Not available.

Proper shipping name : Not available.

Section 15. Regulatory information

SARA 313
SARA 313 (40 CFR 372.45) supplier notification can be found on the Environmental Data Sheet.

California Prop. 65
WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

International regulations
International lists : **Australia inventory (AIC):** Not determined.
China inventory (IECSC): Not determined.
Japan inventory (CSCL): Not determined.
Japan inventory (ISHL): Not determined.
Korea inventory (KECI): Not determined.
New Zealand Inventory of Chemicals (NZIoC): Not determined.
Philippines inventory (PICCS): Not determined.
Taiwan Chemical Substances Inventory (TCSI): Not determined.
Thailand inventory: Not determined.
Turkey inventory: Not determined.
Vietnam inventory: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

| | | |
|------------------|---|---|
| Health | * | 3 |
| Flammability | | 4 |
| Physical hazards | | 3 |
| | | |

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

Section 16. Other information

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

Procedure used to derive the classification

| Classification | Justification |
|--|-----------------------|
| FLAMMABLE AEROSOLS - Category 1 | On basis of test data |
| GASES UNDER PRESSURE - Compressed gas | Calculation method |
| SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A | Calculation method |
| CARCINOGENICITY - Category 2 | Calculation method |
| TOXIC TO REPRODUCTION - Category 2 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Respiratory tract irritation) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3 | Calculation method |
| SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2 | Calculation method |
| ASPIRATION HAZARD - Category 1 | Calculation method |

History

Date of printing : 11/10/2021

Date of issue/Date of revision : 11/10/2021

Date of previous issue : 9/18/2021

Version : 18

Key to abbreviations : ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 N/A = Not available
 SGG = Segregation Group
 UN = United Nations

 Indicates information that has changed from previously issued version.

Notice to reader

It is recommended that each customer or recipient of this Safety Data Sheet (SDS) study it carefully and consult resources, as necessary or appropriate, to become aware of and understand the data contained in this SDS and any hazards associated with the product. This information is provided in good faith and believed to be accurate as of the effective date herein. However, no warranty, express or implied, is given. The information presented here applies only to the product as shipped. The addition of any material can change the composition, hazards and risks of the product. Products shall not be repackaged, modified, or tinted except as specifically instructed by the manufacturer, including but not limited to the incorporation of products not specified by the manufacturer, or the use or addition of products in proportions not specified by the manufacturer. Regulatory requirements are subject to change and may differ between various locations and jurisdictions. The customer/buyer/user is responsible to ensure that his activities comply with all country, federal, state, provincial or local laws. The conditions for use of the product are not under the control of the manufacturer; the customer/buyer/user is responsible to determine the conditions necessary for the safe use of this product. The customer/buyer/user should not use the product for any purpose other than the purpose shown in the applicable section of this SDS without first referring to the supplier and obtaining written handling instructions. Due to the proliferation of sources for information such as manufacturer-specific SDS, the manufacturer cannot be responsible for SDSs obtained from any other source.

